ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT AND INDUSTRY CANADA RSS 247

OF

Product Name:	**Clickshare CSE-800**
Brand Name:	**Barco**
Model No.:	**R9861580**
Model Difference:	**N/A**
FCC ID:	**2AAED-R9861580**
IC:	**21559-R9861580**
Report No.:	**E2/2016/B0013**
Issue Date:	**Jan. 25, 2017**
FCC Rule Part:	**§15.247, Cat: DTS**
IC Rule Part:	**RSS-247 issue 1 :2015**
FCC Prepared for:	**Barco NV Barco NV President Kennedypark35, 8500 Kortrijk, Belgium**
IC Prepared for:	**Barco Visual Solutions Inc 200 Mississauga ON L4V 1W1 Canada**
Prepared by:	**SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333**

Testing Laboratory
0513

Note: *This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.*

VERIFICATION OF COMPLIANCE

FCC Applicant:	Barco NV Barco NV President Kennedypark35, 8500 Kortrijk, Belgium
IC Applicant:	Barco Visual Solutions Inc 925 Airport Rd Suite 200 Mississauga ON L4V 1W1 Canada
Product Name:	Clickshare CSE-800
Brand Name:	Barco
Model No.:	R9861580
Model Difference:	N/A
FCC ID:	2AAED-R9861580
IC:	21559-R9861580
File Number:	E2/2016/B0013
Date of Test:	Dec. 23, 2016~ Jan.03, 2017
Date of EUT Received:	Nov. 09, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jerry Lu	***Date:***	Jan. 25, 2017
	Jerry Lu / Sr. Engineer		
Prepared By:	Allen Tsai	***Date:***	Jan. 25, 2017
	Allen Tsai / Sr.Engineer		
Approved By:	Jim Chang	***Date:***	Jan. 25, 2017
	Jim Chang / Asst. Manager		

Revision History

Report Number	Revision	Description	Issue Date
E2/2016/B0013	Rev.00	Initial creation of document	Jan. 25, 2017

Table of Contents

1 GENERAL INFORMATION

1.1 Product description

General:

Product Name:	Clickshare CSE-800
Brand Name:	Barco
Model No.:	R9861580
Model Difference:	N/A
Product SW/HW version:	N/A/ Rev 4
Radio SW/HW version:	N/A/ N/A
Test SW Version:	N/A
RF power setting in TEST SW:	N/A
Power Supply:	230 VAC

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power / (EIRP)	Type of Emission	Modulation Technology
11b/g	2412-2462	11	b: 18.54 dBm b: 16.05 dBm (EIRP) g: 19.67 dBm g: 16.50 dBm (EIRP)	b: 14M1G1D g: 16M6D1D	DSSS, OFDM
11n	HT/VHT20 2412-2462	11	HT20:19.60 dBm (MIMO Chain 0+1) HT20: 16.53 dBm (MIMO Chain 0+1) (EIRP)	HT20:17M8D1D	OFDM
Antenna Designation:	Dipole Antenna, Antenna Gain: 2 dBi				
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM				
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 144.4Mbps				

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance

FCC KDB 662911 D01 Multiple Transmitter Output

Canada RSS-247 issue 1 May 2015

Canada RSS-Gen issue 4 Nov. 2014

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333

(TAF code 0513)

FCC Registration Numbers are: 735305

Canada Registration Number: 4620A-5 .

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

Offset:

= RF cable loss (dB)+ attenuation factor(dB) dB =13.9dB)

2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted (Antenna Port) Emission Configuration Emission

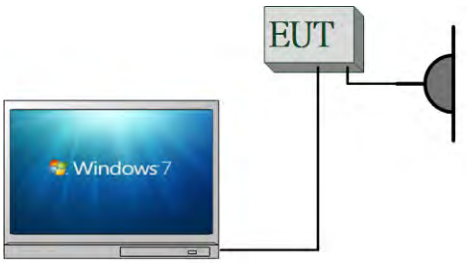

Fig 2-2 Conducted (AC power line) Configuration

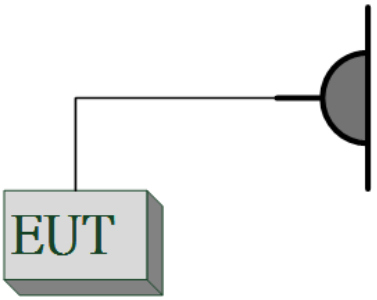

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L420	LR- 6MEX0	Shielded	Un-shielded

3 SUMMARY OF TEST RESULTS

FCC Rules / IC Rules	Description Of Test	Result
§15.207(a) RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3) RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2) RSS-247 §5.2 (1) RSS-Gen §6.6	6dB & 99% Emission Bandwidth	Compliant
§15.247(d) RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d) RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e) RSS-247 §5.2(2)	Power Spectral Density	Compliant
§15.203 §15.247(b) RSS- Gen §6.7 RSS- Gen §8.3	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n_HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

4.2 The Worst Test Modes and Channel Details

1. The EUT has been tested under operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11g	1 to 11	1,6,11	OFDM	54	MIMO

RADIATED EMISSION TEST (ABOVE 1 GHz)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11b	1 to 11	1, 6, 11	DSSS	11	MIMO
802.11g	1 to 11	1, 6, 11	OFDM	54	MIMO
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
802.11b	1 to 11	1, 6, 11	DSSS	11	MIMO
802.11g	1 to 11	1, 6, 11	OFDM	54	MIMO
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO

Directional gain (MIMO)

The Tx transmission to construct MIMO operation is cyclic delay diversity, and the following deduction to obtain the array gain of MIMO operation is based on the approach given by KDB 662911 D01.

Array gain = 3.01 dBi (peak spectral density, conducted spurious emission)

Gain that is combined with different magnitude of two antennas:

(ii) If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:

- Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain; or,

- $$DirectionalGain = 10 \cdot \log\left[\frac{\sum_{j=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right]$$

where

Each antenna is driven by no more than one spatial stream;
N_{SS} = the number of independent spatial streams of data;
N_{ANT} = the total number of antennas
$g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not;
G_k is the gain in dBi of the kth antenna.

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edge	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : **Vertical**)	9kHz-30MHz: +/-2.87dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty (Polarization : **Horizontal**)	9kHz-30MHz: +/-2.87dB
	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

6.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESCI 7	100950	12/08/2016	12/07/2017
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	02/07/2016	02/06/2017
LISN	Schwarzbeck	NSLK 8127	8127-648	03/11/2016	03/10/2017
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.

6.3 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

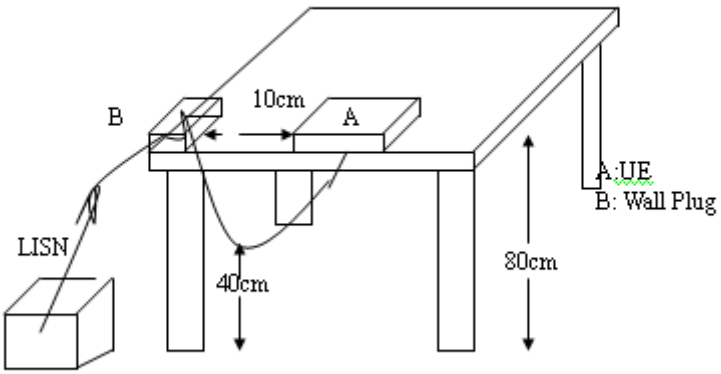

6.5 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Operation Mode:	operation mode	Test By:	Jerry

Site : Conduction Room
Limit: FCC Class B Conduction(QP)
Mode: CSE-800
Note:

Phase: *L1*
Power: AC 120V/60Hz

Temperature: 23 ℃
Humidity: 65 %

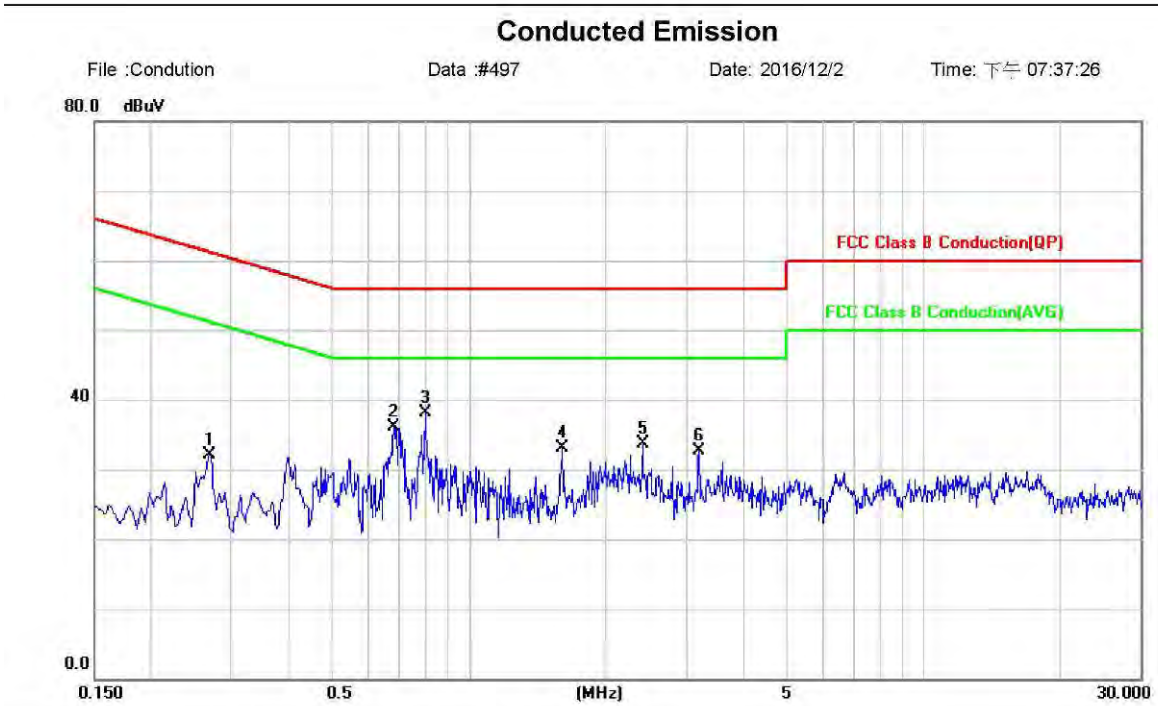

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2700	12.30	19.76	32.06	61.12	-29.06	peak	
2		0.6860	16.24	19.90	36.14	56.00	-19.86	peak	
3	*	0.8020	18.10	19.91	38.01	56.00	-17.99	peak	
4		1.6020	13.13	19.92	33.05	56.00	-22.95	peak	
5		2.4100	13.75	19.94	33.69	56.00	-22.31	peak	
6		3.2100	12.80	19.95	32.75	56.00	-23.25	peak	

Site : Conduction Room
Limit: FCC Class B Conduction(QP)
Mode: CSE-800
Note:

Phase: N
Power: AC 120V/60Hz

Temperature: 23 ℃
Humidity: 65 %

Conducted Emission

File :Condution Data :#498 Date: 2016/12/2 Time: 下午 07:38:13

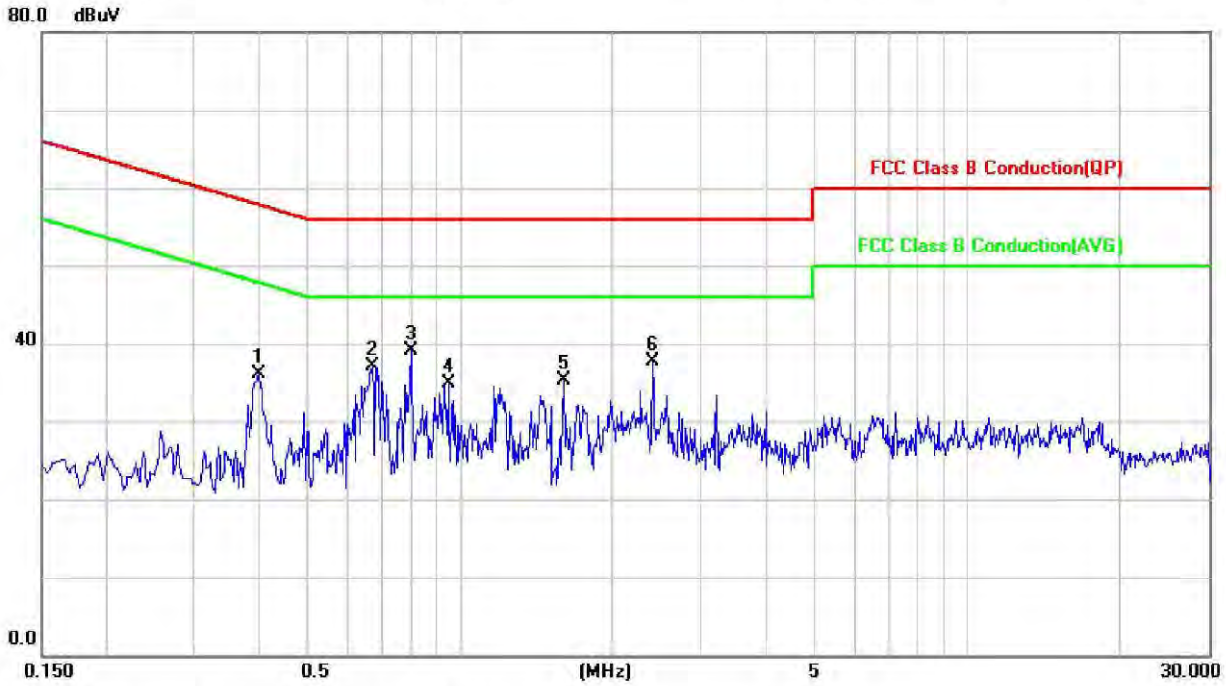

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4020	16.32	19.84	36.16	57.81	-21.65	peak	
2		0.6740	17.23	19.91	37.14	56.00	-18.86	peak	
3	*	0.8020	19.19	19.92	39.11	56.00	-16.89	peak	
4		0.9500	15.03	19.92	34.95	56.00	-21.05	peak	
5		1.6060	15.42	19.93	35.35	56.00	-20.65	peak	
6		2.4060	17.77	19.95	37.72	56.00	-18.28	peak	

7 DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)
802.11b	99.59	0.02
802.11g	97.25	0.12
802.11n_20	95.57	0.20

b = 99.59%, g = 97.25%,n_ht_20 = 95.57%,

Duty Cycle Factor: 10 * log(1/0.9959) = 0.02
Duty Cycle Factor: 10 * log(1/0.9725) = 0.12
Duty Cycle Factor: 10 * log(1/0.9557) = 0.2

7.1 DUTY CYCLE TEST SIGNAL Measurement Result

802.11 b

802.11 g

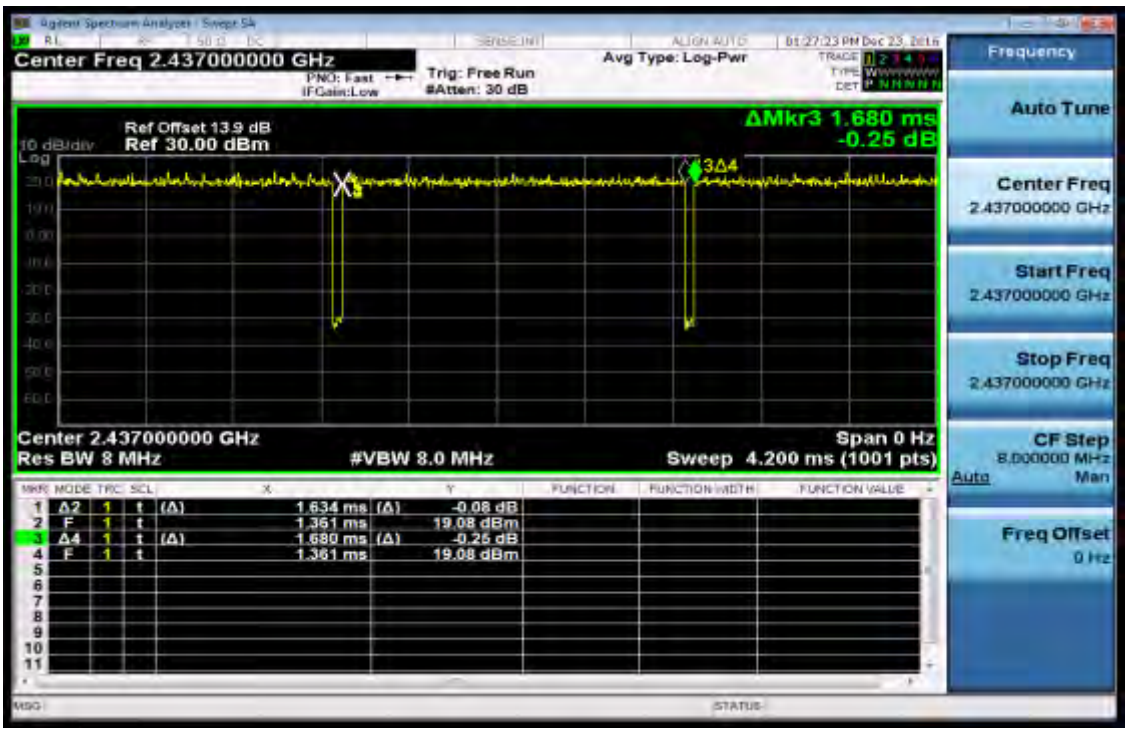

802.11 n_20 MHz

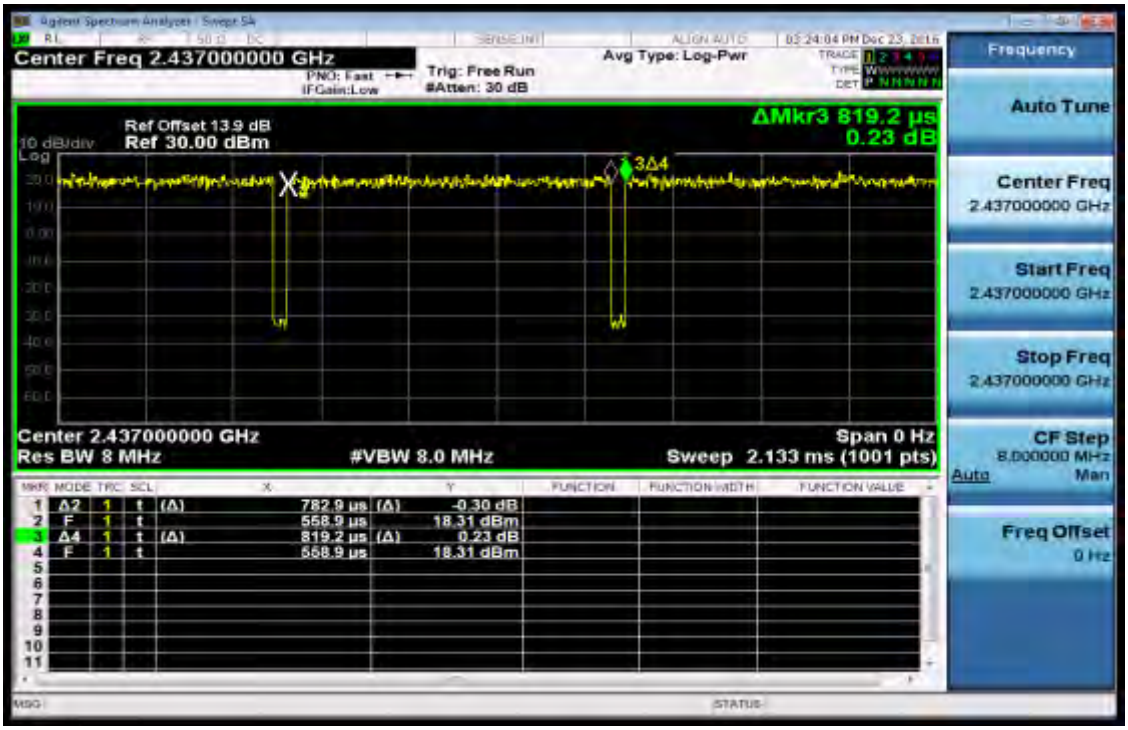

802.11 n_40 MHz

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

Per RSS-247 §5.4(4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Main Antenna Gain:	*2.00*	dBi
Aux1 Antenna Gain:	*2.00*	dBi
Aux2 Antenna Gain:	*0.00*	dBi
Aux3 Antenna Gain:	*0.00*	dBi
Number Antenna:	*2*	pcs
Limit:	*30*	dBm

The antenna gain is grater than 6dBi in MIMO mode the limit reduce as below:
Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

8.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1326001	06/23/2016	06/22/2017
Power Sensor	Anritsu	MA2411B	1315048	06/23/2016	06/22/2017
Power Sensor	Anritsu	MA2411B	1315049	06/23/2016	06/22/2017
Coaxial Cable 30cm	WOKEN	00100A1F1A 195C	RF01	12/12/2016	12/11/2017
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017

8.3 Test Set-up

Power Meter:

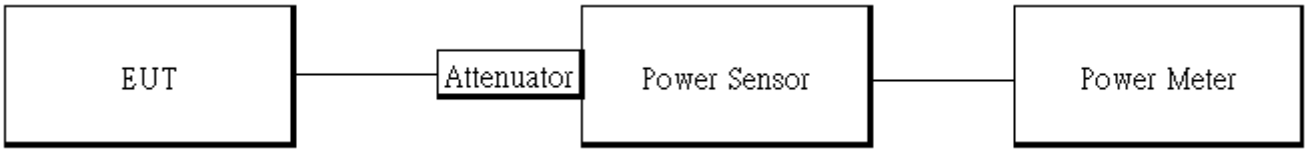

8.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

   Power Meter:

   It is used as the auxiliary test equipment to conduct the output power measurement.
4. Record the max. Reading as observed from Spectrum or Power Meter.

8.5 Measurement Result

802.11b_MIMO									
CH	Frequency (MHz)	Data Rate	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Total Peak Output Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	1	15.77	15.27	18.54	71.41	1 Watt =	30.00 dBm	PASS
6	2437	1	15.51	15.27	18.40	69.21	1 Watt =	30.00 dBm	PASS
11	2462	1	15.02	14.91	17.98	62.74	1 Watt =	30.00 dBm	PASS
802.11b_MIMO									
CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Output include tune up tolerance Power (dBm)	Max. Output include tune up tolerance Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	1	13.29	12.77	16.05	40.25	1 Watt =	30.00 dBm	PASS
6	2437	1	13.12	12.85	16.00	39.79	1 Watt =	30.00 dBm	PASS
11	2462	1	12.75	12.54	15.66	36.78	1 Watt =	30.00 dBm	PASS

802.11g_MIMO									
CH	Frequency (MHz)	Data Rate	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Total Peak Output Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	6	16.81	16.51	19.67	92.74	1 Watt =	30.00 dBm	PASS
6	2437	6	16.79	16.44	19.63	91.81	1 Watt =	30.00 dBm	PASS
11	2462	6	16.29	15.93	19.12	81.73	1 Watt =	30.00 dBm	PASS
802.11g_MIMO									
CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Output include tune up tolerance Power (dBm)	Max. Output include tune up tolerance Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	6	13.73	13.23	16.50	44.64	1 Watt =	30.00 dBm	PASS
6	2437	6	13.64	13.28	16.47	44.40	1 Watt =	30.00 dBm	PASS
11	2462	6	13.35	13.06	16.22	41.86	1 Watt =	30.00 dBm	PASS

802.11n_HT20M MIMO									
CH	Frequency (MHz)	Data Rate	Peak Output Power (dBm)		Total Peak Output Power (dBm)	Total Peak Output Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	MCS8	16.72	16.24	19.50	89.06	1 Watt = 30.00 dBm		PASS
6	2437	MCS8	16.83	16.34	19.60	91.25	1 Watt = 30.00 dBm		PASS
11	2462	MCS8	16.26	15.88	19.08	80.99	1 Watt = 30.00 dBm		PASS
802.11n_HT20M MIMO									
CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Output include tune up tolerance Power (dBm)	Max. Output include tune up tolerance Power (mW)	Limit		RESULT
			CH 0	CH 1					
1	2412	MCS8	13.69	13.17	16.45	44.14	1 Watt = 30.00 dBm		PASS
6	2437	MCS8	13.61	13.43	16.53	44.99	1 Watt = 30.00 dBm		PASS
11	2462	MCS8	13.25	12.97	16.12	40.95	1 Watt = 30.00 dBm		PASS

**** Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.***

EIRP

802.11b_MIMO

CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Avg. Output Power (dBm)	Total Peak Output Power (mW)	Antenna Gain (dBi)	EIRP (dBm)	Limit	RESULT
			CH 0	CH 1						
1	2412	1	13.29	12.77	16.05	40.25	5.01	21.06	4W= 36 dBm	PASS
6	2437	1	13.12	12.85	16.00	39.79	5.01	21.01	4W= 36 dBm	PASS
11	2462	1	12.75	12.54	15.66	36.78	5.01	20.67	4W= 36 dBm	PASS

802.11g_MIMO

CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Avg. Output Power (dBm)	Total Peak Output Power (mW)	Antenna Gain (dBi)	EIRP (dBm)	Limit	RESULT
			CH 0	CH 1						
1	2412	6	13.73	13.23	16.50	44.64	5.01	21.51	4W= 36 dBm	PASS
6	2437	6	13.64	13.28	16.47	44.40	5.01	21.48	4W= 36 dBm	PASS
11	2462	6	13.35	13.06	16.22	41.86	5.01	21.23	4W= 36 dBm	PASS

802.11n_HT20M MIMO

CH	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)		Avg. Output Power (dBm)	Total Peak Output Power (mW)	Antenna Gain (dBi)	EIRP (dBm)	Limit	RESULT
			CH 0	CH 1						
1	2412	MCS8	13.69	13.17	16.45	44.14	5.01	21.46	4W= 36 dBm	PASS
6	2437	MCS8	13.61	13.43	16.53	44.99	5.01	21.54	4W= 36 dBm	PASS
11	2462	MCS8	13.25	12.97	16.12	40.95	5.01	21.13	4W= 36 dBm	PASS

Note: EIRP = Average Power + Gain

9 6DB & 99% BANDWIDTH MEASUREMENT

9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017
Coaxial Cable 30cm	WOKEN	00100A1F1 A195C	RF01	12/12/2016	12/11/2017
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017

9.3 Test Set-up

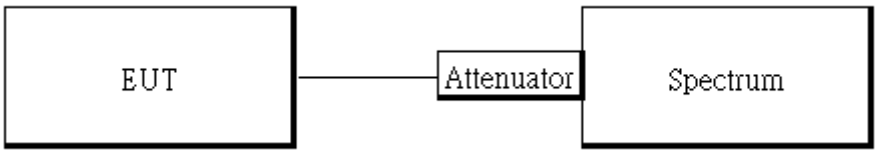

9.4 Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. For 6dB Bandwidth:

   Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
5. Mark the peak frequency and –6dB (upper and lower) frequency.
6. For 99% Bandwidth:

   Set the spectrum analyzer as RBW=1%, VBW = 3*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
7. Turn on the 99% bandwidth function, max reading.
8. Repeat above procedures until all frequency of interest measured was complete.

9.5 Measurement Result

6dB Bandwidth

802.11b Main

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	**10096**	> 500	PASS
2437	10067	> 500	PASS
2462	10034	> 500	PASS

802.11b Aux1

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	10081	> 500	PASS
2437	**10083**	> 500	PASS
2462	10059	> 500	PASS

802.11g Main

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	**16350**	> 500	PASS
2437	16330	> 500	PASS
2462	16340	> 500	PASS

802.11g Aux1

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	16350	> 500	PASS
2437	**16360**	> 500	PASS
2462	**16360**	> 500	PASS

802.11_n_HT20 Main

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	**17640**	> 500	PASS
2437	17630	> 500	PASS
2462	17630	> 500	PASS

802.11_n_HT20 Aux1

Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
2412	17620	> 500	PASS
2437	**17630**	> 500	PASS
2462	**17630**	> 500	PASS

99% Bandwidth

802.11b Main		802.11b Aux1	
Frequency (MHz)	99%Bandwidth (MHz)	Frequency (MHz)	99%Bandwidth (MHz)
2412	14.067	2412	**14.123**
2437	13.809	2437	13.978
2462	13.948	2462	13.872

802.11g Main		802.11g Aux1	
Frequency (MHz)	99%Bandwidth (MHz)	Frequency (MHz)	99%Bandwidth (MHz)
2412	16.506	2412	16.575
2437	16.549	2437	16.531
2462	**16.637**	2462	16.561

802.11n_HT20M Main		802.11n_HT20M Aux1	
Frequency (MHz)	99%Bandwidth (MHz)	Frequency (MHz)	99%Bandwidth (MHz)
2412	17.499	2412	**17.794**
2437	17.215	2437	17.694
2462	17.696	2462	17.774

Refer to next page for plots

802.11b (Main)

6dB Band Width Test Data CH-Low

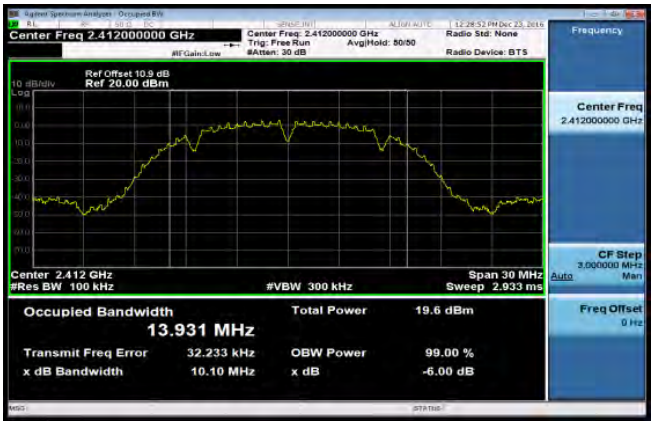

6dB Band Width Test Data CH-Mid

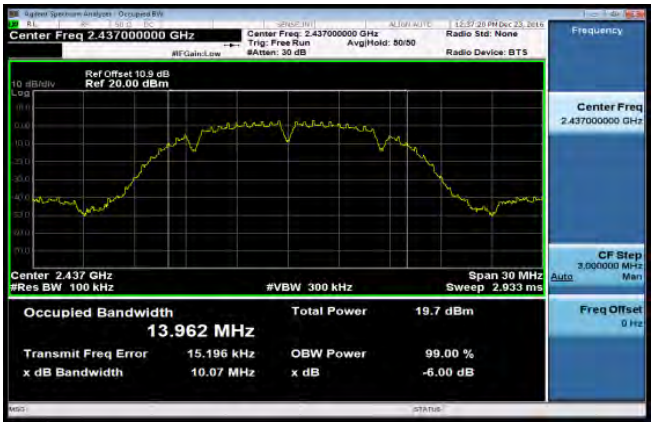

6dB Band Width Test Data CH-High

802.11b (AUX1)

6dB Band Width Test Data CH-Low

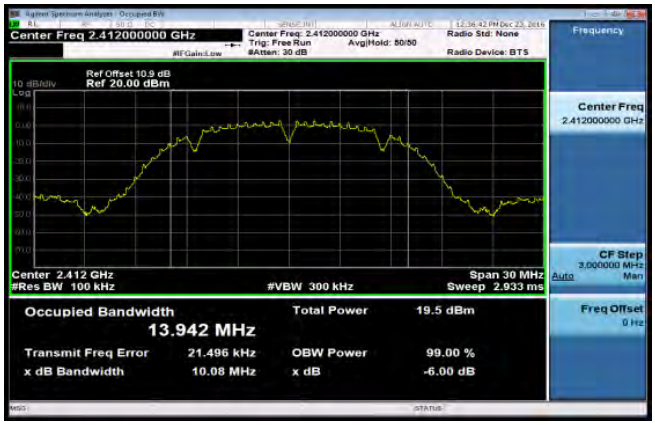

6dB Band Width Test Data CH-Mid

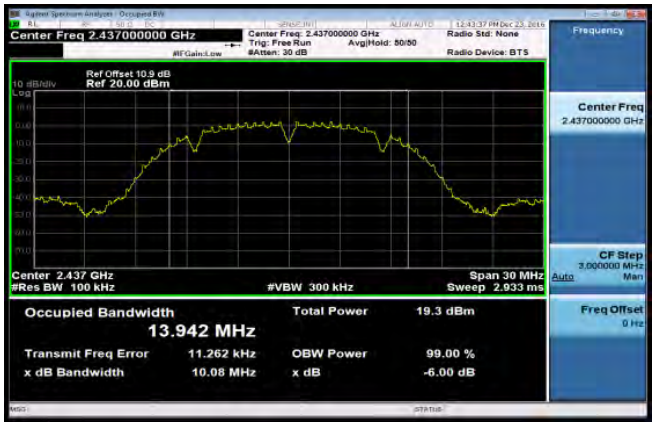

6dB Band Width Test Data CH-High

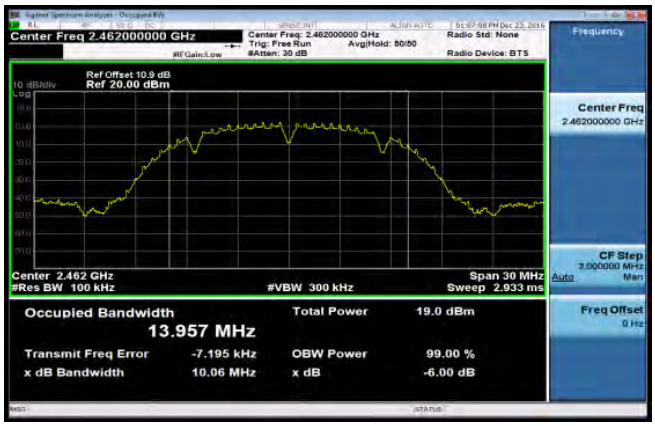

802.11g (Main)

6dB Band Width Test Data CH-Low

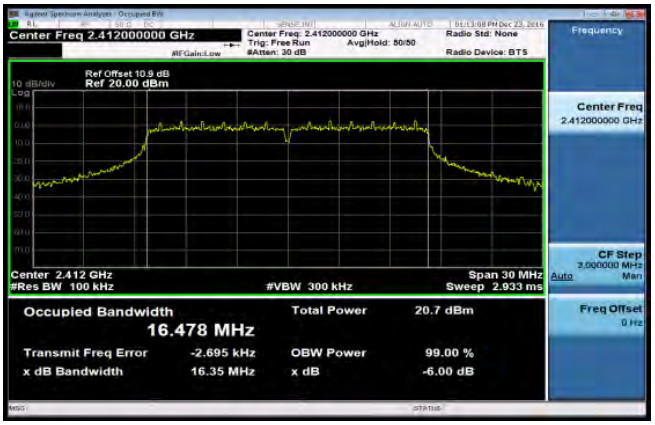

6dB Band Width Test Data CH-Mid

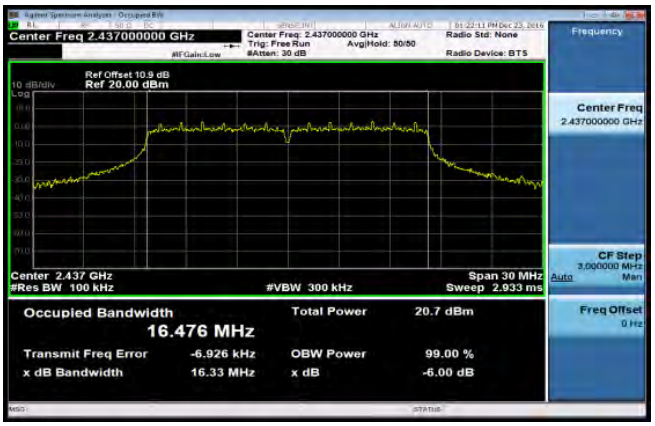

6dB Band Width Test Data CH-High

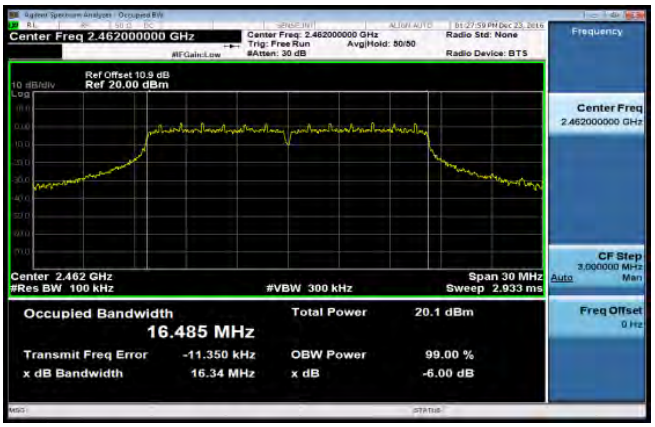

802.11g (AUX1)

6dB Band Width Test Data CH-Low

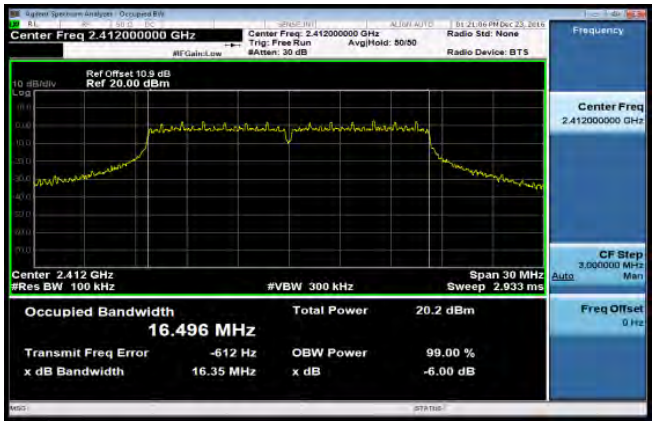

6dB Band Width Test Data CH-Mid

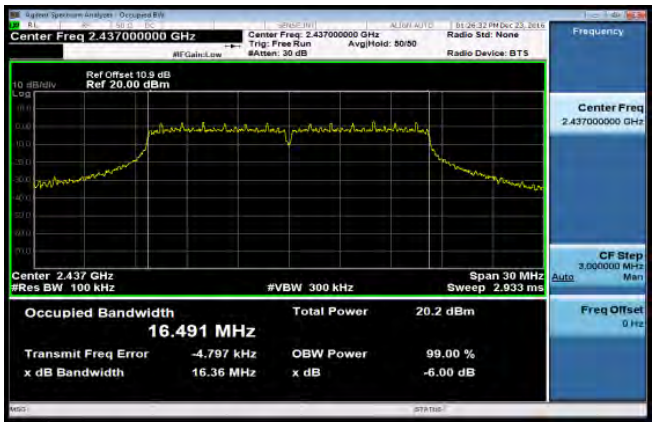

6dB Band Width Test Data CH-High

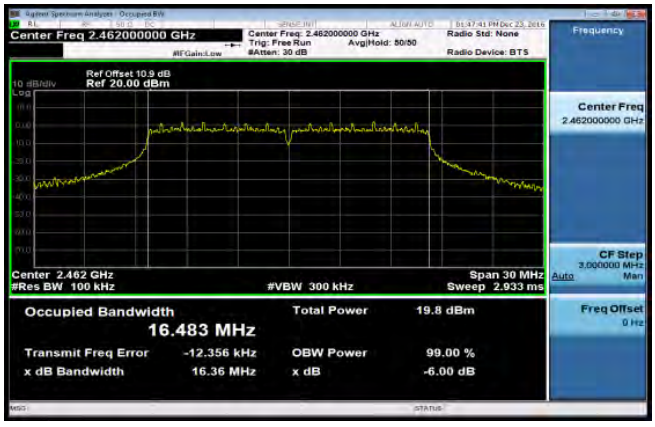

802.11n_20M (Main)

6dB Band Width Test Data CH-Low

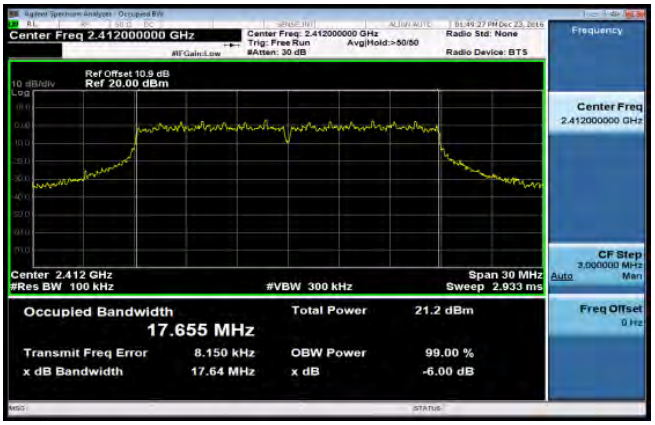

6dB Band Width Test Data CH-Mid

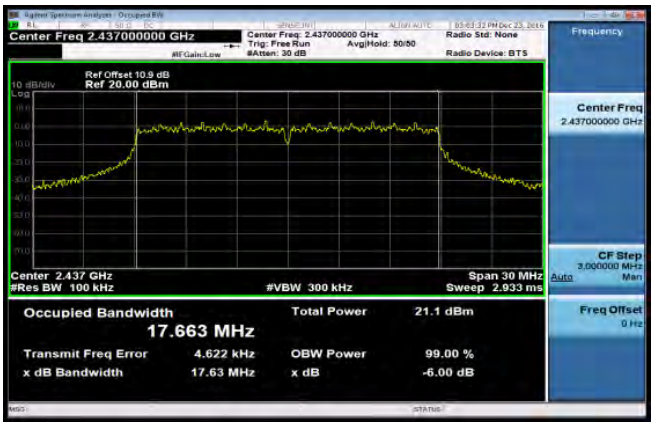

6dB Band Width Test Data CH-High

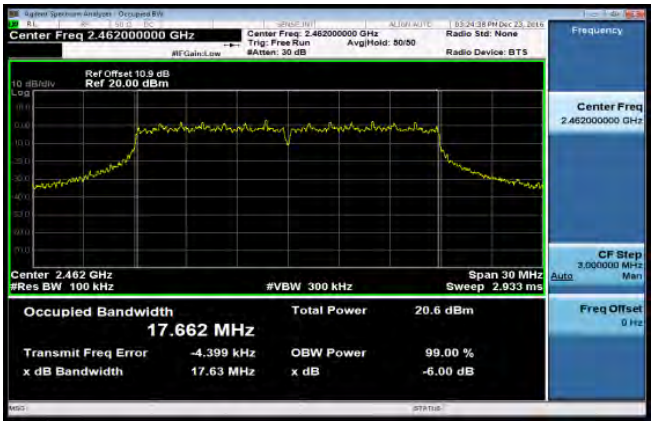

802.11n_20M (AUX1)

6dB Band Width Test Data CH-Low

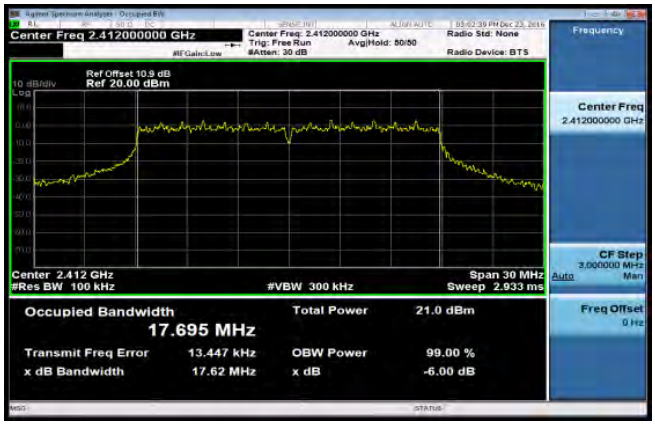

6dB Band Width Test Data CH-Mid

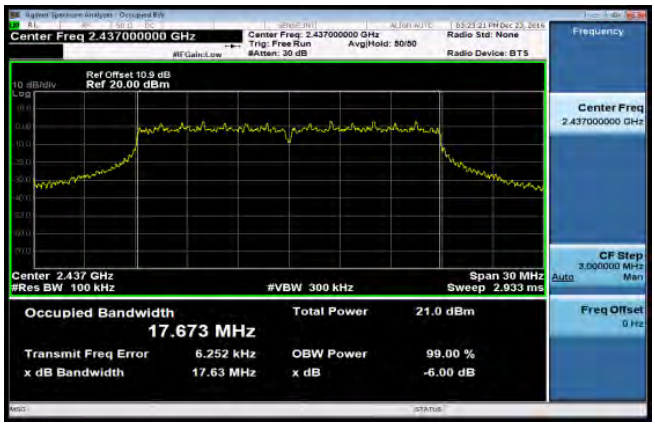

6dB Band Width Test Data CH-High

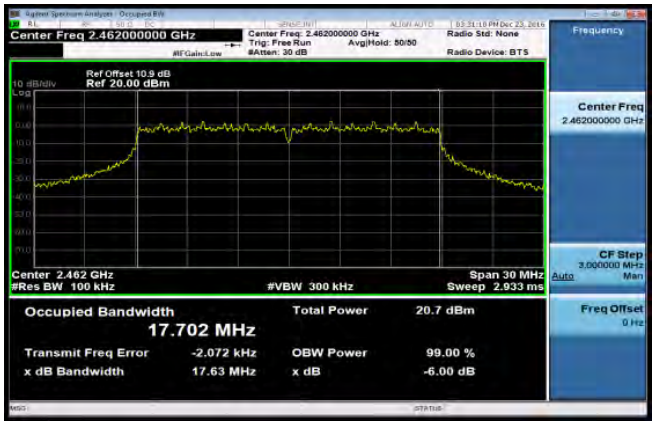

802.11b (Main)

99% Band Width Test Data CH-Low

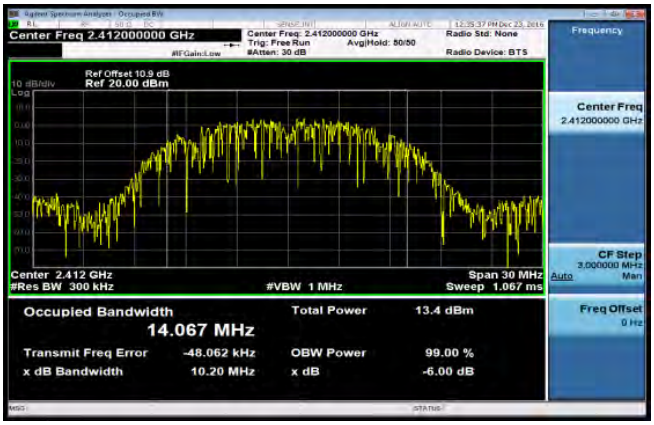

99% Band Width Test Data CH-Mid

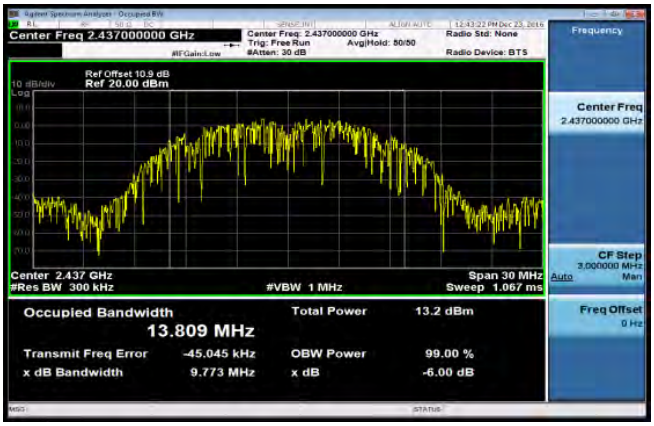

99% Band Width Test Data CH-High

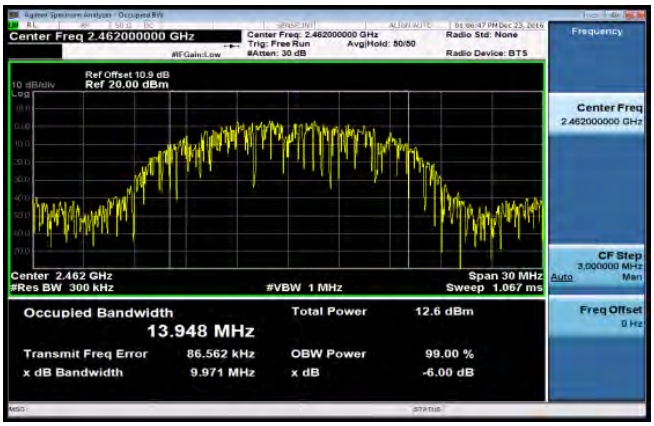

802.11b (AUX1)

99% Band Width Test Data CH-Low

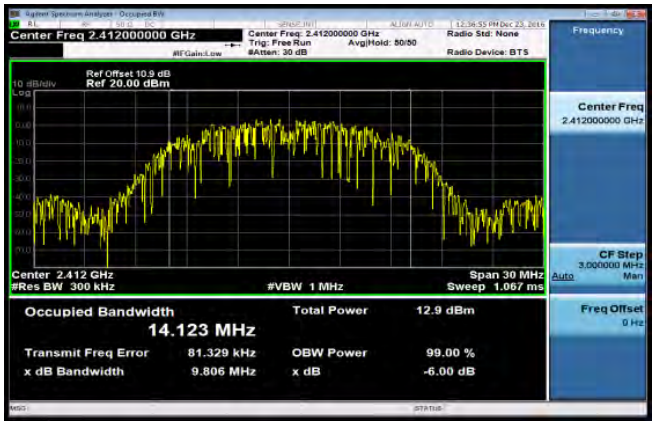

99% Band Width Test Data CH-Mid

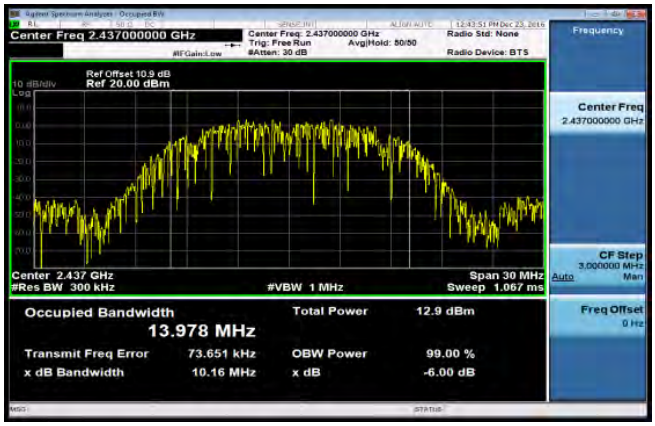

99% Band Width Test Data CH-High

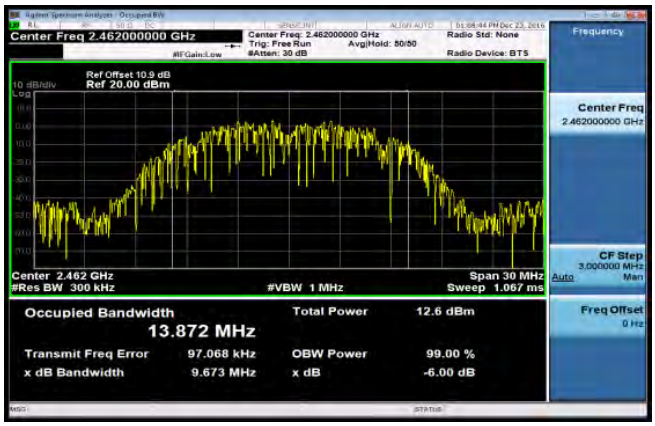

802.11g (Main)

99% Band Width Test Data CH-Low

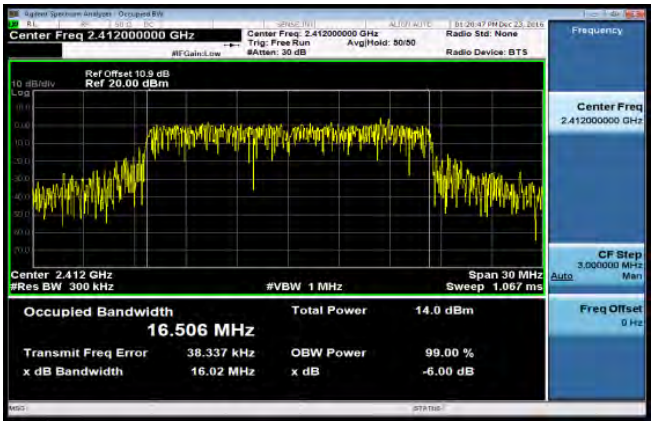

99% Band Width Test Data CH-Mid

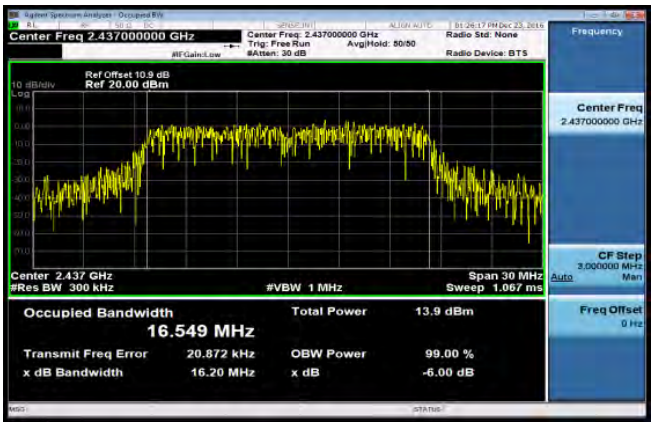

99% Band Width Test Data CH-High

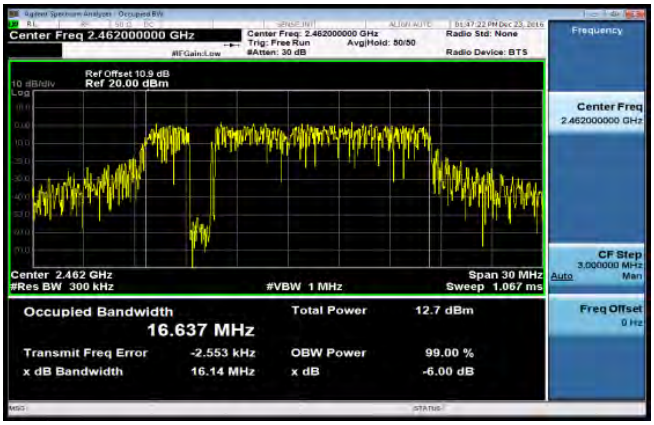

802.11g (AUX1)

99% Band Width Test Data CH-Low

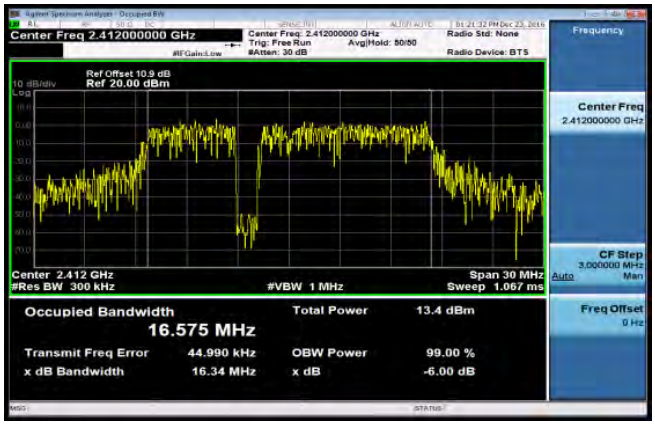

99% Band Width Test Data CH-Mid

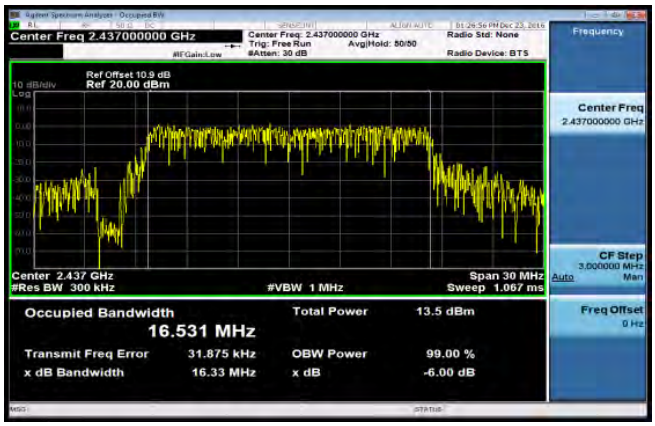

99% Band Width Test Data CH-High

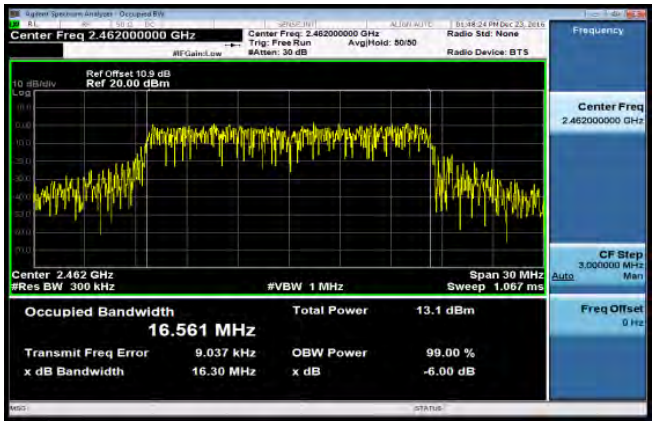

802.11n_20M (Main)

99% Band Width Test Data CH-Low

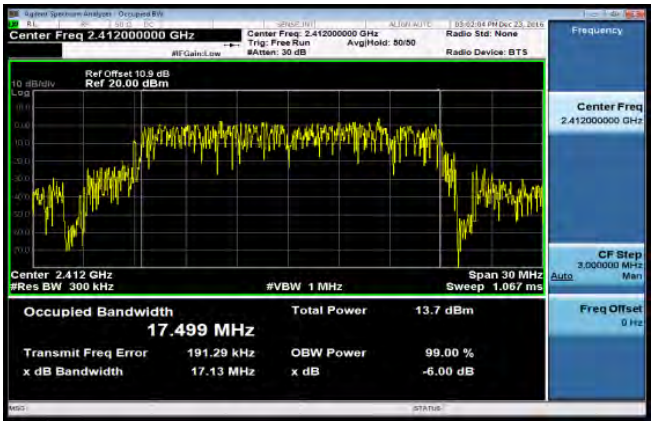

99% Band Width Test Data CH-Mid

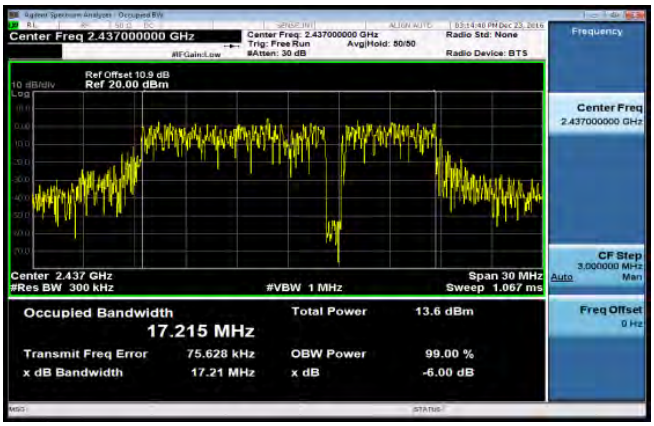

99% Band Width Test Data CH-High

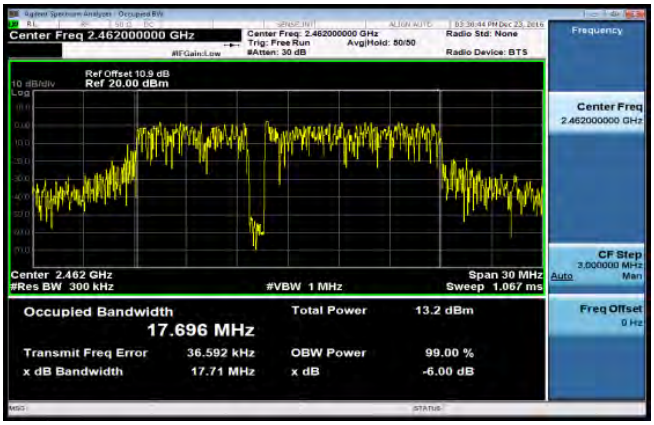

802.11n_20M (AUX1)

99% Band Width Test Data CH-Low

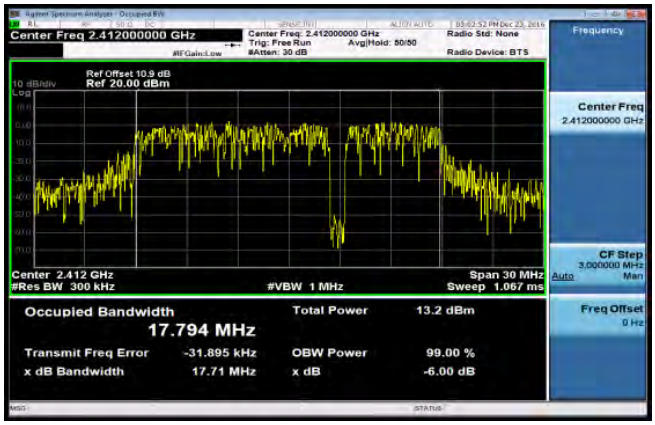

99% Band Width Test Data CH-Mid

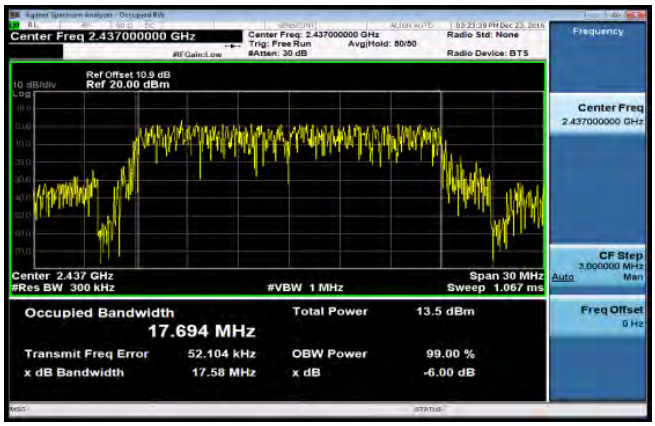

99% Band Width Test Data CH-High

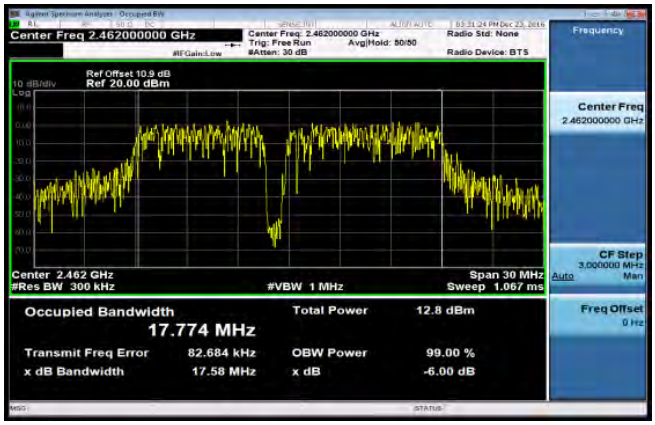

10 CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.8.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017
Coaxial Cable 30cm	WOKEN	00100A1F1A 195C	RF01	12/12/2016	12/11/2017
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017

10.3 Test SET-UP

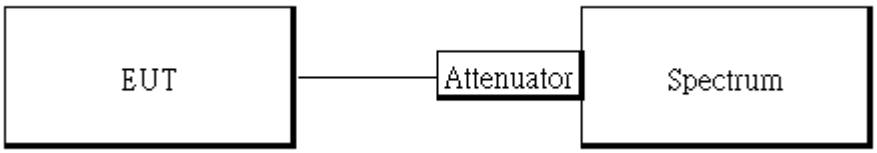

10.4 Measurement Procedure

Conducted Band Edge Limt

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 100kHz & VBW = 300 kHz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.

8.Allow trace to fully stabilize.

9.Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

1. To connect Antenna Port of EUT to Spectrum.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
6. Mark the highest reading of the emission as the reference level measurement.
7. Set DL as the limit = reading on marker 1 – 20dBm
8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

1. To connect Antenna Port of EUT to Spectrum
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set RBW = 100 kHz & VBW= 300 kHz, Detector =Peak, Sweep = Auto.
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

6. Repeat above procedures until all default test channel measured were complete.

10.5 Measurement Result

Bandedge Limit 802.11b MODE			Bandedge Limit 802.11g MODE		
Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit (dBm)	Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit (dBm)
2412	5.71	-14.29	2412	5.98	-14.02
2462	5.53	-14.47	2462	5.24	-14.76

Bandedge Limit 802.11n20 MODE		
Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit (dBm)
2412	6.24	-13.76
2462	6.00	-14.00

802.11b Band Edge Limit Test Data CH-Low

802.11g Band Edge Limit Test Data CH-High

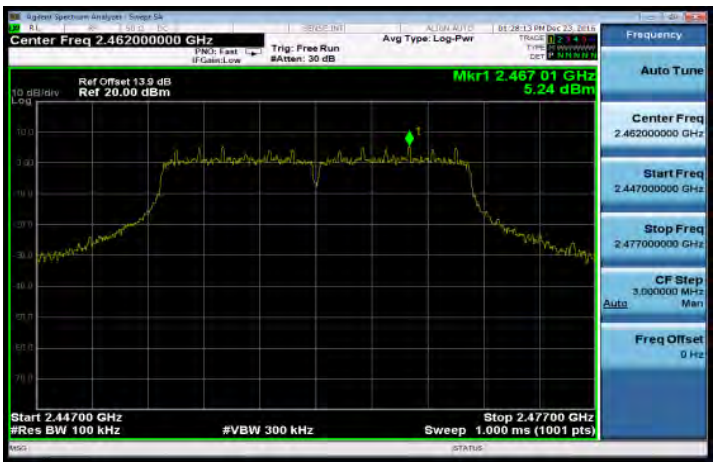

802.11b Band Edge Limit Test Data CH-High

802.11n_HT20 Band Edge Limit Test Data CH-Low

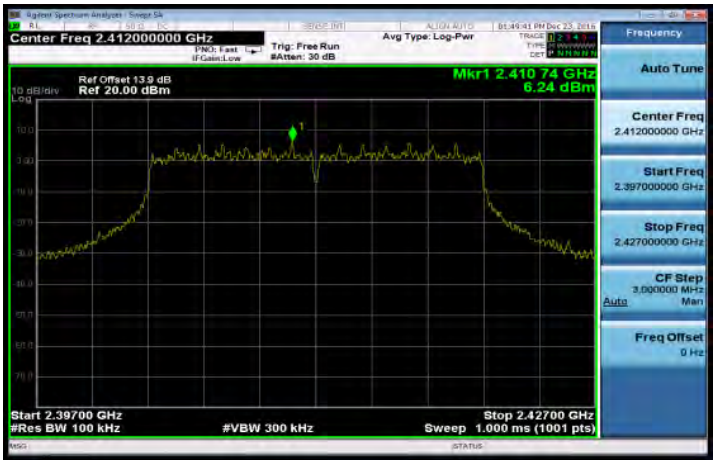

802.11g Band Edge Limit Test Data CH-Low

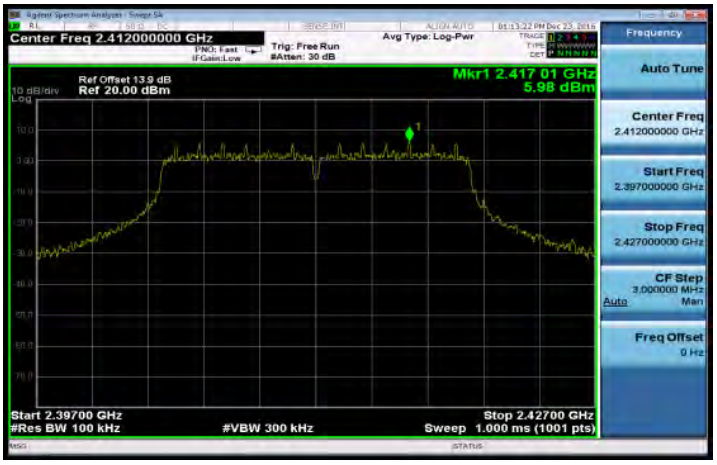

802.11n_HT20 Band Edge Limit Test Data CH-High

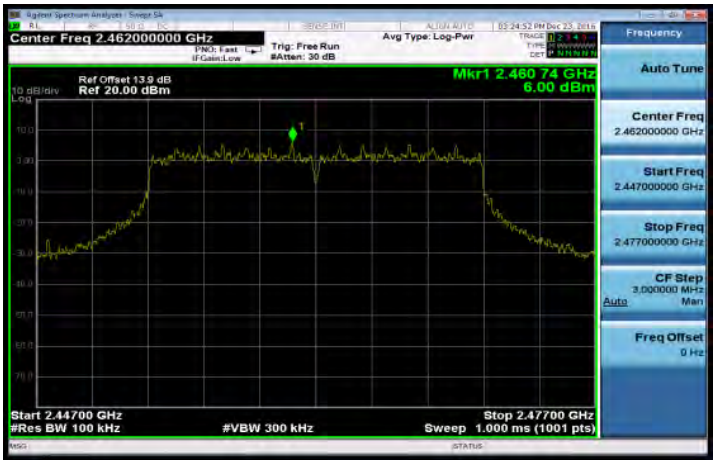

802.11b

Band Edge Test Data CH-Low

Band Edge Test Data CH-High

802.11g

Band Edge Test Data CH-Low

Band Edge Test Data CH-High

802.11n_HT20

Band Edge Test Data CH-Low

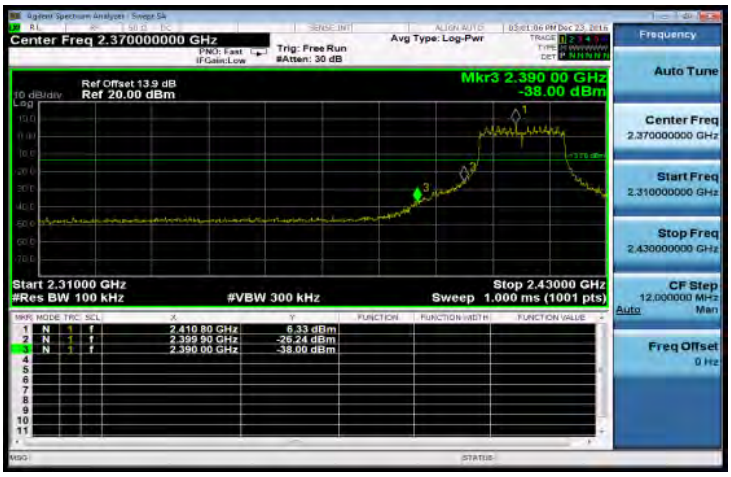

Band Edge Test Data CH-High

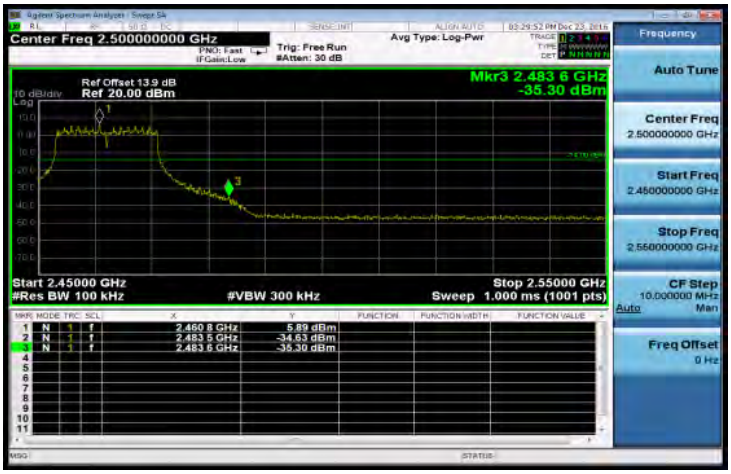

802.11b

30M-3GHz Spurious Emission Test Data CH-Low

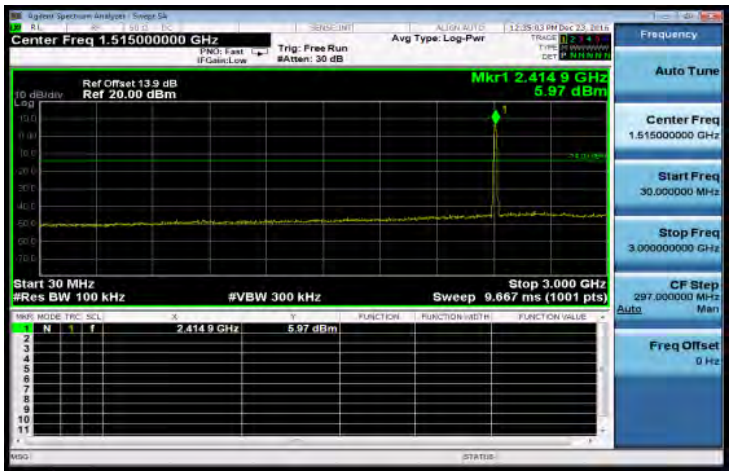

3G-26.5GHz Spurious Emission Test Data CH-Mid

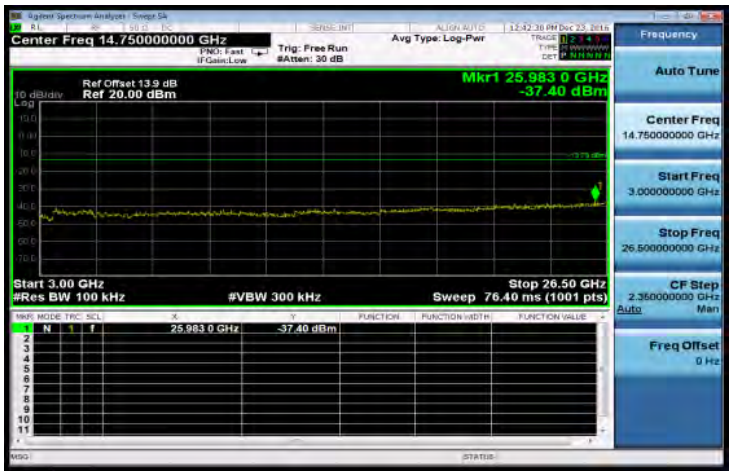

3G-26.5GHz Spurious Emission Test Data CH-Low

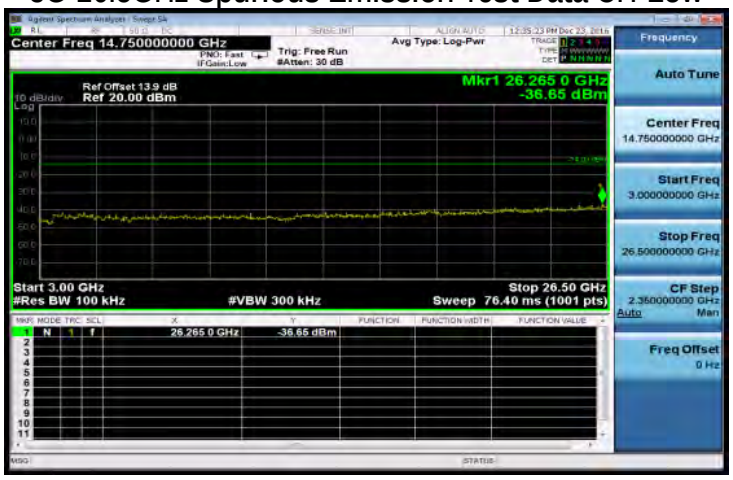

30M-3GHz Spurious Emission Test Data CH-High

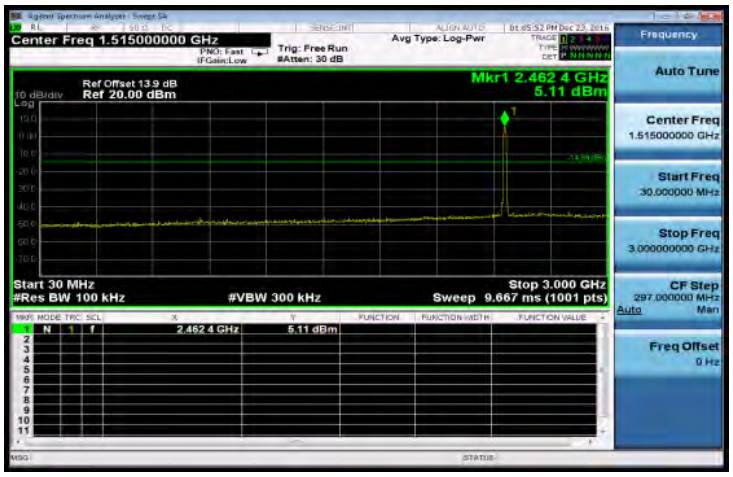

30M-3GHz Spurious Emission Test Data CH-Mid

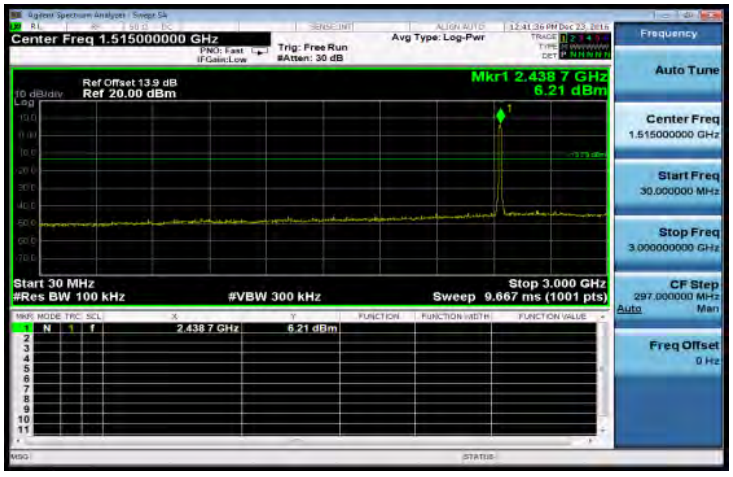

3G-26.5GHz Spurious Emission Test Data CH-High

802.11g

30M-3GHz Spurious Emission Test Data CH-Low

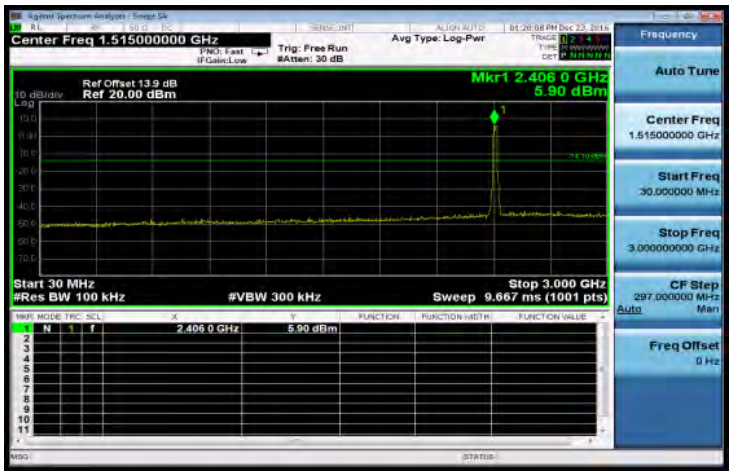

3G-26.5GHz Spurious Emission Test Data CH-Mid

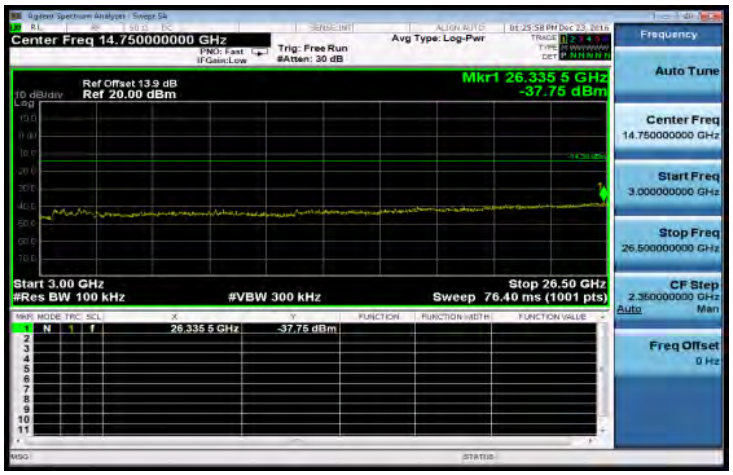

3G-26.5GHz Spurious Emission Test Data CH-Low

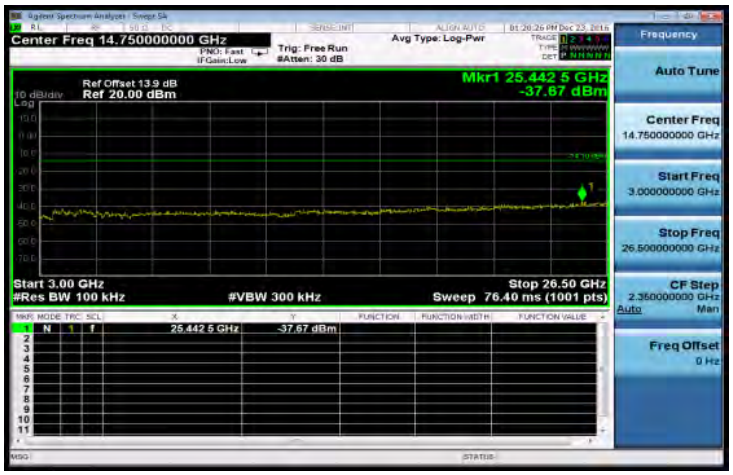

30M-3GHz Spurious Emission Test Data CH-High

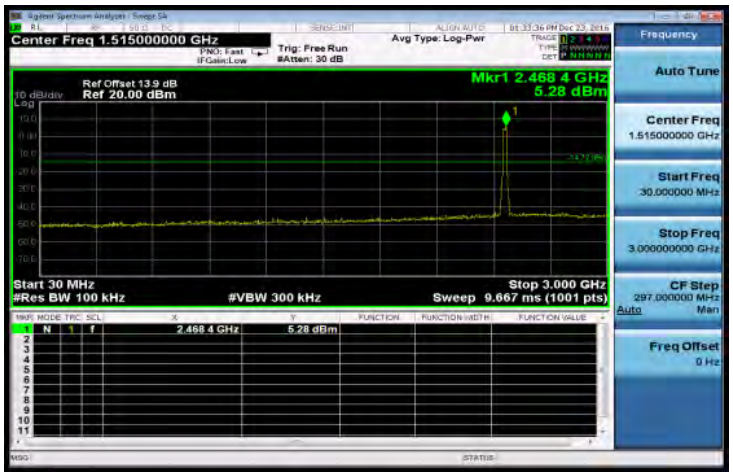

30M-3GHz Spurious Emission Test Data CH-Mid

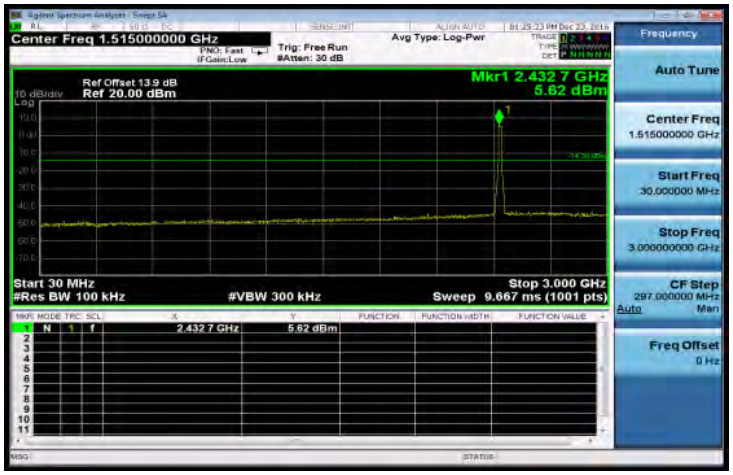

3G-26.5GHz Spurious Emission Test Data CH-High

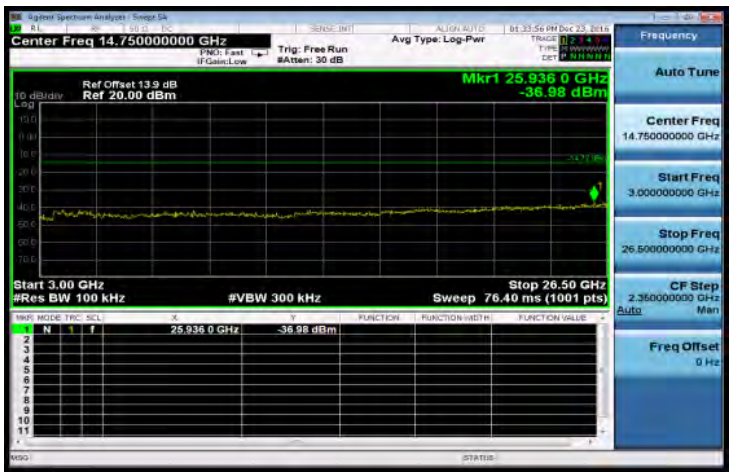

802.11n_HT20

30M-3GHz Spurious Emission Test Data CH-Low

3G-26.5GHz Spurious Emission Test Data CH-Mid

3G-26.5GHz Spurious Emission Test Data CH-Low

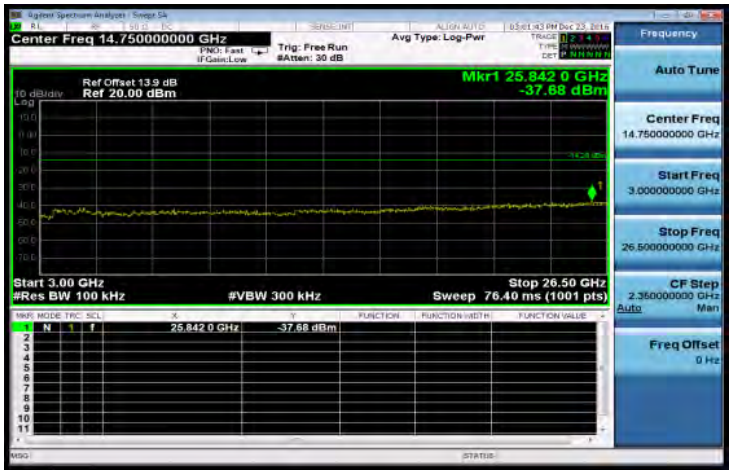

30M-3GHz Spurious Emission Test Data CH-High

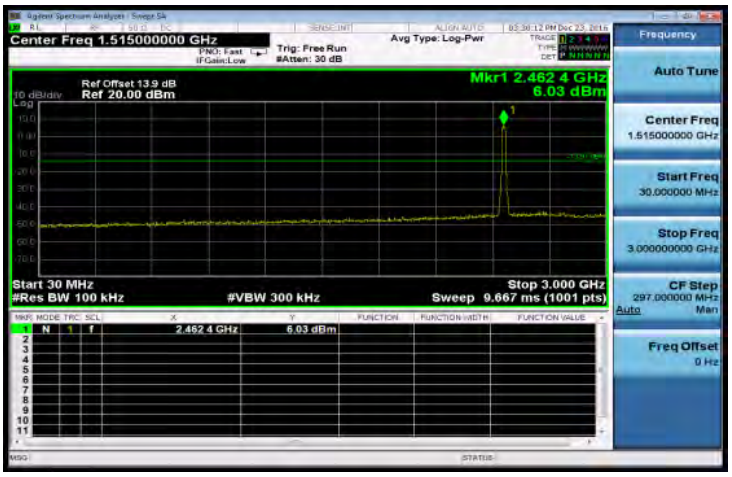

30M-3GHz Spurious Emission Test Data CH-Mid

3G-26.5GHz Spurious Emission Test Data CH-High

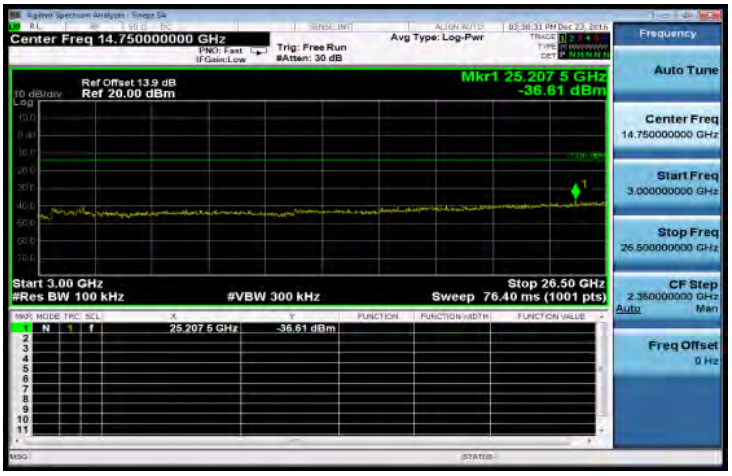

11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 & RSS-Gen §8.8, 8.9 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13(a), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (dBμV/m)

11.2 Measurement Equipment Used:

966 Chamber					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESU 40	100363	04/12/2016	04/11/2017
Loop Antenna	ETS-Lindgren	6502	00143303	12/23/2016	12/22/2017
Broadband Antenna	TESEQ	CBL 6112D	35240	11/03/2016	11/02/2017
Horn Antenna	ETS-Lindgren	3117	00143272	12/15/2016	12/16/2017
Horn Antenna	Schwarzbeck	BBHA9170	185	07/24/2016	07/23/2017
Pre Amplifier	EMC Instruments	EMC330	980096	12/12/2016	12/11/2017
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/12/2016	12/11/2017
Pre Amplifier	R&S	SCU-18	10204	12/12/2016	12/11/2017
Pre Amplifier	R&S	SCU-26	100780	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/12/2016	12/11/2017
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF27	12/12/2016	12/11/2017
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2016	03/03/2017
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2016	05/03/2017
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.

NOTE: N.C.R refers to Not Calibrated Required.

11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

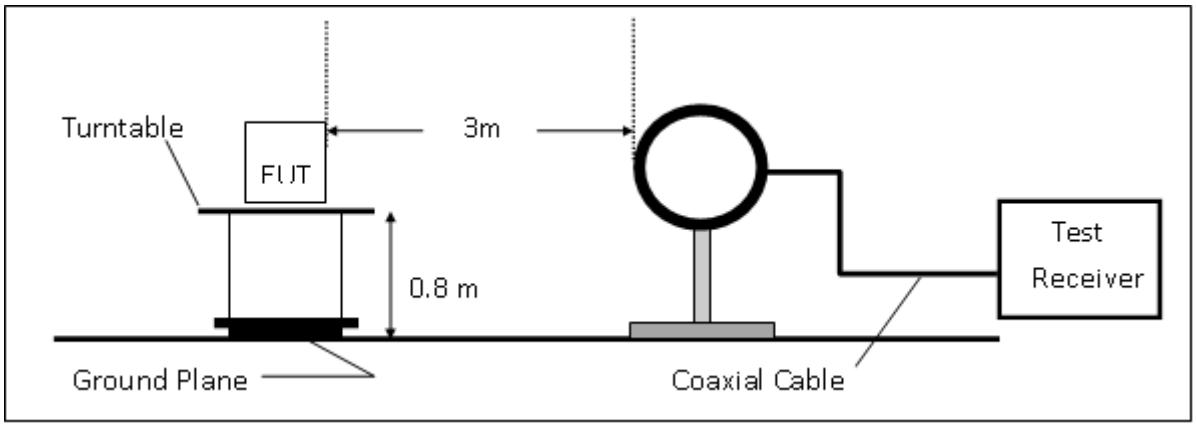

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

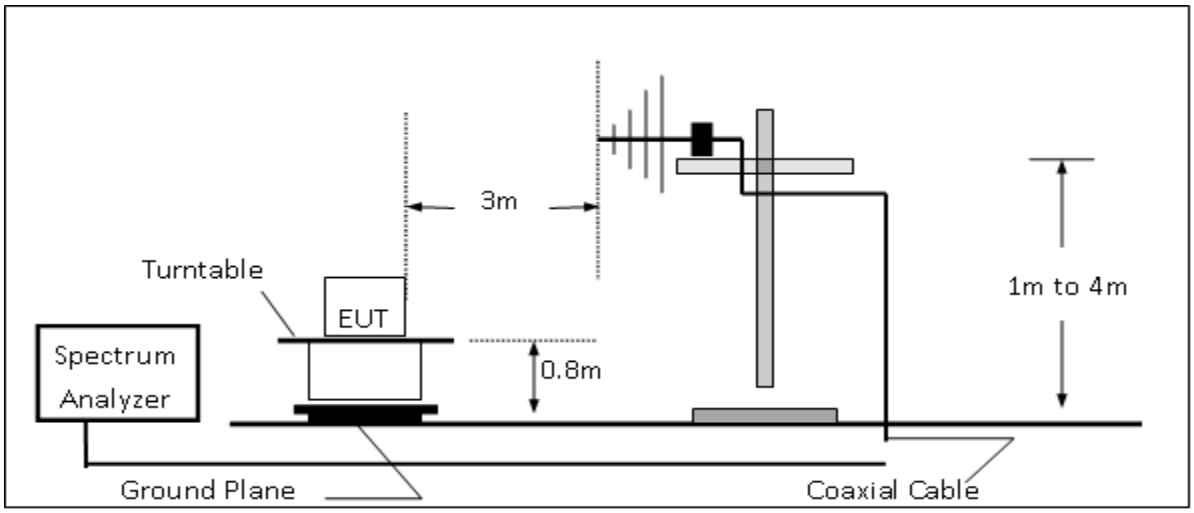

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

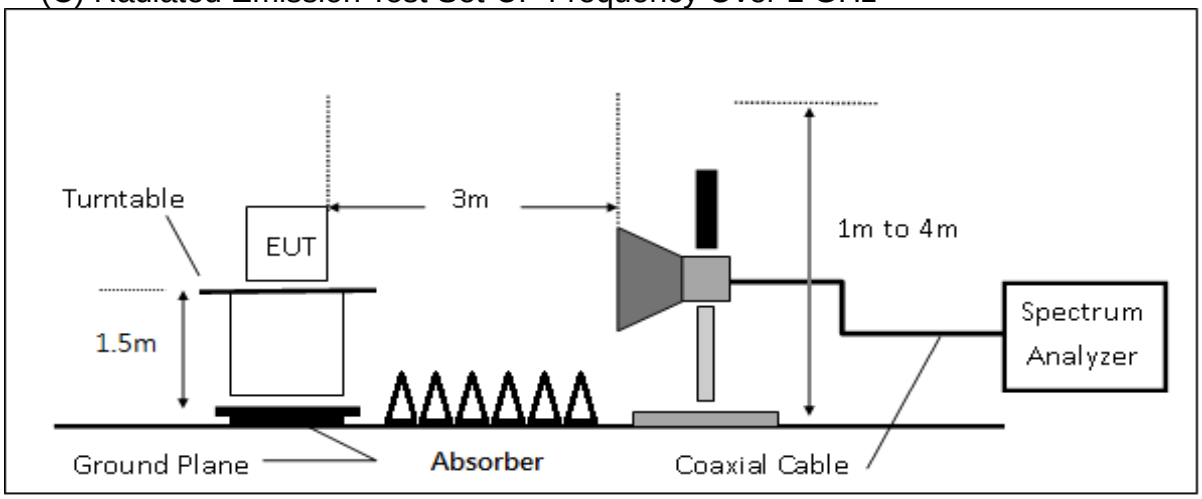

11.4 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
12. Repeat above procedures until all default test channel measured were complete.

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note :

"**F**" : denotes Fundamental Frequency. ; "**H**" : denotes Harmonic Frequency.

"**E**" : denotes Band Edge Frequency. ; "**S**" : denotes Spurious Frequency.

11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Band Edge Measurement Result (802.11b)

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

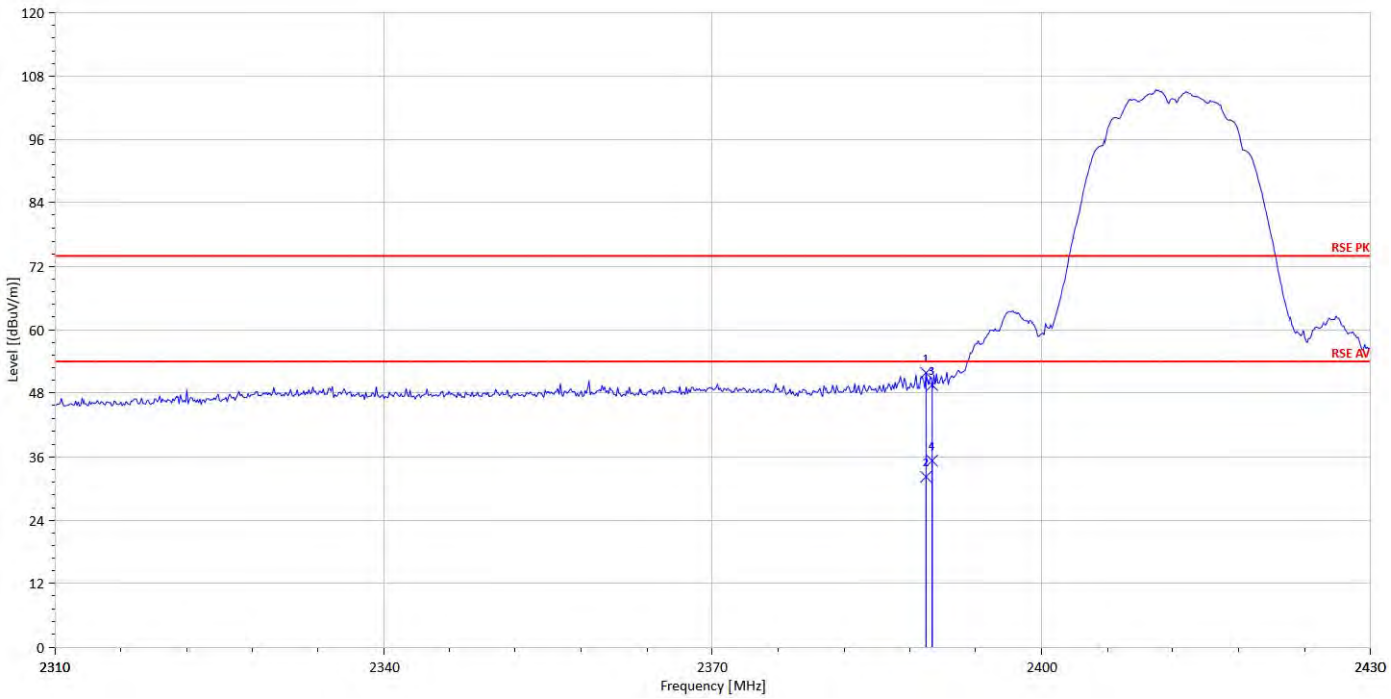

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.44	S	Peak	50.95	0.91	51.86	74	-22.14
2389.44	S	Average	31.25	0.91	32.16	54	-21.84
2390.00	E	Peak	48.60	0.92	49.52	74	-24.48
2390.00	E	Average	34.33	0.92	35.25	54	-18.75

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

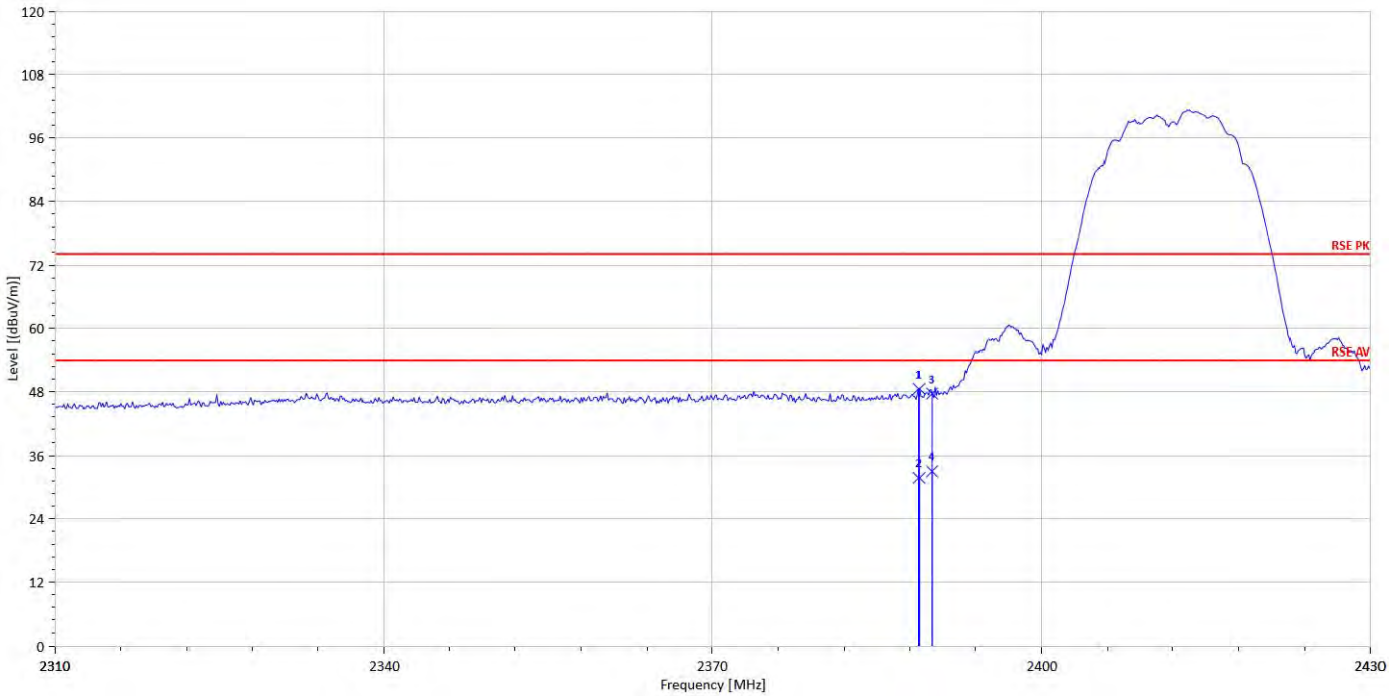

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2388.84	S	Peak	47.68	0.91	48.59	74	-25.41
2388.84	S	Average	30.86	0.91	31.77	54	-22.23
2390.00	E	Peak	46.76	0.92	47.68	74	-26.32
2390.00	E	Average	32.08	0.92	33.00	54	-21.00

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

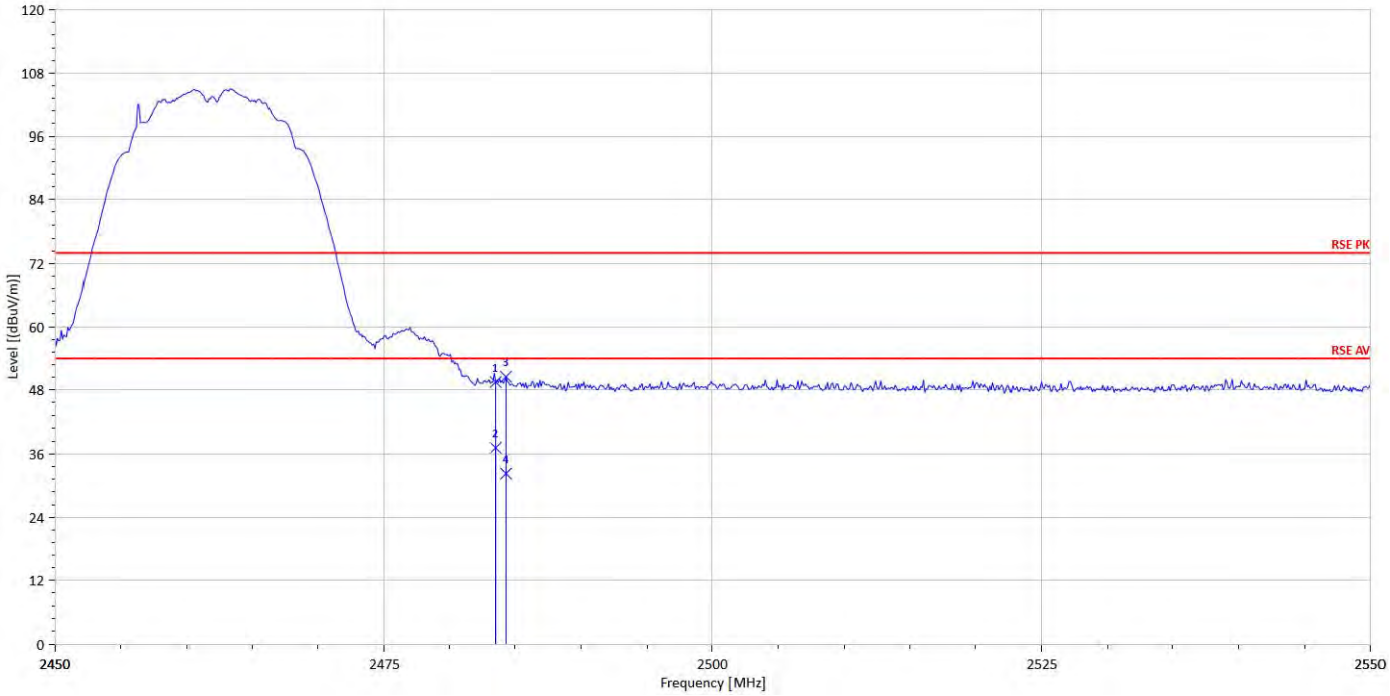

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	48.35	1.16	49.51	74	-24.49
2483.50	E	Average	35.97	1.16	37.13	54	-16.87
2484.30	S	Peak	49.38	1.16	50.54	74	-23.46
2484.30	S	Average	31.06	1.16	32.22	54	-21.78

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

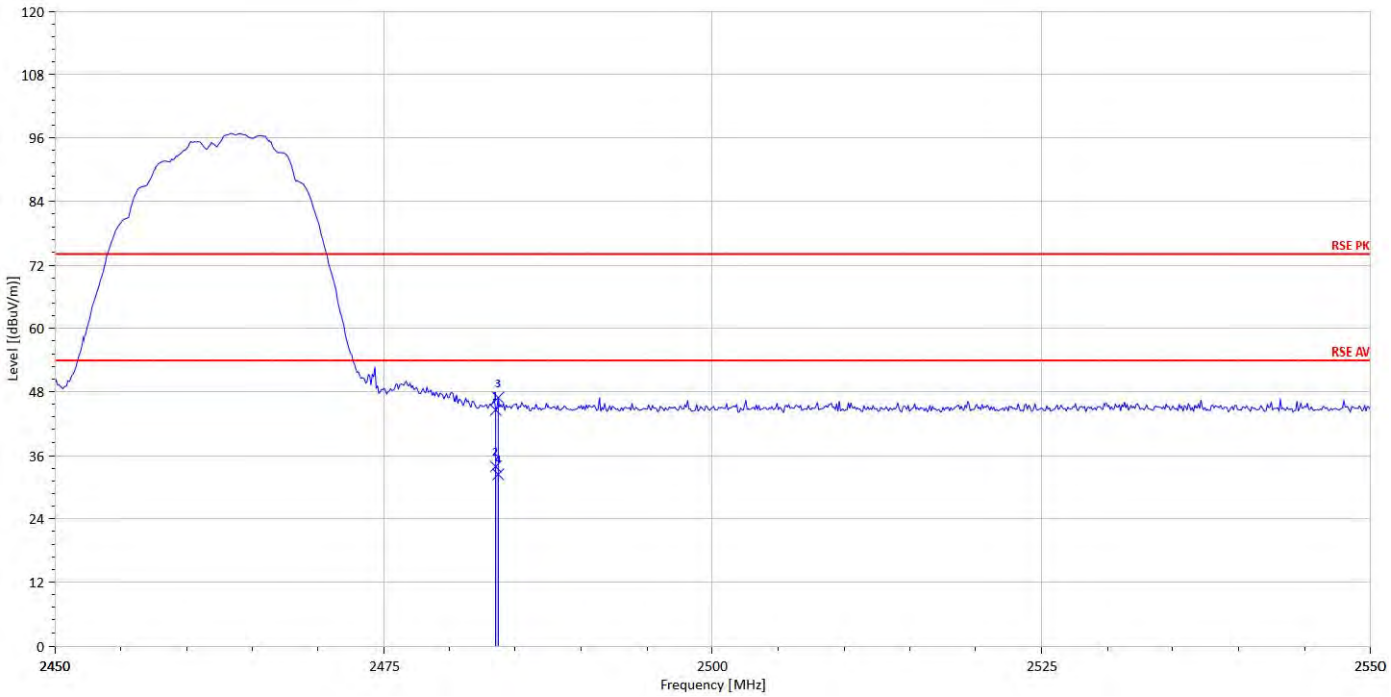

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	43.40	1.16	44.56	74	-29.44
2483.50	E	Average	32.78	1.16	33.94	54	-20.06
2483.70	S	Peak	45.75	1.16	46.91	74	-27.09
2483.70	S	Average	31.28	1.16	32.44	54	-21.56

Radiated Band Edge Measurement Result (802.11g)

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

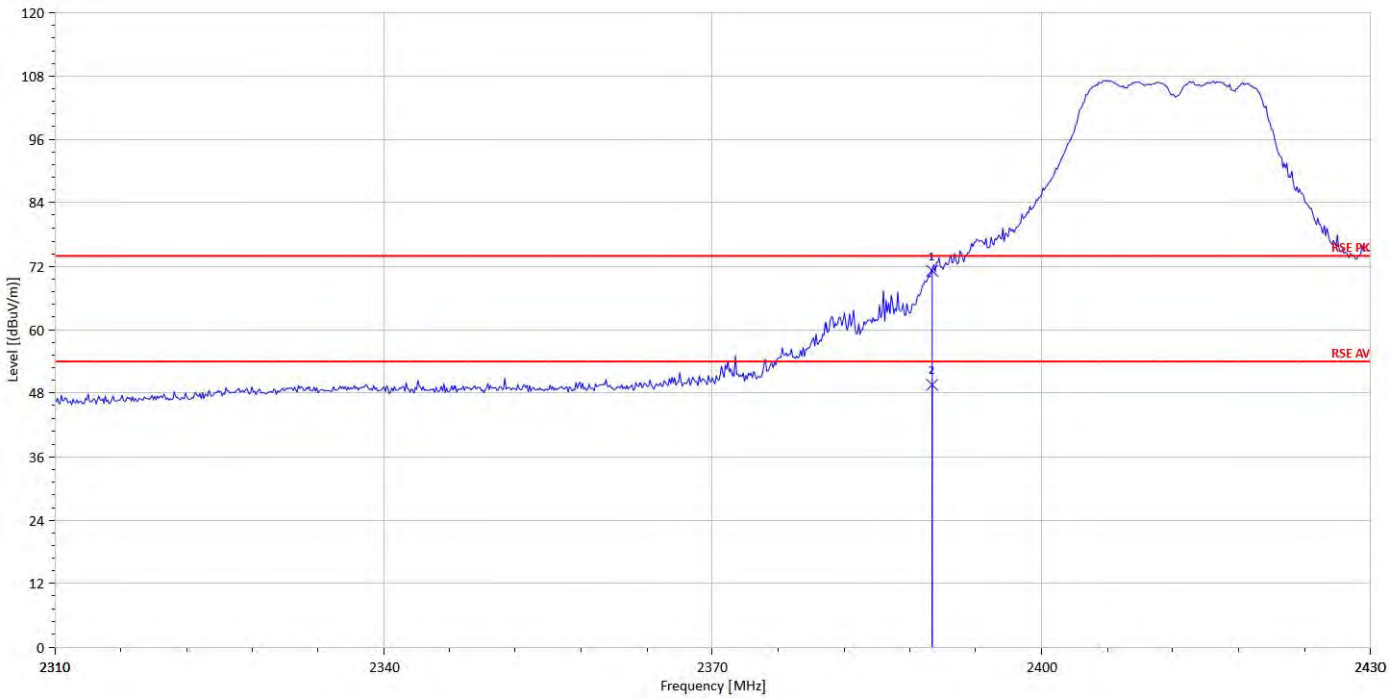

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	70.23	0.92	71.16	74	-2.84
2390.00	E	Average	48.64	0.92	49.56	54	-4.44

Operation Mode :	802.11g	Test Date :	2016/12/30
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	66.07	0.92	66.99	74	-7.01
2390.00	E	Average	45.99	0.92	46.91	54	-7.09

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

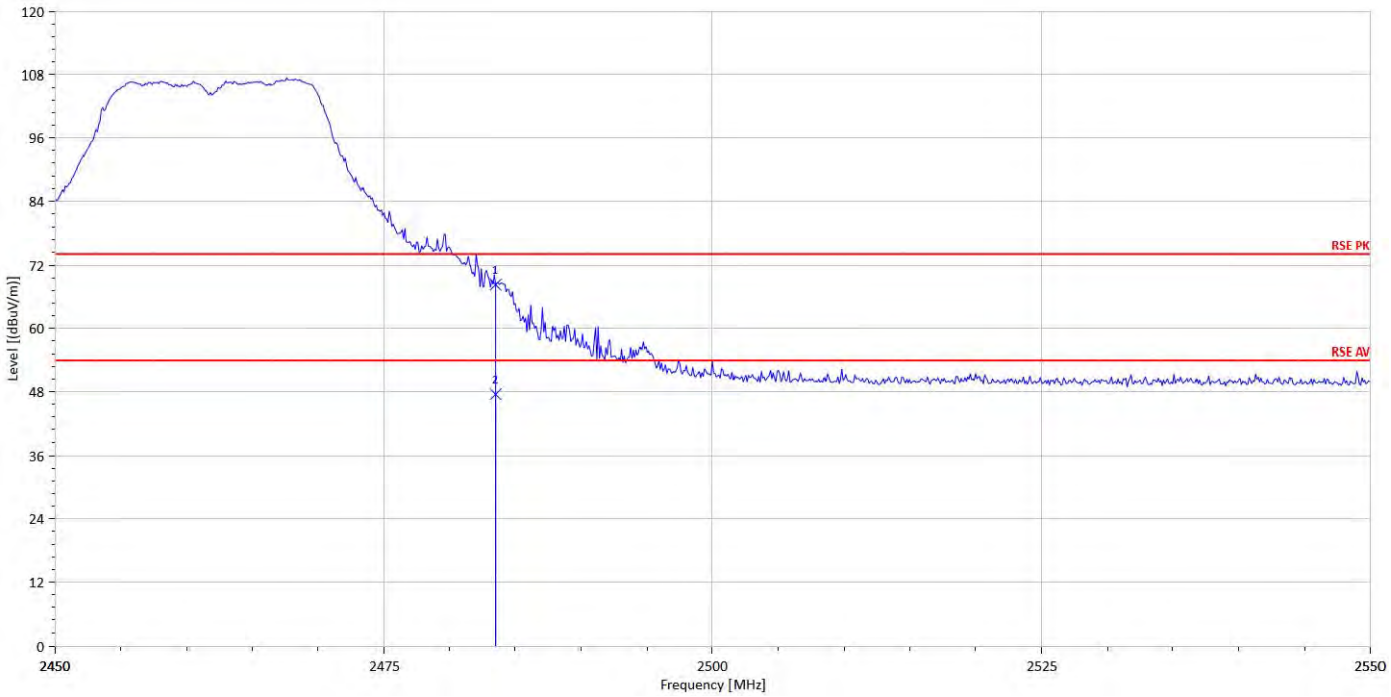

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	67.15	1.16	68.31	74	-5.69
2483.50	E	Average	46.41	1.16	47.57	54	-6.43

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

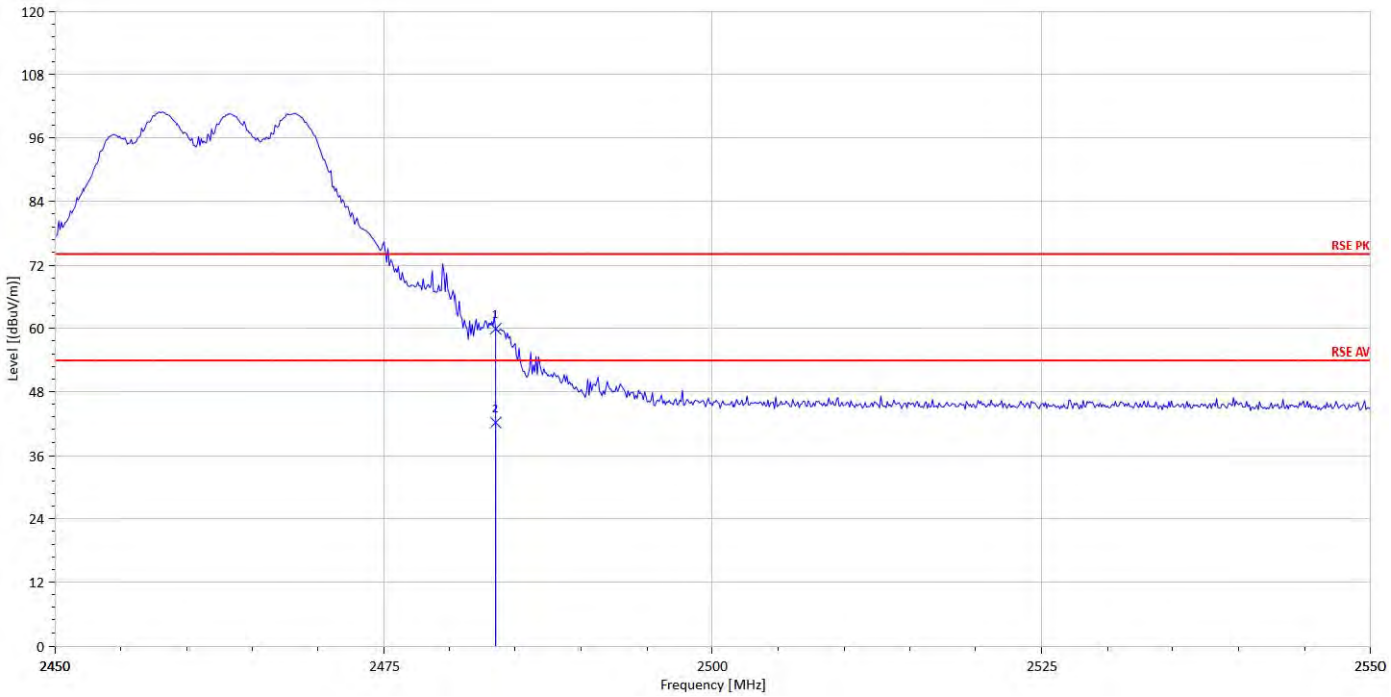

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	58.71	1.16	59.87	74	-14.13
2483.50	E	Average	41.01	1.16	42.17	54	-11.83

Radiated Band Edge Measurement Result (802.11_HT20)

Operation Mode :	802.11n20	Test Date :	2016/12/30
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

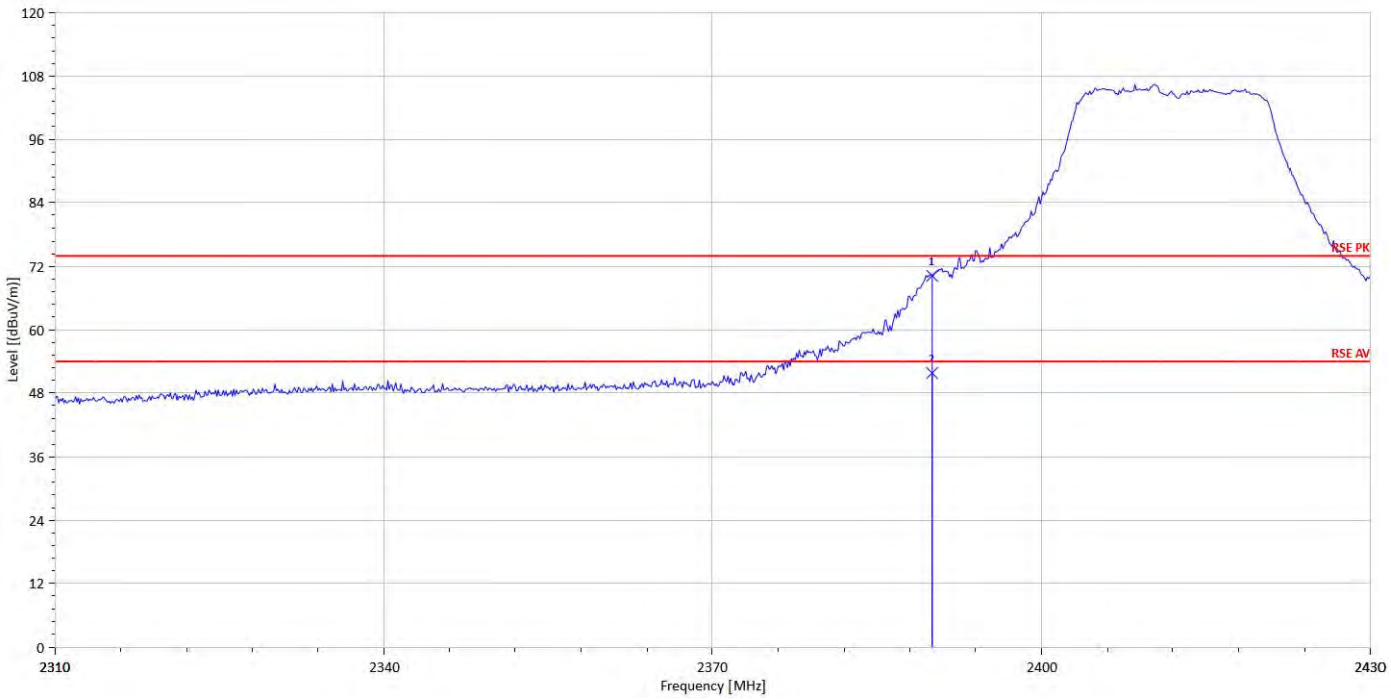

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Peak	69.29	0.92	70.21	74	-3.79
2390.00	E	Average	50.88	0.92	51.80	54	-2.20

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

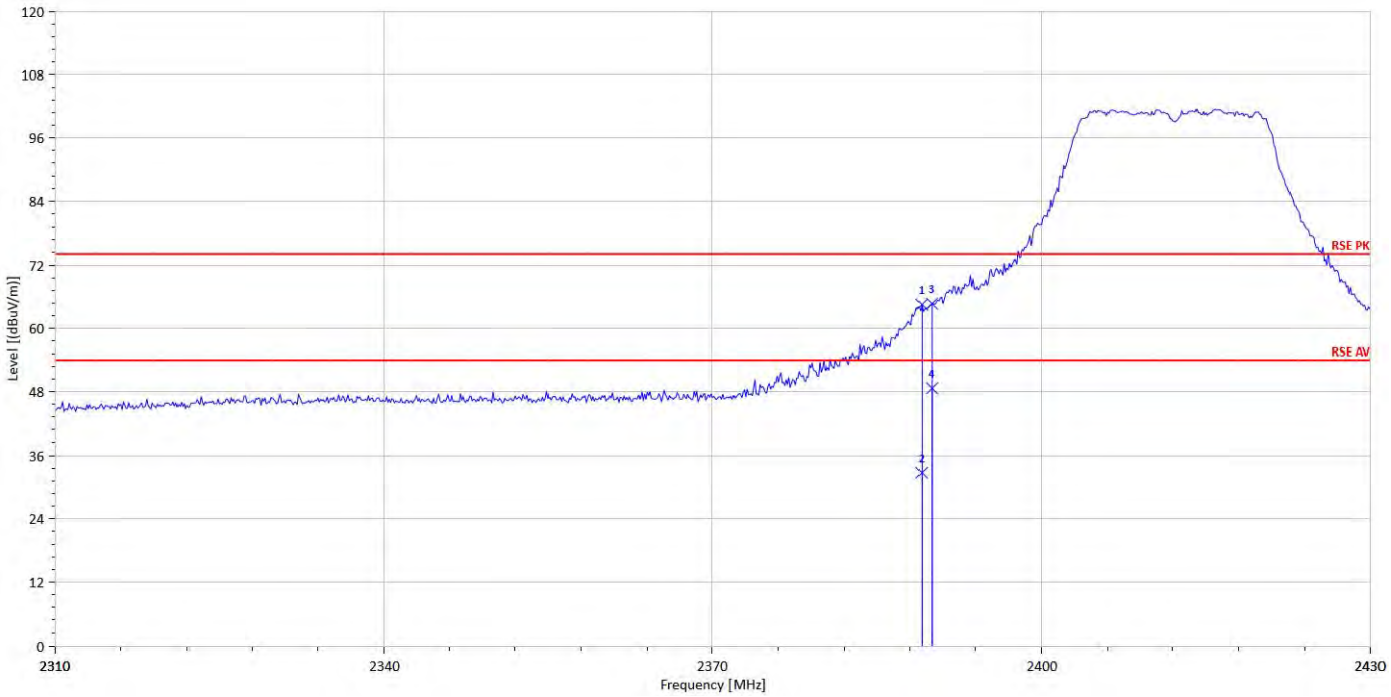

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.08	S	Peak	63.61	0.91	64.52	74	-9.48
2389.08	S	Average	31.85	0.91	32.76	54	-21.24
2390.00	E	Peak	63.76	0.92	64.68	74	-9.32
2390.00	E	Average	47.78	0.92	48.70	54	-5.30

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

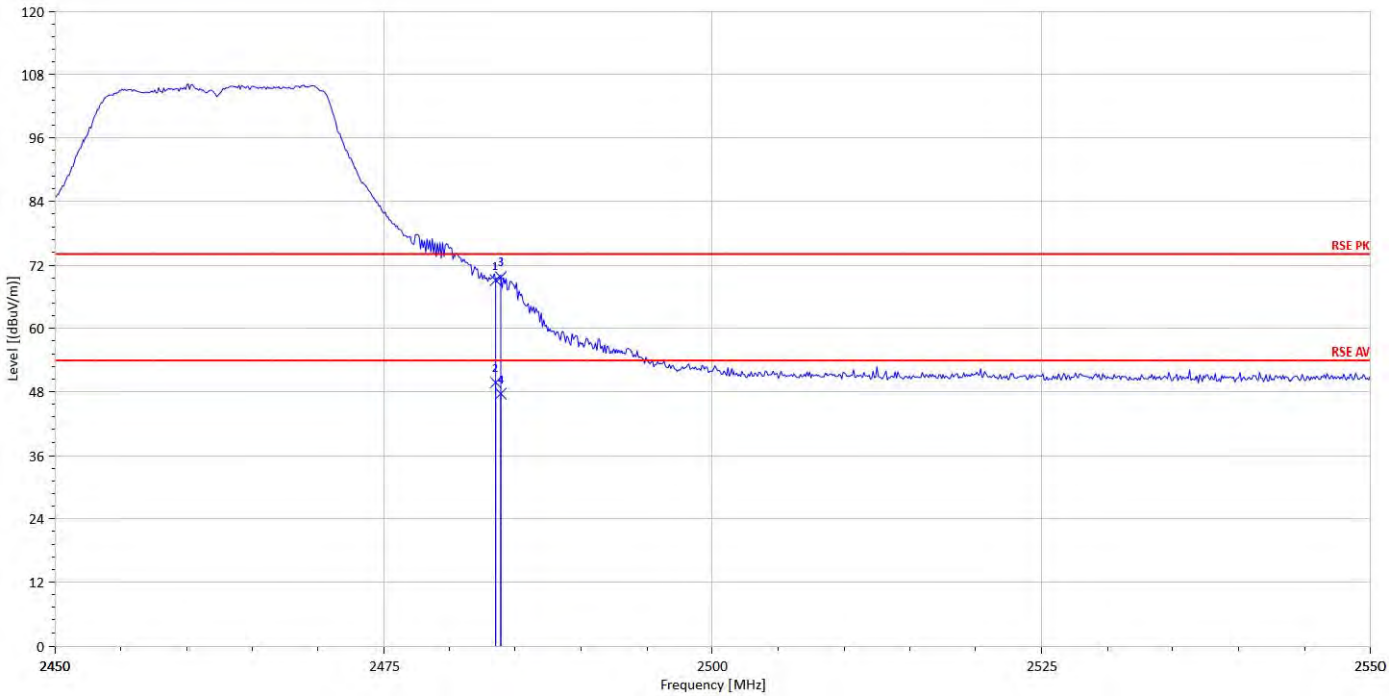

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	68.01	1.16	69.17	74	-4.83
2483.50	E	Average	48.65	1.16	49.81	54	-4.19
2483.90	S	Peak	68.58	1.16	69.74	74	-4.26
2483.90	S	Average	46.52	1.16	47.68	54	-6.32

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	BE CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

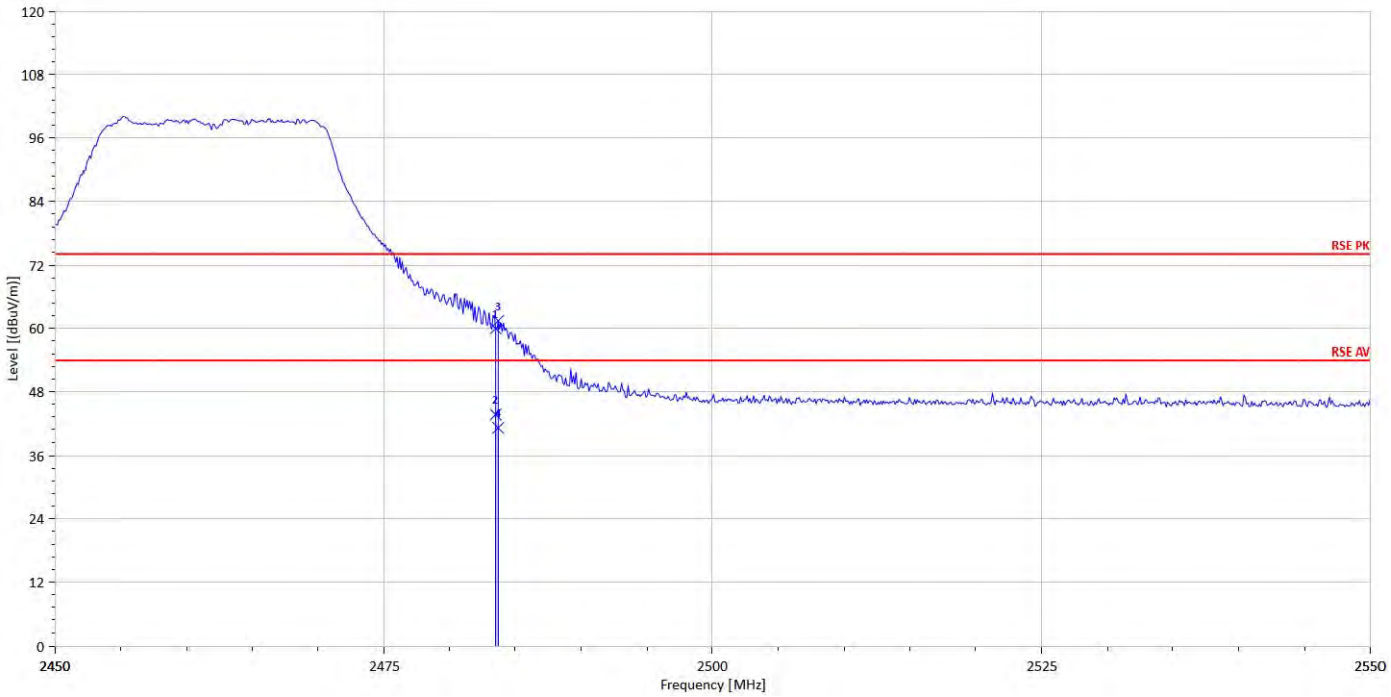

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	58.79	1.16	59.95	74	-14.05
2483.50	E	Average	42.53	1.16	43.69	54	-10.31
2483.70	S	Peak	60.24	1.16	61.40	74	-12.60
2483.70	S	Average	39.98	1.16	41.14	54	-12.86

Below 1GHz Worst-Case Data:

Radiated Spurious Emission Measurement Result (802.11 g)

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

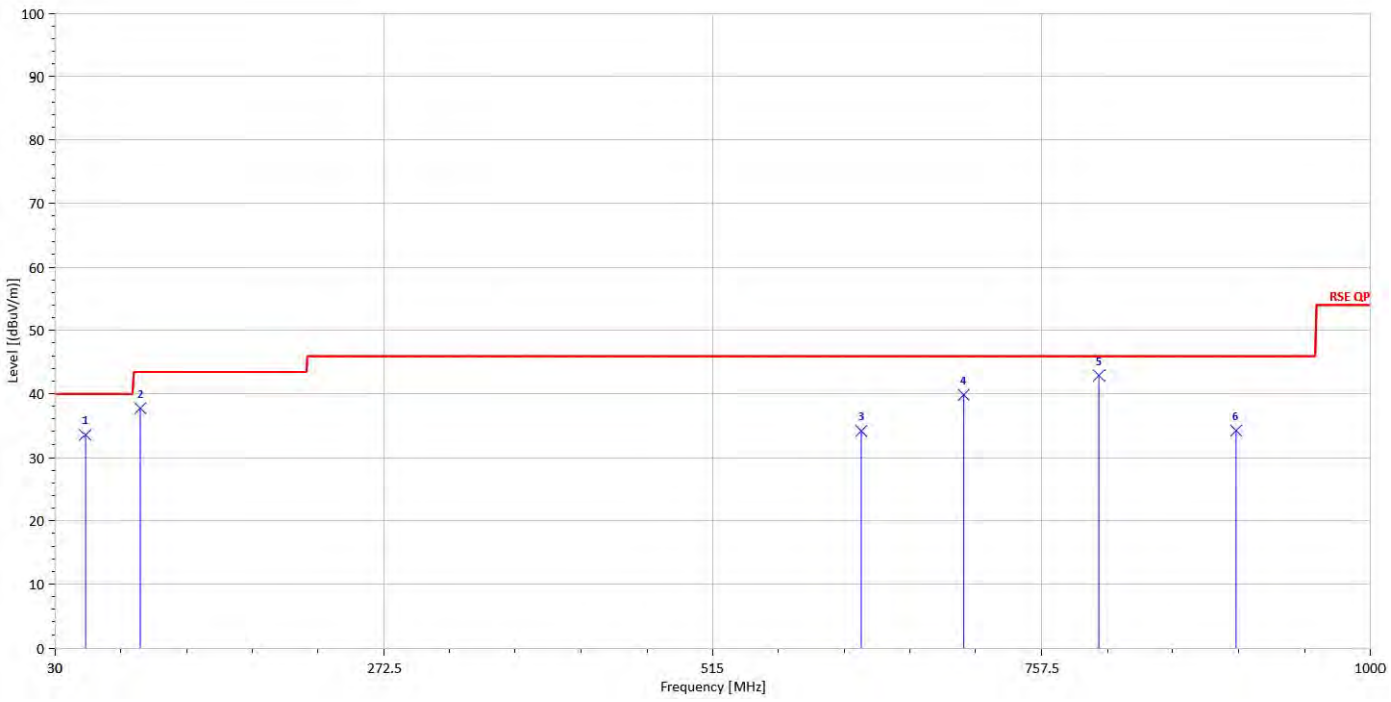

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	53.66	-20.18	33.49	40	-6.51
93.05	S	Peak	56.69	-18.95	37.73	43.5	-5.77
624.61	S	Peak	40.22	-6.11	34.11	46	-11.89
700.27	S	Peak	45.07	-5.20	39.87	46	-6.13
800.18	S	Peak	46.50	-3.56	42.95	46	-3.05
901.06	S	Peak	36.26	-2.09	34.17	46	-11.83

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

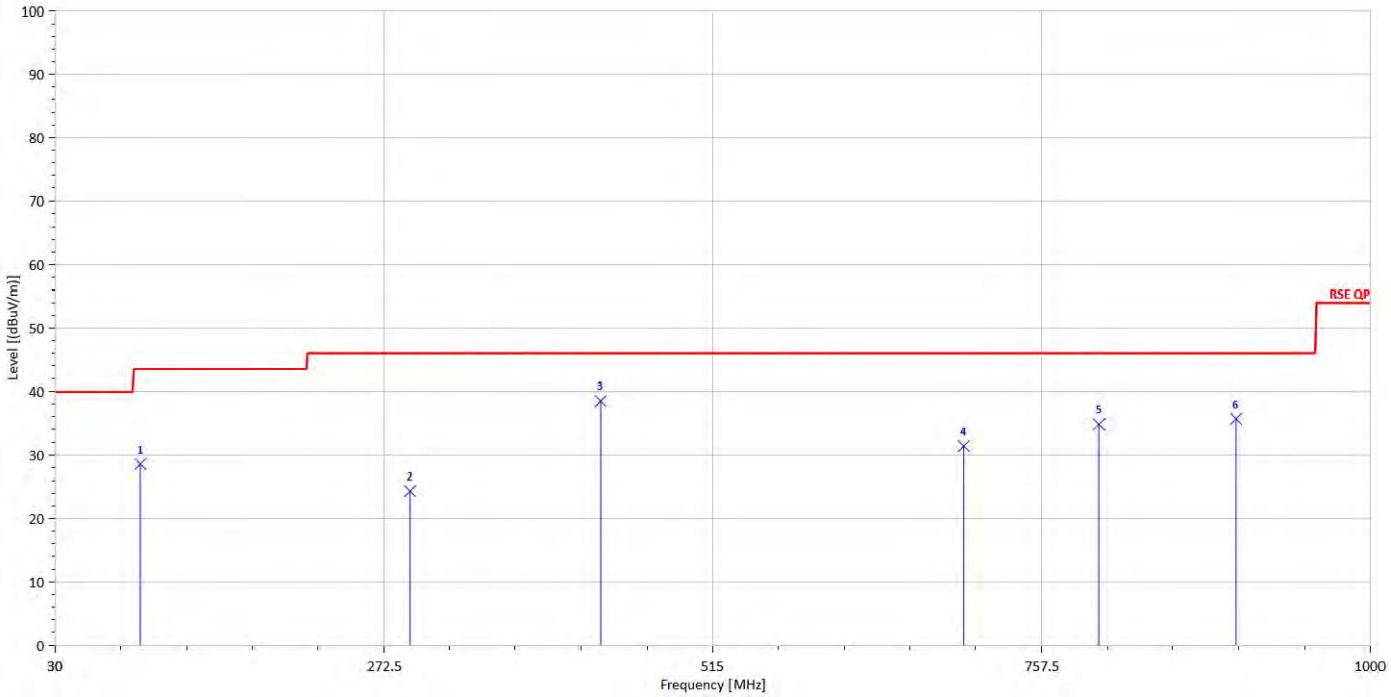

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
93.05	S	Peak	47.49	-18.95	28.54	43.5	-14.96
291.90	S	Peak	37.62	-13.26	24.37	46	-21.63
432.55	S	Peak	48.00	-9.47	38.53	46	-7.47
700.27	S	Peak	36.58	-5.20	31.38	46	-14.62
800.18	S	Peak	38.40	-3.56	34.85	46	-11.15
901.06	S	Peak	37.80	-2.09	35.72	46	-10.28

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

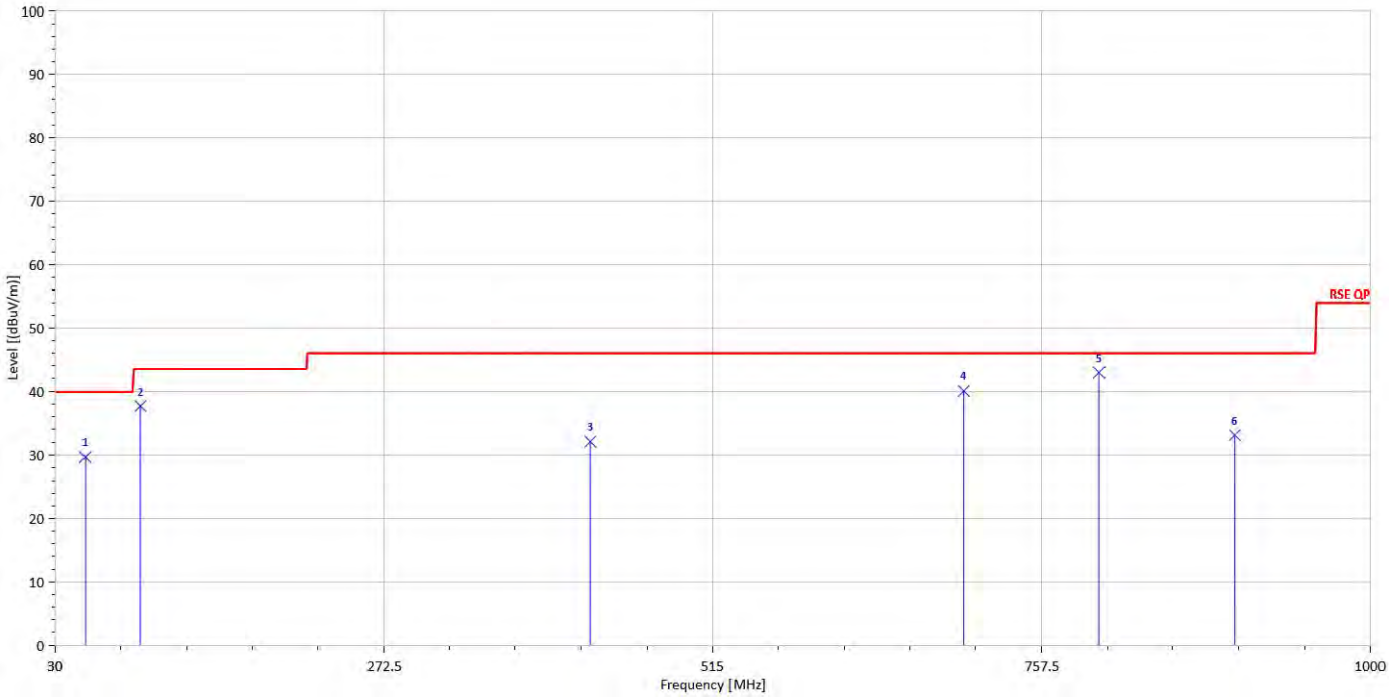

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	49.82	-20.18	29.64	40	-10.36
93.05	S	Peak	56.70	-18.95	37.75	43.5	-5.75
424.79	S	Peak	41.18	-9.10	32.09	46	-13.91
700.27	S	Peak	45.35	-5.20	40.15	46	-5.85
800.18	S	Peak	46.49	-3.56	42.94	46	-3.06
900.09	S	Peak	35.36	-2.25	33.11	46	-12.89

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

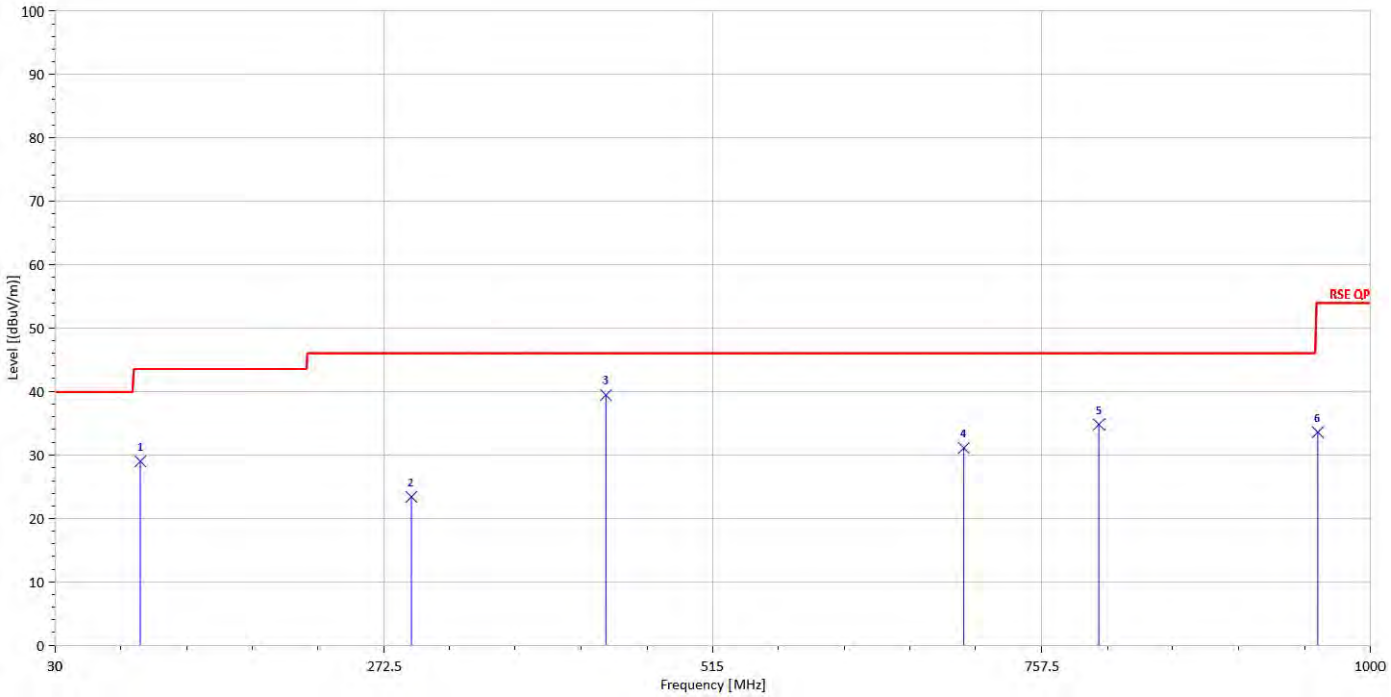

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
93.05	S	Peak	47.92	-18.95	28.97	43.5	-14.53
292.87	S	Peak	36.68	-13.23	23.45	46	-22.55
436.43	S	Peak	48.70	-9.20	39.49	46	-6.51
700.27	S	Peak	36.30	-5.20	31.10	46	-14.90
800.18	S	Peak	38.39	-3.56	34.83	46	-11.17
961.20	S	Peak	35.86	-2.27	33.59	54	-20.41

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

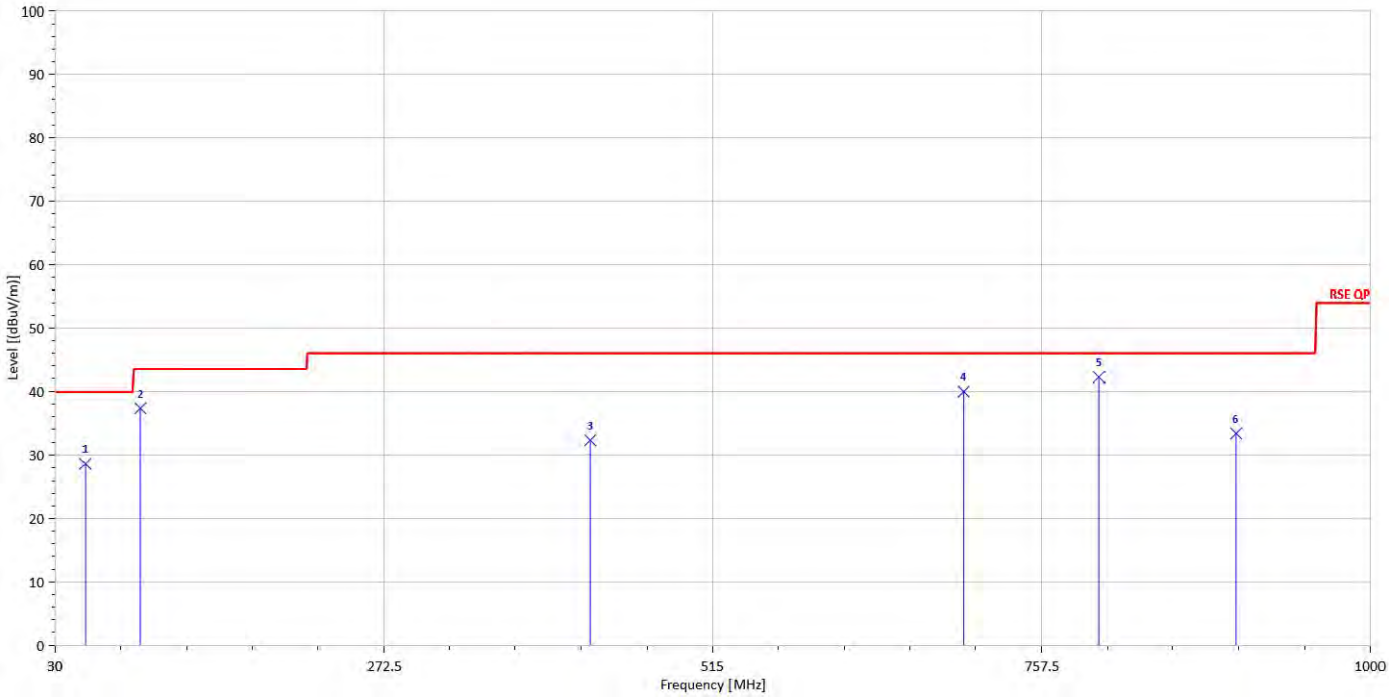

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
52.31	S	Peak	48.74	-20.18	28.57	40	-11.43
93.05	S	Peak	56.35	-18.95	37.40	43.5	-6.10
424.79	S	Peak	41.41	-9.10	32.32	46	-13.68
700.27	S	Peak	45.24	-5.20	40.04	46	-5.96
800.18	S	Peak	45.79	-3.56	42.23	46	-3.77
901.06	S	Peak	35.48	-2.09	33.39	46	-12.61

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

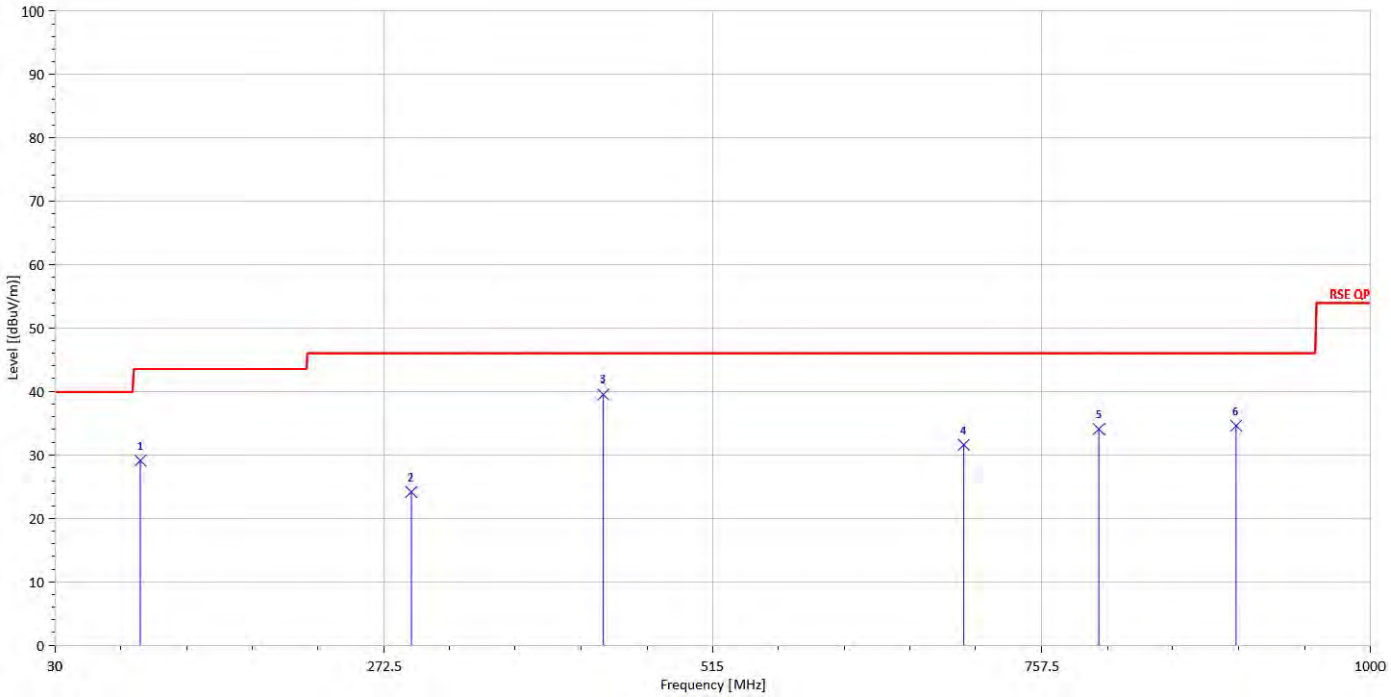

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
93.05	S	Peak	48.04	-18.95	29.08	43.5	-14.42
292.87	S	Peak	37.46	-13.23	24.22	46	-21.78
434.49	S	Peak	48.99	-9.41	39.59	46	-6.41
700.27	S	Peak	36.78	-5.20	31.58	46	-14.42
800.18	S	Peak	37.64	-3.56	34.09	46	-11.91
901.06	S	Peak	36.71	-2.09	34.62	46	-11.38

Above 1GHz Data:

Radiated Spurious Emission Measurement Result (802.11 b)

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

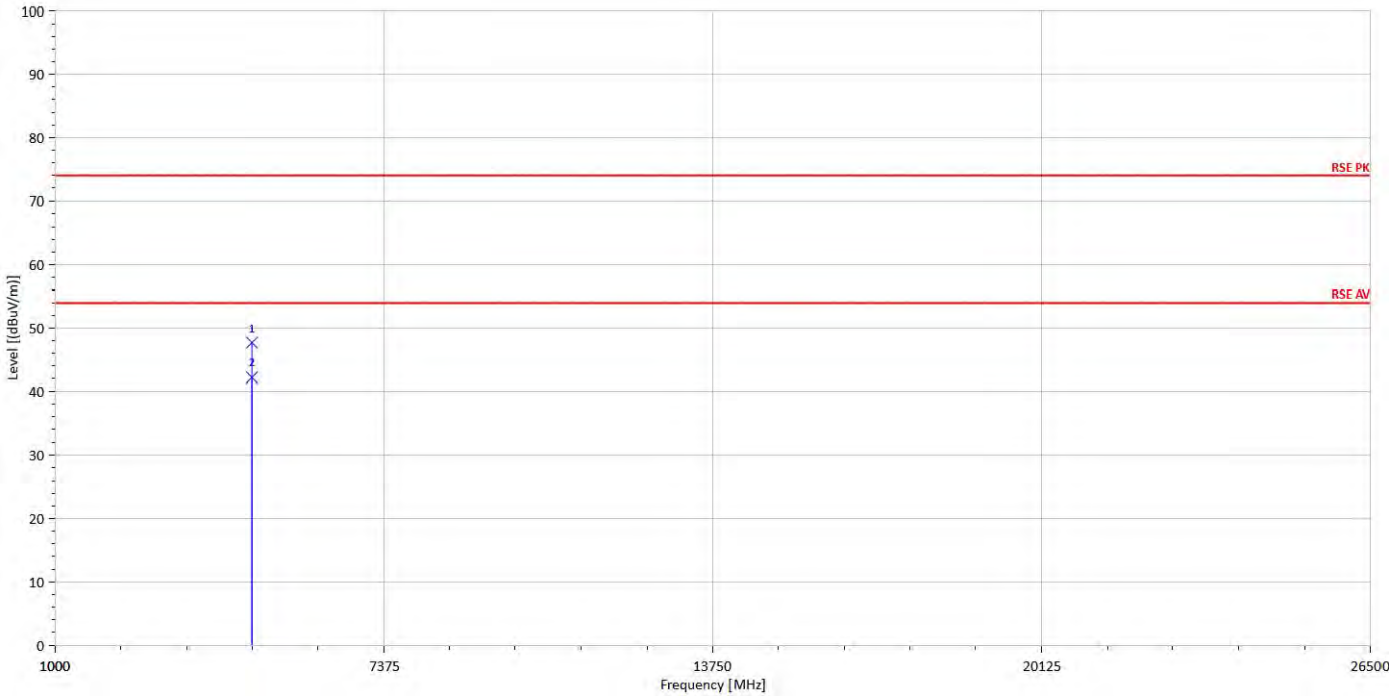

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	40.12	7.58	47.70	74	-26.30
4824.00	H	Average	34.62	7.58	42.20	54	-11.80

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

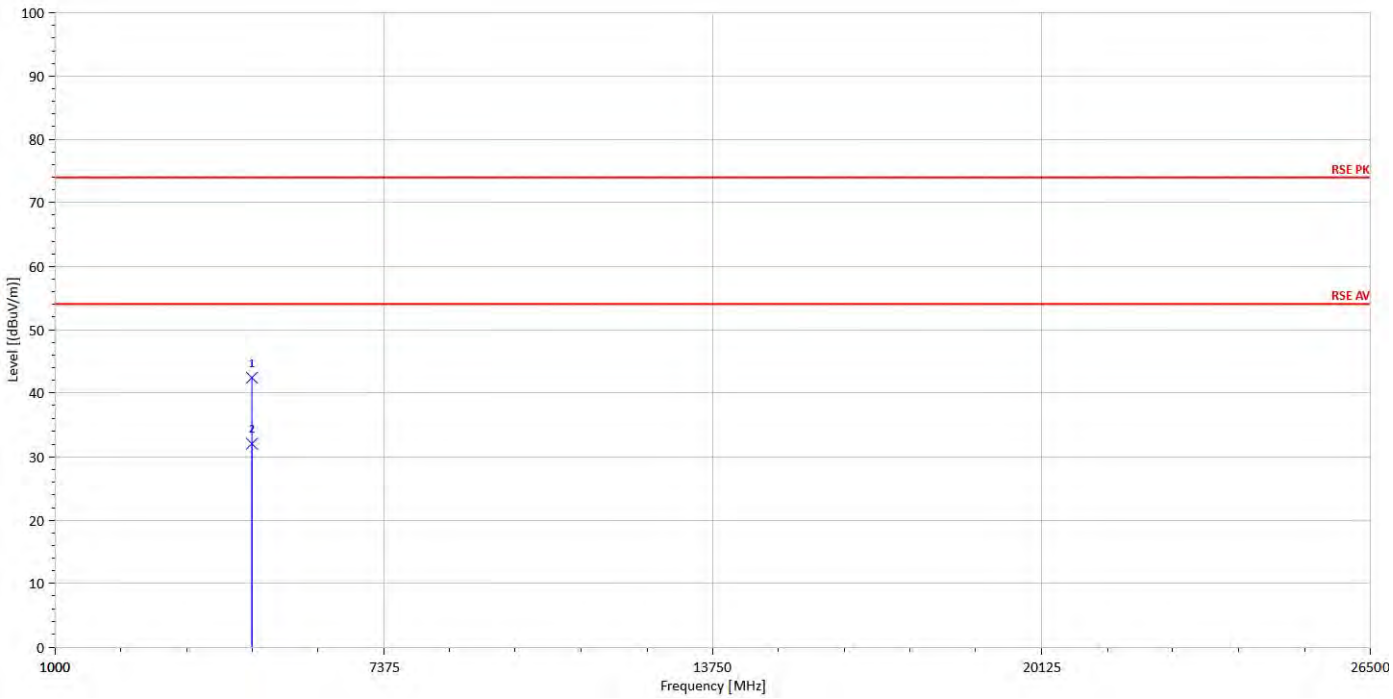

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	34.86	7.58	42.44	74	-31.56
4824.00	H	Average	24.51	7.58	32.09	54	-21.91

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

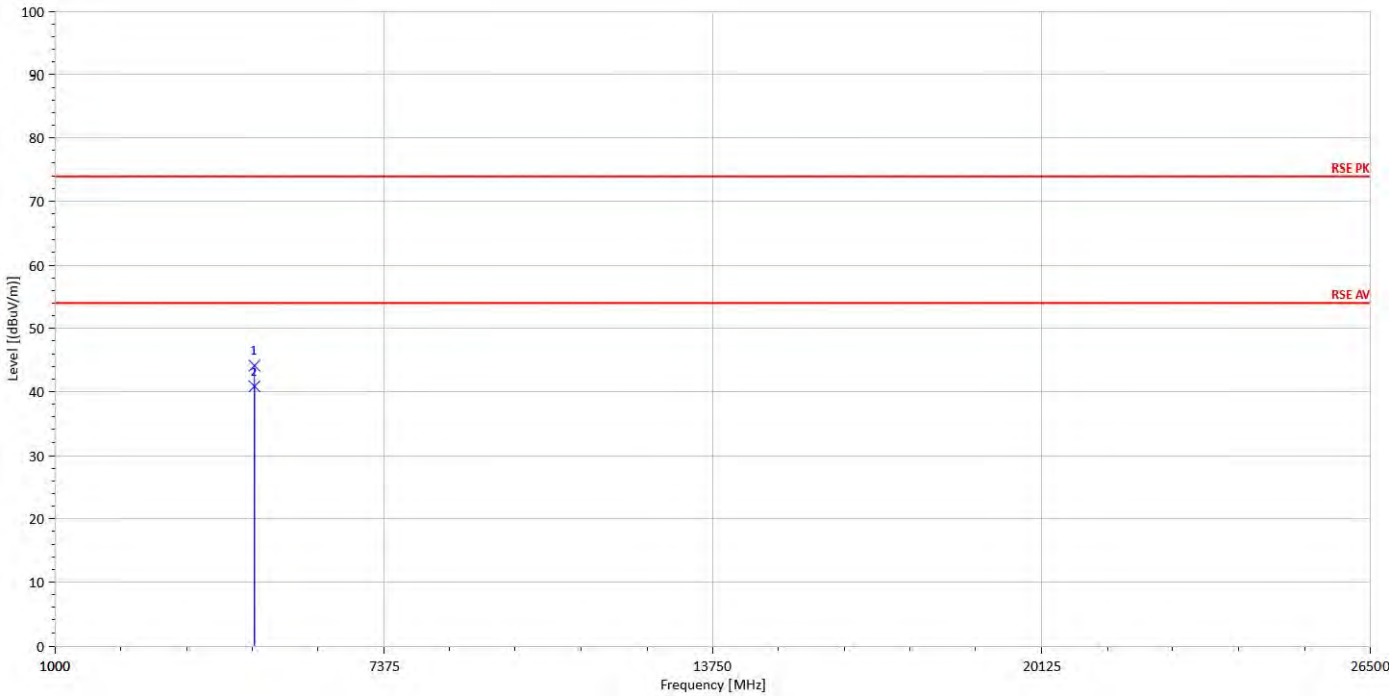

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	36.28	7.91	44.19	74	-29.81
4874.00	H	Average	32.98	7.91	40.89	54	-13.11

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

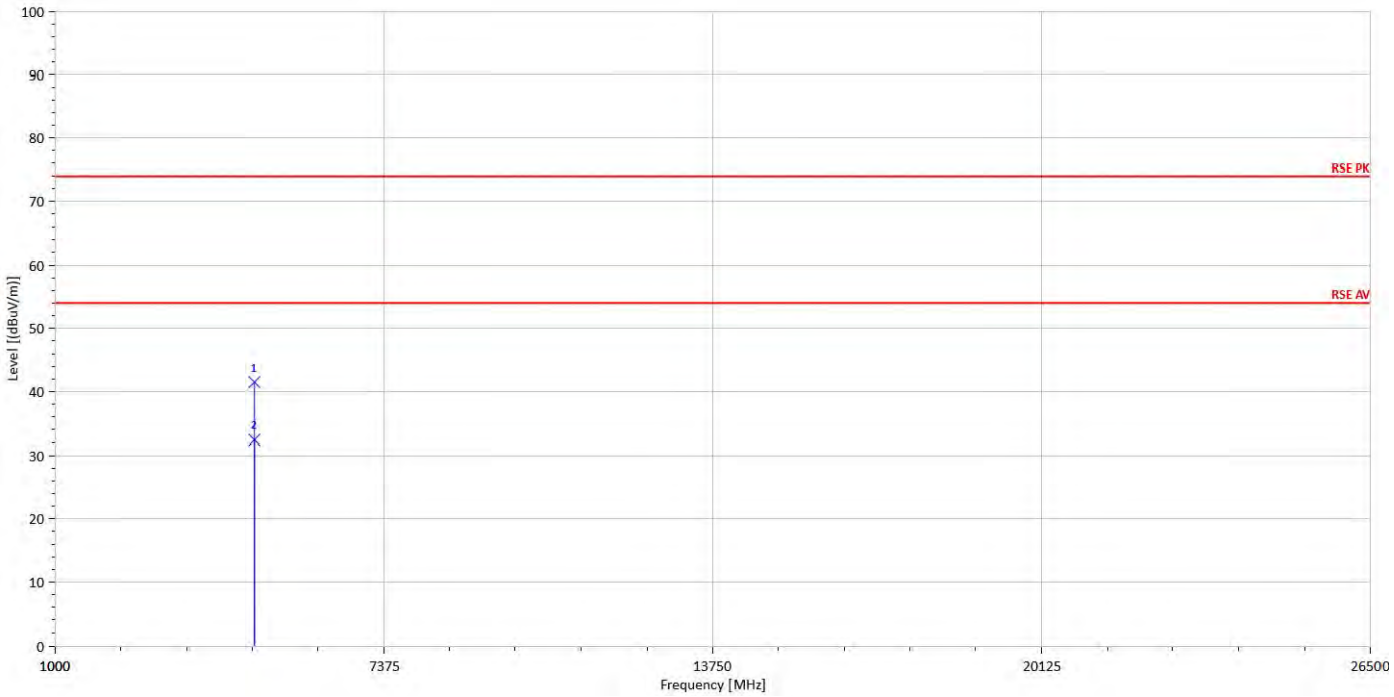

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	33.65	7.91	41.56	74	-32.44
4874.00	H	Average	24.51	7.91	32.42	54	-21.58

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

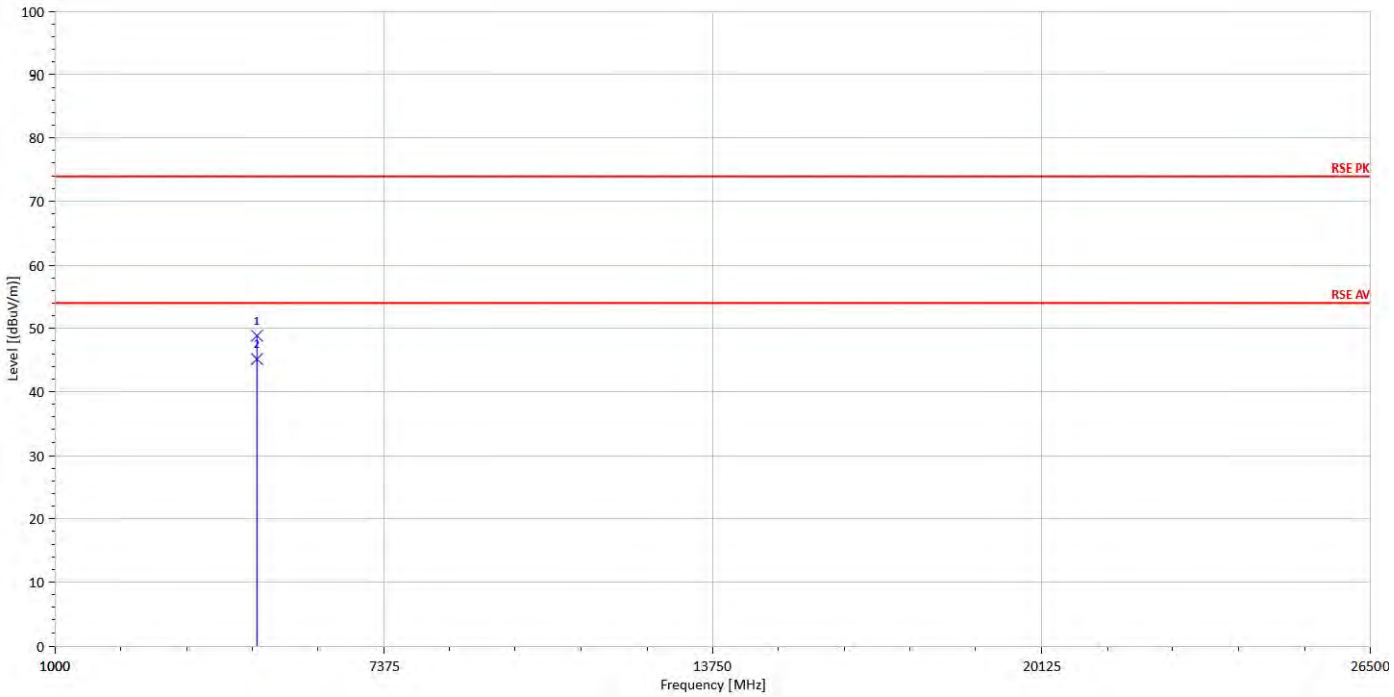

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	40.88	7.92	48.80	74	-25.20
4924.00	H	Average	37.31	7.92	45.23	54	-8.77

Operation Mode :	802.11b	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

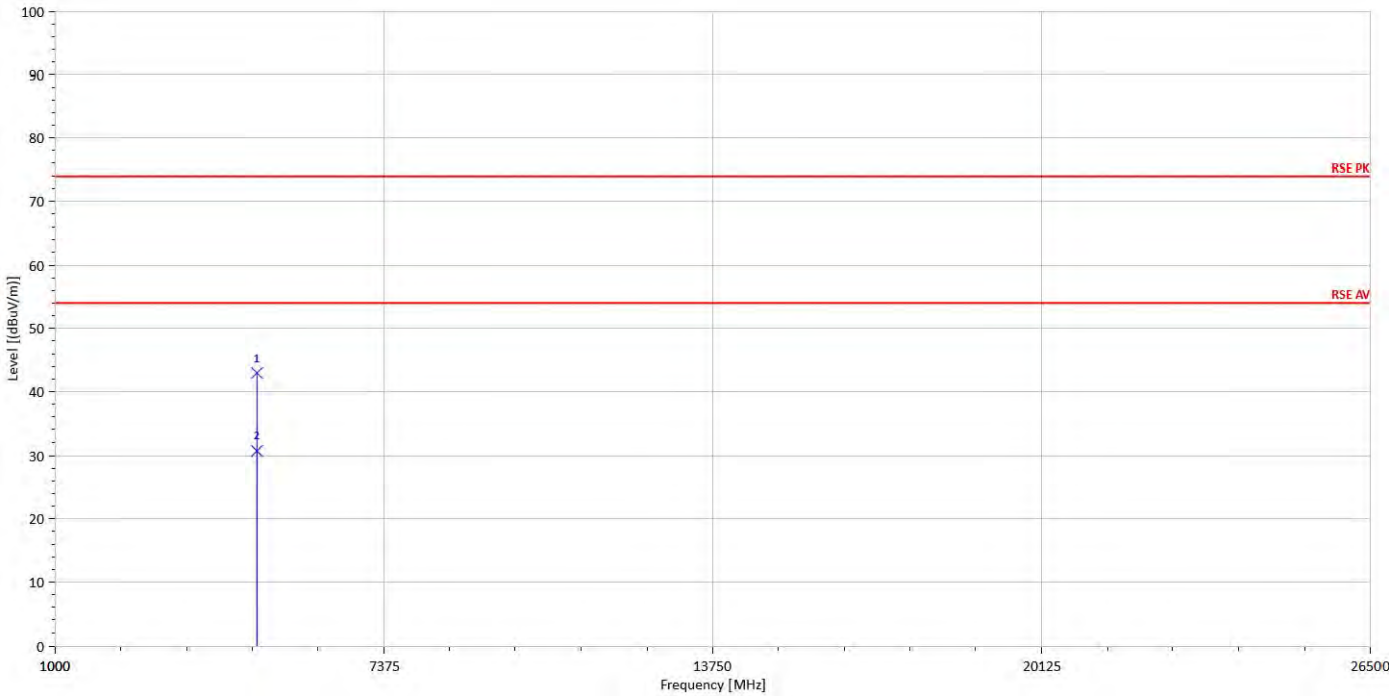

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	35.12	7.92	43.04	74	-30.96
4924.00	H	Average	22.84	7.92	30.76	54	-23.24

Radiated Spurious Emission Measurement Result (802.11 g)

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

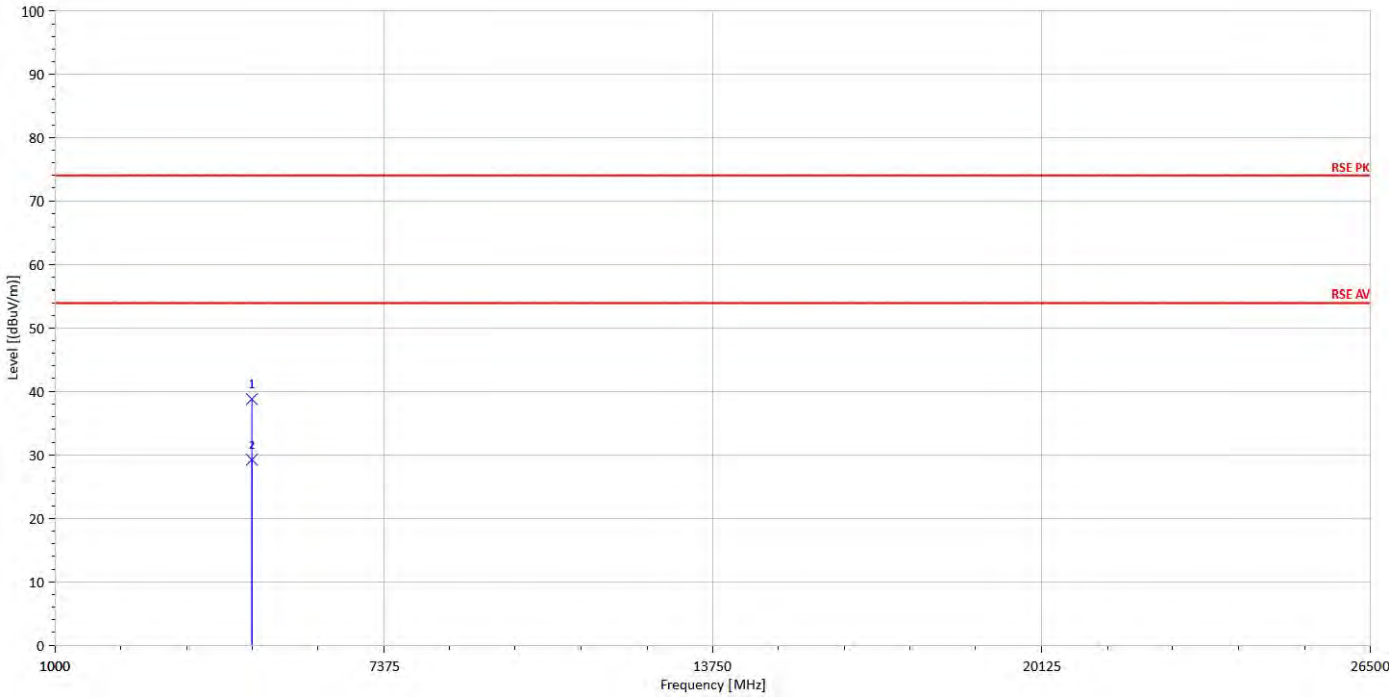

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	31.28	7.58	38.86	74	-35.14
4824.00	H	Average	21.64	7.58	29.22	54	-24.78

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

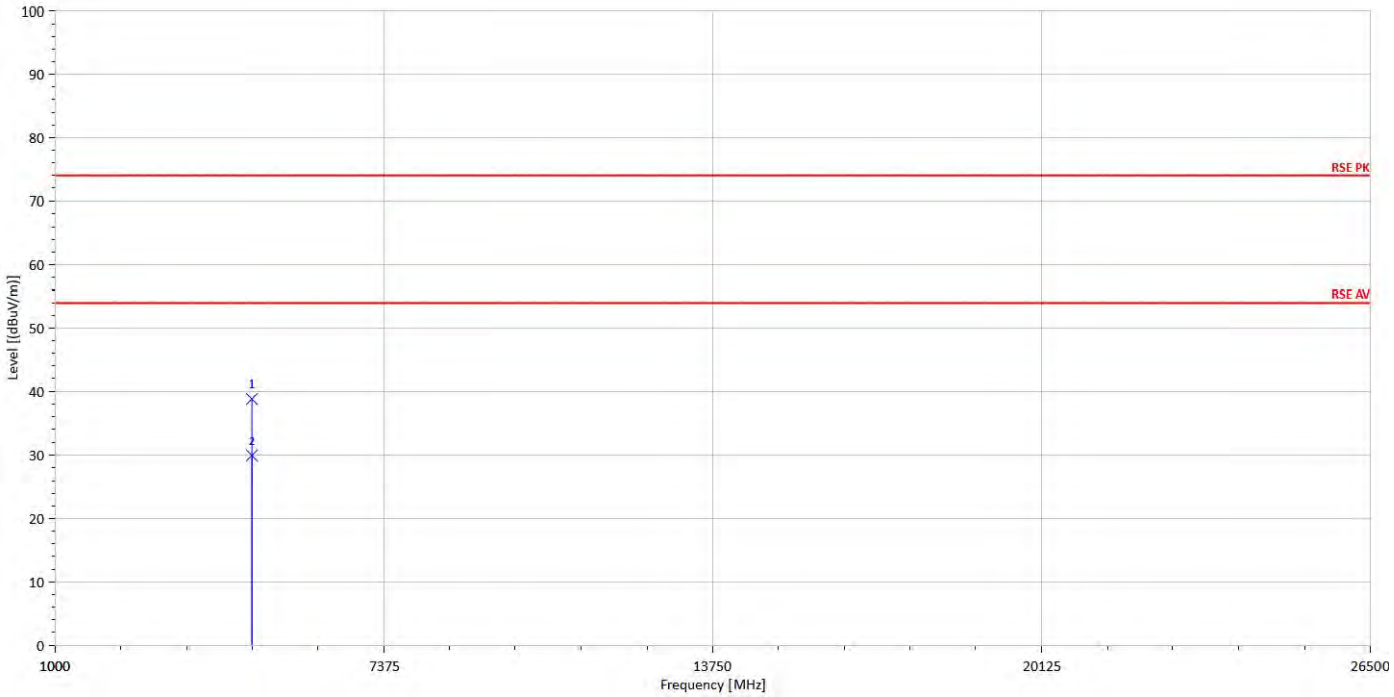

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	31.30	7.58	38.88	74	-35.12
4824.00	H	Average	22.32	7.58	29.90	54	-24.10

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

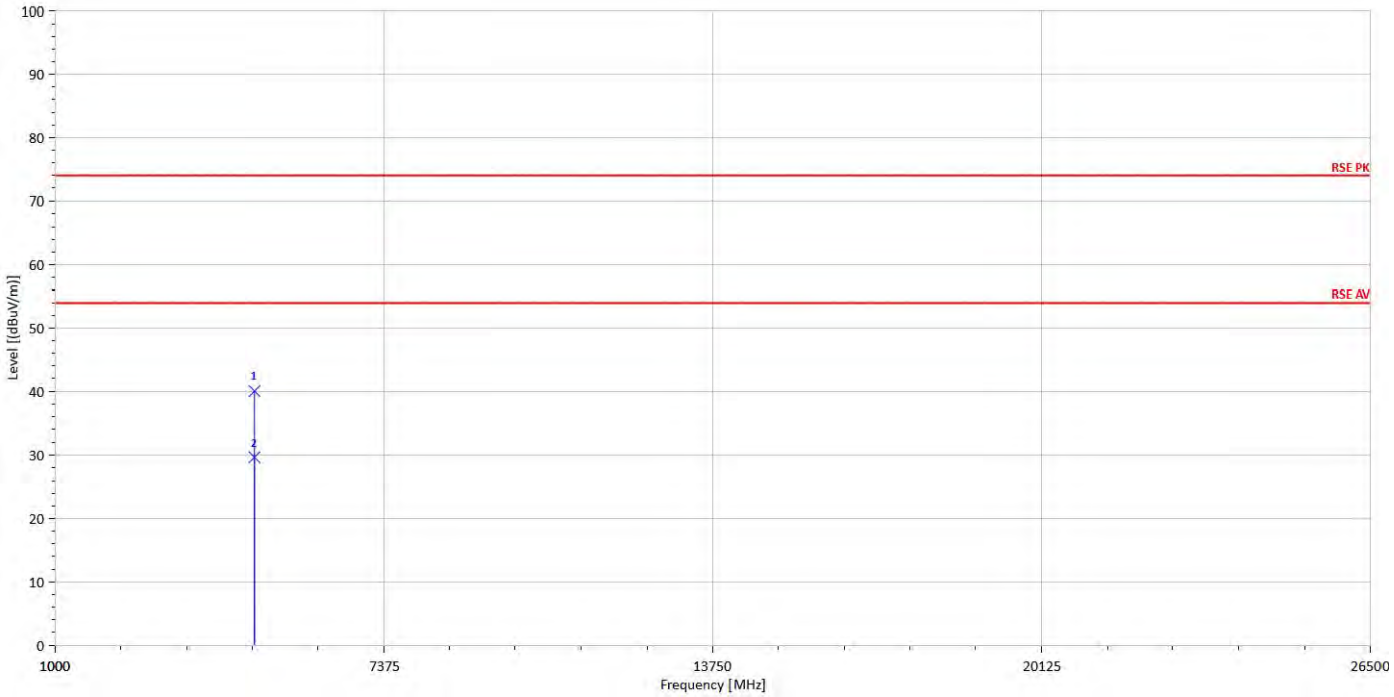

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	32.23	7.91	40.14	74	-33.86
4874.00	H	Average	21.69	7.91	29.60	54	-24.40

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

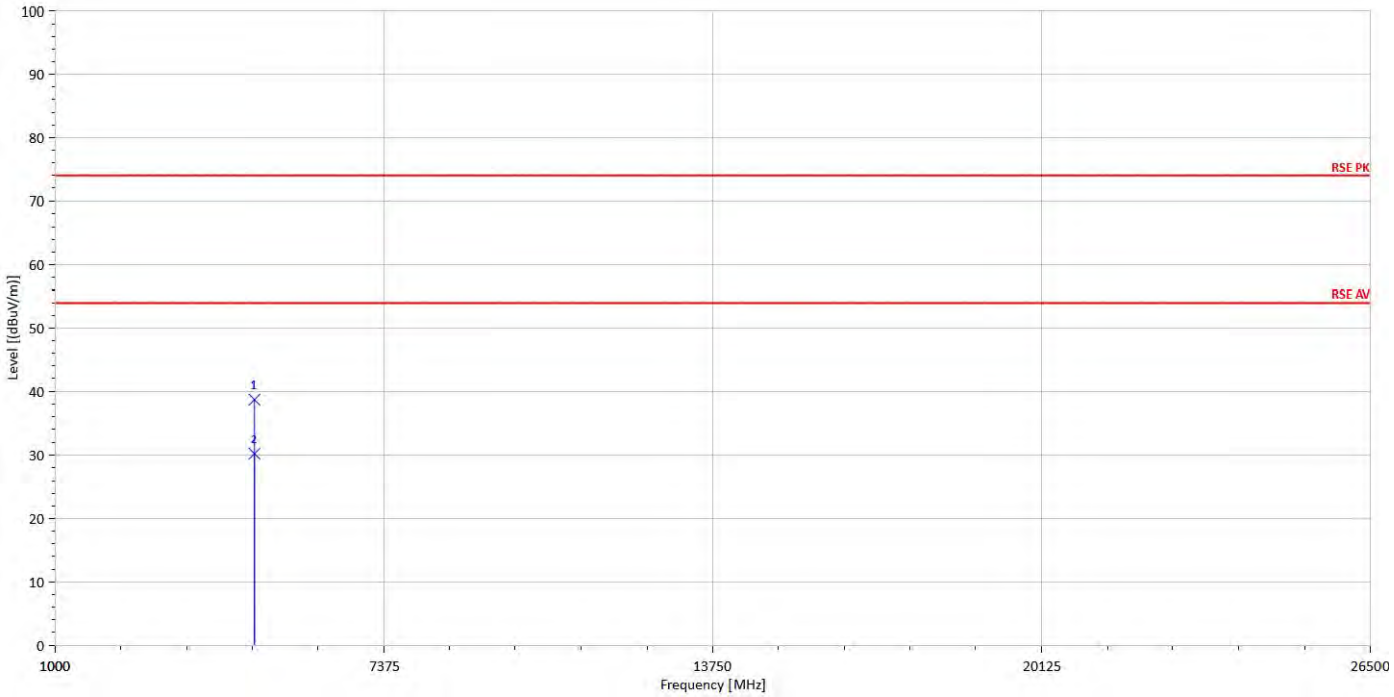

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	30.87	7.91	38.78	74	-35.22
4874.00	H	Average	22.26	7.91	30.17	54	-23.83

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

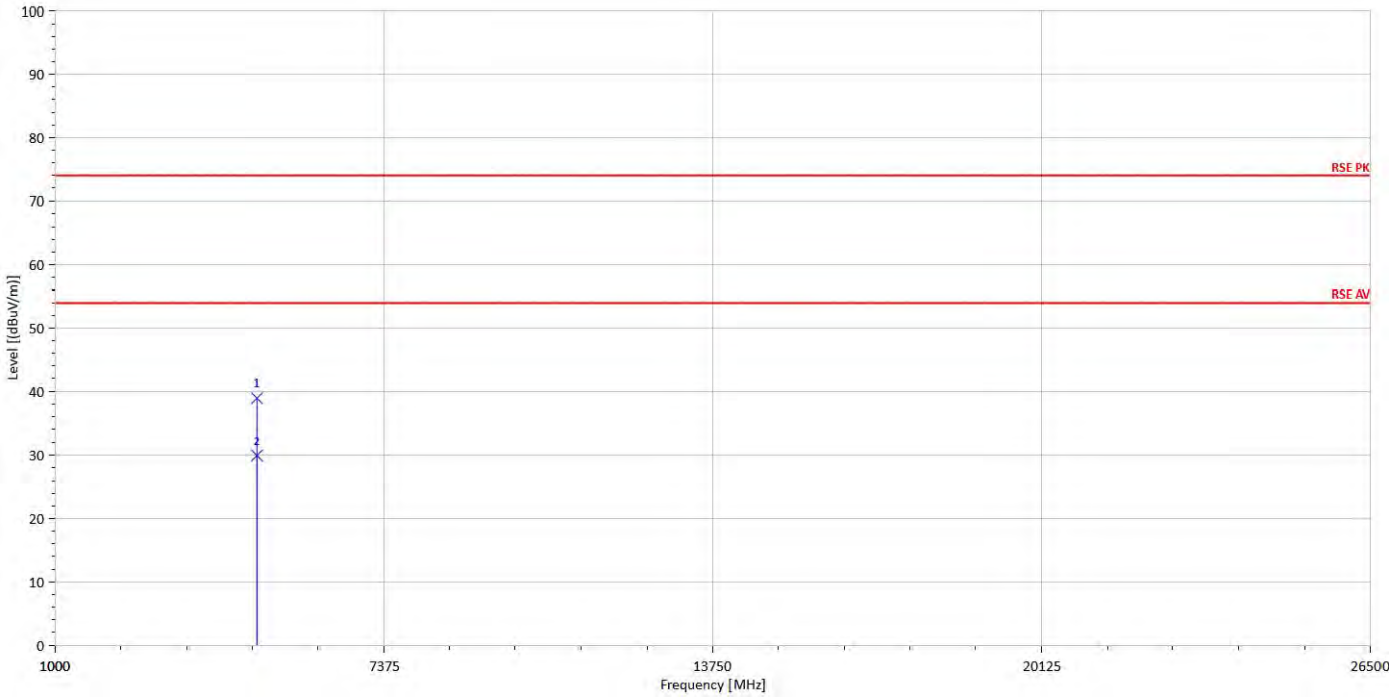

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	31.08	7.92	39.01	74	-34.99
4924.00	H	Average	21.96	7.92	29.88	54	-24.12

Operation Mode :	802.11g	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

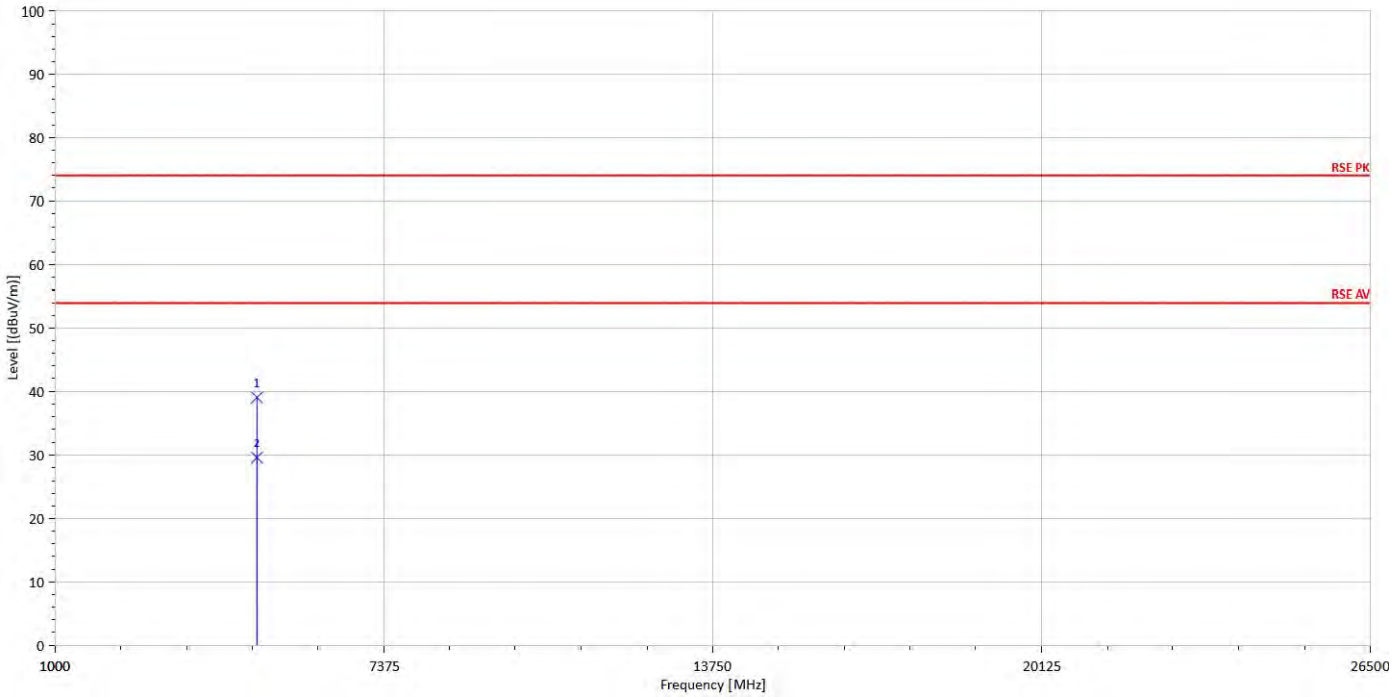

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	31.19	7.92	39.11	74	-34.89
4924.00	H	Average	21.62	7.92	29.54	54	-24.46

Radiated Spurious Emission Measurement Result (802.11_HT20)

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

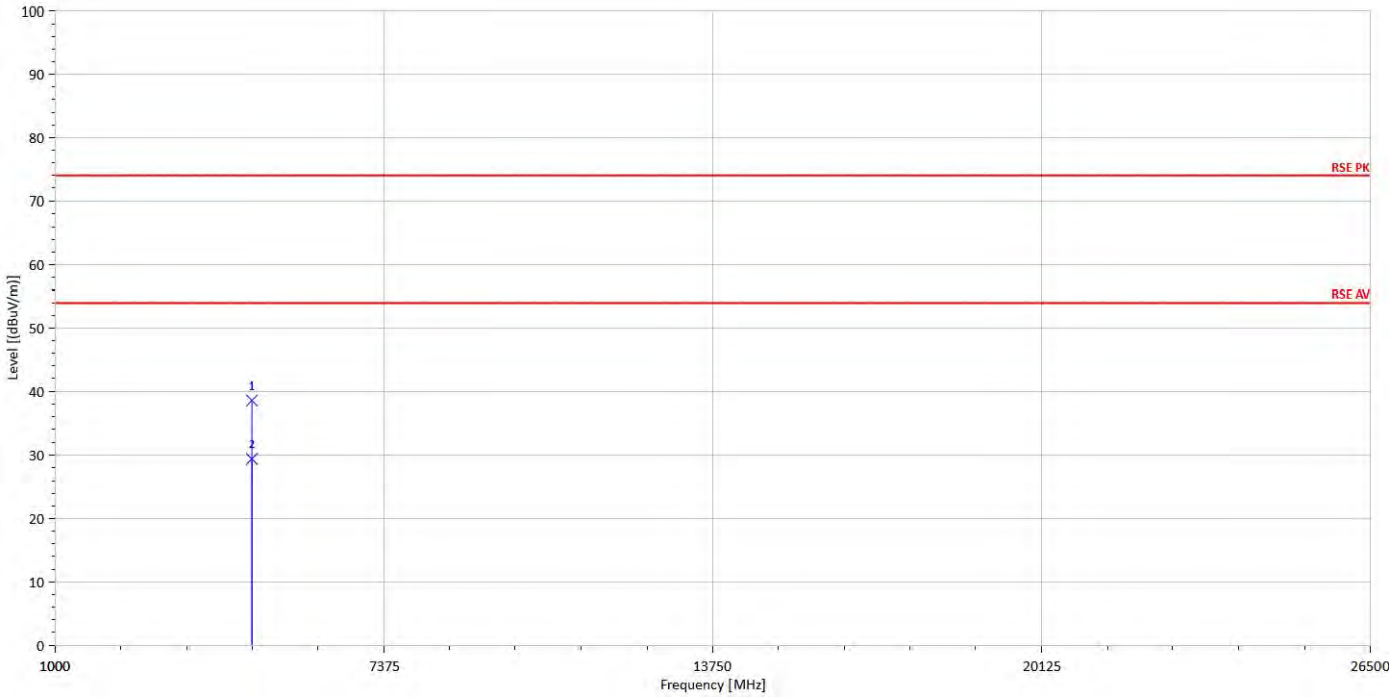

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	31.07	7.58	38.64	74	-35.36
4824.00	H	Average	21.76	7.58	29.34	54	-24.66

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Low	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

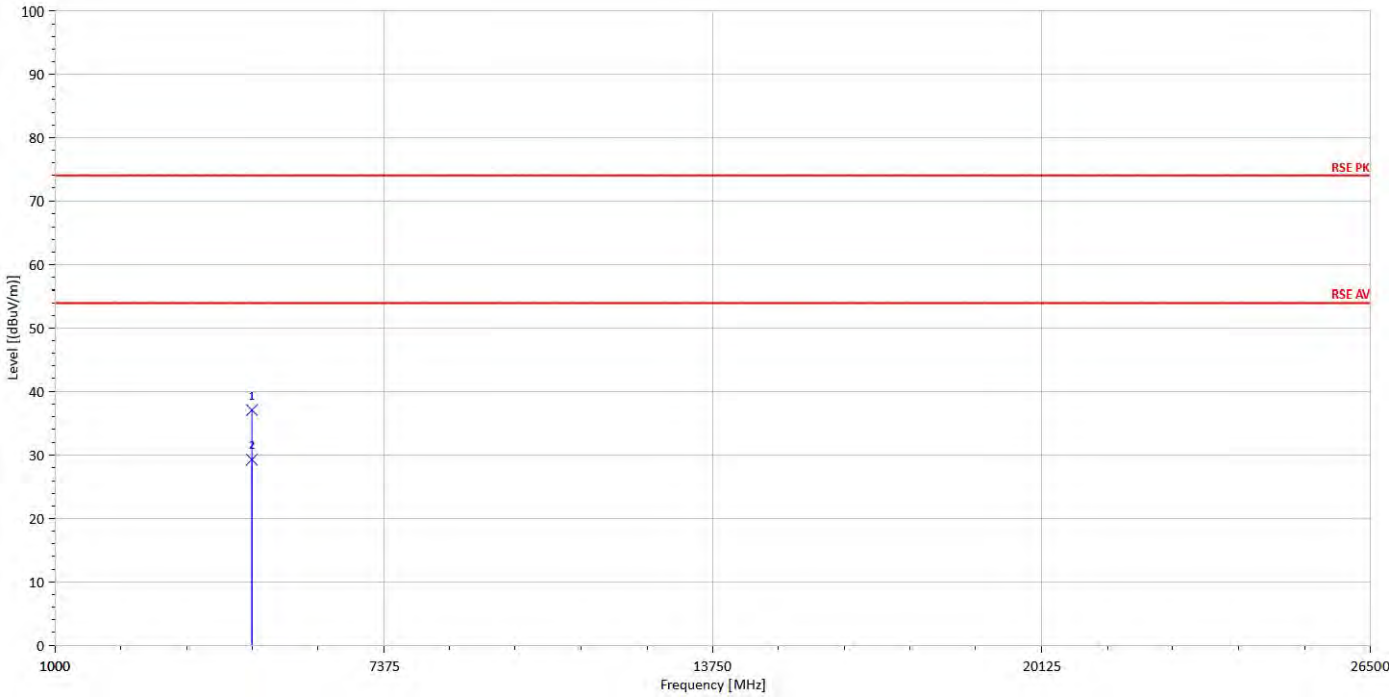

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	H	Peak	29.54	7.58	37.11	74	-36.89
4824.00	H	Average	21.65	7.58	29.23	54	-24.77

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

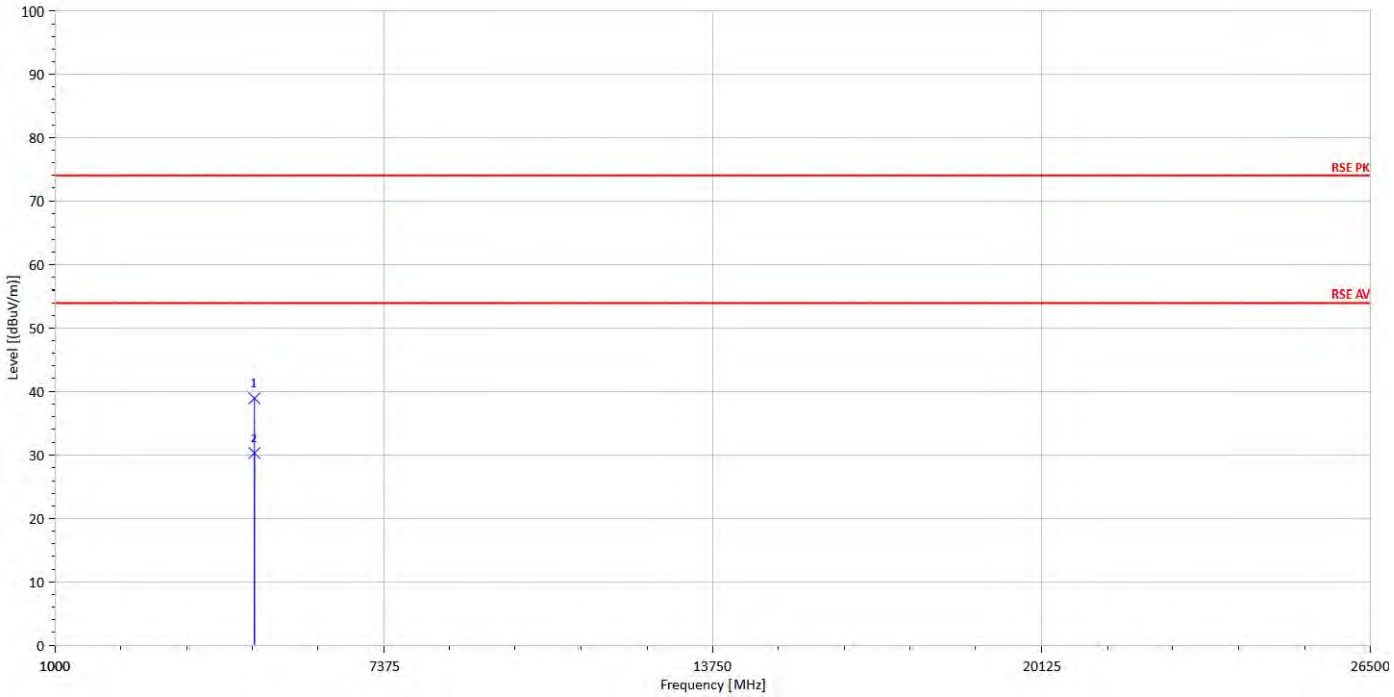

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	31.07	7.91	38.98	74	-35.02
4874.00	H	Average	22.36	7.91	30.27	54	-23.73

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH Mid	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

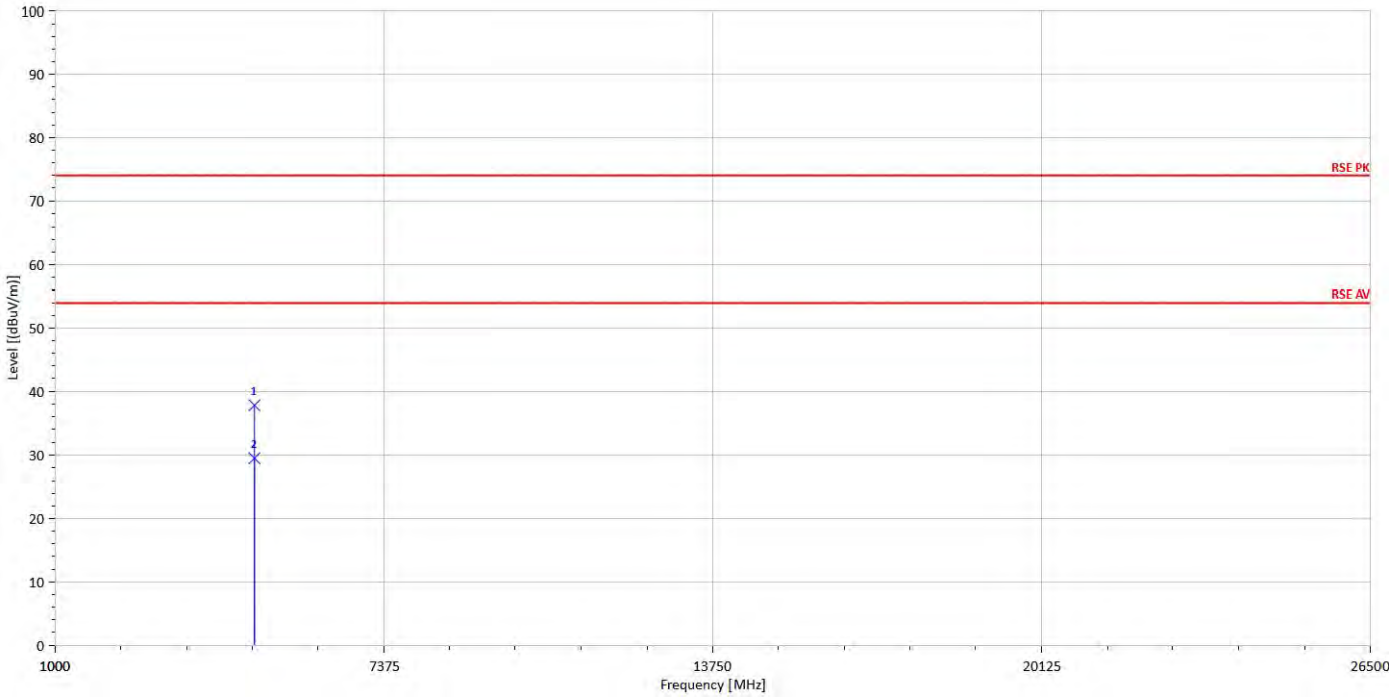

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	H	Peak	29.96	7.91	37.87	74	-36.13
4874.00	H	Average	21.54	7.91	29.45	54	-24.55

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

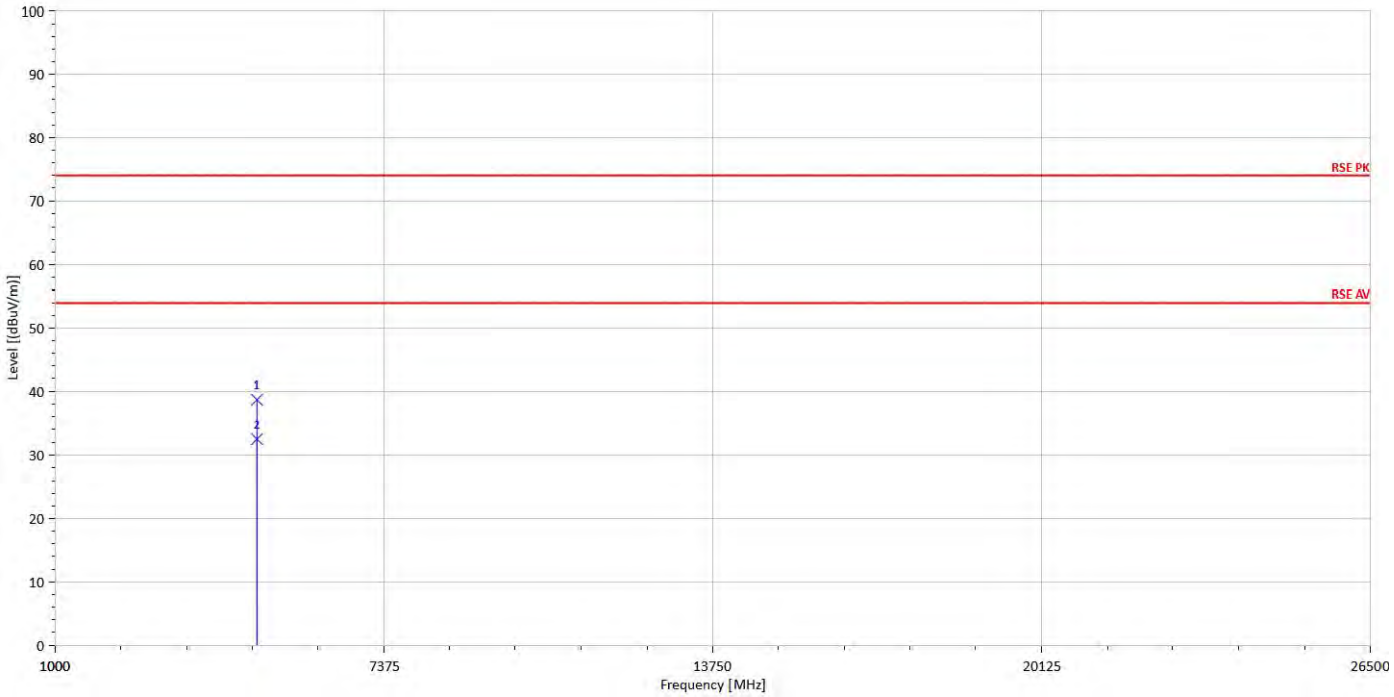

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	30.83	7.92	38.75	74	-35.25
4924.00	H	Average	24.57	7.92	32.49	54	-21.51

Operation Mode :	802.11n20	Test Date :	2017/1/3
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	23.0deg_C/63RH
Operation Band :	Tx CH High	Test Engineer :	Ashton
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

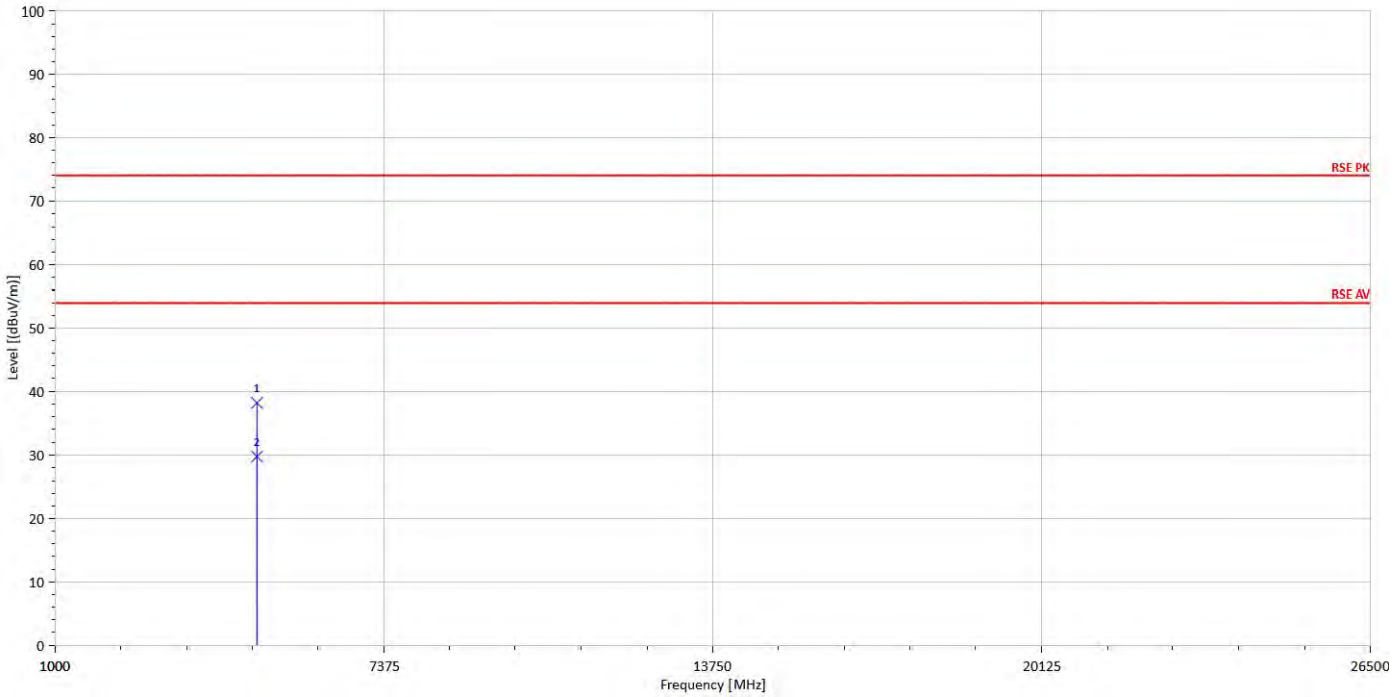

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	H	Peak	30.34	7.92	38.26	74	-35.74
4924.00	H	Average	21.79	7.92	29.71	54	-24.29

12 PEAK POWER SPECTRAL DENSITY

12.1 Standard Applicable

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Equipment Used

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2016	04/13/2017
Coaxial Cable 30cm	WOKEN	00100A1F1A 195C	RF01	12/12/2016	12/11/2017
DC Block	PASTERNACK	PE8210	RF29	12/12/2016	12/11/2017
Attenuator	WOKEN	218FS-10	RF23	12/12/2016	12/11/2017

12.3 Test Set-up

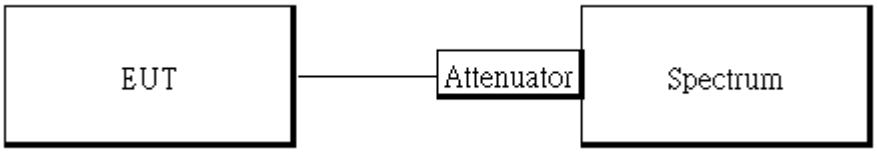

12.4 Measurement Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 3 kHz. & the VBW = 10 kHz
5. For defining Restricted Band Edge Limit:
   Set the RBW = 100kHz & VBW = 300 kHz.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. 802.11n MIMO mode: offset is set following “measure and add 10 Log (N)” on spectrum to measure the PSD for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna. N=2 for this given application.

Note:

Antenna Gain:	*2.00*	dBi
Aux1 Antenna Gain:	*2.00*	dBi
Aux2 Antenna Gain:	*0.00*	dBi
Aux3 Antenna Gain:	*0.00*	dBi
Number Antenna:	*2*	pcs
Limit:	*8*	dBm

The antenna gain is grater than 6dBi in MIMO mode the limit reduce as below:
Directional gain = gain of antenna element + 10 log (# of TX antenna elements)
Effective Legacy Gain (dBi) = 2+3.01=5.01dBi
Limit: 8dBm – (5.01– 6dBi)=8

12.5 Measurement Result

POWER DENSITY 802.11b MODE				POWER DENSITY 802.11g MODE			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result	Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2412	-7.85	8.00	PASS	2412	-8.87	8.00	PASS
2437	-7.83	8.00	PASS	2437	-8.64	8.00	PASS
2462	-8.38	8.00	PASS	2462	-8.69	8.00	PASS

POWER DENSITY 802.11n HT20 MODE			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2412	-8.05	8.00	PASS
2437	-9.03	8.00	PASS
2462	-9.32	8.00	PASS

Note:

offset	*10.90*	*dB for SISO mode*
offset	*13.90*	*dB for MIMO mode*

**Refer to next page for plots*

802.11b

Power Spectral Density Test Plot (CH-Low)

Power Spectral Density Test Plot (CH-Mid)

Power Spectral Density Test Plot (CH-High)

802.11g

Power Spectral Density Test Plot (CH-Low)

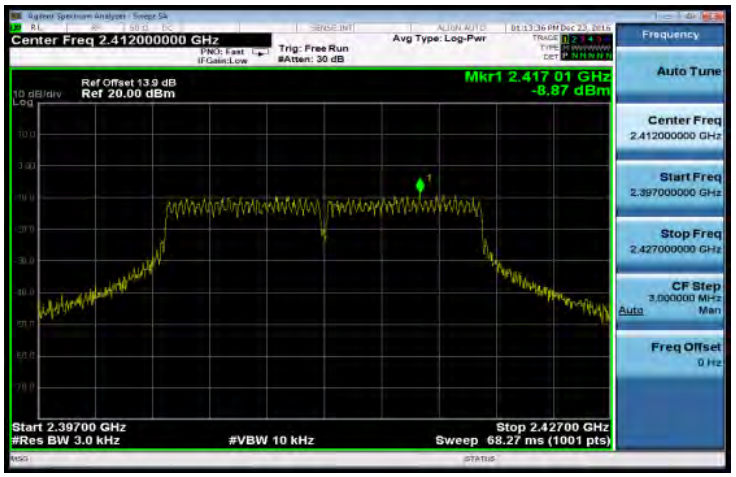

Power Spectral Density Test Plot (CH-Mid)

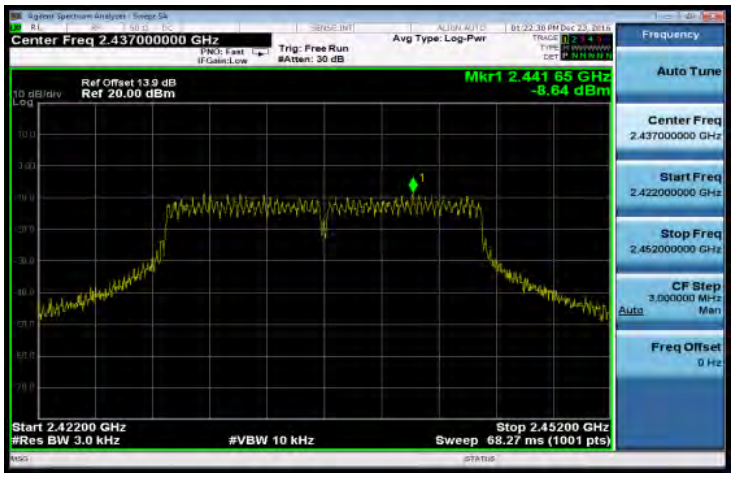

Power Spectral Density Test Plot (CH-High)

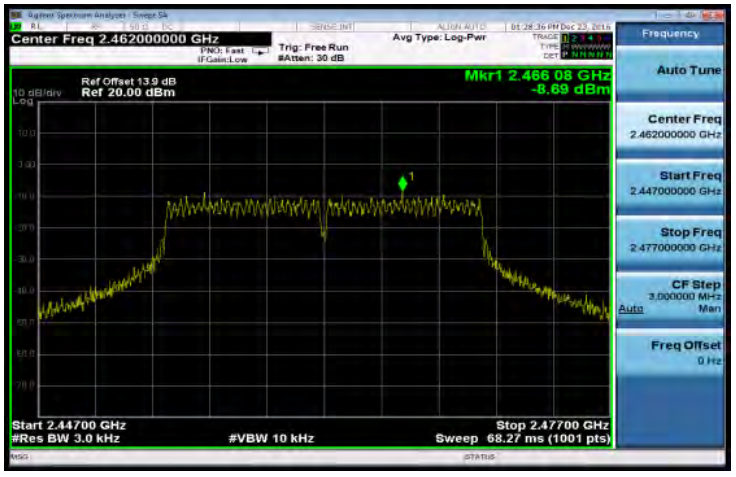

802.11n_HT20

Power Spectral Density Test Plot (CH-Low)

Power Spectral Density Test Plot (CH-Mid)

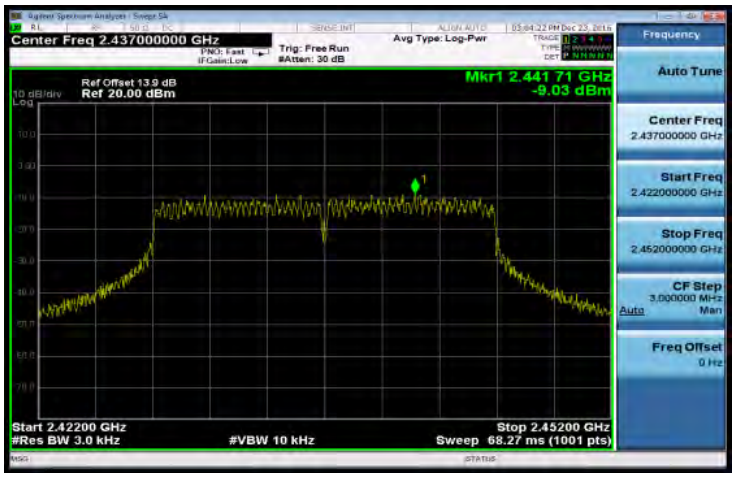

Power Spectral Density Test Plot (CH-High)

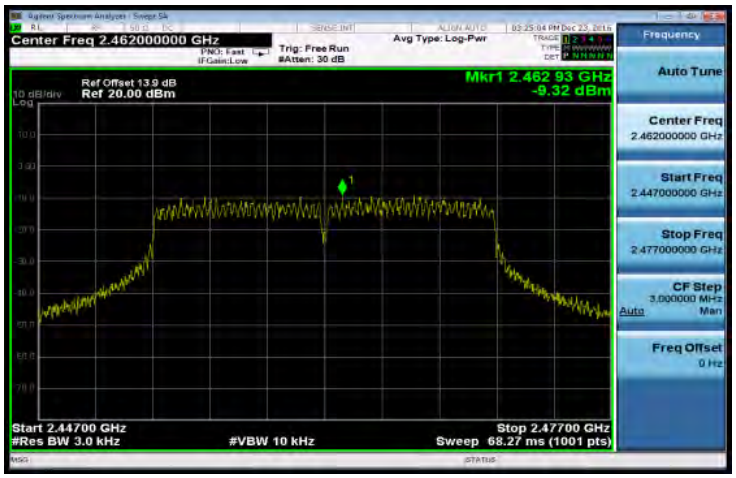

13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~