

Page 1 of 73

## **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT CLASS II PC REPORT

OF

Applicant: Barco NV

President Kennedypark 35 8500 Kortrijk Belgium

Product Name: ClickShare

Brand Name: Barco

Model No.: R9861600D01C

Model Difference: N/A

Report Number: T190823W01-RP

**FCC ID:** 2AAED-R9861600D01

FCC Rule Part: §15.247, Cat: DTS

**Issue Date:** Sep. 04, 2019

**Date of Test:** Aug. 23, 2019 ~ Aug. 28, 2019

Date of EUT Received: Aug. 23, 2019

Compliance Certification Services Inc.Wugu Lab.

Issued by:

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Peter Weng / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。




Page 2 of 73

## **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190823W01-RP	Rev.00	Initial creation of docu- ment	All	Sep. 04, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






## **Table of Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	PEAK OUTPUT POWER MEASUREMENT	12
7	6DB BANDWIDTH MEASUREMENT	15
8	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	19
9	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	28
10	POWER SPECTRAL DENSITY	69
11	ANTENNA RECUIREMENT	73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

тлу дошит элико пактыту жинк пактыту жинк





**GENERAL INFORMATION** 

#### 1.1 Product description

Product Name:	ClickShare
Brand Name:	Barco
Model No.:	R9861600D01C
Model Difference:	N/A
Hardware Version:	DVT
Software Version:	4.5.23.1 (SX-2.03)
Power Supply:	5Vdc from USB Port
Class II Permissive Change Scope:	Add CH12-13 for 802.11b, 802.11g, 802.11n_HT20 and CH10-11 for 802.11n_HT40.

Wi-Fi 802.11	Frequency Range	Channels	Rated Power (dBm)	Modulation Technology
b			18.59	DSSS
g	2467-2472	2	22.07	
n_HT20			21.58	OFDM
n_HT40	2457-2462	2	20.29	
Modulation type: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM				
Transition Rate:  802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps 802.11 n_40MHz: 13.5 - 150.0Mbps				

## 1.2 Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)
Ceramic Chip	Pulse Electronics	W3078	2400 – 2483.5	1.7

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 5 of 73

#### 1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas. Guidance v05r02

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

## 1.4 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

#### 1.5 Special Accessories

There are no special accessories used while test was conducted.

## 1.6 Equipment Modifications

There was no modification incorporated into the EUT.

#### 1.7 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m\*9m\*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 6 of 73

#### SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### 2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.


#### 2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## 2.4 Configuration of Tested System

Fig. 2-1 Conducted & Radiated Emission Configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2	Notebook	Lenovo	T420	S0012407	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 8 of 73

## **SUMMARY OF TEST RESULTS**

FCC Rules	Description Of Test	Result
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Emission Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

тлу дошит элико пактыту жинк пактыту жинк



Page 9 of 73

#### **DESCRIPTION OF TEST MODES**

#### Operated in 2400 ~ 2483.5MHz Band

2 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	FREQUENCY
12	2467 MHz
13	2472 MHz

2 channels are provided for 802.11n HT40

CHANNEL	FREQUENCY
10	2457 MHz
11	2462 MHz

#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The given UE is pre-scanned among below modes.

Modulation		Transmiss	Multiple Transmission Spatial		
⊠ 802.11 b	⊠ Ch0	⊠ Ch1	☐ Ch2	☐ Ch3	□ 2TX
⊠ 802.11 g	⊠ Ch0	⊠ Ch1	☐ Ch2	☐ Ch3	☐ MIMO
⊠ 802.11 n	⊠ Ch0	⊠ Ch1	□ Ch2	☐ Ch3	☐ MIMO

Note: The device didn't support MIMO mode.

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 10 of 73

#### **RADIATED EMISSION TEST:**

	. <u></u>							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT			
	RADIATED EMISSION TEST (BELOW 1 GHz)							
802.11g	12 to 13	12,13	OFDM	6	Ch1			
	RADIA	TED EMISSION	ON TEST (ABOV	E 1 GHz)				
802.11b	12 to 13	12,13	DSSS	1	Ch1			
802.11g	12 to 13	12,13	OFDM	6	Ch1			
802.11n (HT20)	12 to 13	12,13	OFDM	MCS 0	Ch1			
802.11n (HT40)	10 to 11	10,11	OFDM	MCS 0	Ch1			


#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

#### ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT			
802.11b	12 to 13	12,13	DSSS	1	Ch1			
802.11g	12 to 13	12,13	OFDM	6	Ch1			
802.11n (HT20)	12 to 13	12,13	OFDM	MCS 0	Ch1			
802.11n (HT40)	10 to 11	10,11	OFDM	MCS 0	Ch1			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 11 of 73



#### **MEASUREMENT UNCERTAINTY**

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.922 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.922 dB
Peak Power Density	+/- 2.004 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 12 of 73

#### 6 PEAK OUTPUT POWER MEASUREMENT

## 6.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

#### 6.2 Measurement Equipment Used

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020

#### 6.3 Test Set-up



#### 6.4 Measurement Procedure


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

## **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。






#### 6.5 Measurement Result

<u>41 CIII</u>	ilement Nesalt					
802.1	1b Ch1					
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	RESULT
12	2467	1	17.99	62.95	30.00	PASS
13	2472	1	18.59	72.28	30.00	PASS
802.1	1b Ch1					
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Max. Avg. Output include tune up tolerance Power (mW)	Limit (dBm)	RESULT
12	2467	1	15.65	36.74	30.00	PASS
13	2472	1	15.74	37.51	30.00	PASS

802.1	802.11g Ch1						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	RESULT	
12	2467	6	22.07	161.06	30.00	PASS	
13	2472	6	13.94	24.77	30.00	PASS	
802.1	1g Ch1						
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Max. Avg. Output include tune up tolerance Power (mW)	Limit (dBm)	RESULT	
12	2467	6	15.39	34.57	30.00	PASS	
13	2472	6	7.58	5.72	30.00	PASS	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

тлу дошит элико пактыту жинк пактыту жинк




802.1	802.11n_HT20M Ch1					
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	RESULT
12	2467	MCS0	21.58	143.88	30.00	PASS
13	2472	MCS0	14.26	26.67	30.00	PASS
802.1	1n_HT20	M Ch1				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Max. Avg. Output include tune up tolerance Power (mW)	Limit (dBm)	RESULT
12	2467	MCS0	14.99	31.58	30.00	PASS
13	2472	MCS0	7.50	5.63	30.00	PASS

802.1	802.11n_HT40M Ch1						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	Limit (dBm)	RESULT	
10	2457	MCS0	20.29	106.91	30.00	PASS	
11	2462	MCS0	13.09	20.37	30.00	PASS	
802.1	1n_HT40	M Ch1					
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Max. Avg. Output include tune up tolerance Power (mW)	Limit (dBm)	RESULT	
10	2457	MCS0	13.73	23.61	30.00	PASS	
11	2462	MCS0	6.54	4.51	30.00	PASS	

<sup>\*</sup> Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





Page 15 of 73

#### 7 6DB BANDWIDTH MEASUREMENT

#### 7.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 7.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	02/13/2019	02/12/2020
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020


#### 7.3 Test Set-up



#### 7.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
  - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3\*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



#### 7.5 Measurement Result 6dB Bandwidth

802.11b Ch1

## 802.11g Ch1

2462

002.116 0111					
Freq.	6dB BW	Limit	Result		
(MHz)	(kHz)	(kHz)	Resuit		
2467	8046.00	> 500	PASS		
2472	8065.00	> 500	PASS		

Freq.	6dB BW	Limit	Result	
(MHz)	(kHz)	(kHz)	Resuit	
2467	15340.00	> 500	PASS	
2472	15140.00	> 500	PASS	
802.11 n HT40 Ch1				

802.11\_n\_HT20 Ch1

Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Nesuit
2467	15170.00	> 500	PASS
2472	15130.00	> 500	PASS

Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Resuit
2457	35110.00	> 500	PASS


> 500

**PASS** 

35150.00


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

<sup>\*</sup>Refer to next page for plots







OBW 6dB 802.11b 20MHz Chain1 2467MHz

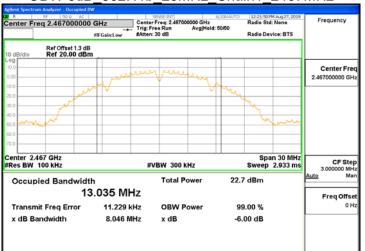


## OBW 6dB\_802.11g\_20MHz\_Chain1\_2472MHz

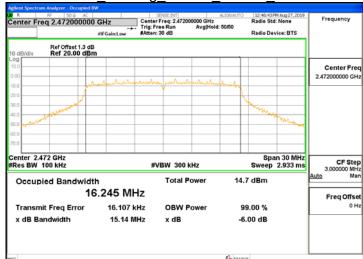


#### OBW 6dB 802.11b 20MHz Chain1 2472MHz

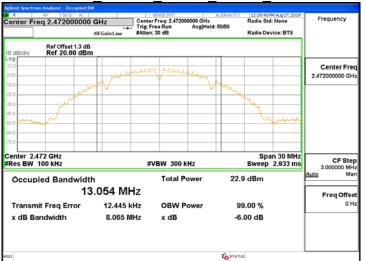


#### OBW 6dB 802.11n 20MHz Chain1 2467MHz

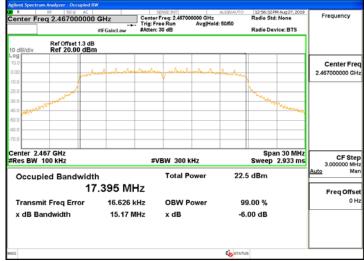

#### OBW 6dB\_802.11g\_20MHz\_Chain1\_2467MHz

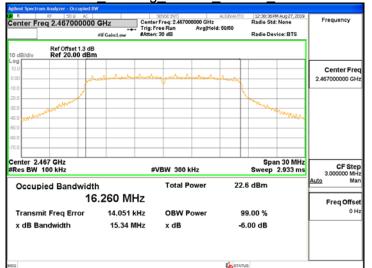


#### OBW 6dB 802.11n 20MHz Chain1 2472MHz

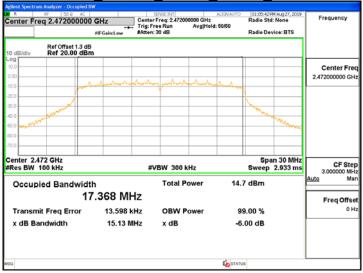

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 18 of 73



#### OBW 6dB\_802.11n\_40MHz\_Chain1\_2457MHz

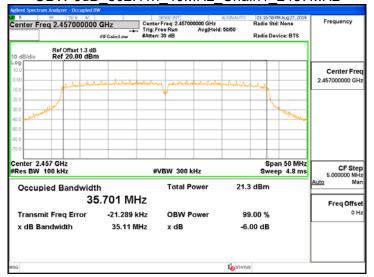

#### OBW 6dB 802.11n 40MHz Chain1 2462MHz

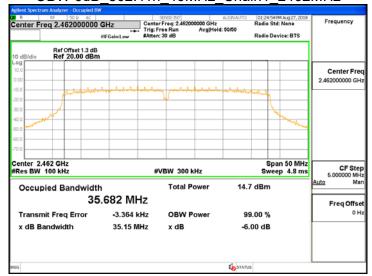

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 19 of 73

#### CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

### 8.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

## 8.2 Measurement Equipment Used


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	02/13/2019	02/12/2020
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020

#### 8.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





#### 8.4 Measurement Procedure

#### **Reference Level of Emission Limit:**

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

#### **Conducted Band Edge:**


- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

## **Conducted Spurious Emission:**

- 1. To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 21 of 73




#### 8.5 Measurement Result

Referei	nce Level	of Limit 802.11b mode	Reference Level of Limit 802.11g mode			
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2467	7.60	-12.40	2467	5.23	-14.77	
2472	7.90	-12.10	2472	-2.33	-22.33	
Referen	ce Level (	of Limit 802.11n20 mode	Reference Level of Limit 802.11n40 MODE			
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2467	4.98	-15.02	2457	0.74	-19.26	
2472	-2.41	-22.41	2462	-6.18	-26.18	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

тлу дошит элико пактыту жинк пактыту жинк





Reference Level\_802.11b\_20MHz\_Chain1\_2467MHz

## Reference Level\_802.11g\_20MHz\_Chain1\_2472MHz





Reference Level\_802.11b\_20MHz\_Chain1 2472MHz




Reference Level\_802.11n\_20MHz\_Chain1\_2467MHz



Reference Level\_802.11g\_20MHz\_Chain1\_2467MHz

#VBW 300 kHz








Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms.e-document.htm">www.sgs.com/terms.e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Freq Offse



Page 23 of 73


Reference Level\_802.11n\_40MHz\_Chain1\_2457MHz



Reference Level\_802.11n\_40MHz\_Chain1\_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。







Band Edge\_802.11b\_20MHz\_Chain1\_2467MHz

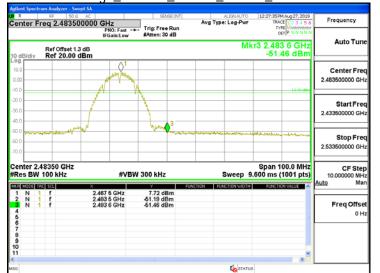


Band Edge\_802.11b\_20MHz\_Chain1\_ 2472MHz

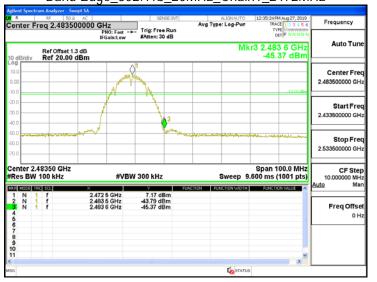

Band Edge\_802.11g\_20MHz\_Chain1\_2467MHz

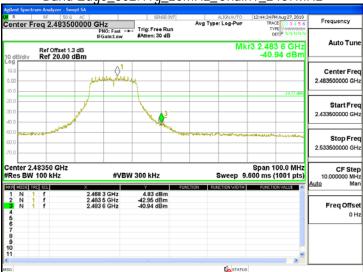


Band Edge\_802.11g\_20MHz\_Chain1 2472MHz

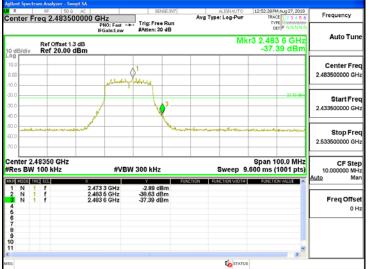


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Band Edge\_802.11n\_20MHz\_Chain1\_2467MHz

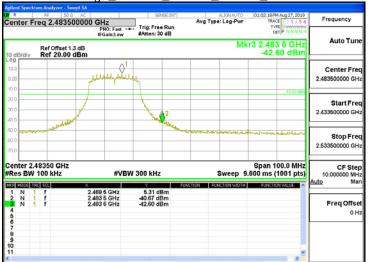


Band Edge\_802.11n\_20MHz\_Chain1\_ 2472MHz

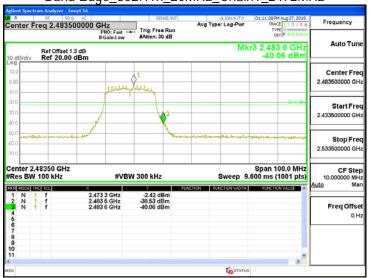


Band Edge\_802.11n\_40MHz\_Chain1\_2457MHz



Band Edge\_802.11n\_40MHz\_Chain1 2462MHz

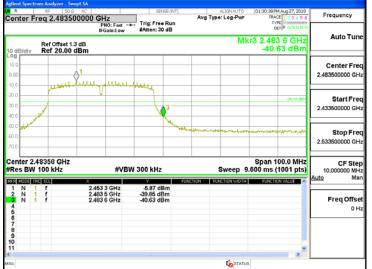


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。







## Spurious Emission\_802.11b\_20MHz\_Chain1\_2467MHz

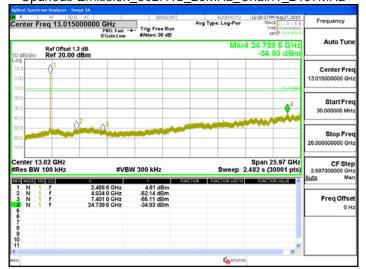


#### Spurious Emission\_802.11b\_20MHz\_Chain1\_2472MHz

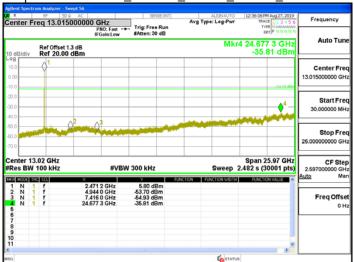


#### Spurious Emission 802.11g 20MHz Chain1 2467MHz

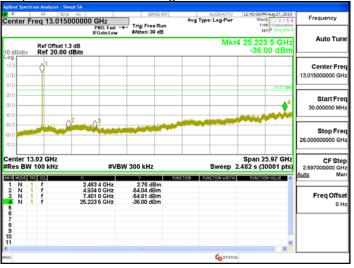


#### Spurious Emission\_802.11g\_20MHz\_Chain1\_2472MHz

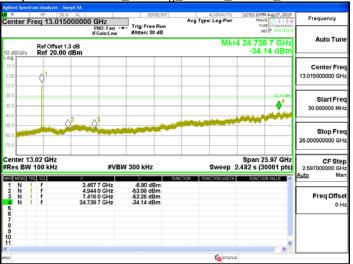

#### Spurious Emission\_802.11n\_20MHz\_Chain1\_2467MHz

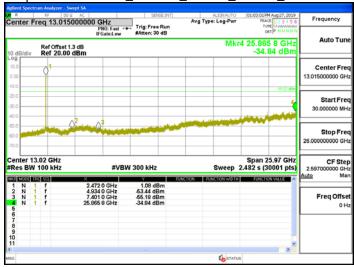


#### Spurious Emission\_802.11n\_20MHz\_Chain1\_2472MHz

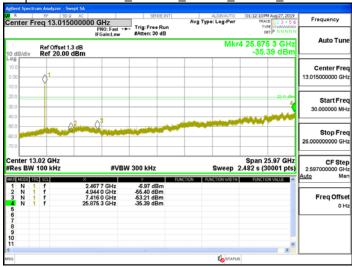

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page 27 of 73



Spurious Emission\_802.11n\_40MHz\_Chain1\_2457MHz

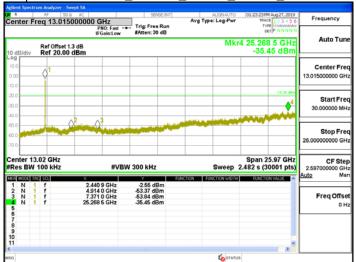

Spurious Emission\_802.11n\_40MHz\_Chain1\_2462MHz

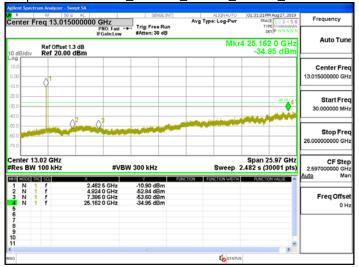

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 28 of 73

#### 9 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

### 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.


And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



## 9.2 Measurement Equipment Used:

966A Chamber							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Low Pass Filter	EWT	EWT-56-0019	RF46	02/26/2019	02/25/2020		
High Pass Filter	R&S	F13 HPF 3GHz	RF64	02/26/2019	02/25/2020		
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020		
Bilog Antenna	Sunol Sciences	JB1	A052609	03/06/2019	03/05/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020		
Digital Ther- mo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/21/2019	08/20/2020		
Loop Antenna	COM-POWER	AL-130	121051	03/22/2019	03/21/2020		
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019		
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020		
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020		
PSA Series Spec- trum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020		
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R		
Software		e3 V	5.11-20180413				


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




#### 9.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

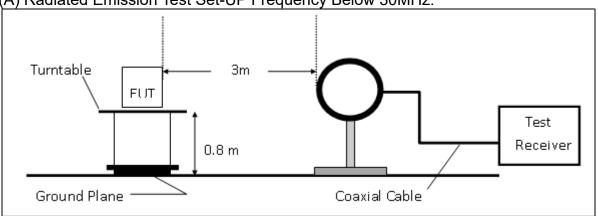

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

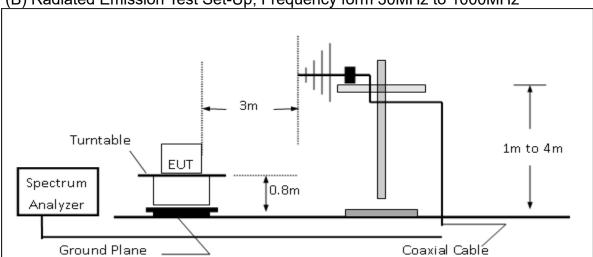

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

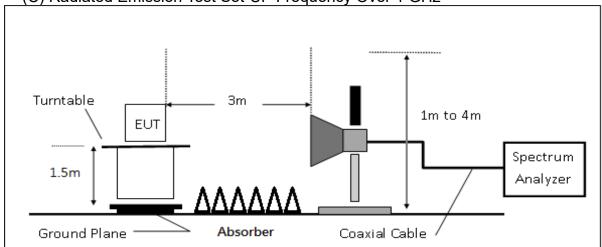

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



#### 9.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

## 9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre\_Amplifier Gain(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 32 of 73


#### 9.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

#### 9.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




SGS

#### **Radiated Band Edge Measurement Result**


Project Number : T190823W01
Operation Band :802.11b
Fundamental Frequency :2467 MHz
Operation Mode :BE CH High
EUT Pol. :E2 Plan

Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

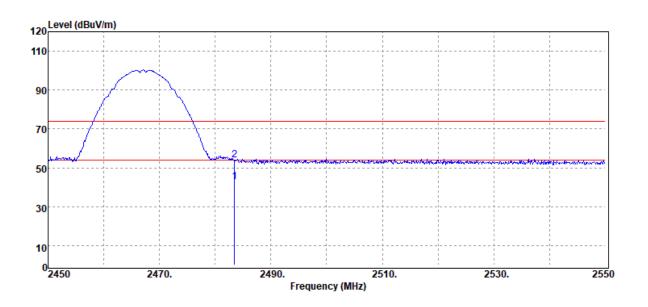

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB	
2483.50	Average	45.44	-2.83	42.61	54.00	-11.39	
2483.50	Peak	56.66	-2.83	53.83	74.00	-20.17	
	MHz 2483.50	Mode	Mode Reading Level MHz PK/QP/AV dBμV  2483.50 Average 45.44	Mode         Reading Level           MHz         PK/QP/AV         dBμV         dB           2483.50         Average         45.44         -2.83	Mode Mode Price         Reading Level FS           MHz         PK/QP/AV         dBμV         dB dBμV/m           2483.50         Average         45.44         -2.83         42.61	Mode         Reading Level         FS         @3m           MHz         PK/QP/AV         dBμV         dB         dBμV/m         dBμV/m           2483.50         Average         45.44         -2.83         42.61         54.00	Mode MHz         Reading Level PK/QP/AV         FS dBμV/m         @3m dBμV/m           2483.50         Average         45.44         -2.83         42.61         54.00         -11.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number
Operation Band
Fundamental Frequency
Operation Mode
EUT Pol.


: T190823W01 :802.11b :2467 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

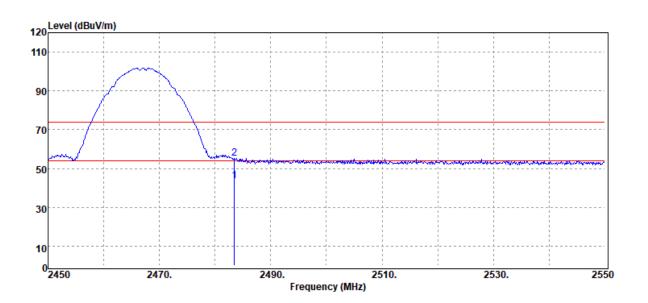

Freq.	Detector Mode	Spectrum	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	Reading Level dBuV	dB	dBuV/m	dBuV/m	dB
2483.50	Average	46.39	-2.83	43.56	54.00	-10.44
2483.50	Peak	58.12	-2.83	55.29	74.00	-18.71


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






Project Number
Operation Band
Fundamental Frequency
Operation Mode
EUT Pol.

: T190823W01 :802.11b :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

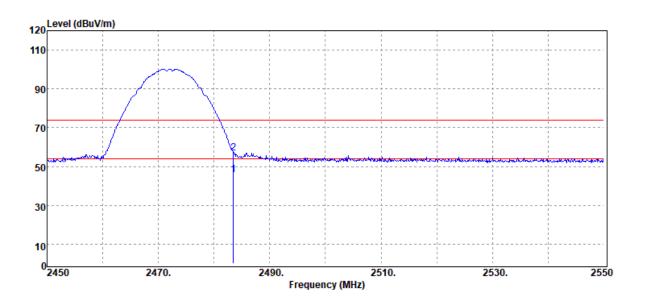

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBµV/m	dB
2	2483.50	Average	48.33	-2.83	45.50	54.00	-8.50
2	2483.50	Peak	59.90	-2.83	57.07	74.00	-16.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






Project Number
Operation Band
Fundamental Frequency
Operation Mode
EUT Pol.


: T190823W01 :802.11b :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

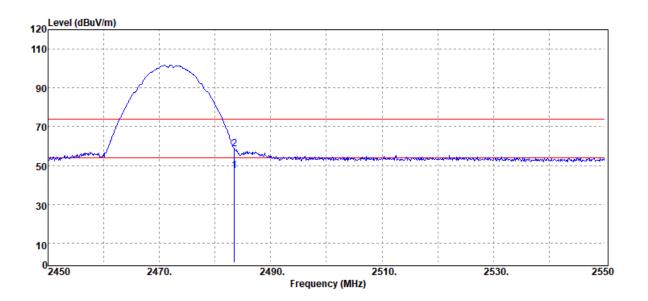


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	50.18	-2.83	47.35	54.00	-6.65
2483.50	Peak	61.41	-2.83	58.58	74.00	-15.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2467 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

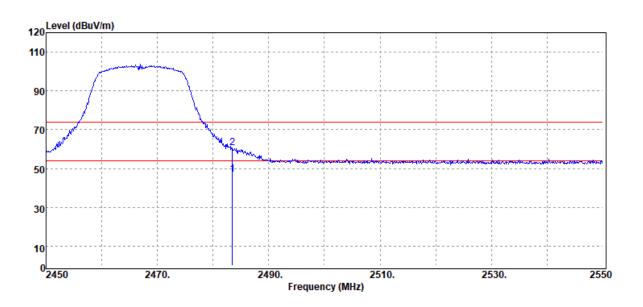

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	49.55	-2.83	46.72	54.00	-7.28
2483.50	Peak	63.35	-2.83	60.52	74.00	-13.48


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2467 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

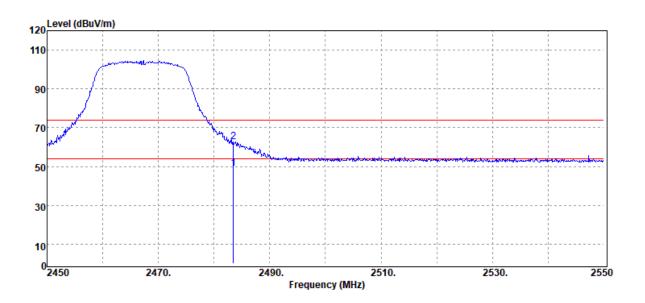


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	51.85	-2.83	49.02	54.00	-4.98
2483.50	Peak	65.36	-2.83	62.53	74.00	-11.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

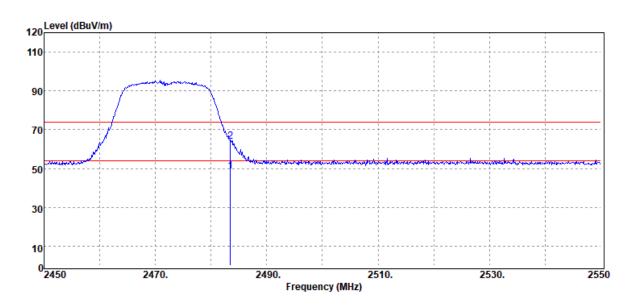

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	51.34	-2.83	48.51	54.00	-5.49
2483.50	Peak	66.68	-2.83	63.85	74.00	-10.15


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

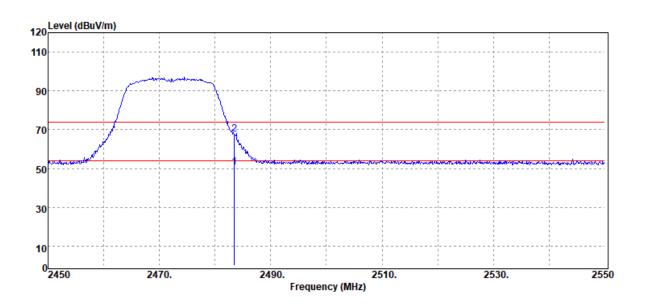


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	53.43	-2.83	50.60	54.00	-3.40
2483.50	Peak	70.56	-2.83	67.73	74.00	-6.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n20 :2467 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

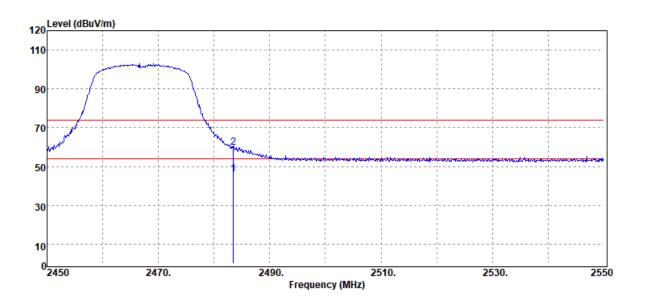

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	49.11	-2.83	46.28	54.00	-7.72
2483.50	Peak	62.71	-2.83	59.88	74.00	-14.12


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n20 :2467 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

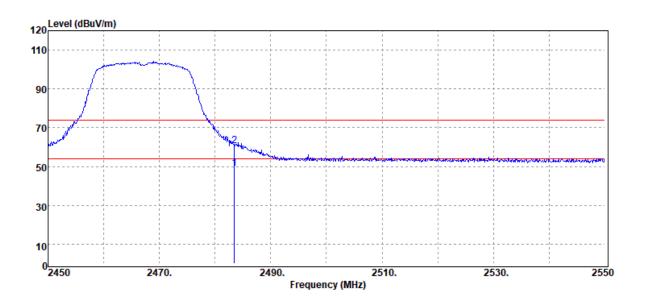

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
_	2483.50	Average	51.82	-2.83	48.99	54.00	-5.01
	2483.50	Peak	63.43	-2.83	60.60	74.00	-13.40


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






Project Number : Operation Band : Strundamental Frequency : Operation Mode : EUT Pol. : Strundamental Frequency : EUT Pol. : Strundamental Frequency : Strundamental Frequency

: T190823W01 :802.11n20 :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

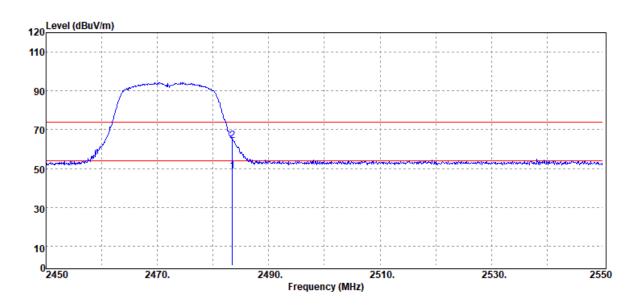

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	51.59	-2.83	48.76	54.00	-5.24
2483.50	Peak	67.22	-2.83	64.39	74.00	-9.61


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n20 :2472 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

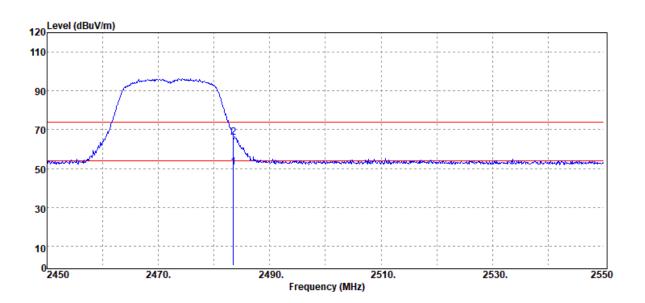

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	53.58	-2.83	50.75	54.00	-3.25
2483.50	Peak	68.94	-2.83	66.11	74.00	-7.89


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






Project Number : T190823W01
Operation Band :802.11n40
Fundamental Frequency :2457 MHz
Operation Mode :BE CH High
EUT Pol. :E2 Plan

Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

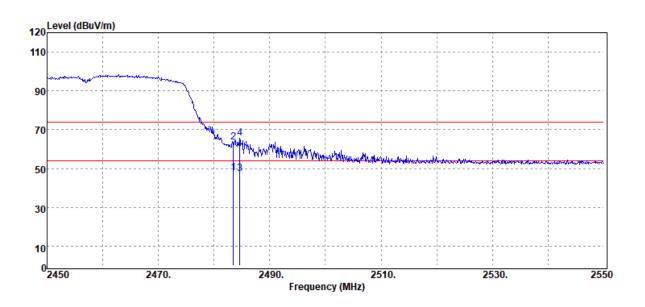

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	50.54	-2.83	47.71	54.00	-6.29
2483.50	Peak	66.32	-2.83	63.49	74.00	-10.51
2484.60	Average	50.21	-2.82	47.39	54.00	-6.61
2484.60	Peak	68.63	-2.82	65.81	74.00	-8.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Project Number : Operation Band :: Fundamental Frequency :: Operation Mode :: EUT Pol. :


: T190823W01 :802.11n40 :2457 MHz :BE CH High :E2 Plan 

 Test Date
 :2019-08-23

 Temp./Humi.
 :21.5/48


 Engineer
 :Kane

Measurement Antenna Pol. :HORIZONTAL

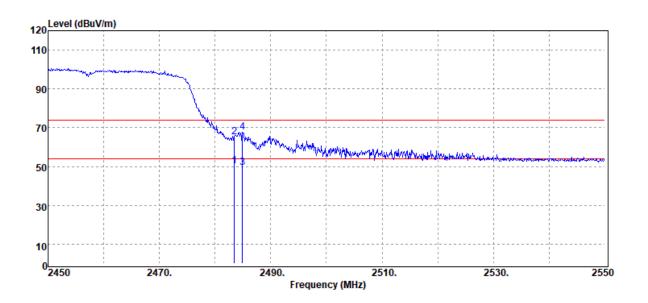


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	53.24	-2.83	50.41	54.00	-3.59
2483.50	Peak	68.08	-2.83	65.25	74.00	-8.75
2484.90	Average	52.24	-2.82	49.42	54.00	-4.58
2484.90	Peak	70.54	-2.82	67.72	74.00	-6.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n40 :2462 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

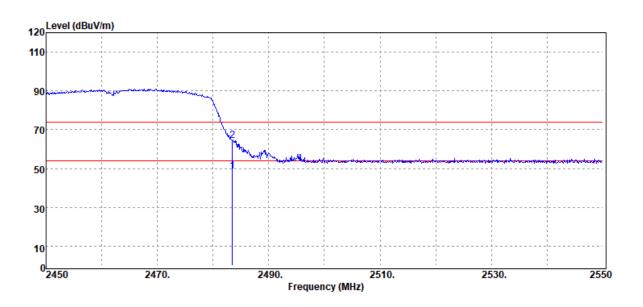

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
2483.50	Average	51.56	-2.83	48.73	54.00	-5.27
2483.50	Peak	67.22	-2.83	64.39	74.00	-9.61


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n40 :2462 MHz :BE CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :21.5/48
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

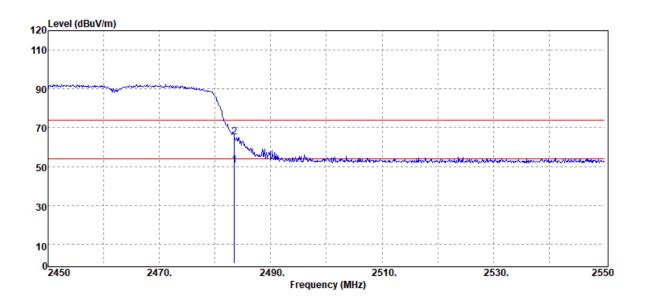

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	53.41	-2.83	50.58	54.00	-3.42
2483.50	Peak	68.02	-2.83	65.19	74.00	-8.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






**Radiated Spurious Emission Measurement Result** 

# **Below 1GHz Worst-Case Data:**


**Project Number** : T190823W01 **Operation Band** :802.11g Fundamental Frequency :2467 MHz Operation Mode :Tx CH High EUT Pol. :E2 Plan

Test Date :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

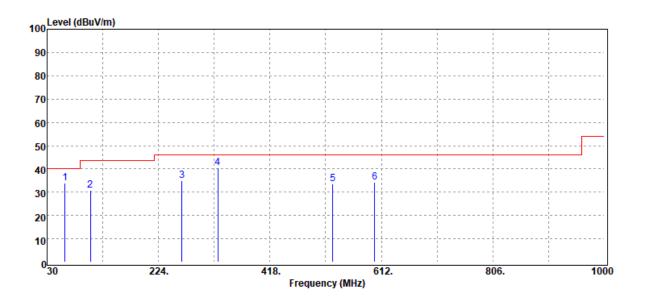

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
61.32	Peak	49.51	-15.64	33.87	40.00	-6.13
105.69	Peak	41.96	-11.02	30.94	43.50	-12.56
264.44	Peak	44.01	-9.01	35.00	46.00	-11.00
327.28	Peak	47.62	-7.28	40.34	46.00	-5.66
527.55	Peak	35.97	-2.38	33.59	46.00	-12.41
600.24	Peak	35.87	-1.67	34.20	46.00	-11.80

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






: T190823W01 :802.11g :2467 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

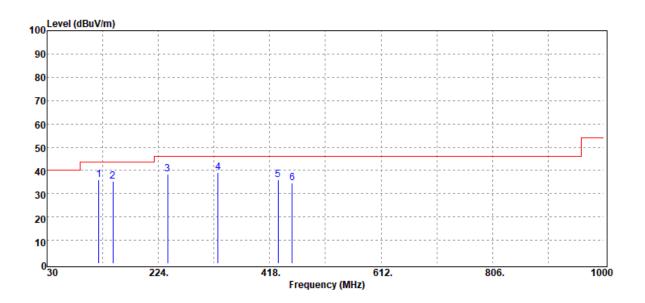

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
120.28	Peak	44.84	-8.87	35.97	43.50	-7.53
144.50	Peak	45.36	-9.92	35.44	43.50	-8.06
240.36	Peak	48.75	-10.25	38.50	46.00	-7.50
327.83	Peak	46.46	-7.25	39.21	46.00	-6.79
432.41	Peak	40.36	-4.32	36.04	46.00	-9.96
456.93	Peak	38.20	-3.76	34.44	46.00	-11.56


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :Tx CH High :E2 Plan

**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

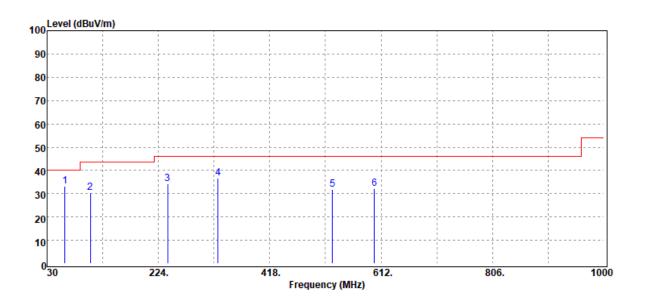

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
61.21	Peak	48.87	-15.64	33.23	40.00	-6.77
105.74	Peak	41.38	-11.02	30.36	43.50	-13.14
240.56	Peak	44.43	-10.25	34.18	46.00	-11.82
327.68	Peak	43.83	-7.26	36.57	46.00	-9.43
527.36	Peak	34.16	-2.40	31.76	46.00	-14.24
600.17	Peak	33.78	-1.68	32.10	46.00	-13.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :Tx CH High :E2 Plan

**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane


:HORIZONTAL Measurement Antenna Pol.

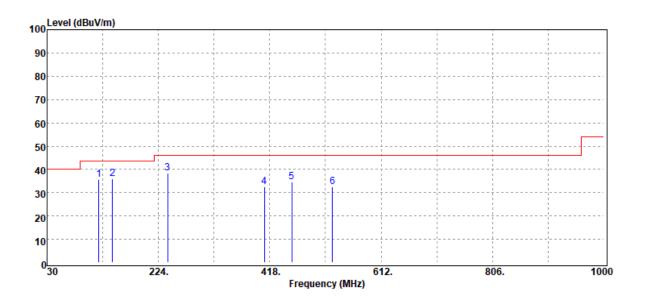

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
120.33	Peak	44.68	-8.87	35.81	43.50	-7.69
144.29	Peak	45.95	-9.90	36.05	43.50	-7.45
240.41	Peak	48.70	-10.25	38.45	46.00	-7.55
408.72	Peak	37.90	-5.25	32.65	46.00	-13.35
456.74	Peak	38.20	-3.76	34.44	46.00	-11.56
527.48	Peak	34.75	-2.38	32.37	46.00	-13.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






## **Above 1GHz Data:**

Project Number : T190823W01
Operation Band :802.11b
Fundamental Frequency :2467 MHz
Operation Mode :Tx CH High
EUT Pol. :E2 Plan


Test Date :2019-08-23
Temp./Humi. :24.8/59
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

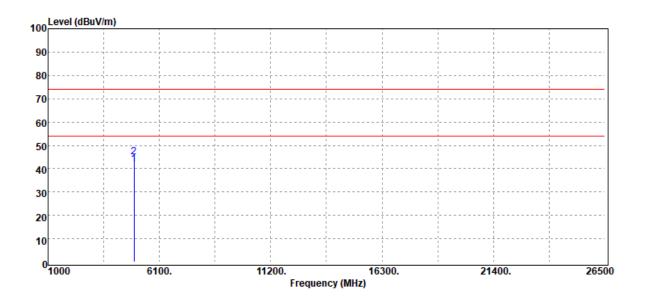

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4934.00	Average	37.98	3.85	41.83	54.00	-12.17
4934.00	Peak	41.04	3.85	44.89	74.00	-29.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有约如,此现在结果被判别经过接口商事。同时此接口及识别为工,未现在土棚主从司事而统可,不可如从海喇。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






: T190823W01 :802.11b :2467 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

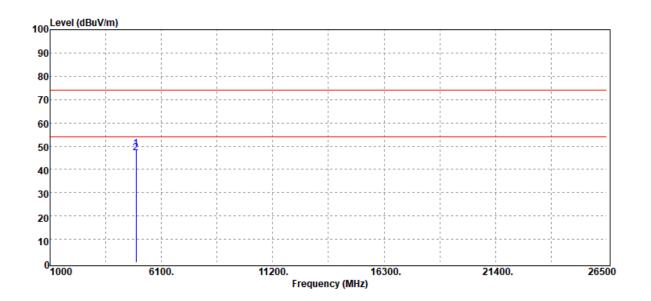

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4934.00	Average	43.10	3.85	46.95	54.00	-7.05
4934.00	Peak	44.78	3.85	48.63	74.00	-25.37


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





: T190823W01 :802.11b :2472 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

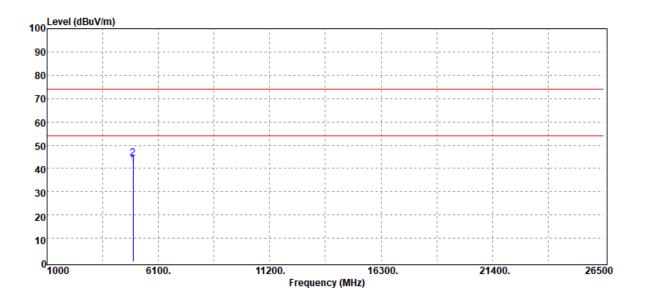

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4944.00	Average	37.63	3.95	41.58	54.00	-12.42
4944.00	Peak	40.39	3.95	44.34	74.00	-29.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11b :2472 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

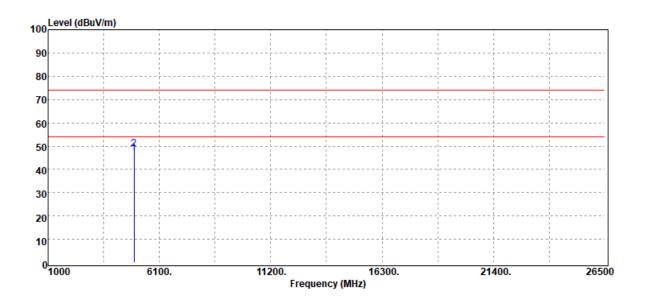

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4944.00	Average	42.69	3.95	46.64	54.00	-7.36
4944.00	Peak	44.85	3.95	48.80	74.00	-25.20


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





: T190823W01 :802.11g :2467 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

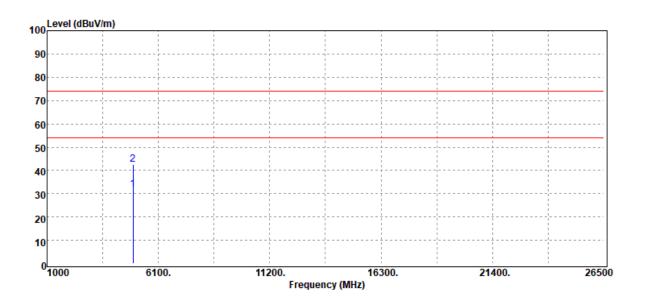

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	28.09	3.85	31.94	54.00	-22.06
4934.00	Peak	38.76	3.85	42.61	74.00	-31.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2467 MHz :Tx CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :24.8/59
Engineer :Kane

Measurement Antenna Pol. :HORIZONTAL

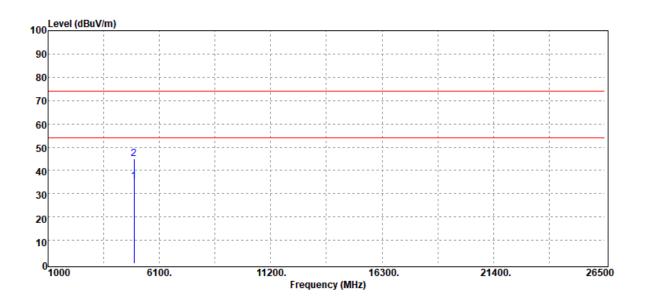


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4934.00	Average	31.37	3.85	35.22	54.00	-18.78
4934.00	Peak	41.08	3.85	44.93	74.00	-29.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :Tx CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :24.8/59
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

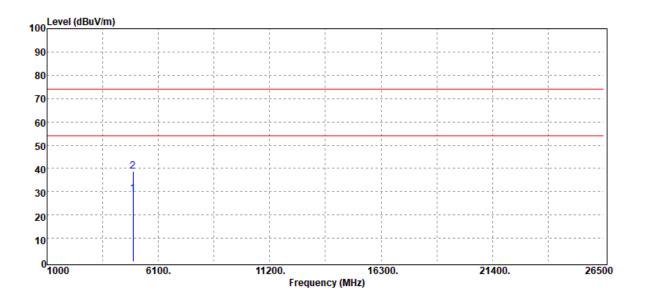

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4944.00	Average	25.05	3.95	29.00	54.00	-25.00
4944.00	Peak	34.64	3.95	38.59	74.00	-35.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11g :2472 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

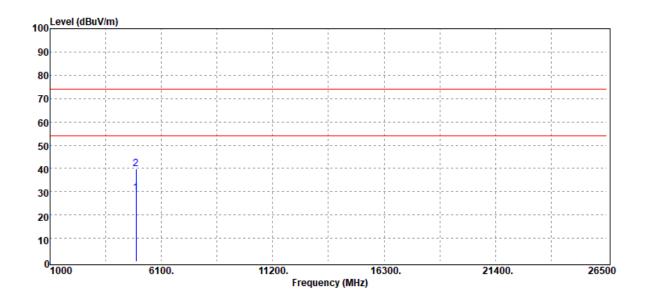

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4944.00	Average	25.38	3.95	29.33	54.00	-24.67
4944.00	Peak	35.88	3.95	39.83	74.00	-34.17


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





: T190823W01 :802.11n20 :2467 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

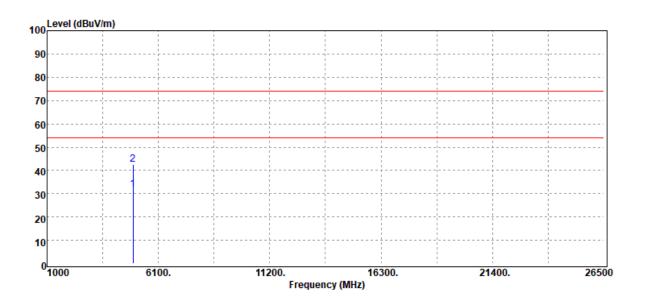

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4934.00	Average	27.91	3.85	31.76	54.00	-22.24
4934.00	Peak	38.76	3.85	42.61	74.00	-31.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n20 :2467 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

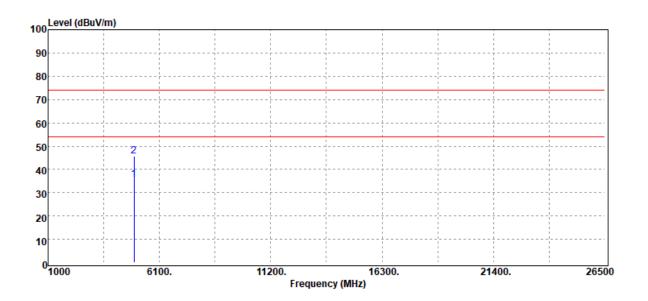

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4934.00	Average	31.82	3.85	35.67	54.00	-18.33
4934.00	Peak	41.68	3.85	45.53	74.00	-28.47


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Project Number : Operation Band :8 Fundamental Frequency :2 Operation Mode :T EUT Pol. :E

: T190823W01 :802.11n20 :2472 MHz :Tx CH High :E2 Plan Test Date :2019-08-23
Temp./Humi. :24.8/59
Engineer :Kane
Measurement Antenna Pol. :VERTICAL

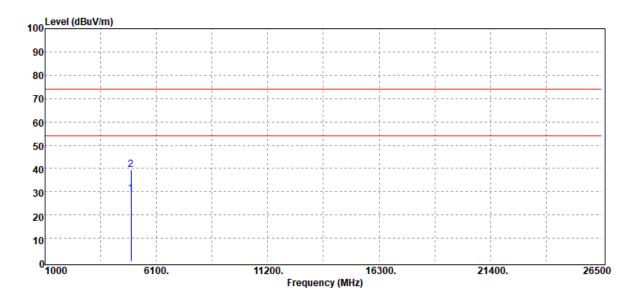

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4944.00	Average	25.17	3.95	29.12	54.00	-24.88
4944.00	Peak	35.42	3.95	39.37	74.00	-34.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n20 :2472 MHz :Tx CH High :E2 Plan

**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane


:HORIZONTAL Measurement Antenna Pol.

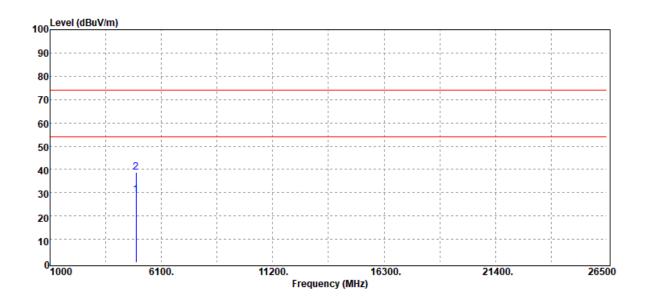

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4944.00	Average	25.02	3.95	28.97	54.00	-25.03
4944.00	Peak	34.97	3.95	38.92	74.00	-35.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n40 :2457 MHz :Tx CH High :E2 Plan

**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

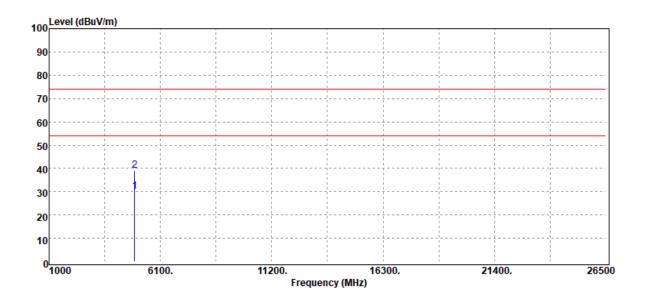

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4914.00	Average	26.46	3.66	30.12	54.00	-23.88
4914.00	Peak	35.48	3.66	39.14	74.00	-34.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n40 :2457 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

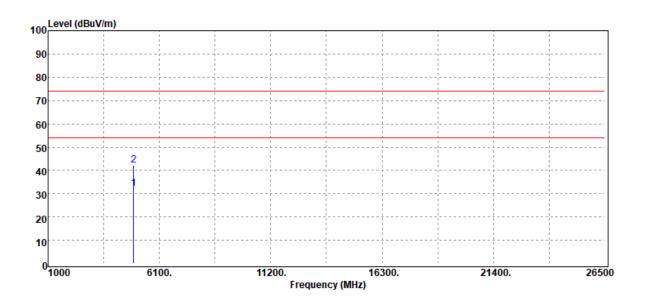

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
4914.00	Average	28.52	3.66	32.18	54.00	-21.82
4914.00	Peak	38.59	3.66	42.25	74.00	-31.75


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





**Project Number** : T190823W01 **Operation Band** :802.11n40 Fundamental Frequency :2462 MHz **Operation Mode** :Tx CH High EUT Pol. :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane :VERTICAL Measurement Antenna Pol.

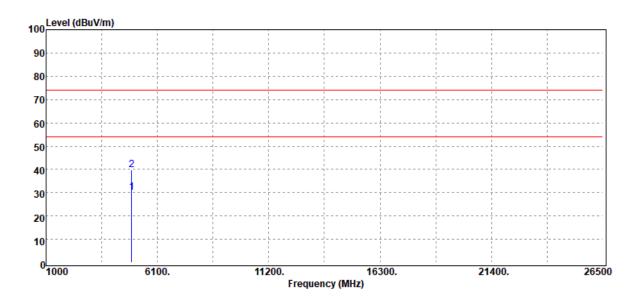

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
	4924.00	Average	26.47	3.75	30.22	54.00	-23.78
	4924.00	Peak	35.97	3.75	39.72	74.00	-34.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






: T190823W01 :802.11n40 :2462 MHz :Tx CH High :E2 Plan


**Test Date** :2019-08-23 Temp./Humi. :24.8/59 Engineer :Kane

:HORIZONTAL Measurement Antenna Pol.

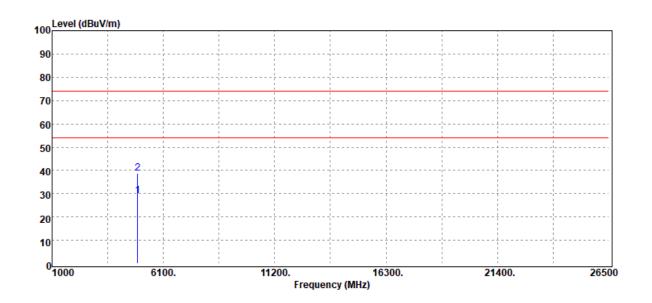

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4924.00	Average	25.22	3.75	28.97	54.00	-25.03
4924.00	Peak	34.86	3.75	38.61	74.00	-35.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





10 POWER SPECTRAL DENSITY


## 10.1 Standard Applicable

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

# 10.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY57120290	02/13/2019	02/12/2020
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020

## 10.3 Test Set-up



#### 10.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Report No.: T190823W01-RP

Page 70 of 73


## 10.5 Measurement Result

0101110								
	POWER DENSITY 802.11b_Ch1				POWER DENSITY 802.11g_Ch1			
Freq.	PSD	Limit	Docult	Freq.	PSD	Limit	Docult	
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result	
2467	-7.05	8.00	PASS	2467	-9.40	8.00	PASS	
2472	-5.12	8.00	PASS	2472	-18.26	8.00	PASS	
	POWER DENSITY 802.1	I1n HT20_Ch	1	POWER DENSITY 802.11n HT40_Ch1				
Freq.	PSD	Limit	Result	Freq.	PSD	Limit	Result	
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result	(MHz)	(dBm/3kHz)	(dBm/3kHz)	Resuit	
2467	-10.87	8.00	PASS	2457	-13.95	8.00	PASS	
2472	-17.56	8.00	PASS	2462	-20.36	8.00	PASS	

<sup>\*</sup>Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

тлу дошит элико пактыту жинк пактыту жинк






Power Density\_802.11b\_20MHz\_Chain1\_2467MHz



Power Density\_802.11b\_20MHz Chain 2472MHz



Power Density 802.11g 20MHz Chain1 2467MHz

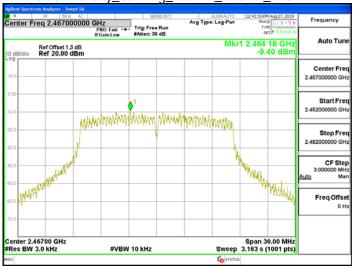


Power Density\_802.11g\_20MHz\_Chain1\_2472MHz




Power Density\_802.11n\_20MHz Chain1 2467MHz



Power Density 802.11n 20MHz Chain1 2472MHz

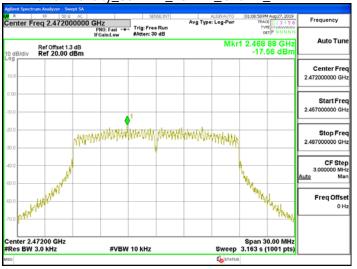

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page 72 of 73



Power Density\_802.11n\_40MHz\_Chain1\_2457MHz



Power Density\_802.11n\_40MHz Chain1 2462MHz

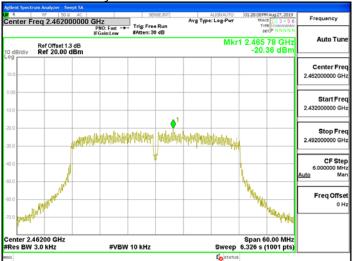

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: T190823W01-RP

Page 73 of 73

# 11 ANTENNA REQUIREMENT

# 11.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

#### 11.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。