# **FCC Test Report**

Report No.: AGC01835170307FE01

FCC ID : 2AAEM-BTMP3001

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth heart rate monitoring earbuds

**BRAND NAME** : Mops

MODEL NAME : BTMP3001

**CLIENT** : Cosonic Acoustic Technology Co., Ltd.

**DATE OF ISSUE** : Apr.11, 2017

**STANDARD(S)** : FCC Part 15 Subpart B

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

## **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC01835170307FE01 Page 2 of 32

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr.11, 2017	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. SYSTEM DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION	6
5. SUPPORT EQUIPMENT	7
6. TEST FACILITY	8
7. TEST EQUIPMENT LIST	8
8. FCCLINE CONDUCTED EMISSION TEST	10
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
8.2. BLOCK DIAGRAM OF TEST SETUP	10
8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
8.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
9. FCC RADIATED EMISSION TEST	14
9.1. LIMITS OF RADIATED EMISSION TEST	14
9.2. BLOCK DIAGRAM OF TEST SETUP	
9.3. PROCEDURE OF RADIATED EMISSION TEST	16
9.4. TEST RESULT OF RADIATED EMISSION TEST	17
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	21
APPENDIX B: PHOTOGRAPHS OF EUT	23

Page 4 of 32

# 1. VERIFICATION OF CONFORMITY

Applicant	Cosonic Acoustic Technology Co., Ltd.		
Applicant			
Address	th Floor, 1st Building,No.6, South Industry Road,Songshan Lake National High-tech Industrial Development Zone,Dongguan City,Guangdong,China 523808		
Manufacturer	Cosonic Intelligent Technologies Co.,Ltd.		
Address  5th Floor, 1st Building,No.6, South Industry Road,Songshan Lake Na High-tech Industrial Development Zone,Dongguan City,Guangdong, 523808			
Product Designation Bluetooth heart rate monitoring earbuds			
Brand Name	Mops		
Test Model	BTMP3001		
Date of test	Apr.10, 2017		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-IT/AC		

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By	hime huang	
	Time Huang(Huang Nanhui)	Apr.10, 2017
Reviewed By	Foresto ce	
	Forrest Lei(Lei Yonggang)	Apr.11, 2017
Approved By	Solya shong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Apr.11, 2017

Page 5 of 32

## 2. SYSTEM DESCRIPTION

# **EUT** set up procedure:

- 1. Connect the EUT with the PC by a USB cable.
- 2. Let the EUT work in the Data Transmission test mode.
- 3. Make sure the EUT operates normally during the test (Data Transmission Mode).

#### **Test Mode**

TEST MODE DESCRIPTION					
NO.	TEST MODE DESCRIPTION	WORST			
1	Data Transmission(USB)	V			
Note: V	Note: V means EMI worst mode.				

# 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

# **Summary Of Test Results**

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant

Report No.: AGC01835170307FE01 Page 6 of 32

# 4. PRODUCT INFORMATION

Housing Type	Plastic And Metal
Voltage	DC 3.7V by battery

#### I/O Port Information (⊠Applicable ■Not Applicable)

I/O Port of EUT						
I/O Port Type Q'TY Cable Tested with						
USB Port(charging case)	1	0.2m Unshielded	1			
Charging Port	1	0	1			

Page 7 of 32

# **5. SUPPORT EQUIPMENT**

Device Type	Type Manufacturer Mo		Serial No.	Power Cable	
PC	Sony	E1412AYCW	A.E	0.8m unshielded	
PC Adapter	Sony	AC-L100	A.E	0.8m unshielded	

**Note:** All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Report No.: AGC01835170307FE01 Page 8 of 32

# **6. TEST FACILITY**

Site Dongguan Precise Testing Service Co., Ltd.			
Location  Building D, Baoding Technology Park, Guangming Road2, Dongcheng Distr Dongguan, Guangdong, China,			
FCC Registration No.	371540		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.		

# 7. TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

,						
Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017	
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A	
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017	

# FOR RADIATED EMISSION TEST (ABOVE 1GHz)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017	
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017	
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A	

Report No.: AGC01835170307FE01 Page 9 of 32

	Conducted Emission Test Site												
Name of Equipment	Serial Number	Last Calibration	Due Calibration										
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017								
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017								
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017								
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017								
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017								

Report No.: AGC01835170307FE01 Page 10 of 32

# 8. FCCLINE CONDUCTED EMISSION TEST


## **8.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Fraguenay	Maximum R	Maximum RF Line Voltage							
Frequency	Q.P.( dBuV)	Average( dBuV)							
150kHz-500kHz	66-56	56-46							
500kHz-5MHz	56	46							
5MHz-30MHz	60	50							

## Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

# **8.2. BLOCK DIAGRAM OF TEST SETUP**

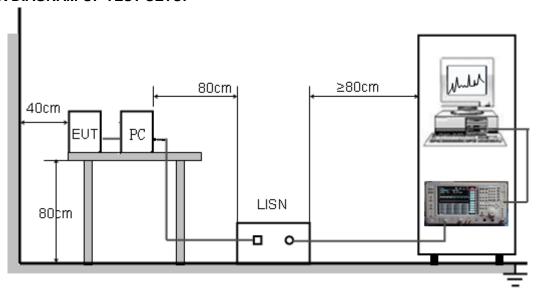

Page 11 of 32

#### 8.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

(1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.


- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received charging voltage by PC which receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

Page 12 of 32

# 8.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

# LINE CONDUCTED EMISSION TEST-L

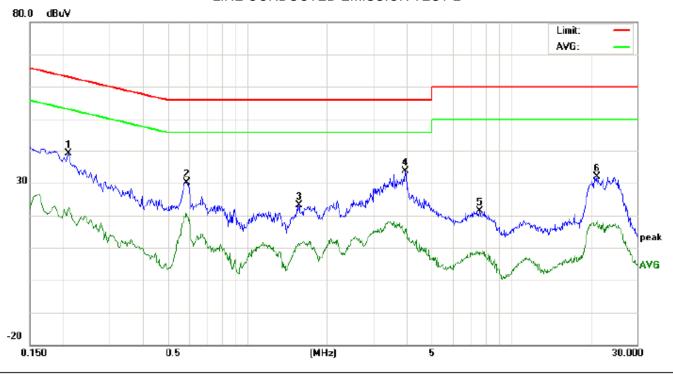

Site: Conduction Phase: L1 Temperature: 22.7
Limit: FCC Class B Conduction(QP) Power: Humidity: 53.9 %

EUT: Bluetooth heart rate monitoring earbuds

M/N: BTMP3001


Mode: Data transmission

Note:

No.	Freq. Reading_l						asurement (dBuV)		Limit (dBuV)		rgin IB)	P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2099	39.03		22.33	0.00	39.03		22.33	63.21	53.21	-24.18	-30.88	Р	
2	0.5899	30.18		20.30	0.00	30.18		20.30	56.00	46.00	-25.82	-25.70	Р	
3	1.5740	23.01		11.44	0.00	23.01		11.44	56.00	46.00	-32.99	-34.56	Р	
4	3.9740	33.66		15.50	0.00	33.66		15.50	56.00	46.00	-22.34	-30.50	Р	
5	7.6139	21.39		7.78	0.00	21.39		7.78	60.00	50.00	-38.61	-42.22	Р	
6	21.2579	31.91		18.27	0.00	31.91		18.27	60.00	50.00	-28.09	-31.73	Р	

Page 13 of 32

# LINE CONDUCTED EMISSION TEST-N

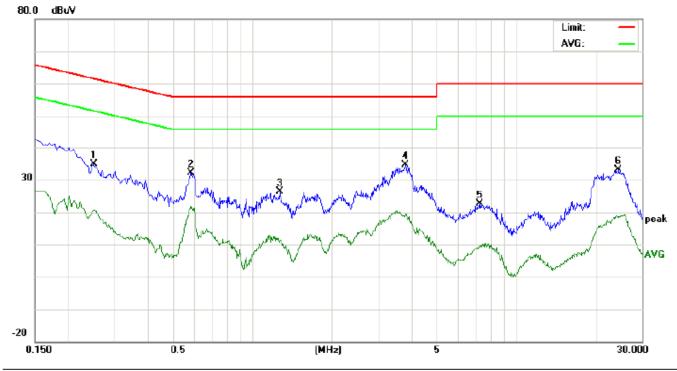

Site: Conduction Phase: N Temperature: 22.7
Limit: FCC Class B Conduction(QP) Power: Humidity: 53.9 %

EUT: Bluetooth heart rate monitoring earbuds

M/N: BTMP3001

Mode: Data transmission

Note:

No.	Freq.				Correct Factor				Limit (dBuV)		Mai (d	rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2500	34.90		20.70	0.00	34.90		20.70	61.75	51.75	-26.85	-31.05	Р	
2	0.5858	32.22		21.91	0.00	32.22		21.91	56.00	46.00	-23.78	-24.09	Р	
3	1.2740	26.44		11.38	0.00	26.44		11.38	56.00	46.00	-29.56	-34.62	Р	
4	3.8180	34.61		19.50	0.00	34.61		19.50	56.00	46.00	-21.39	-26.50	Р	
5	7.2858	22.57		9.57	0.00	22.57		9.57	60.00	50.00	-37.43	-40.43	Р	
6	24.4578	33.03		18.56	0.00	33.03		18.56	60.00	50.00	-26.97	-31.44	Р	

**RESULT: PASS** 

Page 14 of 32

## 9. FCC RADIATED EMISSION TEST

# 9.1. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
960~1000	3	54.0

Note: The lower limit shall apply at the transition frequency.


# 9.1.1 The following table is the setting of spectrum analyzer and receiver:

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

## 9.2. BLOCK DIAGRAM OF TEST SETUP

## RADIATED EMISSION TEST SETUP 30MHz-1000MHz

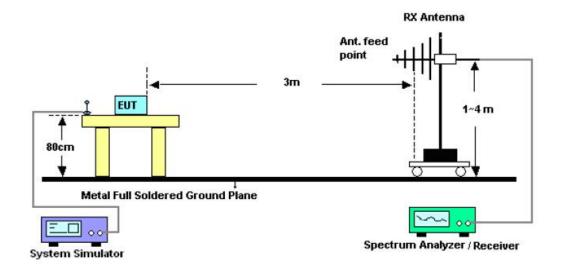

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

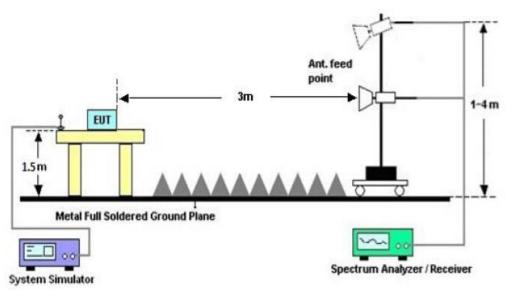

Report No.: AGC01835170307FE01 Page 16 of 32

#### 9.3. PROCEDURE OF RADIATED EMISSION TEST

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.


Temperature: 22.9

Humidity: 54.3 %

Page 17 of 32

# 9.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal (BELOW 1GHz)

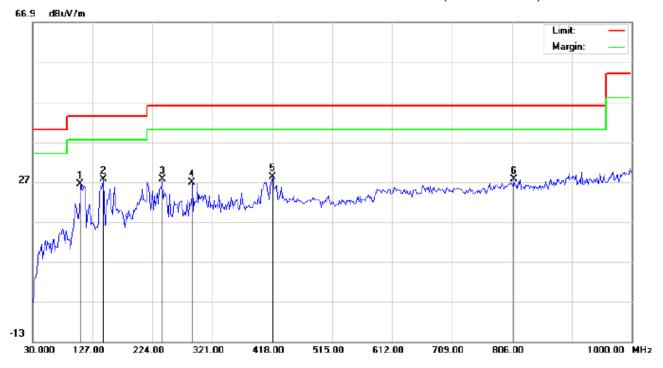

Polarization: Horizontal

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Bluetooth heart rate monitoring earbuds

M/N: BTMP3001

Mode: Data transmission

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		107.5999	17.67	8.72	26.39	43.50	-17.11	peak			
2	*	144.7831	13.64	14.04	27.68	43.50	-15.82	peak			
3		240.1666	19.65	7.90	27.55	46.00	-18.45	peak			
4		288.6666	13.34	13.48	26.82	46.00	-19.18	peak			
5		418.0000	8.58	19.62	28.20	46.00	-17.80	peak			
6		809.2332	0.26	27.32	27.58	46.00	-18.42	peak			

Power:

Distance:

Page 18 of 32

# Radiated Emission Test at 3m Distance-Vertical (BELOW 1GHz)

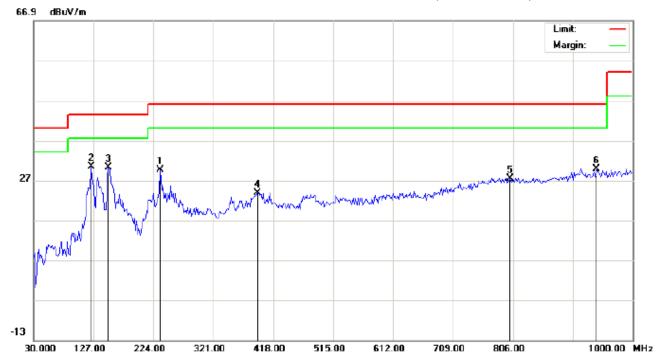

Site: site #1 Polarization: Vertical Temperature: 22.9
Limit: FCC Class B 3M Radiation Power: Humidity: 54.3 %

EUT: Bluetooth heart rate monitoring earbuds Distance:

M/N: BTMP3001


Mode: Data transmission

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		235.3166	17.23	12.46	29.69	46.00	-16.31	peak			
2	*	123.7667	22.02	8.43	30.45	43.50	-13.05	peak			
3		151.2500	14.93	15.27	30.20	43.50	-13.30	peak			
4		392.1333	4.84	19.02	23.86	46.00	-22.14	peak			
5		801.1499	0.07	27.32	27.39	46.00	-18.61	peak			
6		941.7999	0.07	29.77	29.84	46.00	-16.16	peak			

Page 19 of 32

# Radiated Emission Test at 3m Distance-Horizontal (ABOVE 1GHz)

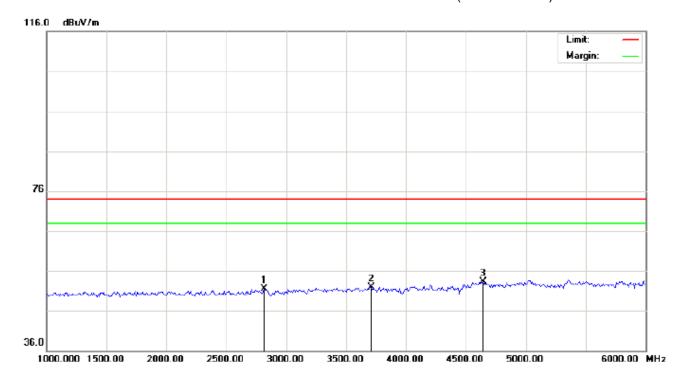

Site: site #1 Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT: Bluetooth heart rate monitoring earbuds Distance:

M/N: BTMP3001


Mode: Data transmission

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2816.667	40.22	11.20	51.42	74.00	-22.58	peak			
2		3708.333	38.59	13.39	51.98	74.00	-22.02	peak			
3	*	4641.667	45.98	7.26	53.24	74.00	-20.76	peak			

Page 20 of 32

# Radiated Emission Test at 3m Distance-Vertical (ABOVE 1GHz)

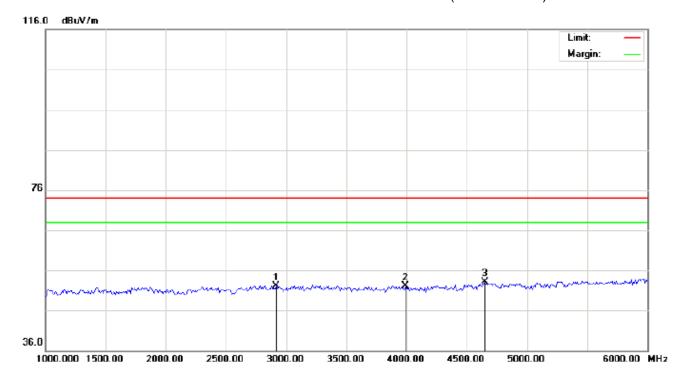

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT: Bluetooth heart rate monitoring earbuds Distance:

M/N: BTMP3001

Mode: Data transmission

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2916.667	40.66	11.44	52.10	74.00	-21.90	peak			
2		3991.667	37.06	15.14	52.20	74.00	-21.80	peak			
3	*	4650.000	45.82	7.28	53.10	74.00	-20.90	peak			

#### **RESULT: PASS**

Note: Measurement = Reading + Factor, Over = Measurement – Limit.

6~13GHz at least have 20dB margin. No recording in the test report.


Report No.: AGC01835170307FE01 Page 21 of 32


# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

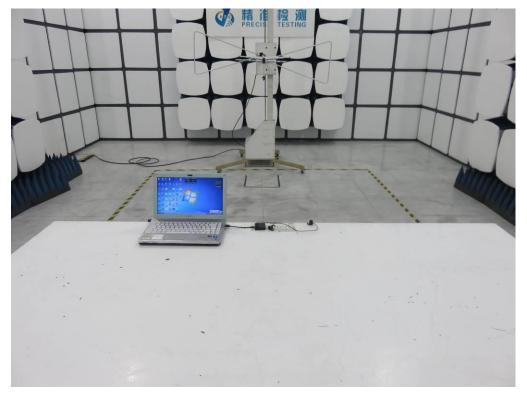

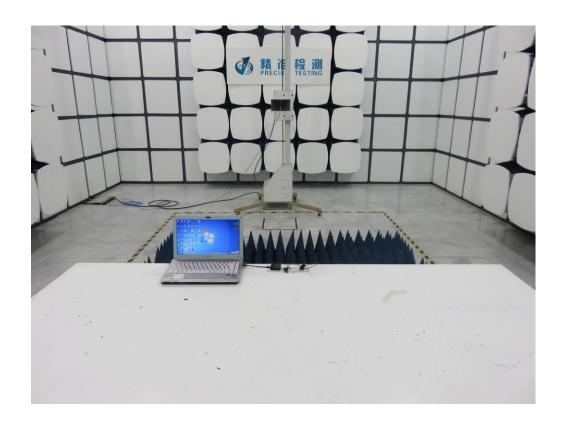

Report No.: AGC01835170307FE01 Page 23 of 32

**APPENDIX B: PHOTOGRAPHS OF EUT** 

ALL VIEW OF EUT



TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (LOCAL)-1



VIEW OF EUT (LOCAL)-2




VIEW OF EUT (PORT)




VIEW OF CHARGING CASE (PORT)




**OPEN VIEW OF EUT** 

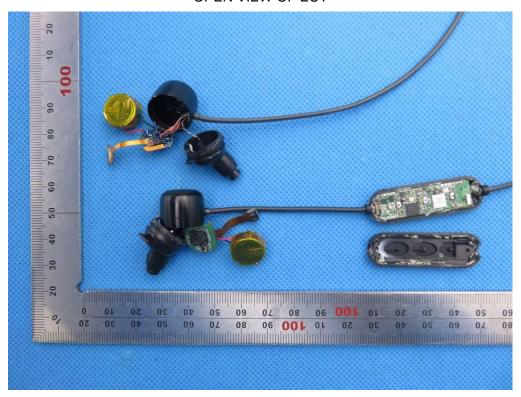


**INTERNAL VIEW OF EUT-1** 

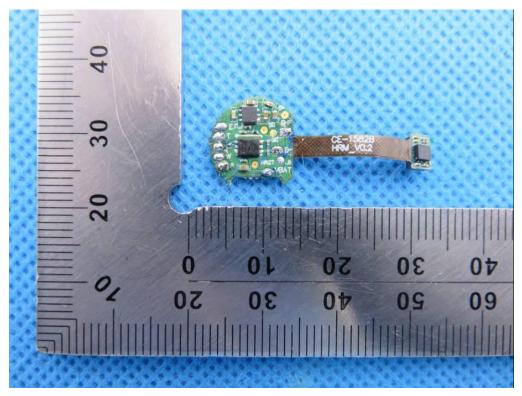


**INTERNAL VIEW OF EUT-2** 

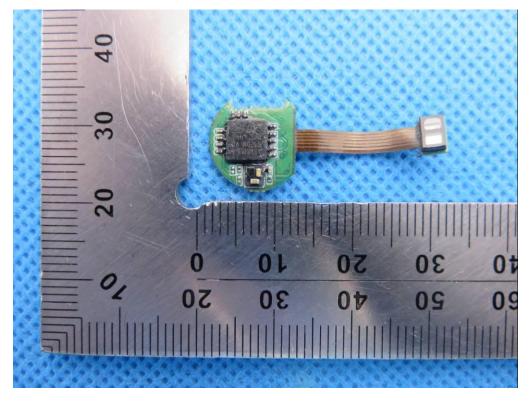


**INTERNAL VIEW OF EUT-3** 

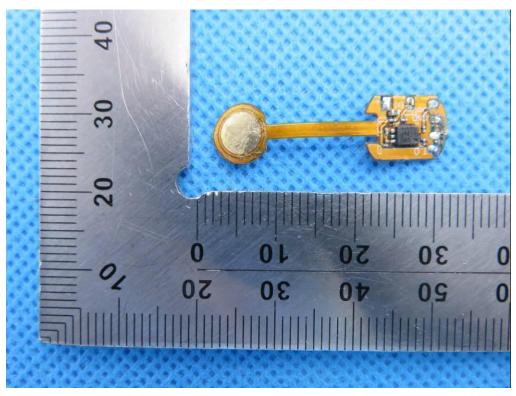


**INTERNAL VIEW OF EUT-4** 

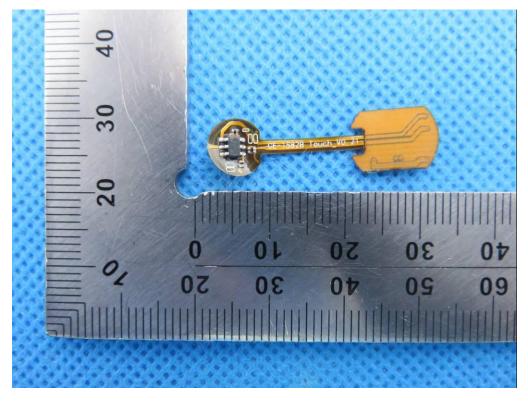


**INTERNAL VIEW OF EUT-5** 

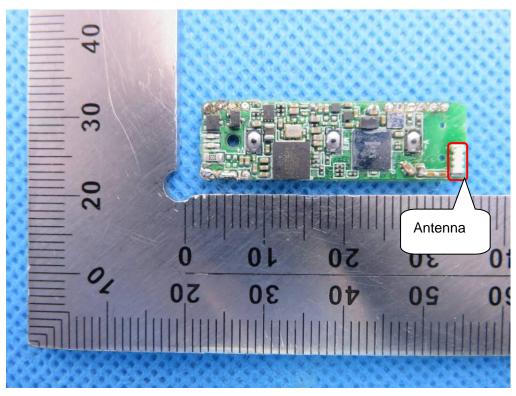

**INTERNAL VIEW OF EUT-6** 

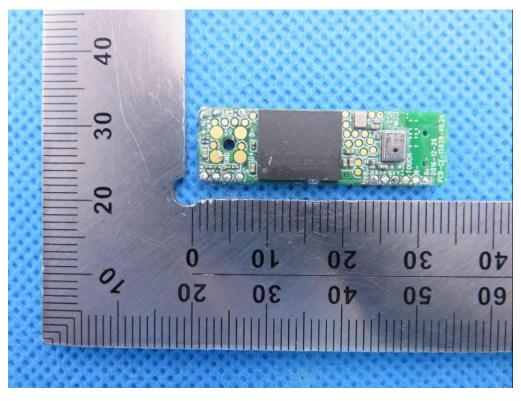

# INTERNAL VIEW OF EUT-7

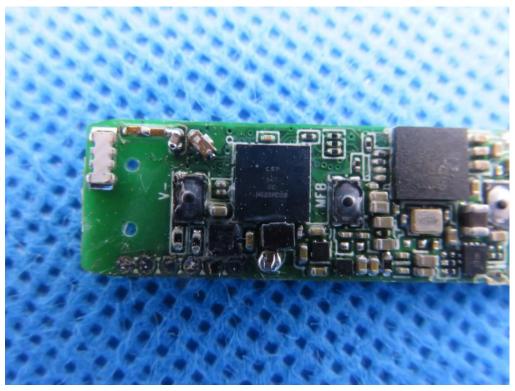

----END OF REPORT----