# **FCC Test Report**

Report No.: AGC01835160201FE03

**FCC ID** 2AAEM-HXEP250A

**APPLICATION PURPOSE** Original Equipment

PRODUCT DESIGNATION Bluetooth Earbuds

**BRAND NAME HMDX** 

**MODEL NAME** HX-EP250

**CLIENT** Cosonic Acoustic technology Co., Ltd.

**DATE OF ISSUE** Mar.11,2016

STANDARD(S)

FCC Part 15 Rules **TEST PROCEDURE(S)** 

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC01835160201FE03 Page 2 of 52

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar.11,2016	Valid	Original Report

# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. ALL TEST EQUIPMENT LIST	9
8. RADIATED EMISSION	11
8.1TEST LIMIT	11
8.2. MEASUREMENT PROCEDURE	12
8.3. TEST SETUP	14
8.4. TEST RESULT	16
9. BAND EDGE EMISSION	31
9.1. MEASUREMENT PROCEDURE	31
9.2 TEST SETUP	31
9.3 RADIATED TEST RESULT	32
10. 20DB BANDWIDTH	36
10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP	36
11.3. LIMITS AND MEASUREMENT RESULTS	36
11. FCC LINE CONDUCTED EMISSION TEST	43
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	43
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	43
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	44
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	45
APPENDIX B: PHOTOGRAPHS OF EUT	

Page 4 of 52

# 1. VERIFICATION OF CONFORMITY

Applicant	Cosonic Acoustic technology Co., Ltd.		
Address	5/F,1st Building,No.6, South Industrial Road,Songshan Lake, Dongguan, Guangdong, China 523808		
Manufacturer	Cosonic Acoustic technology Co., Ltd.		
Address	5/F,1st Building,No.6, South Industrial Road,Songshan Lake, Dongguan, Guangdong, China 523808		
Product Designation	Bluetooth Earbuds		
Brand Name	HMDX		
Test Model	HX-EP250		
Date of test	Mar.09,2016 to Mar.10,2016		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By

Time Huang(Huang Nanhui) Mar.11,2016

Reviewed By

Forrest Lei(Lei Yonggang) Mar.11,2016

Approved By

Solger Zhang(Zhang Hongyi)
Authorized Officer Mar.11,2016

Page 5 of 52

#### 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

	<u> </u>
Operation Frequency 2.402 GHz to 2.480GHz	
RF Output Power	-6.20dBm(Max)
Bluetooth Version	V4.1
Modulation	GFSK, π /4-DQPSK, 8DPSK
Number of channels	79
Hardware Version	V1.0
Software Version	V1.5
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery

Note: The USB port only used for charging and can't be used to transfer data with PC.

The EUT is not active when charging.

# 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402MHZ	
	1	2403MHZ	
	:	:	
	38	2440 MHZ	
2400~2483.5MHZ	39	2441 MHZ	
	40	2442 MHZ	
	:	:	
	77	2479 MHZ	
	78	2480 MHZ	

Report No.: AGC01835160201FE03 Page 6 of 52

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %  $\circ$ 


No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link

#### Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

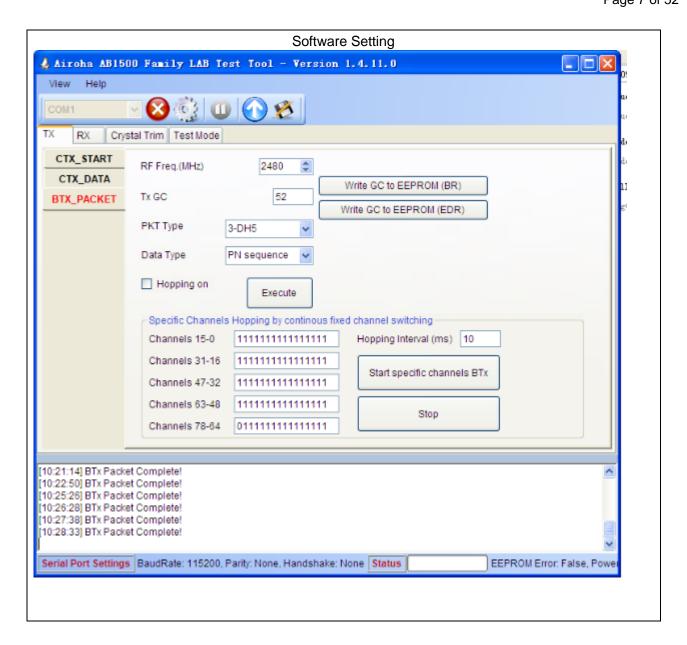

Page 8 of 52

# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



# **5.2. EQUIPMENT USED IN EUT SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Earbuds	HMDX	2AAEM-HXEP250A	EUT
2	Control box	N/A	N/A	A.E
3	PC	Sony	E1412AYCW	A.E
4	AC adapter	GPE0538	1.1m,unshielded	A.E
5	Temporary Antenna Connector	T10	N/A	A.E

# **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	BANDWITH	Compliant

Note: N/A means not applicable.

Report No.: AGC01835160201FE03 Page 9 of 52

# **6. TEST FACILITY**

Site Dongguan Precise Testing Service Co., Ltd.		
Location  Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,		
FCC Registration No.	371540	
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.	

# 7. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016		
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016		
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016		
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016		
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016		

Report No.: AGC01835160201FE03 Page 10 of 52

# FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016	
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016	
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016	
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016	
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016	
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A	
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016	
Radiation Cable 1	MXT	RS1	R005	June 6, 2015	June 5, 2016	
Radiation Cable 2	MXT	RS1	R006	June 6, 2015	June 5, 2016	

	Conducted Emission Test Site								
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration				
EMI Test Receiver	<ul> <li>Rohde &amp; Schwarz</li> </ul>	ESCI	101417	July 4, 2015	July 3, 2016				
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016				
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016				
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016				
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016				
Conduction Cable	MXT	SE1	S003	June 6,2015	June 5,2016				

Page 11 of 52

# 8. RADIATED EMISSION

#### 8.1TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)				
0.490 ~ 1.705	30	24000/F(kHz)				
1.705 ~ 30	30	30				
30 ~ 88	3	100	40.0			
88 ~ 216	3	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3	Other:74.0 dB(µV)/m (Pea	k) 54.0 dB(μV)/m (Average)			

Remark:

- (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Report No.: AGC01835160201FE03 Page 12 of 52

#### **8.2. MEASUREMENT PROCEDURE**

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Report No.: AGC01835160201FE03 Page 13 of 52

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting				
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP				
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP				
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP				
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average				

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC01835160201FE03 Page 14 of 52

#### 8.3. TEST SETUP


# Radiated Emission Test-Setup Frequency Below 30MHz

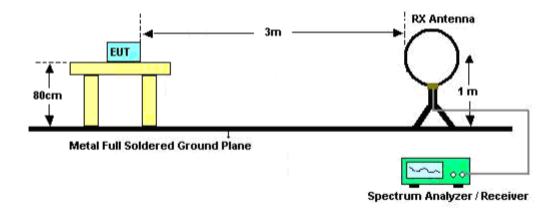

# RADIATED EMISSION TEST SETUP 30MHz-1000MHz

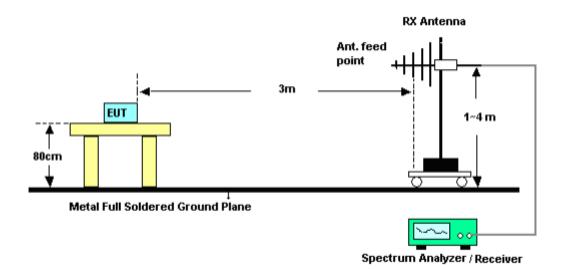

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

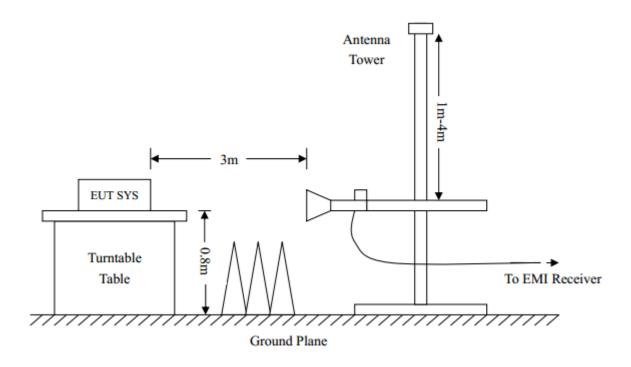

Page 16 of 52

#### **8.4. TEST RESULT**


#### (Worst modulation: GFSK)

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.

# **RADIATED EMISSION BELOW 1GHZ**

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

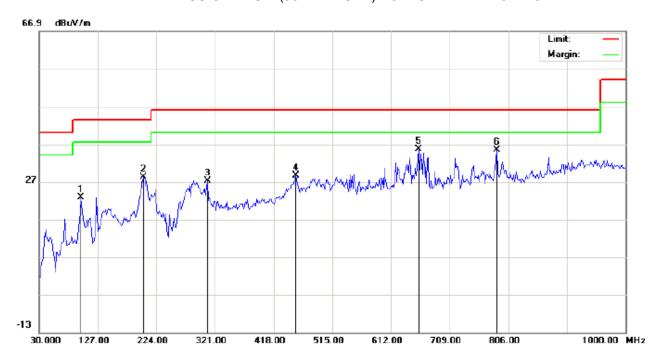

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:Low Channel TX

Note:


Polarization: Horizontal Temperature: 22.8 Power: Humidity: 54.8 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		99.5167	12.88	10.00	22.88	43.50	-20.62	peak			
2		202.9833	16.53	11.70	28.23	43.50	-15.27	peak			
3		308.0667	11.33	15.95	27.28	46.00	-18.72	peak			
4		455.1832	7.93	20.65	28.58	46.00	-17.42	peak			
5	*	657.2667	11.66	24.04	35.70	46.00	-10.30	peak			
6		786.6000	8.28	27.14	35.42	46.00	-10.58	peak			

Page 17 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

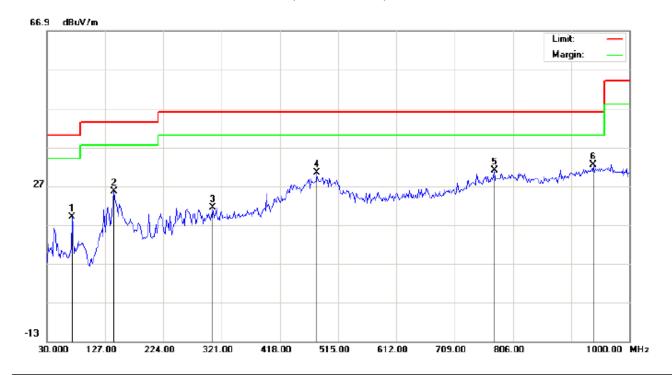

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:Low Channel TX

Note:

Polarization:	Vertical	Temperatu	ıre: 22.8
Power:		Humidity:	54.8 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		72.0331	15.21	3.76	18.97	40.00	-21.03	peak			
2		141.5500	10.36	15.21	25.57	43.50	-17.93	peak			
3		306.4499	5.57	15.84	21.41	46.00	-24.59	peak			
4		479.4332	9.50	20.91	30.41	46.00	-15.59	peak			
5		775.2833	4.10	26.98	31.08	46.00	-14.92	peak			
6	*	940.1833	2.75	29.73	32.48	46.00	-13.52	peak		·	


# **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

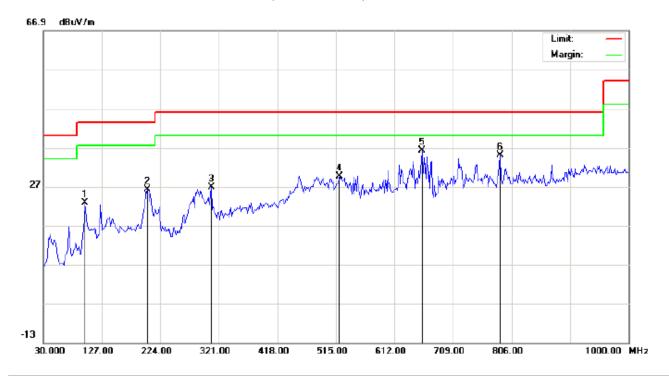

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:Middle Channel TX

Note:


Polarization: *Horizontal* Temperature: 22.8 Power: Humidity: 54.8 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		99.5167	12.88	10.00	22.88	43.50	-20.62	peak			
2		202.9833	14.53	11.70	26.23	43.50	-17.27	peak			
3		308.0667	10.83	15.95	26.78	46.00	-19.22	peak			
4		521.4666	7.95	21.71	29.66	46.00	-16.34	peak			
5	*	657.2667	12.16	24.04	36.20	46.00	-9.80	peak			
6		786.6000	7.78	27.14	34.92	46.00	-11.08	peak			

Page 19 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

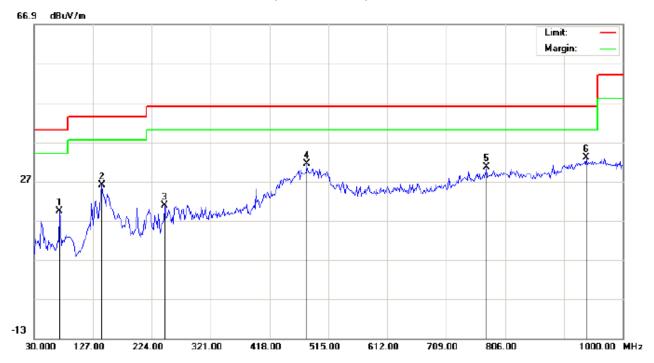

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:Middle Channel TX

Note:

Polarization:	Vertical	Temperature: 22	2.8
Power:		Humidity: 54.8	%

Distance:

No	. М	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		72.0331	15.71	3.76	19.47	40.00	-20.53	peak			
2	Τ	141.5500	10.86	15.21	26.07	43.50	-17.43	peak			
3		245.0166	7.37	13.41	20.78	46.00	-25.22	peak			
4		479.4332	10.50	20.91	31.41	46.00	-14.59	peak			
5		775.2833	3.60	26.98	30.58	46.00	-15.42	peak			
6	*	940.1833	3.25	29.73	32.98	46.00	-13.02	peak			


# **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 20 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

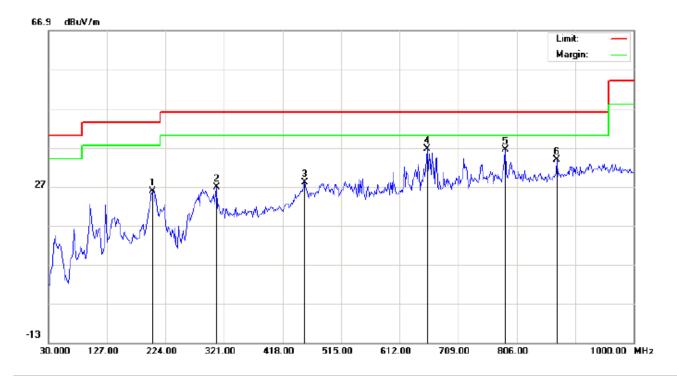

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:High Channel TX

Note:


Polarization:	Horizontal	Temperature: 22.8
Power:		Humidity: 54.8 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		202.9832	14.03	11.70	25.73	43.50	-17.77	peak			
2		308.0667	10.83	15.95	26.78	46.00	-19.22	peak			
3		455.1833	7.43	20.65	28.08	46.00	-17.92	peak			
4	*	657.2667	12.66	24.04	36.70	46.00	-9.30	peak			
5		786.6000	9.28	27.14	36.42	46.00	-9.58	peak			
6		872.2833	5.98	27.89	33.87	46.00	-12.13	peak			

Page 21 of 52

# RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

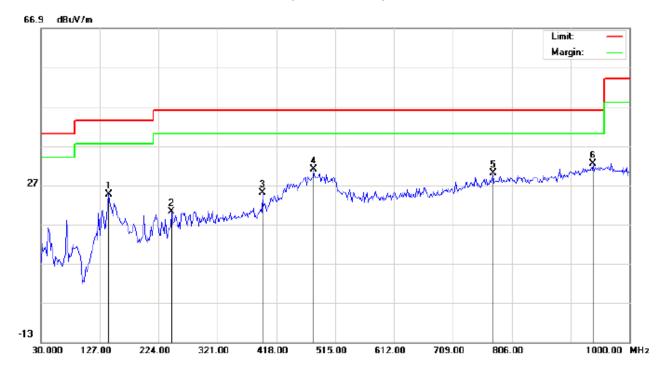

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode:High Channel TX

Note:

Polarization:	Vertical	Temperature: 22.8
Power:		Humidity: 54.8 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		141.5500	9.36	15.21	24.57	43.50	-18.93	peak			
2		245.0167	6.87	13.41	20.28	46.00	-25.72	peak			
3		395.3667	6.02	19.04	25.06	46.00	-20.94	peak			
4		479.4333	10.00	20.91	30.91	46.00	-15.09	peak			
5		775.2833	3.10	26.98	30.08	46.00	-15.92	peak			
6	*	940.1833	2.75	29.73	32.48	46.00	-13.52	peak			

# **RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 22 of 52

#### **RADIATED EMISSION ABOVE 1GHZ**

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

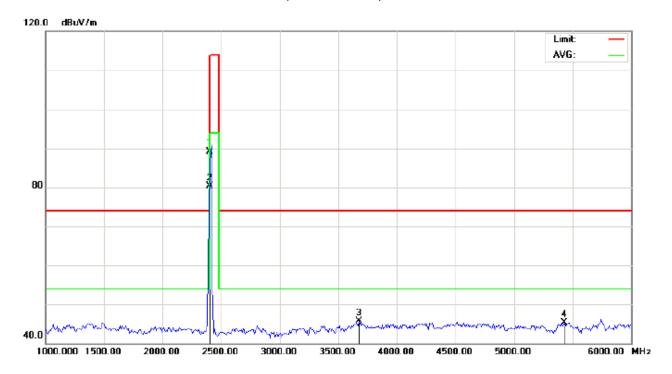

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

Distance: 3m

EUT:Bluetooth Earbuds

M/N:HX-EP250


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	98.73	-9.68	89.05	114.00	-24.95	peak			
2	*	2402.000	89.92	-9.68	80.24	94.00	-13.76	AVG	100	153	
3		3675.000	52.45	-6.81	45.64	74.00	-28.36	peak			
4		5433.333	47.04	-1.81	45.23	74.00	-28.77	peak			

Page 23 of 52

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

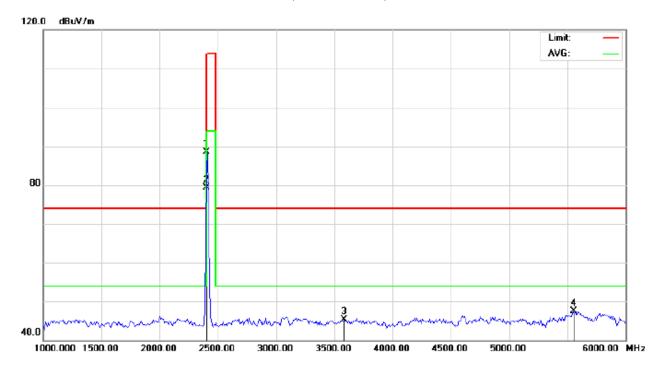

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

Distance: 3m

EUT:Bluetooth Earbuds

M/N:HX-EP250


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2402.000	98.27	-9.68	88.59	114.00	-25.41	peak			
2		2402.000	89.01	-9.68	79.33	114.00	-34.67	peak	150	24	
3		3583.333	52.75	-7.38	45.37	74.00	-28.63	peak			
4		5558.333	49.21	-1.78	47.43	74.00	-26.57	peak			

Page 24 of 52

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

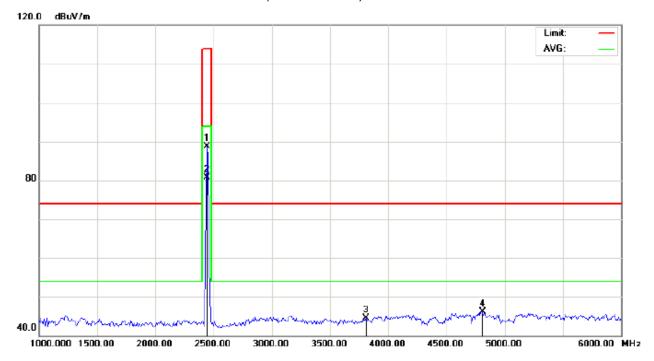

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Earbuds Distance: 3m

M/N:HX-EP250


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	98.29	-9.63	88.66	114.00	-25.34	peak			
2	*	2441.000	90.41	-9.63	80.78	94.00	-13.22	AVG	100	186	
3		3808.333	50.42	-5.99	44.43	74.00	-29.57	peak			
4		4808.333	48.36	-2.30	46.06	74.00	-27.94	peak			

Page 25 of 52

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

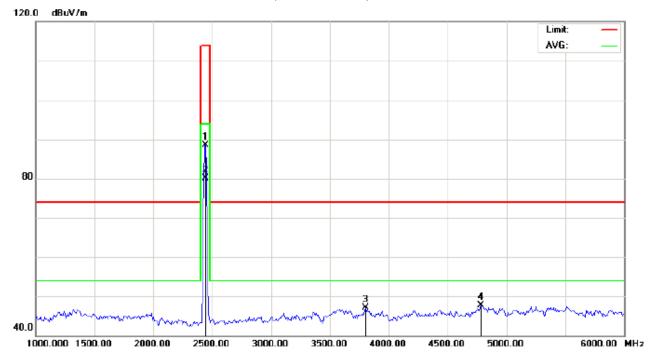

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Earbuds Distance: 3m

M/N:HX-EP250


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	98.23	-9.63	88.60	114.00	-25.40	peak			
2	*	2441.000	89.69	-9.63	80.06	94.00	-13.94	AVG	100	134	
3		3800.000	53.19	-6.04	47.15	74.00	-26.85	peak			
4		4783.333	50.14	-2.37	47.77	74.00	-26.23	peak			

Page 26 of 52

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

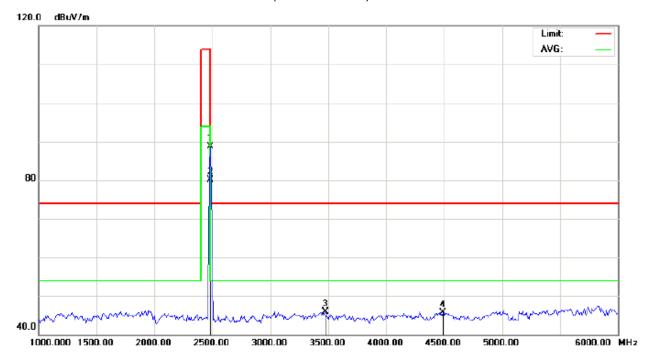

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

Distance: 3m

EUT:Bluetooth Earbuds

M/N:HX-EP250


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	98.37	-9.59	88.78	114.00	-25.22	peak			
2	*	2480.000	89.78	-9.59	80.19	94.00	-13.81	AVG	100	163	
3		3475.000	53.87	-7.91	45.96	74.00	-28.04	peak			
4		4491.667	48.93	-3.14	45.79	74.00	-28.21	peak			

Page 27 of 52

# RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

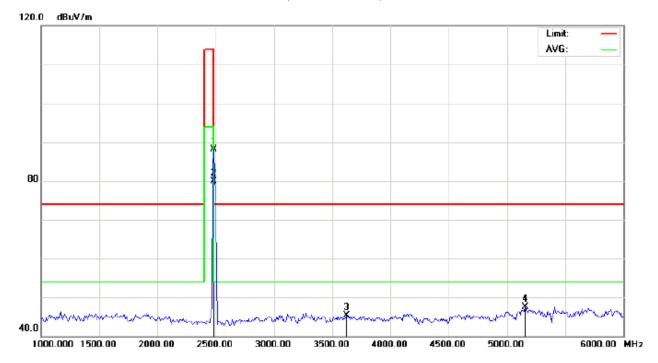

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK)- Power: Humidity: 60 %

EUT:Bluetooth Earbuds Distance: 3m

M/N:HX-EP250

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	97.67	-9.59	88.08	114.00	-25.92	peak			
2	*	2480.000	89.53	-9.59	79.94	94.00	-14.06	AVG	150	89	
3		3625.000	52.40	-7.12	45.28	74.00	-28.72	peak			
4		5158.333	49.29	-1.80	47.49	74.00	-26.51	peak			

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC01835160201FE03 Page 28 of 52

# Field strength of the fundamental signal

1MBPS (GFSK)

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	98.73	-9.68	89.05	114	-24.95	Horizontal
2402	98.27	-9.68	88.59	114	-25.41	Vertical
2441	98.29	-9.63	88.66	114	-25.34	Horizontal
2441	98.23	-9.63	88.60	114	-25.40	Vertical
2480	98.37	-9.59	88.78	114	-25.22	Horizontal
2480	97.67	-9.59	88.08	114	-25.92	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	89.92	-9.68	80.24	94	-13.76	Horizontal
2402	89.01	-9.68	79.33	94	-34.67	Vertical
2441	90.41	-9.63	80.78	94	-13.22	Horizontal
2441	89.69	-9.63	80.06	94	-13.94	Vertical
2480	89.78	-9.59	80.19	94	-13.81	Horizontal
2480	89.53	-9.59	79.94	94	-14.06	Vertical

Report No.: AGC01835160201FE03 Page 29 of 52

# **2MBPS** (π /4-DQPSK)

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	97.52	-9.68	87.84	114	-26.16	Horizontal
2402	96.71	-9.68	87.03	114	-26.97	Vertical
2441	96.79	-9.63	87.16	114	-26.84	Horizontal
2441	96.73	-9.63	87.10	114	-26.90	Vertical
2480	96.87	-9.59	87.28	114	-26.72	Horizontal
2480	96.57	-9.59	86.98	114	-27.02	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	89.72	-9.68	80.04	94	-13.96	Horizontal
2402	89.05	-9.68	79.37	94	-14.63	Vertical
2441	88.80	-9.63	79.17	94	-14.83	Horizontal
2441	89.97	-9.63	80.34	94	-13.66	Vertical
2480	89.64	-9.59	80.05	94	-13.95	Horizontal
2480	88.97	-9.59	79.38	94	-14.62	Vertical

Report No.: AGC01835160201FE03 Page 30 of 52

# 3MBPS (8DPSK)

# Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	95.70	-9.68	86.02	114	-27.98	Horizontal
2402	95.66	-9.68	85.98	114	-28.02	Vertical
2441	95.69	-9.63	86.06	114	-27.94	Horizontal
2441	95.67	-9.63	86.04	114	-27.96	Vertical
2480	95.77	-9.59	86.18	114	-27.82	Horizontal
2480	95.28	-9.59	85.69	114	-27.31	Vertical

# Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	87.72	-9.68	78.04	94	-15.96	Horizontal
2402	87.01	-9.68	77.33	94	-16.67	Vertical
2441	87.10	-9.63	77.47	94	-16.53	Horizontal
2441	86.80	-9.63	77.17	94	-16.83	Vertical
2480	86.05	-9.59	76.46	94	-17.54	Horizontal
2480	86.56	-9.59	76.97	94	-17.03	Vertical

Page 31 of 52

#### 9. BAND EDGE EMISSION

#### 9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

#### 9.2 TEST SETUP

#### RADIATED EMISSION TEST SETUP

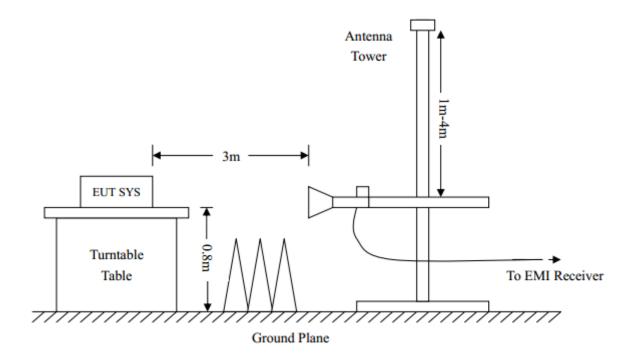


Page 32 of 52

#### 9.3 RADIATED TEST RESULT

# (Worst modulation:GFSK)

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

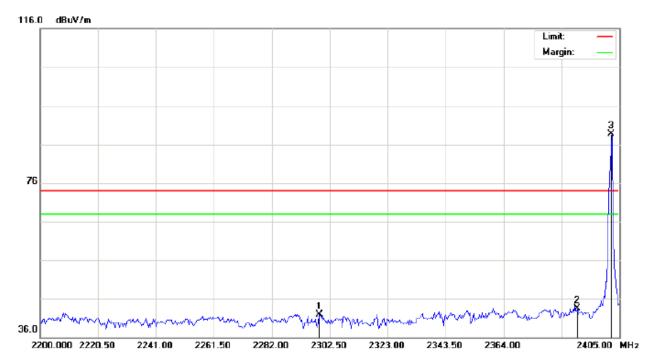

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Earbuds

M/N:HX-EP250

Mode: Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2298.742	31.71	10.21	41.92	74.00	-32.08	peak			
2		2390.000	33.12	10.31	43.43	74.00	-30.57	peak			
3	*	2402.000	78.41	10.32	88.73	74.00	14.73	peak			

Distance:

Page 33 of 52

# TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

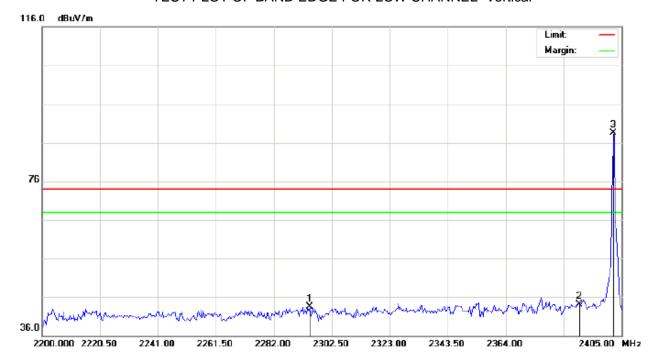

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Earbuds Distance:

M/N:HX-EP250


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2294.642	33.38	10.20	43.58	74.00	-30.42	peak			
2		2390.000	33.85	10.31	44.16	74.00	-29.84	peak			
3	*	2402.000	78.26	10.32	88.58	74.00	14.58	peak			

Page 34 of 52

# TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

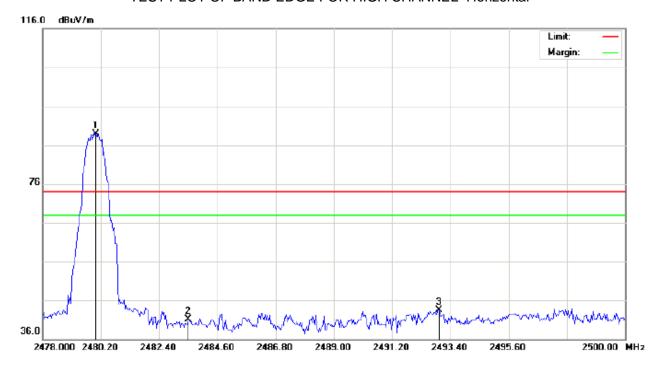

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT:Bluetooth Earbuds Distance:

M/N:HX-EP250


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	78.46	10.41	88.87	74.00	14.87	peak			
2		2483.500	30.75	10.41	41.16	74.00	-32.84	peak			
3		2492.960	33.11	10.42	43.53	74.00	-30.47	peak			

Page 35 of 52

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

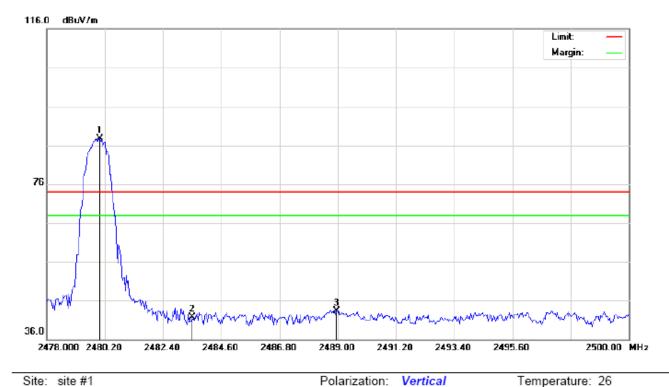

Site: site #1 Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power:

Temperature: 26 Humidity: 60 %

EUT:Bluetooth Earbuds

Distance:

M/N:HX-EP250

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	77.35	10.41	87.76	74.00	13.76	peak			
2		2483.500	31.37	10.41	41.78	74.00	-32.22	peak			
3		2488.963	32.82	10.42	43.24	74.00	-30.76	peak			

#### **RESULT: PASS**

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

Page 36 of 52


# 10. 20DB BANDWIDTH

#### **10.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### 10.2. TEST SET-UP

# (BLOCK DIAGRAM OF CONFIGURATION)

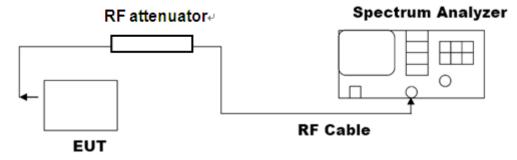

Note: The EUT has been used temporary antenna connector for testing.

#### 11.3. LIMITS AND MEASUREMENT RESULTS

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL										
Applicable Limite		Measurement Result								
Applicable Limits	Test Da	Criteria								
	Low Channel	1.108	PASS							
N/A	Middle Channel	1.089	PASS							
	High Channel	1.075	PASS							


Report No.: AGC01835160201FE03

Page 37 of 52

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

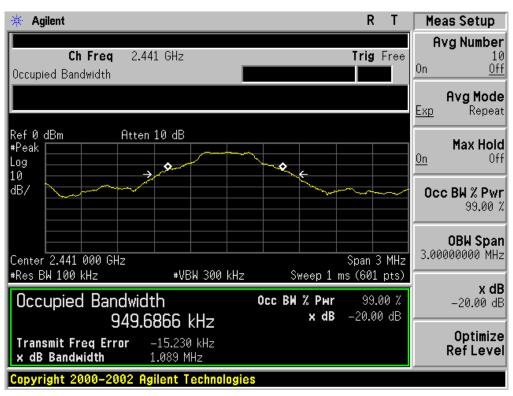

Report No.: AGC01835160201FE03

Page 38 of 52


## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

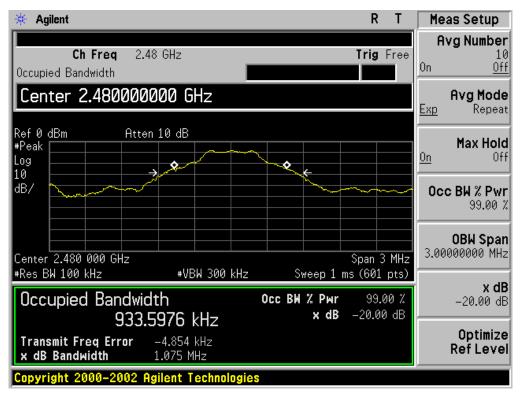


Report No.: AGC01835160201FE03 Page 39 of 52

BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESUL					
Applicable Limits	Measurement Result				
	Test Data (MHz)		Criteria		
N/A	Low Channel	1.353	PASS		
	Middle Channel	1.345	PASS		
	High Channel	1.343	PASS		


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

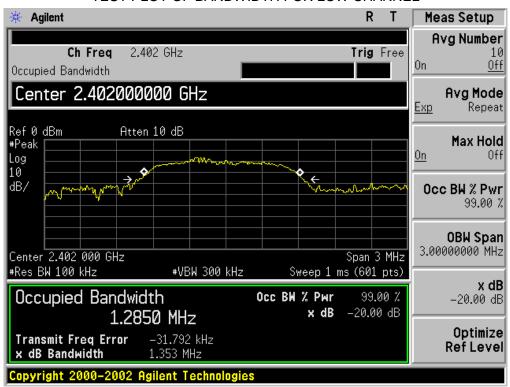

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

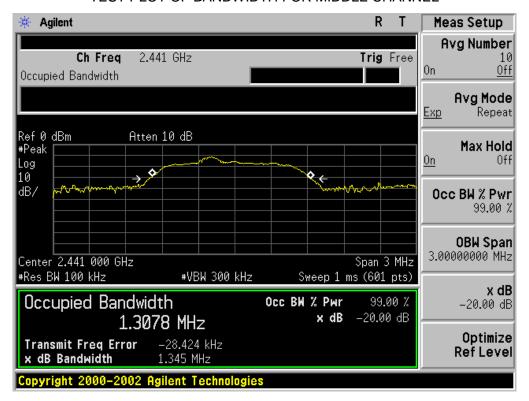


#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

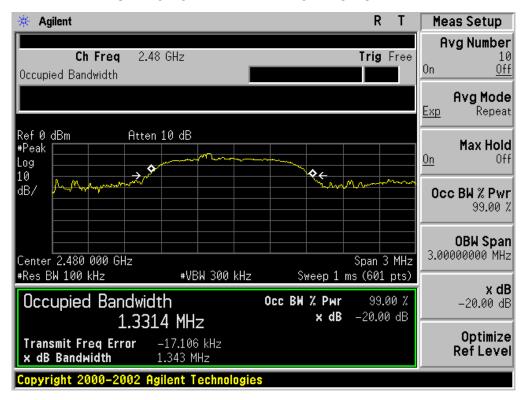


Report No.: AGC01835160201FE03 Page 41 of 52

BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL					
Applicable Limits	Measurement Result				
	Test Data (MHz)		Criteria		
N/A	Low Channel	1.368	PASS		
	Middle Channel	1.362	PASS		
	High Channel	1.370	PASS		


### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

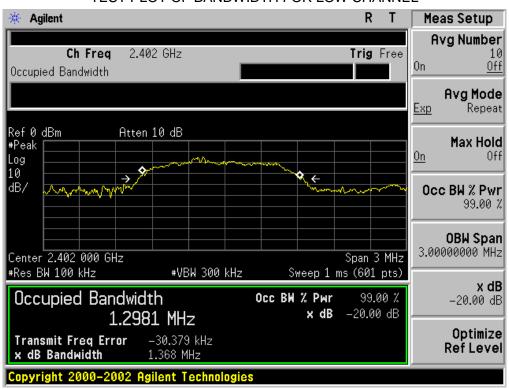

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

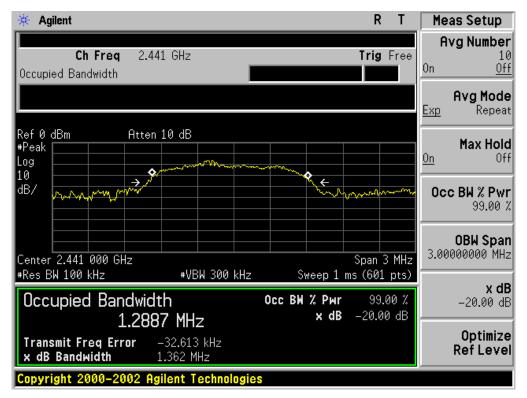

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

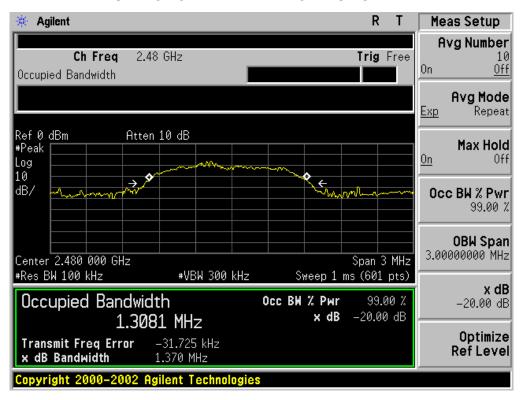

Report No.: AGC01835160201FE03 Page 43 of 52

## 11. FCC LINE CONDUCTED EMISSION TEST


# 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage		
	Q.P.( dBuV)	Average( dBuV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

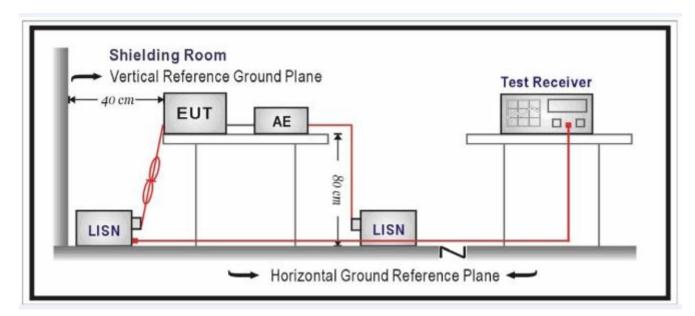

Report No.: AGC01835160201FE03

Page 44 of 52

#### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


# 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


N/A

Report No.: AGC01835160201FE03 Page 45 of 52

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

FCC RADIATED EMISSION TEST SETUP

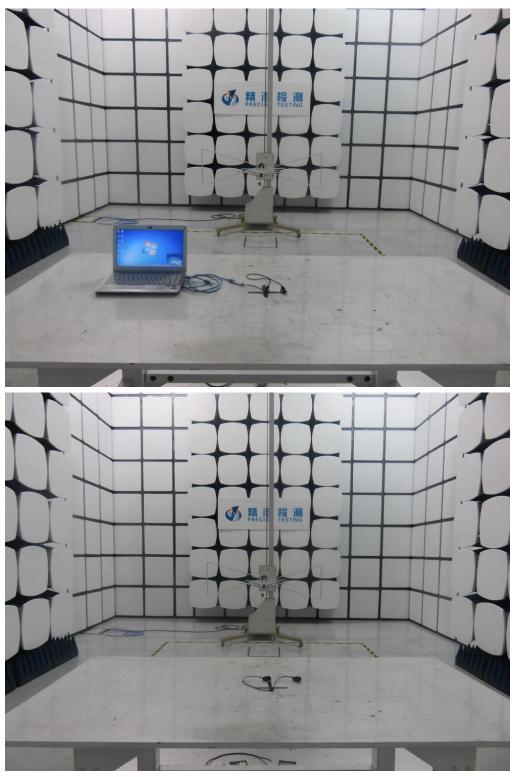

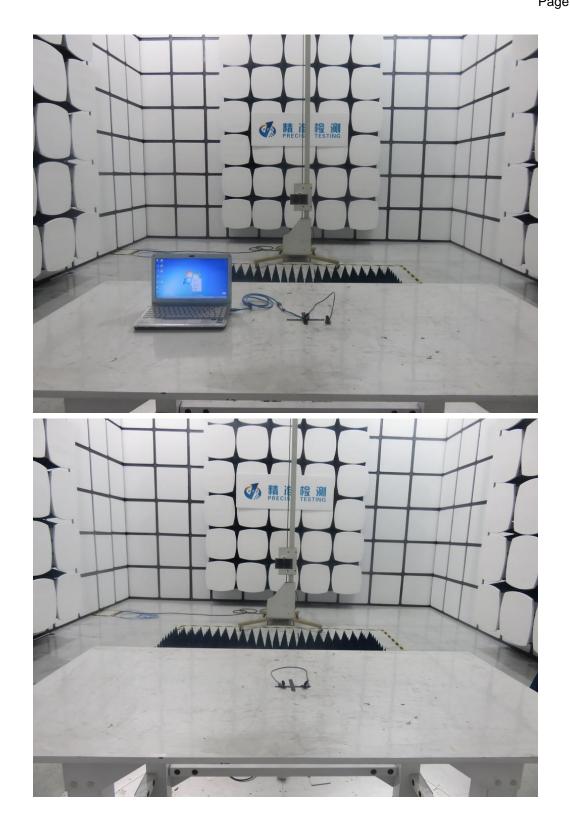

# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



# LEFT VIEW OF EUT



RIGHT VIEW OF EUT




# VIEW OF EUT (PORT)




**OPEN VIEW OF EUT** 




**INTERNAL VIEW OF EUT-1** 

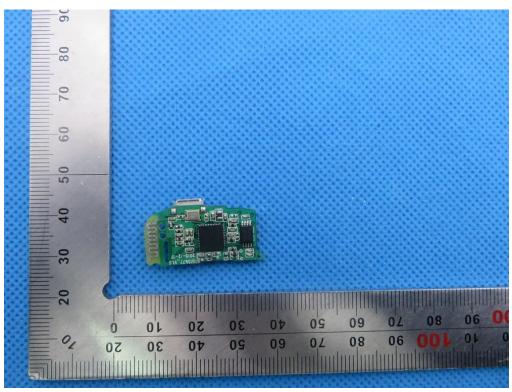

**INTERNAL VIEW OF EUT-2** 

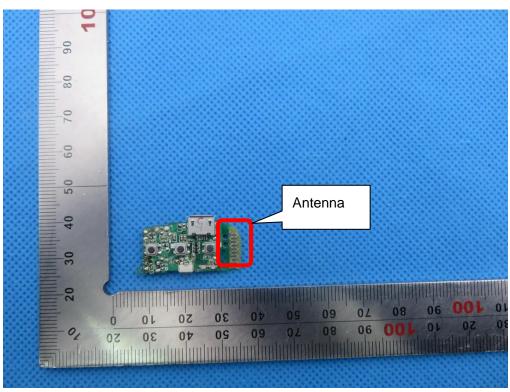

# **INTERNAL VIEW OF EUT-3**

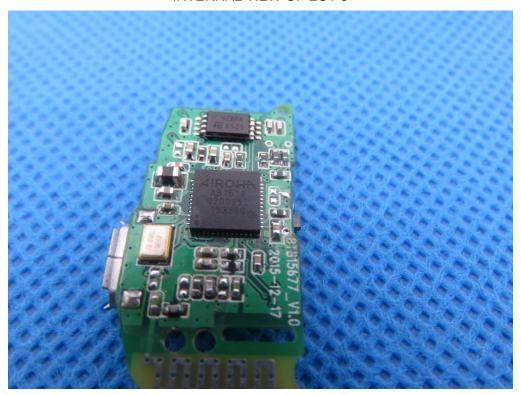

----END OF REPORT----