

849 NW State Road 45 Newberry, FL 32669 USA Phone: 888.472.2424 or

352.472.5500 Fax: 352.472.2030

Email: <u>info@timcoengr.com</u>
Website: www.timcoengr.com

FCC PART 15.109 RADAR DETECTOR REPORT

Applicant	DJP CO.		
Address	10 N. MARTINGALE ROAD SUITE 400 SCHAUMBURGIL60173		
Product Model Number	C07760		
Product Description	RADAR DETECTOR		
FCC ID:	2AAG8C07760		
Date Sample Received	12/9/2016		
Date Tested	12/21/2016		
Tested By	Tim Royer		
Approved By	Cory Leverett		

Report	Version	Description	Issue Date
Number	Number		
2471AUT16TestReport	Rev1	Initial Issue	12/29/2016

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION	4
TEST RESULTS SUMMARY	4
RADIATED SPURIOUS EMISSIONS	5
Test Data: 11.7 – 12.2 GHz 3 Meter Peak Field Strength Plot	7
TEST EQUIPMENT LIST	8

Applicant: DJP CO. TABLE OF CONTENTS

FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 2 of 8



GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

Fulfill the general approval requirements as identified in this test report and was selected by the customer.

Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669

Tested by:

Name and Title: Tim Royer, Project Manager/Testing Engineer

Date: 12/21/2016

Reviewed and approved by: Name and Title: Cory Leverett

Date: 12/29/2016

Applicant: DJP CO.

FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 3 of 8

TABLE OF CONTENTS



GENERAL INFORMATION

EUT Specification

EUT Description	RADAR DETECTOR		
FCC ID	2AAG8C07760		
Model Number	C07760		
Operating Frequency	10.525GHz(X-Band), 24.150 GHz (K-Band), 33.4- 36.0G Hz (Ka Band)		
	☐ 110-120Vac/50- 60Hz		
EUT Power Source	☑ DC Power 12V		
	☐ Battery Operated Exclusively		
	☐ Prototype		
Test Item	☐ Pre-Production		
Type of Equipment	□ Production		
	Fixed		
	☐ Portable		
	Temperature: 24-26°C		
Test Conditions	Relative humidity: 50-65%		
	Barometric Pressure: 30.01"		
Modification to the EUT	None		
Test Exercise	The EUT was operated in a normal mode.		
Applicable Standards	FCC Pt 15.109, Pt 15.107		
Test Procedure	ANSI C63.4: 2014		
Test Facility	Facility Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.		

TEST RESULTS SUMMARY

The test results relate only to the items tested.		
FCC Rules Part No.	RESULTS	
	Pass/Fail/NA	
15.109 (h) Radiated Emissions	Pass	

Applicant: DJP CO. TABLE OF CONTENTS

Applicant: DJP CO.
FCC ID: 2AAG8C07760
Report: 2471AUT16Tes

Report: 2471AUT16TestReport_Rev1 Page 4 of 8



RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109 (h)

Requirements:

Frequency	Limits
11.7 to 12.2GHz	54.0 dBµV/m measured @ 3 meters

Test Procedure: 11.7 to 12.2GHz. Measurements in the 11.7 to 12.2GHz band were made with a Double Ridge Horn and an external preamplifier The measurements in the 11.7 to 12.2GHz band represent the ambient noise levels. Testing was done in accordance with ANSI C63.4 & 15.35(b) specifies the use of an average detector in this band. In addition, the peak level of an emission shall not exceed the average limit by more than 20 dB using a minimum Resolution Bandwidth (RBW) of 1 MHz and minimum Video Bandwidth (VBW) OF 1 MHz. The following procedure is designed to determine if there are any spurious emissions from the local oscillator within the band of interest along with any additional spurious emissions caused by other circuitry within the device.

3) Determine the frequency of the peak emission:

Start Frequency 11.7 GHz

Stop Frequency 12.2 GHz

RBW equal to or greater than 1 MHz

VBW equal to or greater than 1 MHz

Detector Function Peak

Maximize the emissions with regards to device orientation, antenna polarization, and antenna height. Sweep the band using Max Hold for a minimum of 2 minutes. Record this frequency for measuring the peak emission. In addition record the frequency of other spurious emissions noted.

Applicant: DJP CO. TABLE OF CONTENTS

FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 5 of 8



RADIATED SPURIOUS EMISSIONS Test Procedure (Cont.):

2) Determine the peak level of the emission:

Center Frequency Set to the frequency determined in Step 1 RBW Equal to or greater than 1 MHz VBW Equal to or greater than 1 MHz Detector Function Peak Measure the value of the peak emission using Max Hold for a minimum of 2 minutes. This can be done at zero spans or a frequency span where the analyzer does not show a "Measurement Uncalibrated" message. Record the peak value. If the peak measurement is compliant with the average limit an average measurement is not necessary. If the peak value exceeds the average limit by less than 20 dB proceed to Step 3.

3) Determine the average level of the emission:

Center Frequency Set to the frequency determined in Step 1 Span Zero

RBW Equal to or greater than 1 MHz

VBW Equal to or greater than 10 Hz

Detector Function Peak

This measurement uses video averaging and must be done in linear mode. The analyzer Reference Level is adjusted so that a signal is clearly visible on the screen. Measure the value of the emission using Max Hold for a minimum of 2 minutes. Record this as the average value. Step 2 and Step 3 should be repeated for other spurious emissions.

Formula of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz) Meter Reading + ACF + CL = FS

33 20 dBuV + 10.36 dB/m +0.40 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2014 10.2.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.


Applicant: DJP CO. TABLE OF CONTENTS

FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 6 of 8



RADIATED SPURIOUS EMISSIONS

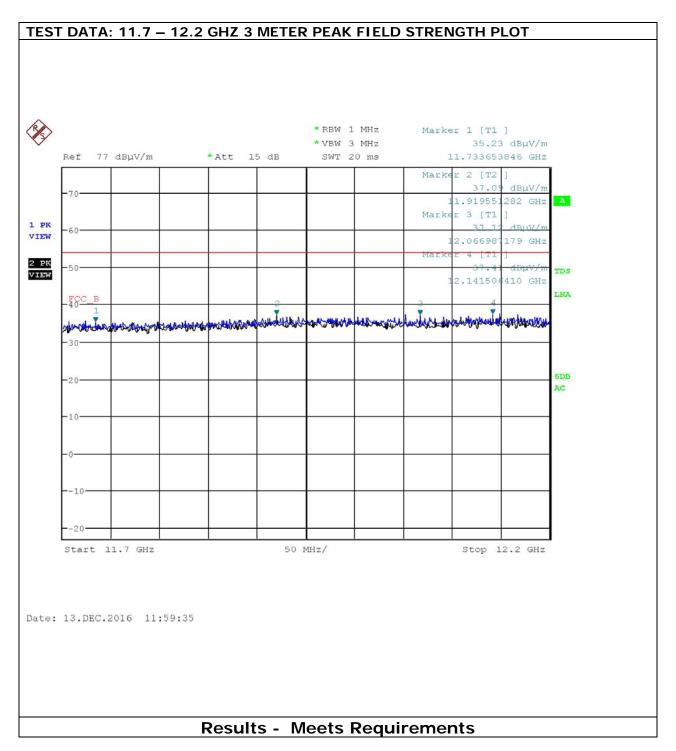

Ant Polarity: T1 (Blue) = Vertical, T2 (Black) = Horizontal

Applicant: DJP CO. TABLE OF CONTENTS

FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 7 of 8



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Standard Gain Horn 8.2-12.5 GHz	Systron Donner	DBG-520-20	Not Serialized	N/A	N/A
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Software: Field Strength Program	Timco	N/A	Version 4.0	NA	NA
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244- 01; KMKM- 0670-00; KFKF-0198- 01	08/08/16	08/08/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	NA	NA
Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	01/04/16	01/04/18

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

Applicant: DJP CO. TABLE OF CONTENTS

Applicant: DJP CO. FCC ID: 2AAG8C07760

Report: 2471AUT16TestReport_Rev1 Page 8 of 8