



CFR 47 FCC PART 15 SUBPART E
CERTIFICATION TEST REPORT

For

Tablet

MODEL NUMBER: VT-TABLET-5082G

FCC ID: 2AAGE5081G6

REPORT NUMBER: 4789999654.1-11

ISSUE DATE: September 18, 2021

Prepared for

Chengdu Vantron Technology Co., Ltd.
No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	09/18/2021	Initial Issue	

Note: This is a spot check report base on 4789999654.1-4 which is issued by UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch on September 15, 2021. The old version EUT had already applied for FCC ID (2AAGE5081GB486), the new version and old version are the same except to except for one less the LTE module, so we only follow the KDB KDB484596 D01 to add the spot check in this report. For other data, please refer to the original report 4789999654.1-4.

Parent Serial Number SI07, FCC ID: 2AAGE5081GB486

Variant Serial Number SI07A, FCC ID: 2AAGE5081G6

Test Report	802.11 2.4GHz WIFI (DTS)	BLE (DTS)	Bluetooth DSS	802.11 5G WIFI UNII
old version	Report #4789999654.1- 3	Report #4789999654.1- 1	Report #4789999654.1- 2	Report #4789999654.1- 4
new version	Report #4789999654.1- 10	Report #4789999654.1- 9	Report 4789999654.1- 8	Report #4789999654.1- 11



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Conducted Output Power	FCC 15.407 (a)	PASS
2	Radiated Bandedge and Spurious Emission Spot Check	FCC 15.407 (b) FCC 15.209 FCC 15.205	PASS
3	Antenna Requirement	FCC 15.203	PASS
Note: 1.This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >when <Accuracy Method> decision rule is applied.			

Test worst case of Conducted Output Power Spot Check				
Test Mode	Frequency (MHz)	Result[dBm]	original report Result[dBm]	Deviation(dB)
a	5200	16.35	16.43	-0.08
n HT20	5200	17.95	18.09	-0.14
n HT40	5230	15.89	15.97	-0.08
ac VHT20	5200	16.33	16.39	-0.06
ac VHT40	5190	15.93	16.06	-0.13
ac VHT80	5210	14.72	14.93	-0.21

The worst case of Radiated Bandedge and Spurious Emission Spot Check					
Test Mode	Test Item	Frequency (MHz)	Result[dBuV/m]	original report Result[dBuV/m]	Deviation(dB)
11a	Band Edge	5150	69.75	70.38	-0.63
11n20	RSE	11807	51.31	52.12	-0.81

Note: Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical limits.



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	10
5.3. CHANNEL LIST	10
5.4. TEST CHANNEL CONFIGURATION	11
5.5. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.6. THE WORSE CASE POWER SETTING PARAMETER	13
5.7. THE WORSE CASE CONFIGURATIONS	14
5.8. DESCRIPTION OF TEST SETUP	15
6. MEASURING INSTRUMENT AND SOFTWARE USED	16
7. ANTENNA PORT TEST RESULTS	18
7.1. CONDUCTED OUTPUT POWER	18
8. RADIATED TEST RESULTS	22
8.1. RESTRICTED BANDEDGE	28
8.1.1. 802.11a SISO MODE	28
UNII-1 BAND	28
8.2. SPURIOUS EMISSIONS (1 GHz ~ 7 GHz)	30
8.2.1. 802.11n HT20 MIMO MODE	30
UNII-3 BAND	30
8.3. SPURIOUS EMISSIONS (7 GHz ~ 18 GHz)	32
8.3.1. 802.11n HT20 MIMO MODE	32
8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	34
8.4.1. 802.11n HT20 MIMO MODE	34
8.5. SPURIOUS EMISSIONS (26 GHz ~ 40 GHz)	36
8.5.1. 802.11n HT40 MIMO MODE	36
8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	38
8.6.1. 802.11n HT20 MIMO MODE	38
8.7. SPURIOUS EMISSIONS BELOW 30 MHz	40
8.7.1. 802.11n HT20 MIMO MODE	40



9. ANTENNA REQUIREMENTS.....43



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Chengdu Vantron Technology Co., Ltd.
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China

Manufacturer Information

Company Name: Chengdu Vantron Technology Co., Ltd.
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China

EUT Information

EUT Name: Tablet
Model: VT-TABLET-5082G
Brand: VANTRON
Sample Received Date: June 23, 2021
Sample Status: Normal
Sample ID: 4030518
Date of Tested: June 23, 2021~ July 02, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	PASS

Prepared By:

Jacky Jiang
Engineer Project Associate

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, CFR 47 FCC Part 2, CFR 47 FCC Part 15, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01r01.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Tablet
Model	VT-TABLET-5082G
Radio Technology	WLAN (IEEE 802.11a20/n HT20/n HT40/ac VHT20/VHT 40/VHT 80)
Operation frequency	UNII-1: 5150 ~ 5250 MHz UNII-3: 5725 ~ 5850 MHz
Modulation	IEEE 802.11a20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT80: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Rated Input	DC 5 V
Li-ion Battery	3.8 V, 8000 mAh, 30.4Wh

5.2. MAXIMUM OUTPUT POWER

UNII-1 BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a 20	5150 ~ 5250	16.35
n HT20		17.95
n HT40		15.89
ac VHT20		16.33
ac VHT40		15.93
ac VHT80		14.72

UNII-3 BAND

IEEE Std. 802.11	Frequency (MHz)	Max Power (dBm)
a 20	5725 ~ 5850	14.66
n HT20		17.69
n HT40		13.73
ac VHT20		14.48
ac VHT40		13.73
ac VHT80		12.82

5.3. CHANNEL LIST

UNII-1 (For Bandwidth = 20 MHz)		UNII-1 (For Bandwidth = 40 MHz)		UNII-1 (For Bandwidth = 80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-3 (For Bandwidth = 20 MHz)		UNII-3 (For Bandwidth = 40 MHz)		UNII-3 (For Bandwidth = 80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				



5.4. TEST CHANNEL CONFIGURATION

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11ac VHT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz

UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11ac VHT40	CH 151(Low Channel), CH 159(High Channel)	5755 MHz, 5795 MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency Band	Antenna Type	Max Antenna Gain (dBi)
1	UNII1& UNII3	Integral antenna	1.4
2	UNII1& UNII3	Integral antenna	2.4

Note: Directional gain= $10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$ dBi=4.92 dBi.

N_{ANT} : Antenna numbers

Note: The value of the antenna gain was declared by customer.

IEE Std. 802.11	Transmit and Receive Mode	Description
802.11a	☒ 2TX, 2RX	ANT 1 or ANT 2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT20	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT40	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
802.11ac VHT80	☒ 2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter	
Test Software	RFTestTool

UNII-1

Mode	Rate	Channel	Soft set value
			ANT1
11a	6M	36	default
		40	default
		48	default
11n HT20	MCS0	36	default
		40	default
		48	default
11n HT40	MCS0	38	default
		46	default
11ac VHT20	MCS0	36	default
		40	default
		48	default
11ac VHT40	MCS0	38	default
		46	default
11ac VHT80	MCS0	42	default

UNII-3

Mode	Rate	Channel	Soft set value
			ANT1
11a	6M	149	default
		157	default
		165	default
11n HT20	MCS0	149	default
		157	default
		165	default
11n HT20	MCS0	151	default
		159	default
11ac VHT20	MCS0	149	default
		157	default
		165	default
11ac VHT40	MCS0	151	default
		159	default
11ac VHT80	MCS0	155	default

5.7. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.6.

Worst case Data Rates declared by the customer:

- IEEE 802.11a / SISO – BPSK / 6 Mbps
- IEEE 802.11n HT20 / MIMO – BPSK / MCS0
- IEEE 802.11n HT40 / MIMO – BPSK / MCS0
- IEEE 802.11ac VHT20 / MIMO – BPSK / MCS0
- IEEE 802.11ac VHT40 / MIMO – BPSK / MCS0
- IEEE 802.11ac VHT80 / MIMO – BPSK / MCS0

For Radiated test of 802.11a the antenna with higher output power was selected to be test.

802.11ac&n SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

Since 802.11ac VHT20/VHT40 mode are different from 802.11n HT20/HT40 only in control messages, so all the tests (except conducted output power and power spectral density) were performed on the worst case (802.11ac VHT20/802.11ac VHT40) mode between these 4 modes and only the worst data was recorded in this report.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
/	/	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type C	/	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	Power adapter	HUAWEI	HW-100225C00	5V2A
2	Earphone 1#	/	/	/
3	Earphone 2#	/	/	/
4	TF Card	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

For Conducted Emission Test for AC Power Port test:

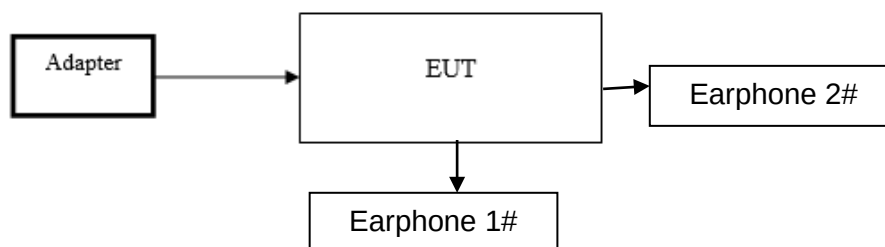



6. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Nov. 12, 2020	Nov. 11, 2021
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 11, 2018	Aug. 10, 2021
Preamplifier	HP	8447D	2944A09099	Nov. 12, 2020	Nov. 11, 2021
EMI Measurement Receiver	R&S	ESR26	101377	Nov. 12, 2020	Nov. 11, 2021
Horn Antenna	TDK	HRN-0118	130939	Sept. 17, 2018	Sept. 17, 2021
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Nov. 20, 2020	Nov. 19, 2021
Horn Antenna	Schwarzbeck	BBHA9170	#691	Aug. 11, 2018	Aug. 11, 2021
Preamplifier	TDK	PA-02-2	TRS-307-00003	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	TDK	PA-02-3	TRS-308-00002	Nov. 12, 2020	Nov. 11, 2021
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Nov. 12, 2020	Nov. 11, 2021
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Nov. 20, 2020	Nov. 19, 2021
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Nov. 12, 2020	Nov. 11, 2021
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Nov. 12, 2020	Nov. 11, 2021
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date



Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2021
Software					
Description		Manufacturer	Name		Version
Tonsend SRD Test System		Tonsend	JS1120-3 RF Test System		2.6.77.0518
Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Nov. 20, 2020	Nov. 19, 2021
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Nov. 20, 2020	Nov. 19, 2021



7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm) ☐ Indoor Access Point: 1 W (30 dBm) ☐ Fixed Point-To-Point Access Points: 1 W (30 dBm) ☒ Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):


- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

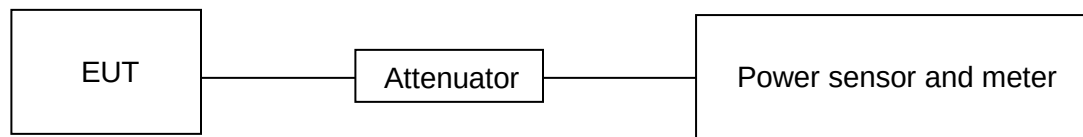**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.5 °C	Relative Humidity	69.5 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	14.89	<=23.98	PASS
	Ant2	5180	16.05	<=23.98	PASS
	Ant1	5200	15.14	<=23.98	PASS
	Ant2	5200	16.35	<=23.98	PASS
	Ant1	5240	15.36	<=23.98	PASS
	Ant2	5240	16.34	<=23.98	PASS
	Ant1	5745	14.38	<=30	PASS
	Ant2	5745	14.55	<=30	PASS
	Ant1	5785	14.36	<=30	PASS
	Ant2	5785	14.63	<=30	PASS
11N20MIMO	Ant1	5825	14.66	<=30	PASS
	Ant2	5825	14.42	<=30	PASS
	total	5180	17.71	<=23.98	PASS
	total	5200	17.95	<=23.98	PASS
	total	5240	17.87	<=23.98	PASS
	total	5745	17.61	<=30	PASS
11N40MIMO	total	5785	17.69	<=30	PASS
	total	5825	16.96	<=30	PASS
	total	5190	15.44	<=23.98	PASS
	total	5230	15.89	<=23.98	PASS
	total	5755	13.42	<=30	PASS
11AC20MIMO	total	5795	13.73	<=30	PASS
	total	5180	15.98	<=23.98	PASS
	total	5200	16.33	<=23.98	PASS
	total	5240	16.06	<=23.98	PASS
	total	5745	14.10	<=30	PASS
	total	5785	14.48	<=30	PASS
11AC40MIMO	total	5825	14.14	<=30	PASS
	total	5190	15.93	<=23.98	PASS
	total	5230	15.57	<=23.98	PASS
	total	5755	13.73	<=30	PASS
11AC80MIMO	total	5795	13.72	<=30	PASS
	total	5210	14.72	<=23.98	PASS
	total	5775	12.82	<=30	PASS



Test worst case results of Spot Check					
Test Mode	Antenna	Frequency (MHz)	Result[dBm]	original report Result[dBm]	Deviation(dB)
a	Ant2	5200	16.35	16.43	-0.08
n HT20	total	5200	17.95	18.09	-0.14
n HT40	total	5230	15.89	15.97	-0.08
ac VHT20	total	5200	16.33	16.39	-0.06
ac VHT40	total	5190	15.93	16.06	-0.13
ac VHT80	total	5210	14.72	14.93	-0.21



8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISSED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK: 68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4

Note:

*1 beyond 75 MHz or more above of the band edge.


*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

TEST SETUP AND PROCEDURE

Below 30 MHz

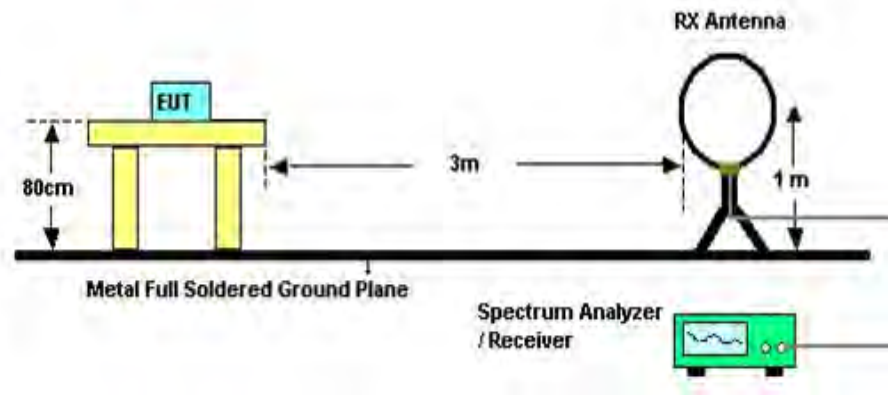


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

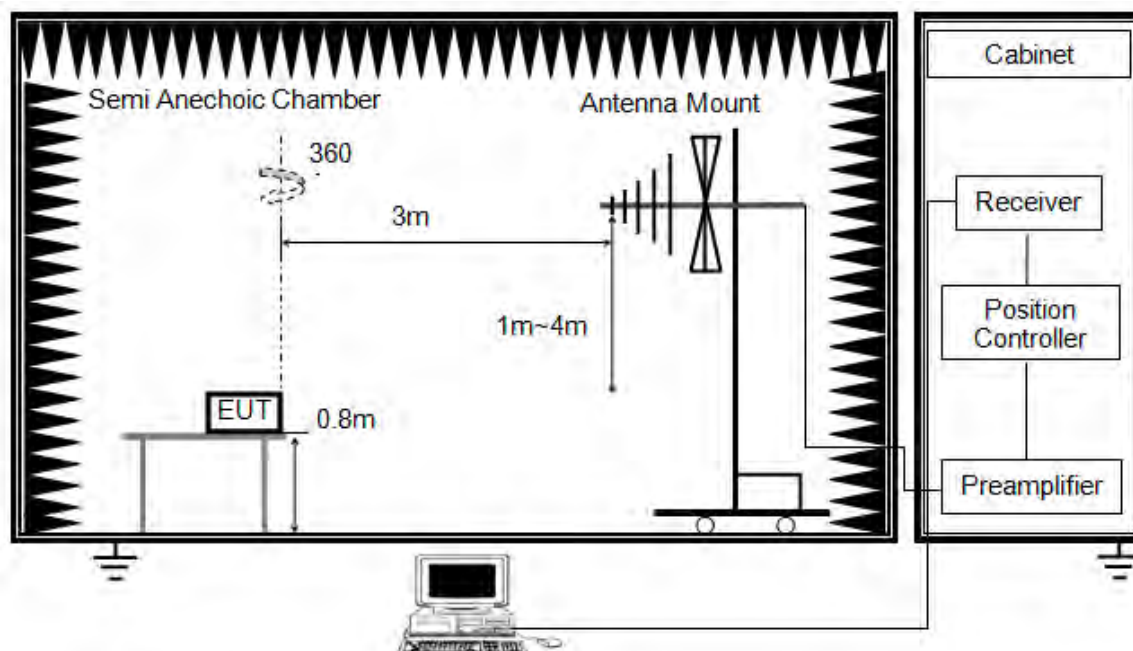


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

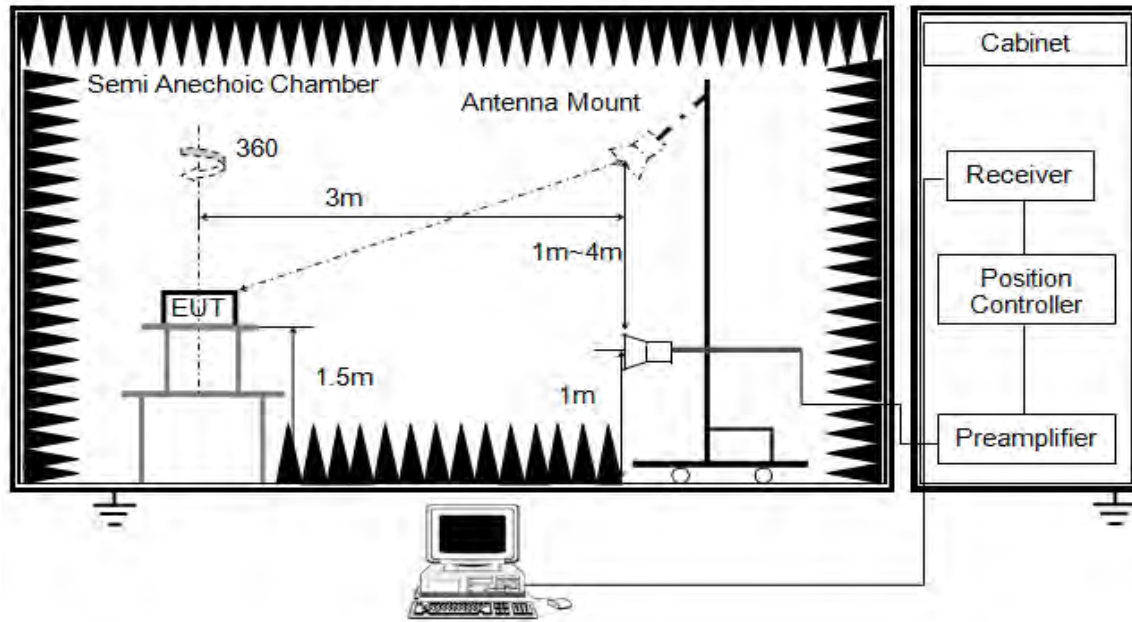


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1-4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

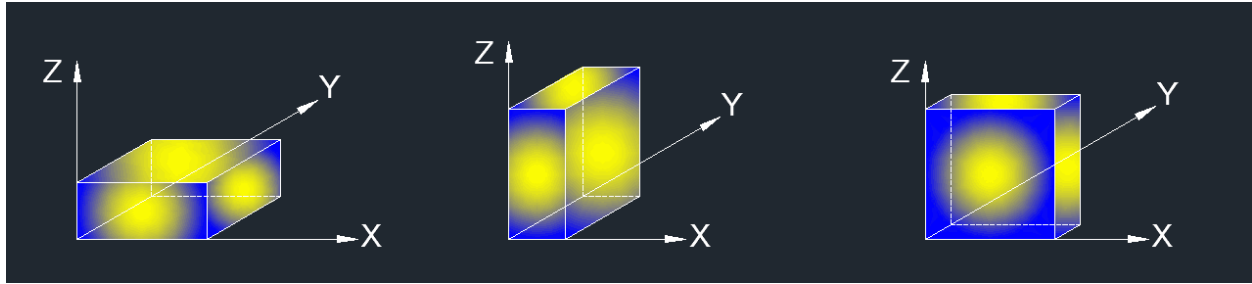

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

Temperature	24.4 °C	Relative Humidity	49.2 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Test worst case results of Spot Check					
Test Mode	Test Item	Frequency (MHz)	Result[dBuV/m]	original report Result[dBuV/m]	Deviation(dB)
11a	Band Edge	5150	69.75	70.38	-0.63
11n20	RSE	11807	51.31	52.12	-0.81

Note: Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical limits.




8.1. RESTRICTED BANDEDGE

8.1.1. 802.11a SISO MODE

UNII-1 BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

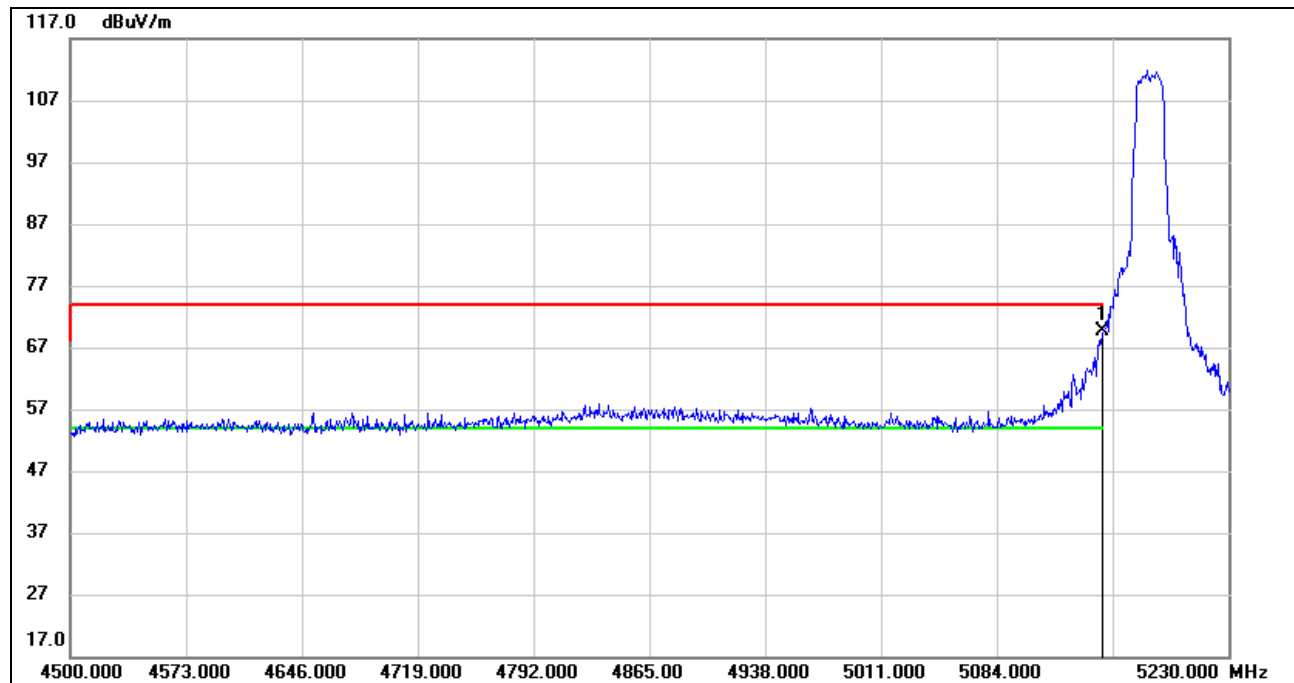

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	28.56	41.19	69.75	74.00	-4.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
5. All the polarities (vertical and horizontal) had been tested, only the worst data was recorded in the report.

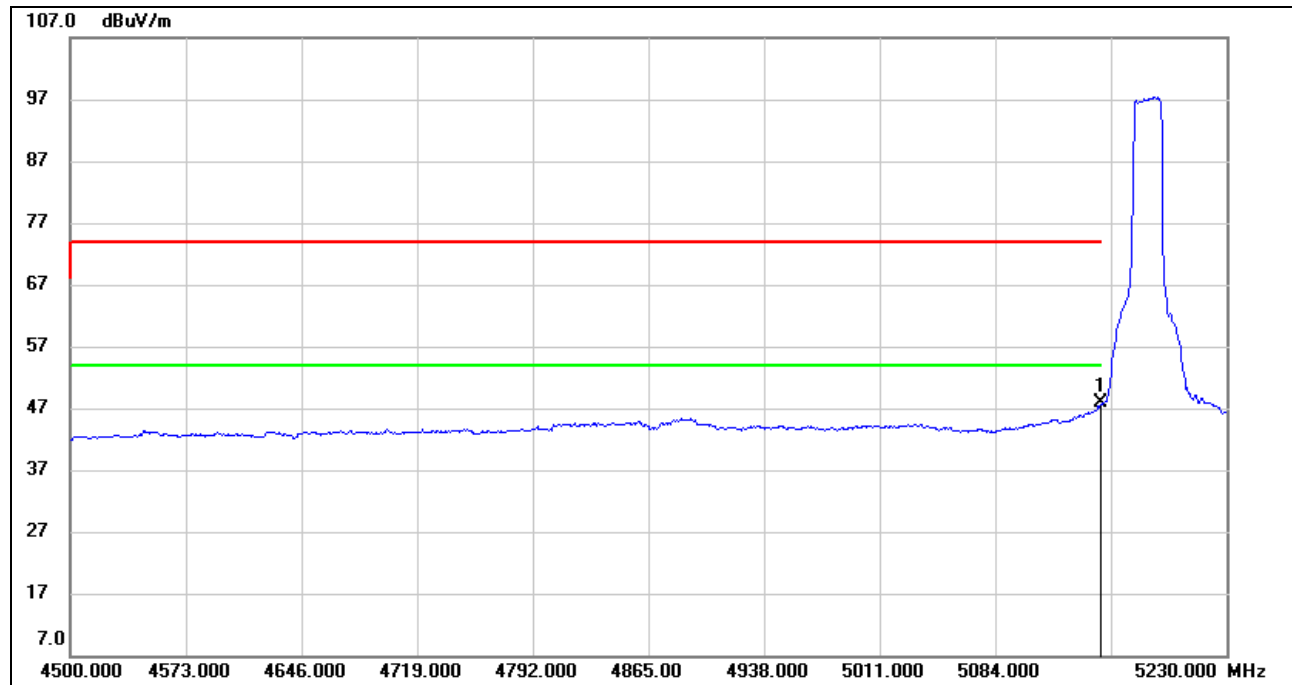**AVG**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.70	41.19	47.89	54.00	-6.11	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
4. For the transmitting duration, please refer to clause 7.1.
5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 7 GHz)

8.2.1. 802.11n HT20 MIMO MODE

UNII-3 BAND

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

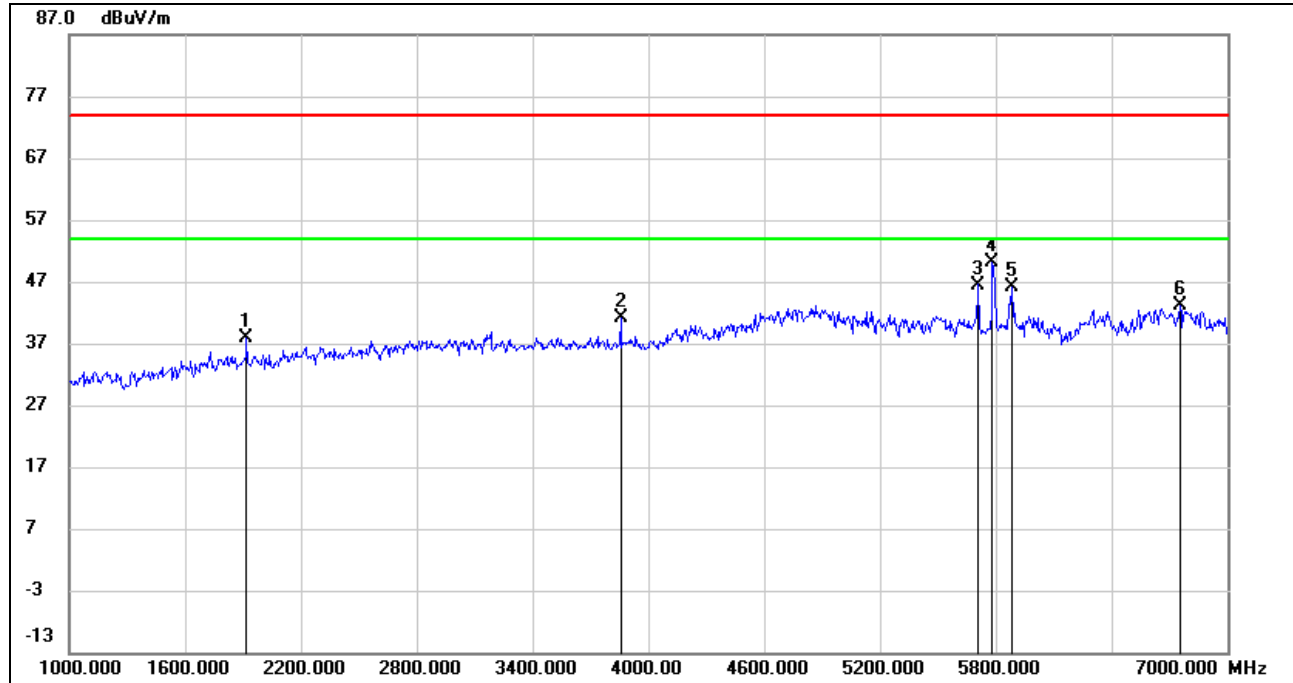

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1918.000	47.92	-10.13	37.79	74.00	-36.21	peak
2	3856.000	44.59	-3.36	41.23	74.00	-32.77	peak
3	5710.000	44.02	2.48	46.50	74.00	-27.50	peak
4	5782.000	47.56	2.50	50.06	74.00	-23.94	peak
5	5884.000	43.18	2.84	46.02	74.00	-27.98	peak
6	6754.000	37.65	5.56	43.21	74.00	-30.79	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.


5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

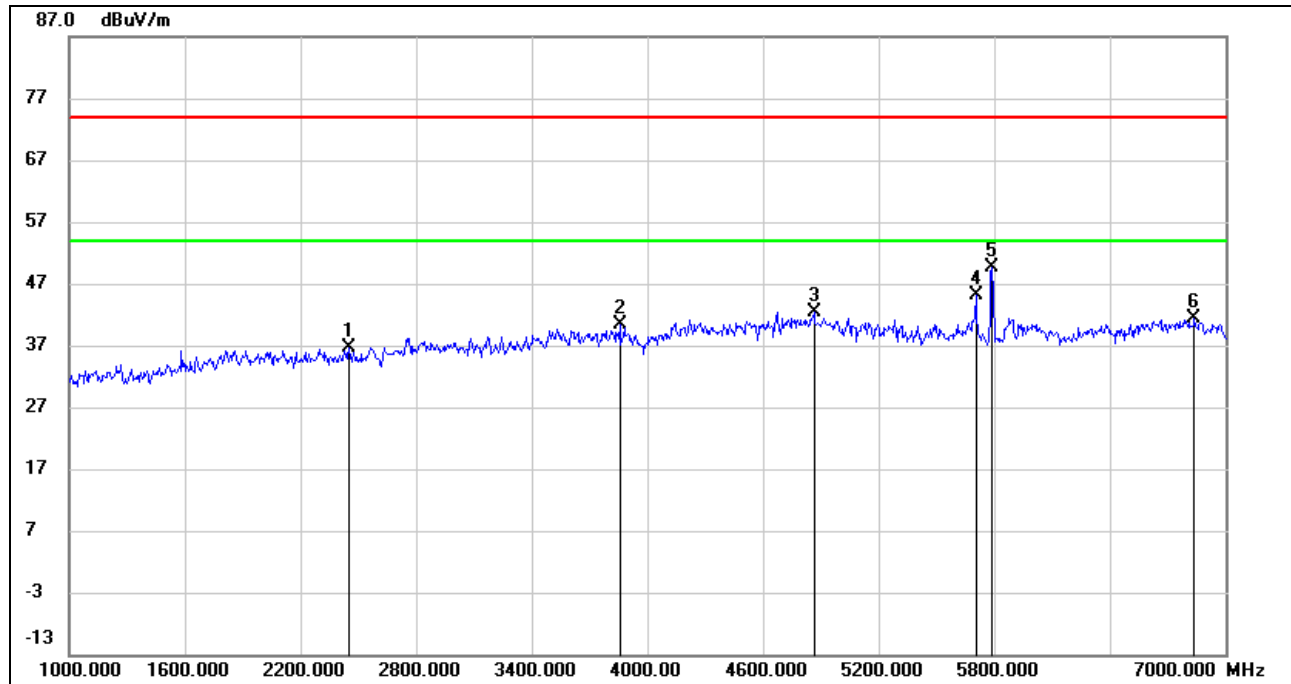

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2452.000	44.96	-8.31	36.65	74.00	-37.35	peak
2	3856.000	43.68	-3.36	40.32	74.00	-33.68	peak
3	4864.000	41.76	0.69	42.45	74.00	-31.55	peak
4	5704.000	42.72	2.48	45.20	74.00	-28.80	peak
5	5788.000	47.06	2.50	49.56	74.00	-24.44	peak
6	6838.000	35.64	5.69	41.33	74.00	-32.67	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.3. SPURIOUS EMISSIONS (7 GHz ~ 18 GHz)

8.3.1. 802.11n HT20 MIMO MODE

UNII-3 BAND


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

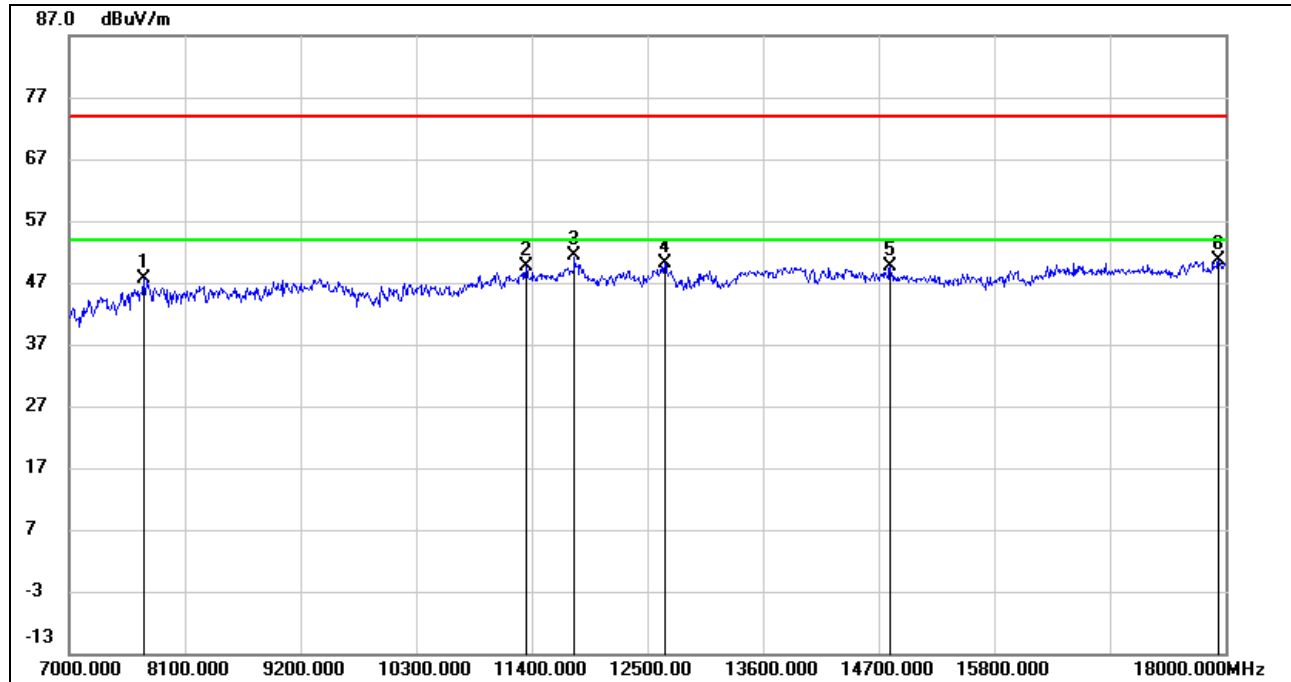

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	39.65	7.87	47.52	74.00	-26.48	peak
2	11345.000	35.47	14.06	49.53	74.00	-24.47	peak
3	11807.000	35.70	15.61	51.31	74.00	-22.69	peak
4	12665.000	34.79	15.41	50.20	74.00	-23.80	peak
5	14810.000	32.72	16.80	49.52	74.00	-24.48	peak
6	17934.000	27.85	22.69	50.54	74.00	-23.46	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

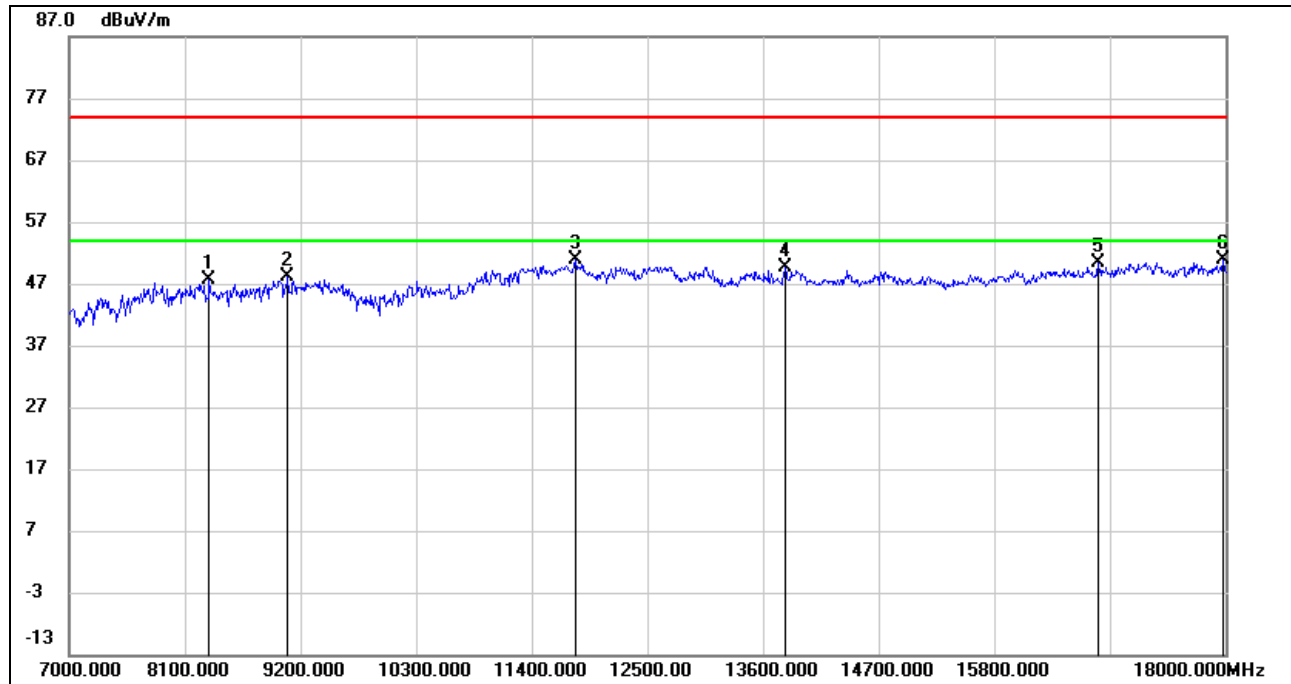


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8331.000	38.85	8.85	47.70	74.00	-26.30	peak
2	9079.000	38.02	10.10	48.12	74.00	-25.88	peak
3	11818.000	35.31	15.58	50.89	74.00	-23.11	peak
4	13809.000	32.59	16.95	49.54	74.00	-24.46	peak
5	16790.000	30.53	19.73	50.26	74.00	-23.74	peak
6	17978.000	28.10	22.68	50.78	74.00	-23.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.4.1. 802.11n HT20 MIMO MODE


SPURIOUS EMISSIONS (UNII-3 BAND MIDDLE CHANNEL, HORIZONTAL, WORST-CASE CONFIGURATION)

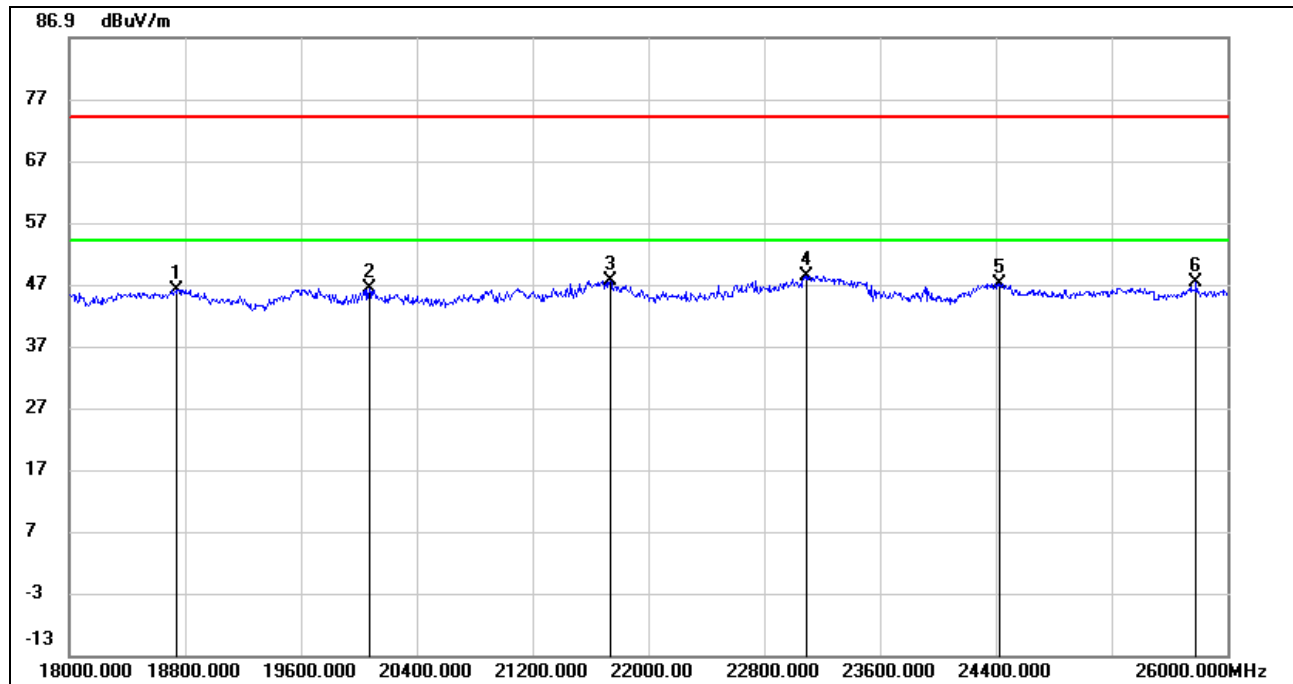

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18744.000	50.90	-4.82	46.08	74.00	-27.92	peak
2	20072.000	50.84	-4.51	46.33	74.00	-27.67	peak
3	21736.000	53.32	-5.76	47.56	74.00	-26.44	peak
4	23096.000	53.80	-5.47	48.33	74.00	-25.67	peak
5	24424.000	50.04	-2.90	47.14	74.00	-26.86	peak
6	25784.000	48.73	-1.49	47.24	74.00	-26.76	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

SPURIOUS EMISSIONS (MIDDLE CHANNEL, VERTICAL, WORST-CASE CONFIGURATION)

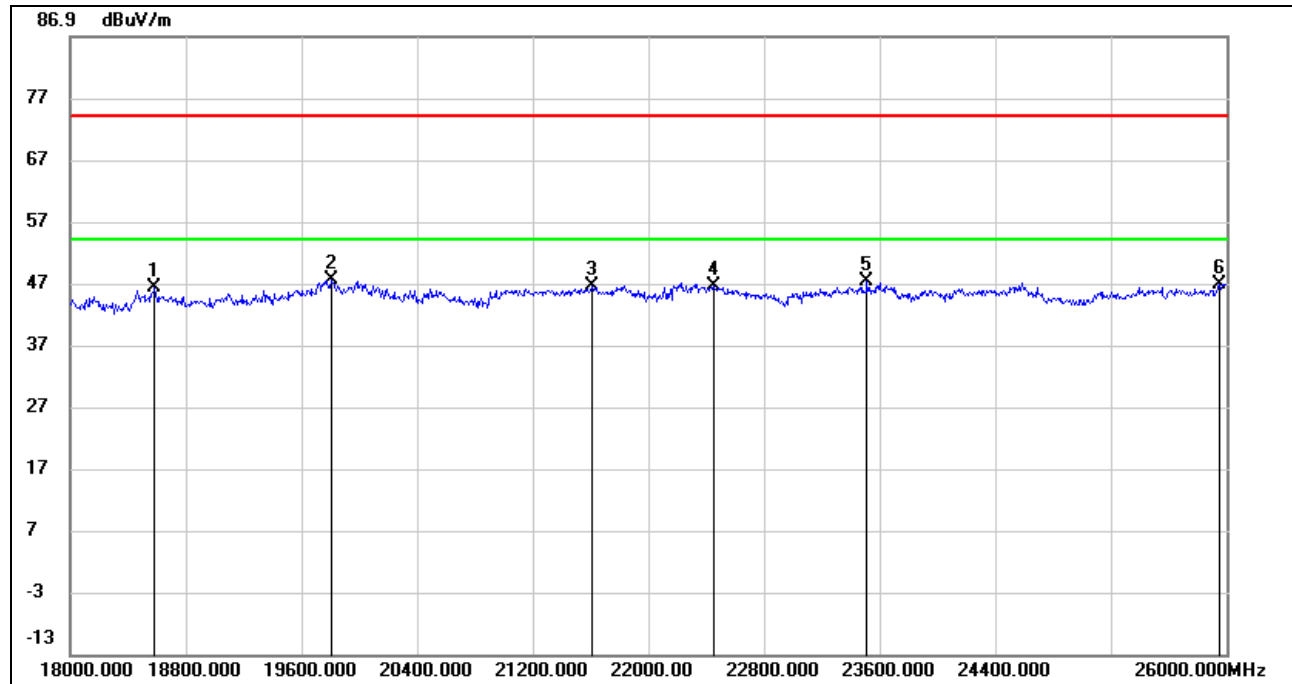

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18584.000	50.69	-4.53	46.16	74.00	-27.84	peak
2	19808.000	51.83	-4.34	47.49	74.00	-26.51	peak
3	21608.000	52.23	-5.76	46.47	74.00	-27.53	peak
4	22448.000	52.27	-5.86	46.41	74.00	-27.59	peak
5	23512.000	52.01	-4.76	47.25	74.00	-26.75	peak
6	25952.000	49.10	-2.25	46.85	74.00	-27.15	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


Note: All the channels and modes antennas had been tested, but only the worst data was recorded in the report.



8.5. SPURIOUS EMISSIONS (26 GHz ~ 40 GHz)

8.5.1. 802.11n HT40 MIMO MODE

SPURIOUS EMISSIONS (UNII-3 BAND MIDDLE CHANNEL, HORIZONTAL, WORST-CASE CONFIGURATION)

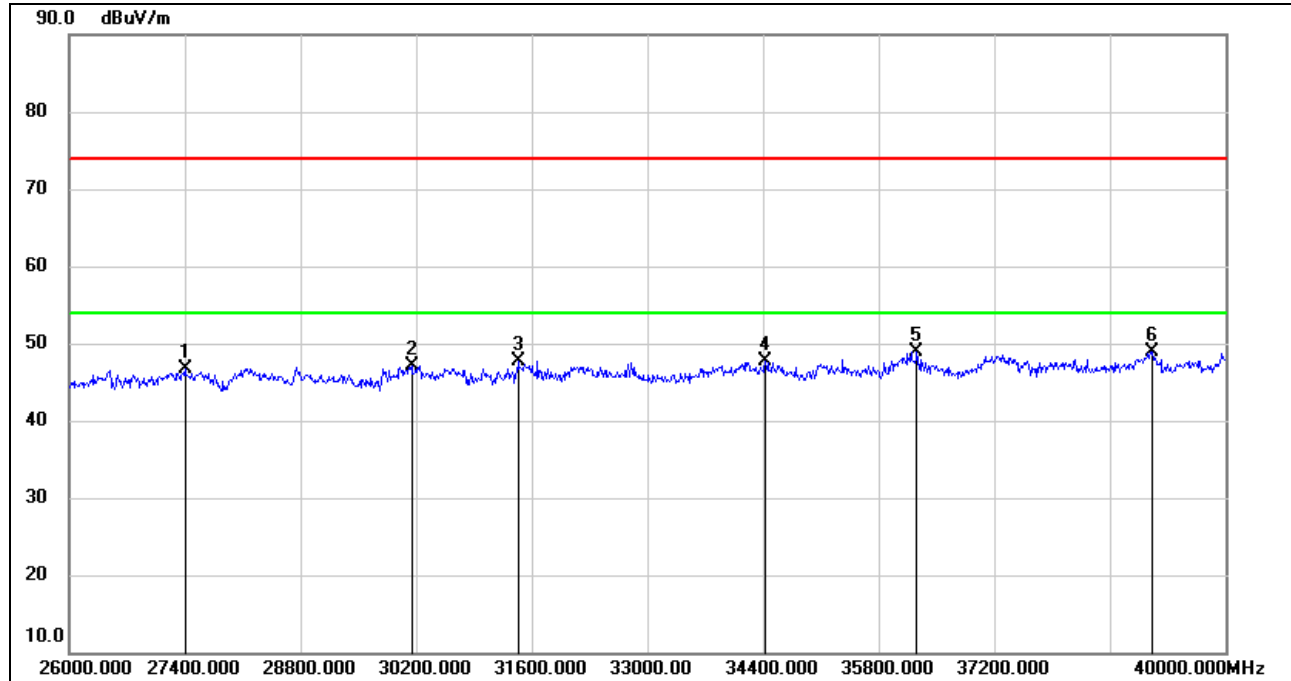


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	27400.000	50.42	-3.79	46.63	74.00	-27.37	peak
2	30144.000	48.46	-1.30	47.16	74.00	-26.84	peak
3	31432.000	48.75	-1.10	47.65	74.00	-26.35	peak
4	34428.000	46.70	0.99	47.69	74.00	-26.31	peak
5	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
6	39118.000	44.69	4.24	48.93	74.00	-25.07	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.



**SPURIOUS EMISSIONS (MIDDLE CHANNEL, VERTICAL, WORST-CASE
CONFIGURATION)**

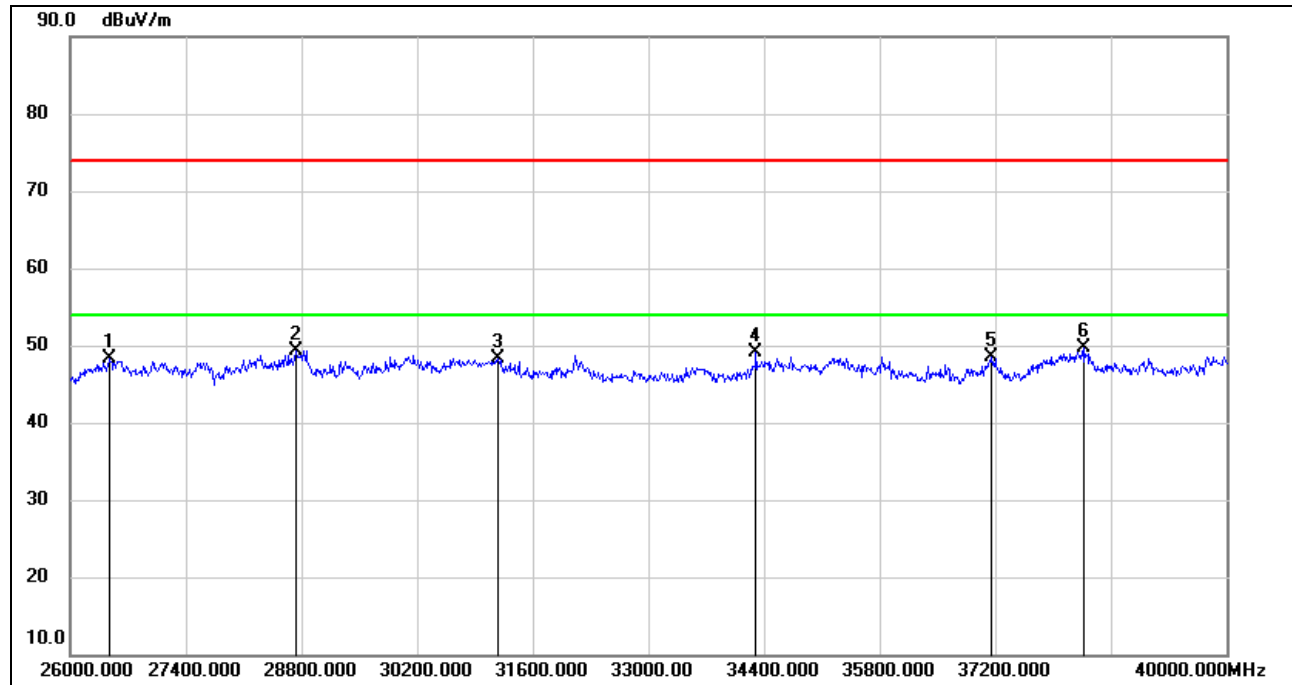

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	53.03	-4.78	48.25	74.00	-25.75	peak
2	28730.000	50.01	-0.69	49.32	74.00	-24.68	peak
3	31180.000	49.09	-0.79	48.30	74.00	-25.70	peak
4	34302.000	47.95	1.10	49.05	74.00	-24.95	peak
5	37158.000	45.34	3.17	48.51	74.00	-25.49	peak
6	38278.000	45.82	3.82	49.64	74.00	-24.36	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: All the channels and modes antennas had been tested, but only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.6.1. 802.11n HT20 MIMO MODE


SPURIOUS EMISSIONS (UNII-3 BAND MIDDLE CHANNEL, HORIZONTAL, WORST-CASE CONFIGURATION)

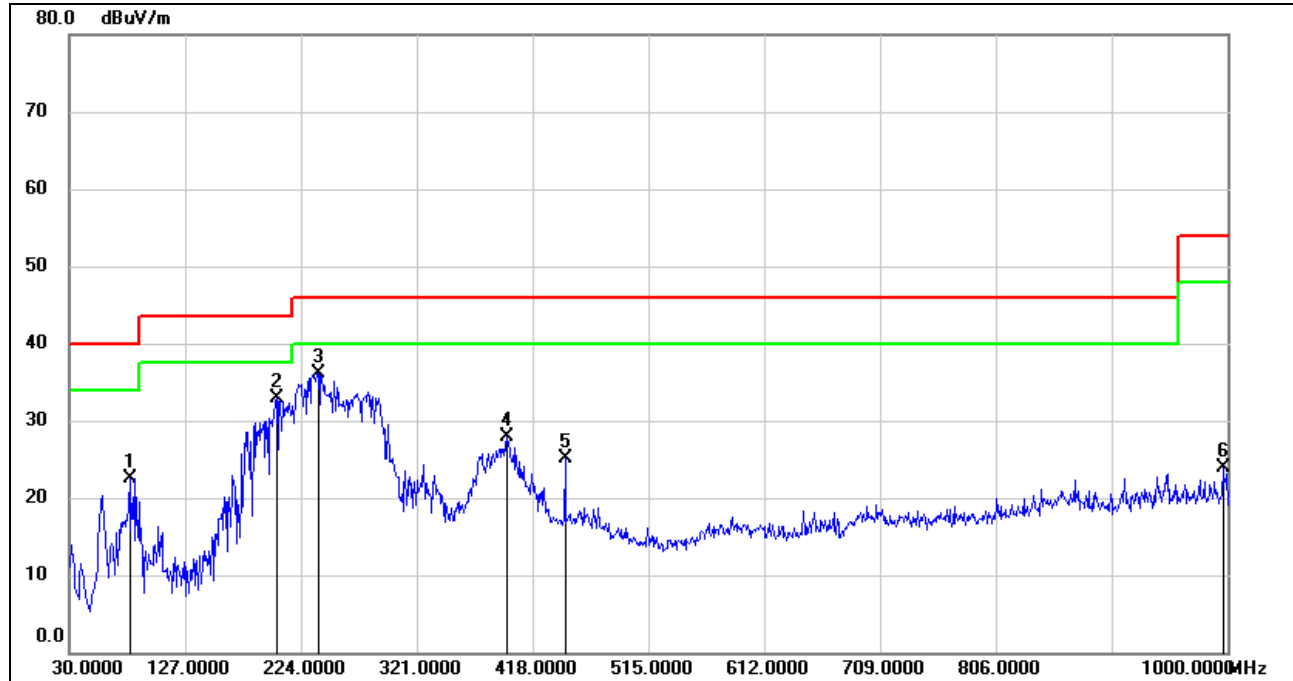

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	80.4400	43.97	-21.38	22.59	40.00	-17.41	QP
2	203.6300	49.64	-16.70	32.94	43.50	-10.56	QP
3	238.5500	55.29	-19.10	36.19	46.00	-9.81	QP
4	396.6600	41.29	-13.41	27.88	46.00	-18.12	QP
5	445.1600	37.60	-12.53	25.07	46.00	-20.93	QP
6	996.1200	28.02	-4.20	23.82	54.00	-30.18	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (UNII-3 BAND MIDDLE CHANNEL, VERTICAL, WORST-CASE CONFIGURATION)

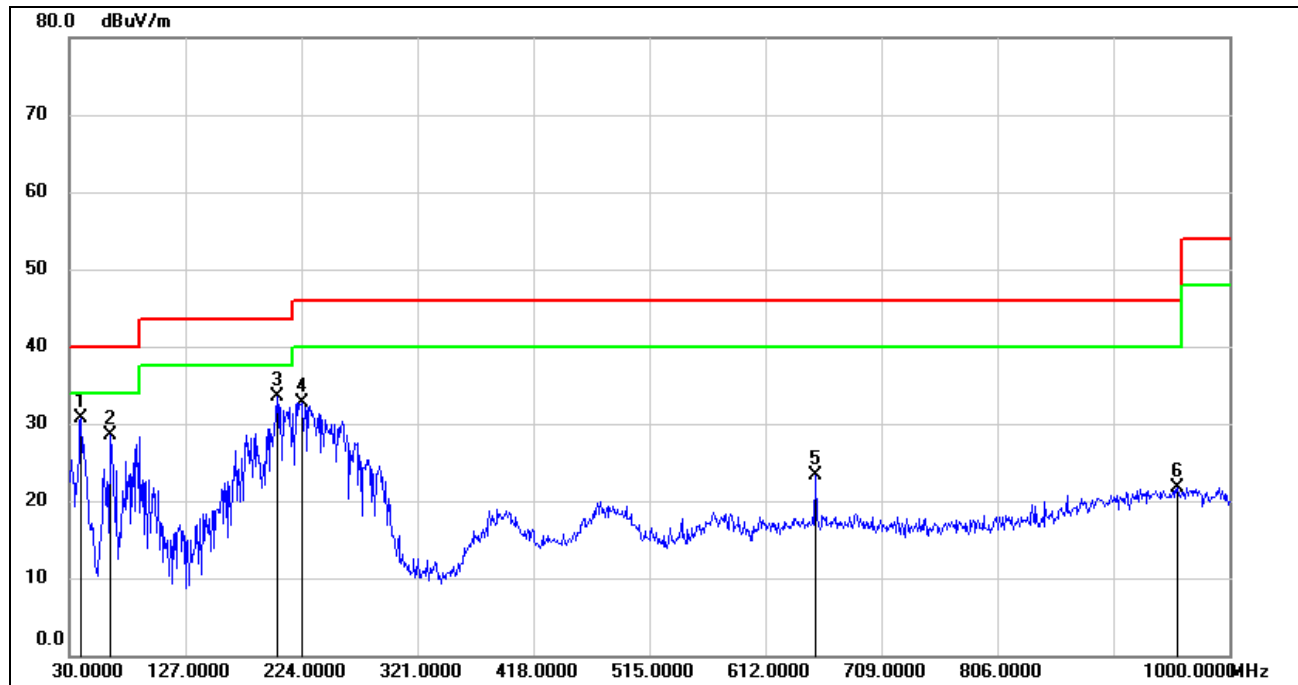

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	50.59	-19.96	30.63	40.00	-9.37	QP
2	63.9500	48.98	-20.53	28.45	40.00	-11.55	QP
3	203.6300	50.13	-16.70	33.43	43.50	-10.07	QP
4	224.9700	51.20	-18.42	32.78	46.00	-13.22	QP
5	653.7100	32.16	-8.92	23.24	46.00	-22.76	QP
6	956.3500	26.29	-4.49	21.80	46.00	-24.20	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the channels and modes antennas had been tested, but only the worst data was recorded in the report.

8.7. SPURIOUS EMISSIONS BELOW 30 MHz

8.7.1. 802.11n HT20 MIMO MODE

SPURIOUS EMISSIONS (UNII-3 BAND MIDDLE CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

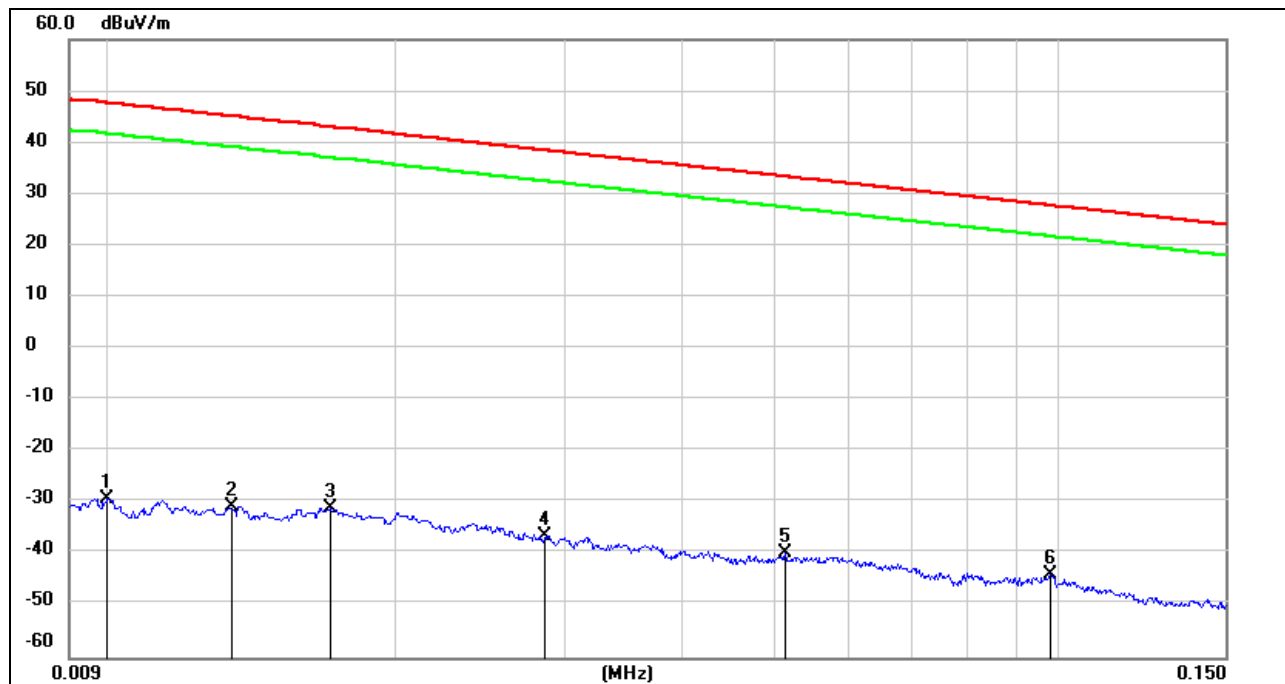


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	72.22	-101.40	-29.18	47.60	-76.78	peak
2	0.0134	70.73	-101.39	-30.66	45.06	-75.72	peak
3	0.0170	70.29	-101.36	-31.07	42.99	-74.06	peak
4	0.0286	64.96	-101.38	-36.42	38.47	-74.89	peak
5	0.0514	61.68	-101.48	-39.80	33.38	-73.18	peak
6	0.0981	57.77	-101.78	-44.01	27.77	-71.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

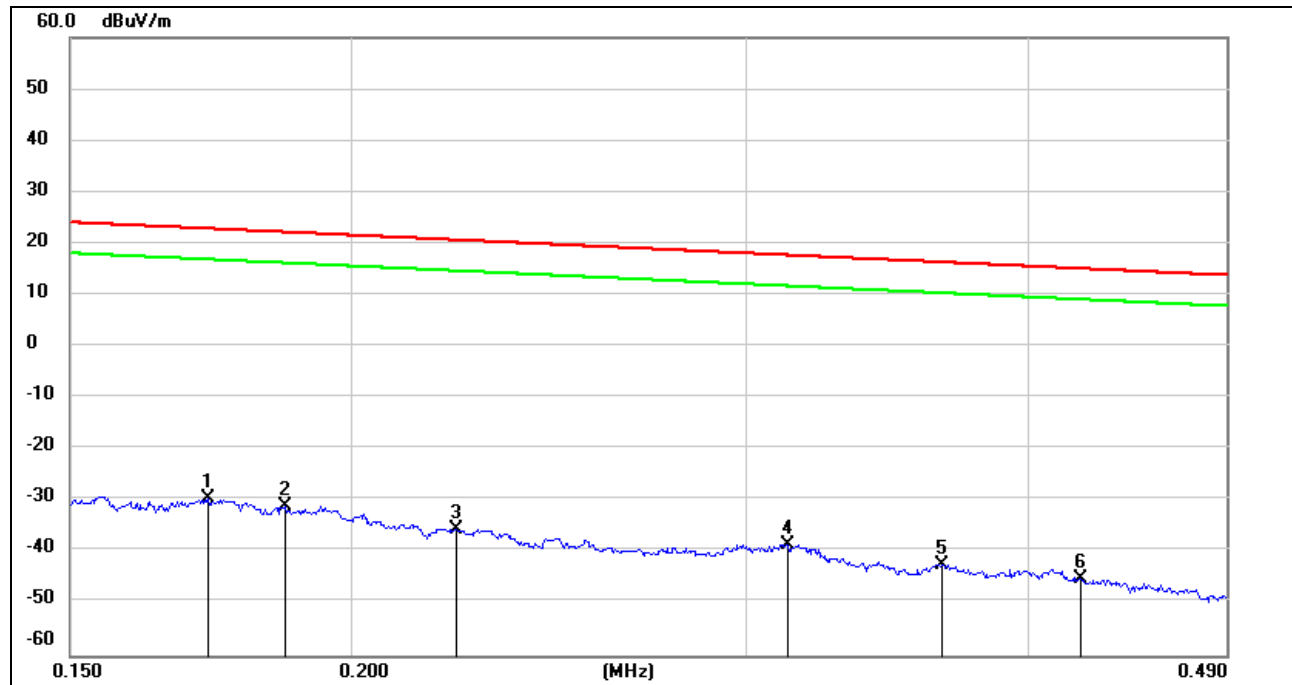**150 kHz ~ 490 kHz**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1728	72.00	-101.67	-29.67	22.86	-52.53	peak
2	0.1869	70.54	-101.70	-31.16	22.17	-53.33	peak
3	0.2227	66.15	-101.75	-35.60	20.65	-56.25	peak
4	0.3129	63.44	-101.87	-38.43	17.69	-56.12	peak
5	0.3662	59.58	-101.93	-42.35	16.33	-58.68	peak
6	0.4223	56.90	-101.98	-45.08	15.09	-60.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

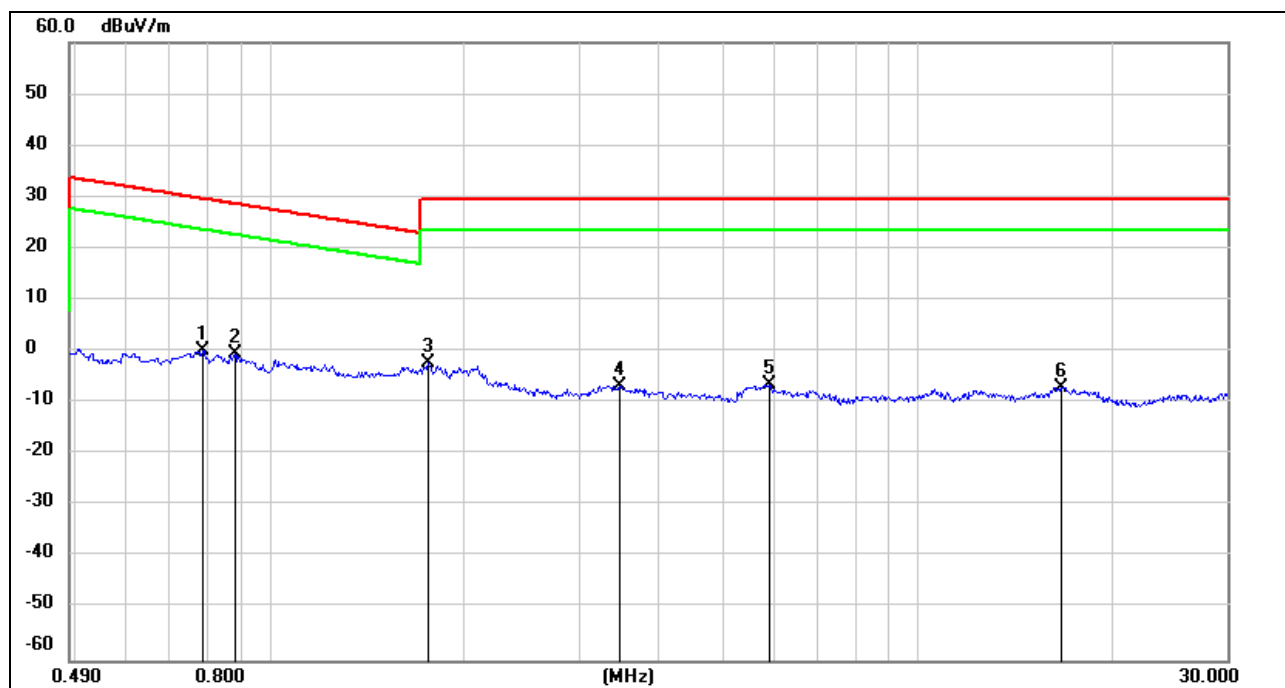

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.7861	62.33	-62.14	0.19	29.69	-29.50	peak
2	0.8820	61.68	-62.19	-0.51	28.69	-29.20	peak
3	1.7580	59.58	-61.93	-2.35	29.54	-31.89	peak
4	3.4704	54.85	-61.46	-6.61	29.54	-36.15	peak
5	5.9198	54.93	-61.36	-6.43	29.54	-35.97	peak
6	16.6021	54.02	-60.96	-6.94	29.54	-36.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the channels and modes antennas had been tested, but only the worst data was recorded in the report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT