



**FCC 47 CFR PART 02
FCC 47 CFR PART 96**

CERTIFICATION TEST REPORT

For

Tablet

MODEL NUMBER: VT-TABLET-5081G

FCC ID: 2AAGE5081GB4898

REPORT NUMBER: 4790198193.1-7

ISSUE DATE: December 19, 2021

Prepared for

**Chengdu Vantron Technology Co., Ltd.
No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road,
Song Shan Lake Hi-Tech Development Zone, Dongguan, People's Republic of China
Tel: +86 769-22038881
Fax: +86 769 33244054
Website: www.ul.com**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12/19/2021	Initial Issue	



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATIO	5
4. CALIBRATION AND UNCERTAINTY	6
4.1 MEASURING INSTRUMENT CALIBRATION	6
4.2 MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1 DESCRIPTION OF EUT	7
5.2 TECHNICAL INFORMATION	7
5.3 MAXIMUM OUTPUT POWER	8
5.4 WORST-CASE CONFIGURATION AND MODE.....	9
5.5 TEST ENVIRONMENT	10
5.6 TEST CHANNEL LIST.....	11
5.7 DESCRIPTION OF AVAILABLE ANTENNAS.....	12
5.8 DESCRIPTION OF TEST SETUP	12
5.9 MEASURING INSTRUMENT AND SOFTWARE USED	14
6. TEST RESULTS.....	16
6.1 OUTPUT POWER VERIFICATION.....	16
6.2 PEAK TO AVERAGE RADIO	19
6.3 OCCUPIED BANDWIDTH	23
6.4 FREQUENCY STABILITY.....	27
6.5 BAND EDGE AND EMISSION MASK	28
6.6 CONDUCTED OUT OF BAND EMISSIONS	35
6.7 FIELD STRENGTH OF SPURIOUS RADIATION.....	40



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Chengdu Vantron Technology Co., Ltd.
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China

Manufacturer Information

Company Name: Chengdu Vantron Technology Co., Ltd.
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China

EUT Information

EUT Name: Tablet
Model: VT-TABLET-5081G
Brand: VANTRON
Sample Received Date: November 23, 2021
Sample Status: Normal
Sample ID: 4432310
Date of Tested: November 23 ~ December 19, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 2	PASS
FCC 47 CFR PART 96	PASS

Prepared By:

Kebo Zhang
Project Engineer
Approved By:

Stephen Guo
Laboratory Manager

Checked By:

Shawn Wen
Laboratory Leader



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26-2015 & KDB971168, FCC CFR 47 Part 2, Part 27, Part90.

3. FACILITIES AND ACCREDITATIO

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. <u>Facility Name:</u> Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

4. CALIBRATION AND UNCERTAINTY

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Uncertainty for Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	4.10dB(1-6GHz)
	4.40dB (6GHz-18Gz)
	3.54dB (18GHz-26Gz)
Bandwidth	1.1%
Stop Transmitting Time Test	0.6%
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1 DESCRIPTION OF EUT

Equipment	Tablet		
Model Name	VT-TABLET-5081G		
Power Input	DC 5 V		
Power Supply	Power Adapter	Input	/
		Output	/
	Li-ion Battery	3.8 V, 8000 mAh, 30.4Wh	

5.2 TECHNICAL INFORMATION

E-UTRA Band	Characteristics		
	E-UTRA operating bands		Bandwidth
	48	3550 MHz to 3700 MHz	



5.3 MAXIMUM OUTPUT POWER

The transmitter has a maximum radiated ERP / EIRP output powers as follows:

LTE Band48

Part 96						
EIRP Limit(W)/ 10MHz		0.20				
Antenna Gain (dBi)		-0.3				
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)
5	QPSK	3552.5	3697.5	19.43	19.13	0.082
	16QAM			18.96	18.66	0.073
10	QPSK	3555.0	3695.0	19.80	19.50	0.089
	16QAM			19.50	19.20	0.083
15	QPSK	3557.5	3692.5	20.00	19.70	0.093
	16QAM			19.48	19.18	0.083
20	QPSK	3560	3690	20.21	19.91	0.098
	16QAM			19.50	19.20	0.083

5.4 WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:
, Band 48.

During all testing, EUT is in link mode with base station emulator at maximum power level. The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM. All testing was performed using QPSK and 16QAM modulations to represent the worst case.

The radiated spurious emissions measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that X orientation was the worst-case orientation connected with charger and earphone.

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz. the emissions between 30MHz-1GHz were tested the highest transmitting power channel and the worse configuration.

Worst Case

Test Items	Test configuration			
Description	Modulation	Channel	Bandwidth (MHz)	RB Configuration
Max Output Power	QPSK, 16QAM	L, M, H	5,10,15,20	1.RB size=1, RB Location= Low,Middle,High 1.RB size=Half, RB Location= Low,Middle,High 2.RB Size=Full
Peak to Average Ratio	QPSK, 16QAM	L, M, H	5,10,15,20	Full RB
Frequency Stability	QPSK	M	The Maximum BW	Full RB
Occupied Bandwidth	QPSK, 16QAM	L, M, H	5,10,15,20	Full RB
Band Edge Compliance(Adjacent Channel Power)	QPSK, 16QAM	L, M, H	The Maximum BW	RB size=1, RB Location= Low
Spurious Emission at Antenna Terminal	QPSK,	L, M, H	5,10,15,20	1.RB size=1, RB Location= Low,High 2.RB Size=Full
Radiated Spurious Emissions	QPSK	L, M, H	The Maximum BW	RB size=1, RB Location= Low



5.5 TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	52%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	25.0 °C
Voltage:	VL	4.25 V
	VN	5.0 V
	VH	5.75 V
	End Voltage	3.00V

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature



5.6 TEST CHANNEL LIST

Mode	TX/RX	Low	Middle	High
LTE Band 48	TX (5 MHz)	55265	55990	56715
		3552.5	3625	3697.5
	TX (10 MHz)	55290	55990	56690
		3555.0	3625	3695.0
	TX (15 MHz)	55315	55990	56665
		3557.5	3625	3692.5
	TX (20 MHz)	55340	55990	56640
		3560.0	3625	3690.0



5.7 DESCRIPTION OF AVAILABLE ANTENNAS

Band	Antenna No.	Antenna Type	Antenna Gain (dBi)
LTE Band 48	1	PIFA	1.0
LTE Band 48	2	PIFA	-0.3
LTE Band 48	3	PIFA	0
LTE Band 48	4	PIFA	1.4

Note: Only antenna 2 can be used as transmitting/receiving antenna. Other antennas only can be used as receiving antenna.

5.8 DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	FCC ID
1	N/A	N/A	N/A	N/A


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	Travel Changer	/	RD0501000-USBA18MG	5V/1A

CONDUCTED TEST SETUP

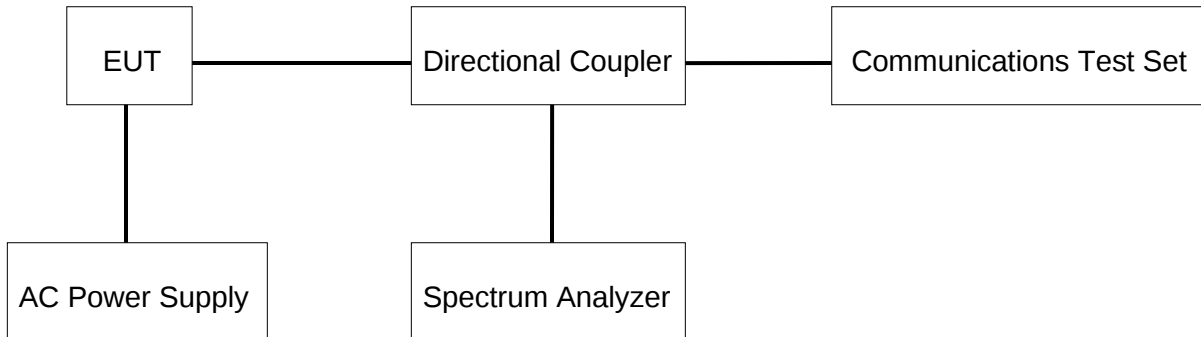

RADIATED TEST SETUP

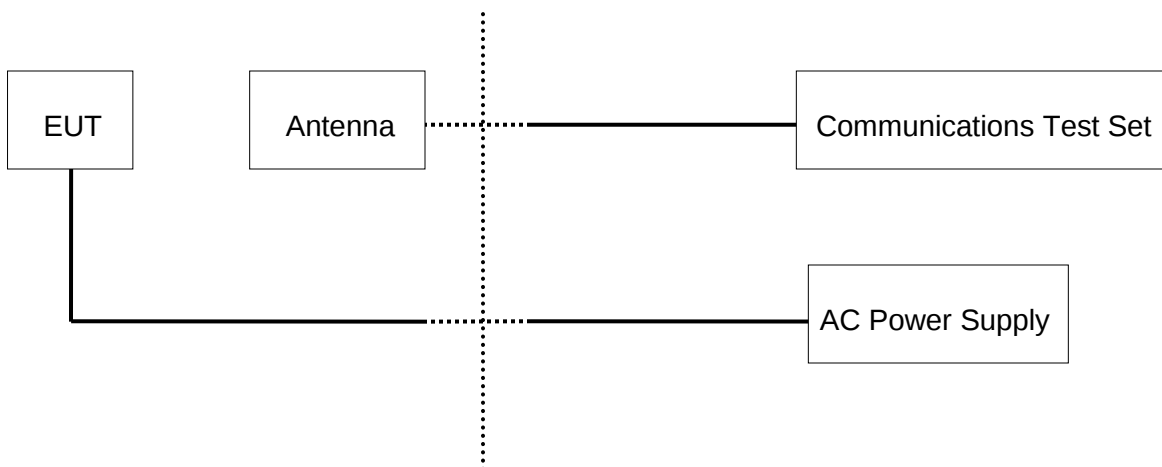

**5.9 MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1
Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Jan.17, 2019	Jan.17,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-	2	Oct.31, 2021	Oct.30, 2022



		60SS			
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.31, 2021	Oct.30, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.30, 2021	Oct.29, 2022
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.30, 2021	Oct.29, 2022
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.30, 2021	Oct.29, 2022
DC power supply	Keysight	E3642A	MY55159130	Oct.30, 2021	Oct.29, 2022
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Nov.20,2020	Nov.19,2022
Software					
Description		Manufacturer	Name		Version
Tonsend SRD Test System		Tonsend	JS1120-3 RF Test System		2.6.77.0518
Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022



6. TEST RESULTS

6.1 OUTPUT POWER VERIFICATION

ERP/EIRP RULE PART(S)

FCC: §96.

ERP/EIRP TEST PROCEDURE

ANSI C63.26:2015/ KDB 971168 D01 Section 5.6.

$ERP/ EIRP = P_{Meas} + GT - LC$

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

RESULTS

See the following pages.

**LTE Band 48**

Bandwidth	Mode	RB Allocation	RB offset	Channel		
				55265	55990	56715
				3552.5MHz	3625MHz	3697.5MHz
5MHz	QPSK	1	0	17.74	18.92	19.36
		1	12	17.97	18.83	19.33
		1	24	17.85	18.94	19.43
		12	0	18.12	18.35	18.61
		12	7	17.89	18.23	18.36
		12	13	17.93	18.14	18.40
		25	0	17.91	18.32	18.40
	16QAM	1	0	17.75	18.24	18.76
		1	12	17.88	18.33	18.86
		1	24	17.76	18.57	18.96
		12	0	18.13	18.41	18.47
		12	7	17.90	18.42	18.41
		12	13	17.93	18.35	18.45
		25	0	17.89	18.45	18.41
Bandwidth	Mode	RB Allocation	RB offset	Channel		
				55290	55990	56690
				3555MHz	3625MHz	3695MHz
10MHz	QPSK	1	0	18.10	19.17	19.50
		1	25	18.02	19.12	19.51
		1	49	18.29	19.05	19.80
		25	0	17.98	19.03	19.37
		25	12	17.99	18.95	19.49
		25	25	18.01	18.86	19.47
		50	0	17.92	18.93	19.42
	16QAM	1	0	18.20	19.17	19.47
		1	25	18.13	19.04	19.50
		1	49	18.40	19.03	19.44
		25	0	17.99	18.69	18.71
		25	12	18.01	18.73	18.53
		25	25	18.03	18.47	18.52
		50	0	17.97	18.42	18.46
Bandwidth	Mode	RB Allocation	RB offset	Channel		
				55315	55990	56665
				3557.5MHz	3625MHz	3692.5MHz
15MHz	QPSK	1	0	19.48	19.53	19.83
		1	37	19.19	19.10	19.44
		1	74	19.77	19.25	20.00



		36	0	18.08	19.01	19.42
		36	20	18.06	18.92	19.42
		36	39	18.20	18.93	19.39
		75	0	18.09	19.02	19.42
	16QAM	1	0	18.42	19.11	19.31
		1	37	18.15	19.06	19.43
		1	74	18.72	19.23	19.48
		36	0	18.11	18.85	18.64
		36	20	18.08	18.53	18.44
		36	39	18.22	18.41	18.61
		75	0	18.10	18.31	18.56
		Bandwidth	Mode	RB Allocation	RB offset	Channel
55340	55990					56640
3560MHz	3625MHz					3690MHz
20MHz	QPSK	1	0	19.48	19.58	19.93
		1	49	19.51	19.65	19.93
		1	99	19.57	19.67	20.21
		50	0	18.24	19.21	19.43
		50	24	18.32	19.12	19.38
		50	50	18.51	19.05	19.43
		100	0	18.37	19.33	19.35
	16QAM	1	0	18.57	19.41	19.47
		1	49	18.42	19.14	19.50
		1	99	19.12	19.32	19.50
		50	0	18.28	18.61	18.74
		50	24	18.37	18.63	18.79
		50	50	18.56	18.59	18.74
		100	0	18.38	18.53	18.62



6.2 PEAK TO AVERAGE RADIO

LIMITS

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01.

The transmitter output was connected to a UXM Test Set and configured to operate at maximum power. The PAR was measured on the Spectrum Analyzer.


RESULTS


See the following pages.


LTE Band	Bandwidth (MHz)	Channel	RB Configuration	Modulation	The Maximum Measured (dB)	Limit (dB)	Verdict
48	5	Low	25RB 0#	QPSK	10.59	13	PASS
		High		16QAM	11.39	13	PASS
	10	High	50RB 0#	QPSK	10.63	13	PASS
		High		16QAM	11.49	13	PASS
	15	High	75RB 0#	QPSK	10.77	13	PASS
		High		16QAM	11.43	13	PASS
	20	High	100RB 0#	QPSK	10.21	13	PASS
		High		16QAM	11.27	13	PASS



LTE Band 48

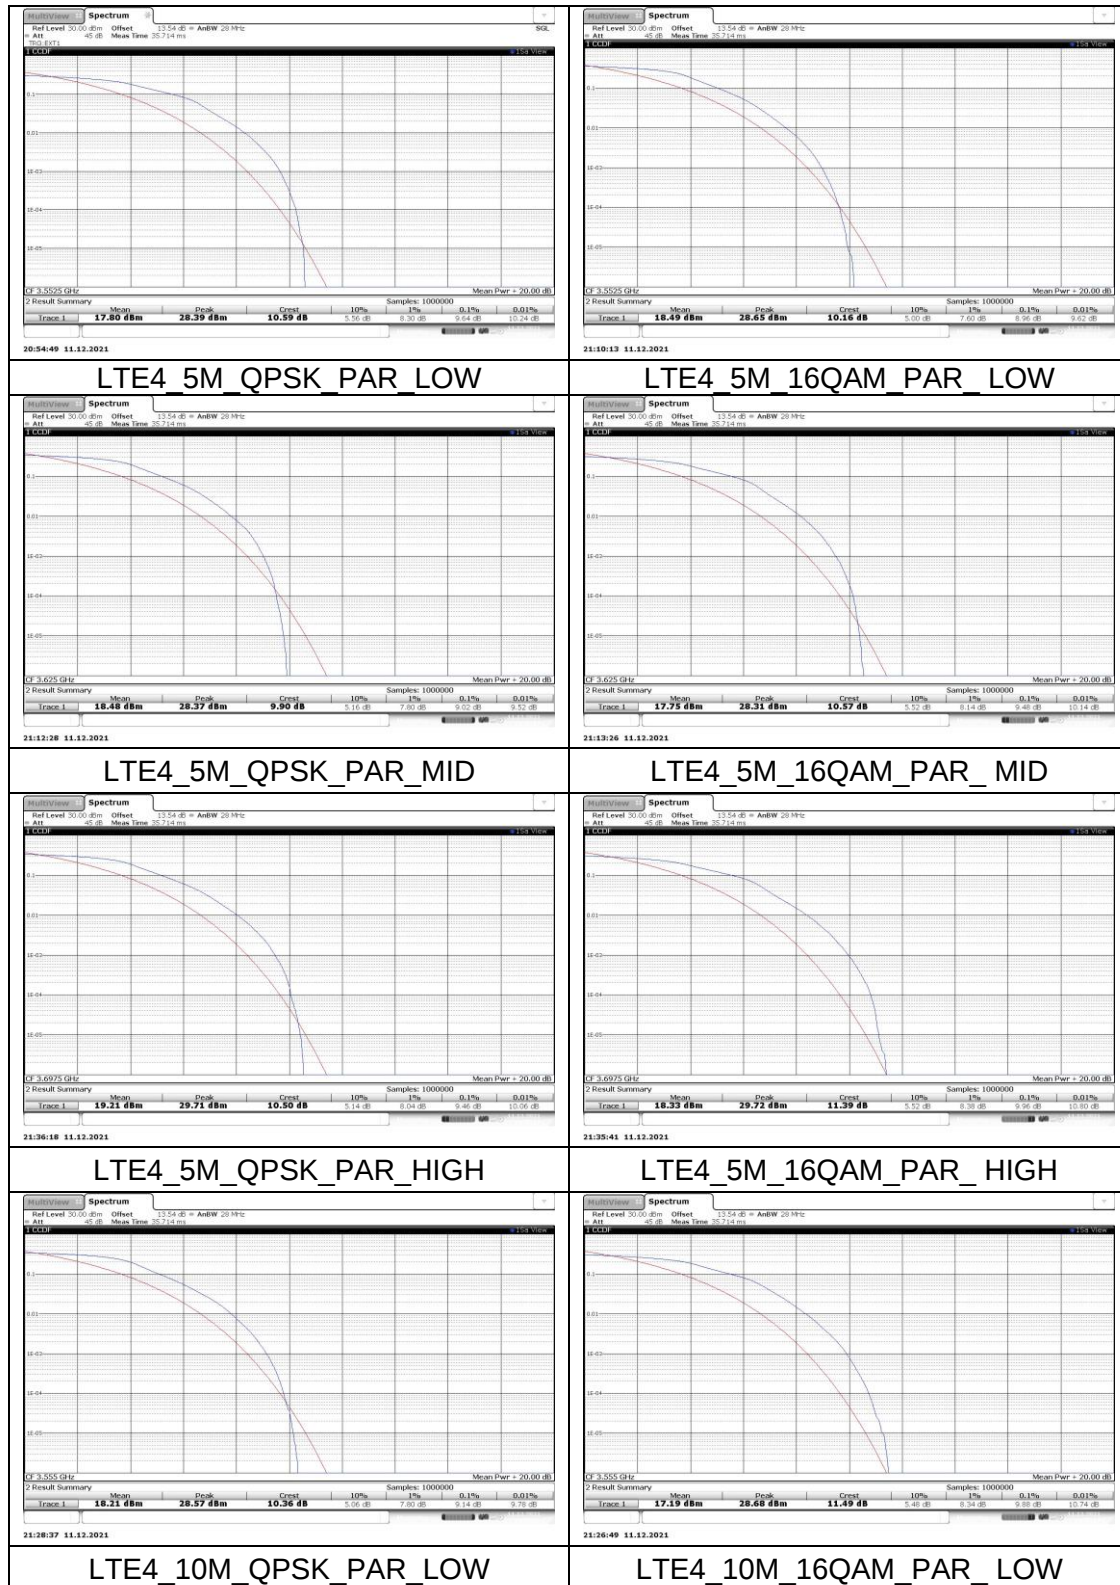

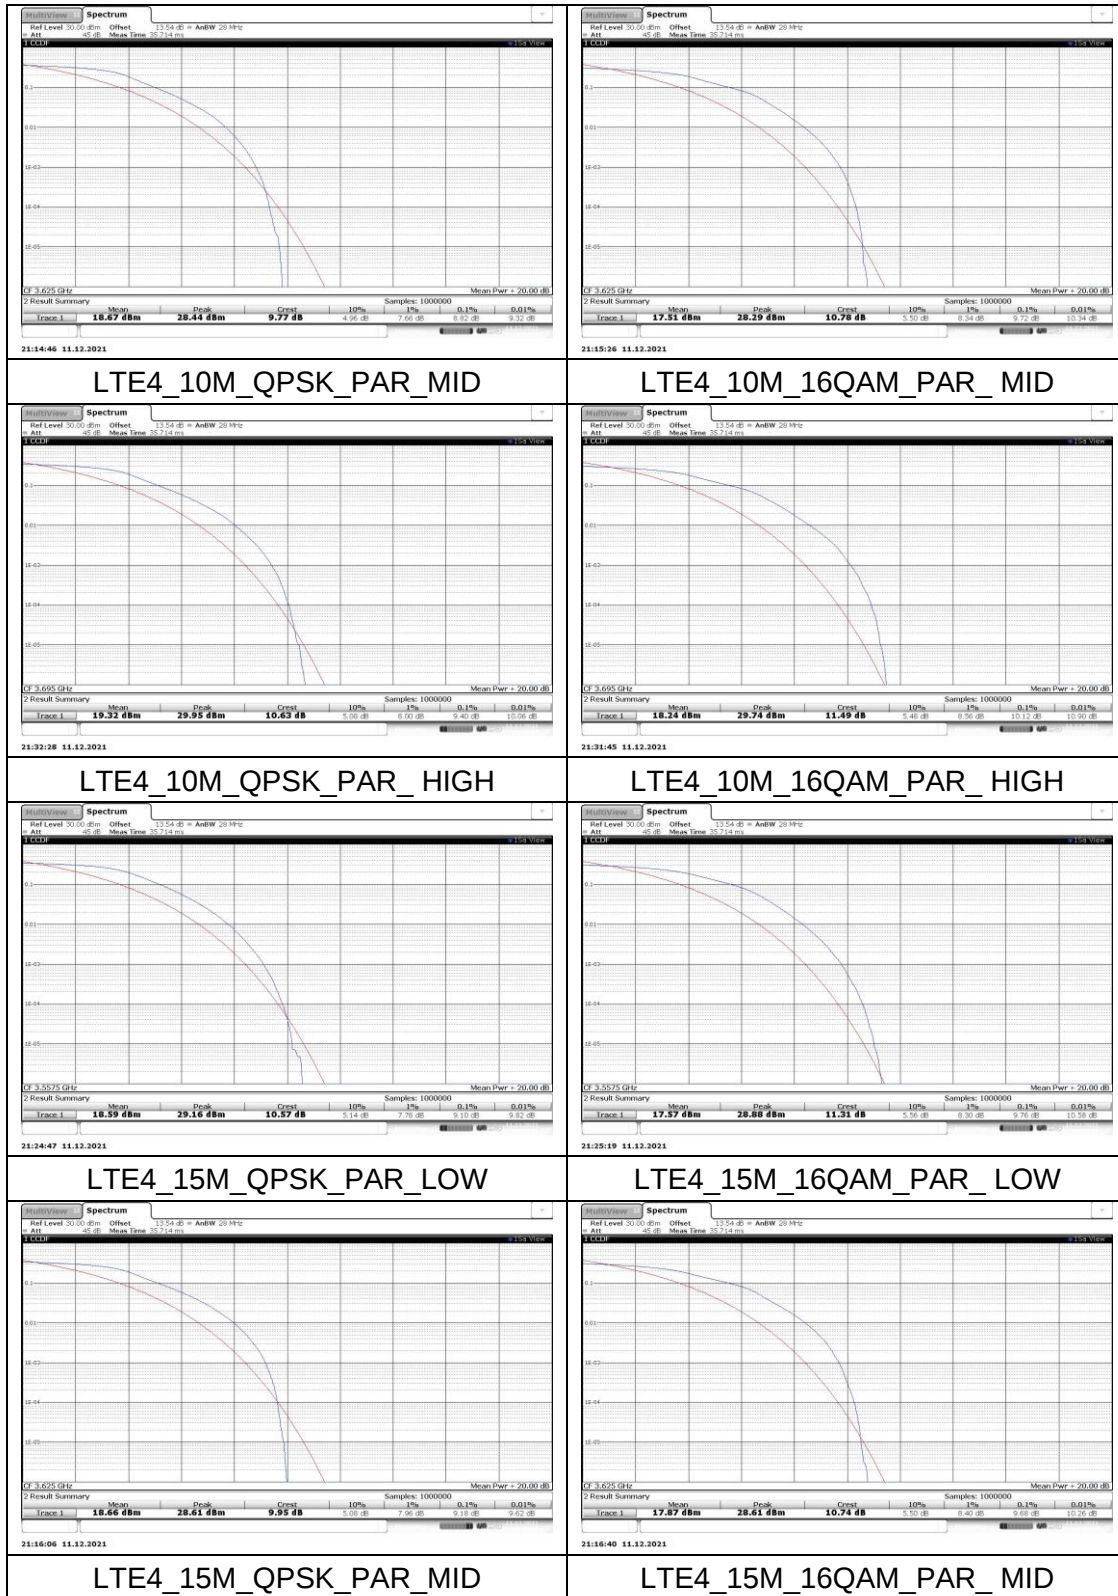

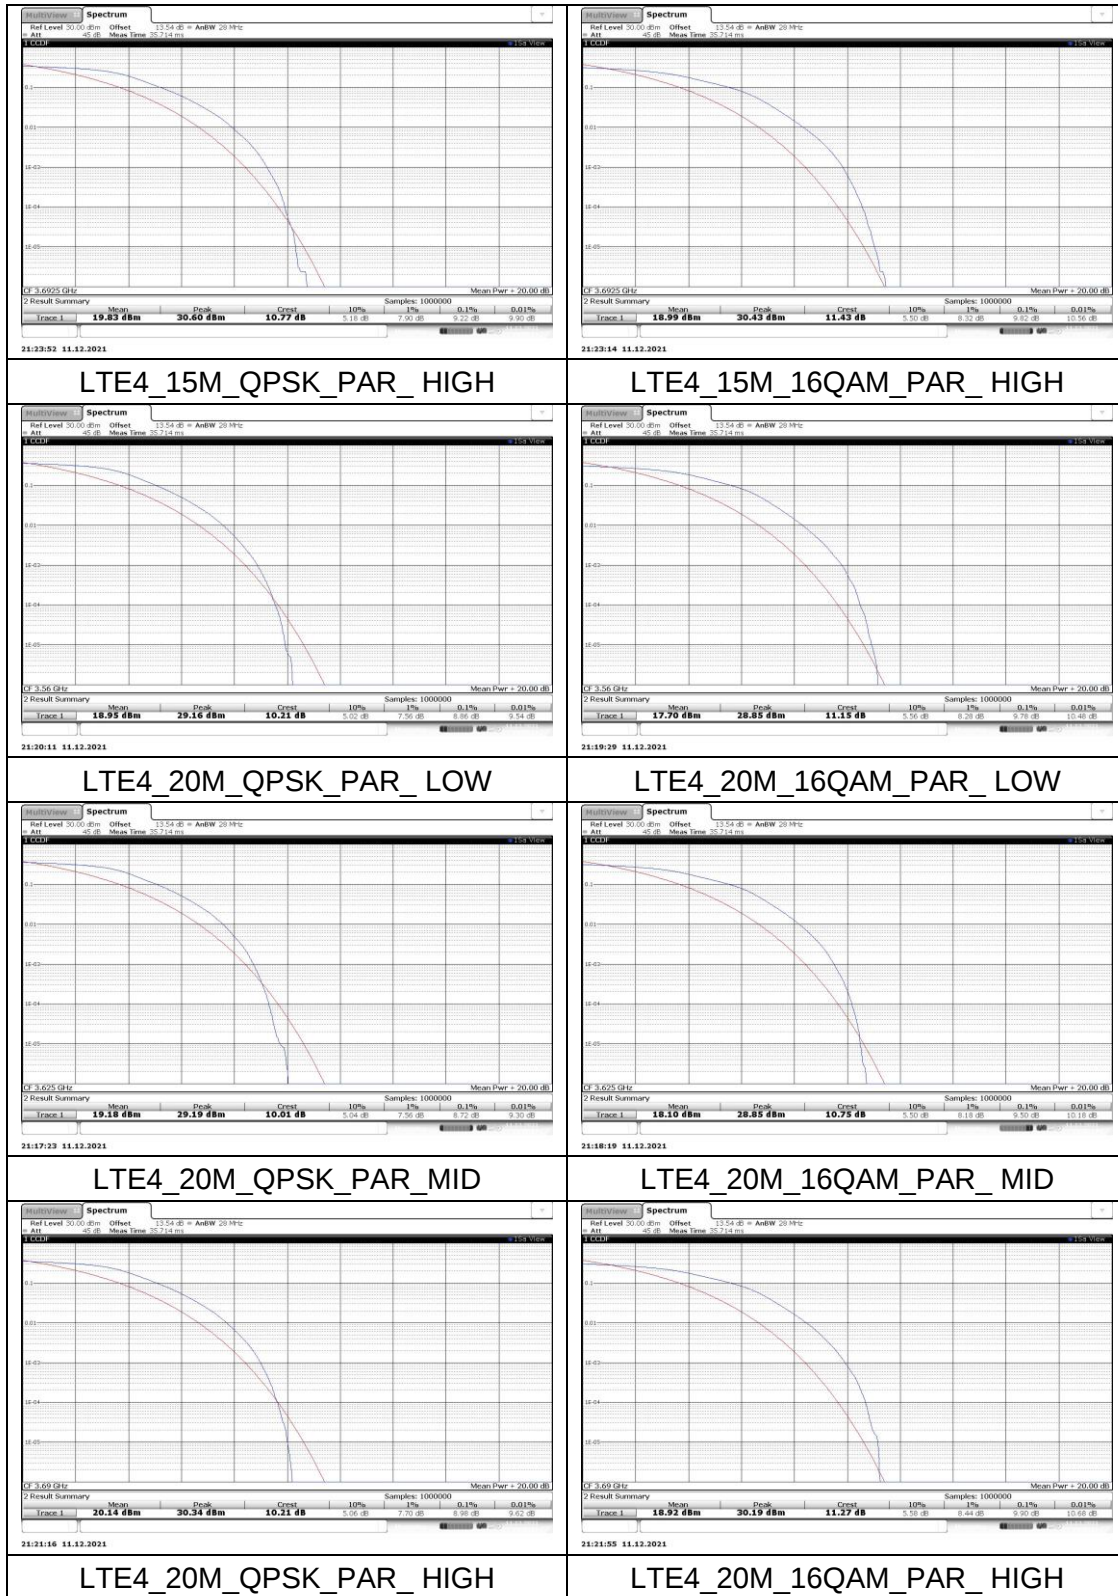



6.3 OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049.

LIMITS

For reporting purposes only.

TEST PROCEDURE

KDB 971168 D01 Power Meas License Digital Systems v03r01.

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

RESULTS


See the following pages.


LTE Band	Bandwidth (MHz)	Channel	Modulation	The Maximum Measured OBW (MHz)
48	5	MID	QPSK	4.511
		HIGH	16QAM	4.506
	10	LOW	QPSK	8.981
		LOW	16QAM	8.975
	15	MID	QPSK	13.466
		HIGH	16QAM	13.467
	20	MID	QPSK	18.002
		MID	16QAM	17.988


LTE Band	Bandwidth (MHz)	Channel	Modulation	The Maximum Measured 26dB bandwidth (MHz)
48	5	MID	QPSK	4.80
		MID	16QAM	4.80
	10	MID	QPSK	9.53
		MID	16QAM	9.53
	15	MID	QPSK	14.3
		MID	16QAM	14.3
	20	MID	QPSK	19.33
		MID	16QAM	19.33



LTE Band 48

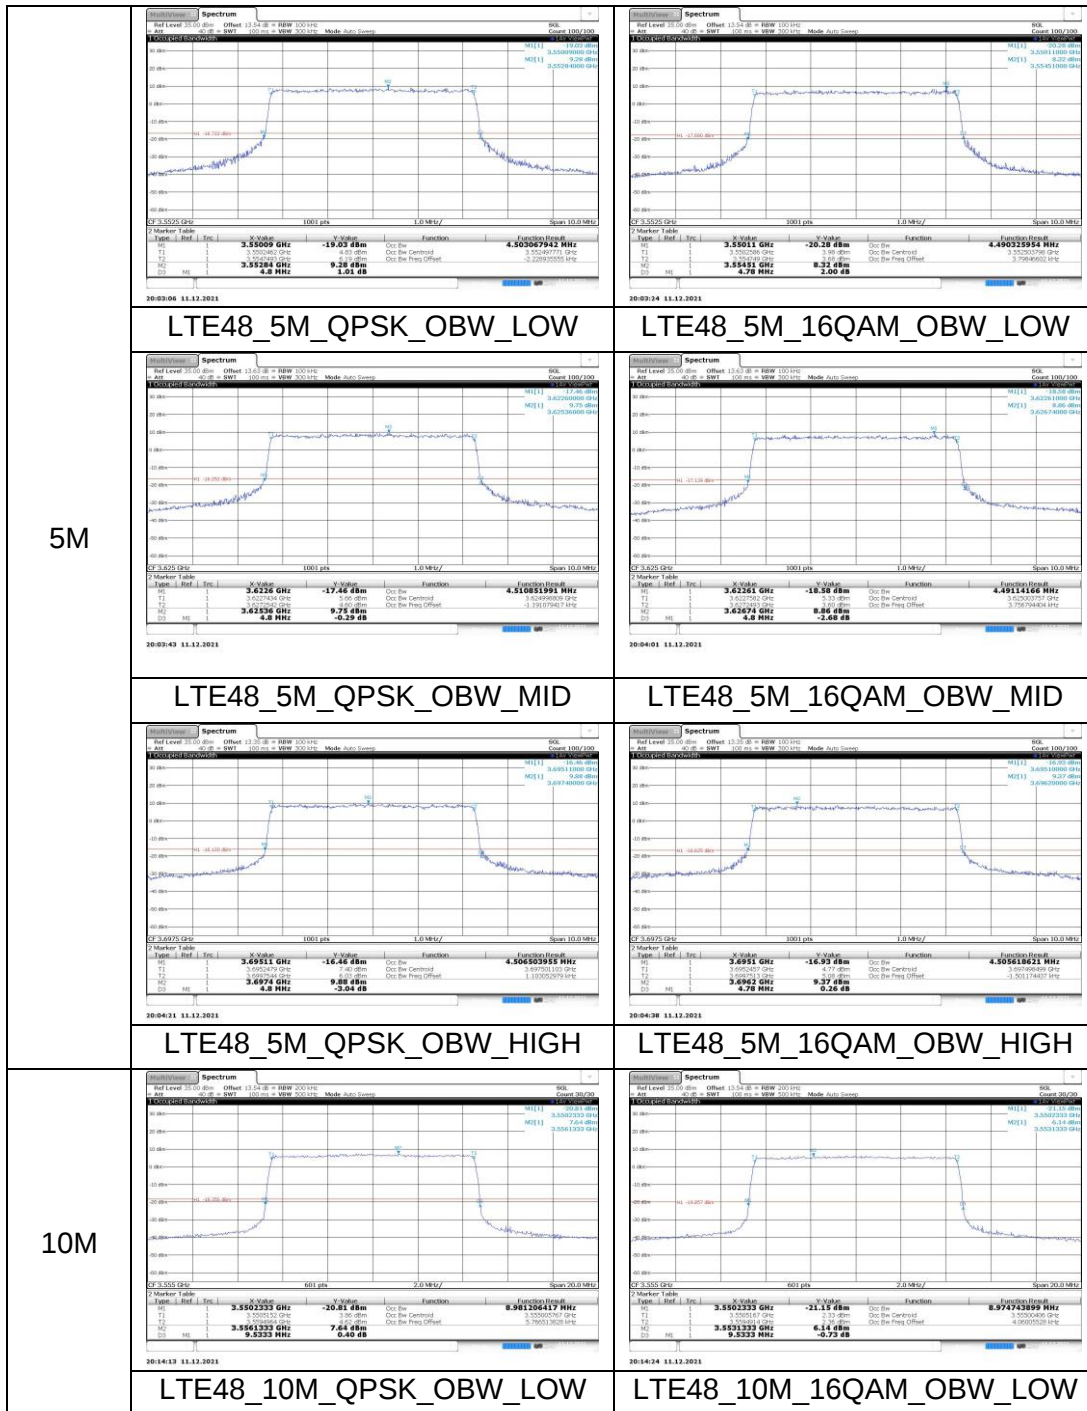

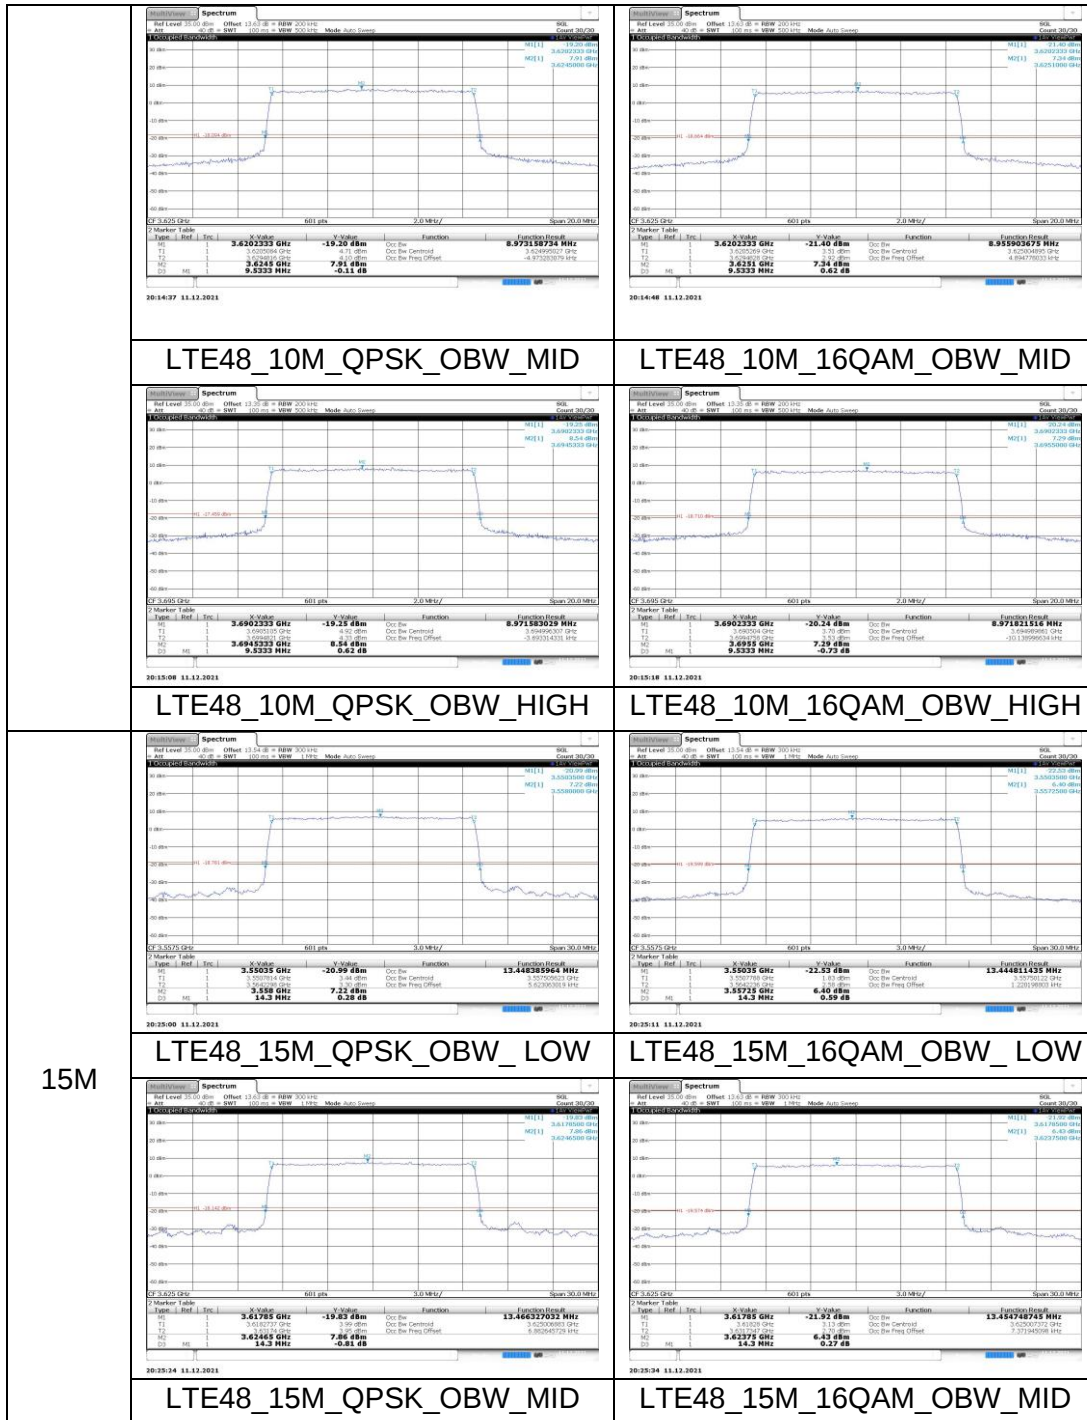

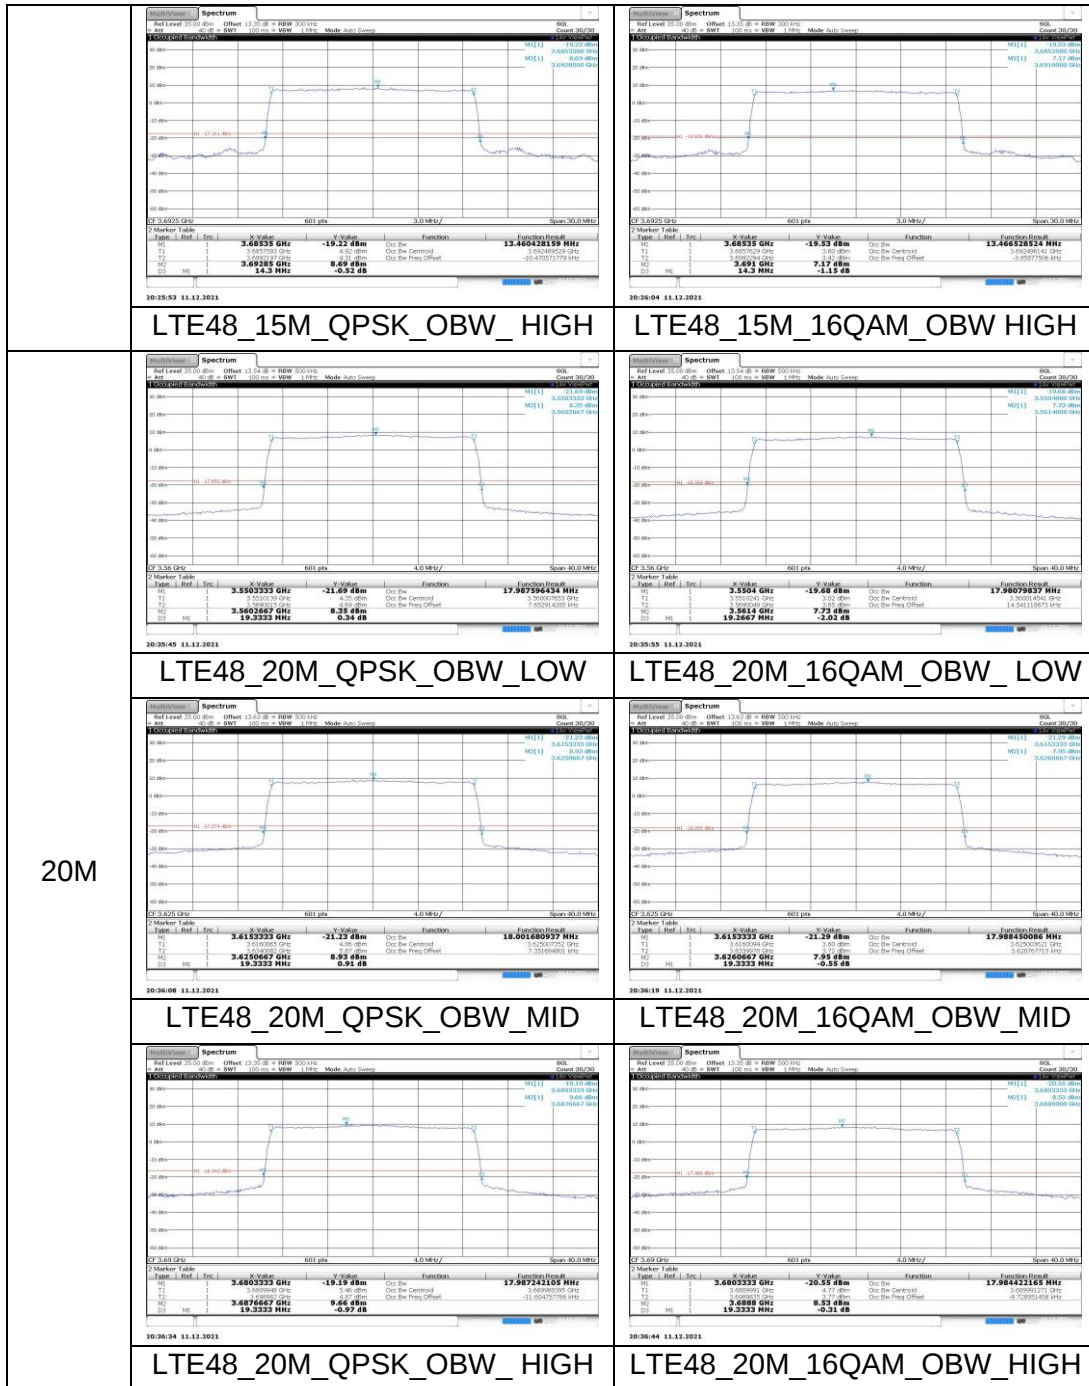



6.4 FREQUENCY STABILITY

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01.

RESULTS

Test Mode	Test Conditions		Frequency Deviation Middle Channel		
LTE Band 48	Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
			Hz	ppm	ppm
	VN	-30	-40.05	-0.011048	±2.5
		-20	-36.59	-0.010094	
		-10	22.10	0.006097	
		0	-42.23	-0.011429	
		+10	44.73	0.012106	
		+20	-42.79	-0.011581	
		+30	25.03	0.007041	
		+40	-43.36	-0.012197	
		+50	20.36	0.005727	
	VL	TN	30.34	0.008370	
	VH		-50.55	-0.013945	
	End Point		-60.81	-0.016775	



6.5 BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC:§96.41.

LIMITS

FCC: §96.41.

(e) 3.5 GHz Emissions and Interference Limits-

(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01:

The transmitter output was connected to a Call BOX Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

Set the RBW = 1 ~ 1.5 % of OBW(Typically limited to a minimum RBW of 1% of the OBW)

- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = Auto;
- e) Detector = RMS;
- f) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW;
- g) Trace mode = Average (100).

TEST PROCEDURE (LTE Band48)

(i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full reference bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.



(ii) When measuring unwanted emissions to demonstrate compliance with the limits, the CBSD and End User Device nominal carrier frequency/ channel shall be adjusted as close to the licensee's authorized frequency block edges, both upper and lower, as the design permits.


(iii) Compliance with emission limits shall be demonstrated using either average(RMS)-detected or peak-detected power measurement techniques.


RESULTS


See the following pages.




LTE Band 48

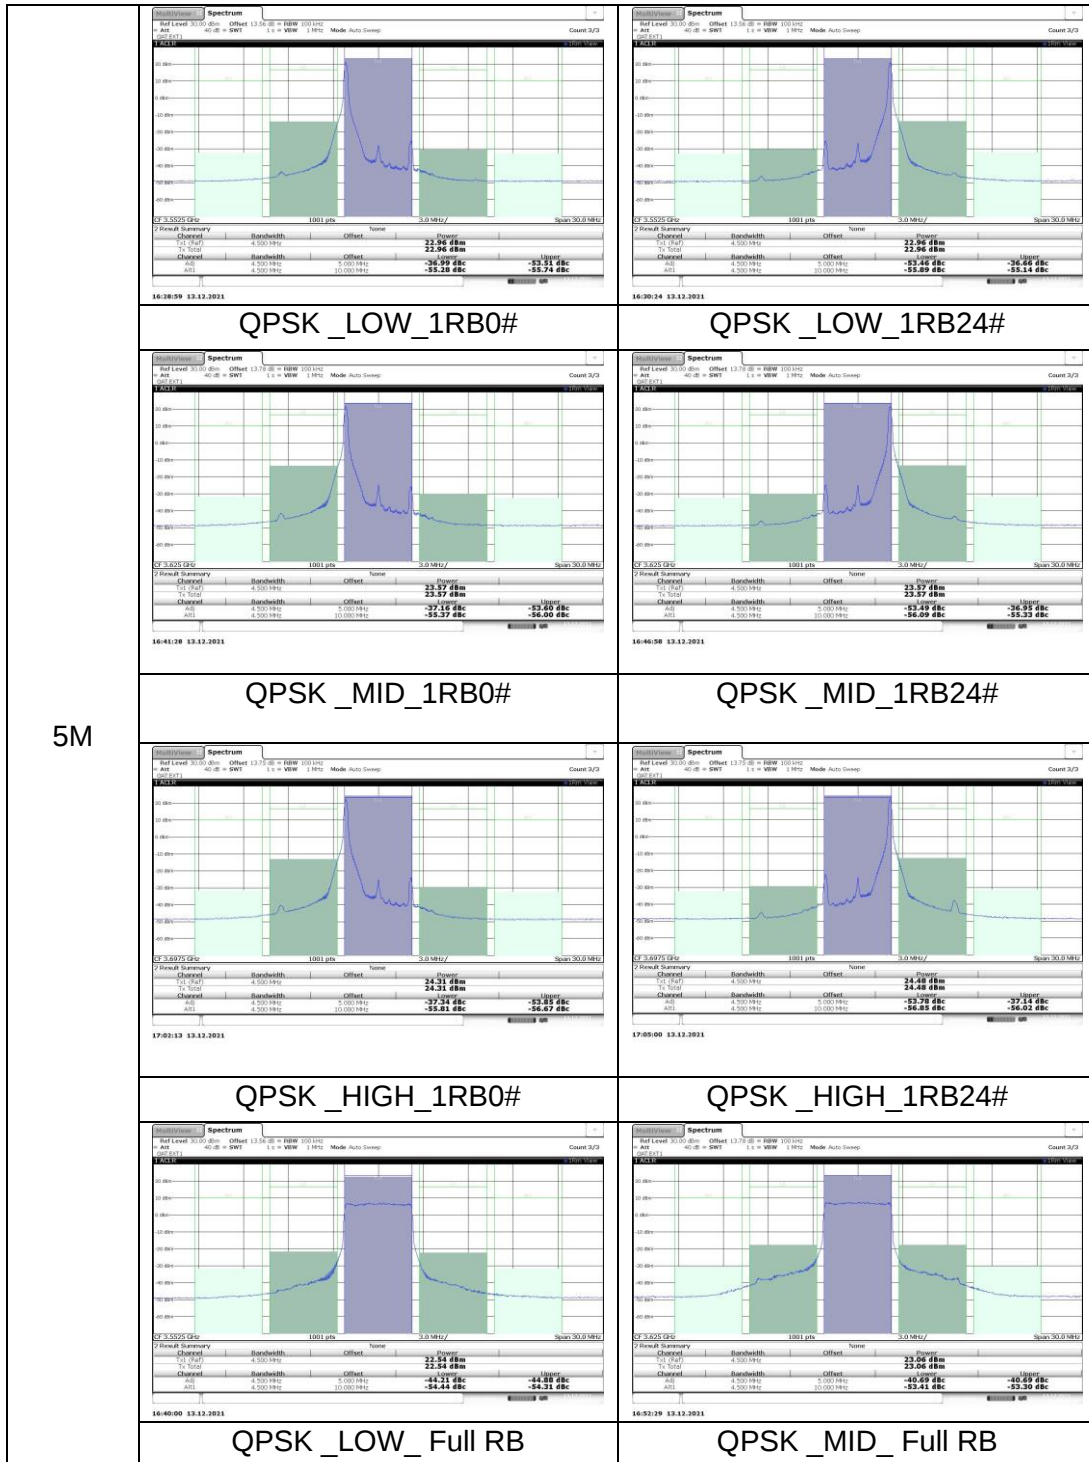

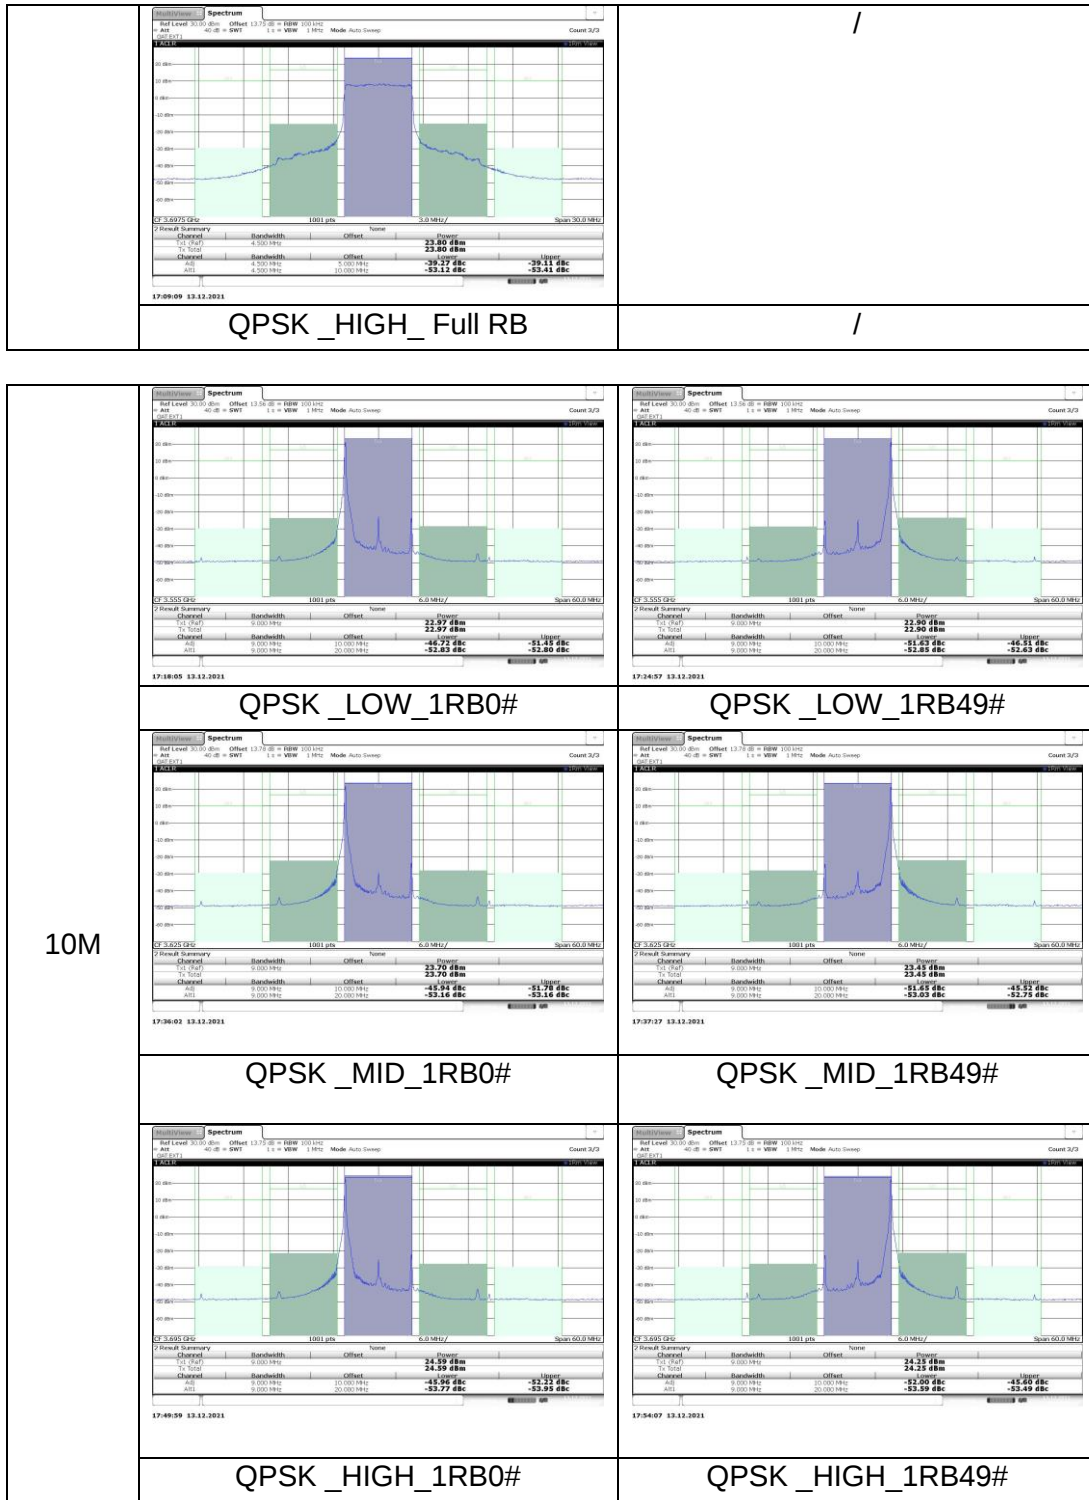


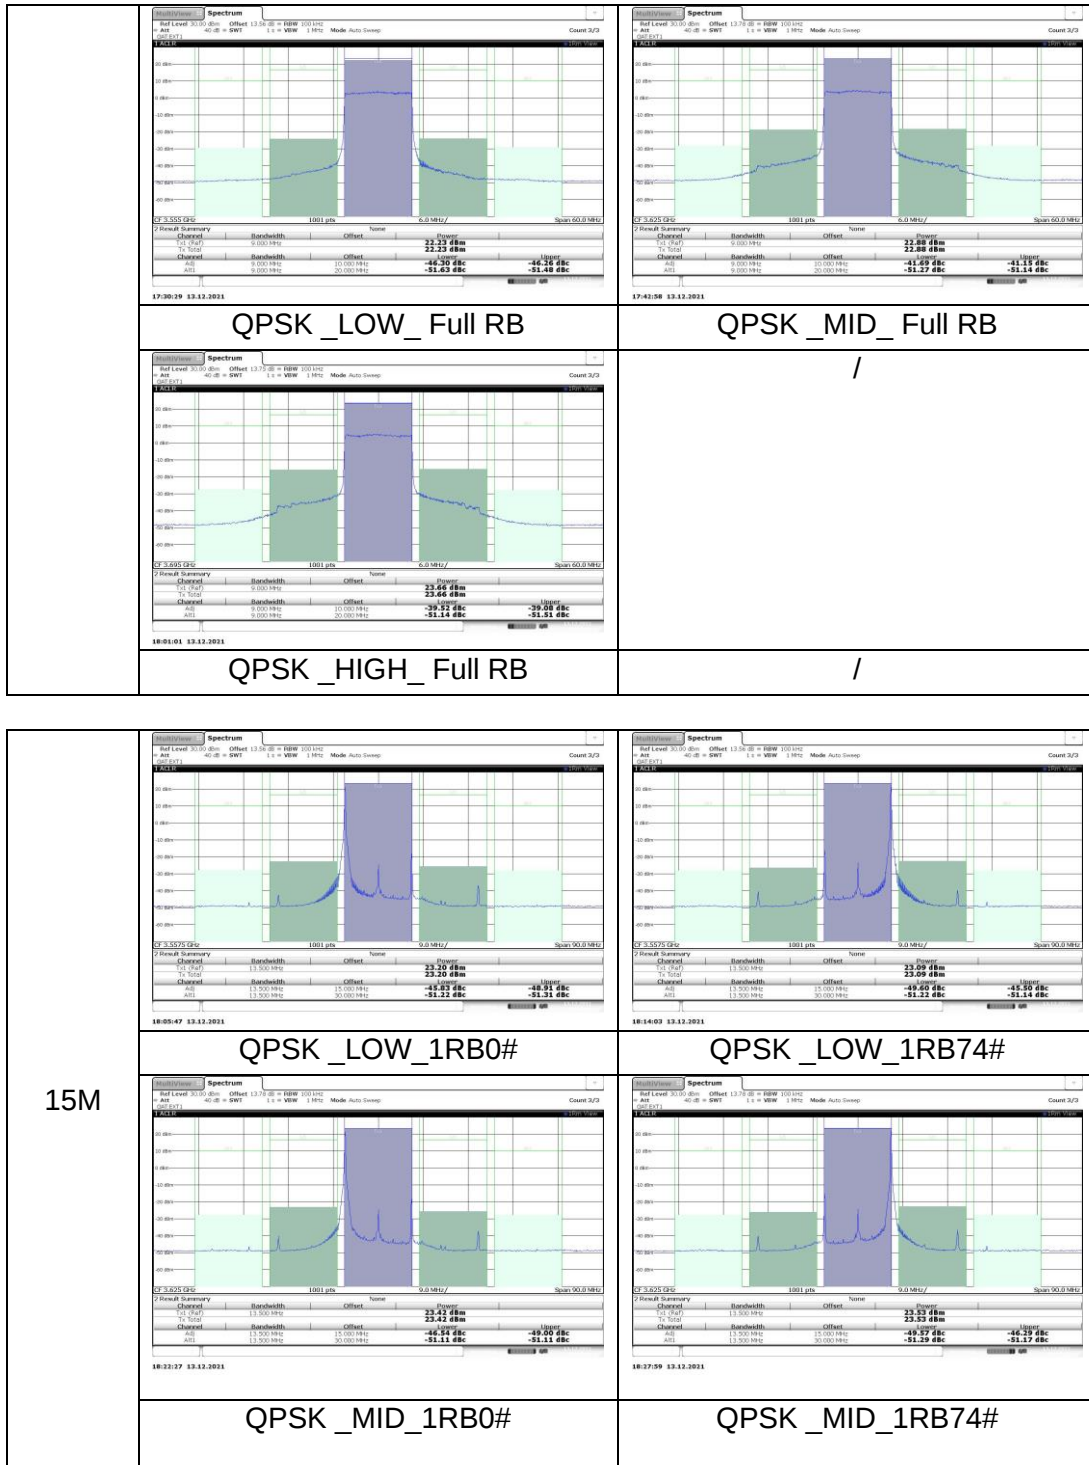

15M

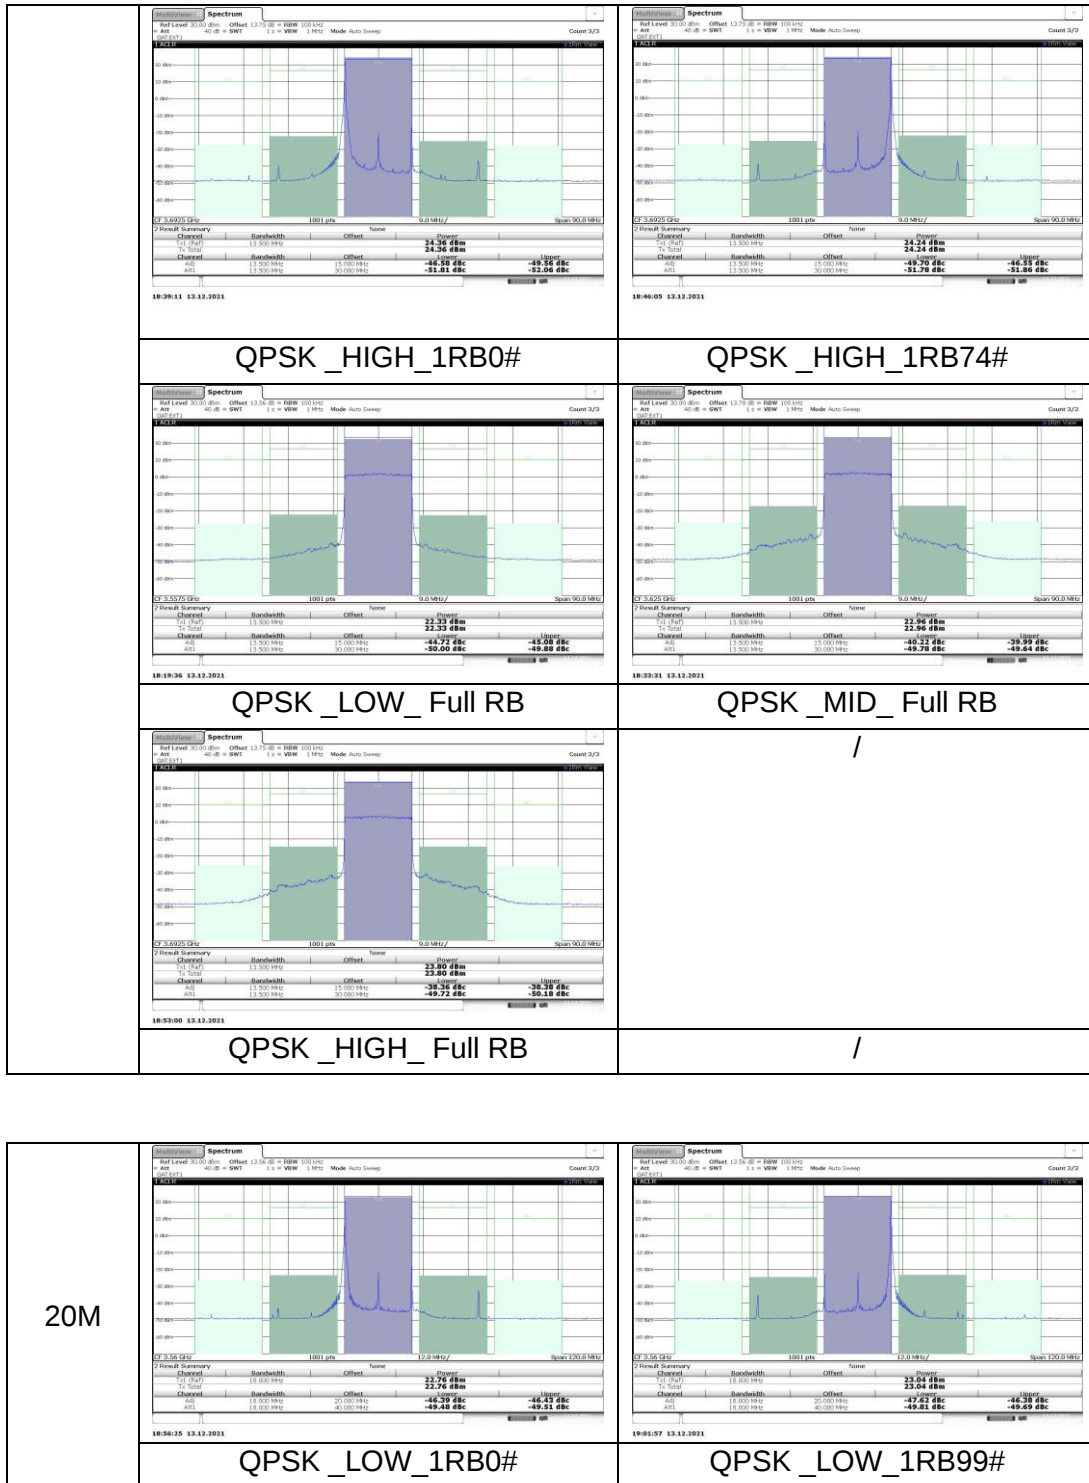

20M

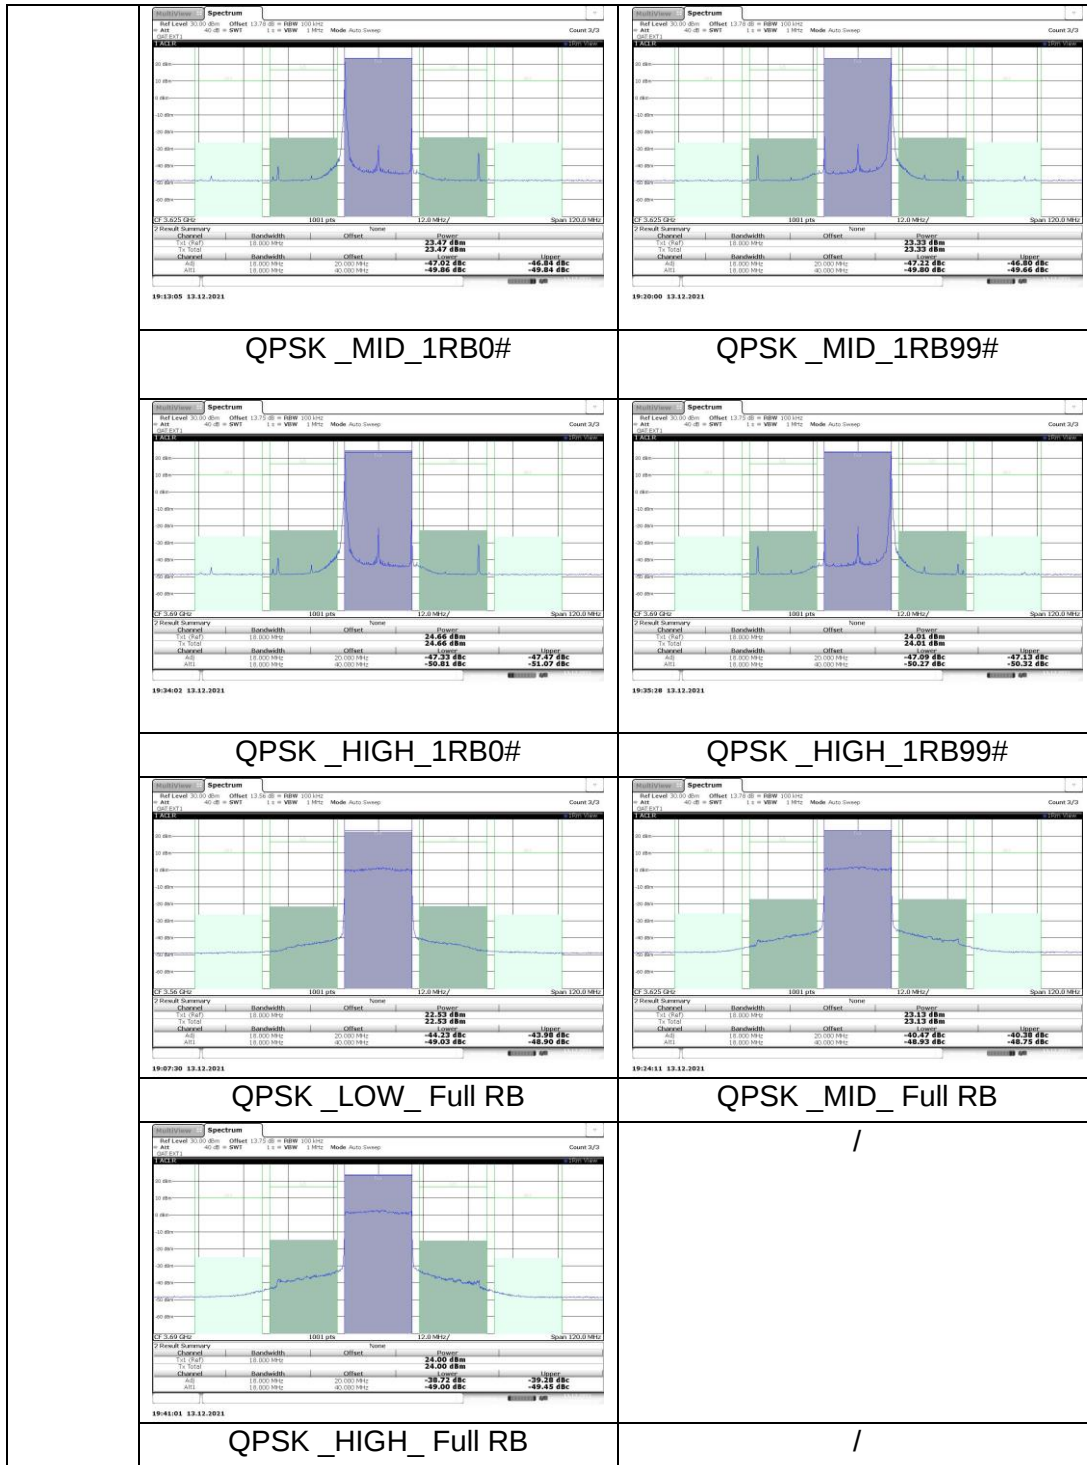



6.6 CONDUCTED OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §96.41.

LIMITS

(e) 3.5GHz Emissions and Interference Limits-


(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.


RESULTS


See the following pages.




LTE Band 48

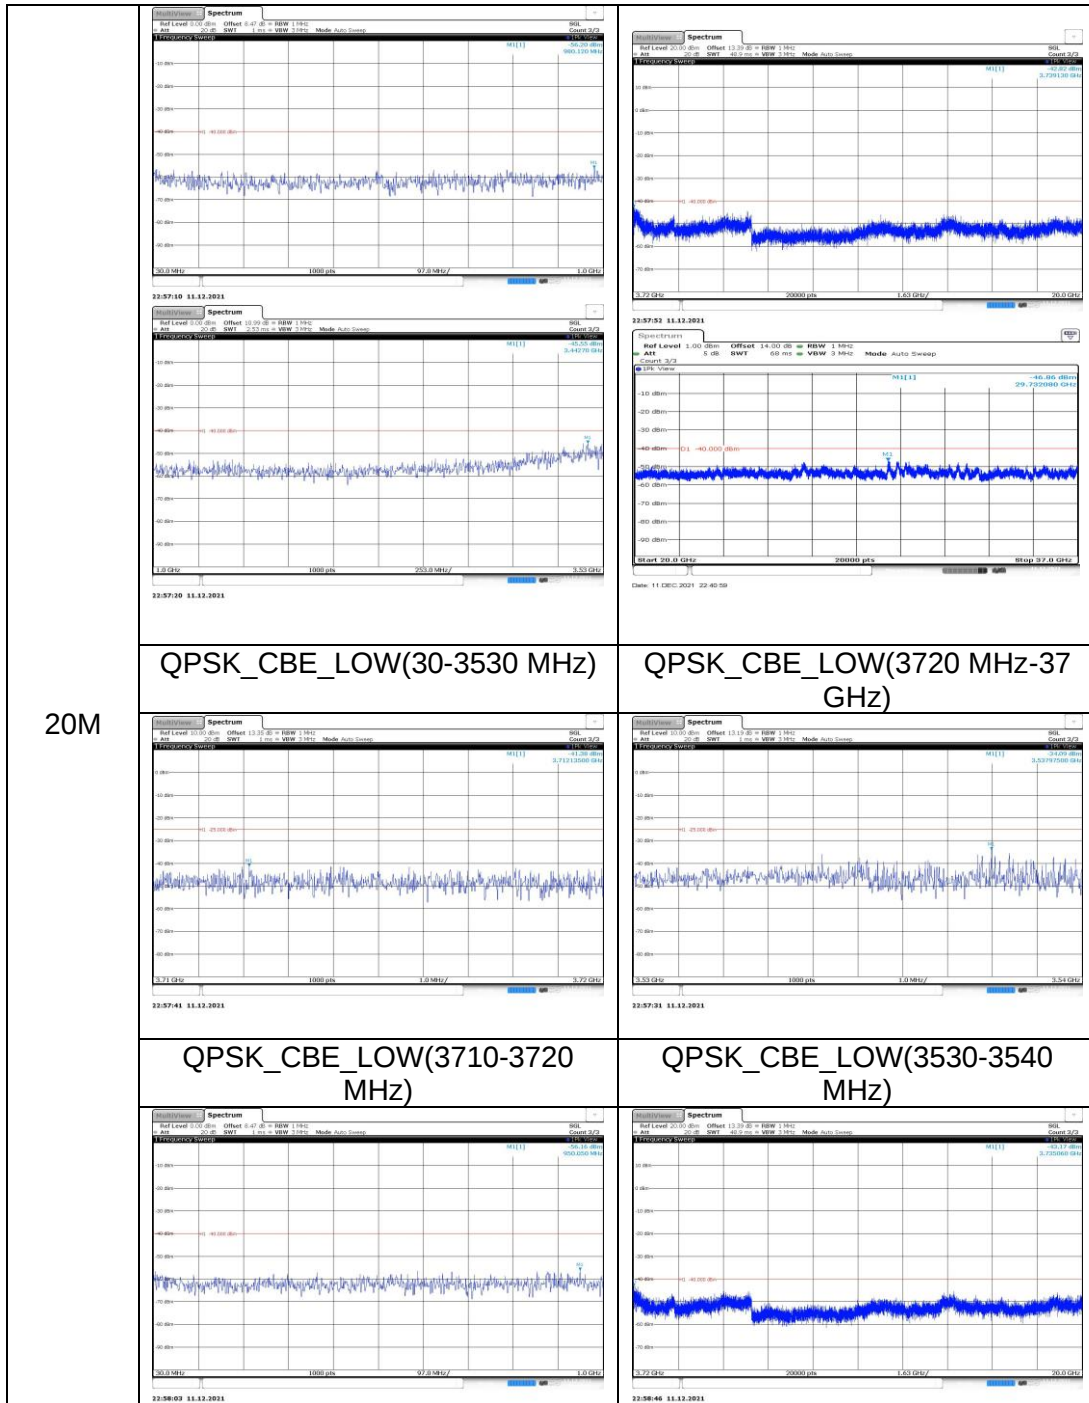

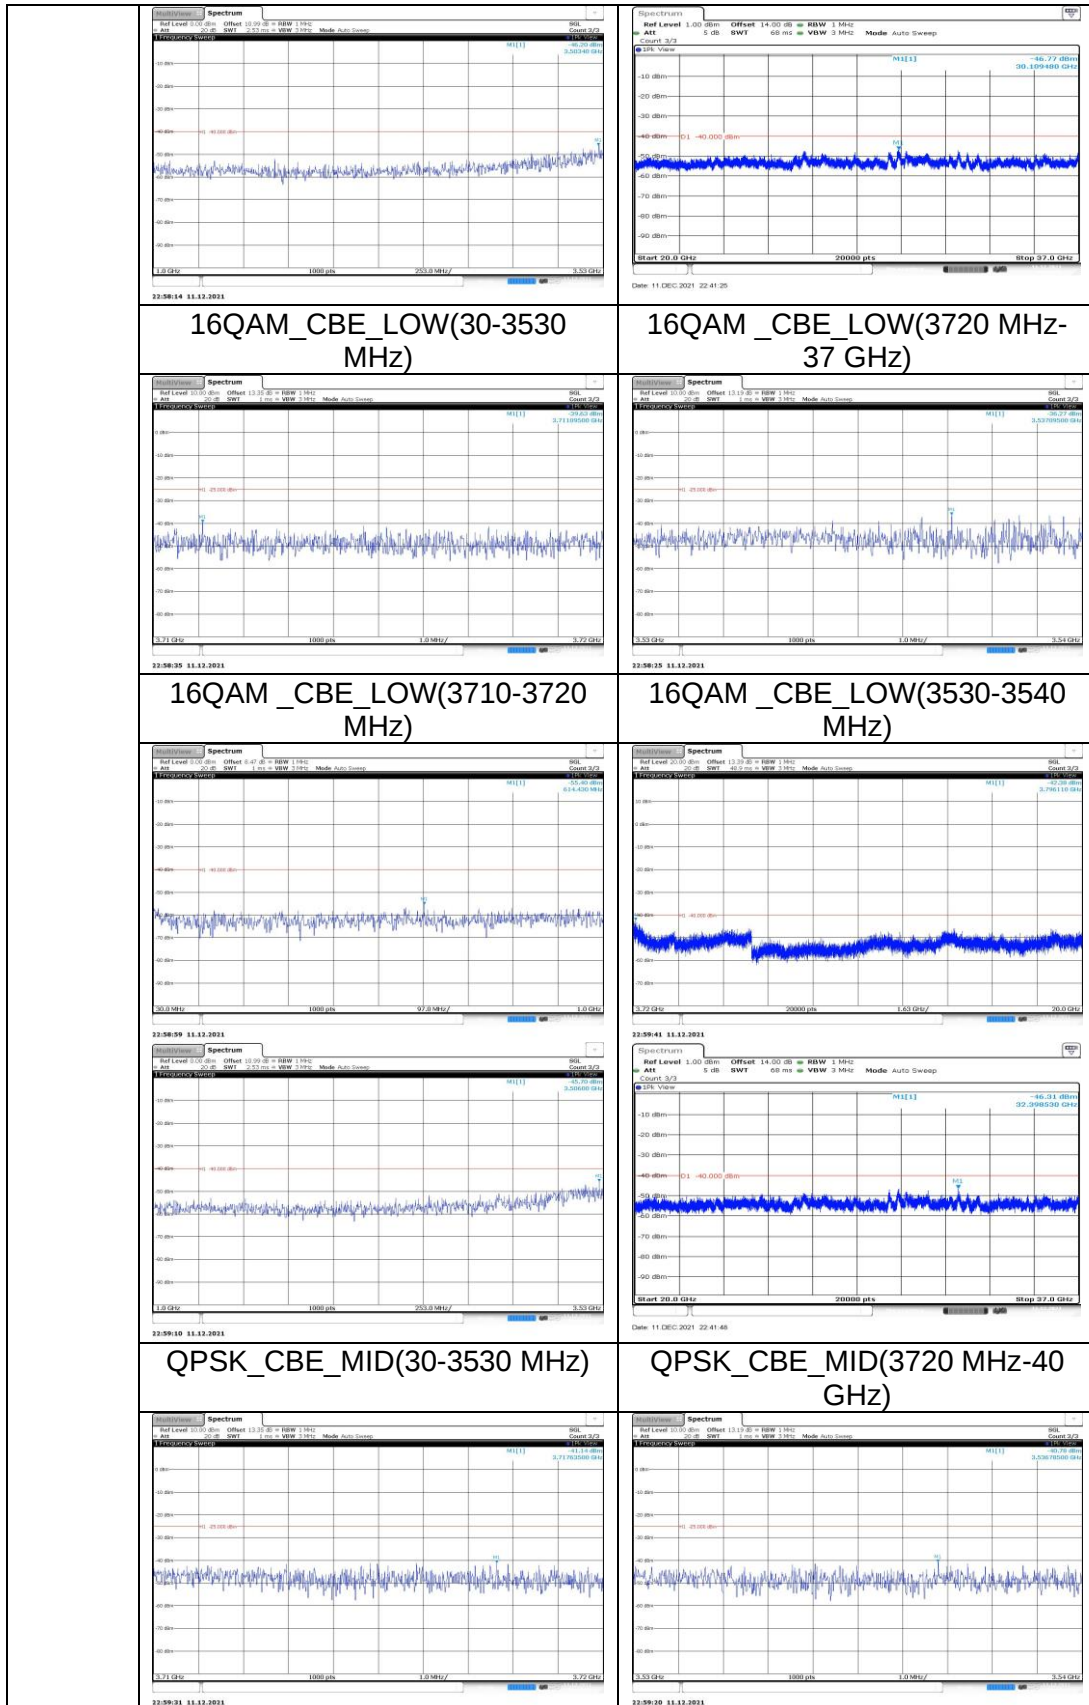

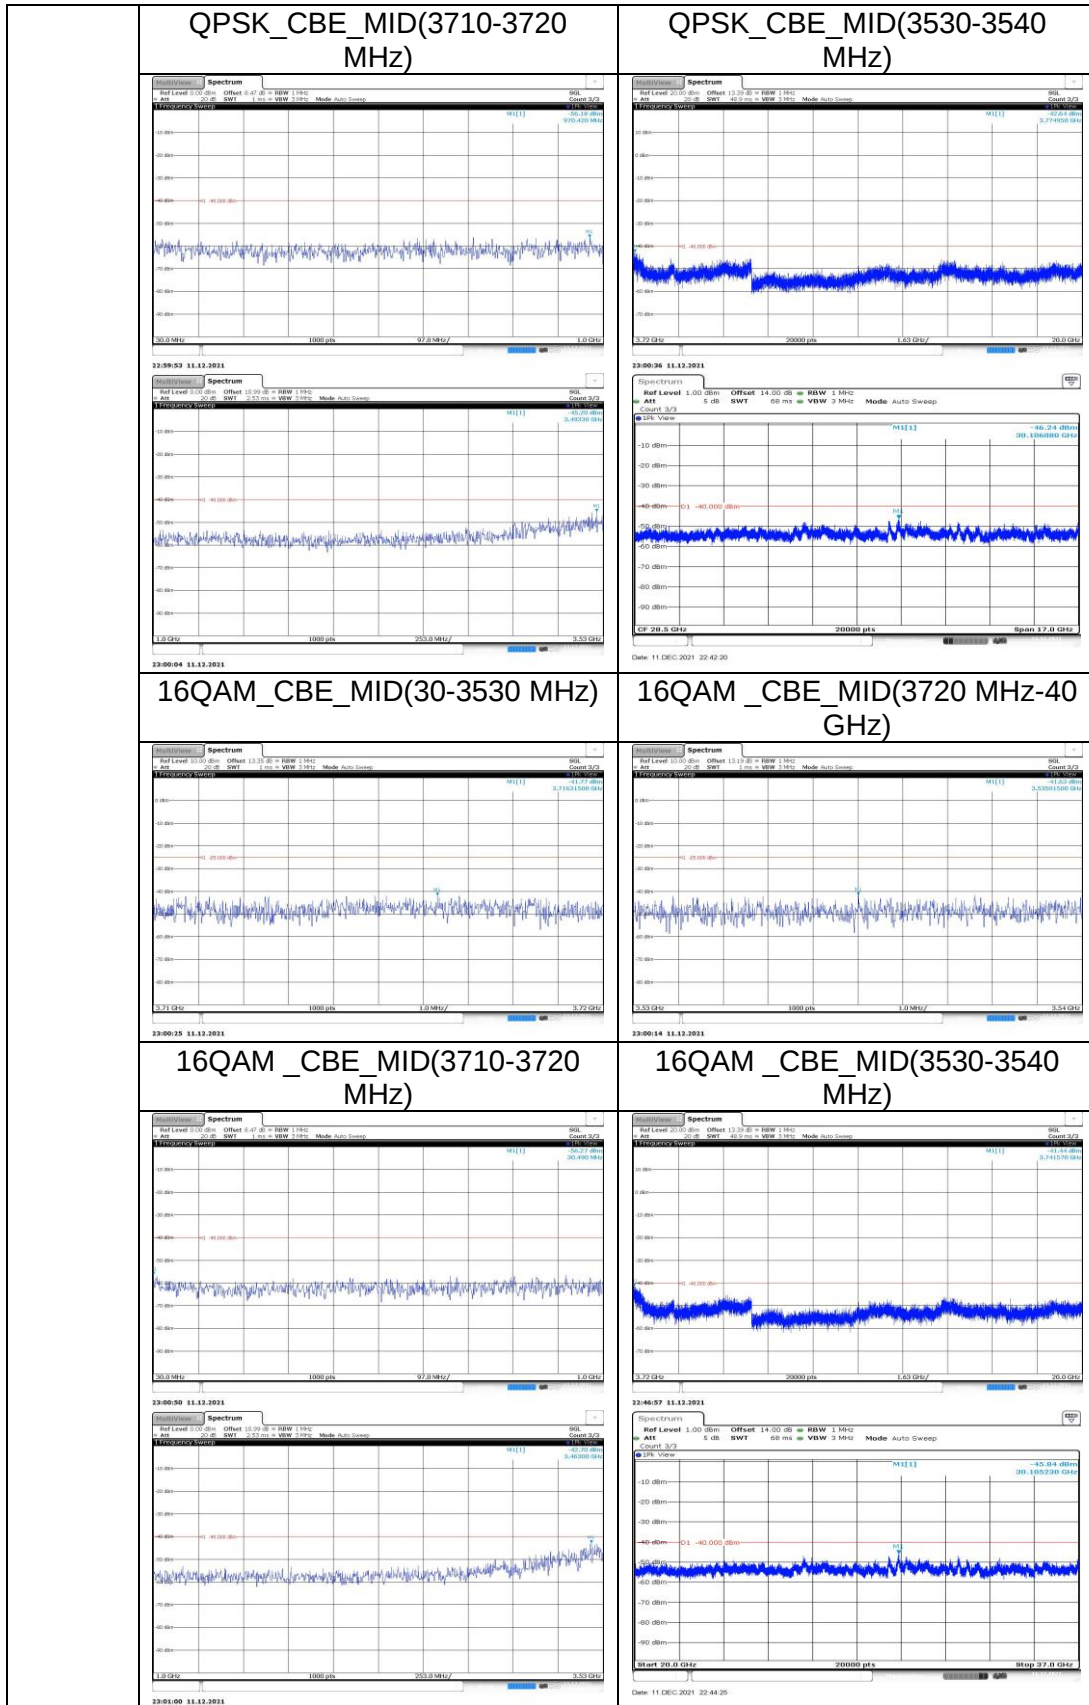

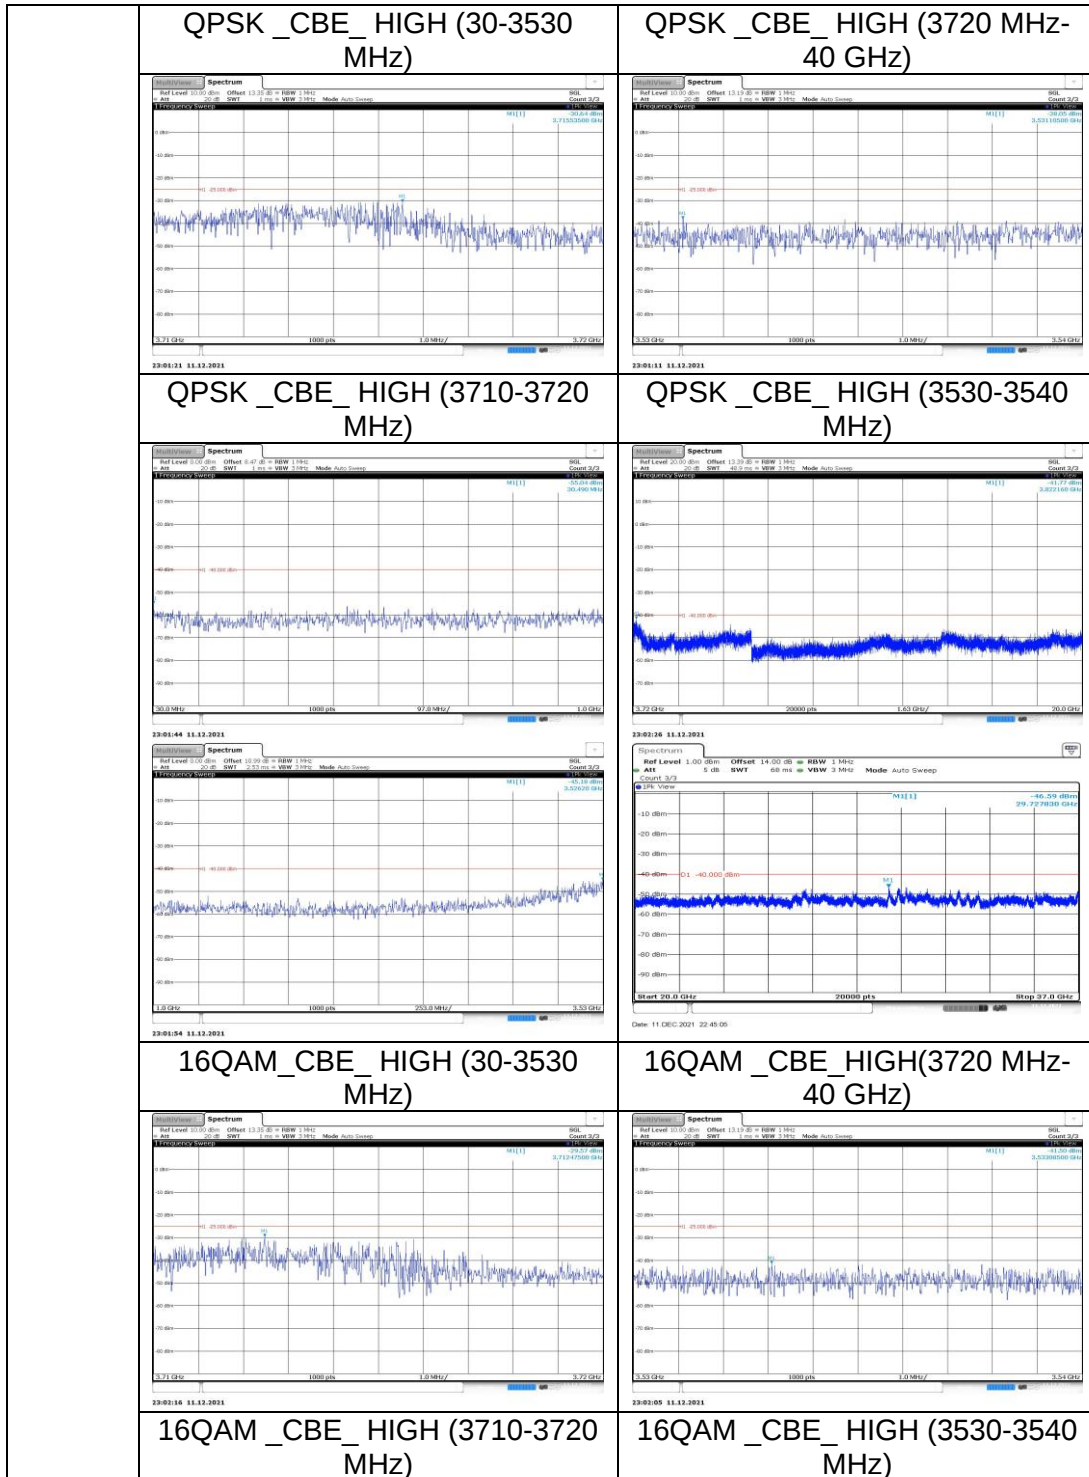

6.7 FIELD STRENGTH OF SPURIOUS RADIATION

LIMIT


FCC: §96.41.

(e) 3.5GHz Emissions and Interference Limits-


(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

TEST SETUP

Test Setup for Below 1G

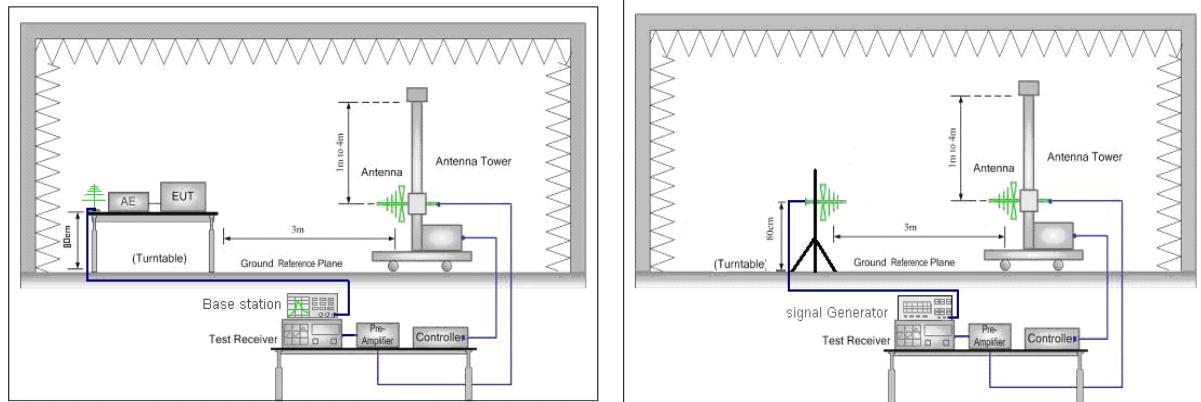

Test Setup for Above 1G

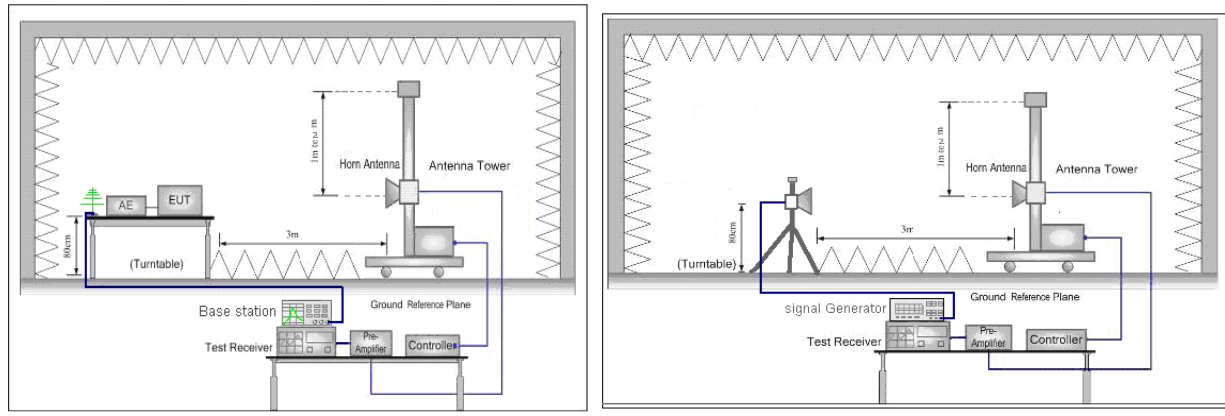

TEST PROCEDURE

KDB 971168 D01 Section 7

Below 1GHz test procedure as below:

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Calculate power in dBm by the following formula:

$$ERP(dBm) = P_g(dBm) - \text{cable loss}(dB) + \text{antenna gain}(dBd)$$

Where:

P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g[dBm] - \text{cable loss}[dB]$. The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}[\text{Watts}])$.

Above 1GHz test procedure as below:

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.



10. Calculate power in dBm by the following formula:

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15 \text{dB}$$

Where: Pg is the generator output power into the substitution antenna.

11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13 \text{dBm.}$$

NOTE 1: Radiated spurious emissions were investigated below 30MHz, 30MHz – 1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz – 1GHz.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

NOTE 2: Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

RESULTS

See the following pages

RADIATED SPURIOUS EMISSION RESULTS BETWEEN 30MHz and 1GHz

Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)	Polarization	
147.37	-65.69	-40.00	-25.69	Horizontal	/
220.17	-64.56	-40.00	-24.56	Horizontal	
316.01	-68.73	-40.00	-28.73	Horizontal	
456.08	-76.55	-40.00	-36.55	Horizontal	
683.69	-76.71	-40.00	-36.71	Horizontal	
789.66	-72.01	-40.00	-32.01	Horizontal	
36.79	-67.45	-40.00	-27.45	Vertical	
114.20	-68.19	-40.00	-28.19	Vertical	
154.75	-66.20	-40.00	-26.20	Vertical	
456.08	-66.26	-40.00	-26.26	Vertical	
791.50	-56.81	-40.00	-16.81	Vertical	
949.08	-56.97	-40.00	-16.97	Vertical	
LTE B48_20M_QPSK_LOW					/

**RADIATED SPURIOUS EMISSION RESULTS ABOVE 1GHz****LTE Band 48**

Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)	Polarization	Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)	Polarization
1222.00	-53.06	-40.00	-13.06	Horizontal	1396.00	-53.43	-40.00	-13.43	Horizontal
2398.00	-47.58	-40.00	-7.58	Horizontal	2182.00	-49.53	-40.00	-9.53	Horizontal
3316.00	-46.54	-40.00	-6.54	Horizontal	3142.00	-50.05	-40.00	-10.05	Horizontal
4258.00	-50.08	-40.00	-10.08	Horizontal	4234.00	-50.26	-40.00	-10.26	Horizontal
5008.00	-47.73	-40.00	-7.73	Horizontal	5212.00	-47.07	-40.00	-7.07	Horizontal
6700.00	-45.83	-40.00	-5.83	Horizontal	6538.00	-46.37	-40.00	-6.37	Horizontal
8111.00	-48.02	-40.00	-8.02	Horizontal	8056.00	-47.75	-40.00	-7.75	Horizontal
9343.00	-47.48	-40.00	-7.48	Horizontal	10850.00	-42.64	-40.00	-2.64	Horizontal
11829.00	-42.03	-40.00	-2.03	Horizontal	12797.00	-42.72	-40.00	-2.72	Horizontal
14205.00	-43.75	-40.00	-3.75	Horizontal	14469.00	-42.20	-40.00	-2.20	Horizontal
15624.00	-46.54	-40.00	-6.54	Horizontal	15613.00	-46.03	-40.00	-6.03	Horizontal
17714.00	-42.08	-40.00	-2.08	Horizontal	17890.00	-41.42	-40.00	-1.42	Horizontal
1402.00	-52.56	-40.00	-12.56	Vertical	1510.00	-52.22	-40.00	-12.22	Vertical
2050.00	-49.67	-40.00	-9.67	Vertical	2350.00	-48.84	-40.00	-8.84	Vertical
2734.00	-46.09	-40.00	-6.09	Vertical	3298.00	-42.15	-40.00	-2.15	Vertical
4252.00	-41.98	-40.00	-1.98	Vertical	4522.00	-42.21	-40.00	-2.21	Vertical
5206.00	-43.07	-40.00	-3.07	Vertical	5674.00	-41.67	-40.00	-1.67	Vertical
6514.00	-44.22	-40.00	-4.22	Vertical	6550.00	-41.96	-40.00	-1.96	Vertical
8056.00	-48.23	-40.00	-8.23	Vertical	7231.00	-46.97	-40.00	-6.97	Vertical
9343.00	-47.23	-40.00	-7.23	Vertical	9024.00	-47.16	-40.00	-7.16	Vertical
11367.00	-42.04	-40.00	-2.04	Vertical	10850.00	-42.91	-40.00	-2.91	Vertical
12643.00	-42.26	-40.00	-2.26	Vertical	12632.00	-42.61	-40.00	-2.61	Vertical
14205.00	-43.11	-40.00	-3.11	Vertical	14469.00	-42.14	-40.00	-2.14	Vertical
17769.00	-43.01	-40.00	-3.01	Vertical	17769.00	-41.74	-40.00	-1.74	Vertical
LTE B48_20M_QPSK_LOW					LTE B48_20M_QPSK_MID				
Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)	Polarization	Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)	Polarization
1684.00	-51.96	-40.00	-11.96	Horizontal	3341.00	-48.17	-40.00	-8.17	Horizontal
2356.00	-48.47	-40.00	-8.47	Horizontal	3897.00	-53.07	-40.00	-13.07	Horizontal
3376.00	-48.44	-40.00	-8.44	Horizontal	4083.00	-58.35	-40.00	-18.35	Horizontal
4600.00	-53.85	-40.00	-13.85	Horizontal	4451.00	-56.36	-40.00	-16.36	Horizontal
5992.00	-54.77	-40.00	-14.77	Horizontal	4672.00	-61.45	-40.00	-21.45	Horizontal
6526.00	-56.35	-40.00	-16.35	Horizontal	5570.00	-63.42	-40.00	-23.42	Horizontal
7352.00	-45.87	-40.00	-5.87	Horizontal	6997.00	-47.62	-40.00	-7.62	Horizontal
9321.00	-45.71	-40.00	-5.71	Horizontal	7638.00	-46.72	-40.00	-6.72	Horizontal
11378.00	-42.07	-40.00	-2.07	Horizontal	10050.00	-42.76	-40.00	-2.76	Horizontal
13545.00	-41.70	-40.00	-1.70	Horizontal	10751.00	-42.64	-40.00	-2.64	Horizontal
14722.00	-41.36	-40.00	-1.36	Horizontal	12271.00	-42.88	-40.00	-2.88	Horizontal
17912.00	-42.33	-40.00	-2.33	Horizontal	15277.00	-42.25	-40.00	-2.25	Horizontal
1432.00	-51.69	-40.00	-11.69	Vertical	3341.00	-52.25	-40.00	-12.25	Vertical
1846.00	-48.86	-40.00	-8.86	Vertical	4106.00	-52.88	-40.00	-12.88	Vertical
3196.00	-44.40	-40.00	-4.40	Vertical	4453.00	-51.51	-40.00	-11.51	Vertical
4732.00	-42.97	-40.00	-2.97	Vertical	4831.00	-53.01	-40.00	-13.01	Vertical
5944.00	-45.21	-40.00	-5.21	Vertical	5042.00	-53.50	-40.00	-13.50	Vertical
6532.00	-42.21	-40.00	-2.21	Vertical	5667.00	-53.04	-40.00	-13.04	Vertical
7352.00	-42.03	-40.00	-2.03	Vertical	7007.00	-47.17	-40.00	-7.17	Vertical
8991.00	-47.50	-40.00	-7.50	Vertical	7596.00	-46.72	-40.00	-6.72	Vertical
11037.00	-42.08	-40.00	-2.08	Vertical	8685.00	-45.64	-40.00	-5.64	Vertical
12797.00	-42.32	-40.00	-2.32	Vertical	10045.00	-42.29	-40.00	-2.29	Vertical
14722.00	-41.39	-40.00	-1.39	Vertical	11523.00	-42.66	-40.00	-2.66	Vertical
17780.00	-41.33	-40.00	-1.33	Vertical	14968.00	-42.94	-40.00	-2.94	Vertical
LTE B48_20M_QPSK_HIGH					Simultaneous transmission (Worst case for 2.4G WIFI +LTE mode)				

Note: For transmit simultaneously, all the modes had been tested, only the worst data for LTE & 2.4G WIFI was recorded in the report.

END OF REPORT