

Variant FCC Test Report

(PART 24)

Report No.: RF180521C04C

FCC ID: 2AAGMGM01QA

Test Model: GM01Q

Received Date: Mar. 08, 2019

Test Date: May 21, 2019

Issued Date: Jun. 03, 2019

Applicant: Sequans Communications

Address: 15-55 Boulevard Charles de Gaulle, 92700 Colombes France

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City

33383, Taiwan (R.O.C)

FCC Registration /

788550 / TW0003

Designation Number:





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Report No.: RF180521C04C Page No. 1 / 30 Report Format Version: 6.1.1



Table of Contents

Re	ease Control Record	. 3
1	Certificate of Conformity	. 4
2	Summary of Test Results	. 5
	2.1 Measurement Uncertainty	
3	General Information	. 7
	3.1 General Description of EUT	. 8 . 8 . 9 . 9
4	est Types and Results	11
	1.1 Output Power Measurement 4.1.1 Limits of Output Power Measurement 4.1.2 Test Procedures 4.1.3 Test Setup 4.1.4 Test Results 1.2 Radiated Emission Measurement 4.2.1 Limits of Radiated Emission Measurement 4.2.2 Test Procedure 4.2.3 Deviation from Test Standard 4.2.4 Test Setup 4.2.5 Test Results	11 12 13 15 15 15
5	Pictures of Test Arrangements	29
Αŗ	endix – Information of the Testing Laboratories	30



Release Control Record

Issue No.	Description	Date Issued
RF180521C04C	Original Release	Jun. 03, 2019

Report No.: RF180521C04C Reference No.: 190308C22 Page No. 3 / 30 Report Format Version: 6.1.1



1 Certificate of Conformity

Product: GM01Q-STMOD Cellular Expansion Board

Brand: SEQUANS COMMUNICATIONS

Test Model: GM01Q

Sample Status: Mass Production

Applicant: Sequans Communications

Test Date: May 21, 2019

Standards: FCC Part 24, Subpart E

This report is issued as a supplementary report to BV CPS report no.: RF180521C04B. This report shall be used by combining with its original report.

Ivonne Wu / Supervisor

Approved by: , **Date:** Jun. 03, 2019

Dylan Chiou / Project Engineer



2 Summary of Test Results

	Applied Standard: FCC Part 24 & Part 2						
FCC Clause	Test Item	Result	Remarks				
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.				
2.1047	Modulation Characteristics	N/A	Refer to Note				
2.1046 24.232(d)	Peak to Average Ratio	N/A	Refer to Note				
2.1055 24.235	Frequency Stability	N/A	Refer to Note				
2.1049	Occupied Bandwidth	N/A	Refer to Note				
24.238	Band Edge Measurements	N/A	Refer to Note				
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note				
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -13.29 dB at 9500.00 MHz.				

Note:

- 1. Only E.I.R.P and Radiated Spurious Emissions test had been performed for this addendum. Refer to original report for other test data.
- 2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
	9 kHz ~ 30 MHz	3.04 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
Radiated Emissions above 1 GHz	18 GHz ~ 40 GHz	1.94 dB



2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY56070348	Sep. 06, 2018	Sep. 05, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	3115	5619	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53052658	May 24, 2018	May 23, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA
LTE Wireless Communication Test Set Keysight	E7515A	MY57270629	Feb. 22, 2019	Feb. 21, 2020
Wideband Radio Communication Tester R&S	CMW500	151084	Dec. 24, 2018	Dec. 23, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

^{2.} The test was performed in HwaYa Chamber 10.



3 General Information

3.1 General Description of EUT


Product	GM01Q-STMOD Cellular Expansion Board				
Brand	SEQUANS COMMUNICATIONS				
Test Model	GM01Q				
Status of EUT	Mass Production				
Power Supply Rating	5.0 Vdc (host equipment) or 3.8 Vdc (form DC	power supply)			
Modulation Type	LTE	QPSK, 16QAM			
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz			
Francisco Dange	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz			
Frequency Range	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz			
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz			
	LTE Band 2 (Channel Bandwidth: 5 MHz)	246.60 mW			
Max. EIRP Power	LTE Band 2 (Channel Bandwidth: 10 MHz)	250.03 mW			
wax. EIRP Power	LTE Band 2 (Channel Bandwidth: 15 MHz)	253.51 mW			
	LTE Band 2 (Channel Bandwidth: 20 MHz)	257.63 mW			
Antenna Type	Dipole Antenna with 2.65 dBi gain				
Accessory Device	ccessory Device Refer to Note as below				
Data Cable Supplied	Refer to Note as below				

Note:

- 1. This report is issued as a supplementary report to BV CPS report no.: RF180521C04B. Change is to add a host: GM01Q-STMOD (Model: GM01Q-STMOD / Brand: Sequans) to certified module which was original granted on 06/21/2019 under FCC ID: 2AAGMGM01QA. RF module is exactly the same chip module (EUT) covered under shielding case with original grant and no RF portion changes. The only change is the antenna traces different. Therefore, only E.I.R.P. and RSE tests had been performed in this report.
- 2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



3.2 Configuration of System under Test

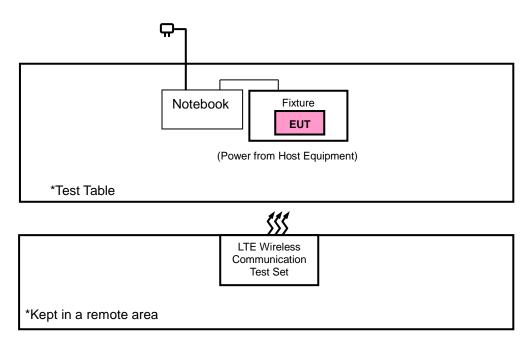

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	E6420	D3T96R1	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).



3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission	
LTE Band 2	X-plane	X-axis	

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
	EIRP	18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
_		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	LIKE	18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
	Radiated Emission	18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 5 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

- 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation and the worst mode reference report to BV CPS report no.: RF180521C04B.
- 2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By	
EIRP	26 deg. C, 58 % RH	5 Vdc	Getaz Yang	
Radiated Emission	25 deg. C, 65 % RH	5 Vdc	Getaz Yang	

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



3.5 **General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2 FCC 47 CFR Part 24 KDB 971168 D01 Power Meas License Digital Systems v03r01 ANSI/TIA/EIA-603-E 2016 ANSI 63.26-2015 **ANSI 63.2 -1996**

NOTE: All test items have been performed and recorded as per the above standards.

Report No.: RF180521C04C Reference No.: 190308C22 Page No. 10 / 30 Report Format Version: 6.1.1



4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power 2.15 dB.


Report No.: RF180521C04C Page No. 11 / 30 Report Format Version: 6.1.1




4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

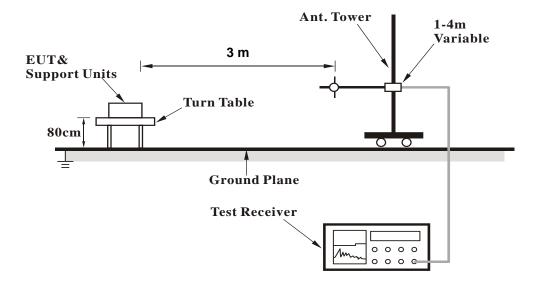

<Radiated Emission above 1 GHz>

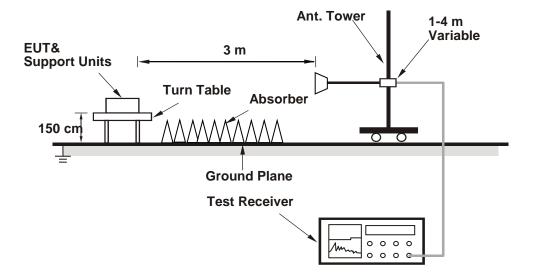

For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.1.4 Test Results

EIRP Power (dBm)

	LTE Band 2								
Channel Bandwidth: 5 MHz / QPSK									
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)		
	18625	1852.5	-18.73	36.57	17.84	60.81			
	18900	1880.0	-19.25	37.22	17.97	62.66	Н		
X	19175	1907.5	-19.30	37.18	17.88	61.38			
^	18625	1852.5	-13.76	37.65	23.89	244.91			
	18900	1880.0	-13.66	37.58	23.92	246.60	V		
	19175	1907.5	-13.64	37.48	23.84	242.10			
		Cł	nannel Bandw	/idth: 5 MHz/	16QAM				
	18625	1852.5	-19.98	36.57	16.59	45.60			
	18900	1880.0	-20.47	37.22	16.75	47.32	Н		
X	19175	1907.5	-20.55	37.18	16.63	46.03			
^	18625	1852.5	-15.06	37.65	22.59	181.55			
	18900	1880.0	-14.84	37.58	22.74	187.93	V		
	19175	1907.5	-14.86	37.48	22.62	182.81			

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2								
Channel Bandwidth: 10 MHz / QPSK								
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)	
	18650	1855.0	-18.68	36.57	17.89	61.52		
	18900	1880.0	-19.13	37.22	18.09	64.42	Н	
X	19150	1905.0	-19.24	37.18	17.94	62.23		
_ ^	18650	1855.0	-13.70	37.65	23.95	248.31		
	18900	1880.0	-13.60	37.58	23.98	250.03	V	
	19150	1905.0	-13.60	37.48	23.88	244.34		
		Ch	annel Bandw	idth: 10 MHz /	16QAM			
	18650	1855.0	-19.86	36.57	16.71	46.88		
	18900	1880.0	-20.36	37.22	16.86	48.53	Н	
X	19150	1905.0	-20.41	37.18	16.77	47.53		
^	18650	1855.0	-14.93	37.65	22.72	187.07		
	18900	1880.0	-14.78	37.58	22.80	190.55	V	
	19150	1905.0	-14.75	37.48	22.73	187.50		

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)



LTE Band 2								
Channel Bandwidth: 15 MHz / QPSK								
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)	
	18675	1857.5	-18.64	36.57	17.93	62.09		
	18900	1880.0	-19.09	37.22	18.13	65.01	Н	
X	19125	1902.5	-19.21	37.18	17.97	62.66		
^	18675	1857.5	-13.66	37.65	23.99	250.61	V	
	18900	1880.0	-13.54	37.58	24.04	253.51		
	19125	1902.5	-13.52	37.48	23.96	248.89		
		Ch	annel Bandw	idth: 15 MHz /	16QAM			
	18675	1857.5	-19.72	36.57	16.85	48.42		
	18900	1880.0	-20.19	37.22	17.03	50.47	Н	
X	19125	1902.5	-20.28	37.18	16.90	48.98		
^	18675	1857.5	-14.72	37.65	22.93	196.34		
	18900	1880.0	-14.70	37.58	22.88	194.09	V	
	19125	1902.5	-14.69	37.48	22.79	190.11		

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2									
Channel Bandwidth: 20 MHz / QPSK									
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)		
	18700	1860.0	-18.56	36.57	18.01	63.24			
	18900	1880.0	-19.03	37.22	18.19	65.92	Н		
X	19100	1900.0	-19.13	37.18	18.05	63.83			
^	18700	1860.0	-13.60	37.65	24.05	254.10			
	18900	1880.0	-13.47	37.58	24.11	257.63	V		
	19100	1900.0	-13.45	37.48	24.03	252.93			
		Ch	annel Bandw	idth: 20 MHz /	16QAM				
	18700	1860.0	-19.59	36.57	16.98	49.89			
	18900	1880.0	-20.07	37.22	17.15	51.88	Н		
X	19100	1900.0	-20.14	37.18	17.04	50.58			
^	18700	1860.0	-14.66	37.65	22.99	199.07			
	18900	1880.0	-14.54	37.58	23.04	201.37	V		
	19100	1900.0	-14.46	37.48	23.02	200.45			

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)



4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit is equal to -13 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power 2.15 dB.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

Report No.: RF180521C04C Page No. 15 / 30 Report Format Version: 6.1.1




4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

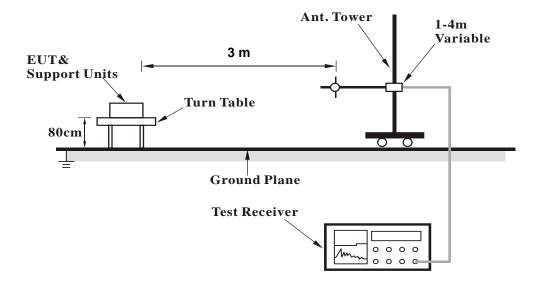

<Radiated Emission above 1 GHz>

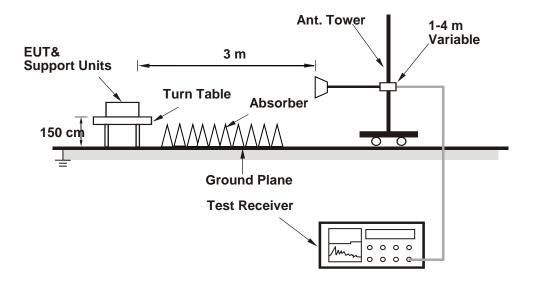

For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.2.5 Test Results

LTE Band 2


Channel Bandwidth: 5 MHz / QPSK

Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch



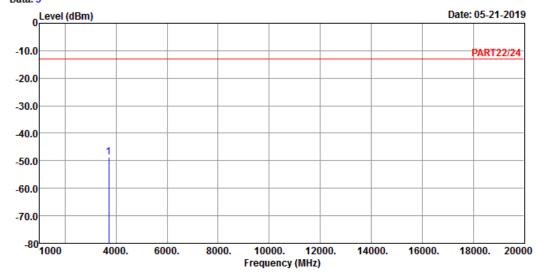

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_5M Link_L-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dBm dB dB

1 pp 3705.00 -48.74 -41.81 -13.00 -6.93 -35.74 Peak


Report No.: RF180521C04C Page No. 17 / 30 Report Format Version: 6.1.1



Report Format Version: 6.1.1



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

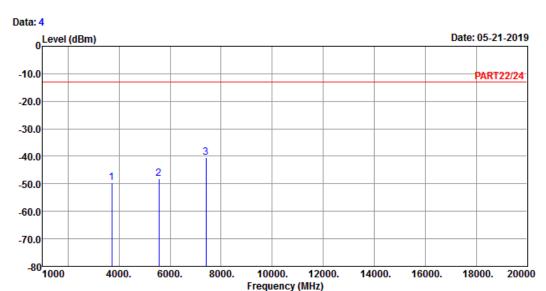

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_5M Link_L-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dBm dB dB


1 3705.00 -49.60 -42.67 -13.00 -6.93 -36.60 Peak 2 5557.50 -48.08 -46.17 -13.00 -1.91 -35.08 Peak 3 pp 7410.00 -40.34 -44.47 -13.00 4.13 -27.34 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

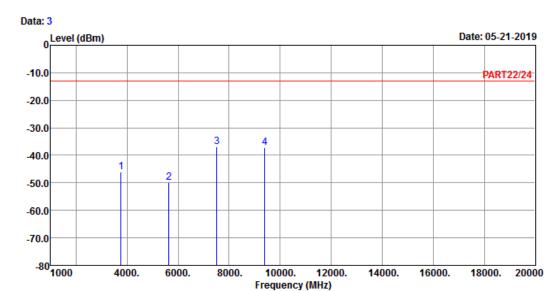

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_5M Link_M-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark


MHz dBm dBm dBm dB dB

1 3760.00 -45.98 -39.33 -13.00 -6.65 -32.98 Peak 2 5640.00 -49.78 -47.92 -13.00 -1.86 -36.78 Peak 3 pp 7520.00 -36.78 -40.99 -13.00 4.21 -23.78 Peak 4 9400.00 -37.19 -42.26 -13.00 5.07 -24.19 Peak





Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

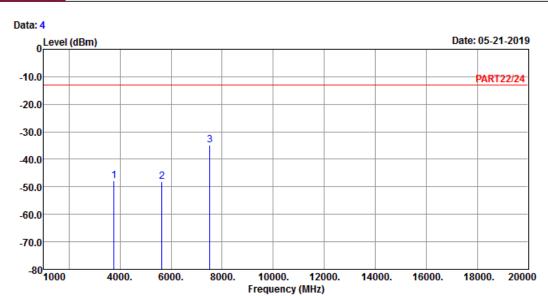

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_5M Link_M-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dBm dB dB


1 3760.00 -47.91 -41.26 -13.00 -6.65 -34.91 Peak 2 5640.00 -48.18 -46.32 -13.00 -1.86 -35.18 Peak 3 pp 7520.00 -34.93 -39.14 -13.00 4.21 -21.93 Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

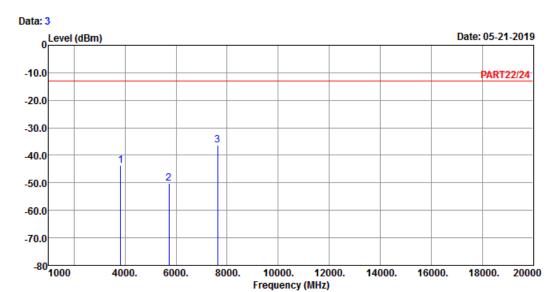

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_5M Link_H-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark


MHz dBm dBm dBm dB dB

1 3815.00 -43.75 -37.35 -13.00 -6.40 -30.75 Peak 2 5722.50 -50.07 -48.38 -13.00 -1.69 -37.07 Peak 3 pp 7630.00 -36.40 -40.91 -13.00 4.51 -23.40 Peak





Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

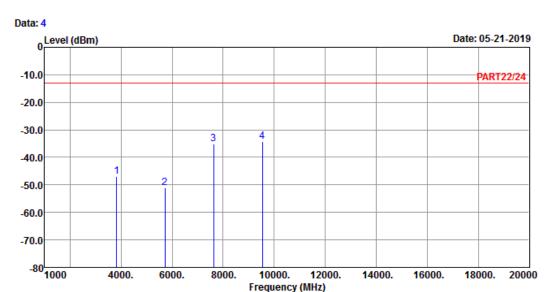

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_5M Link_H-CH

Tested by: Getaz Yang


Read Limit 0ver Line Factor Limit Remark Freq Level Level MHz dBm dBm dBm dB dB 1 3815.00 -46.80 -40.40 -13.00 -6.40 -33.80 Peak 2 5722.50 -51.19 -49.50 -13.00 -1.69 -38.19 Peak 7630.00 -35.06 -39.57 -13.00 4.51 -22.06 Peak 4 pp 9537.50 -34.39 -39.78 -13.00 5.39 -21.39 Peak



Channel Bandwidth: 20 MHz / QPSK Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

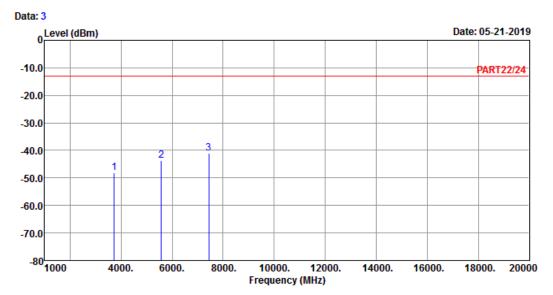

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_20M Link_L-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark


MHz dBm dBm dBm dB dB

1 3720.00 -48.01 -41.19 -13.00 -6.82 -35.01 Peak 2 5580.00 -43.73 -41.81 -13.00 -1.92 -30.73 Peak 3 pp 7440.00 -40.90 -45.05 -13.00 4.15 -27.90 Peak





Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

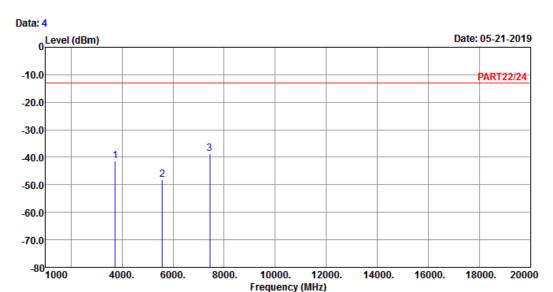

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_20M Link_L-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dB dB dB


1 3720.00 -41.34 -34.52 -13.00 -6.82 -28.34 Peak 2 5580.00 -47.98 -46.06 -13.00 -1.92 -34.98 Peak 3 pp 7440.00 -38.59 -42.74 -13.00 4.15 -25.59 Peak



Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

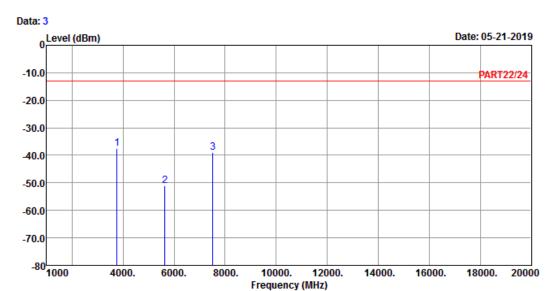

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_20M Link_M-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dBm dB dB


1 pp 3760.00 -37.42 -30.77 -13.00 -6.65 -24.42 Peak 2 5635.00 -51.10 -49.24 -13.00 -1.86 -38.10 Peak 3 7520.00 -38.91 -43.12 -13.00 4.21 -25.91 Peak



Report Format Version: 6.1.1



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

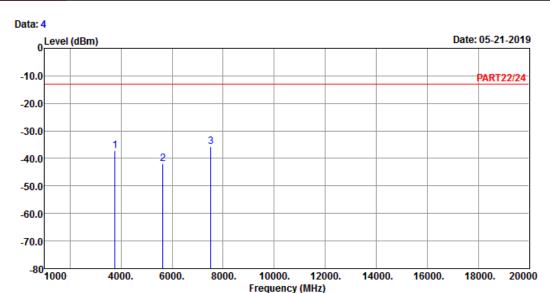

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_20M Link_M-CH

Tested by: Getaz Yang

Read Limit Over
Freq Level Level Line Factor Limit Remark

MHz dBm dBm dBm dB dB


1 3760.00 -37.26 -30.61 -13.00 -6.65 -24.26 Peak 2 5640.00 -42.06 -40.20 -13.00 -1.86 -29.06 Peak 3 pp 7520.00 -35.85 -40.06 -13.00 4.21 -22.85 Peak



High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

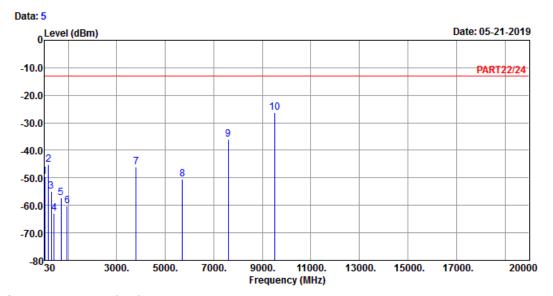

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : Cat-M1 Band 2 QPSK_20M Link_H-CH


Tested by: Getaz Yang

estet	a by. det	az lali	8				
			Read	Limit		0ver	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-49.54	-49.92	-13.00	0.38	-36.54	Peak
2	193.93	-45.23	-37.77	-13.00	-7.46	-32.23	Peak
3	304.51	-55.02	-48.08	-13.00	-6.94	-42.02	Peak
4	412.18	-62.82	-56.97	-13.00	-5.85	-49.82	Peak
5	699.30	-57.33	-57.22	-13.00	-0.11	-44.33	Peak
6	952.47	-60.34	-62.24	-13.00	1.90	-47.34	Peak
7	3800.00	-46.10	-39.67	-13.00	-6.43	-33.10	Peak
8	5700.00	-50.61	-48.88	-13.00	-1.73	-37.61	Peak
9	7600.00	-35.97	-40.44	-13.00	4.47	-22.97	Peak
10 pp	9500.00	-26.29	-31.60	-13.00	5.31	-13.29	Peak





Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

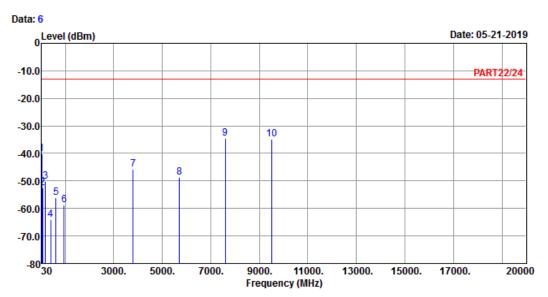

Site : 966 Chamber 5 Condition: PART22/24 VERTICAL

Remark : Cat-M1 Band 2 QPSK_20M Link_H-CH

Tested by: Getaz Yang

			Read	Limit		0ver		
	Freq	Level	Level	Line	Factor	Limit	Remark	
	MHz	dBm	dBm	dBm	dB	dB		
1	30.97	-40.11	-40.00	-13.00	-0.11	-27.11	Peak	
2	65.89	-52.56	-44.46	-13.00	-8.10	-39.56	Peak	
3	193.93	-50.14	-42.68	-13.00	-7.46	-37.14	Peak	
4	407.33	-64.03	-58.14	-13.00	-5.89	-51.03	Peak	
5	621.70	-56.06	-55.25	-13.00	-0.81	-43.06	Peak	
6	954.41	-58.88	-60.85	-13.00	1.97	-45.88	Peak	
7	3800.00	-45.61	-39.18	-13.00	-6.43	-32.61	Peak	
8	5700.00	-48.64	-46.91	-13.00	-1.73	-35.64	Peak	
9 pr	7600.00	-34.65	-39.12	-13.00	4.47	-21.65	Peak	
10	9500.00	-34.73	-40.04	-13.00	5.31	-21.73	Peak	



5 Pictures of Test Arrangements							
Please refer to the attached file (Test Setup Photo).							



Appendix - Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180 Fax: 886-2-26051924 Hsin Chu EMC/RF/Telecom Lab Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---

Report No.: RF180521C04C Page No. 30 / 30 Report Format Version: 6.1.1