

Appendix RF test data for BLE

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.094	0.625	15.04	8.23	0.00
		2440	0.094	0.625	15.04	8.23	0.00
		2480	0.094	0.625	15.04	8.23	0.00


1.2 Test Graph

1.2.1 Ant1

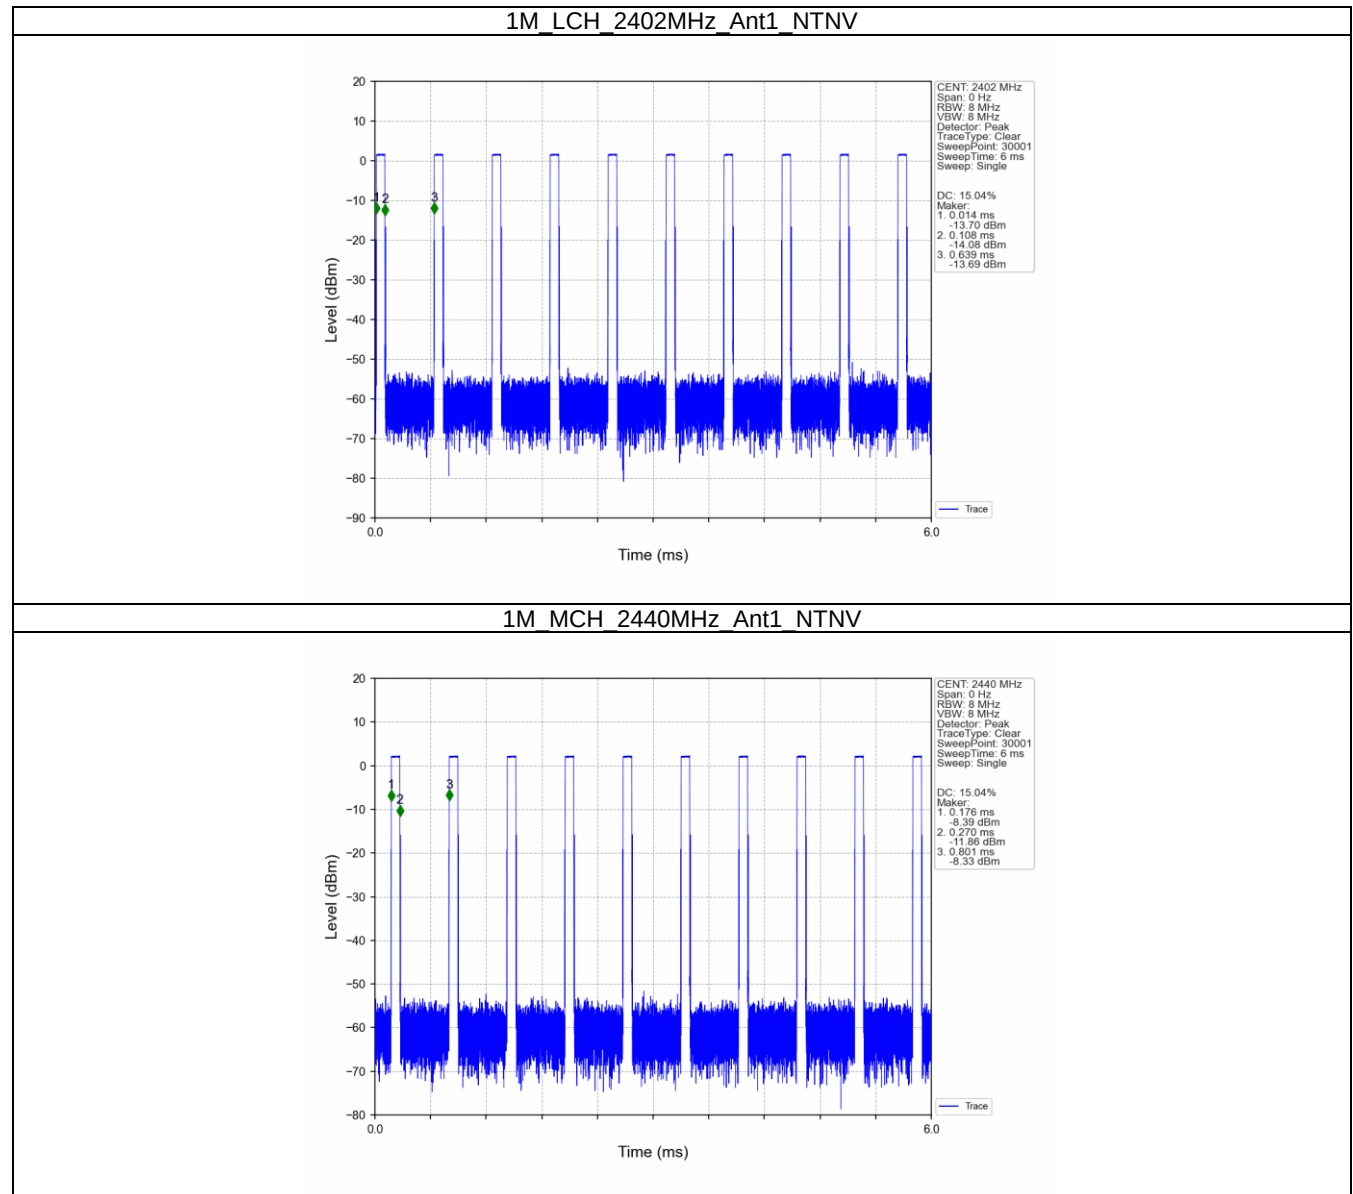



1M_HCH_2480MHz_Ant1_NTNV

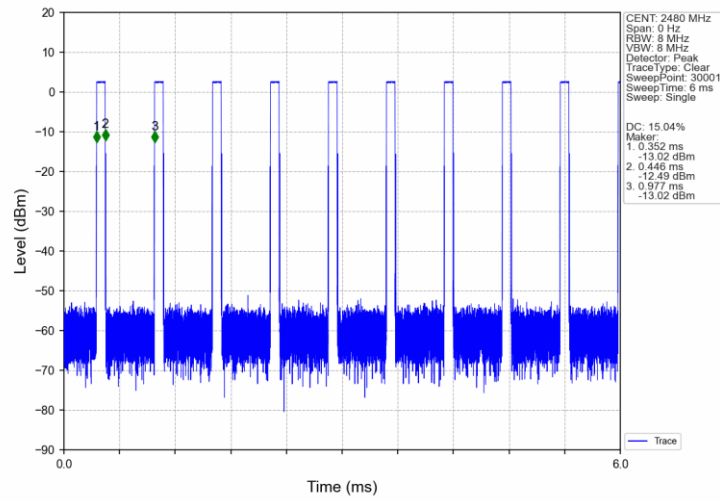

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.019	/	Pass
		2440	1	1.019	/	Pass
		2480	1	1.020	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.507	≥ 0.5	Pass
		2440	1	0.503	≥ 0.5	Pass
		2480	1	0.504	≥ 0.5	Pass


2.2 Test Graph

2.2.1 OBW

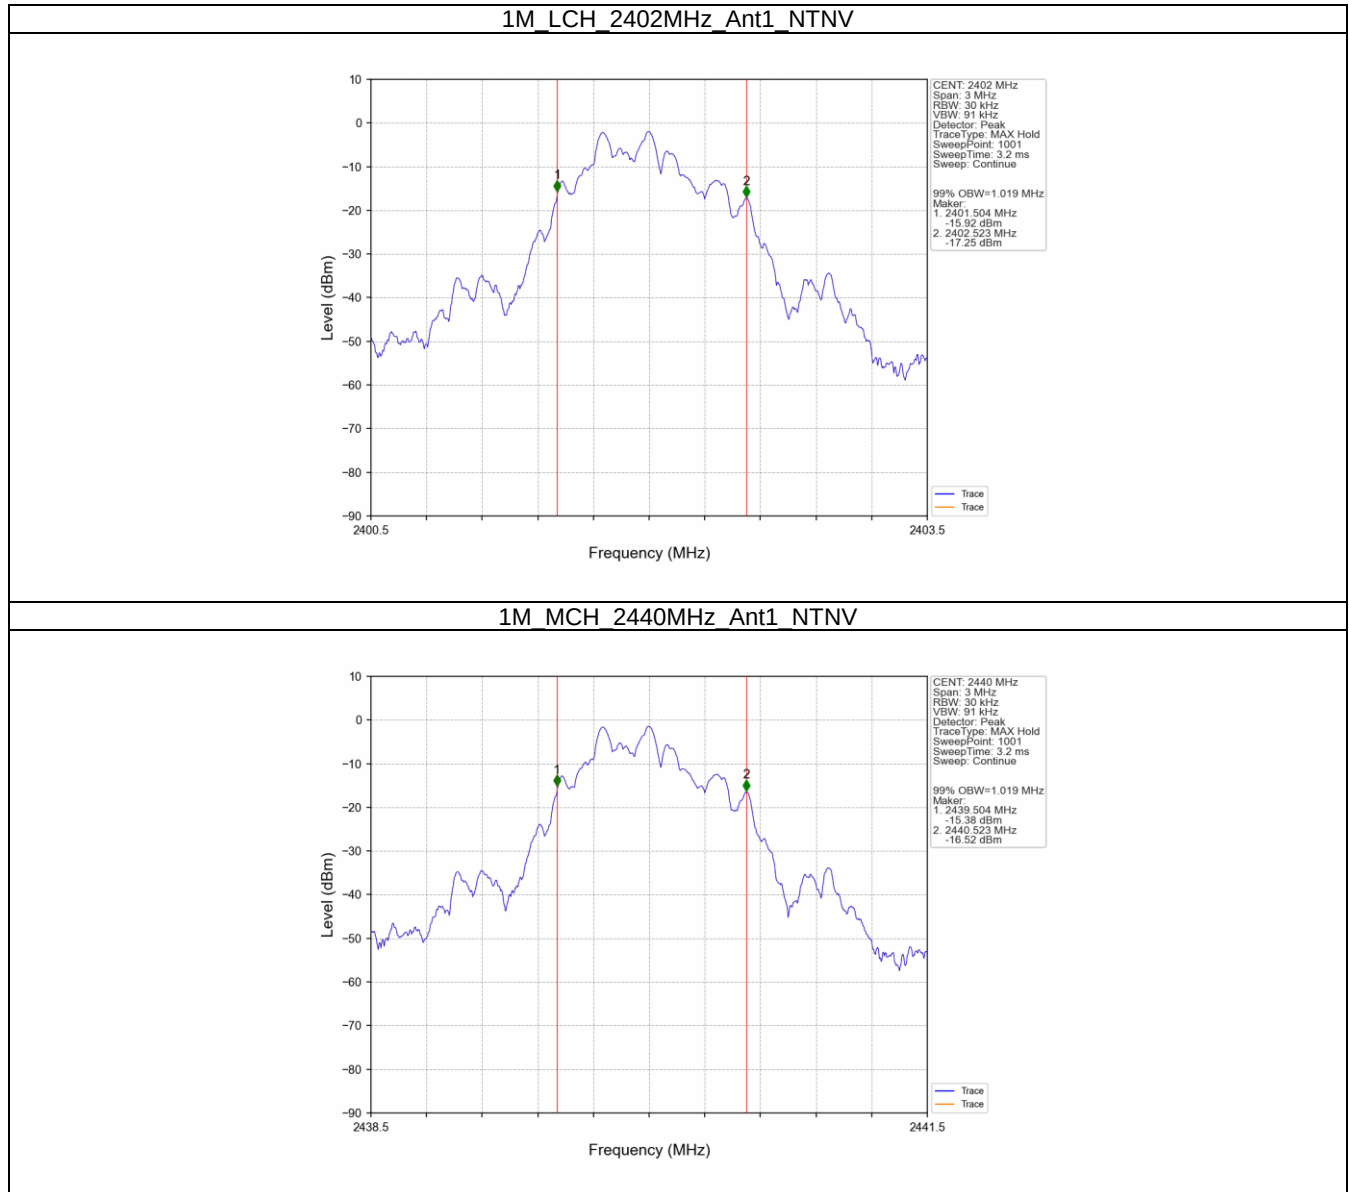




1M_HCH_2480MHz_Ant1_NTNV

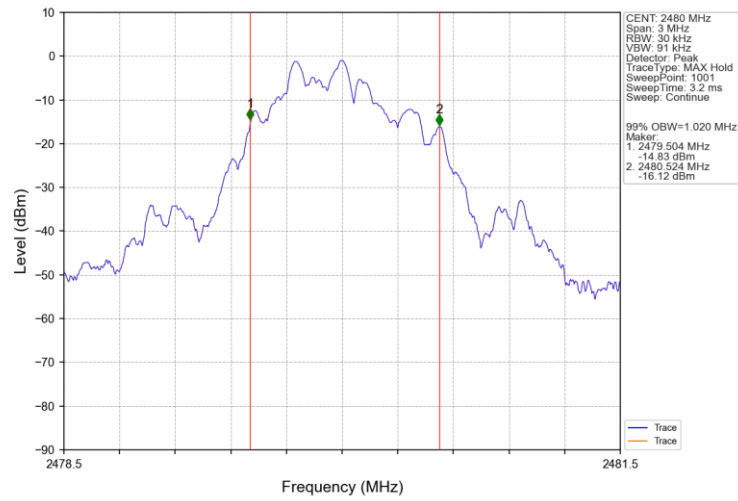


2.2.2 6dB BW


1M LCH 2402MHz Ant1 NTN

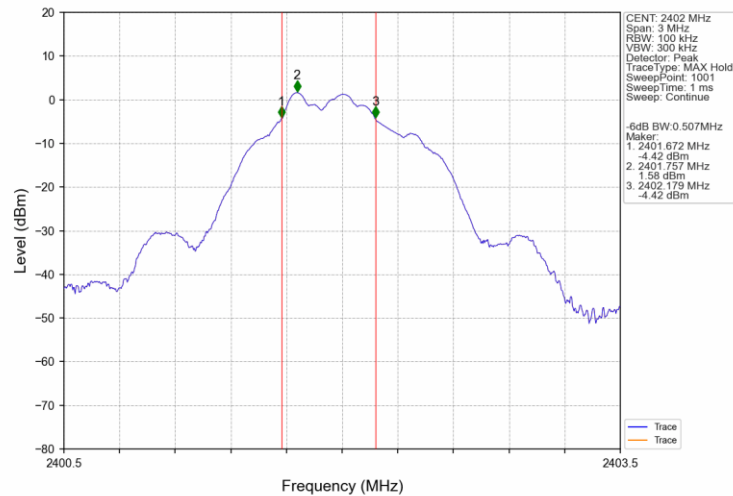

1M MCH 2440MHz Ant1 NTN

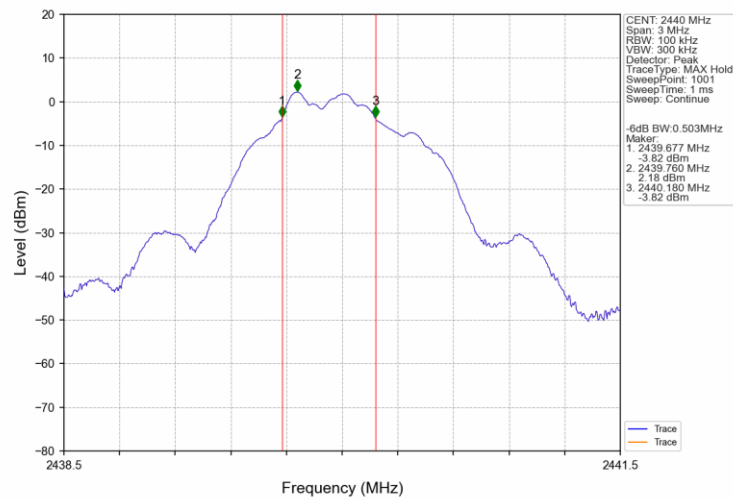

1M_HCH_2480MHz_Ant1_NTNV

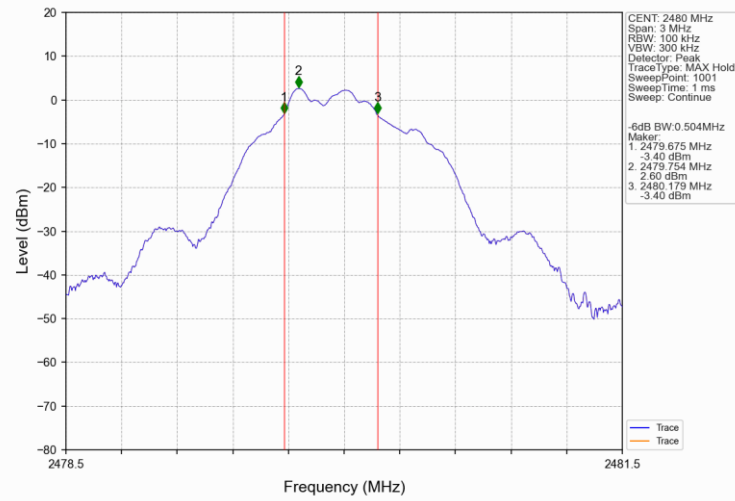

3. Maximum Conducted Peak Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.61	≤ 30	Pass
		2440	2.21	≤ 30	Pass
		2480	2.62	≤ 30	Pass

3.2 Test Graph

3.2.1 Power

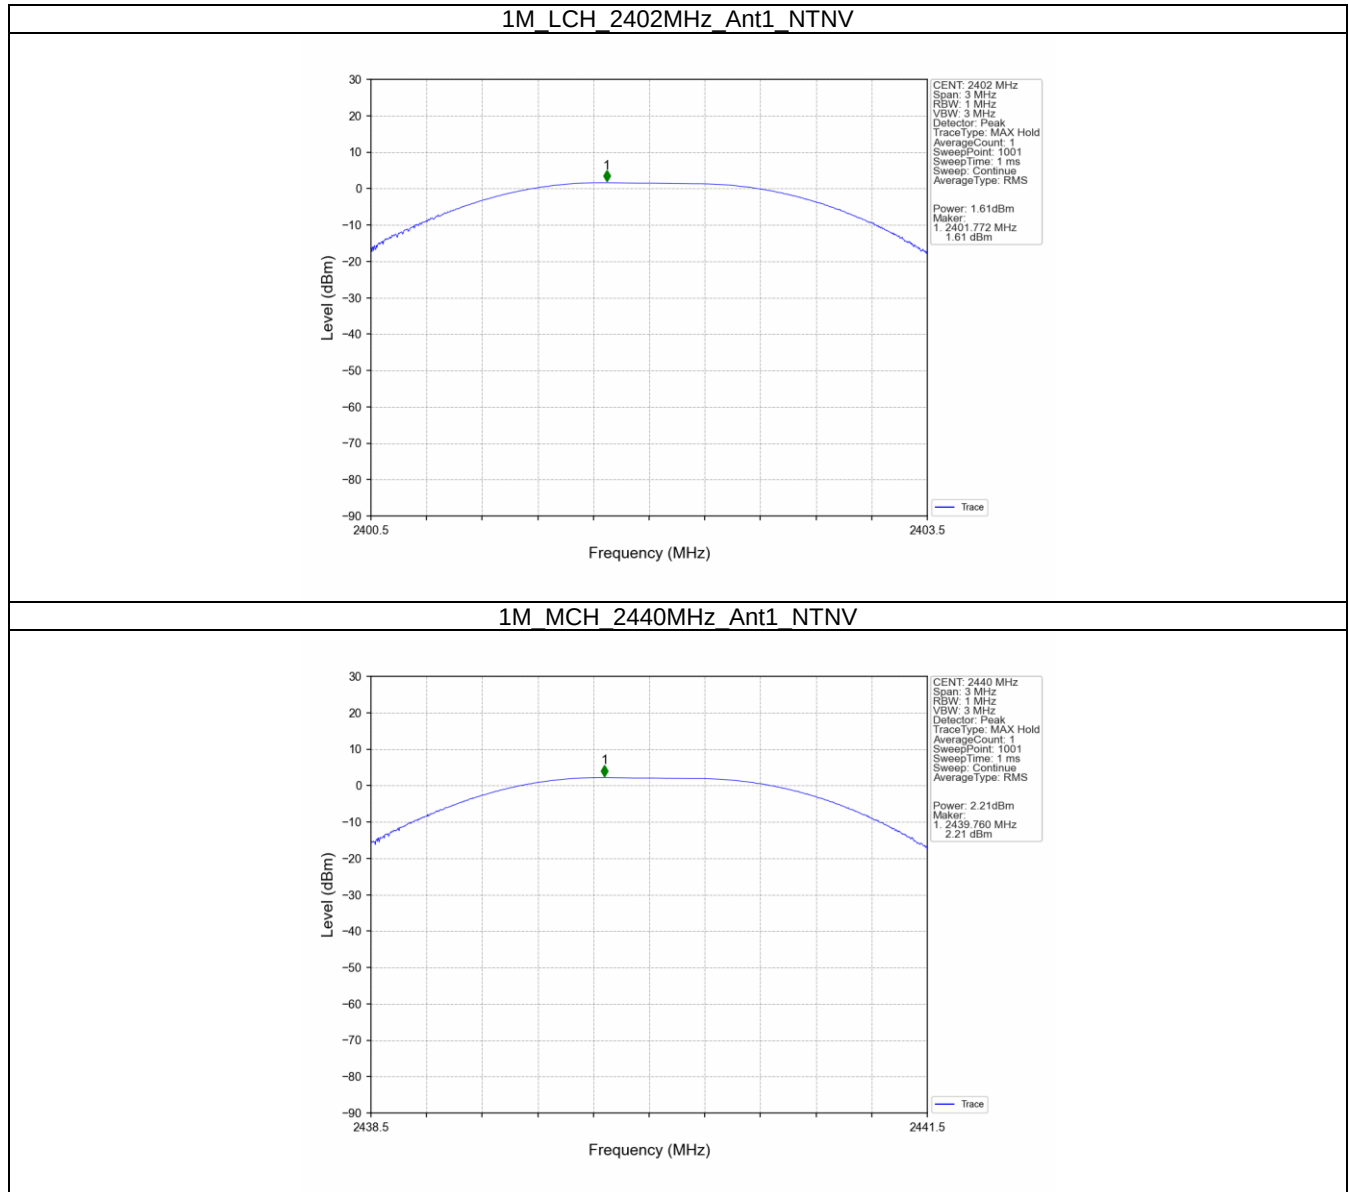

1M_HCH_2480MHz_Ant1_NTNV

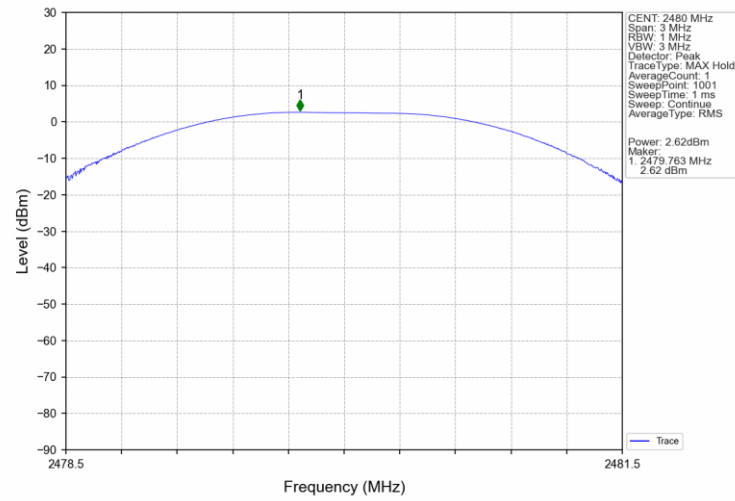

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-16.36	<=8	Pass
		2440	-15.86	<=8	Pass
		2480	-15.40	<=8	Pass

4.2 Test Graph

4.2.1 PSD

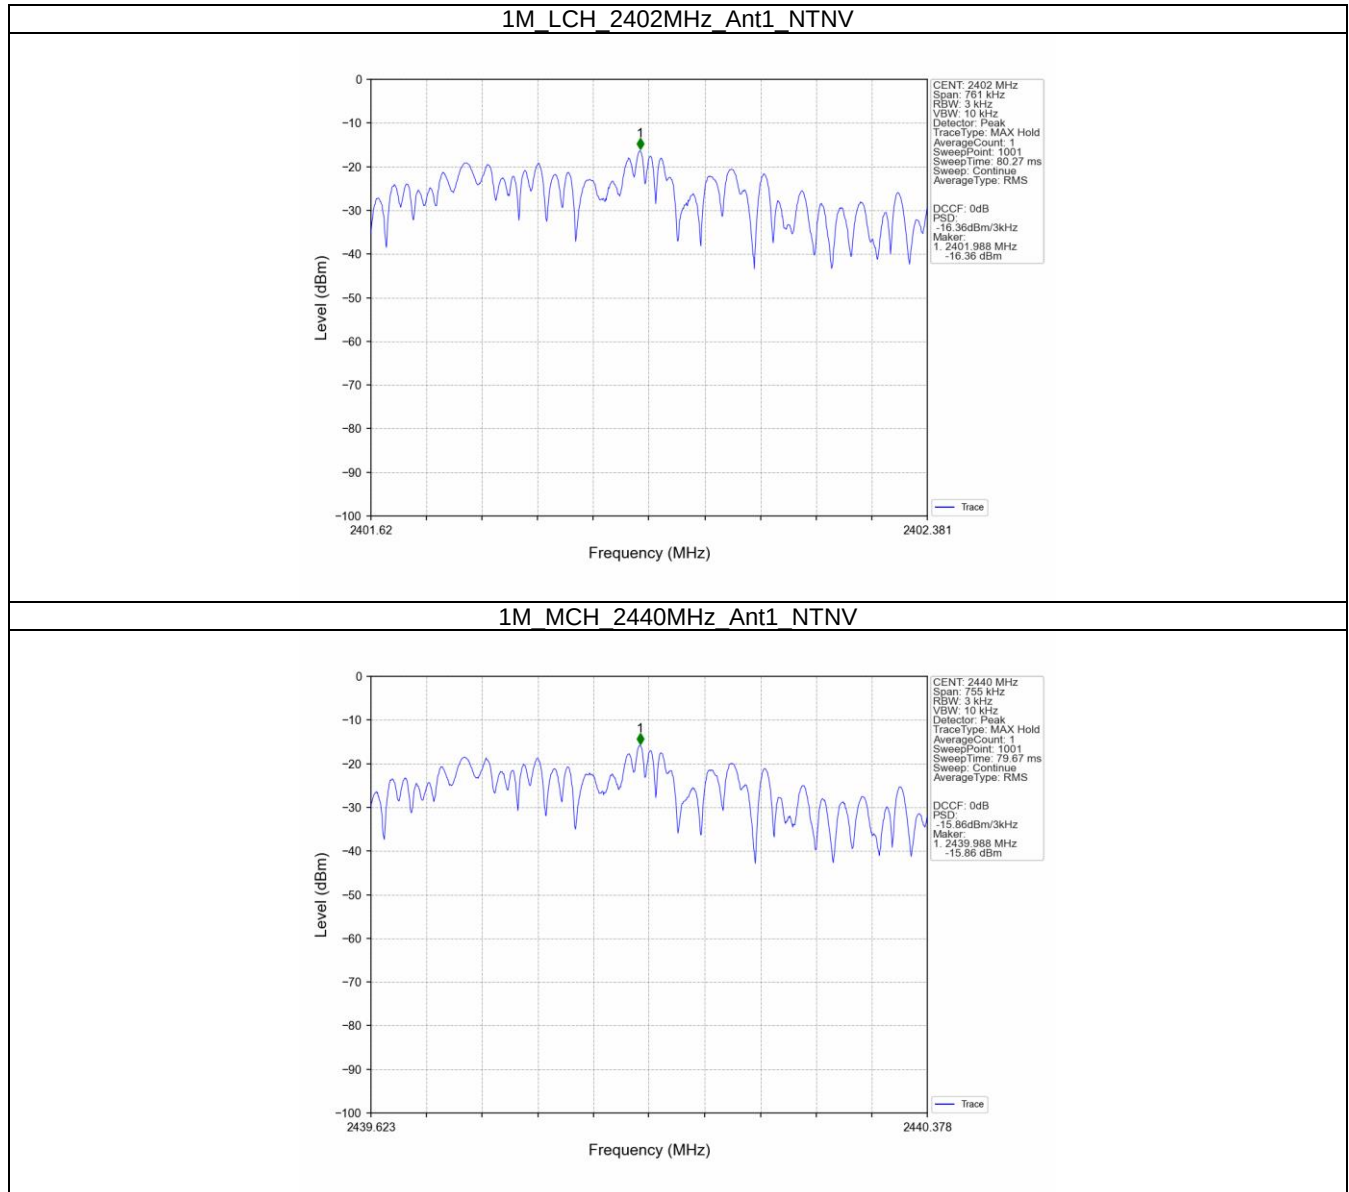

1M_HCH_2480MHz_Ant1_NTNV

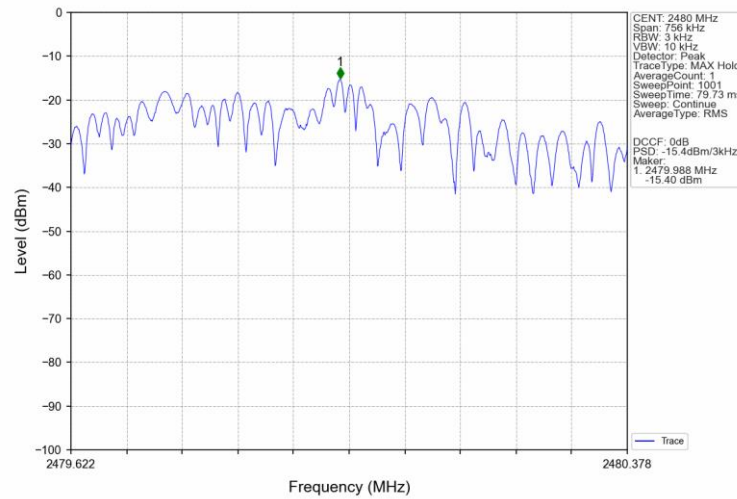



5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	Tx Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	1.58
		2440	1	2.18
		2480	1	2.60
Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	1.58	-18.42	Pass
		2440	1	2.18	-17.82	Pass
		2480	1	2.60	-17.40	Pass
Note1: Refer to RSS-247 Issue 3 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph

5.2.1 Ref

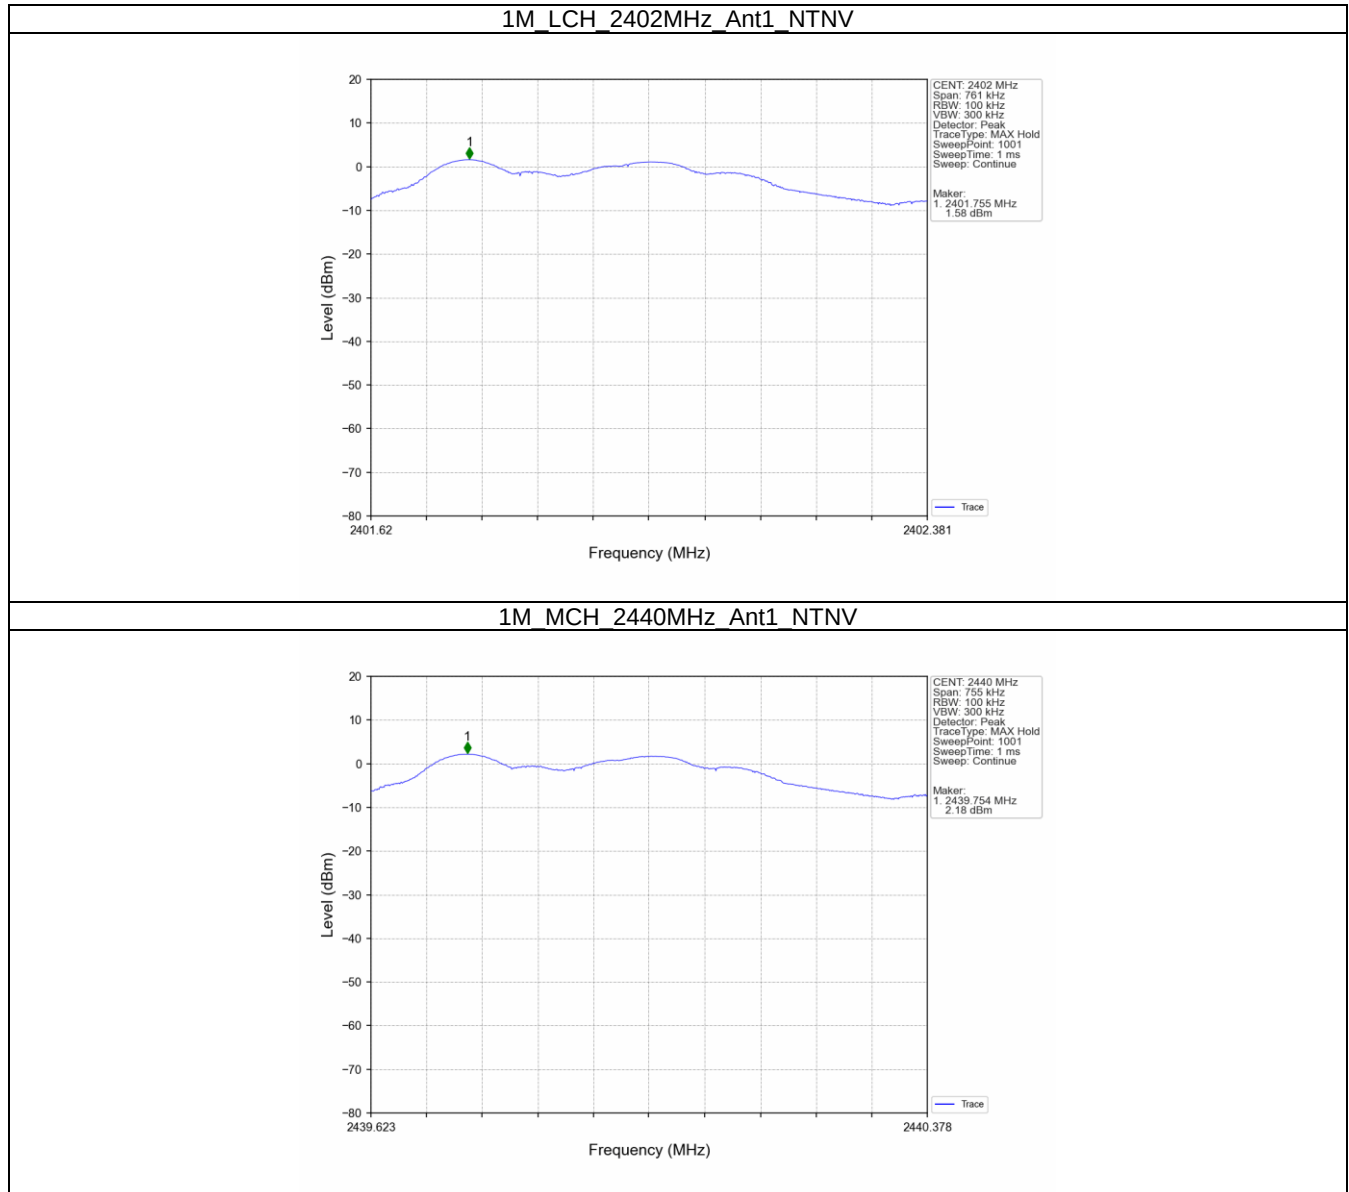


1M_HCH_2480MHz_Ant1_NTNV

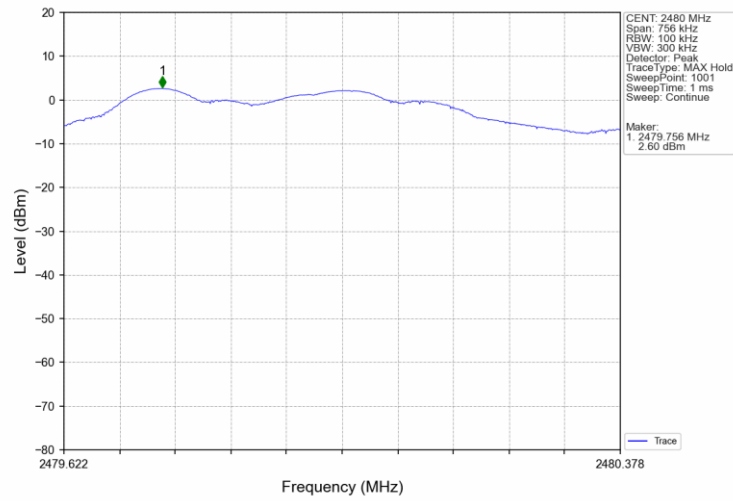


5.2.2 CSE


1M LCH_2402MHz_Ant1_NTNV

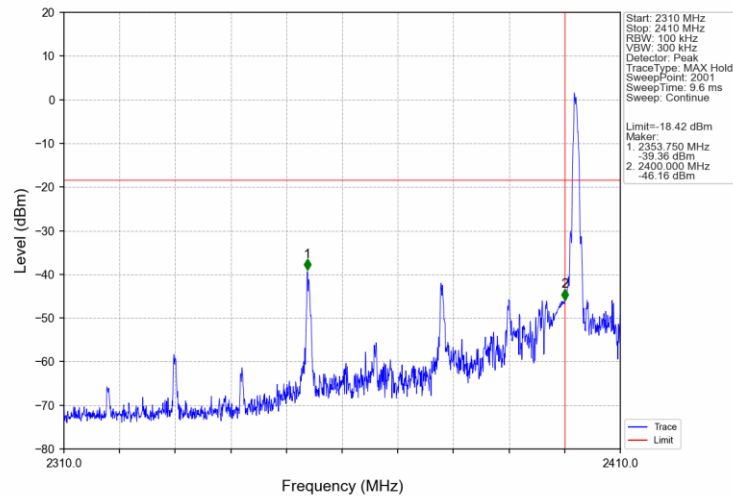


1M LCH_2402MHz_Ant1_NTNV

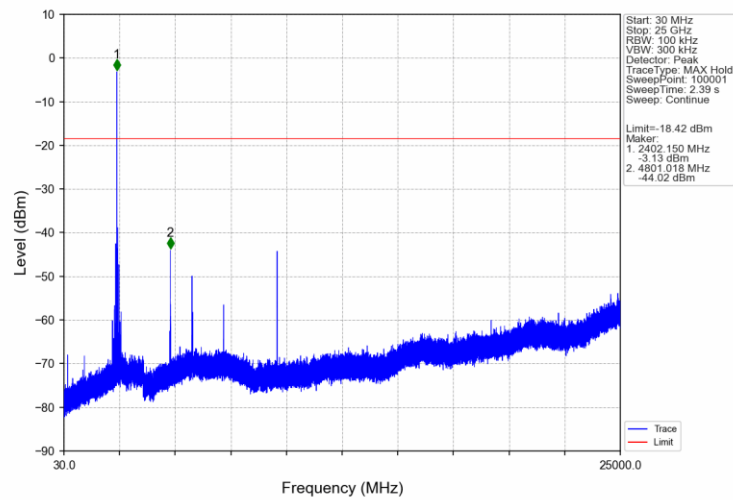

1M_MCH_2440MHz_Ant1_NTNV

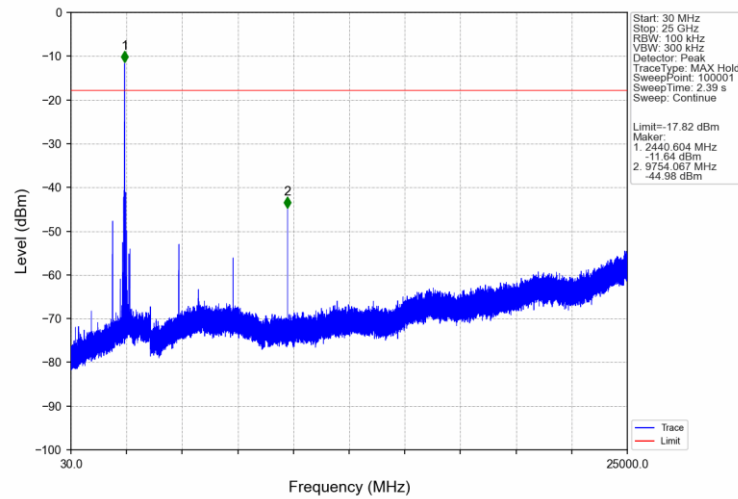


1M_HCH_2480MHz_Ant1_NTNV

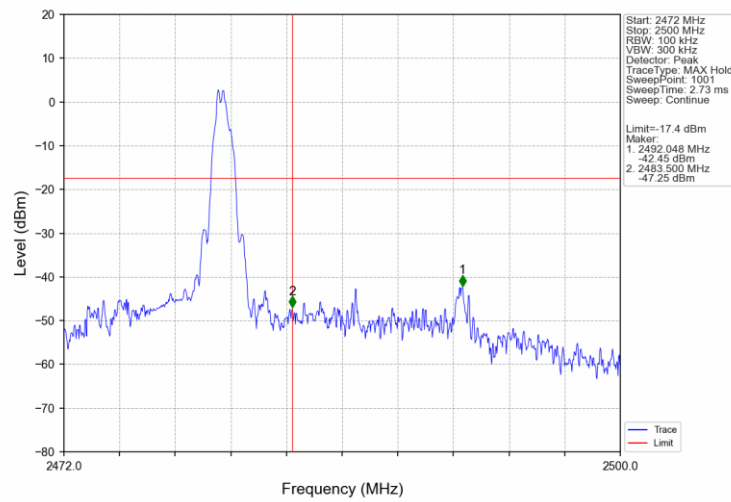



1M_HCH_2480MHz_Ant1_NTNV

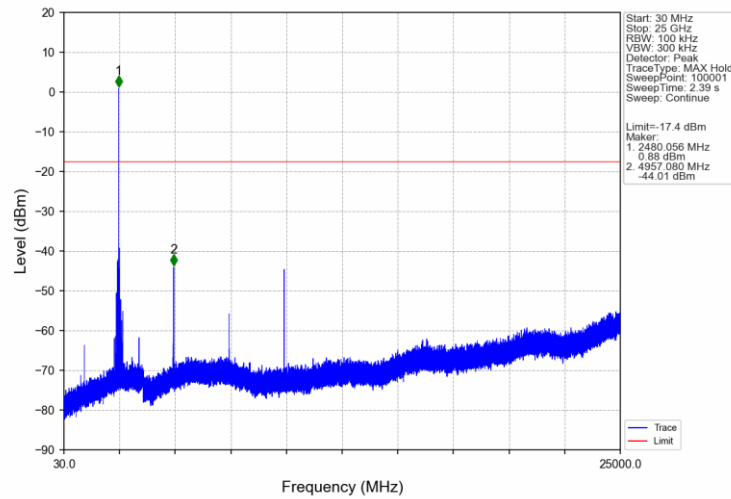

***** End of Report *****