

FCC TEST REPORT

FOR
ACOUSTMAX INTERNATIONAL CO., LTD
Monster FLAME
TEST Model No.: MNFLAME

Prepared for : ACOUSTMAX INTERNATIONAL CO., LTD
Address : Unit D16/F Cheuk Nang Plaza 250 Hennessy Road Wanchai HongKong

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 04, 2019
Number of tested samples : 1
Sample number : Prototype
Date of Test : January 07, 2019 ~ January 10, 2019
Date of Report : January 15, 2019

FCC TEST REPORT

FCC CFR 47 PART 15 C (15.249)

Report Reference No. : LCS190103008AEC

Date of Issue : January 15, 2019

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method**Applicant's Name** : ACOUSTMAX INTERNATIONAL CO., LTD

Address : Unit D16/F Cheuk Nang Plaza 250 Hennessy Road Wanchai HongKong

Test Specification

Standard : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


Test Item Description : Monster FLAME

Trade Mark : Monster


Test Model : MNFLAME

Ratings : DC 3.7V by rechargeable Lithium-ion battery(2200mAh) *3
Recharged by DC 15V/2A adapter**Result** : Positive**Compiled by:**

Linda He / File administrators

Supervised by:

Calvin Weng/Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. :	LCS190103008AEC	January 15, 2019
		Date of issue

Test Model.....	: MNFLAME
EUT.....	: Monster FLAME
Applicant.....	: ACOUSTMAX INTERNATIONAL CO., LTD
Address.....	: Unit D16/F Cheuk Nang Plaza 250 Hennessy Road Wanchai HongKong
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen AngSi Technology Co., LTD
Address.....	: B-602, LingYun Buiding, Honglang North NO 2.Road, Baoan District, Shenzhen, China
Telephone.....	: /
Fax.....	: /
Factory.....	: /
Address.....	: /
Telephone.....	: /
Fax.....	: /

Test Result	Positive
-------------	----------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	January 15, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	7
1.1 Description of Device (EUT)	7
1.2 Support equipment List	7
1.3 External I/O Cable.....	7
1.4 Description of Test Facility.....	8
1.5 Statement of the Measurement Uncertainty	8
1.6 Measurement Uncertainty.....	8
1.7 Description of Test Modes	9
2. TEST METHODOLOGY	10
2.1 EUT Configuration	10
2.2 EUT Exercise	10
2.3 General Test Procedures.....	10
2.3.1 Conducted Emissions	10
2.3.2 Radiated Emissions.....	10
3. SYSTEM TEST CONFIGURATION	11
3.1 Justification.....	11
3.2 EUT Exercise Software	11
3.3. Special Accessories.....	11
3.4 Block Diagram/Schematics.....	11
3.5 Equipment Modifications	11
3.6 Test Setup	11
4. SUMMARY OF TEST RESULT	12
5. SUMMARY OF TEST EQUIPMENT.....	13
6. ANTENNA REQUIREMENT	14
6.1. Standard Applicable.....	14
6.2. Antenna Connected Construction	14
6.3. Result: Compliance.....	14
7. RADIATED EMISSION MEASUREMENT.....	15
7.1. Standard Applicable.....	15
7.2. Instruments Setting.....	15
7.3. Test Procedure	16
7.4. Block Diagram of Test Setup	20
7.5. Test Results	21
8. 20 DB BANDWIDTH MEASUREMENT.....	25
8.1. Standard Applicable.....	25
8.2. Block Diagram of Test Setup	25
8.3. Test Procedure	25
8.4. Test Results	25
9. AC POWER LINE CONDUCTED EMISSIONS	27
9.1 Standard Applicable.....	27
9.2 Block Diagram of Test Setup	27
9.3 Test Results	27
10. BANDEDGES MEASUREMENT	29
10.1. Standard Applicable	29
10.2. Block Diagram of Test Setup	29
10.3. Test Procedure.....	29
10.4. Test Results	29
11. TEST SETUP PHOTOGRAPHS.....	32

12. EXTERIOR PHOTOGRAPHS OF THE EUT	32
13. INTERIOR PHOTOGRAPHS OF THE EUT	32

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT	:	Monster FLAME
Test Model	:	MNFLAME
Additional Model No.	:	/
Model Declaration	:	/
Power Supply	:	DC 3.7V by rechargeable Lithium-ion battery(2200mAh) *3 Recharged by DC 15V/2A adapter
Hardware Version	:	1.0
Software Version	:	1.0
Bluetooth Operation frequency	:	2402 – 2480 MHz

Bluetooth Version	:	V4.0
Bluetooth Channel Number	:	79 Channels for Bluetooth V4.0 (BT Classics) 40 Channels for Bluetooth V4.0 (BT LE)
Bluetooth Channel Spacing	:	1MHz for Bluetooth V4.0 (BT Classics) 2MHz for Bluetooth V4.0 (BT LE)
Bluetooth Modulation Type	:	GFSK, π/4-DQPSK, 8DPSK for Bluetooth V4.0 (BT Classics) GFSK, for Bluetooth V4.0 (BT LE)
Antenna Description	:	PCB antenna, 4dBi (Max.)

5G

Frequency Range	:	5736MHz ~ 5814MHz
Channel Number	:	3 channels(5736MHz, 5762MHz, 5814MHz)
Modulation Type	:	QPSK
Antenna Description	:	Two same antenna, and the antenna can not simultaneously transmitted
		PCB Antenna, 4dBi (max.)

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
MASS	AC adapter	NBS30D150200HU	--	VOC

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Micro USB Port	1	--
DC IN Port	1	--

1.4 Description of Test Facility

FCC Registration Number. is 254912.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

NVLAP Registration Code is 600167-0

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	: 9KHz~30MHz	9KHz~30MHz	3.10dB	(1)
	: 30MHz~200MHz	30MHz~200MHz	2.96dB	(1)
	: 200MHz~1000MHz	200MHz~1000MHz	3.10dB	(1)
	: 1GHz~26.5GHz	1GHz~26.5GHz	3.80dB	(1)
	: 26.5GHz~40GHz	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	: 150kHz~30MHz	150kHz~30MHz	1.63dB	(1)
Power disturbance	: 30MHz~300MHz	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

The EUT operates in the unlicensed ISM band at 5.8GHz. The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report.

The EUT is considered a portable unit and was set to transmit at 100% duty cycle. It was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane.

Mode of operations	Transmitting frequency (MHz)
QPSK	5736, 5762, 5814
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Channel List & Frequency:

Test Mode	Channel	Frequency Range (MHz)
TX	3	5736, 5762, 5814
Standby	--	--

1.8. Directional Antenna Gain

The directional gain is:

Antenna 0 Gain (dBi)	Antenna 1 Gain (dBi)
4.0	4.0

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in FCC MP-5 for Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in FCC MP-5 for radiated emission.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmit condition Continuous transmitting.

3.2 EUT Exercise Software

N/A.

3.3. Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULT

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.205	Band Edges Measurement	Compliant
§15.249, §15.215	20 dB Bandwidth	Compliant
§15.209(a)	BandEdges Measurement	Compliant

Note: The other spurious is less than 20dB in the report for restricted bands.

5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2018-06-16	2019-06-15
2	Power Sensor	R&S	NRV-Z81	100458	2018-06-16	2019-06-15
3	Power Sensor	R&S	NRV-Z32	10057	2018-06-16	2019-06-15
4	Test Software	Tonscend	JS1120-2	N/A	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2018-06-16	2019-06-15
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2018-06-16	2019-06-15
7	DC Power Supply	Agilent	E3642A	N/A	2018-11-15	2019-11-14
8	EMI Test Software	AUDIX	E3	N/A	2018-06-16	2019-06-15
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16	2019-06-15
10	Positioning Controller	MF	MF-7082	N/A	2018-06-16	2019-06-15
11	Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00005	2018-07-26	2019-07-25
12	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2018-07-26	2019-07-25
13	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2018-07-02	2019-07-01
14	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	791	2018-09-20	2019-09-19
15	Broadband Preamplifier	SCHWARZBEC K	BBV 9719	9719-025	2018-09-20	2019-09-19
16	EMI Test Receiver	R&S	ESR 7	101181	2018-06-16	2019-06-15
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15	2019-11-14
18	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018-11-15	2019-11-14
19	RF Cable-R03m	Jye Bao	RG142	CB021	2018-06-16	2019-06-15
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018-06-16	2019-06-15
21	6dB Attenuator	/	100W/6dB	1172040	2018-06-16	2019-06-15
22	3dB Attenuator	/	2N-3dB	/	2018-06-16	2019-06-15
23	EMI Test Receiver	R&S	ESPI	101840	2018-06-16	2019-06-15
24	Artificial Mains	R&S	ENV216	101288	2018-06-16	2019-06-15
25	10dB Attenuator	SCHWARZBEC K	MTS-IMP-136	261115-001-0032	2018-06-16	2019-06-15

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

6. ANTENNA REQUIREMENT

6.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 4.0dBi, and the antenna is connect to PCB board and no consideration of replacement, meet FCC §15.203 antenna requirement.

6.3. Result: Compliance.

7. RADIATED EMISSION MEASUREMENT

7.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) and 15.249 limit in the table below has to be followed.

Fundamental Frequency	Field Strength of fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.2. Instruments Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1kHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

7.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

7.4. Block Diagram of Test Setup

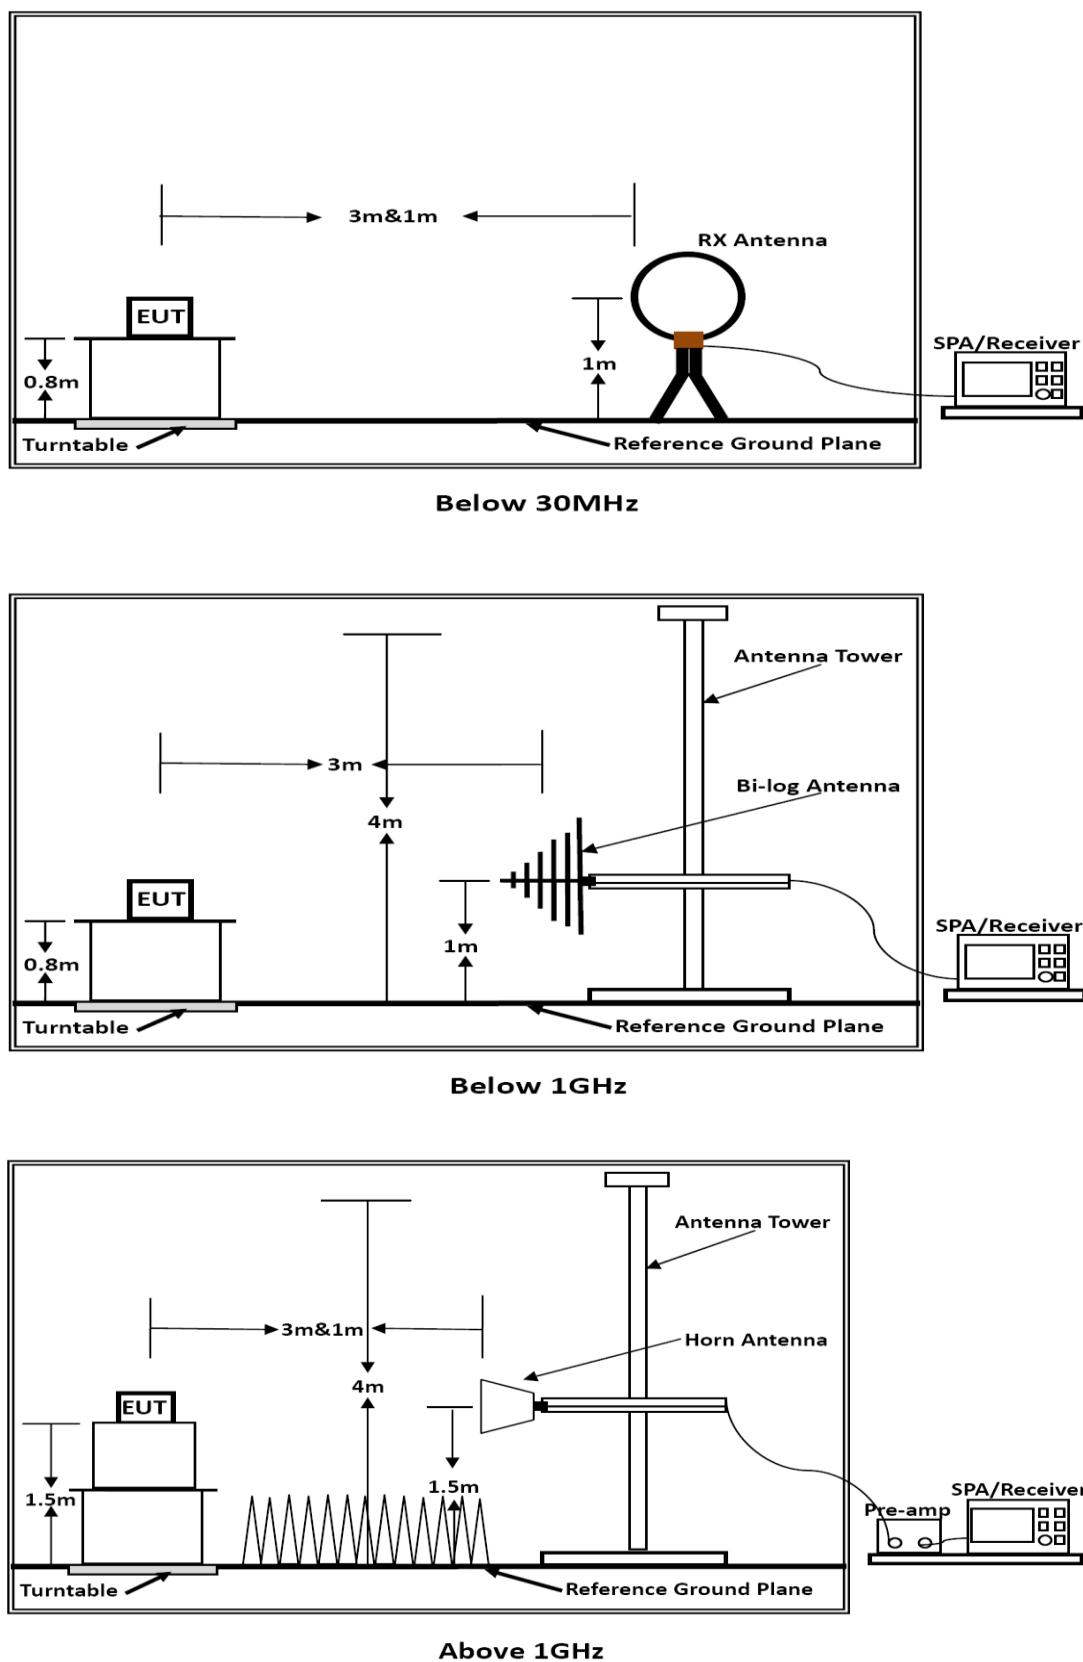

7.5. Test Results

Results of Radiated Emissions (9 KHz – 30 MHz)

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The radiated emissions from 9 KHz to 30 MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor.

Results of Radiated Emissions (30 MHz – 1000 MHz)

Temperature	23.5°C	Humidity	53.5%
Test Engineer	Diamond Lu	Test Mode	TX


Vertical

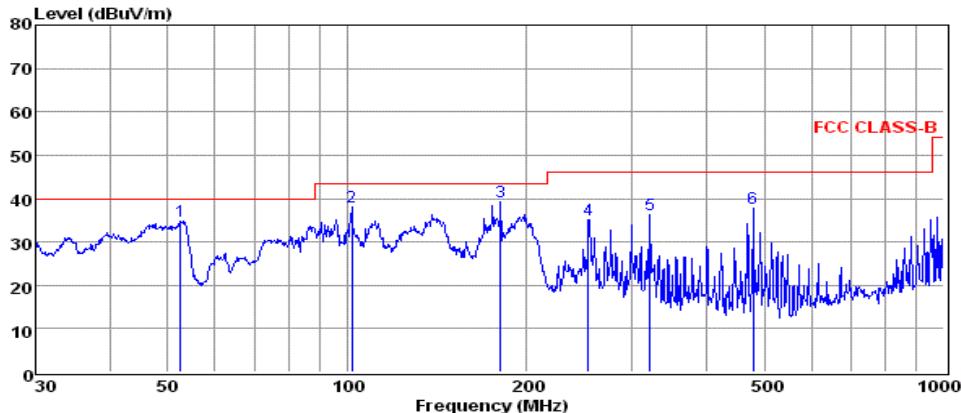

Freq MHz	Reading dBuV	CabLoss dB	Antfac dB/m	Measured dBuV/m		Limit dBuV/m	Over dB	Remark
				Measured dBuV/m	Limit dBuV/m			
1 52.58	21.16	0.46	13.13	34.75	40.00	-5.25	QP	
2 101.64	24.33	0.60	13.01	37.94	43.50	-5.56	QP	
3 180.65	28.57	0.89	9.74	39.20	43.50	-4.30	QP	
4 253.84	22.26	0.90	12.06	35.22	46.00	-10.78	QP	
5 322.19	21.76	1.16	13.42	36.34	46.00	-9.66	QP	
6 478.85	20.39	1.39	16.04	37.82	46.00	-8.18	QP	

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Horizontal

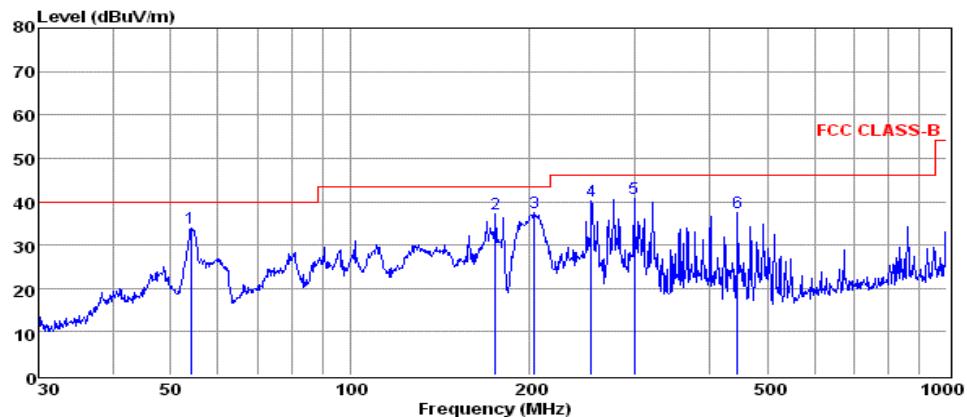

Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured		Limit dBuV/m	Over dB	Remark
				Measured dBuV/m	Measured dB			
1 54.07	20.49	0.46	13.06	34.01	40.00	-5.99	-5.99	QP
2 175.04	27.23	0.73	9.33	37.29	43.50	-6.21	-6.21	QP
3 203.52	26.00	0.82	10.68	37.50	43.50	-6.00	-6.00	QP
4 253.84	27.17	0.90	12.06	40.13	46.00	-5.87	-5.87	QP
5 299.32	26.45	1.13	13.05	40.63	46.00	-5.37	-5.37	QP
6 446.41	20.45	1.42	15.57	37.44	46.00	-8.56	-8.56	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report.
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

Results for Radiated Emissions (Above 1GHz)

For Antenna 0

Field Strength of Fundamental (TX-5736MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5736.00	H	85.52	74.30	114.00	94.00	PASS
5736.00	V	82.41	70.11	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11472	47.49	33.06	35.04	3.94	49.45	74.00	-24.55	Peak	Horizontal
11472	29.34	33.06	35.04	3.94	31.30	54.00	-22.70	Average	Horizontal
11472	48.60	33.06	35.04	3.94	50.56	74.00	-23.44	Peak	Vertical
11472	34.98	33.06	35.04	3.94	36.94	54.00	-17.06	Average	Vertical

Field Strength of Fundamental (TX-5762MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5762.00	H	86.63	75.71	114.00	94.00	PASS
5762.00	V	83.02	71.02	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11524	48.65	33.16	35.15	3.96	50.62	74.00	-23.38	Peak	Horizontal
11524	28.92	33.16	35.15	3.96	30.89	54.00	-23.11	Average	Horizontal
11524	47.88	33.16	35.15	3.96	49.85	74.00	-24.15	Peak	Vertical
11524	33.28	33.16	35.15	3.96	35.25	54.00	-18.75	Average	Vertical

Field Strength of Fundamental (TX-5814MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5814.00	H	87.18	76.35	114.00	94.00	PASS
5814.00	V	83.35	72.07	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11628	46.09	33.26	35.14	3.98	48.19	74.00	-25.81	Peak	Horizontal
11628	31.47	33.26	35.14	3.98	33.57	54.00	-20.43	Average	Horizontal
11628	49.92	33.26	35.14	3.98	52.02	74.00	-21.98	Peak	Vertical
11628	33.78	33.26	35.14	3.98	35.88	54.00	-18.12	Average	Vertical

For Antenna 1

Field Strength of Fundamental (TX-5736MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5736.00	H	85.09	74.21	114.00	94.00	PASS
5736.00	V	81.94	70.09	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11472	49.01	33.06	35.04	3.94	50.97	74.00	-23.03	Peak	Horizontal
11472	29.53	33.06	35.04	3.94	31.49	54.00	-22.51	Average	Horizontal
11472	48.39	33.06	35.04	3.94	50.35	74.00	-23.65	Peak	Vertical
11472	36.19	33.06	35.04	3.94	38.15	54.00	-15.85	Average	Vertical

Field Strength of Fundamental (TX-5762MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5762.00	H	86.03	74.89	114.00	94.00	PASS
5762.00	V	82.82	71.21	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11524	48.07	33.16	35.15	3.96	50.04	74.00	-23.96	Peak	Horizontal
11524	31.24	33.16	35.15	3.96	33.21	54.00	-20.79	Average	Horizontal
11524	49.98	33.16	35.15	3.96	51.95	74.00	-22.05	Peak	Vertical
11524	35.57	33.16	35.15	3.96	37.54	54.00	-16.46	Average	Vertical

Field Strength of Fundamental (TX-5814MHz)

Frequency (MHz)	Pol.	Measure Result (PK, dBuV/m)	Measure Result (AVG, dBuV/m)	Peak Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
5814.00	H	86.28	75.27	114.00	94.00	PASS
5814.00	V	83.05	71.66	114.00	94.00	PASS

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
11628	46.65	33.26	35.14	3.98	48.75	74.00	-25.25	Peak	Horizontal
11628	30.12	33.26	35.14	3.98	32.22	54.00	-21.78	Average	Horizontal
11628	50.17	33.26	35.14	3.98	52.27	74.00	-21.73	Peak	Vertical
11628	33.67	33.26	35.14	3.98	35.77	54.00	-18.23	Average	Vertical

Notes:


- 1). Measuring frequencies from 9 KHz - 10th harmonic (ex. 40GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz - 10th harmonic (ex. 40GHz) were made with an instrument using Peak detector mode.
- 3). 18~40GHz at least have 20dB margin. No recording in the test report.

8. 20 DB BANDWIDTH MEASUREMENT

8.1. Standard Applicable

No Limit

8.2. Block Diagram of Test Setup

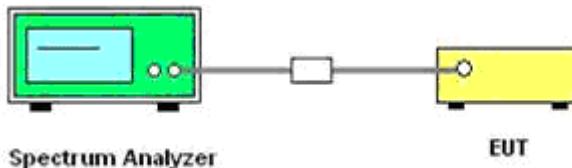

8.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 3 MHz

RBW = 100 KHz

VBW = 300 KHz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


8.4. Test Results

Temperature	24.1 °C	Humidity	53.7%
Test Engineer	Diamond Lu	Test Mode	TX

Test Result of 20dB Bandwidth Measurement				
Test Mode	Frequency (MHz)	20dB Bandwidth Measurement (MHz)		Limits (MHz)
		Antenna 0	Antenna 1	
QPSK	5736	14.89	14.80	/
QPSK	5762	15.19	15.20	/
QPSK	5814	15.19	15.53	/

Remark:

1. Test results including cable loss;
2. Please refer to following plots;

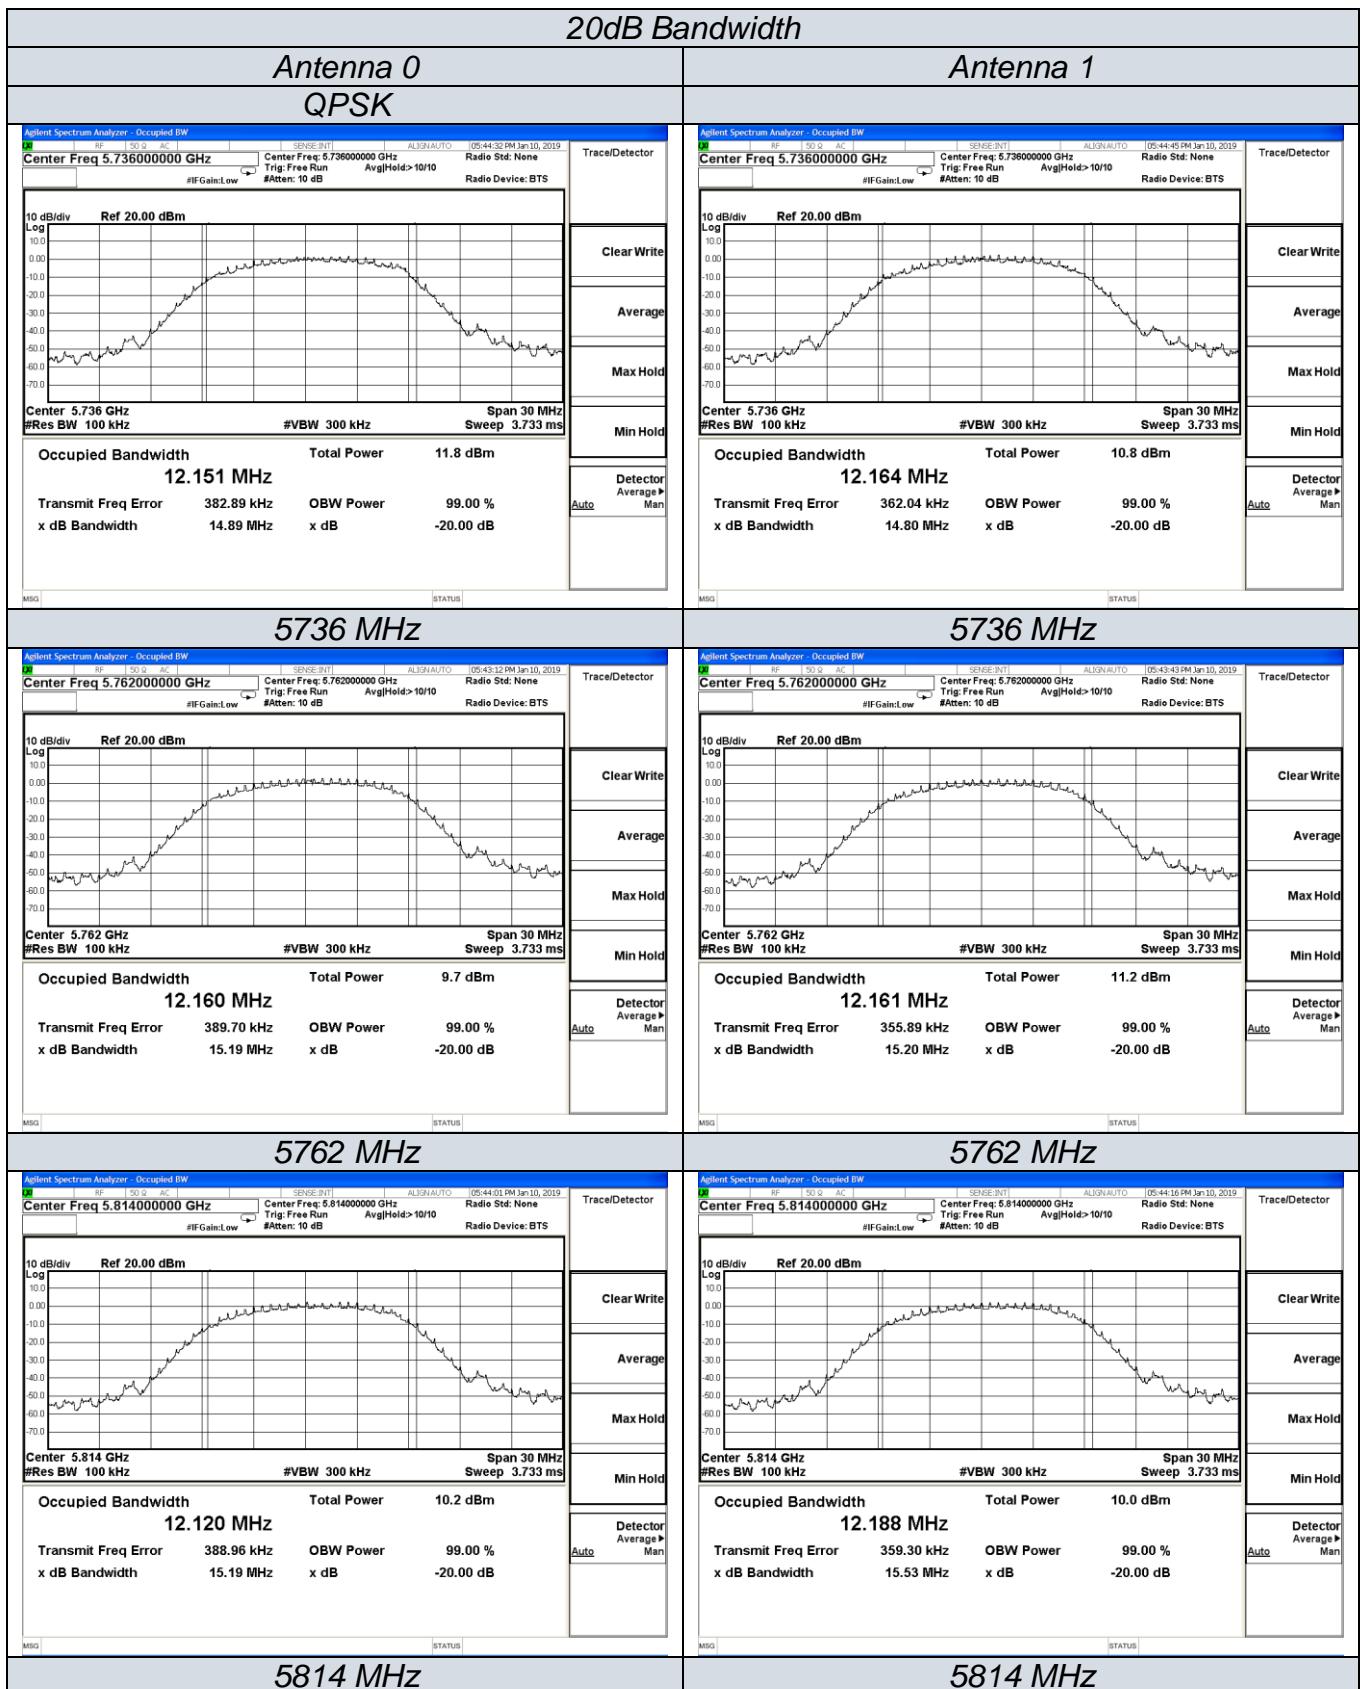

9. AC POWER LINE CONDUCTED EMISSIONS


9.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

9.2 Block Diagram of Test Setup

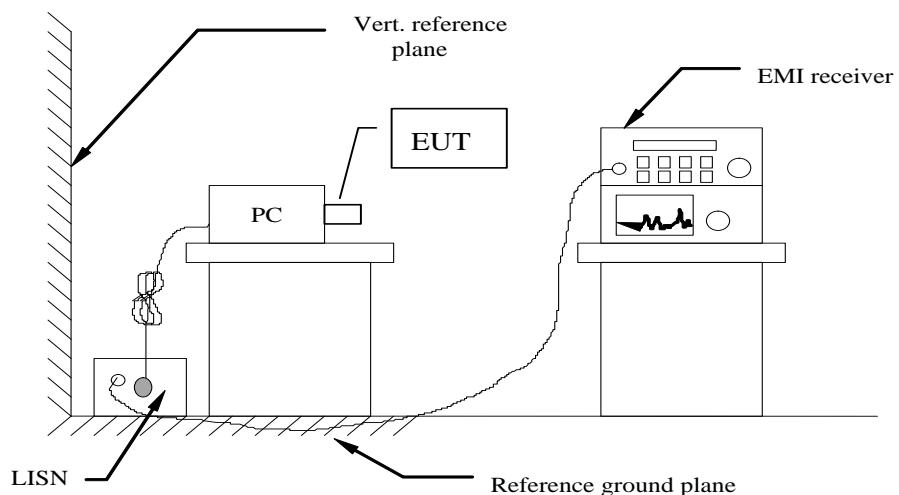


9.3 Test Results

PASS.


The test data please refer to following page.

Temperature	23.5°C	Humidity	52.9%
Test Engineer	Diamond Lu	Test Mode	TX

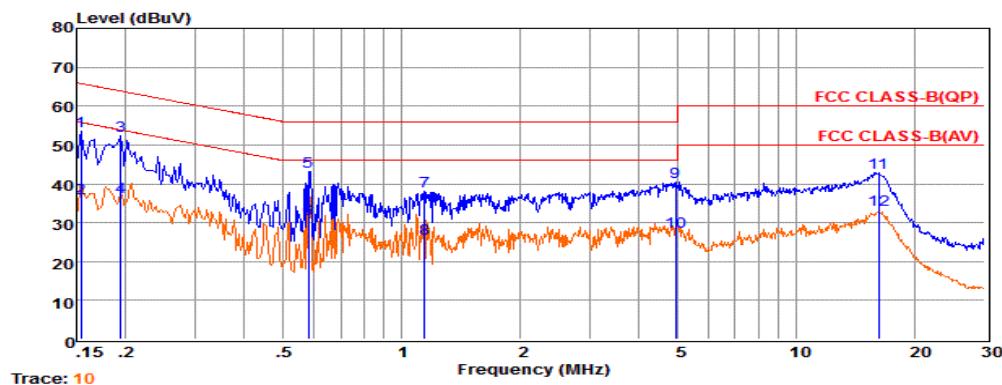AC Conducted Emission of charge from adapter mode @ AC 120V/60Hz (worst case)**Line**

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	34.02	9.58	0.02	10.00	53.62	65.78	-12.16 QP
2	0.15	16.60	9.58	0.02	10.00	36.20	55.77	-19.57 Average
3	0.19	32.60	9.62	0.02	10.00	52.24	63.84	-11.60 QP
4	0.19	16.86	9.62	0.02	10.00	36.50	53.84	-17.34 Average
5	0.58	23.51	9.63	0.04	10.00	43.18	56.00	-12.82 QP
6	0.58	11.24	9.63	0.04	10.00	30.91	46.00	-15.09 Average
7	1.14	18.47	9.63	0.05	10.00	38.15	56.00	-17.85 QP
8	1.14	6.24	9.63	0.05	10.00	25.92	46.00	-20.08 Average
9	4.95	20.74	9.65	0.06	10.00	40.45	56.00	-15.55 QP
10	4.95	7.99	9.65	0.06	10.00	27.70	46.00	-18.30 Average
11	16.14	23.00	9.72	0.11	10.00	42.83	60.00	-17.17 QP
12	16.14	13.37	9.72	0.11	10.00	33.20	50.00	-16.80 Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

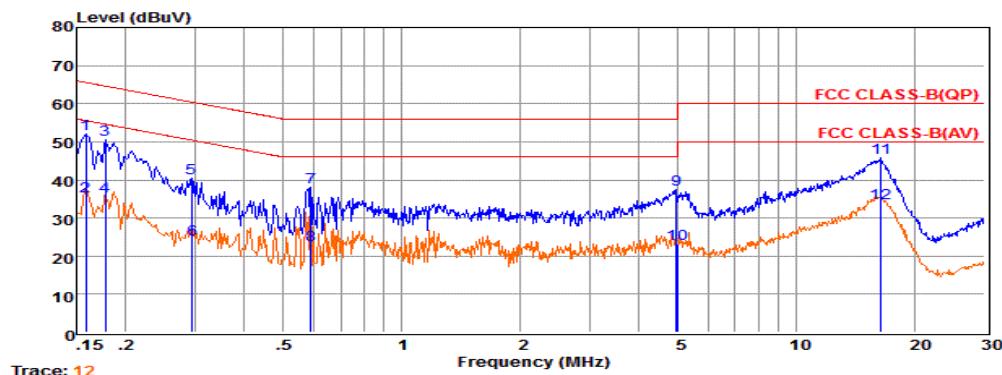Neutral

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.16	32.23	9.68	0.02	10.00	51.93	65.56	-13.63 QP
2	0.16	15.85	9.68	0.02	10.00	35.55	55.55	-20.00 Average
3	0.18	30.91	9.64	0.02	10.00	50.57	64.59	-14.02 QP
4	0.18	16.18	9.63	0.02	10.00	35.83	54.59	-18.76 Average
5	0.29	20.92	9.60	0.03	10.00	40.55	60.41	-19.86 QP
6	0.29	4.79	9.60	0.03	10.00	24.42	50.41	-25.99 Average
7	0.59	18.31	9.62	0.04	10.00	37.97	56.00	-18.03 QP
8	0.59	3.19	9.62	0.04	10.00	22.85	46.00	-23.15 Average
9	4.98	17.63	9.66	0.06	10.00	37.35	56.00	-18.65 QP
10	4.98	3.39	9.66	0.06	10.00	23.11	46.00	-22.89 Average
11	16.40	25.79	9.75	0.11	10.00	45.65	60.00	-14.35 QP
12	16.40	13.99	9.75	0.11	10.00	33.85	50.00	-16.15 Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


***Note: Pre-scan all modes and recorded the worst case results in this report.

10. BANDEDGES MEASUREMENT

10.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

10.2. Block Diagram of Test Setup

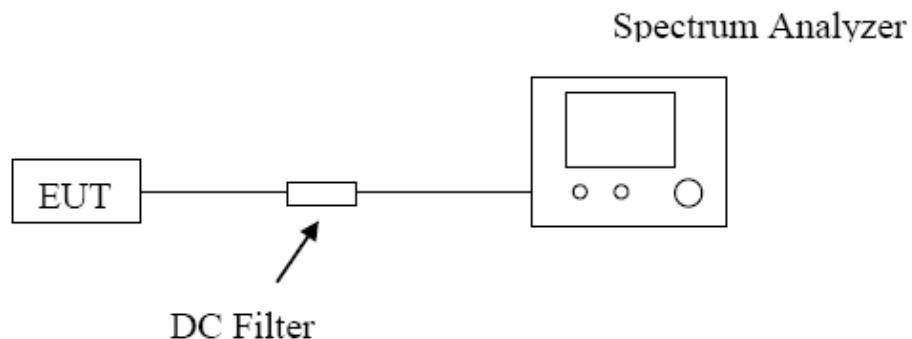

10.3. Test Procedure

The EUT is placed on a turntable, which is 0.8m above the ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:


Peak: RBW=120KHz, RBW=300KHz / Sweep=AUTO

Repeat the procedures until the peak versus polarization are measured.

10.4. Test Results


PASS.

The test data please refer to following page.

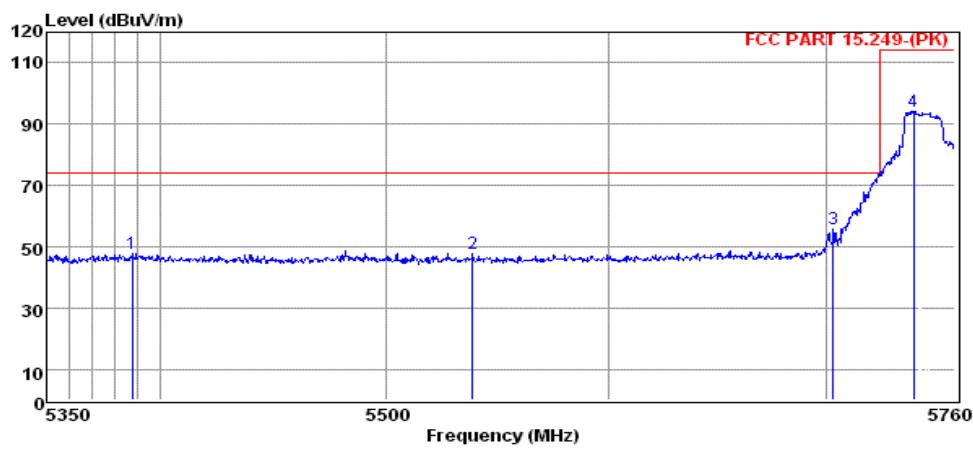


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5387.26	40.83	8.23	35.41	47.86	74.00	-26.14	Peak
2	5538.52	40.45	8.39	35.56	47.72	74.00	-26.28	Peak
3	5703.29	47.99	8.57	35.83	55.63	74.00	-18.37	Peak
4	5735.86	86.57	8.62	35.89	94.30	114.00	-19.70	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

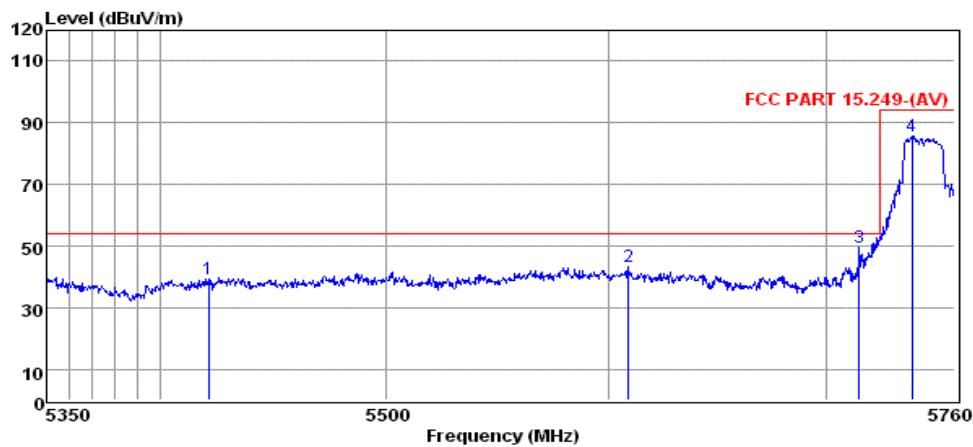


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5420.78	32.24	8.26	35.44	39.31	54.00	-14.69	Average
2	5609.32	35.77	8.47	35.67	43.19	54.00	-10.81	Average
3	5715.51	41.99	8.59	35.84	49.66	54.00	-4.34	Average
4	5735.86	78.08	8.61	35.88	85.79	94.00	-8.21	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

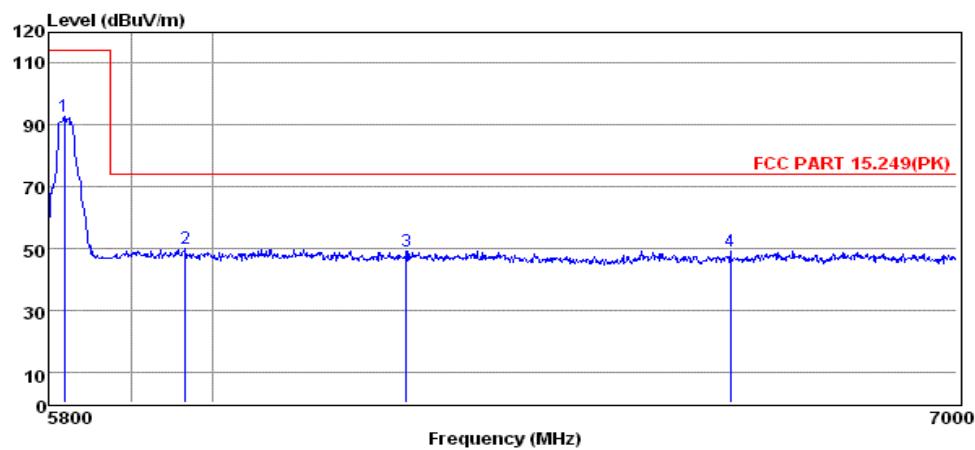

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5813.95	84.82	8.71	36.02	92.75	114.00	-21.25	Peak
2	5967.06	41.50	8.86	36.25	49.82	74.00	-24.18	Peak
3	6246.06	40.37	8.99	36.45	49.04	74.00	-24.96	Peak
4	6679.78	39.49	9.14	36.71	49.15	74.00	-24.85	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

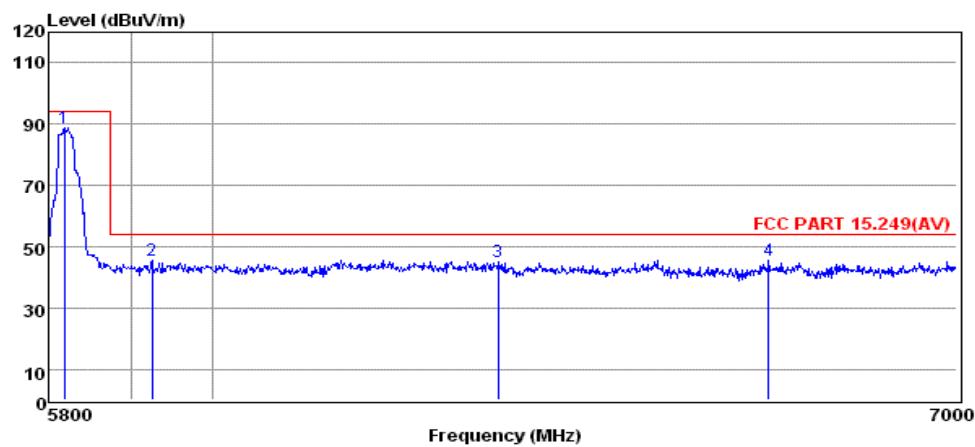

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	5813.95	80.80	8.71	36.02	88.73	94.00	-5.27	Average
2	5925.68	37.10	8.82	36.18	45.31	54.00	-8.69	Average
3	6365.83	36.46	9.03	36.52	45.25	54.00	-8.75	Average
4	6732.75	35.71	9.16	36.74	45.53	54.00	-8.47	Average

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

11. TEST SETUP PHOTOGRAPHS

Please refer to report No.: LCS190103008AEA.

12. Exterior Photographs of the eut

Please refer to report No.: LCS190103008AEA.

13. INTERIOR Photographs of the eut

Please refer to report No.: LCS190103008AEA.

-----THE END OF REPORT-----