

TEST REPORT

Report Number: 101262612DEN-001F Project Number: G101262612

Report Issue Date: 9/30/2013

Product Designation: Model: M1 (Revolv Hub)

Standards: FCC 47 CFR Part 15 Subpart C, 15.249 - Operation within the bands

902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz

Tested by: Intertek Testing Services NA, Inc. 1795 Dogwood St. Suite 200 Louisville, CO 80027 Client: Revolv, Inc. 2060 Broadway, Suite 380 Boulder, CO 80302

Report prepared by

Randy Thompson Senior EMC Project Engineer Report reviewed by

Mike Spataro
Engineering Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek

Report Number: 101262612DEN-001F

Issued:9/30/2013

TABLE OF CONTENTS

1	Introduction and Conclusion	3
2	Test Summary	4
3	Description of Equipment Under Test	6
4 dia	System setup including cable interconnection details, support equipment and simple gram	
5	6dB Bandwidth (Reference Only)	13
6	Radiated Field Strength Emissions – Tx Fundamental	16
7	Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge	39
8	Occupied Bandwidth (OBW)	58
9	Requirements for fixed, point-to-point operation – Not Applicable	59
10	Duty Cycle Correction Factor – Not Used	60
11	AC Mains Conducted Emissions – Transmitter	61
12	Antenna Requirement	69
13	RF Exposure Requirements	70
14	Unintentional Radiated Emissions (Digital Part of Receiver)	<i>7</i> 3
15	AC Mains Conducted Emissions	94
16	Measurement Uncertainty	101
17	Revision History	102

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded **the product tested complies with the requirements of the standard(s) indicated**. The results obtained in this test report pertain only to the item(s) tested.

Test Report Scope

The scope of this report was to qualify the "CC1101 #1 Radio" configured within the Revolv Model M1 product. This radio operates within the following Tx Band: 902-928 MHz (ISM)

Refer to the following Intertek Test Reports for the test results of the following radios configured within the Revolv Model M1 product:

- Unintentional Radiated and Conducted Emissions (DoC): 101262612DEN-001A
- Radio #1 (WiFi): 101262612DEN-001B
- Radio #2 (Insteon): 101262612DEN-001C
- Radio #3 (ZWave): 101262612DEN-001D
- Radio #5 (CC1101 #0): 101262612DEN-001E
- Radio #6 (CC1101 #1): 101262612DEN-001F (This report)
- Radio #7 (433MHz): 101262612DEN-001G

General Test Methodology

All measurements were performed according to the procedures in the following documents:

ANSI C63.10:2009 – ANSI Standard for Testing Unlicensed Wireless Devices

Test Facility

Intertek Denver's testing facilities are located at 1795 Dogwood St. Suite 200 Louisville, CO 80027. The testing facility is ISO17025:2005 accredited by A2LA, our lab code is 2506.02, our VCCI registration numbers are. R-1643, C-1752 and T-1558, our FCC designation no. US1121 and our IC lab no. 2042N.

Testing contained in this test report may not be covered under the laboratories scope of accreditation. A note will be placed in the specific test section for testing not coved under the laboratories scope.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

2 Test Summary

Section	Test Specification	Test Description	Test Date	Result
5	Reference Only	6dB Bandwidth	09/09/2013	N/A Note3
6	FCC 15.249(a)	Radiated Field Strength Emissions – Tx Fundamental	09/09/2013	Pass
7	FCC 15.249(a)(e)	Radiated Field Strength - Harmonics of the Fundamental (Out-of-Band Emissions)	09/09/2013	Pass
8	FCC 15.209/15.249(d)(e)/15.205	Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge	09/10/2013	Pass
9	FCC 15.215(c)	Occupied Bandwidth		N/A
10	FCC 15.249(b)	Requirements for Fixed – Point-to-Point Operation		N/A
11	FCC 15.35(c)	Duty Cycle Correction Factor		N/A
12	FCC 15.207	AC Power Transmitter AC Conducted Emissions	08/24/2013	Pass
13	FCC 15.203	Antenna Requirement	09/03/2013	Pass
14	FCC 15.247(b)(5)	RF Exposure Requirements	09/26/2013	Pass
15	FCC 15.109	Receiver/ Digital Device Radiated Emissions	08/14/2013	Pass
16	FCC 15.107	Digital Device AC Conducted Emissions	08/14/2013	Pass

Notes:

- 1) The radio is not a fixed, point-to-point operating system.
- 2) The product is ac-powered utilizing an ac power adapter.
- 3) The 6dB bandwidth was used to determine the minimum RBW used for the fundamental measurement reference only.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

General Radio Test Notes:

- ANSI C63.10, Section 6.3: Testing was performed in 3 different orthogonal axes to determine the worst-case emissions from the device. The worst-case axis and emissions are shown in this report.
- ANSI C63.10, Section 5.13/ FCC CFR Part 15.31(e): For battery-operated equipment, the
 equipment tests shall be performed using a new battery. For ac-operated equipment,
 measurements of the fundamental frequency were performed with the supply voltage varied
 between 85% and 115% of the nominal rated voltage to determine worst-case.
- ANSI C63.10, Section 4.2.3.2/ FCC 15.35: Measurement detector functions and bandwidths utilized in this testing were per the preceding guidelines.
- ANSI C63.10, Section 4.2.3.2.2/ FCC 15.35(b): When an average limit is specified, the peak
 emission must also be measured to ensure the emissions is less than 20dB above the average
 limit and/or below the peak limit specified. This report includes both average and peak test data.
- ANSI C63.10, Section 4.2.3.2.4/ FCC 15.35(c): When the field strength (or envelope power) is not constant or when it pulses, and an average detector/limit is specified to be used, a duty cycle correction factor may be utilized to determine the pulsed "average" of the field strength or power. Duty cycle correction was not utilized in this report.
- ANSI C63.10, Section 5.3/ FCC 15.31: All radiated field strength measurements taken at an antenna-to-product test distance of 3-meters.
- ANSI C63.10, Section 5.5, Table 2/ FCC 15.33(a): The frequency range of measurement was per the requirements of the preceding standards. The product was tested from 30MHz to 10GHz.
- ANSI C63.10, Section 6.3.1/ FCC 15.35(b): Measurement bandwidths utilized for fundamental peak emissions were equal to or greater than the 6dB bandwidth of the emission.
- ANSI C63.10, Section 6.3/ FCC 15.31(m): Measurements were taken for at the lowest, near the middle and highest channels of the product tested.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

3 Description of Equipment Under Test

Model:	M1		
Type of EUT:	Revolv "Hub" – RF-enabled home automation		
Serial Number:	FCC1		
FCC ID:	2AAITJARVIS1		
Industry Canada ID:	N/A		
Related Submittal(s) Grants:	W7Z-ZICM357P2 (Zigbee radio)		
Company:	Revolv, Inc.		
Customer:	Revolv, Inc.		
Address:	Revolv, Inc. 2060 Broadway, Suite 380 Boulder, CO 80302		
Phone:	(720) 961-5009		
Fax:			
e-mail:	mbergquist@revolv.com		
Test Standards:	 □ 47 CFR, Part 15C:§15.249 □ RSS-210, Issue 8, 2010 □ RSS-Gen, Issue 3, 2010 □ 47 CFR, Part 15B:§15.107 and §15.109, Class B □ Other 		
Type of radio:	☑ Stand -alone ☐ Module ☐ Hybrid		
Date Sample Submitted:	08/11/2013		
Test Work Started:	08/14/2013		
Test Work Completed:	09/18/2013		
Test Sample Conditions:	☐ Damaged ☐Poor (Usable) ☐ Good		

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Product Description:	Wireless RF-Enabled Home Automation Hub	
Transmitter Type:	☐ FHSS ☑ Digital Modulation ☐ WiFi ☐ Blue Tooth	
Operating Frequency Range(s):	Range From 902.6 to 927.4 MHz (Multiple Channel)	
Number of Channels:	124 maximum	
Modulation:	GFSK (deviation = 127kHz), Manchester Encoded, 250 Kbaud	
Emission Designator:	712KF1D	
Antenna(s) Info:	Antenna: Type: Ceramic Gain: -1.0 dBi Connector Type: N/A Integral Antenna	
Rated Power:	93.22 dBuV @ 3-meters -2.01 dBm .630 mW	
Antenna Installation:	☐ User ☐ Professional ☒ Factory	
Transmitter power configuration:	☐ Internal battery ☐ External power source	
Special Test Arrangement:	Since the product can be mounted in several orientations, the EUT was rotated and tested in three orthogonal axes to determine the maximum emissions	
Test Facility Accreditation:	A2LA (Certificate No. 2506.01)	
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2009 and FCC Publication Number 720338 & 433442	

Description of Equipment Under Test (provided by client)

The Revolv "Hub" is designed to link a variety of RF-enabled Home Automation products to a Wi-Fi Local Area Network and through that LAN to the cloud.

The product is configured with the following discrete radios:

- Wi-Fi: 2.4GHz ISM Band (802.11 b/g/n HT20)
- Insteon: 915 MHz ISM Band (single channel)
- ZWave: 908.42 MHz ISM Band (single channel)
- Zigbee: 2.4GHz ISM Band (Certified Module)
- CC1101 #0: 903 927 MHz ISM Band (multi-channel)
- CC1101 #1: 902.6 927.4MHz ISM Band (multi-channel)
- CC1101 #3: 431 437 MHz (control signals multi-channel)

Note the radios do not transmit simultaneously and have (1) dedicated antenna/radio.

There are no signal or I/O ports or cables configured on the product.

The product is powered from an external AC Adapter.

Intertek	
Report Number: 101262612DEN-001F	Issued:9/30/2013

Equipment Under Test Power Configuration			
Rated Voltage Rated Current Rated Frequency Number of Phases			
AC Adapter Input: 100-240VAC	0.3	50/60	1
AC Adapter Output: 5VDC	2.0		

Descriptions of EUT Exercising	
Standby/Idle Mode	
☐ Continuous transmission, un-modulated carrier (CW)	
□ Continuous transmission, modulated carrier (CW)	
☐ Continuous Receive Mode	

Note: The chosen mode of operation described above is dependent upon the specific test to be performed.


Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

4 System setup including cable interconnection details, support equipment and simplified block diagram

Method:

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

EUT Block Diagram: EMC Perspective

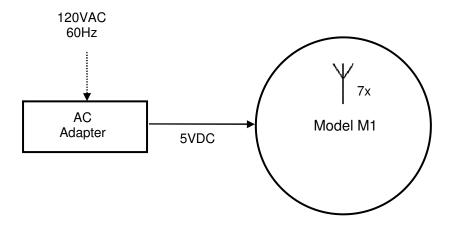


Note: Dashed lines indicate auxiliary/support equipment

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

EUT Block Diagram: Detailed

The Hub contains a number of discrete radios as shown in this product block diagram:

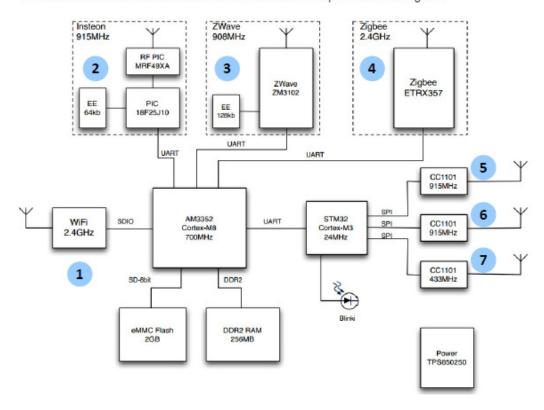

Purpose of this document is to describe the Hub and describe each radio to facilitate creation of FCC certification test plan and quotation for testing and TCB service to obtain FCC certification.

revolv Confidential and Proprietary

Page 1 of 11

Revision Date: 2013-06-04

Intertek				
Report Number: 101262612DEN-001F	Issued:9/30/2013			

Support Data:

ID	Description/ Function	Shield Type	Length	Connector	Connection	Ferrites

Support Equipment								
Description	Description Manufacturer Model Number Serial Number							
Laptop	HP							

Notes:

- 1) The laptop was utilized only to configure the product during testing (i.e. set channel, modulation, data rates, etc.).
- 2) The product has no signal or I/O cables.

Photograph: Product Tested - Test Axes

Model M1 (Revolv Hub)

Axis 1 – Product Horizontal (Flat on Table)



Axis 2 - Product Vertical (Wall Mount)



Axis 3 - Product Vertical & Rotated 90 degrees CW



Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

5 6dB Bandwidth (Reference Only)

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.249 & IC RSS-210.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

ANSI C63.10: 2009, Section 6.3.1

Radiated measurements of the fundamental-signal peak field strength shall be made using instrumentation with a bandwidth equal to or greater than the 6 dB bandwidth of the emission.

Test Equipment Used:


Asset ID	<u>Description</u>	Manufacturer	Model	<u>Serial</u>	Cal Date	Cal Due
DEN- 073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
19936	Bilog Antenna 30MHz – 6GHz	Sunol Sciences	JB6	A050707-1	11/15/2012	11/15/2013
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

Results:

Not applicable – measurement used for reference only – to determine minimum RBW required for testing fundamental.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Plot: 6dB Bandwidth

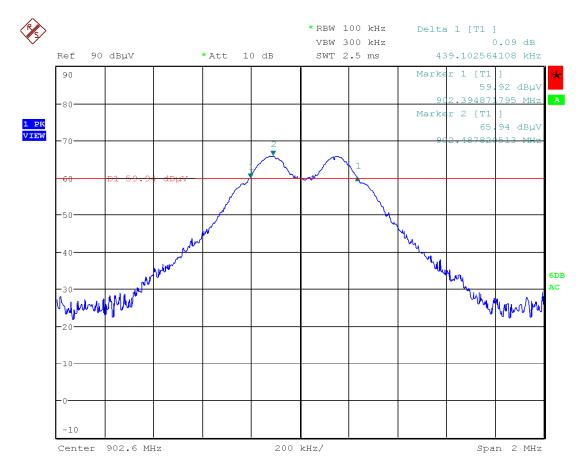

Date: 9.SEP.2013 08:59:37

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: Reference Only – To determine RBW required for testing fundamental emissions.

FREQ	LEVEL	DET	CABLE	Antenna	PREAMP	FINAL	POL	HGT	AZ	LIMIT	DELTA LIMIT	RBW
<u>MHz</u>	<u>dBuV</u>	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.249(a) 94dBuV/m	FCC 15.249(a)	(MHz)
Measureme	ents to ver	ify the 6	dB bandwi	idth – used	to determine	the RBW ı	used for	measuri	ng fundar	mental emissions		
902.4814	66.44	Pk	2.10	22.40	0.00	90.94	Н	1.65	36	94.00	- 3.06	0.120
902.4814	68.25	Pk	2.10	22.40	0.00	92.75	Н	1.65	36	94.00	- 1.25	0.300
902.4814	68.40	Pk	2.10	22.40	0.00	92.80	Н	1.65	36	94.00	- 1.20	0.500

Test Method:

N/A

Test Summary:

6dB Bandwidth Summary				
Channel/ Mode	6dB Bandwidth			
902.60 MHz	439 kHz			

Specification: Not applicable

Notes:

- 1) Measurements were taken using worst-case modulated (maximum bandwidth) mode, using maximum data packet length.
- 2) All measurements are radiated field strength taken at 3-meters.
- 3) For fundamental measurements, a RBW of 500kHz will be utilized per the plot and measurements above. No significant increase in field strength was measured when using a higher bandwidth.

Deviations, Additions, or Exclusions: None

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

6 Radiated Field Strength Emissions – Tx Fundamental

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.249.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

The maximum Radiated Field Strength shall not exceed 50mV/m.

Fundamental Frequency	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (uV/m)
902-928 MHz	50 (94dBuV/m)	500 (54dBuV/m)
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

• FCC 15.249(a)

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacturer</u>	Model	<u>Serial</u>	Cal Date	Cal Due
DEN- 073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
19936	Bilog Antenna 30MHz – 6GHz	Sunol Sciences	JB6	A050707-1	11/15/2012	11/15/2013
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

Results:

The sample tested was found to comply.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Summary: Radiated Field Strength Emissions – Tx Fundamental

Fundamental	Radiated Fie	eld Strength @	3-meters			
Frequency Range:	⊠ 90)2-928MHz	2400-248	33.5MHz	<u> 5725-5850</u>)MHz
Low Frequency MHz	Measured Field Strength	Duty Cycle Correction Factor	Final Corrected	Standard Limit	Limit	Margin
	(dBuV/m)	(dB)	(dBuV/m)	(mV/m)	(dBuV/m)	dB
902.60	87.49	0.00	87.49	50	94	-6.51
Mid Frequency MHz						
915.00	93.22	0.00	93.22	50	94	-0.78
High Frequency MHz						
927.40	84.86	0.00	84.86	50	94	-9.14
RBW: VBW:	☐ 100kHz ☐ 300kHz	☐ 300kHz ☐ 1MHz				0MHz 0MHz
Antenna Gain:	⊠ < 6dBi	□ >6dB	i and = dBi	, Output power	reduction =	dB

Test Method:

- FCC Publication 720338 & 433442
- ANSI C63.10:2009, Section 6.5

Notes:

- 1. All Fundamental measurements are radiated field peak detector, max hold 500kHz RBW.
- 2. The measurement bandwidth ≥6dB bandwidth refer to section 5.
- 3. Product measured in (3) axes refer to section 4 for details.
- 4. The product is a multi-channel transmitter.
- 5. Measurements were not adjusted by the allowed duty cycle correction factor per FCC 15.35/ IC RSS-GEN, Section 4.5 fundamental frequency is below 1GHz.
- 6. The limit for RSS-210 is identical to the limit for FCC 15.249.

Setup Photographs: Radiated Field Strength Emissions – Tx Fundamental

Test Setup – Front View








Setup Photographs: Radiated Field Strength Emissions – Tx Fundamental

Test Setup - Rear View

Axis 1



Axis 2

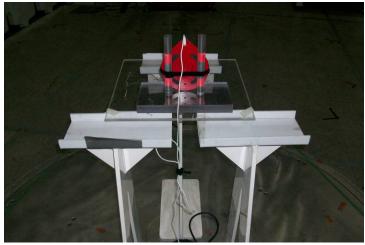


Axis 3



Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Setup Photographs: Radiated Field Strength Emissions – Tx Fundamental

Test Setup

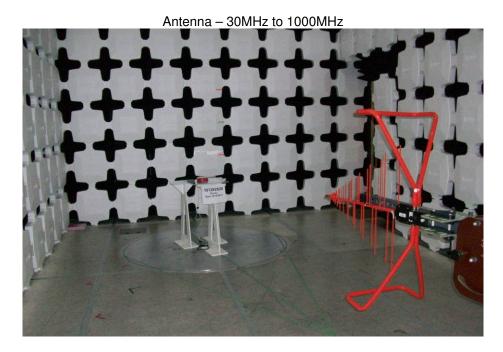

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: Radiated Field Strength Emissions – Tx Fundamental

Radiated Field Strength - Tx Fundamental

							•							
Test Re	port #:	G10126	2612		Test /	Area: (CC1 Radia	ated		Т	emperature	e: 23.1	°C	
Test M	ethod:	FCC 15.	249(a)		Test I	Date: (09-Sep-20	13		Relati	ve Humidit	y: 33.2	%	
EUT Mo	odel #:	M1			EUT Po	ower:	120VAC/6	0Hz		A	Air Pressure	e: 82.8	kPa	
	E	UT Seria	l#: FCC	D1									_	
Manufa	cturer:	Revolv,	Inc.									Level Key		
Desci	EUT ription:	Revolv "	Hub" – RF	-Enabled H	ome Automat	tion				Pk – P	'eak	Nb – Na	arrow Band	
Notes: F	Product tr	ansmittin	g continuo	ously – C110)1 #1 Radio a	active – C	GFSK Mod	lulated		Qp – C	QuasiPeak	Bb – Br	oad Band	
			nnel: Lowe 27.40MHz		902.60MHz, I	Mid Char	nnel 915.0	00MHz,		Av - Av	verage			
F	All measu	rements	peak dete	ctor – RBW	> 6dB BW									
The following	ng Duty C	Cycle was	verified by	y Intertek: N	ot Applicable)								
No Duty Cy	ycle Corı	ection A	Applied											
Averaging	method	for pulse	ed signals	and calcul	ation in acco	ordance	to FCC C	FR47 Part 15	5.35 utili	zed to d	calculate fi	eld strength	emissions.	
The testing	performe	ed in acco	ordance to	FCC CFR4	7 Part 15.249	and del	lta limits w	ere calculate	d as follo	ows:				
Final Corre	cted Pea	k Measur	rement – D	outy Cycle C	orrection Fac	ctor* = Fi	nal Calcul	ated Emissio	n					
The Final C	Calculated	d Emissio	n was ther	n compared	to the Limits	in CFR4	7 Part 15.	249 and the ϵ	emission	/limit de	lta was cald	culated.		
DTCF is ca	lculated a	as follows	20*log ₁₀ (duty cycle in	100mS) – no	ot to exce	eed 20dB.							
FCC Part 1	5.249(a)	Limit: 50)mV/m = 9	4dBuV/m										
FREQ	LEVEL	DET	CABLE	Antenna	PREAMP	FINAL	Duty Cycle CF	Duty Cycle Corrected	POL	HGT	AZ	LIMIT	DELTA LIMIT	RBW
<u>MHz</u>	<u>dBuV</u>	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	= [dBuV]	- [dB]	= [dBuV/m]	(V/H)	(m)	(DEG)	FCC 15.249(a) 94dBuV/m	FCC 15.249(a)	(MHz)
Fundamen	tal Meas	urement	s - Axis 1	- EUT Flat	on Table (Ho	rizontal)				•			
Tx Low Ch	nannel													

_	uı	iu	a 1111	en	ılaı	IVIE	as	u

									•	•				
902.6000	54.11	Pk	2.10	22.40	0.00	78.61	0.00	78.61	V	1.58	281.0	94.00	-15.39	0.500
902.6000	62.99	Pk	2.10	22.40	0.00	87.49	0.00	87.49	Н	1.00	338.0	94.00	-6.51	0.500

Fundamental Measurements - Axis 2 - EUT Vertical on Table

902.6000	57.87	Pk	2.10	22.40	0.00	82.37	0.00	82.37	V	1.22	274.0	94.00	-11.63	0.500
902.6000	60.94	Pk	2.10	22.40	0.00	85.44	0.00	85.44	Н	1.46	198.0	94.00	-8.56	0.500

Fundamental Measurements - Axis 3 - EUT Vertical & Rotated 90 Degrees

Tx Low Channe

902.6000	57.56	Pk	2.10	22.40	0.00	82.06	0.00	82.06	Н	1.47	156.0	94.00	-11.94	0.500
902.6000	61.52	Pk	2.10	22.40	0.00	86.02	0.00	86.02	٧	1.17	170.0	94.00	-7.98	0.500

Fundamental Measurements - Axis 1 - EUT Flat on Table (Horizontal)

Tx Mid Channel

915.0000	68.71	Pk	2.11	22.40	0.00	93.22	0.00	93.22	Н	1.00	338.0	94.00	-0.78	0.500
915.0000	59.63	Pk	2.11	22.40	0.00	84.14	0.00	84.14	V	1.57	278.0	94.00	-9.86	0.500

Fundamental Measurements - Axis 2 - EUT Vertical on Table

Tx Mid Channel

	Intertek													
	Report I	Numbe	er: 1012	62612DE	N-001F							Issued:9/3	30/2013	
915.0000	64.84	Pk	2.11	22.40	0.00	89.35	0.00	89.35	V	1.18	276.0	94.00	-4.65	0.500
915.0000	67.92	Pk	2.11	22.40	0.00	92.43	0.00	92.43	Н	1.45	186.0	94.00	-1.57	0.500
Fundamental Measurements - Axis 3 - EUT Vertical & Rotated 90 Degrees												1		
Tx Mid C	hannel													
915.0000	63.72	Pk	2.11	22.40	0.00	88.23	0.00	88.23	Н	1.48	162.0	94.00	-5.77	0.500
915.0000	68.17	Pk	2.11	22.40	0.00	92.68	0.00	92.68	V	1.16	169.0	94.00	-1.32	0.500
Fundame	ntal Meası	ıremen	ts - Axis 1	- EUT Flat	on Table (H	orizontal)								
Tx High (Channel													
927.4000	60.33	Pk	2.13	22.40	0.00	84.86	0.00	84.86	Н	1.00	324.0	94.00	-9.14	0.500
927.4000	50.66	Pk	2.13	22.40	0.00	75.19	0.00	75.19	V	1.66	244.0	94.00	-18.81	0.500
Fundame	ntal Meası	ıremen	ts - Axis 2	- EUT Verti	cal on Tabl	е								
Tx High (Channel													
927.4000	56.86	Pk	2.13	22.40	0.00	81.39	0.00	81.39	V	1.17	273.0	94.00	-12.61	0.500
927.4000	58.81	Pk	2.13	22.40	0.00	83.34	0.00	83.34	Н	1.46	196.0	94.00	-10.66	0.500
Fundamental Measurements - Axis 3 - EUT Vertical & Rotated 90 Degrees									•	-				
Tx High (Channel													
927.4000	55.62	Pk	2.13	22.40	0.00	80.15	0.00	80.15	Н	1.49	167.0	94.00	-13.85	0.500

0.00

82.45

1.12

170.0

94.00

-11.55

0.500

927.4000

57.92

Pk

2.13

22.40

0.00

82.45

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.249.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification

The maximum Radiated Field Strength of the Harmonics of the Fundamental shall not exceed 500uV/m.

Fundamental	Field Strength	Field Strength of
Frequency	of Fundamental	Harmonics
Frequency	(mV/m)	(uV/m)
902-928 MHz	50	500
902-926 MITZ	(94dBuV/m)	(54dBuV/m)
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

In addition, as shown in FCC 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Attenuation below the general limits specified in 15.209(a) is not required.

- FCC 15.249(a)(e)
- RSS-210 A2.9(a)

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Serial</u>	Cal Date	Cal Due
DEN- 073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
18906	RF Pre-Amp (1-4GHz)	Mini-Circuits Lab	ZHL-42	N052792-2	06/10/2013	06/10/2014
18900	RF Pre-Amplifier (4-8 GHz)	Avantek	AFT97-8434- 10F	1007	06/10/2014	06/10/2014
18901	RF Pre-Amp (8-18GHz)	Avantek	AWT-18037	1002	06/10/2013	06/10/2014
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	11/15/2012	11/15/2013
18887	Horn Antenna 1-18GHz	EMCO	3115	9205-3886	03/19/2013	03/19/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

Results:

The sample tested was found to comply.

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Harmonics of Fundamental	Radiated Fie	Radiated Field Strength @ 3-meters							
Frequency Range:	⊠ 90)2-928MHz	2400-248	33.5MHz	☐ 5725-5850MHz				
Low Harmonic Frequency MHz	Measured Field Strength (dBuV/m)	Duty Cycle Correction Factor (dB)	Final Corrected (dBuV/m)	Standard Limit (uV/m)	Limit (dBuV/m)	Margin dB			
5415.68 (Average)	42.37	0.00	42.37	500	54	-11.63			
5415.68 (Peak)	52.91	0.00	52.91	20dB above average	74	-21.09			
Mid Harmonic Frequency MHz									
1830.20 (Average)	44.72	0.00	44.72	500	54	-9.28			
1830.20 (Peak)	50.09	0.00	50.09	20dB above average	74	-23.91			
High Harmonic Frequency MHz									
5564.62 (Average)	39.03	0.00	39.03	500	54	-14.97			
5564.62 (Peak)	50.58	0.00	50.58	20dB above average	74	-23.42			
RBW: VBW:	☐ 100kHz ☐ 300kHz	☐ 300kHz ☐ 1MHz	☐ 500kHz ☐ 1MHz ☐		_	0MHz 0MHz			
Antenna Gain:	⊠ < 6dBi	□ >6dB	i and = dBi	, Output power	reduction =	dB			

Test Method:

- FCC Publication 720338 & 433442
- ANSI C63.10:2009, Section 6.6

An intentional radiator shall be measured in accordance with 47 CFR 15.31-15.35. The detector functions and measuring bandwidths for these measurements are specified in 15.35. For measurements below 1 GHz, a quasi-peak detector shall be used. However, a peak detector may be used, since the measured valve will generally be higher with a peak detector. For measurements above 1 GHz, the limits are in terms of using an instrument with an average detector, unstated otherwise for a specific type of device. For device operating under Section 15.249, the limit is in terms of average with an additional peak limit of 20 dB over the average limit (see 47 CFR 15.249(e)).

Notes:

- All Harmonics of the Fundamental measurements are radiated field peak/average detector, max hold measurements – 1MHz RBW.
- 2. The product was tested in (3) axes refer to section 4 for details.
- 3. The transmitter is single-channel.
- 4. Measurements were not adjusted by the allowed duty cycle correction factor per FCC 15.35/ IC RSS-GEN, Section 4.5.


Report Number: 101262612DEN-001F Issued:9/30/2013

Setup Photographs: Radiated Field Strength - Harmonics of the Fundamental (Out-of-Band Emissions)


Test Setup – Front View






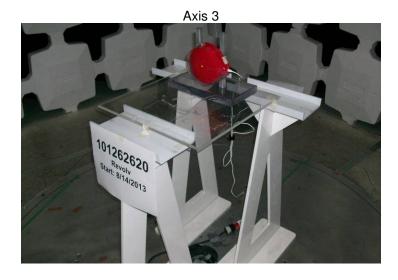


Test Setup – Rear View Axis 1

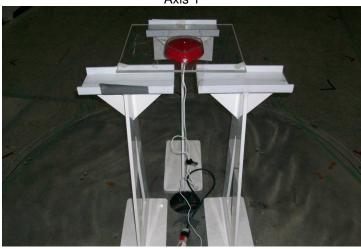

Axis 2

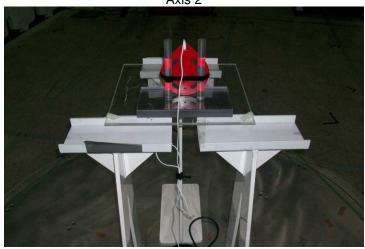

Axis 3

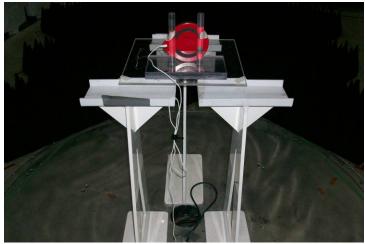

Intertek

Report Number: 101262612DEN-001F Issued:9/30/2013


Setup Photographs: Radiated Field Strength - Harmonics of the Fundamental (Out-of-Band Emissions)

Test Setup




Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Low Channel: Axis 1 – Vertical

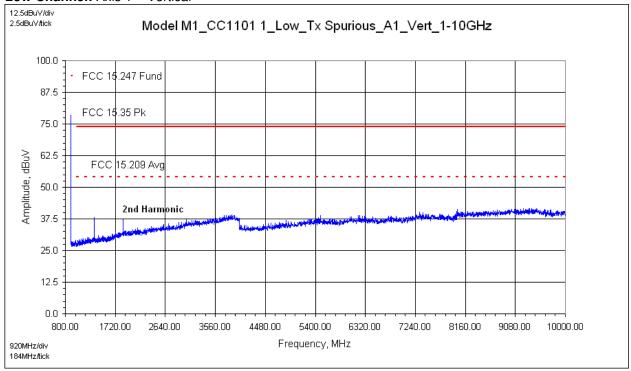


Low Channel: Axis 1 - Horizontal

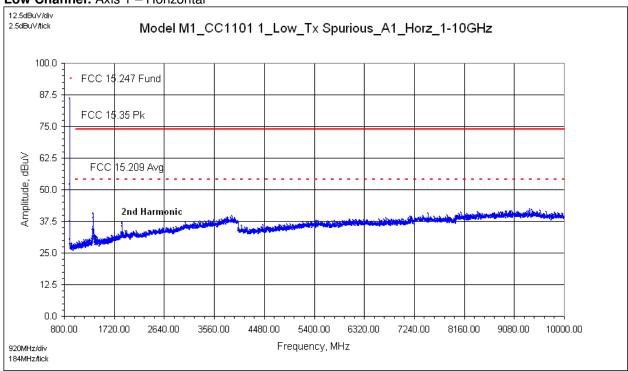


Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Mid Channel: Axis 1 – Vertical

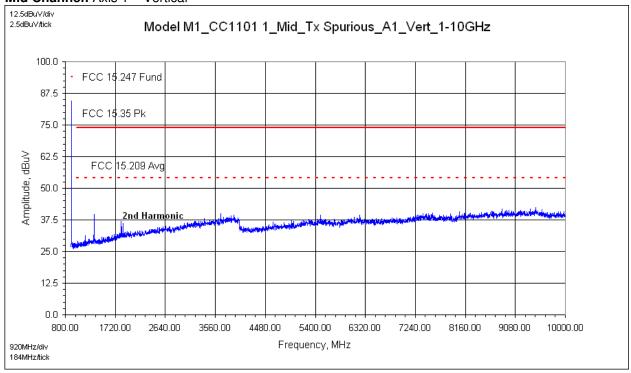


Mid Channel: Axis 1 - Horizontal

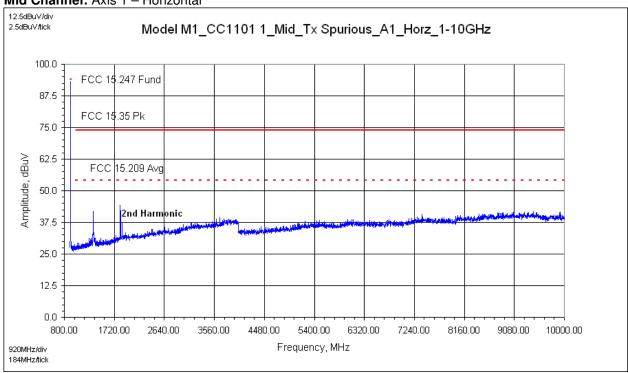


Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

High Channel: Axis 1 - Vertical

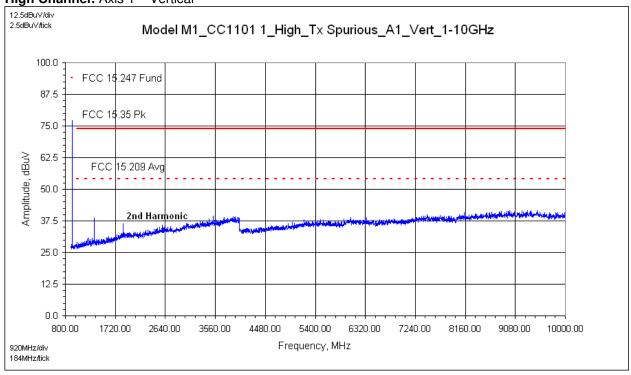


High Channel: Axis 1 - Horizontal

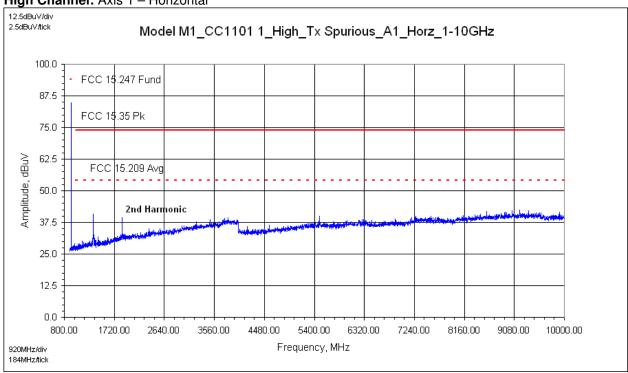


Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Low Channel: Axis 2 – Vertical

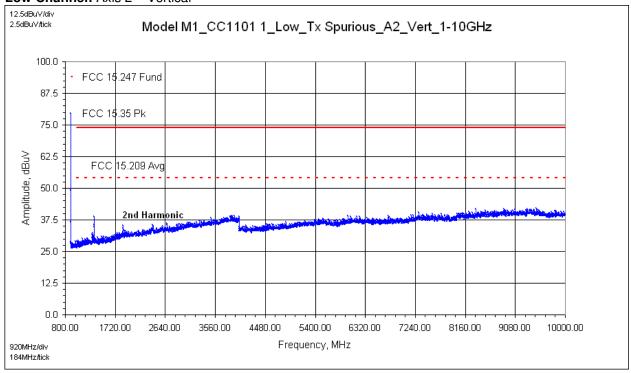


Low Channel: Axis 2 - Horizontal

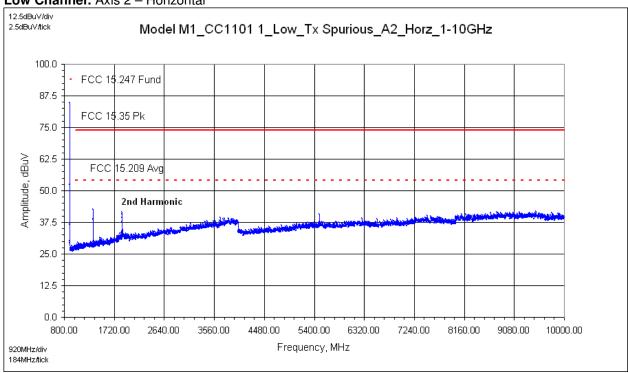


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Mid Channel: Axis 2 – Vertical

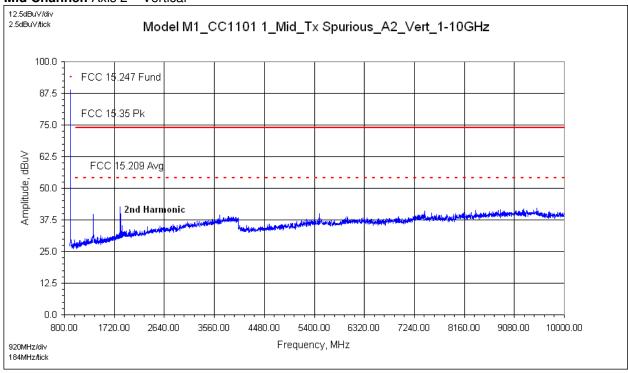


Mid Channel: Axis 2 - Horizontal

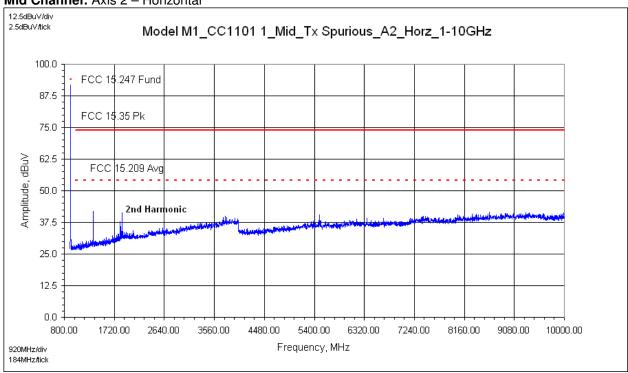


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

High Channel: Axis 2 - Vertical

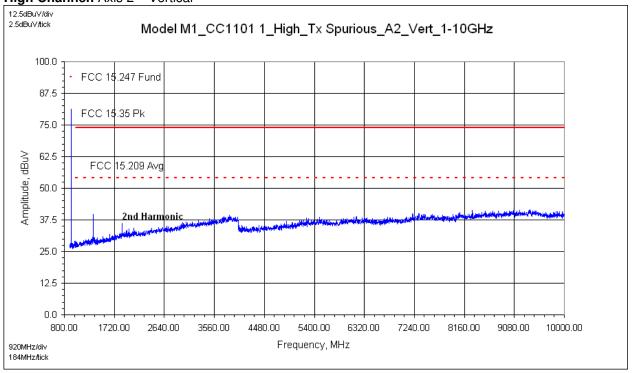


High Channel: Axis 2 - Horizontal

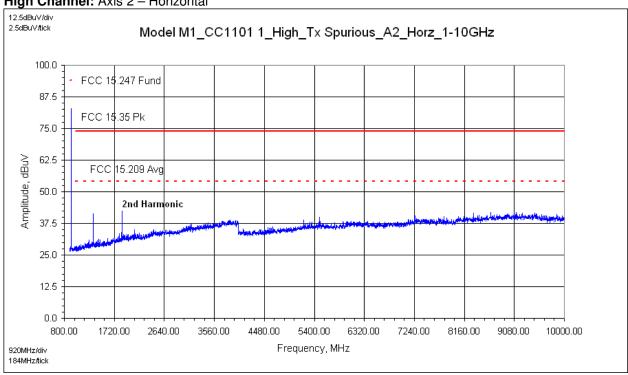


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Low Channel: Axis 3 – Vertical

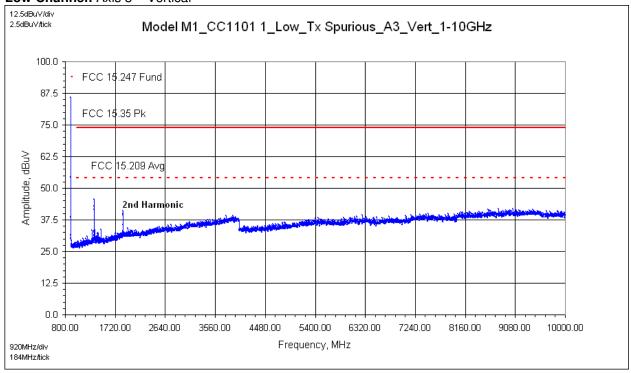


Low Channel: Axis 3 - Horizontal

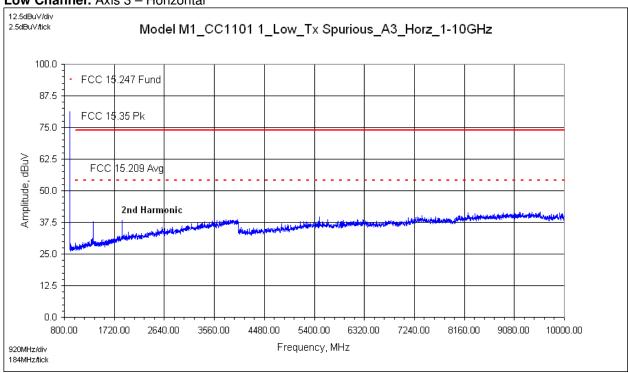


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Mid Channel: Axis 3 – Vertical

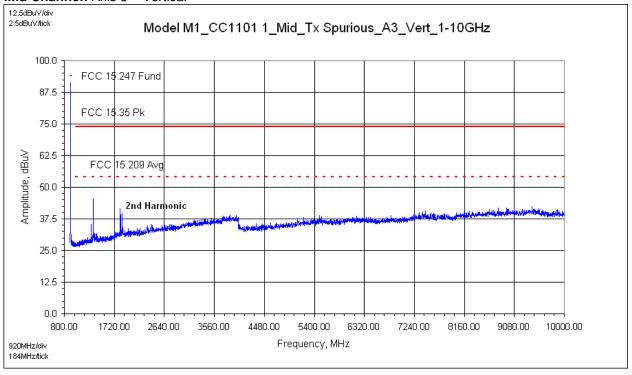


Mid Channel: Axis 3 - Horizontal

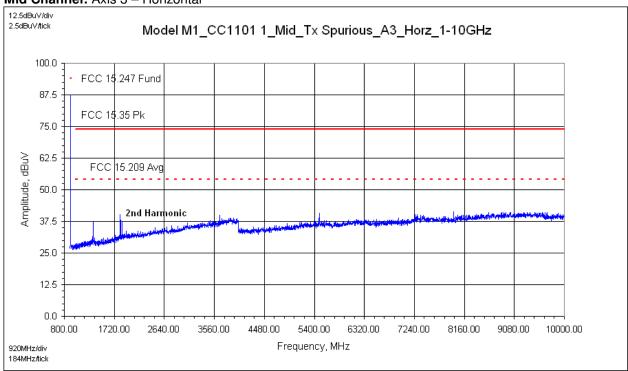


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

High Channel: Axis 3 – Vertical

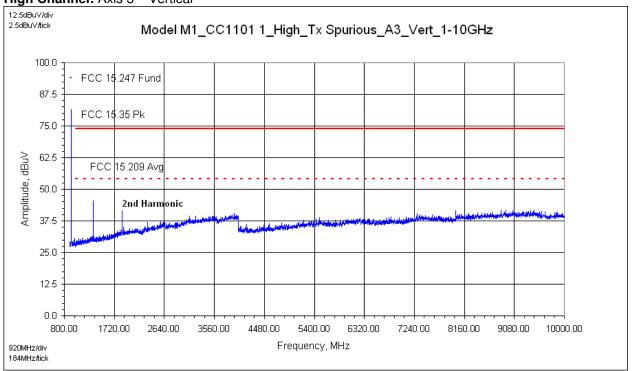

High Channel: Axis 3 - Horizontal

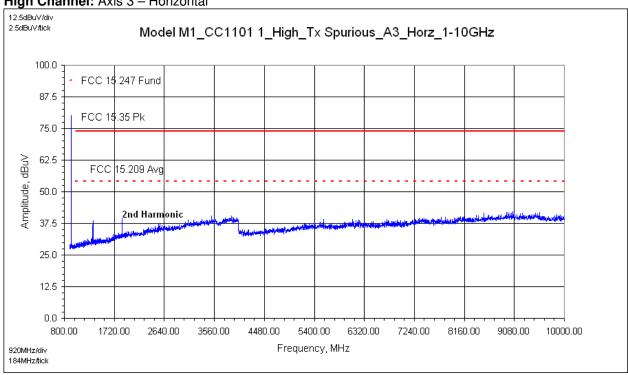

Intertek							
Report Number: 101262612DEN-001F	Issued:9/30/2013						

Test Data: Radiated Field Strength - Harmonics of the Fundamental (Out-of-Band **Emissions**)

Harmonics of the Fundamental - Radiated Field Measurements

Test F	Report #:	G101262612		Test Area:	CC1 Radiated	Temperature:	23.1	°C			
Test	Method:	FCC 15.249(a)		Test Date:	09-Sep-2013	Relative Humidity:	19.9	%			
EUT	Model #:	M1		EUT Power:	120VAC/60Hz	Air Pressure:	83.2	kPa			
		EUT Serial #:	FCC1	_							
Manufacturer: Revolv, Inc.							Level Key				
EUT Revolv "Hub" – RF-Enabled Home Automa			e Automation		Pk – Peak	Nb – Na	arrow Band				
Notes:	Product	transmitting co	ntinuously – C1101 i	#1 Radio active -	Qp – QuasiPeak	siPeak Bb – Broad Band					
-		multi-channel: Channel 927.40	Lowest Channel 902	Av - Average							

The following Duty Cycle was verified by Intertek: No Duty Cycle Correction was utilized in this test data.

All measurements peak detector – RBW > 6dB BW

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing p	performed	in accor	dance to F	CC CFR47	Part 15.249 a	and delta limi	ts were c	alculated as f	follows:					
Final Correc	ted Peak N	<i>l</i> easure	ment – Du	ty Cycle Cor	rection Facto	r* = Final Ca	lculated	Emission						
The Final Ca	alculated E	mission	was then	compared to	the Limits in	CFR47 Part	15.249 a	and the emiss	ion/limit	delta wa	s calculate	ed.		
DTCF is cald	culated as	follows	20*log ₁₀ (d	uty cycle in	100mS).									
Part 15.249	(a) Limit:	Average	e 500uV/m	= 54 dBuV	/m / Peak 74	dBuV/m (3-	meter te	st distance)						
FREQ	LEVEL	DET	CABLE	Antenna	PREAMP	FINAL	Duty Cycle CF	Duty Cycle Corrected	POL	HGT	AZ	LIMIT	DELTA LIMIT	RBW
MHz	duV/m	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	= [dBuV/m]	- [dB]	Corrected Final = [dBuV/m]	(V/H)	(m)	(DEG)	FCC 15.249(a) FCC 15.35(b)	FCC 15.249(a) FCC 15.35(b)	(MHz)
					nts – Radia				(V/11)	(111)	(DLG)	13.55(b)	10.00(b)	(1011 12)
					duct Vertica									
5415.6800	52.03	Pk	5.52	34.35	38.98	52.91	0.00	52.91	Н	1.57	315.8	74.00	-21.09	1.000
5415.6800	41.49	Av	5.52	34.35	38.98	42.37	0.00	42.37	Н	1.57	315.8	54.00	-11.63	1.000
Tx Harmon	ics 1-8GH	z: Mid	Channel A	xis 1 – Pro	duct Flat on	Table (Horiz	ontal)		u e	1				
1830.0000	57.17	Pk	3.04	26.95	37.08	50.09	0.00	50.09	Н	1.09	271.9	74.00	-23.91	1.000
1830.0000	51.80	Av	3.04	26.95	37.08	44.72	0.00	44.72	Н	1.09	271.9	54.00	-9.28	1.000
Tx Harmon	ics 1-8GH	z: Mid (Channel A	kis 3 – Prod	luct Vertical	& rotated 90) degrees	s						
1830.2000	55.78	Pk	3.04	26.95	37.08	48.70	0.00	48.70	V	1.79	129.1	74.00	-25.30	1.000
1830.2000	49.13	Av	3.04	26.95	37.08	42.05	0.00	42.05	V	1.79	129.1	54.00	-11.95	1.000
5489.1800	49.27	Pk	5.52	34.35	38.98	50.15	0.00	50.15	V	1.59	347.1	74.00	-23.85	1.000
5489.1800	38.29	Av	5.52	34.35	38.98	39.17	0.00	39.17	V	1.59	347.1	54.00	-14.83	1.000
Tx Harmon	ics 1-8GH	z: High	Channel .	 Axis 3 – Pro	oduct Vertica	al & Rotated	90 degre	ees						
5564.6200	49.69	Pk	5.52	34.36	38.99	50.58	0.00	50.58	Н	1.64	359.9	74.00	-23.42	1.000
5564.6200	38.14	Av	5.52	34.36	38.99	39.03	0.00	39.03	Н	1.64	359.9	54.00	-14.97	1.000

	Intertek													
	Report Number: 101262612DEN-001F					Issued:9/30/2013					/2013			
Tx Harmonics 8-18GHz: No signals found – refer to pre-scans														

Harmonics in Restricted Bands – Reference Only

<u>fundamental</u>				<u>Harmonic</u>	<u>s</u>					
902.6	902.60	1805.20	2707.80	3610.40	4513.00	5415.60	6318.20	7220.80	8123.40	9026.00
915	915.00	1830.00	2745.00	3660.00	4575.00	5490.00	6405.00	7320.00	8235.00	9150.00
927.4	927.40	1854.80	2782.20	3709.60	4637.00	5564.40	6491.80	7419.20	8346.60	9274.00

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

8 Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.249.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

As shown in FCC15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

■ FCC 15.249(d)(e)/ 15.205/209

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Serial</u>	Cal Date	Cal Due
DEN- 073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
18906	RF Pre-Amp (1-4GHz)	Mini-Circuits Lab	ZHL-42	N052792-2	06/10/2013	06/10/2014
18900	RF Pre-Amplifier (4-8 GHz)	Avantek	AFT97-8434- 10F	1007	06/10/2014	06/10/2014
18901	RF Pre-Amp (8-18GHz)	Avantek	AWT-18037	1002	06/10/2013	06/10/2014
19936	Bilog Antenna 30MHz – 6GHz	Sunol Sciences	JB6	A050707-1	11/15/2012	11/15/2013
18887	Horn Antenna 1-18GHz	EMCO	3115	9205-3886	03/19/2013	03/19/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

Results:

The sample tested was found to comply.

Intertek						
Report Number: 101262612DEN-001F	Issued:9/30/2013					

Test Summary: Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge

Tx Spurious Emissions	Radiated Fie	Radiated Field Strength @ 3-meters								
Frequency Range:	⊠ 90)2-928MHz	☐ 5725-5850MHz							
Worst-case measurement (includes band edge)	Measured Field Strength (dBuV/m)	Duty Cycle Correction Factor (dB)	Final Corrected (dBuV/m)	Standard Limit (uV/m)	Limit (dBuV/m)	Margin dB				
Frequency MHz										
901.95	45.56	0.00	45.56		46.02	-0.46				
band edge										
RBW: VBW:	☑ 120kHz☑ 300kHz	☐ 300kHz ☐ 1MHz	☐ 500kHz [☐ 1MHz [0MHz 0MHz				
Antenna Gain:	⊠ < 6dBi	□ >6dB	i and = dBi	, Output power	reduction =	dB				

Test Method:

- FCC Publication 720338 & 433442
- ANSI C63.10:2009, Section 6.6

An intentional radiator shall be measured in accordance with 47 CFR 15.31-15.35. The detector functions and measuring bandwidths for these measurements are specified in 15.35. For measurements below 1 GHz, a quasi-peak detector shall be used. However, a peak detector may be used, since the measured valve will generally be higher with a peak detector. For measurements above 1 GHz, the limits are in terms of using an instrument with an average detector, unstated otherwise for a specific type of device. For device operating under Section 15.249, the limit is in terms of average with an additional peak limit of 20 dB over the average limit (see 47 CFR 15.249(e)).


Notes:

- All Tx Spurious of the Fundamental measurements are radiated field taken at 3-meters. 30MHz-1000MHz: RBW 120kHz, quasi-peak detector, max hold Above 1GHz: RBW 1MHz, average/peak detector, max hold
- 2. The product was tested in (3) axes refer to section 4 for details.
- 3. The transmitter is multi-channel.
- Measurements were not adjusted by the allowed duty cycle correction factor per FCC 15.35/ IC RSS-GEN. Section 4.5.
- 5. The limit for RSS-210 is identical to the limit for FCC 15.249.

Report Number: 101262612DEN-001F Issued:9/30/2013

Setup Photographs: Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge

Test Setup – Front View Axis 1

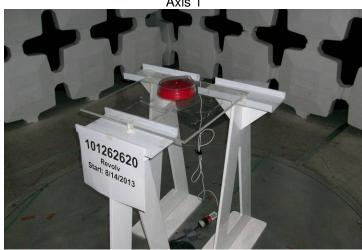

Axis 2




Axis 3




Report Number: 101262612DEN-001F Issued:9/30/2013

Setup Photographs: Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge


Test Setup – Rear View Axis 1

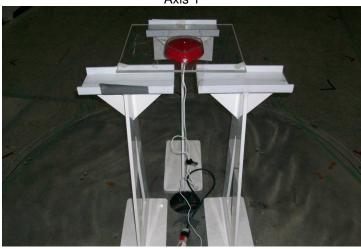

Axis 2

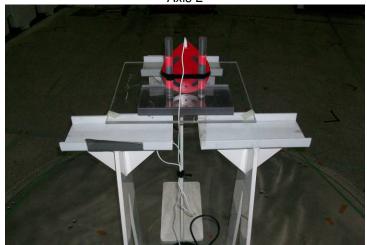

Axis 3

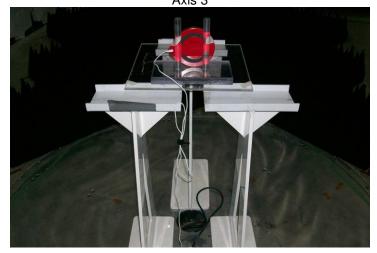


Intertek

Report Number: 101262612DEN-001F Issued:9/30/2013


Setup Photographs: Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge

Test Setup

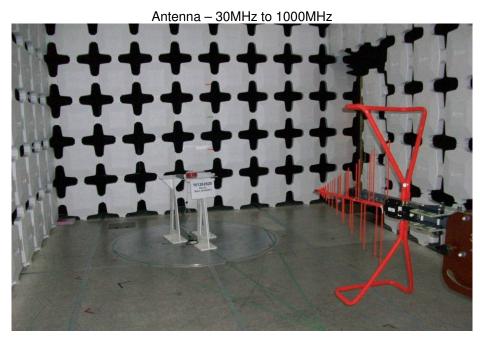





Low Channel: Axis 1 – Vertical

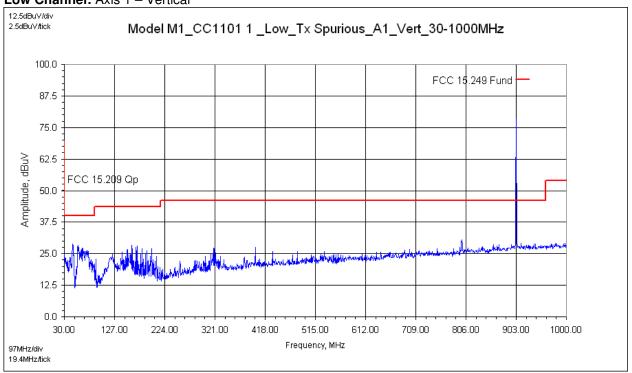


Low Channel: Axis 1 - Horizontal

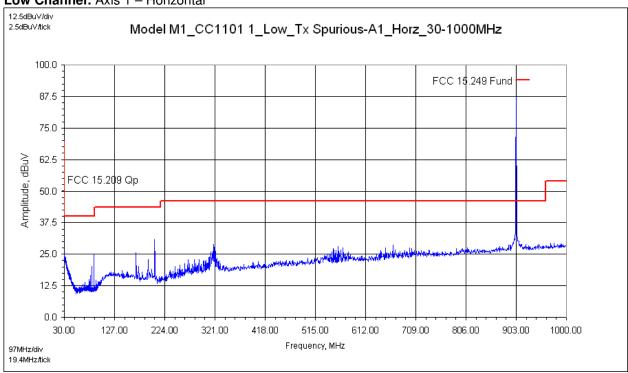


Mid Channel: Axis 1 – Vertical

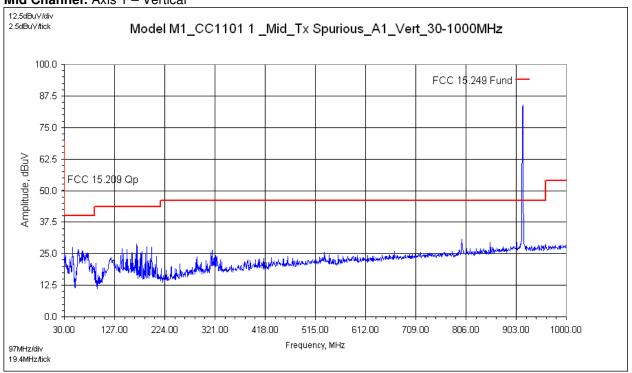


Mid Channel: Axis 1 - Horizontal

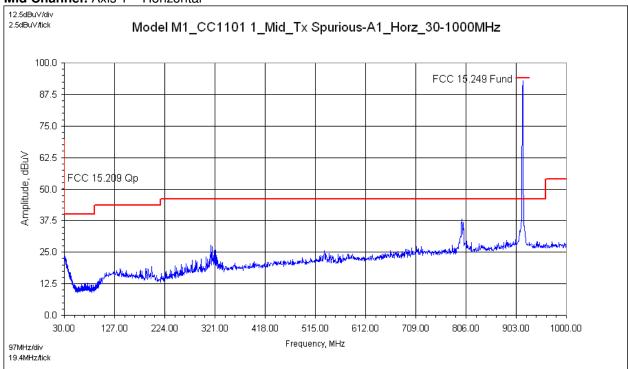


High Channel: Axis 1 - Vertical

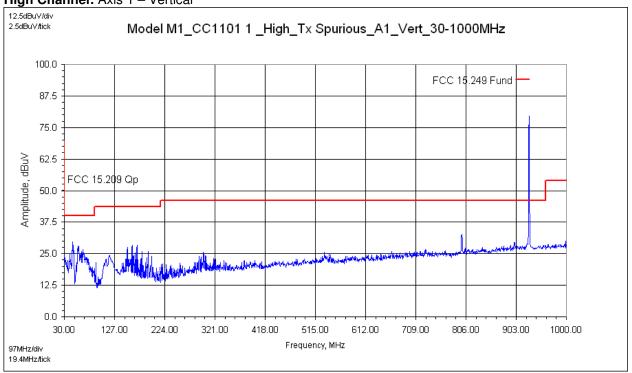


High Channel: Axis 1 - Horizontal

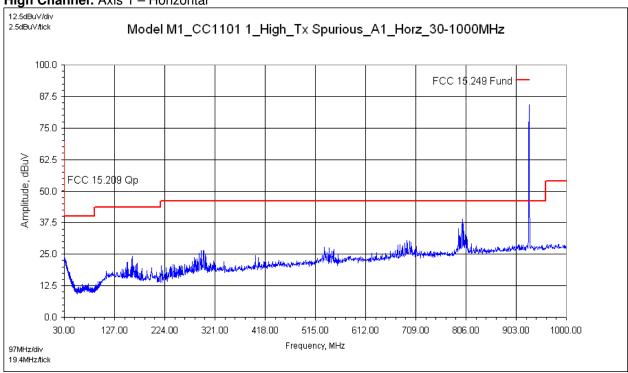


Low Channel: Axis 2 – Vertical

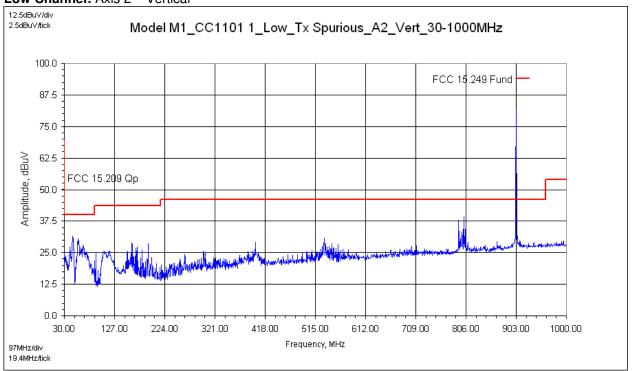


Low Channel: Axis 2 - Horizontal

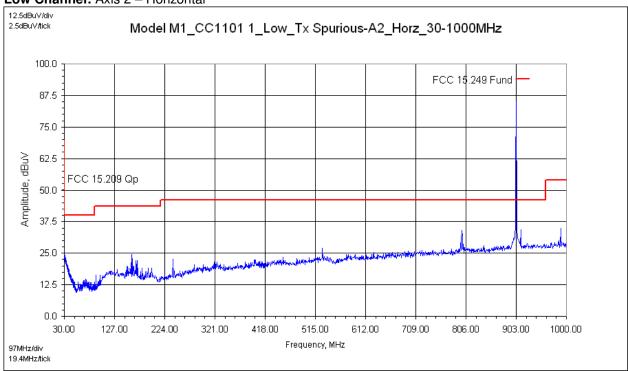


Mid Channel: Axis 2 – Vertical

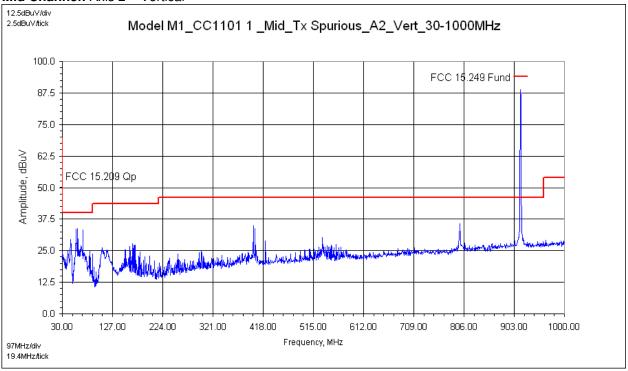


Mid Channel: Axis 2 - Horizontal

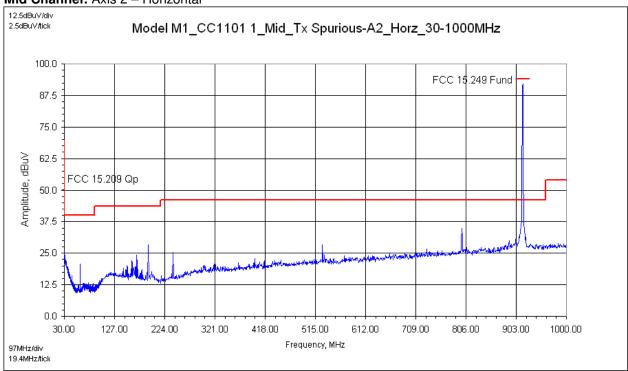


High Channel: Axis 2 - Vertical

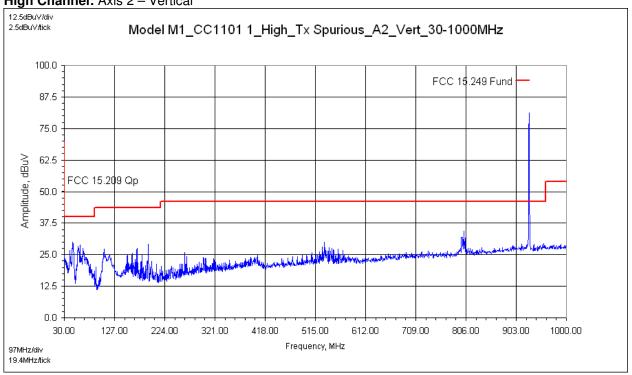


High Channel: Axis 2 - Horizontal

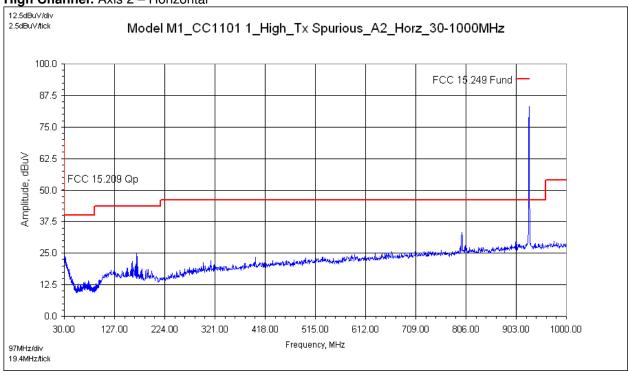


Low Channel: Axis 3 – Vertical

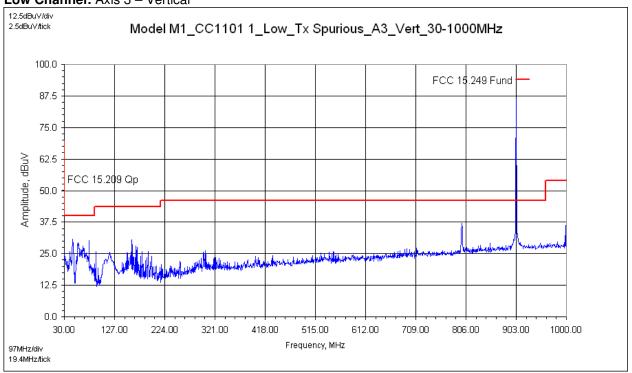


Low Channel: Axis 3 - Horizontal

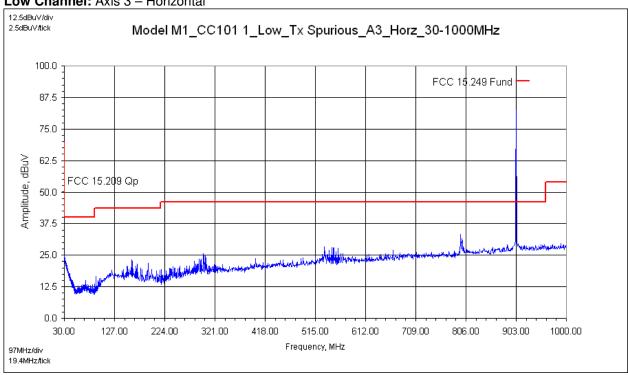


Mid Channel: Axis 3 – Vertical

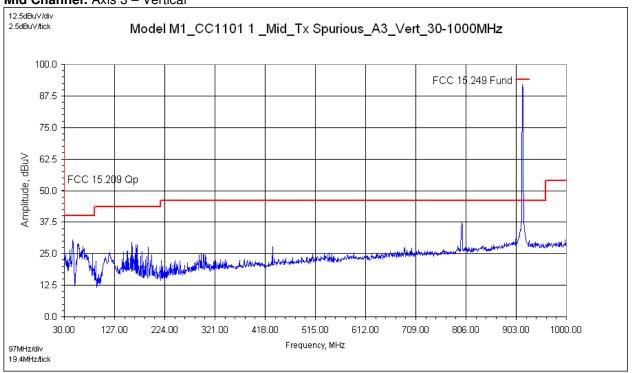


Mid Channel: Axis 3 - Horizontal

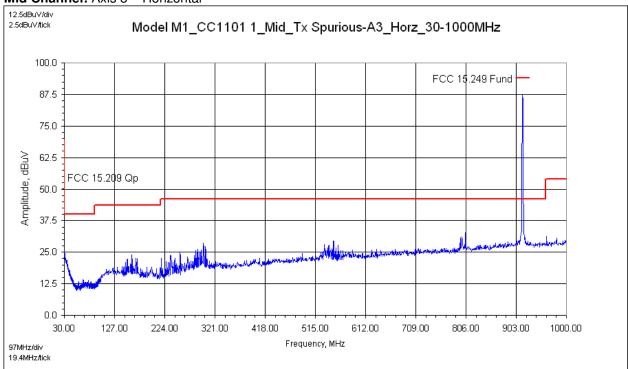

High Channel: Axis 3 - Vertical

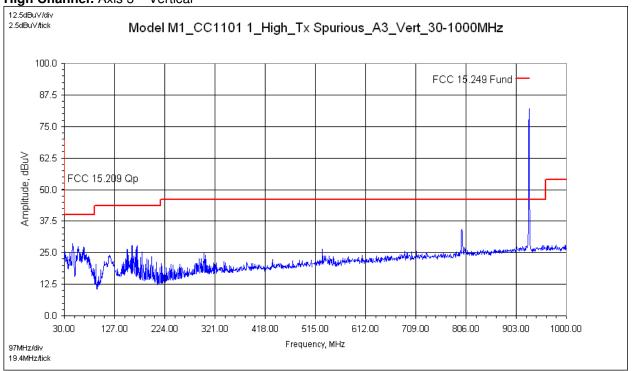

High Channel: Axis 3 - Horizontal

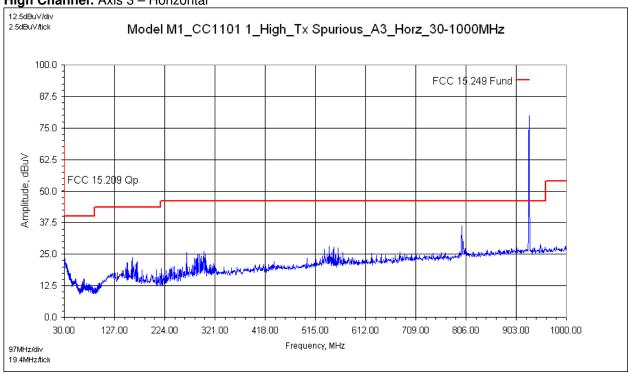

Intertek							
Report Number: 101262612DEN-001F	Issued:9/30/2013						

Plots in the frequency range of 1-10GHz can be found in Section 7 of this report.

Intertek							
Report Number: 101262612DEN-001F	Issued:9/30/2013						

Test Data: Radiated Tx Spurious Emissions – Including Restricted Band & Band Edge

Tx Spurious (Non-Harmonics) - Radiated Field Measurements

Test F	Report #:	nod: FCC 15.209/205		Test Area:	Test Area: CC1 Radiated			22.5	°C		
Test	Method:			Test Date:	Test Date: 10-Sep-2013		Relative Humidity:	21.4	%		
EUT I	Model #:			EUT Power:	120VAC/60Hz		Air Pressure:	83.1	— kPa		
		EUT Serial #:	FCC1								
Manufacturer:		Revolv, Inc.						Level Key	,		
EUT Revolv "Hub" – RF-Enabled Hom			" – RF-Enabled	Home Automation			Pk – Peak Nb – Narrow Ban				
Notes:	Product	transmitting co	ntinuously – C1	1101 #1 Radio active -	- GFSK Modulated	_	Qp – QuasiPeak	Bb – Bı	road Band		
Radio is a multi-channel: Lowest Channel 902.60MHz, Mid Channel 915.00MHz, Highest Channel 927.40MHz							Av - Average				
	All meas	surements peak	k detector – RB								

The following Duty Cycle was verified by Intertek: No Duty Cycle Correction was utilized in this test data.

Averaging method for pulsed signals and calculation in accordance to FCC CFR47 Part 15.35 utilized to calculate field strength emissions.

The testing performed in accordance to FCC CFR47 Part 15.249 and delta limits were calculated as follows:

Final Corrected Peak Measurement – Duty Cycle Correction Factor* = Final Calculated Emission

Duty

Cycle

Duty

Cycle

The Final Calculated Emission was then compared to the Limits in CFR47 Part 15.249 and the emission/limit delta was calculated.

FINAL

PREAMP

DCCF is calculated as follows $20*log_{10}$ (duty cycle in 100mS).

LEVEL

FREQ

Part 15.249 (a) Limit: Average 500uV/m = 54 dBuV/m / Peak 74 dB	3uV/m (3-meter test distance)
---	-------------------------------

Antenna

							ĆF	Corrected				LIMIT	LIMIT	
		Qp Av				=		Corrected Final	0.44		(250)	FCC	FCC 15.35(b)	
MHz	duV/m	Pk	+ [dB]	+ [dB/m]	- [dB]	[dBuV/m]	- [dB]	[dBuV/m]	(V/H)	(m)	(DEG)	15.209	Pk	(MHz)
	Harmonics of the Fundamental Measurements – Radiated Field [dBuV/m] [x Spurious 30MHz to 1000MHz: Low/High Channel - Worst-Case Axis 2 – Product Flat on Table (Horizontal)													
•	1		1			1	1	1			1	1	I	1
46.8237	42.04	Qp	0.77	9.50	28.25	24.06	0.00	24.06	V	1.00	0.0	- 15.94	NA	0.120
56.8936	41.78	Qp	0.77	7.49	28.22	21.82	0.00	21.82	V	1.00	315.9	- 18.18	NA	0.120
160.0000	16.29	Qp	0.85	12.70	27.77	2.07	0.00	2.07	V	1.38	83.6	- 41.45	NA	0.009
397.6000	35.17	Qp	1.37	15.85	27.87	24.52	0.00	24.52	٧	1.38	179.8	- 21.50	NA	0.120
798.3384	36.03	Qp	1.97	21.13	28.13	31.01	0.00	31.01	V	1.38	83.6	- 15.01	NA	0.120
Low Channe	l Band Ed	ge Meas	surements											
901.8000	18.16	Qp	2.10	22.40	0.00	42.66	0.00	42.66	Н	1.00	338.0	- 3.36	NA	0.120
901.9500	21.06	Qp	2.10	22.40	0.00	45.56	0.00	45.56	Н	1.00	338.0	- 0.46	NA	0.120
901.9500	14.02	Qp	2.10	22.40	0.00	38.52	0.00	38.52	V	1.24	338.0	- 7.50	NA	0.120
High Channe	el Band Ed	lge Mea	surements											
928.1000	20.99	Qp	2.13	22.40	0.00	45.52	0.00	45.52	Н	1.00	323.0	- 0.50	NA	0.120
928.2000	15.59	Qp	2.13	22.40	0.00	40.12	0.00	40.12	Н	1.00	323.0	- 5.90	NA	0.120
928.2000	10.69	Qp	2.13	22.40	0.00	35.22	0.00	35.22	Н	1.00	323.0	- 10.80	NA	0.120
Tx Spuriou	x Spurious 30MHz to 1000MHz: Low/High Channel - Axis 3 – Product Vertical & rotated 90 degrees													

DELTA

DELTA2


RBW

						Inte	rtek							
	Report N	lumbe	r: 1012	62612DEN	N-001F						lss	ued:9/30)/2013	
46.2147	41.12	Qp	0.77	9.87	28.25	23.51	0.00	23.51	٧	1.00	346.4	- 16.49	NA	0.120
67.0000	39.83	Qp	0.77	8.10	28.19	20.51	0.00	20.51	V	1.00	40.3	- 19.49	NA	0.120
159.9400	44.40	Qp	0.85	12.71	27.77	30.18	0.00	30.18	V	1.13	227.3	- 13.34	NA	0.120
798.0769	40.97	Qp	1.97	21.12	28.13	35.93	0.00	35.93	V	1.29	166.7	- 10.09	NA	0.120
Tx Spurious	s 1-4GHz:	Mid Ch	nannel Ax	is 1 – Produ	ct Flat on Ta	able								
1329.6000	64.53	Pk	2.56	25.21	36.87	55.44	0.00	55.44	Н	1.00	78.7	NA	- 18.56	1.000
1329.6000	48.42	Av	2.56	25.21	36.87	39.33	0.00	39.33	Н	1.00	78.7	- 14.67	NA	1.000
1330.0000	65.33	Pk	2.56	25.21	36.87	56.24	0.00	56.24	Н	1.01	65.9	NA	- 17.76	1.000
1330.0000	46.74	Av	2.56	25.21	36.87	37.65	0.00	37.65	Н	1.01	65.9	- 16.35	NA	1.000
1861.2630	57.34	Pk	3.07	27.13	37.09	50.45	0.00	50.45	Н	1.00	287.6	NA	- 23.55	1.000
1861.2630	42.38	Av	3.07	27.13	37.09	35.49	0.00	35.49	Н	1.00	287.6	- 18.51	NA	1.000
Tx Spurious	s 1-4GHz:	Mid Ch	nannel Ax	is 3 – Produ	ct Vertical 8	k rotated 90	degrees							<u> </u>
1329.6000	61.46	Pk	2.56	25.21	36.87	52.37	0.00	52.37	V	1.44	194.6	NA	- 21.63	1.000
1329.6000	52.67	Av	2.56	25.21	36.87	43.58	0.00	43.58	V	1.44	194.6	- 10.42	NA	1.000
1861.2630	58.49	Pk	3.07	27.13	37.09	51.60	0.00	51.60	V	1.51	205.8	NA	- 22.40	1.000
1861.2630	45.95	Av	3.07	27.13	37.09	39.06	0.00	39.06	V	1.51	205.8	- 14.94	NA	1.000
Tx Spurious	s 4-10 GF	lz: No s	ignals fou	nd – refer t	o pre-scan p	olots								<u> </u>


Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Plots: Lower Band Edge

Axis 1 - Vertical

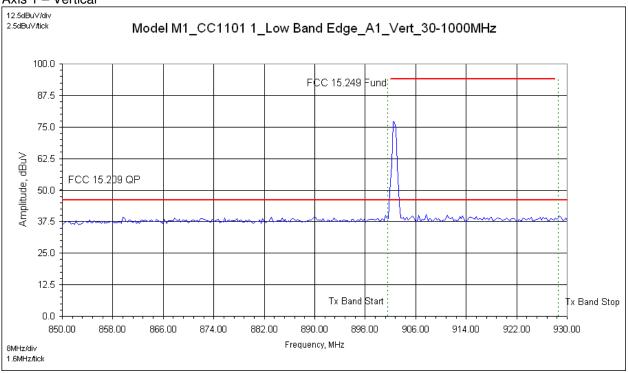


Axis 1 – Horizontal

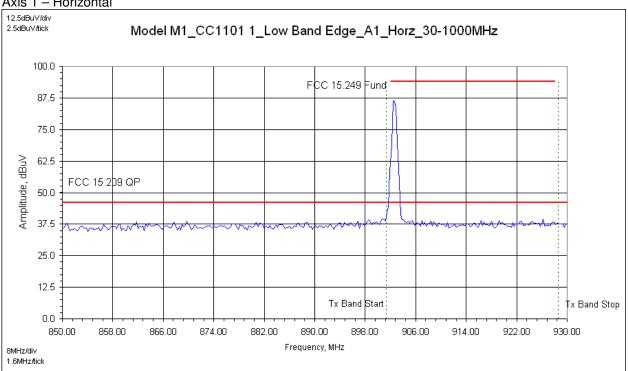


Plots: Upper Band Edge

Axis 1 – Vertical

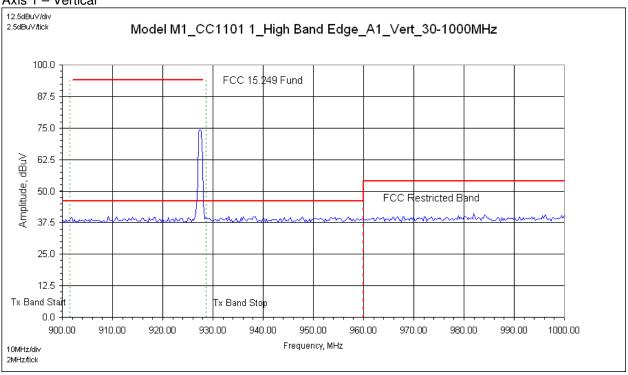

Axis 1 – Horizontal

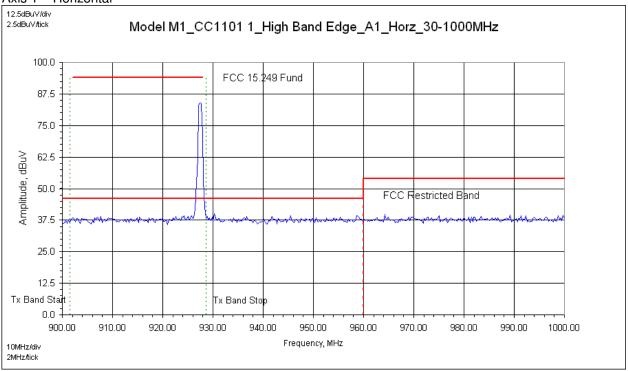

Inte	ertek
Report Number: 101262612DEN-001F	Issued:9/30/2013

9 Occupied Bandwidth (OBW) - Not Applicable

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from IC RSS-GEN.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

When an occupied bandwidth value is not specified in the applicable standard, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

■ IC RSS-GEN, Clause 4.6.1

Test Equipment Used:

Asset ID:	Description:	Manufacturer:	Model:	Serial:	Cal Date	Cal Due
-----------	--------------	---------------	--------	---------	----------	---------

Results:

Not applicable – test not required per FCC standard.

Test Summary:

Occupied Bandwi	Occupied Bandwidth (OBW) Summary							
Channel/ Mode	OBW							

Specification: 99% Power Emission Bandwidth

Test Method:

IC RSS-GEN: 2010, Section 4.6.1

ANSI C63.10:2009, Section 6.9.1

Test Setup Photographs:

Test Data:

Inte	ertek
Report Number: 101262612DEN-001F	Issued:9/30/2013

10 Requirements for fixed, point-to-point operation – Not Applicable

Method:

The test methods used comply with ANSI C63.4 and CISPR 16. Unless otherwise stated no deviations were made from FCC 15.249 & RSS-210.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

- FCC 15.249(b)(e)
- RSS-210

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Serial</u>	Cal Date	Cal Due

Results:

Test not applicable – product is not a fixed, point-to-point system.

Test Summary:

Test Method:

Notes: None

Setup Photographs:

Plots:

Test Data:

Example calculation:

Measured Level	+	Transducer, Cable Loss & Amplifier corrections	=	Corrected Reading	Specification Limit	Corrected Reading	Delta Specification
(dBµV)		(dB)		(dBµV/m)	(dBµV/m)	(dBµV/m)	
14.0		14.9		28.9	40.0	28.9	-11.1

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

11 Duty Cycle Correction Factor – Not Used

No duty cycle correction factor was utilized during this testing – therefore, product duty cycle verification was not applicable.

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC CFR47 15.35(c) & IC RSS-GEN.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Determine the period of the pulse train, T, in mSec and record the results. T is defined as the time from the beginning of one pulse train to the beginning of the next pulse train.

Count the number of different types of pulses, N and record the results.

For each of the different types of pulses, count the number of occurrences within one pulse train. Use the Duty Cycle Correction Factor, DCCF, from the results table and use it to adjust the field strength measurements recorded for radiated emissions.

- FCC 15.35(c)
- RSS-GEN, Clause 4.5

Test Equipment Used:

Results:

Not applicable

Test Method:

ANSI C63.10: 2009, Clause 7.5

Test Summary:

Duty Cycle Measurements					

D	late		
	เบเจ	•	

Test Data:

Notes: None

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

12 AC Mains Conducted Emissions – Transmitter

Method:

The test methods used comply with ANSI C63.4 and CISPR 16. Unless otherwise stated no deviations were made from FCC 15.207.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

FCC 15.207

The product must pass the AC Conducted average and quasi-peak Limits defined in FCC Part 15.207.

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacture</u>	Model	<u>Serial</u>	Cal Date	Cal Due
DEN-073	EMI Receiver	ROHDE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18885	Transient Limiter	Hewlett-Packard	11947A	3107A00700	05/05/2013	05/05/2014
18914	Single Phase LISN	EMCO	3816/NM	9408-1003	04/11/2013	04/11/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 1.0	VBU	VBU

Test Procedure:

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at all frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.10.

Results:

The sample tested was found to comply.

Test Summary:

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

FREQ	LEVEL	DET	CABLE	LISN	PREAMP	ATTEN	FINAL	TEST POINT	DELTA1	DELTA2	RBW
MHz	dBuV	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	Line 1 Line2 (Neutral)	FCC 15.207 Average	FCC 15.207 Qp	(MHz)
Measured Da		to 30MI			[СВ]	+ [ub]	_ [ubuv]		Average	ω ρ	(1011 12)
0.377	24.27	Av	0.10	0.03	0.00	9.97	34.37	Line 1	- 13.99	NA	0.009

Test Method:

ANSI C63.10:2009, Section 6.2

Notes:

1. All product radios (transmitters) were enabled and continuously transmitting during testing.

Setup Photographs: AC Mains Conducted Emissions – Transmitter

Test Setup – Front View






Inte	ertek
Report Number: 101262612DEN-001F	Issued:9/30/2013


Setup Photographs: AC Mains Conducted Emissions – Transmitter


Test Setup - Rear View

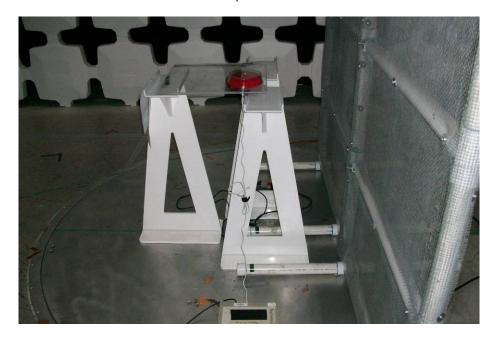


Plots: AC Mains Conducted Emissions - Transmitter


Line 1

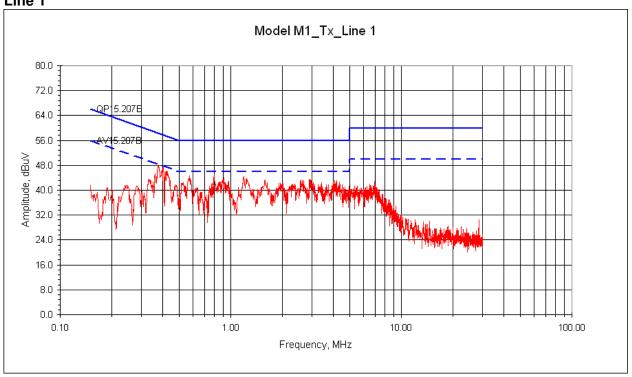




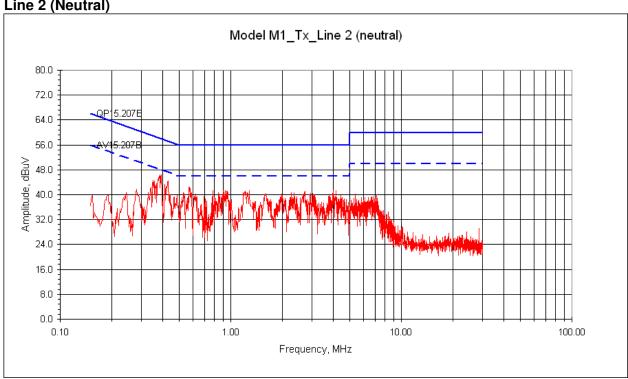

Final Plots: AC Mains Conducted Emissions - Transmitter

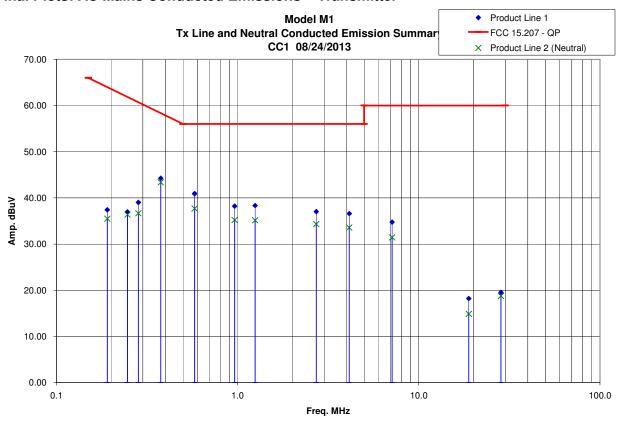

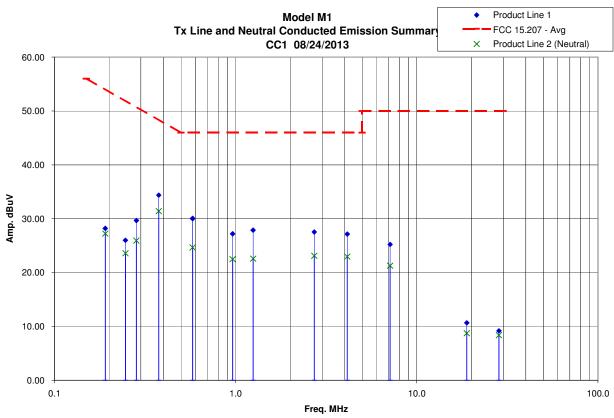

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: AC Mains Conducted Emissions – Transmitter

Tx AC Conducted Electromagnetic Emissions

Test Report #:	G101262620	Test Area:	CC1 Conducted	Temperature:	23.5	С
Test Method:	FCC 15.207	Test Date:	24-Aug-2013	Relative Humidity:	22.8	%
EUT Model #:	M1	EUT Power:	120V/ 60Hz	Air Pressure:	82.8	kPa
EUT Serial #:	FCC1					
Manufacturer:	Revolv				Level Key	
EUT Description:	Revolv Hub – RF-enabled Home Autor	nation		Pk - Peak	Nb - Narrow Band	
Notes:	AC Adapter: Model UN310-0520			Qp - QuasiPeak	Bb - Broad Band	
	Product tested in Tx mode of operation	- all radios acti	ve	Av - Average		

FREQ	LEVEL	DET	CABLE	LISN	PREAMP	ATTEN	FINAL	TEST POINT	DELTA1	DELTA2	RBW	
MHz	<u>dBuV</u>	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	Line 1 Line2 (Neutral)	FCC 15.107 Class B Average	FCC 15.107 Class B Qp	(MHz)	
Line 1 Data -	e 1 Data – 150kHz to 30MHz											
0.191	18.11	Av	0.10	0.03	0.00	9.96	28.21	Line 1	- 25.79	NA	0.009	
0.191	27.31	Qp	0.10	0.03	0.00	9.96	37.41	Line 1	NA	- 26.59	0.009	
0.247	15.91	Αv	0.10	0.03	0.00	9.96	26.00	Line 1	- 25.86	NA	0.009	
0.247	26.87	Qp	0.10	0.03	0.00	9.96	36.96	Line 1	NA	- 24.90	0.009	
0.283	19.57	Αv	0.10	0.03	0.00	9.97	29.66	Line 1	- 21.05	NA	0.009	
0.283	28.92	Qp	0.10	0.03	0.00	9.97	39.01	Line 1	NA	- 21.70	0.009	
0.377	24.27	Av	0.10	0.03	0.00	9.97	34.37	Line 1	- 13.99	NA	0.009	
0.377	34.15	Qp	0.10	0.03	0.00	9.97	44.25	Line 1	NA	- 14.11	0.009	
0.579	19.95	Av	0.10	0.02	0.00	9.97	30.05	Line 1	- 15.95	NA	0.009	
0.579	19.92	Av	0.10	0.02	0.00	9.97	30.02	Line 1	- 15.98	NA	0.009	
0.579	30.78	Qp	0.10	0.02	0.00	9.97	40.88	Line 1	NA	- 15.12	0.009	
0.579	30.83	Qp	0.10	0.02	0.00	9.97	40.93 Line 1		NA	- 15.07	0.009	
0.963	16.99	Av	0.20	0.03	0.00	9.98	27.19	27.19 Line 1 - 18.8		NA	0.009	
0.963	28.02	Qp	0.20	0.03	0.00	9.98	38.22	Line 1	NA	- 17.78	0.009	
1.250	17.67	Av	0.20	0.03	0.00	9.98	27.88	Line 1	- 18.12	NA	0.009	
1.250	28.11	Qp	0.20	0.03	0.00	9.98	38.32	Line 1	NA	- 17.68	0.009	
2.718	17.31	Av	0.20	0.03	0.00	9.98	27.53	Line 1	- 18.47	NA	0.009	
2.718	26.80	Qp	0.20	0.03	0.00	9.98	37.02	Line 1	NA	- 18.98	0.009	
4.135	16.83	Av	0.30	0.04	0.00	9.98	27.15	Line 1	- 18.85	NA	0.009	
4.135	26.29	Qp	0.30	0.04	0.00	9.98	36.61	Line 1	NA	- 19.39	0.009	
7.131	14.75	Av	0.40	0.07	0.00	9.99	25.21	Line 1	- 24.79	NA	0.009	
7.131	24.28	Qp	0.40	0.07	0.00	9.99	34.74	Line 1	NA	- 25.26	0.009	
18.910	- 0.67	Av	1.10	0.20	0.00	10.02	10.65	Line 1	- 39.35	NA	0.009	
18.910	6.88	Qp	1.10	0.20	0.00	10.02	18.20	Line 1	NA	- 41.80	0.009	
28.429	- 2.29	Av	1.31	0.12	0.00	10.04	9.18	Line 1	- 40.82	NA	0.009	
28.429	8.06	Qp	1.31	0.12	0.00	10.04	19.53	Line 1	NA	- 40.47	0.009	
Line 2 (Neutr	al) Data – 150	0kHz to	30MHz									
0.191	17.15	Av	0.10	0.03	0.00	9.96	27.25	Line 2	- 26.75	NA	0.009	
0.191	25.38	Qp	0.10	0.03	0.00	9.96	35.48	Line 2	NA	- 28.52	0.009	

Intertek Report Number: 101262612DEN-001F Issued:9/30/2013

0.247	13.50	Av	0.10	0.03	0.00	9.96	23.59	Line 2	- 28.28	NA	0.009
0.247	26.28	Qp	0.10	0.03	0.00	9.96	36.37	Line 2	NA	- 25.50	0.009
0.283	15.83	Av	0.10	0.03	0.00	9.97	25.92	Line 2	- 24.79	NA	0.009
0.283	26.57	Qp	0.10	0.03	0.00	9.97 36.60		Line 2	NA	- 24.05	0.009
0.377	21.31	Av	0.10	0.02	0.00	9.97	31.40	Line 2	- 16.95	NA	0.009
0.377	33.28	Qp	0.10	0.02	0.00	9.97	43.37	Line 2	NA	- 14.98	0.009
0.579	14.57	Av	0.10	0.02	0.00	9.97	24.67	Line 2	- 21.33	NA	0.009
0.579	27.59	Qp	0.10	0.02	0.00	9.97	37.69	Line 2	NA	- 18.31	0.009
0.963	12.27	Av	0.20	0.02	0.00	9.98	22.47	Line 2	- 23.53	NA	0.009
0.963	25.03	Qp	0.20	0.02	0.00	0 9.98 35.23 Line 2 NA		NA	- 20.77	0.009	
1.250	12.37	Av	0.20	0.03	0.00	9.98	22.58	Line 2	- 23.42	NA	0.009
1.250	24.95	Qp	0.20	0.03	0.00	9.98	35.16	Line 2	NA	- 20.84	0.009
2.718	12.89	Av	0.20	0.03	0.00	9.98	23.10	Line 2	- 22.90	NA	0.009
2.718	24.11	Qp	0.20	0.03	0.00	9.98	34.32	Line 2	NA	- 21.68	0.009
4.135	12.65	Av	0.30	0.03	0.00	9.98	22.97	Line 2	- 23.03	NA	0.009
4.135	23.24	Qp	0.30	0.03	0.00	9.98	33.56	Line 2	NA	- 22.44	0.009
7.131	10.79	Av	0.40	0.07	0.00	9.99	21.25	Line 2	- 28.75	NA	0.009
7.131	20.98	Qp	0.40	0.07	0.00	9.99	31.44	Line 2	NA	- 28.56	0.009
18.910	- 2.59	Av	1.10	0.20	0.00	10.02	8.73	Line 2	- 41.27	NA	0.009
18.910	3.53	Qp	1.10	0.20	0.00	10.02	14.85	Line 2	NA	- 45.15	0.009
28.429	- 3.17	Av	1.31	0.20	0.00	10.04	8.38	Line 2	- 41.62	NA	0.009
28.429	7.20	Qp	1.31	0.20	0.00	10.04	18.75	Line 2	NA	- 41.25	0.009

Example calculation:

Measured Level	+	Transducer, Cable Loss & Amplifier corrections	=	Corrected Reading	Specification Limit	Corrected Reading	=	Delta Specification
(dBµV)		(dB)		(dBµV/m)	(dBµV/m)	(dBµV/m)		
14.0		14.9		28.9	40.0	28.9		-11.1

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

13 Antenna Requirement

Method

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC CFR47 15.203.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

FCC 15.203

Results:

The product utilizes an integral antenna – not user accessible; therefore, the sample tested was found to comply.

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

14 RF Exposure Requirements

Method

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC OET 65 & IC RSS-102.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification

- FCC OET Bulletin 65/ KDB 447498
- RSS-102

Results:

The sample tested was found to comply.

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Test Data: RF Exposure – MPE

RF Exposure Requirements - MPE

Project #:	G101262612	Test Area:	Intertek Louisville
Test Method:	FCC CFR47 Part 1.1310	Test Date:	09/25/2013
EUT Model #:	M1		
EUT Serial #:	FCC1		
Manufacturer:	Revolv, Inc.		
EUT Description:	Wireless RF-enabled Home Automation Hub		
Notes:	CC1101 #1 Radio: 902.6 to 927.4MHz (multi-channel)		

The following limit is from table 1 (B) Limits for General Population/Uncontrolled Exposure in FCC part 1.1310:

Power Density Limit for Frequency Range 300 - 1500 MHz: $F(MHz)/1500 \text{ mW/cm}^2 = \frac{902.6/1500}{0.602 \text{ mW/cm}^2}$

The following calculation was used to determine compliance to the above limit. The calculation is from FCC OET bulletin 65.

Power Density(S) =PG/ 4π R² or S=EIRP/ 4π R²

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (mW).

G = numeric power gain of the antenna in the direction of interest relative to an isotropic radiator.

R = distance to the center of radiation of the antenna (cm)

In this case, 20cm will be used.

CC1101 #1: 902.6 - 927.4MHz (Multi-Channel) Radio

Maximum measured radiated field strength at 3-meters = 93.22 dBuV/m

Maximum typical gain declared by the manufacture = -1.0 dBi = 0.794 (numeric gain)

Production Tolerance declared = +/- 0.45dB

Calculated power input to the antenna = Measured Field Strength - Antenna Gain + Production Tolerance

 $93.22 \text{ dBuV/m} - (-1.0 \text{dBi}) + 0.45 \text{dB} = 94.67 \text{ dBuV/m} = \frac{0.87926797 \text{ mW}}{0.87926797 \text{ mW}}$

Power Density

Power (mW)	Gain (dbi)	Gain numeric	Distance (cm)	Power Density (mW/cm²)
0.87926797	-1.0	0.794	20	0.000139

Therefore: Power Density Margin (Δ Limit) = 0.000139 – 0.602 = -0.6018611 mW/cm²

Intertek			
Report Number: 101262612DEN-001F	lssued:9/30/2013		

To determine what minimum distance the product will satisfy the Power Density Limit:

$$R(cm) = SQRT[(P*G)/(4*\pi*S)] = 0.3037663 cm$$

Therefore: Distance Margin (Δ Limit) = = 0.3037663 cm - 20 cm = -19.6962337 cm

Reference Conversion Equations:

- 1. Gain numeric = 10 ^(dBi/10)
- 2. Gain (dBi) = 10 log(Gain numeric)
- 3. dBm = dBuV/m 107 (50 ohm system)
- 4. dBm to Watts (W) = $10^{((dBm 30)/10)}$

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

15 Unintentional Radiated Emissions (Digital Part of Receiver)

Method:

Unless otherwise stated no deviations were made from FCC Part 15.109 - Class B.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacturer</u>	Model	<u>Serial</u>	Cal Date	Cal Due
DEN- 073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	8447F	3113A05545	06/07/2013	06/07/2014
18906	RF Pre-Amp (1-4GHz)	Mini-Circuits Lab	ZHL-42	N052792-2	06/10/2013	06/10/2014
19936	Bilog Antenna 30MHz – 6GHz	Sunol Sciences	JB6	A050707-1	11/15/2012	11/15/2013
18887	Horn Antenna 1-18GHz	EMCO	3115	9205-3886	03/19/2013	03/19/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 3.0	VBU	VBU

Test Requirement:

The product must pass Unintentional Radiated Emissions - Class B.

Unwanted emissions below 1GHz must comply with the general field strength limits defined in FCC Part 15.109, when measured with a quasi-peak detector. Unwanted emissions above 1GHz are measured with an average detector.

Test Procedure:

The Resolution Bandwidth is 120 kHz for frequencies 30 MHz -1000 MHz and 1 MHz for frequencies above 1000 MHz.

The EUT is placed on a plastic turntable that is 80 cm in height. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables are manipulated to produce worst-case emissions. The signal is maximized by rotating the turntable through a 360° rotation. The antenna height is varied from 1-4 meters. Both vertical and horizontal antenna configurations are utilized in the testing.

Radiated emissions are taken at 3-meter antenna-to-product test distance for all measurements.


Data is included for the worst-case configuration (the configuration which resulted in the highest emission levels).

Test Results:

The sample tested was found to Comply.

Setup Photographs: Product Axis 1 – Horizontal Position (Product Flat on Table)

Unintentional Radiated Emissions - Test setup (Front View)

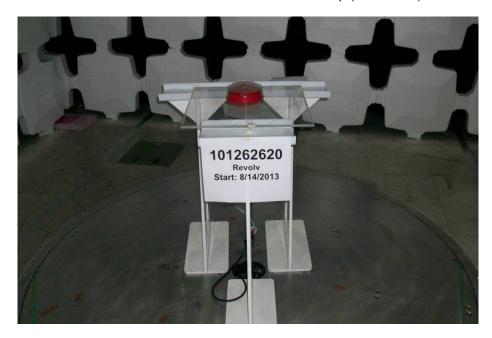



Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Setup Photographs: Product Axis 1 – Horizontal Position (Product Flat on Table)

Unintentional Radiated Emissions - Test setup (Rear View)



Setup Photographs: Product Axis 2 – Product Vertical on Table (Wall Mount)

Unintentional Radiated Emissions - Test setup (Front View)





Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Setup Photographs: Product Axis 2 – Product Vertical on Table (Wall Mount)

Unintentional Radiated Emissions - Test setup (Rear View)



Setup Photographs: Product Axis 3 – Product Vertical & Rotated 90 Degrees

Unintentional Radiated Emissions - Test setup (Front View)






Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Setup Photographs: Product Axis 3 – Product Vertical & Rotated 90 Degrees

Unintentional Radiated Emissions - Test setup (Rear View)

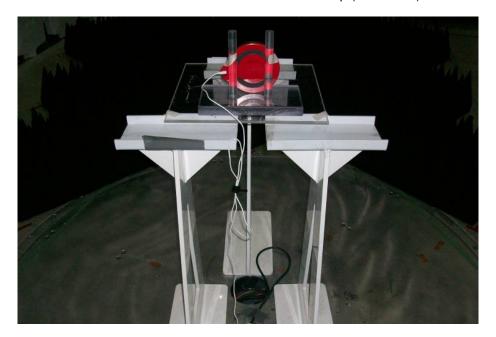


Setup Photographs: Antennas

Antenna Setup – 30MHz to 1000MHz




Antenna Setup – 1GHz to 2GHz

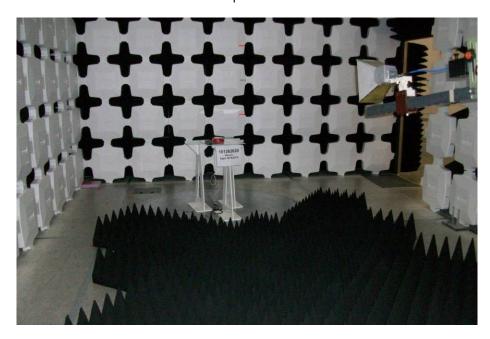


Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Pre-scan Plots: Product Axis 1 – Horizontal Position (Product Flat on Table)

30MHz to 1000MHz

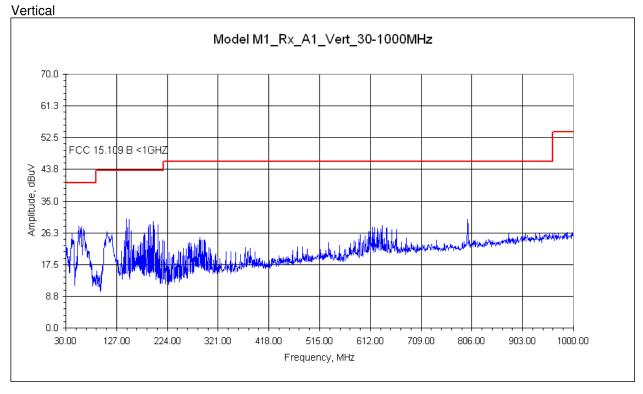

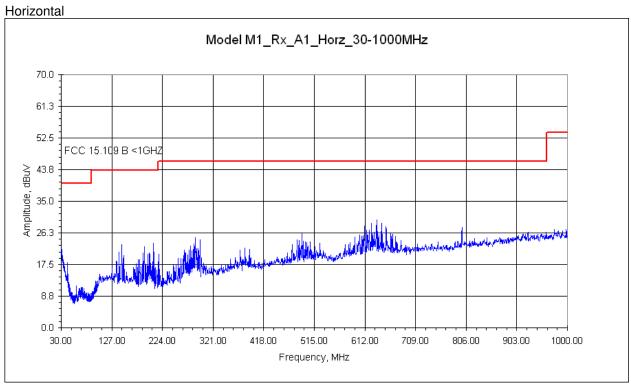



Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F Issued:9/30/2013		

Pre-scan Plots: Product Axis 1 – Horizontal Position (Product Flat on Table)

1GHz to 4GHz

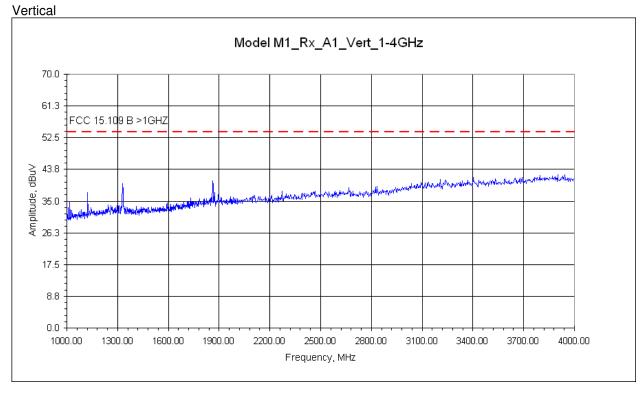

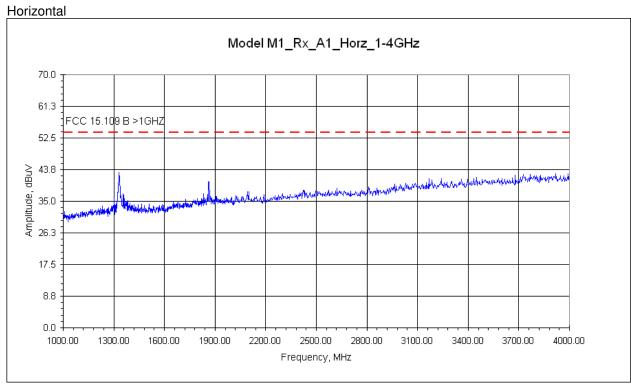



Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Pre-scan Plots: Product Axis 2 – Product Vertical on Table (Wall Mount)

30MHz to 1000MHz

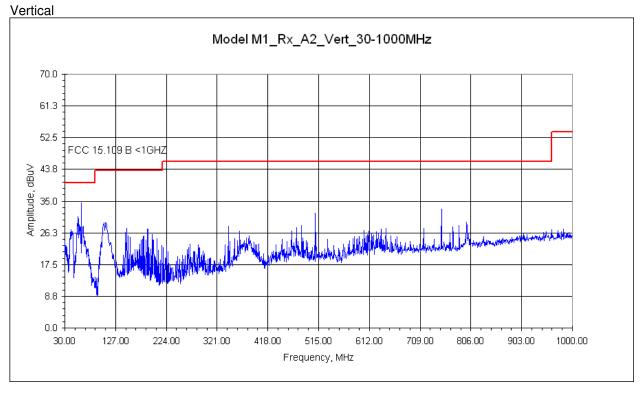

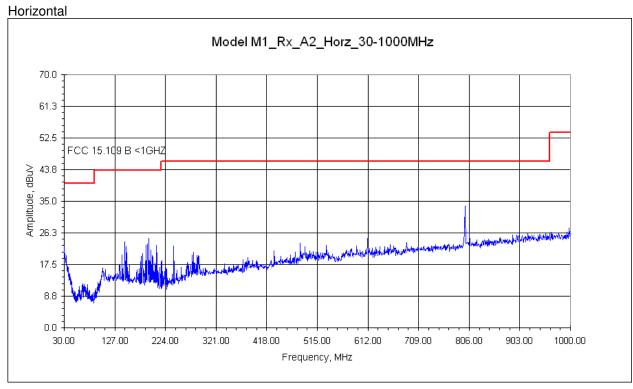



Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F Issued:9/30/2013		

Pre-scan Plots: Product Axis 2 – Product Vertical on Table (Wall Mount)

1GHz to 4GHz

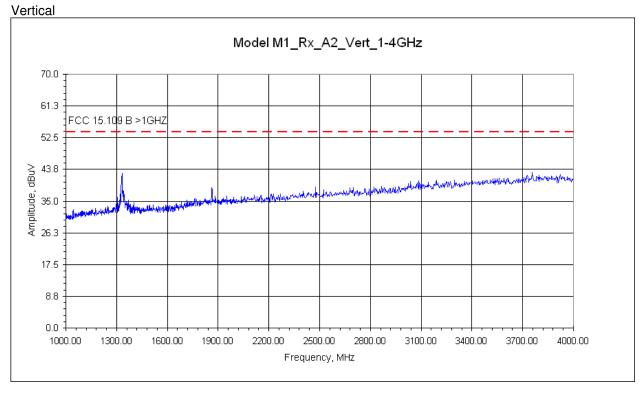

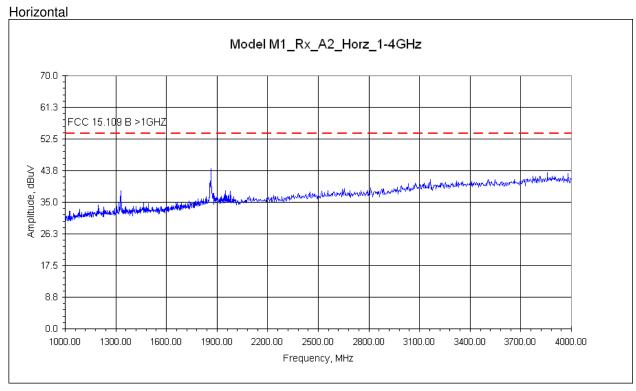



Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F Issued:9/30/2013		

Pre-scan Plots: Product Axis 3 – Product Vertical & Rotated 90 Degrees

30MHz to 1000MHz

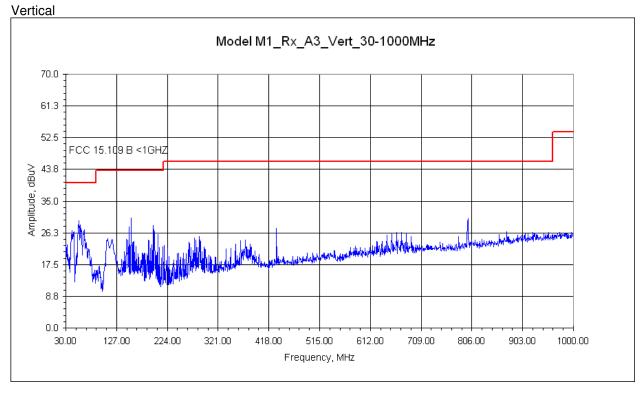

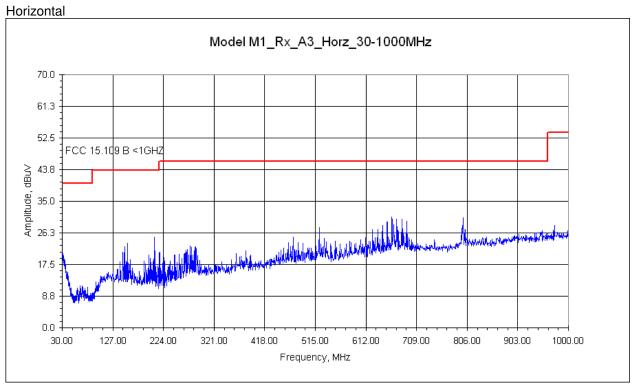



Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F Issued:9/30/2013		

Pre-scan Plots: Product Axis 3 – Product Vertical & Rotated 90 Degrees

1GHz to 4GHz

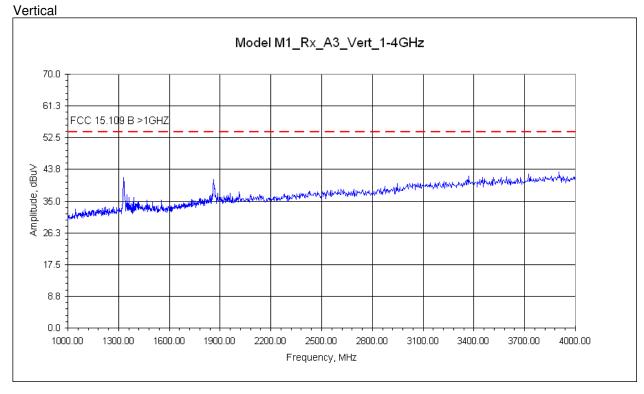

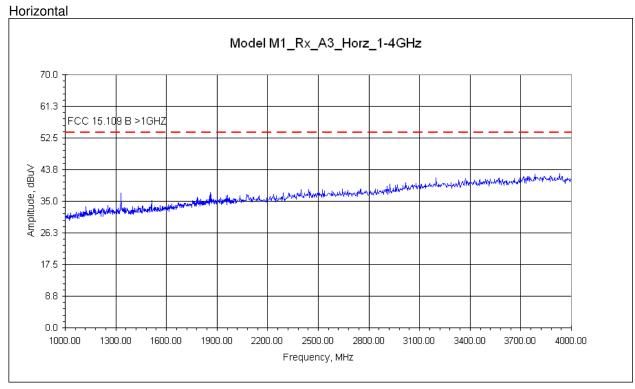


Reference only - to determine signals to be maximized

Intertek		
Report Number: 101262612DEN-001F	Issued:9/30/2013	

Final Plots: Product Axis 1 – Horizontal (Product Flat on Table)


FCC 15.109-Class B (30MHz to 1000MHz)

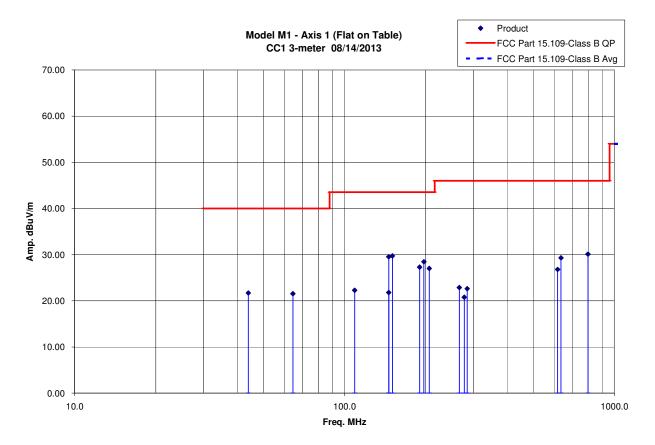

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Final Plots: Product Axis 2 – Product Vertical on Table (Wall Mount)

FCC 15.109-Class B (30MHz to 2GHz)

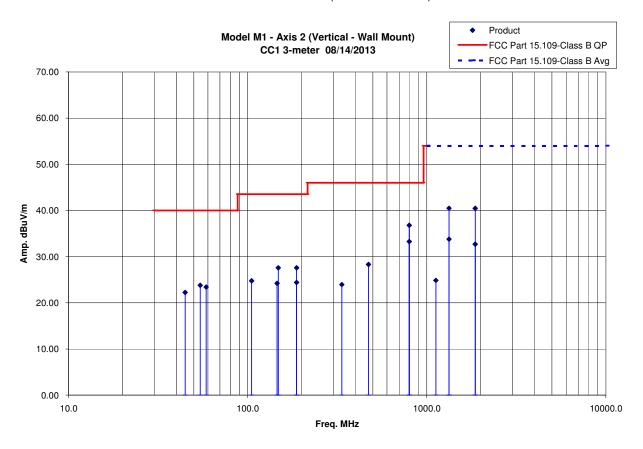


Note: Axis 2 was worst-case above 1GHz as determined from pre-scans

Inte	rtek			
Report Number: 101262612DEN-001F Issued:9/30/				

Final Plots: Product Axis 3 – Product Vertical & Rotated 90 Degrees

FCC 15.109-Class B (30MHz to 1000MHz)

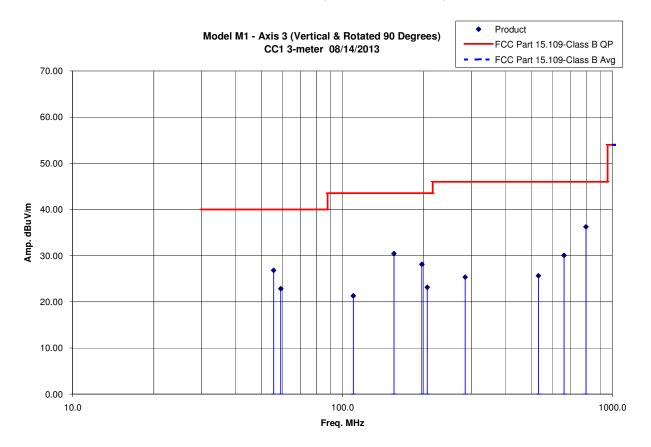

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: Axis 1 – Horizontal (Product Flat on Table)

Radiated Electromagnetic Emissions

Test R	eport #:	G101262620	Test Area:	CC1 Radiated	Temperature: 23.4	°C
Test I	Method:	FCC 15.109 - Class B	Test Date:	08/14/2013	Relative Humidity: 33.5	%
EUT N	flodel #:	M1	EUT Power:	120V/ 60Hz	Air Pressure: 82.7	kPa _
	EUT S	erial #: FCC1				
Manuf	acturer:	Revolv			Level Key	
Des	EUT Revolv Hub – RF-enabled Home Automation wireless hub Description:				Pk – Peak	
Notes	AC Ada	pter: Unifive Model UN31	Qp – Quasi Peak			
	Davidson	tested in normal idle/star	Av - Average			

Measurements: Axis 1 (Product flat on table – horizontal position)

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
		Qp Av									FCC 15.109		
<u>MHz</u>	<u>dBuV</u>	Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	Class B	N/A	(MHz)
Measurem	ents: 30	MHz to	1000MH	z - Product	Axis 1 (Pr	oduct fla	t on table -	horizor	ntal) – V	ertical A	ntenna		
44.0000	38.02	Qp	0.77	11.10	28.20	0.00	21.69	V	1.00	250.7	- 18.31	NA	0.120
64.4000	40.99	Qp	0.77	7.90	28.13	0.00	21.53	V	1.00	184.5	- 18.47	NA	0.120
109.0000	36.81	Qp	0.77	12.60	27.92	0.00	22.26	V	1.00	246.2	- 21.24	NA	0.120
145.8665	43.84	Qp	0.81	12.61	27.74	0.00	29.53	V	1.00	168.7	- 13.97	NA	0.120
150.4965	43.98	Qp	0.82	12.65	27.72	0.00	29.74	V	1.00	198.4	- 13.76	NA	0.120
189.8565	42.40	Qp	0.92	11.49	27.53	0.00	27.28	V	1.00	319.7	- 16.22	NA	0.120
196.7965	42.96	Qp	0.94	12.06	27.50	0.00	28.46	V	1.00	311.5	- 15.04	NA	0.120
206.0665	42.30	Qp	0.96	11.21	27.45	0.00	27.01	V	1.10	14.6	- 16.49	NA	0.120
284.7865	34.91	Qp	1.15	13.69	27.12	0.00	22.63	V	1.34	205.5	- 23.37	NA	0.120
615.8487	34.53	Qp	1.72	18.88	28.34	0.00	26.79	V	1.27	61.7	- 19.21	NA	0.120
266.2500	35.77	Qp	1.10	13.15	27.16	0.00	22.86	V	1.00	358.2	- 23.14	NA	0.120
798.5000	34.97	Qp	1.97	21.14	27.97	0.00	30.12	V	1.80	239.0	- 15.88	NA	0.120
Measurem	ents: 30	MHz to	1000MH	z Horizonta	al Antenna								
145.8700	36.10	Qp	0.81	12.61	27.74	0.00	21.79	Н	2.42	96.0	- 21.71	NA	0.120
277.8635	33.23	Qp	1.13	13.51	27.11	0.00	20.77	Н	1.70	285.0	- 25.23	NA	0.120
634.4100	36.86	Qp	1.75	19.01	28.33	0.00	29.30	Н	1.56	99.7	- 16.70	NA	0.120
					_								

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: Axis 2 – Product Vertical on Table (Wall Mount)

Radiated Electromagnetic Emissions

Test R	eport #:	G101262620	Test Area:	CC1 Radiated	Temperature:	23.4	°C
Test I	Method:	FCC 15.109 - Class B	Test Date:	08/14/2013	Relative Humidity:	33.5	%
EUT N	/lodel #:	M1	EUT Power:	120V/ 60Hz	Air Pressure:	82.7	kPa
	EUT S	erial #: FCC1					
Manuf	acturer:	Revolv			Level Ke	_у	
Des	EUT cription:	Revolv Hub – RF-enabled Hon	Pk – Peak				
Notes	AC Ada	pter: Unifive Model UN310-0520	Qp – Quasi Peak				

Measurements: Axis 2 (Product vertical – wall mount)

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
		Qp Av									FCC 15.109		
<u>MHz</u>	<u>dBuV</u>	Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	Class B	N/A	(MHz)
Measurem	ents: 30	MHz to	1000MH	z - Product	Axis 2 (Pr	oduct ve	rtical – wal	mount)	– Verti	cal Anter	nna		
44.7000	39.00	Qp	0.77	10.68	28.20	0.00	22.25	V	1.00	334.6	- 17.75	NA	0.120
54.3000	43.66	Qp	0.77	7.53	28.18	0.00	23.78	V	1.00	90.0	- 16.22	NA	0.120
58.6333	43.24	Qp	0.77	7.56	28.16	0.00	23.41	V	1.00	282.3	- 16.59	NA	0.120
105.2679	39.96	Qp	0.77	11.95	27.94	0.00	24.75	V	1.00	37.1	- 18.75	NA	0.120
148.1879	41.87	Qp	0.82	12.62	27.73	0.00	27.58	V	1.00	165.1	- 15.92	NA	0.120
187.5562	42.85	Qp	0.91	11.36	27.54	0.00	27.58	V	1.00	229.1	- 15.92	NA	0.120
335.7262	35.58	Qp	1.26	14.41	27.31	0.00	23.95	V	1.65	159.4	- 22.05	NA	0.120
472.3447	37.97	Qp	1.49	17.05	28.21	0.00	28.30	V	1.00	168.6	- 17.70	NA	0.120
798.1000	41.67	Qp	1.97	21.12	27.97	0.00	36.80	V	1.30	104.0	- 9.20	NA	0.120
Measurem	ents: 30	MHz to	1000MH	z Horizonta	al Antenna								
145.8600	38.51	Qp	0.81	12.61	27.74	0.00	24.20	Н	1.70	99.8	- 19.30	NA	0.120
187.5327	39.67	Qp	0.91	11.35	27.54	0.00	24.40	Н	2.12	263.4	- 19.10	NA	0.120
798.4000	38.11	Qp	1.97	21.14	27.97	0.00	33.25	Н	1.87	187.8	- 12.75	NA	0.120

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Radiated Electromagnetic Emissions

Test R	eport #:	G101262620	Test Area:	CC1 Radiated	Temperature: 23.4 °C	
Test I	Method:	FCC 15.109 – Class B	Test Date:	08/14/2013	Relative Humidity: 33.5 %	
EUT N	/lodel #:	M1	EUT Power:	120V/ 60Hz	Air Pressure: kPa	а
	EUT S	erial #: FCC1				
Manuf	acturer:	Revolv			Level Key	
Des	EUT Revolv Hub – RF-enabled Home Automation wireless hub Description:				Pk – Peak	
	cription:				_	
Notes	'	pter: Unifive Model UN310-0520			— Qp – Quasi Peak	

Measurements: Axis 2 (Product vertical – wall mount) worst-case axis above 1GHz per pre-scans

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
											FCC		
		Qp Av									15.109 Class B		
MHz	dBuV	Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	Average	N/A	(MHz)
Measureme	nts: 1GF	Iz to 20	GHz - Pro	duct Axis	2 (Product	vertical -	- wall moun	it) – Ver	tical An	tenna	<u> </u>	•	
1123.9000	35.06	Av	2.36	24.62	37.19	0.00	24.85	٧	1.59	176.5	- 29.15	N/A	1.000
1331.0000	42.89	Av	2.57	25.21	36.89	0.00	33.78	٧	1.53	140.8	- 20.22	N/A	1.000
1863.1000	39.46	Av	3.07	27.14	36.97	0.00	32.70	٧	1.53	140.8	- 21.30	N/A	1.000
Measureme	nts: 1GF	Iz to 20	GHz - Ho	rizontal An	tenna	•	•	•				•	
1330.8000	49.60	Av	2.56	25.21	36.89	0.00	40.49	Н	1.90	184.8	- 13.51	N/A	1.000
1863.0000	47.22	Av	3.07	27.14	36.97	0.00	40.46	Н	1.90	137.5	- 13.54	N/A	1.000

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data: Axis 3 – Product Vertical & Rotated 90 Degrees

Radiated Electromagnetic Emissions

Test Re	eport #:	G101262620	Test Area:	CC1 Radiated	Temperature:	23.4	°C		
Test M	Method:	FCC 15.109 - Class B	Test Date:	08/14/2013	Relative Humidity:	33.5	%		
EUT M	lodel #:	M1	EUT Power:	120V/ 60Hz	Air Pressure:	82.7	kPa		
	EUT S	erial #: FCC1							
Manufa	acturer:	Revolv			Level Ke	y			
Desci	EUT cription:	Revolv Hub – RF-enabled Home	Automation v	vireless hub	Pk – Peak				
Notes AC Adapter: Unifive Model UN310-0520				Qp – Quasi Peak					
	Product	tested in normal idle/standby rece	eive mode of o	peration	Av - Average				
_		•	eive mode of o	peration					

Measurements: Axis 3 (Product vertical & rotated 90 degrees – wall mount)

Freq	Level	Det	Cable	Ant	Preamp	Atten	Final	Pol	Hgt	Az	Delta1	Delta2	RBW
		Qp Av									FCC 15.109		
MHz	<u>dBuV</u>	Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)	Class B	N/A	(MHz)
Measurements: 30MHz to 1000MHz - Product Axis 3 (Product vertical & rotated 90 degrees) – Vertical Antenna							a						
55.5700	46.74	Qp	0.77	7.49	28.17	0.00	26.82	V	1.00	292.6	- 13.18	NA	0.120
59.0700	42.62	Qp	0.77	7.60	28.16	0.00	22.83	V	1.00	84.4	- 17.17	NA	0.120
109.6758	35.63	Qp	0.77	12.80	27.91	0.00	21.29	٧	1.10	212.7	- 22.21	NA	0.120
155.1258	44.60	Qp	0.84	12.70	27.70	0.00	30.44	V	1.00	289.7	- 13.06	NA	0.120
196.7958	42.61	Qp	0.94	12.06	27.50	0.00	28.11	V	1.07	333.0	- 15.39	NA	0.120
284.7841	37.62	Qp	1.15	13.69	27.12	0.00	25.34	V	1.54	273.6	- 20.66	NA	0.120
798.3000	41.11	Qp	1.97	21.13	27.97	0.00	36.25	V	1.38	203.0	- 9.75	NA	0.120
Measurem	ents: 30	MHz to	1000MH	z Horizonta	al Antenna					1		•	1
206.0800	38.44	Qp	0.96	11.20	27.45	0.00	23.15	Н	2.35	111.6	- 20.35	NA	0.120
532.0646	33.76	Qp	1.58	18.70	28.41	0.00	25.64	Н	1.85	308.0	- 20.36	NA	0.120
662.1772	36.91	Qp	1.80	19.66	28.30	0.00	30.06	Н	1.43	352.1	- 15.94	NA	0.120

Example calculation:

Measured Level	+	Cable Loss	+	Antenna Factor	_	Pre- Amp	+	Atten	=	Final Corrected Reading	Specification Limit	_	Final Corrected Reading	=	Delta Specification
(dBµV)		(dB)		(dB)		(dB)		(dB)		(dBµV/m)	(dBμV/m)		(dBµV/m)		
20.0		3.0		5.0		10.0		0.0		18.0	40.0		18.0		- 22.0

Notes:

- 1) For due diligence, the product fully tested in (3) axes (product orientations).
- 2) The highest product clock was 266MHz testing up to 2GHz required per standard.
- 3) Product tested in idle/standby receive mode of operation.

Deviations, Additions, or Exclusions: None

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

16 AC Mains Conducted Emissions

Method:

Unless otherwise stated no deviations were made from FCC Part 15.107 - Class B.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Equipment Used:

Asset ID	<u>Description</u>	<u>Manufacture</u>	<u>Model</u>	<u>Serial</u>	Cal Date	Cal Due
DEN-073	EMI Receiver	ROHDE & SCHWARZ	ESU 26	100265	01/23/2013	01/23/2014
18885	Transient Limiter	Hewlett-Packard	11947A	3107A00700	05/05/2013	05/05/2014
18914	Single Phase LISN	EMCO	3816/NM	9408-1003	04/11/2013	04/11/2014
SW-6	Software for Radiated and Conducted emissions.	Intertek	OATS vba	V. 1.0	VBU	VBU

Test Requirement:

The product must pass the AC Conducted average and quasi-peak Class B Limits defined in FCC Part 15.107.

Test Procedure:

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at all frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4.

Test Results:

The sample tested was found to Comply.

Intertek

Report Number: 101262612DEN-001F Issued:9/30/2013

Setup Photographs:

AC Conducted Emissions – Test Setup (Front View)






Intertek

Report Number: 101262612DEN-001F Issued:9/30/2013

Set-up Photographs:


AC Conducted Emissions – Test Setup (Side View)

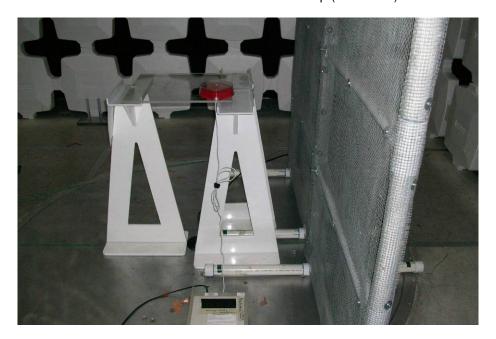



Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013


Pre-scan Plots: Reference Only

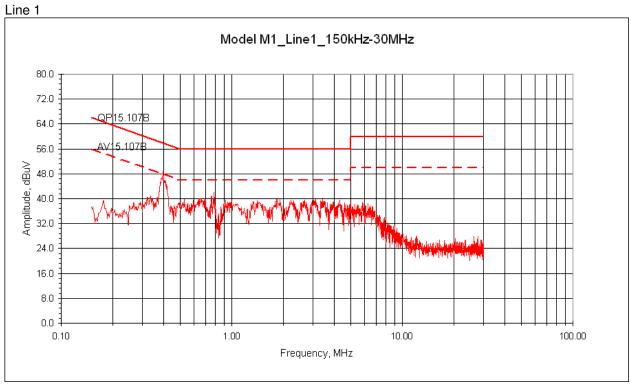

Line 2 (Neutral) Model M1_Line2 (Neutral)_150kHz-30MHz 80.0 72.0 QP|15.107|B 64.0 56.0 Amplitude, dBuV 48.0 40.0 32.0 24.0 16.0 8.0 0.0 1.00 10.00 0.10 100.00 Frequency, MHz

Reference only – to determine signals to be maximized

Final Plots: FCC 15.107 – Class B (150kHz to 30MHz)

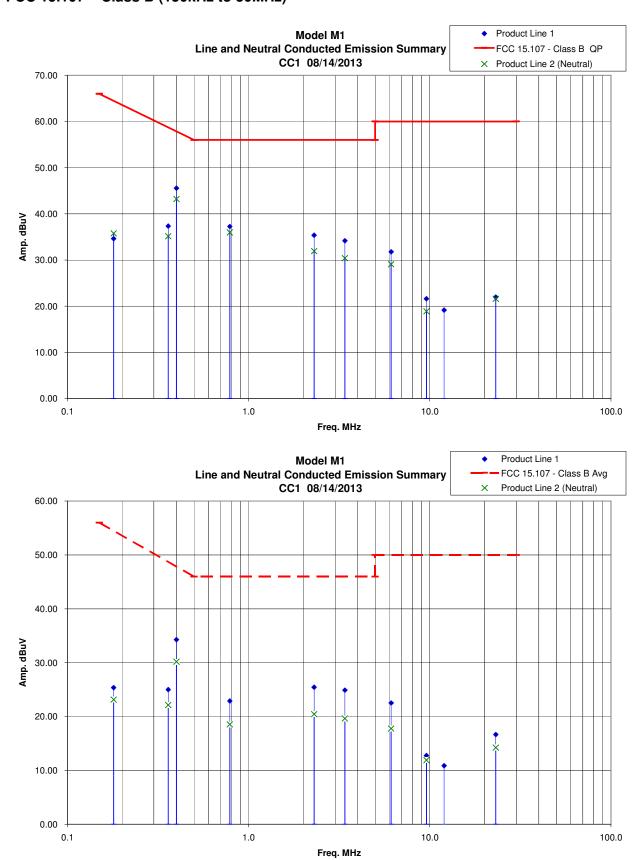

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

Test Data:

AC Conducted Electromagnetic Emissions

Test Report #:	G101262620	Test Area:	CC1 Conducted	Temperature:	23.1	С
Test Method:	FCC 15.107 – Class B	Test Date:	14-Aug-2013	Relative Humidity:	32.8	%
EUT Model #:	M1	EUT Power:	120V/ 60Hz	Air Pressure:	83.1	kPa
EUT Serial #:	FCC1					
Manufacturer:	Revolv				Level Key	
EUT Description:	Revolv Hub – RF-enabled Home Autor	mation		Pk - Peak	Nb - Narrow Band	
Notes:	AC Adapter: Unifive Model UN310-052		Qp - QuasiPeak Bb - Broad Band			
·	Product tested in normal standby/idle r	eceive mode of	operation	Av - Average		

								I			
FREQ	LEVEL	DET	CABLE	LISN	PREAMP	ATTEN	FINAL	TEST POIN	T DELTA1	DELTA2	RBW
MHz	<u>dBuV</u>	Qp Av Pk	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	Line 1 Line2 (Neutral	FCC 15.107 Class B Average	FCC 15.107 Class B Qp	(MHz)
Line 1 Data -	- 150kHz to 3	0MHz									
0.180	15.26	Av	0.10	0.03	0.00	9.96	25.36	Line 1	- 29.13	NA	0.009
0.180	24.51	Qp	0.10	0.03	0.00	9.96	34.61	Line 1	NA	- 29.88	0.009
0.360	14.89	Av	0.10	0.03	0.00	9.97	24.99	Line 1	- 23.74	NA	0.009
0.360	27.23	Qp	0.10	0.03	0.00	9.97	37.33	Line 1	NA	- 21.40	0.009
0.400	24.18	Av	0.10	0.03	0.00	9.97	34.28	Line 1	- 13.58	NA	0.009
0.400	35.45	Qp	0.10	0.03	0.00	9.97	45.55	Line 1	NA	- 12.31	0.009
0.788	12.68	Av	0.20	0.03	0.00	9.98	22.88	Line 1	- 23.12	NA	0.009
0.788	27.06	Qp	0.20	0.03	0.00	9.98	37.26	Line 1	NA	- 18.74	0.009
2.301	15.23	Av	0.20	0.03	0.00	9.98	25.44	Line 1	- 20.56	NA	0.009
2.301	25.15	Qp	0.20	0.03	0.00	9.98	35.36	Line 1	NA	- 20.64	0.009
3.402	14.58	Av	0.30	0.03	0.00	9.98	24.90	Line 1	- 21.10	NA	0.009
3.402	23.85	Qp	0.30	0.03	0.00	9.98	34.17	Line 1	NA	- 21.83	0.009
6.122	12.08	Av	0.40	0.05	0.00	9.99	22.52	Line 1	- 27.48	NA	0.009
6.122	21.33	Qp	0.40	0.05	0.00	9.99	31.77	Line 1	NA	- 28.23	0.009
9.596	2.04	Av	0.60	0.11	0.00	10.00	12.75	Line 1	- 37.25	NA	0.009
9.596	10.90	Qp	0.60	0.11	0.00	10.00	21.61	Line 1	NA	- 38.39	0.009
12.000	- 0.05	Av	0.80	0.12	0.00	10.00	10.87	Line 1	- 39.13	NA	0.009
12.000	8.23	Qp	0.80	0.12	0.00	10.00	19.15	Line 1	NA	- 40.85	0.009
23.157	5.29	Av	1.10	0.22	0.00	10.03	16.64	Line 1	- 33.36	NA	0.009
23.157	10.60	Qp	1.10	0.22	0.00	10.03	21.95	Line 1	NA	- 38.05	0.009
Line 2 (Neutr	al) Data – 15	0kHz to	30MHz								
0.180	13.04	Av	0.10	0.03	0.00	9.96	23.14	Line 2	- 31.35	NA	0.009
0.180	25.67	Qp	0.10	0.03	0.00	9.96	35.77	Line 2	NA	- 28.72	0.009
0.360	12.04	Av	0.10	0.02	0.00	9.97	22.13	Line 2	- 26.60	NA	0.009
0.360	25.04	Qp	0.10	0.02	0.00	9.97	35.13	Line 2	NA	- 23.60	0.009
0.400	20.08	Av	0.10	0.02	0.00	9.97	30.17	Line 2 - 17.68		NA	0.009
0.400	33.14	Qp	0.10	0.02	0.00	9.97	43.23	Line 2	NA	- 14.62	0.009
0.788	8.33	Av	0.20	0.02	0.00	9.98	18.53	Line 2	- 27.47	NA	0.009

Inte	rtek
Report Number: 101262612DEN-001F	Issued:9/30/2013

0.788	25.75	Qp	0.20	0.02	0.00	9.98	35.95	Line 2	NA	- 20.05	0.009
2.301	10.24	Av	0.20	0.03	0.00	9.98	20.45	Line 2	- 25.55	NA	0.009
2.301	21.73	Qp	0.20	0.03	0.00	9.98	31.94	Line 2	NA	- 24.06	0.009
3.402	9.33	Av	0.30	0.03	0.00	9.98	19.64	Line 2	- 26.36	NA	0.009
3.402	20.09	Qp	0.30	0.03	0.00	9.98	30.40	Line 2	NA	- 25.60	0.009
6.122	7.33	Av	0.40	0.05	0.00	9.99	17.77	Line 2	- 32.23	NA	0.009
6.122	18.62	Qp	0.40	0.05	0.00	9.99	29.06	Line 2	NA	- 30.94	0.009
9.596	- 1.30	Av	0.60	0.11	0.00	10.00	9.41	Line 2	- 40.59	NA	0.009
9.596	8.17	Qp	0.60	0.11	0.00	10.00	18.88	Line 2	NA	- 41.12	0.009
23.157	2.75	Av	1.10	0.36	0.00	10.03	14.24	Line 2	- 35.76	NA	0.009
23.157	10.12	Qp	1.10	0.36	0.00	10.03	21.61	Line 2	NA	- 38.39	0.009

Example calculation:

Measured Level	+	Transducer, Cable Loss & Amplifier corrections	Corrected Reading	Specification Limit	-	Corrected Reading	=	Delta Specification
(dBµV)		(dB)	(dBµV/m)	(dBµV/m)		(dBµV/m)		
14.0		14.9	28.9	40.0		28.9		-11.1

Notes:

1) Product tested in idle/standby receive mode of operation.

Deviations, Additions, or Exclusions: None

Intertek			
Report Number: 101262612DEN-001F	Issued:9/30/2013		

17 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of k = 2, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

,		
Parameter	Uncertainty ±	Notes
Radiated emissions, 10kHz to 30 MHz	3.4 dB	
Radiated emissions, 30 to 200 MHz HP	2.2 dB	
Radiated emissions, 30 to 200 MHz VP	3.8 dB	
Radiated emissions, 200 to 1000 MHz HP	2.8 dB	
Radiated emissions, 200 to 1000 MHz VP	2.7 dB	
Radiated emissions, 1 to 18 GHz	5.2 dB	
Conducted port emissions 10kHz to 1000 MHz	1.0 dB	
Conducted port emissions 10kHz to 1000 MHz	1.6 dB	
AC mains Conducted emissions, 9kHz to 30 MHz	3.14 dB	

Intertek			
Report Number: 101262612DEN-001F	Issued:9/30/2013		

18 Revision History

Revision Level	Date	Report Number	Notes
0	9/30/2013	101262612DEN-001F	Original Issue