



**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

## **WM2020CU** **WLAN/BT USB Module**



<b>Version</b>	<b>Date</b>	<b>Change Description</b>
1.0	20 Feb 2017	Initial release

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Description

WM2020CU is a highly integrated 802.11a/b/g/n/ac 2T2R and BT 2.1/3.0/4.1/4.2 module that support 2-stream 802.11ac Multi-user MIMO. It combines a WLAN MAC, a 2T2R capable WLAN baseband, BT Protocol Stack (LM, LL, and LE), BT Baseband, modem. It provides a complete solution for a high throughput performance integrated wireless LAN and Bluetooth device.

It is designed to provide excellent performance with low power consumption and enhance the advantages of robust system and cost-effective. It is targeted at competitive superior performance, better power management applications.

## Features

- IEEE802.11a/b/g/n and 802.11ac compliant
- Support 802.11ac 2x2, Wave-2 compliant with MU-MIMO
- Operates in 2.4GHz and 5GHz frequency bands
- Dual band 2T2R mode improves effective throughput and range over existing 802.11 b/g/n products
- Data rates: 173.3Mbps using 20MHz bandwidth, 400Mbps using 40MHz bandwidth, and 866.7Mbps using 80MHz bandwidth.
- IEEE802.11k and 802.11h compliant
- BPSK, QPSK, 16 QAM, 64 QAM, 256QAM modulation schemes
- Security support for WPA/WPA2 personal, WPS2.0, WAPI
- Compatible with Bluetooth v2.1 and v3.0, support Bluetooth 4.2 Low Energy(BLE).
- Fully qualified Bluetooth 2.1+ EDR specification, Bluetooth 3.0 and Bluetooth 4.2 dual mode.
- Enhanced WLAN/BT coexistence control to improve transmission quality in different profiles.
- Small footprint: 27.0×17.7×2.2mm, half-holes PCB module
- OS support: Android, Windows
- RoHS compliance

## Application


- Mobile Internet Device
- TV
- IP-cam
- STB

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Functional Block Diagram

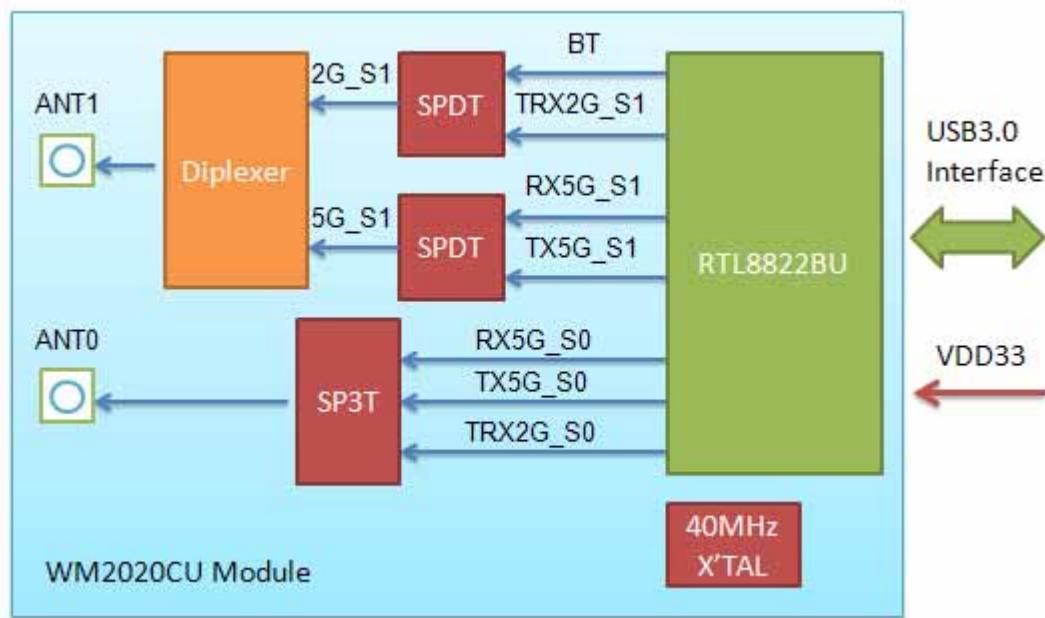

Block Diagram




# WIESON

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Pin Assignment (Top view)

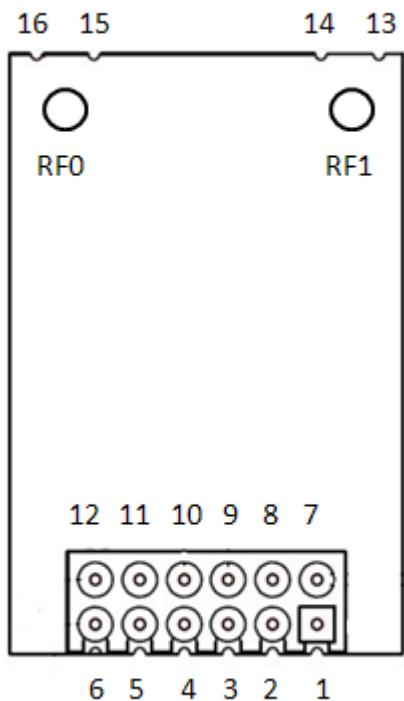

## Pin Definition

Pin	Signal	Input /Output	Description
1	PDn	Input	This pin can externally shutdown the RTL8822BU(No extra power switch required). When this function is not required, external pull high is required.
2	VDD33	Power	Power
3	HSDM	I/O	High speed USB D- signal
4	HSDP	I/O	High speed USB D+ signal
5	GND	Power	Ground
6	BT_DIS	Input	This pin can externally shutdown the RTL8822BU BT function when BT_DIS is pulled low.
7	VDD33	Power	Power
8	HSIP	Input	Super speed USB RX+ signal
9	HSIN	Input	Super speed USB RX- signal
10	GND	Power	Ground
11	HSOP	Output	Super speed USB TX+ signal
12	HSON	Output	Super speed USB TX- signal
13	GND	Power	Ground
14	GND	Power	Ground
15	GND	Power	Ground
16	GND	Power	Ground
RF0	RF	I/O	WLAN RF port
RF1	RF	I/O	WLAN/BT RF port

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of





**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

## Application Circuit

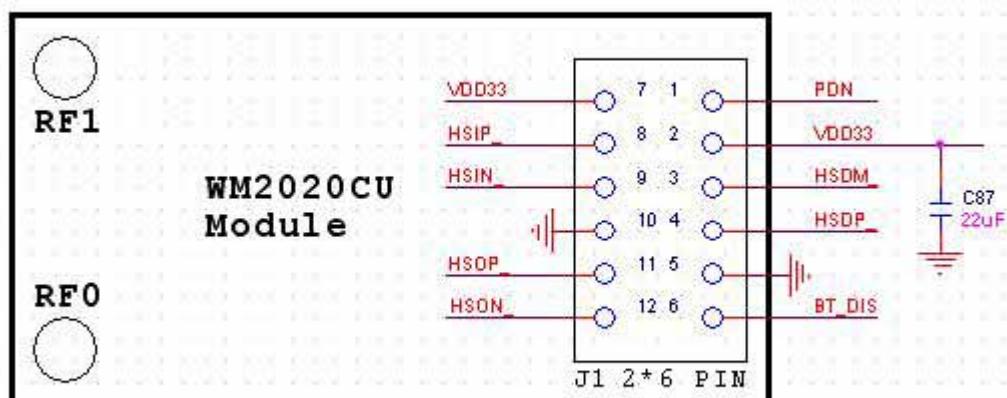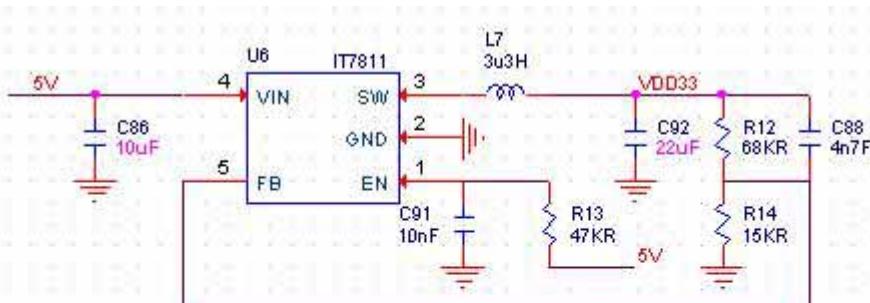

**WIESON**

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

## Functional Specification

<b>Product Description</b>	
<b>WLAN Standard</b>	IEEE802.11a/b/g/n and 802.11ac compliant
<b>Bluetooth Standard</b>	v2.1+EDR, v3.0, v4.1, v4.2 LE
<b>Main Chipset</b>	RTL8822BU-CG
<b>Host Interface</b>	USB 3.0 for WLAN USB 2.0 for WLAN and BT
<b>Dimension</b>	27.0mm x 17.7mm x 2.2mm
<b>Package</b>	Half-hole PCB module
<b>Electrical Specifications</b>	
<b>Frequency Range</b>	ac/n ISM Band: 5.150 to 5.850 GHz b/g/n ISM Band and Bluetooth: 2.400 to 2.485 GHz
<b>Data Rate</b>	WLAN: 802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: MCS0~MCS15 802.11ac: MCS0~MCS9  Bluetooth: Basic rate: 1Mbps Enhance data rate: 2, 3Mbps
<b>Modulation Technique</b>	WLAN: 802.11a: BPSK, QPSK, 16-QAM, 64-QAM 802.11b: DBPSK, DQPSK, CCK 802.11g: BPSK, QPSK, 16-QAM, 64-QAM 802.11n: BPSK, QPSK, 16-QAM, 64-QAM 802.11ac BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM  Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Operational Channel</b>	WLAN: Ch. 1-11 U-NII 1 (5.15~5.25 GHz) U-NII 2 (5.25~5.35 GHz) U-NII 3 (5.47~5.725 GHz) U-NII 4 (>5.725GHz)  Bluetooth: Ch0 to Ch78
<b>Security</b>	WPA, WPA-PSK, WPA2, WPA2-PSK, WEP 64bit & 128bit, IEEE 802.11x, IEEE 802.11i
<b>Operating Voltage</b>	3.3V

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

### Temperature Limit Ratings

Parameter	Min.	Max.	Units
Storage Temperature	-40	+125	°C
Ambient Operating Temperature	0	+70	°C

### Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
VDD33	USB interface VDD	-0.3 to 3.6	V

### Recommended Operating Range

Symbol	Parameter	Min	Typ	Max	Units
VDD33	USB interface VDD	3.0	3.3	3.6	V

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of




**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

## Module Dimensions

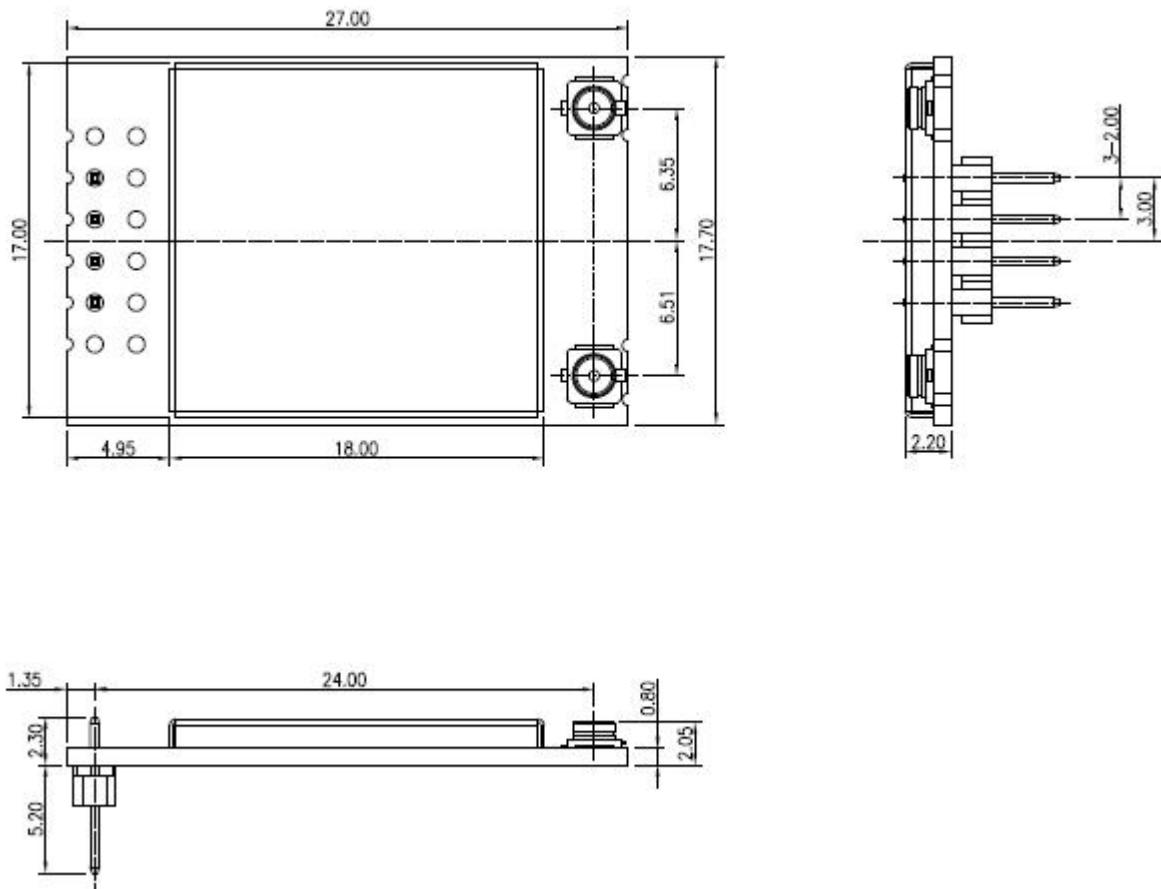

All dimensions are in millimeters.  
Tolerance: +/- 0.15mm

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Pin Header Specification

Recommend part is code 04.

REV.	ECN.	DATE	DWN	APVD

**MATERIAL:**  
INSULATOR : PBT (UL-94V-0),BLACK,  
CONTACT MATERIAL : COPPER ALLOY  
FINISH : GOLD OVER NICKEL OR TIN PLATED.

**SPECIFICATION:**  
CURRENT RATING : 1 AMP.  
DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR ONE MINUTE.  
INSULATION RESISTANCE : 1000MQ MIN.  
OPERATING TEMPERATURE : -55°C ~ +105°C.

**ORDER INFORMATION :**

HPD 11 1 - X X 1 X B 0 01 - R  
1. SERIES NUMBER: 7. INSULATOR HIGH:  
1 2 3 4 5 6 7 8 9  
0=2.0 mm.

2. ROW TYPE: 8. PIN TAIL (A/B) LENGTH:  
1=SINGLE ROW A/B: CUSTOM LENGTH AVAILABLE

3. POSITION PER ROW:  
02-40

4. CONTACT MATERIAL:  
1=COPPER ALLOY 9. GREEN PRODUT:  
R=RoHS COMPLIANT

5. CONTACT PLATING:  
1= SELECTIVE GOLD FLASH  
4= SELECTIVE 15u" GOLD  
6= SELECTIVE 30u" GOLD  
A= GOLD FLASH  
T= TIN

6. INSULATOR MATERIAL:  
B=PBT  
C=NYLON 6T

**PIN TAIL LENGTH**

CODE	A	B
01	3.8	3.0
02	4.0	2.8
03	12	3.0
04	3.2	2.2

**RECOMMENDED P.C.B HOLE LAYOUT**

**WIESON**



**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of




## Layout Design Guide

The recommended layout pads for WM2020CU module are shown below. (Module top view)

- DO NOT route any digital or analog signal traces between the RF traces and reference ground.
- DO NOT put any metal shielding in the surrounding area of module and try to leave the module placed in the corner of chassis board as close as possible.
- DO NOT put any metal plane into clearance area. Please keep the clearance area close to the corner of main board or out of the board's edge.

Pin Header Solution

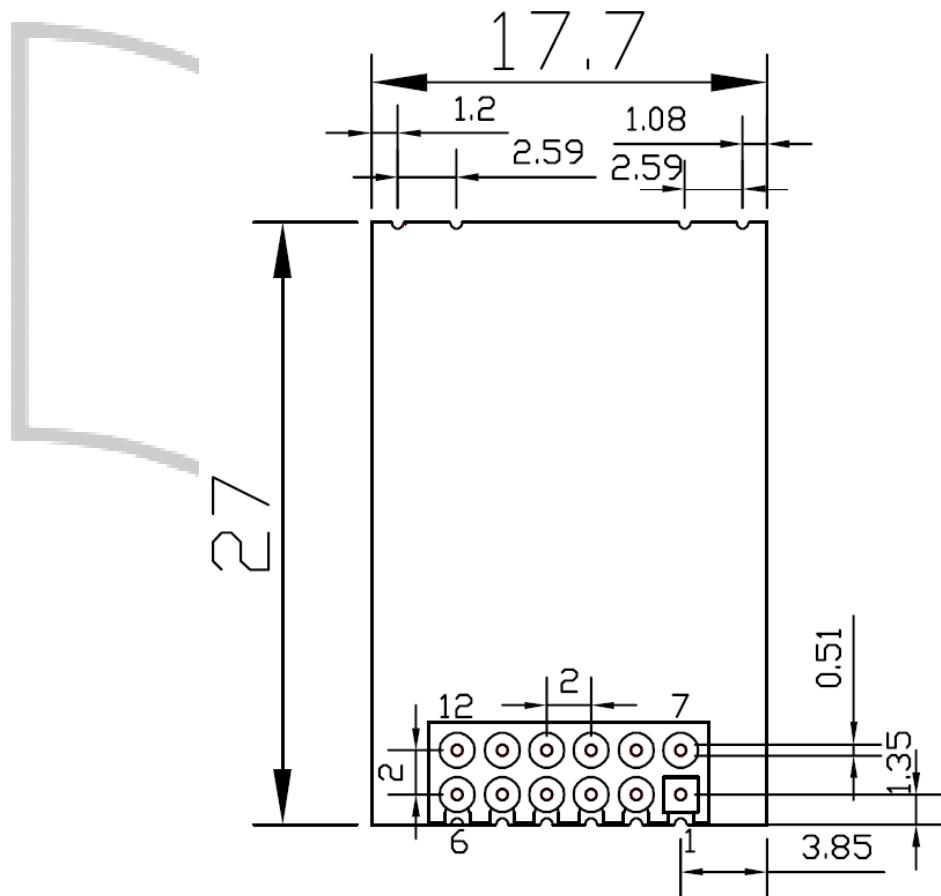

All dimensions are in millimeters.

Tolerance: +/- 0.15mm

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of




**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

TYPE OF PRODUCT

**WLAN/BT MODULE**

half-holes only for USB2.0 Solution

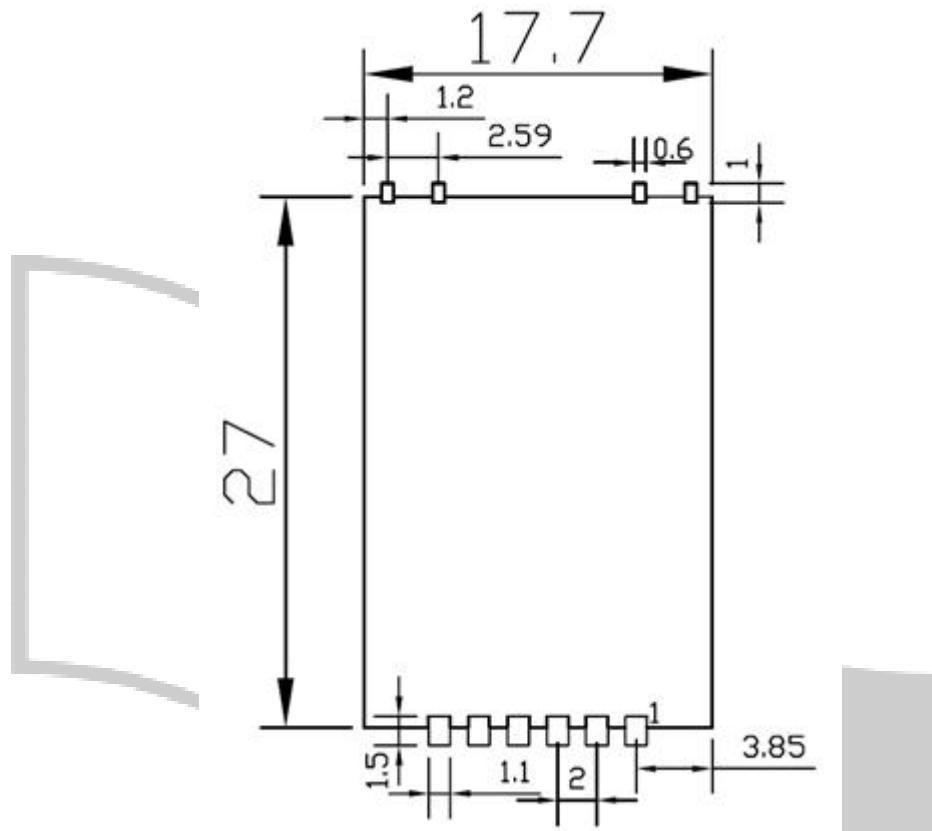


**WIESON**  
All dimensions are in millimeters.  
Tolerance: +/- 0.15mm

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Reference Temperature Reflow Chart

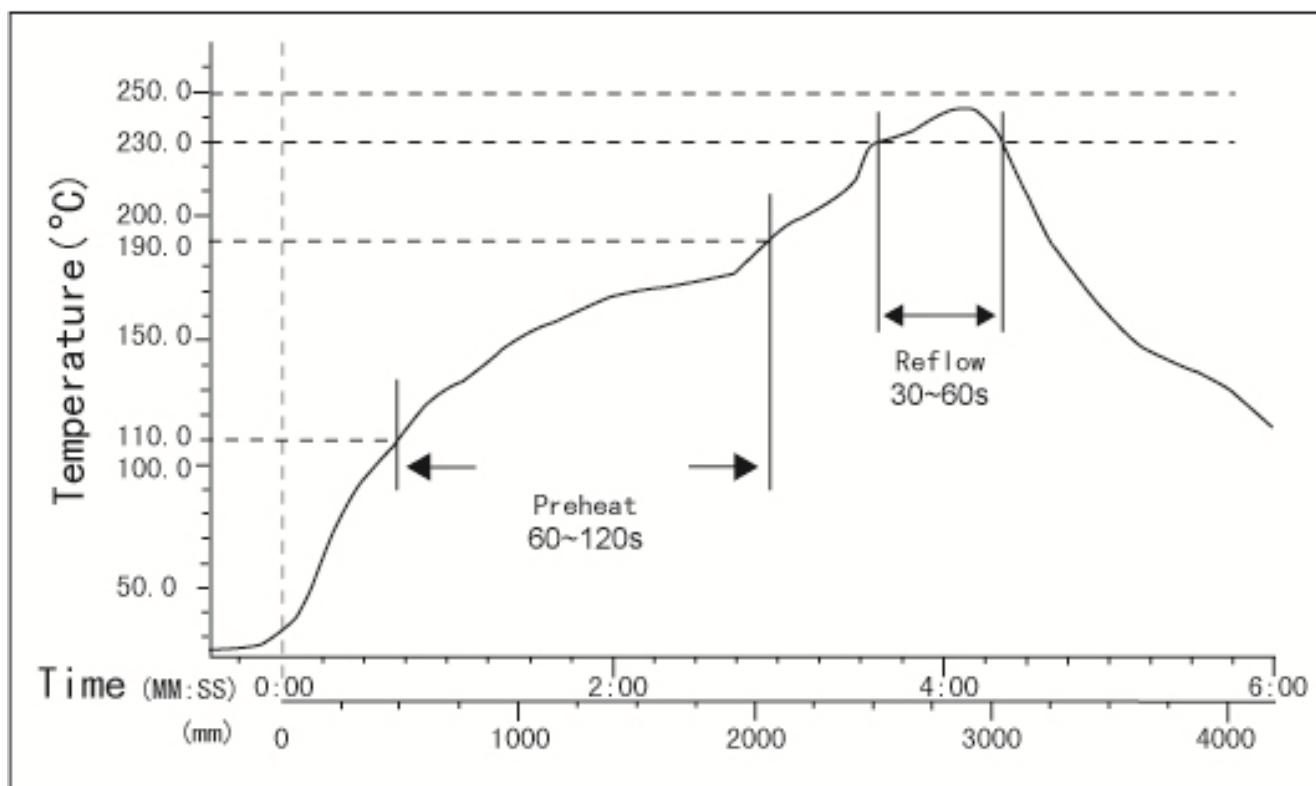

### Note:

1. If the system PCBA is double side design please reflow the side without this module first.
2. Don't let the solder machine temperature over 250°C or follow solder paste vendor's recommended temperature.
3. The Ramp-up temperature speed is 1~4 °C per second, the Ramp-down temperature speed is 1~4 °C per second.
4. This temperature reflow chart is for reference only, it depends on the manufacturing machine's characters requirement.

**WIESON**

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



## Compliance Information

### ■ FCC Compliance

This equipment has been tested and found to comply with the limits for a Class digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to the radio communications. However, there are no guarantees that interference will not occur in a particular installation.

### ■ Troubleshooting

If this equipment does cause harmful interference to radio reception, which can be determined by turning the equipment off and on, the user is encouraged to correct the interference by one or more of the following instructions.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Consult dealer or an experienced radio technician.

### ■ Conditions

Operation is subject to the following conditions

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

### ■ FCC Caution

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provide with antenna installation instructions and consider removing the no-collocation statement.

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of



**WIESON**  
INTERNATIONAL  
CO., LTD.

**WM2020CU**  
**User Manual**

**TYPE OF PRODUCT**

**WLAN/BT MODULE**

**End Product Labeling**

This transmitter module is authorized only for use in device where the antenna may be installed such that 20cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following:

“Contains FCC ID: 2AAK6WM2020CU”

**Manual Information to the End User**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module

in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warming as shown in this manual.

■ **ISED Caution**

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- this device may not cause interference
- this device must accept any interference, including interference that may cause undesired operation of the device

- i. The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- ii. For device with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- iii. For device with detachable antenna (s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p limits as appropriate; and
- iv. Where applicable, antenna type(s), antenna model(s), and worst-case tilt angel(s) necessary to remain compliant with the e.i.r.p elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Pour se conformer aux exigences de conformité RF canadienne l'exposition, cet appareil et son antenne ne doivent pas être co-localisés ou fonctionnant en conjonction avec une autre antenne ou transmetteur.

**End Product Labeling**

This transmitter module is authorized only for use in device where the antenna may be installed such that 20cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following:

“Contains IC ID: 20126-WM2020CU”

**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of

 <b>WIESON</b> INTERNATIONAL CO., LTD.	<b>WM2020CU</b> <b>User Manual</b>	<b>TYPE OF PRODUCT</b> <b>WLAN/BT MODULE</b>
---	---------------------------------------	---

■ NCC 警語

根據 NCC 低功率電波輻射性電機管理辦法 規定：

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

高增益指向性天線只得應用於固定式點對點系統。

此模組於取得認證後將依規定於模組本體標示審驗合格標籤，並要求平台廠商於平台上標示「本產品內含射頻模組：ID 編號」字樣。



**CONFIDENTIAL**

No part of the information shown of this document may be used in any way without office stamp or written consent of