



Shenzhen CTL Electromagnetic Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-89486194-805

FCC PART 15 SUBPART C & RSS-210 TEST REPORT

Report Reference No. : CTL1307161139-WB

Compiled by

(position+printed name+signature) .. : File administrators Jacky Chen

Jacky Chen

Name of the organization performing
the tests : Test Engineer Tracy Qi

Tracy Qi

(position+printed name+signature) .. :

Approved by
(position+printed name+signature) .. : Manager Tracy Qi

Tracy Qi

Date of issue : August 23, 2013

Representative Laboratory Name .. : **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test Firm : **Bontek Compliance Testing Laboratory Ltd**

Address : 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China

Applicant's name : **ONTOP TECHNOLOGY LTD**

Address : Unit 10, 21/F, Block B, New Trade Plaza, No.6 Ping Street,
Shatin, N.T., H.K.

Test specification:

Standard : FCC Part 15.247: Operation within the bands 902–928 MHz, 2400–
2483.5 MHz, and 5725–5850 MHz.

RSS-210 Issue 8 (2010): Licence-exempt Radio Apparatus (All
Frequency Bands): Category I Equipment

Master TRF : Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the
Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of
the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not
assume liability for damages resulting from the reader's interpretation of the reproduced material due to its
placement and context.

Test item description : **Smart Phone**

FCC ID : **2AANR-NUGGETD5**

IC : **11302A-NUGGETD5**

Trade Mark : ontop

Model/Type reference : NUGGET D5

GSM/WCDMA

Transmit : 2G:GSM 850: 824~849MHz, PCS 1900: 1850~1910MHz

3G:WCDMA Band II: 1850-1910MHz,

WCDMA Band V: 824~849MHz

Receive	2G:GSM 850: 869~894MHz, PCS 1900: 1930~1990MHz 3G:WCDMA Band II: 1930~1990MHz, WCDMA Band V: 869~894MHz
Release Version	2G:R99 3G:UMTS FDD: Rel-6
Type of modulation	2G: GMSK for GSM/GPRS/EDGE 3G: QPSK
GPRS Type	Class B
GPRS Class	Class 12
GPS	
work frequency	1575.42MHz
Type of modulation	BPSK
Bluetooth	
Work frequency	2402~2480MHz
Version.....	V3.0
Type of modulation	FHSS
Data Rate.....	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)
Wi-Fi	
Work frequency	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452
Type of modulation	802.11b DSSS, 802.11g/n: OFDM
Data Rate.....	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 135 Mbps
Antenna Gain	-0.5 dBi for GSM850 and WCDMA Band V 1.0 dBi for PCS1900 and WCDMA Band II 1.0 dBi for Bluetooth and Wi-Fi
Antenna type	Internal
IMEI	861052010000510
Result.....	Positive

TEST REPORT

Test Report No. :	CTL1307161139-WB	August 23, 2013
		Date of issue

Equipment under Test : Smart Phone

Model /Type : NUGGET D5

Listed Models : /

Applicant : ONTOP TECHNOLOGY LTD

Address : Unit 10, 21/F, Block B, New Trade Plaza, No.6 Ping Street, Shatin, N.T., H.K.

Manufacturer : SHENZHEN GOLD EAST ELETRONIC CO., LTD

Address : Unit 10, 21/F, Block B, New Trade Plaza, No.6 Ping Street, Shatin, N.T., H.K.

Test Result according to the standards on page 5:

Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>2.</u>	<u>SUMMARY</u>	<u>6</u>
2.1.	General Remarks	6
2.2.	Equipment Under Test	6
2.3.	Short description of the Equipment under Test (EUT)	6
2.4.	EUT operation mode	6
2.5.	EUT configuration	7
2.6.	Configuration of Tested System	7
2.7.	Related Submittal(s) / Grant (s)	7
2.8.	Modifications	7
2.9.	NOTE	7
2.10.	Frequency Hopping System Requirements	8
2.11.	Mode of Operation	10
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>11</u>
3.1.	Address of the test laboratory	11
3.2.	Test Facility	11
3.3.	Environmental conditions	11
3.4.	Statement of the measurement uncertainty	11
3.5.	Test Description	12
3.6.	Equipments Used during the Test	13
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>14</u>
4.1.	AC Power Conducted Emission	14
4.2.	Radiated Emission	17
4.3.	Maximum Peak Output Power	24
4.4.	20dB Bandwidth	31
4.5.	Band Edge	38
4.6.	Frequency Separation	55
4.7.	Number of hopping frequency	62
4.8.	Time Of Occupancy(Dwell Time)	71
4.9.	Spurious RF Conducted Emissions	77
4.10.	Antenna Requirement	84
4.11.	RF Exposure	85
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>86</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>88</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

RSS-210 Issue 8 (2010): Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices

FCC Public Notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.4-2003

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice DA 00-705 for frequency hopping spread spectrum systems shall be performed also.



2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	July 22, 2013
Testing commenced on	:	July 22, 2013
Testing concluded on	:	August 20, 2013

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input checked="" type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.7V from battery

2.3. Short description of the Equipment under Test (EUT)

A Smart Phone with UMTS/GSM, Bluetooth, GPS and wifi function.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel .

Frequency Range:	2400-2483.5MHz
Channel number:	79 channels
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna:	internal

Test Channel	Test Frequency
Low	2402 MHz
Middle	2441 MHz
High	2480 MHz

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

<input checked="" type="radio"/>	Notebook PC	Manufacturer :	lenovo
		Model No. :	E43L

2.6. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	lenovo	E43L	EB14896577	-----

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AANR-NUGGETD5** and **IC: 11302A-NUGGETD5** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and RSS-210.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

1. The EUT is a an Bluetooth Standard type device,The functions of the EUT listed as below:

	Test Standards	Reference Report
Radio	FCC Part 15 Subpart C & RSS-210	CTL1307161139-WB
RF Exposure	FCC Per 47 CFR 2.1093	CTL1307161139-WB

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
Bluetooth	✓	—	—	—

3. The EUT provides one completed transmitter and receiver.

Modulation Mode	TX Function
Bluetooth	1TX

2.10. Frequency Hopping System Requirements

Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

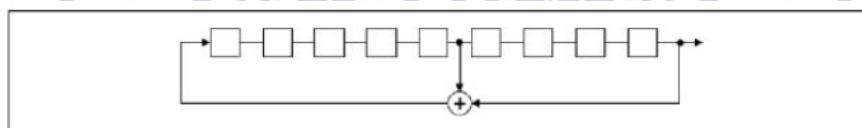

Linear Feedback Shift Register for Generation of the PRBS sequence


The frequencies allocated for the Bluetooth Module is $F(\text{MHz}) = 2402 + 1 * n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops.

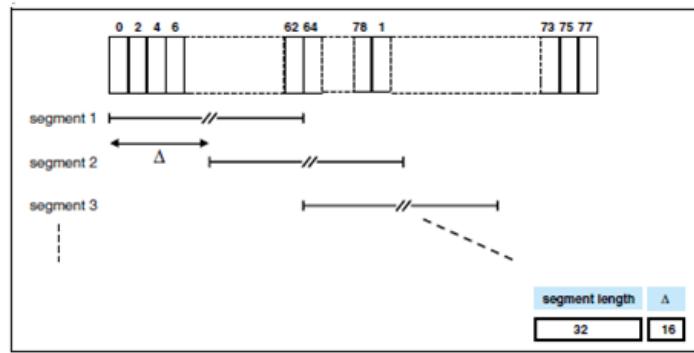

Hop selection scheme in CONNECTION state.

Channels list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

The pseudorandom frequency hopping sequence sample:

42,41,66,4,78,59,55,48,54,46,52,78,41,26,24,34,39,32,51,18,25,9,12,73,70,58,54,6,66,4,32,67,60,16,3,78,76,47,45,47,49,14,34, etc.

Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 channels (1 MHz separation; from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

2.11. Mode of Operation

CTL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5) DH5
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5) 2DH5
Mode 3: Transmitter-3Mbps(8DPSK_DH5) 3DH5



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

FCC PART 15 Subpart C/ RSS-210		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency	PASS
FCC Part 15.247(a)(1)(iii)	Time of Occupancy	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.




3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2013/04/14	2014/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2013/04/14	2014/04/13
3	Dual Directional Coupler	Agilent	778D	2013/04/14	2014/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2013/04/14	2014/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2013/04/14	2014/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2013/04/14	2014/04/13
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2013/04/14	2014/04/13
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2013/04/14	2014/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2013/04/14	2014/04/13
10	AC Power Supply	IDRC	CF-500TP	2013/04/14	2014/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2013/04/14	2014/04/13
12	RF Current Probe	FCC	F-33-4	2013/04/14	2014/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2013/04/14	2014/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2013/04/14	2014/04/13
15	Amplifier	HP	8447D	2013/04/14	2014/04/13
16	SIGNAL GENERATOR	HP	8647A	2013/04/14	2014/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2013/04/14	2014/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2013/04/14	2014/04/13
19	EMI Test Receiver	R&S	ESPI	2013/04/14	2014/04/13
20	Loop Antenna	ZHINAN	ZN30900A	2013/04/14	2014/04/13
21	Horn Antenna	Schwarzbeck	BBHA9120D	2013/04/14	2014/04/13
22	Horn Antenna	Schwarzbeck	BBHA9170	2013/04/14	2014/04/13
23	Spectrum Analyzer	Agilent	E4446A	2013/04/14	2014/04/13
24	Wideband Peak Power Meter	Anritsu	ML2495A	2013/04/14	2014/04/13
25	Power Sensor	Anritsu	MA2411B	2013/04/14	2014/04/13

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

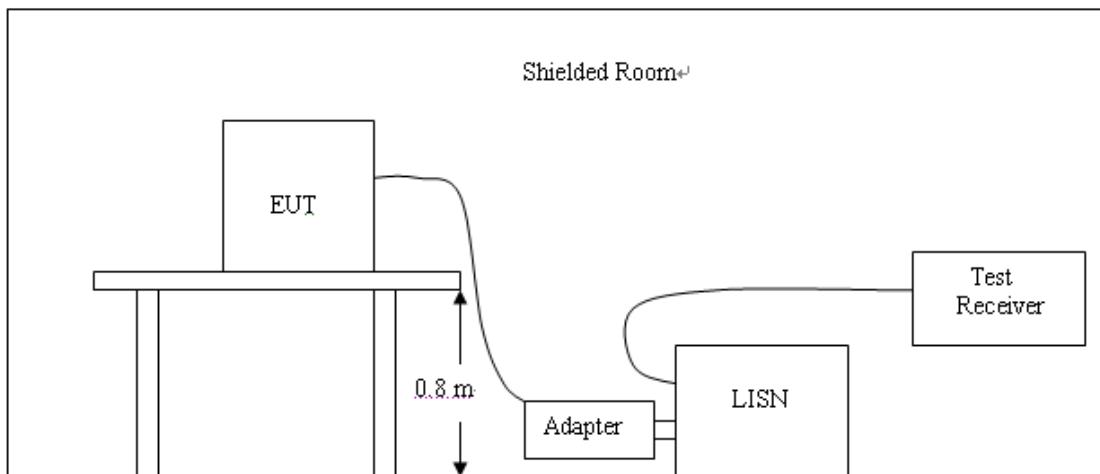

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2009
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The 1Mbps (GFSK Modulation) is the worst case as results in the report based on the Pre-test for all modulation models.

Mode 1:

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

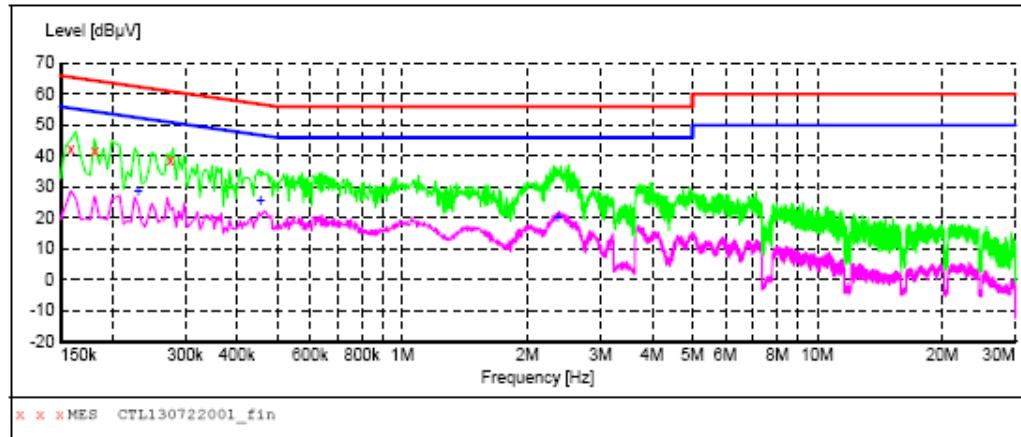**MEASUREMENT RESULT: "CTL130722001_fin"**

7/22/2013 2:22PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.159000	42.60	9.8	66	22.9	QP	L1	GND
0.181500	41.50	9.8	64	22.9	QP	L1	GND
0.276000	38.40	9.8	61	22.5	QP	L1	GND

MEASUREMENT RESULT: "CTL130722001_fin2"

7/22/2013 2:22PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.231000	29.00	9.8	52	23.4	AV	L1	GND
0.456000	26.00	9.8	47	20.8	AV	L1	GND
2.373000	20.60	9.9	46	25.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

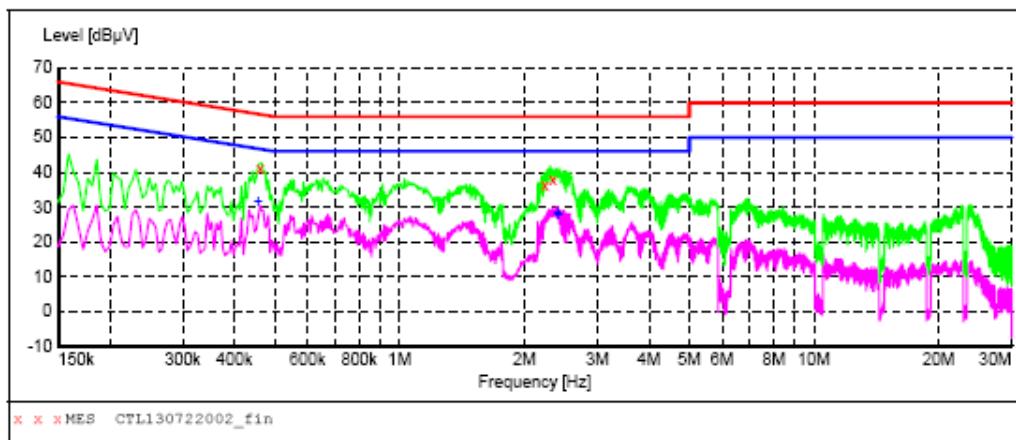

MEASUREMENT RESULT: "CTL130722002_fin"

7/22/2013 2:27PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.460500	40.90	9.8	57	15.8	QP	N	GND
2.242500	36.30	9.9	56	19.7	QP	N	GND
2.346000	38.00	9.9	56	18.0	QP	N	GND

MEASUREMENT RESULT: "CTL130722002_fin2"

7/22/2013 2:27PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.456000	31.90	9.8	47	14.9	AV	N	GND
2.409000	28.50	9.9	46	17.5	AV	N	GND
2.418000	28.40	9.9	46	17.6	AV	N	GND




4.2. Radiated Emission

TEST CONFIGURATION


Radiated Emission Test Set-Up
Frequency range 9KHz – 30MHz

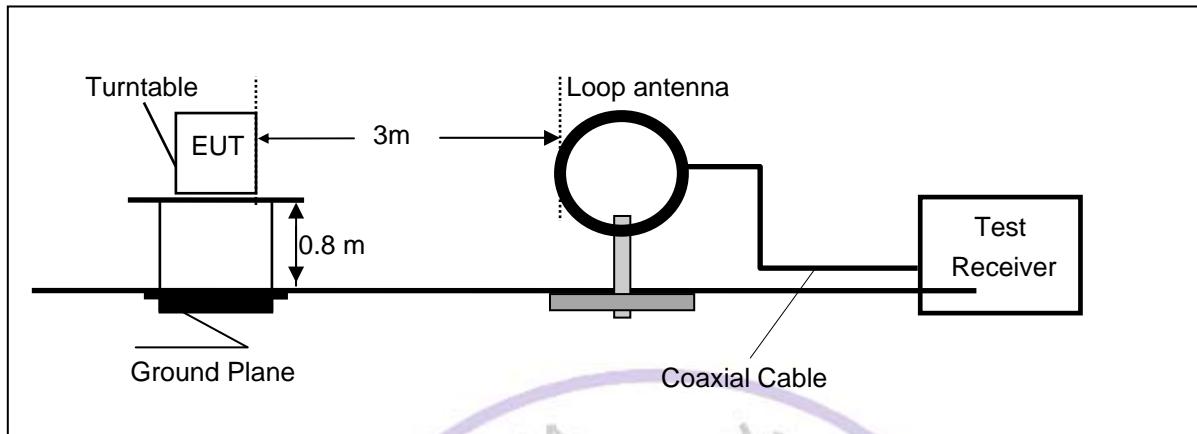

Frequency range 30MHz – 1000MHz

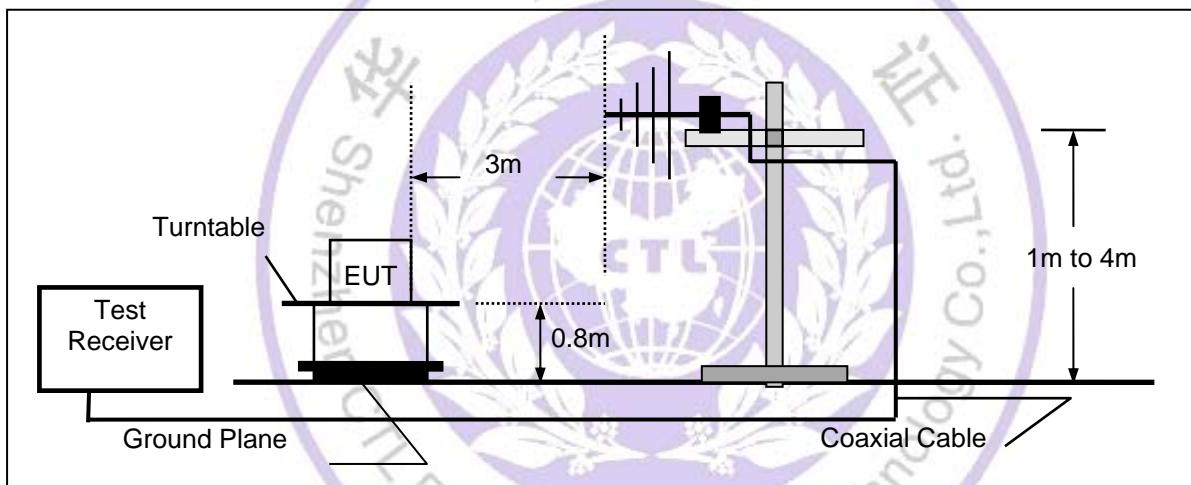

Frequency range above 1GHz-25GHz

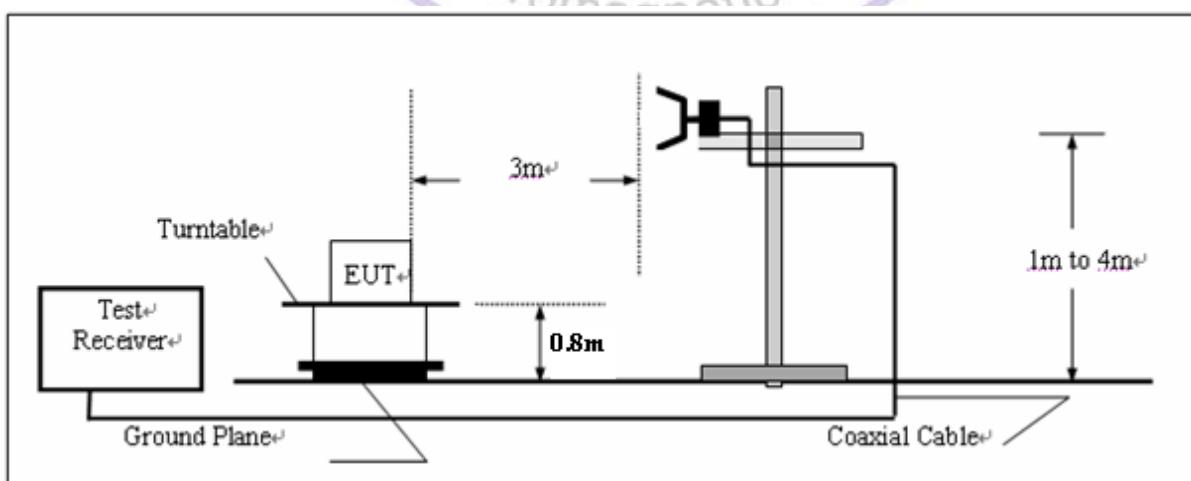

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. the fundamental frequency is 2400-2483.5MHz, So the radiation emissions frequency range were tested from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$Transd = AF + CL - AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Mode 1: Transmitter-1Mbps(GFSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	V	2401.9	63.3	31.2	94.5	Fundamental	/	PK
	H	31.8	4.6	27.3	31.9	40	-8.1	QP
	H	636.9	4.7	29.1	33.8	46	-12.2	QP
	H	3201.5	59.6	-15.9	43.7	54(Note3)	-10.3	PK
	H	4799.5	66.6	-11.9	54.7	74	-19.3	PK
	H	4799.0	58.5	-11.9	46.6	54	-7.4	AV
	H	7260.0	47.6	-3.3	44.3	54(Note3)	-9.7	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
39	H	2441.0	64.2	31.2	95.4	Fundamental	/	PK
	H	434.6	6.2	27.1	33.3	46	-12.7	QP
	V	772.3	5.6	31.7	37.3	46	-8.7	QP
	V	3210.0	58.4	-15.9	42.5	54(Note3)	-11.5	PK
	V	4884.5	67.9	-11.7	56.2	74	-17.8	PK
	V	4884.0	59.3	-11.7	47.6	54	-6.4	AV
	H	7323.0	47.7	-3.0	44.7	54(Note3)	-9.3	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
78	V	2479.9	64.1	31.2	95.3	Fundamental	/	PK
	V	239.9	4.4	25.7	30.1	46	-15.9	QP
	V	552.5	6.0	28.0	34.0	46	-12.0	QP
	V	3201.5	56.3	-15.9	40.4	54(Note3)	-13.6	PK
	V	4961.0	72.3	-11.4	60.9	74	-13.1	PK
	V	4960.0	63.4	-11.4	52.0	54	-2.0	AV
	V	7440.0	47.3	-2.6	44.7	54(Note3)	-9.3	PK
	V	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	V	2402.0	66.1	31.2	97.3	Fundamental	/	PK
	H	625.0	5.5	29.1	34.6	46	-11.4	QP
	V	636.4	6.7	27.9	34.6	46	-11.4	QP
	H	3201.5	59.5	-15.9	43.6	54(Note3)	-10.4	PK
	H	4799.5	67.8	-11.9	55.9	74	-18.1	PK
	H	4799.0	56.8	-11.9	44.9	54	-9.1	AV
	V	7260.0	47.7	-3.3	44.4	54(Note3)	-9.6	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
39	H	2441.0	66.8	31.2	98.0	Fundamental	/	PK
	V	455.2	5.5	26.5	32.0	46	-14.0	QP
	H	521.1	6.5	28.0	34.5	46	-11.5	QP
	H	3201.5	59.2	-15.9	43.3	54(Note3)	-10.7	PK
	H	4884.5	68.2	-11.7	56.5	74	-17.5	PK
	H	4884.0	56.5	-11.7	44.8	54	-9.2	AV
	V	7323.0	47.0	-3.0	44.0	54(Note3)	-10.0	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
78	V	2479.9	66.6	31.2	97.8	Fundamental	/	PK
	V	544.1	6.4	27.8	34.2	46	-11.8	QP
	H	677.0	6.5	28.7	35.2	46	-10.8	QP
	H	3201.5	55.3	-15.9	39.4	54(Note3)	-14.6	PK
	H	4961.0	70.2	-11.4	58.8	74	-15.2	PK
	H	4961.0	59.2	-11.4	47.8	54	-6.2	AV
	V	7440.0	47.7	-2.6	45.1	54(Note3)	-8.9	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK

Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode 3: Transmitter-3Mbps(8DPSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	V	2402.0	66.2	31.2	97.4	Fundamental	/	PK
	H	419.8	5.1	27.0	32.0	46	-14.0	QP
	V	556.3	5.2	28.0	33.2	46	-12.8	QP
	H	3201.5	58.7	-15.9	42.8	54(Note3)	-11.2	PK
	H	4799.5	67.6	-11.9	55.7	74	-18.3	PK
	H	4799.0	54.1	-11.9	42.2	54	-11.8	AV
	H	7260.0	47.4	-3.3	44.1	54(Note3)	-9.9	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
39	H	2441.0	66.9	31.2	98.1	Fundamental	/	PK
	V	544.1	5.2	27.8	33.0	46	-13.0	QP
	H	574.9	5.9	28.8	34.7	46	-11.3	QP
	H	3193.0	57.7	-15.9	41.8	54(Note3)	-12.2	PK
	H	4884.5	68.6	-11.7	56.9	74	-17.1	PK
	H	4884.0	57.6	-11.7	45.9	54	-8.1	AV
	V	7323.0	47.0	-3.0	44.0	54(Note3)	-10.0	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK
78	V	2479.9	67.1	31.2	98.3	Fundamental	/	PK
	V	554.8	5.5	28.1	33.6	46	-12.4	QP
	H	684.1	5.8	29.2	35.0	46	-11.0	QP
	H	3201.5	56.9	-15.9	41.0	54(Note3)	-13.0	PK
	H	4961.0	70.9	-11.4	59.5	74	-14.5	PK
	H	4961.0	57.3	-11.4	45.9	54	-8.1	AV
	V	7440.0	47.0	-2.6	44.4	54(Note3)	-9.6	PK
	H	24000.0	59.1	-8.9	50.2	54(Note3)	-3.8	PK


Note: 1. Measure Level = Reading Level + Factor.

2. The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

The worst case of Receiver Radiated Emission below 1GHz:


SWEEP TABLE: "test (30M-1G)"
 Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

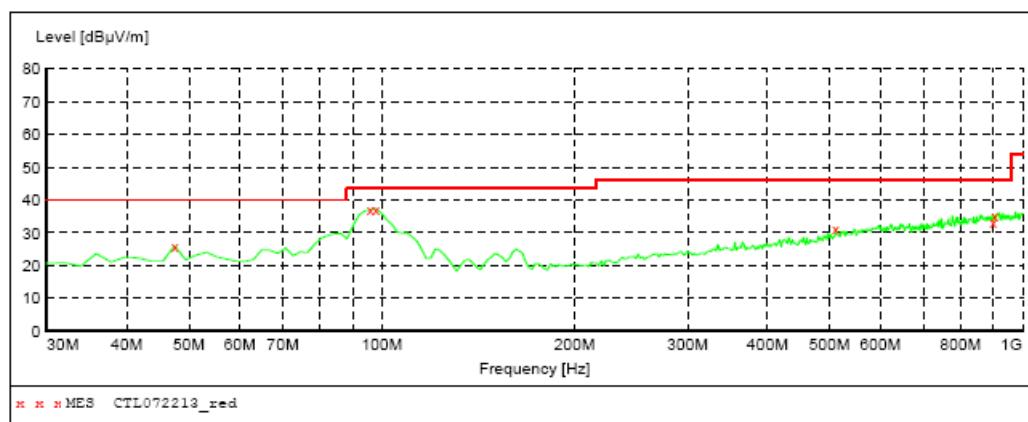


MEASUREMENT RESULT: "CTL072213_red"

7/22/2013 10:53

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
47.460000	26.00	15.8	40.0	14.0	---	100.0	0.00	VERTICAL
95.960000	36.90	17.2	43.5	6.6	---	100.0	0.00	VERTICAL
97.900000	37.30	17.4	43.5	6.2	---	100.0	0.00	VERTICAL
511.120000	31.40	24.1	46.0	14.6	---	100.0	0.00	VERTICAL
899.120000	33.30	29.2	46.0	12.7	---	100.0	0.00	VERTICAL
904.940000	35.30	29.2	46.0	10.7	---	100.0	0.00	VERTICAL

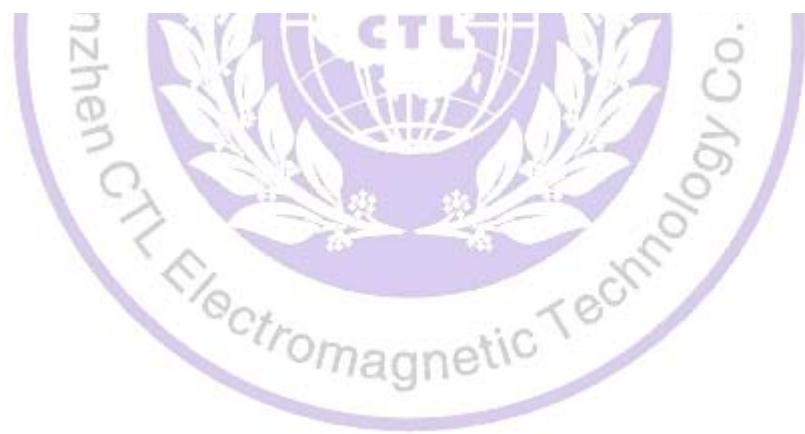

SWEEP TABLE: "test (30M-1G)"
 Short Description: Field Strength
 Start Frequency: 30.0 MHz Stop Frequency: 1.0 GHz Detector: MaxPeak Meas. Time: Coupled IF: 100 kHz Transducer: VULB9163 NEW

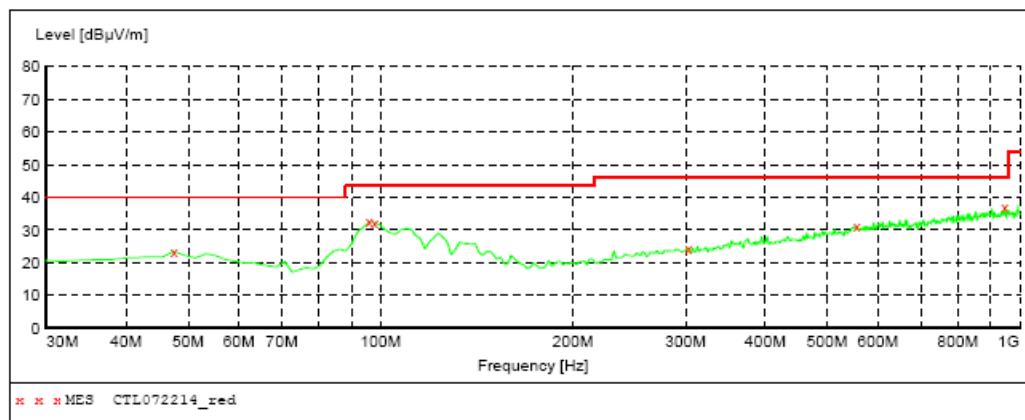

MEASUREMENT RESULT: "CTL072214_red"


7/22/2013 10:51

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
47.460000	23.50	15.8	40.0	16.5	---	100.0	0.00	HORIZONTAL
95.960000	32.50	17.2	43.5	11.0	---	100.0	0.00	HORIZONTAL
97.900000	32.30	17.4	43.5	11.2	---	100.0	0.00	HORIZONTAL
303.540000	24.50	18.8	46.0	21.5	---	100.0	0.00	HORIZONTAL
555.740000	31.10	25.1	46.0	14.9	---	100.0	0.00	HORIZONTAL
947.620000	37.10	29.5	46.0	8.9	---	100.0	0.00	HORIZONTAL



4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured.

VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss).

LIMIT


The Maximum Peak Output Power Measurement limit is 30dBm.

TEST RESULTS


Product	:	Smart Phone
Test Item	:	Power Output
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	-2.47	30.00	Pass
39	2441	-1.78	30.00	Pass
78	2480	-1.14	30.00	Pass


DH5 2402MHz

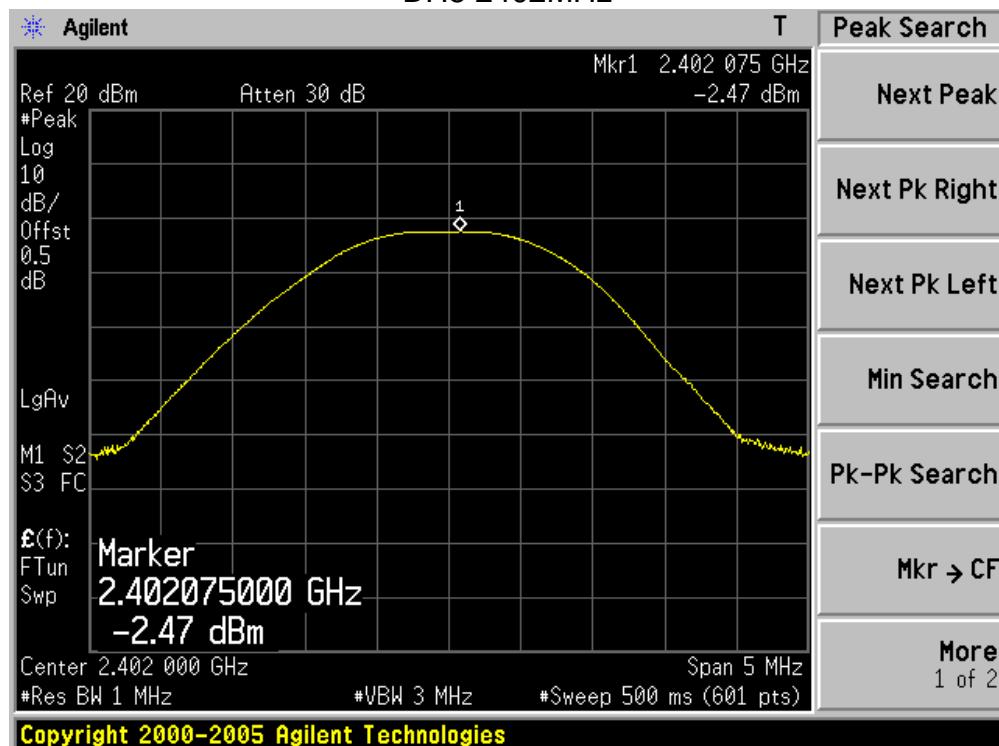

DH5 2441MHz

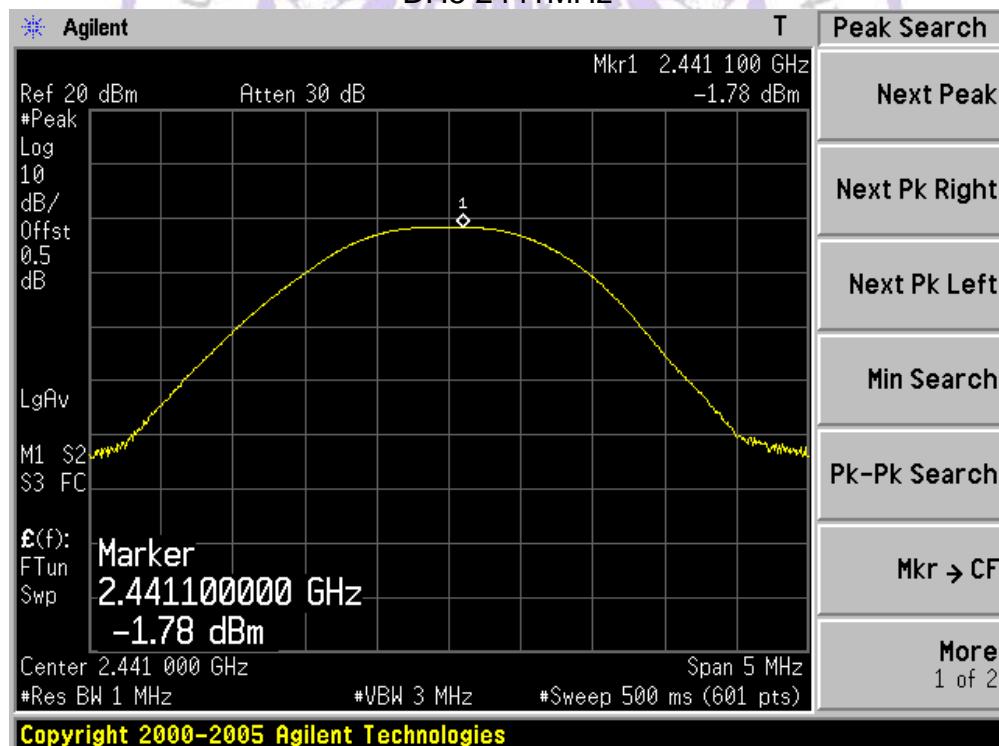


DH5 2480MHz

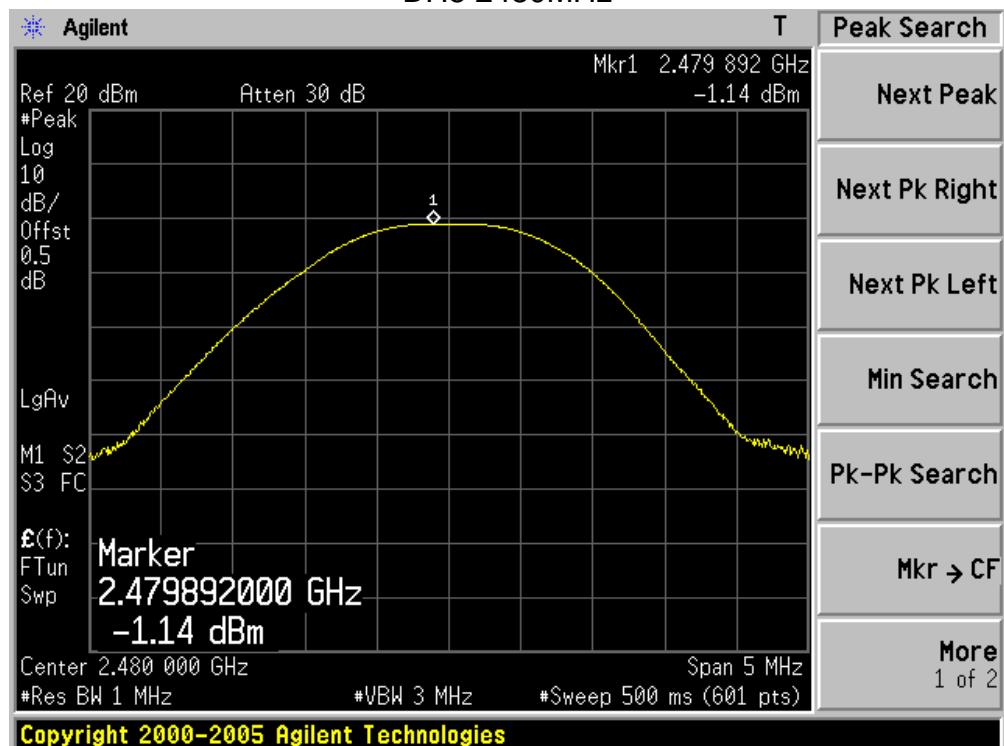


Product	:	Smart Phone
Test Item	:	Power Output
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	0.18	30.00	Pass
39	2441	0.89	30.00	Pass
78	2480	1.45	30.00	Pass


2DH5 2402MHz

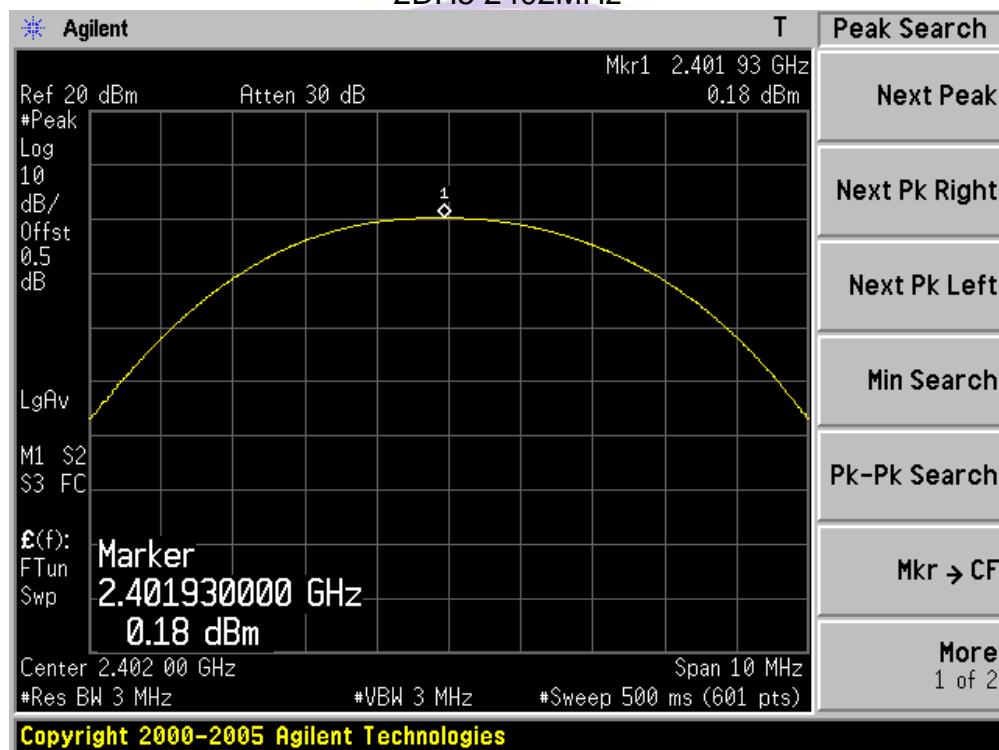

2DH5 2441MHz

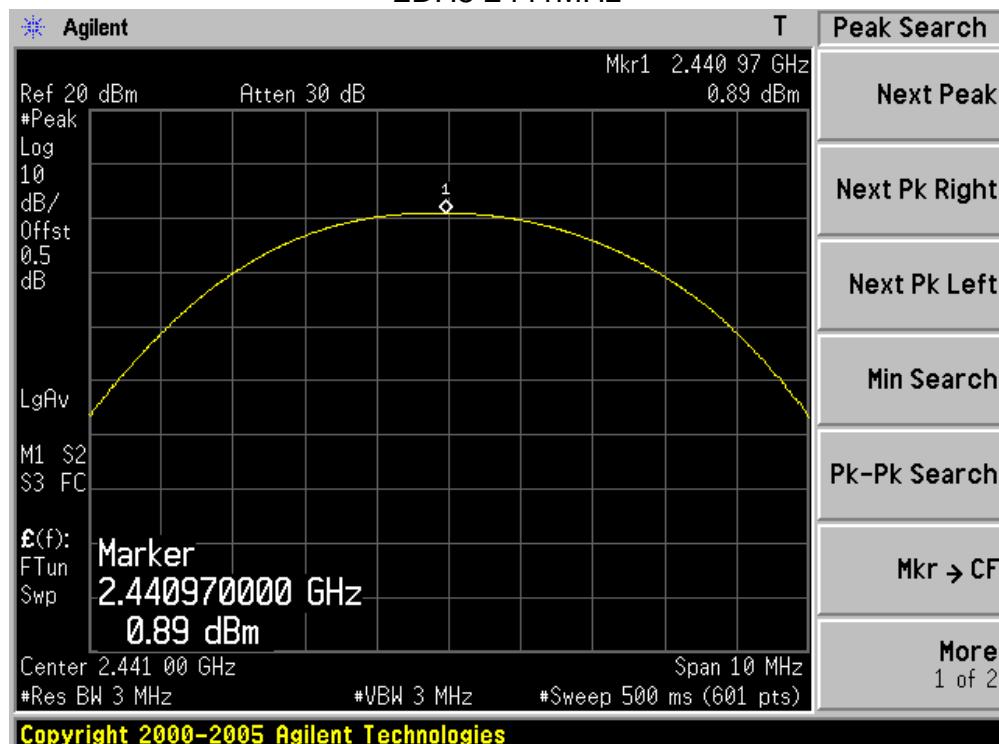


2DH5 2480MHz

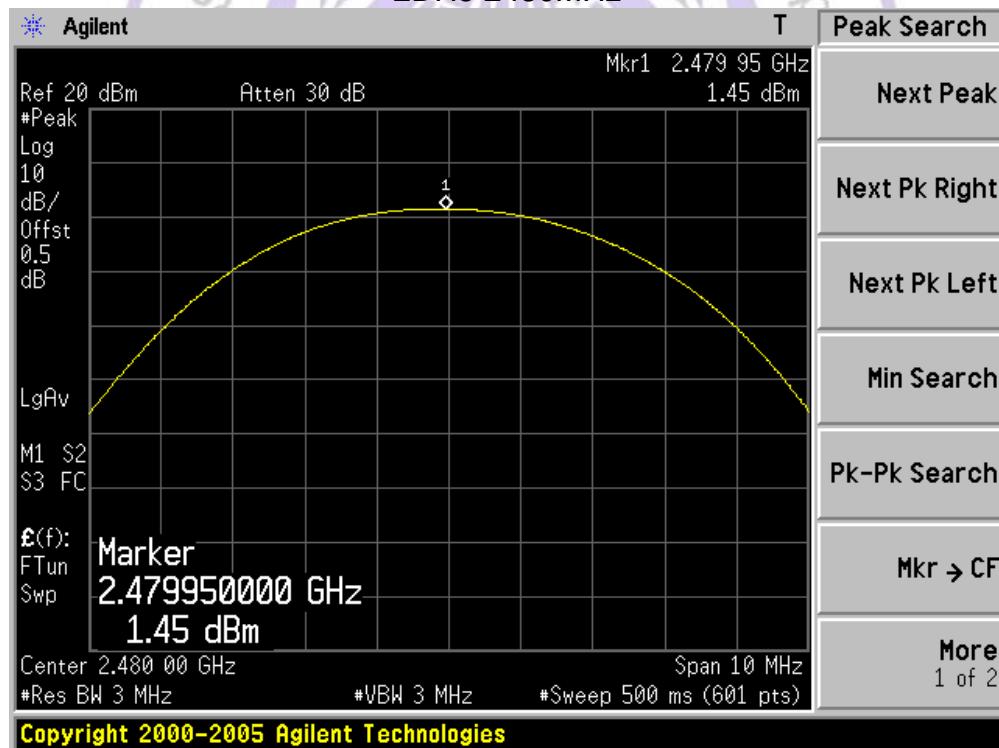


Product	:	Smart Phone
Test Item	:	Power Output
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	0.63	30.00	Pass
39	2441	1.34	30.00	Pass
78	2480	1.91	30.00	Pass


3DH5 2402MHz

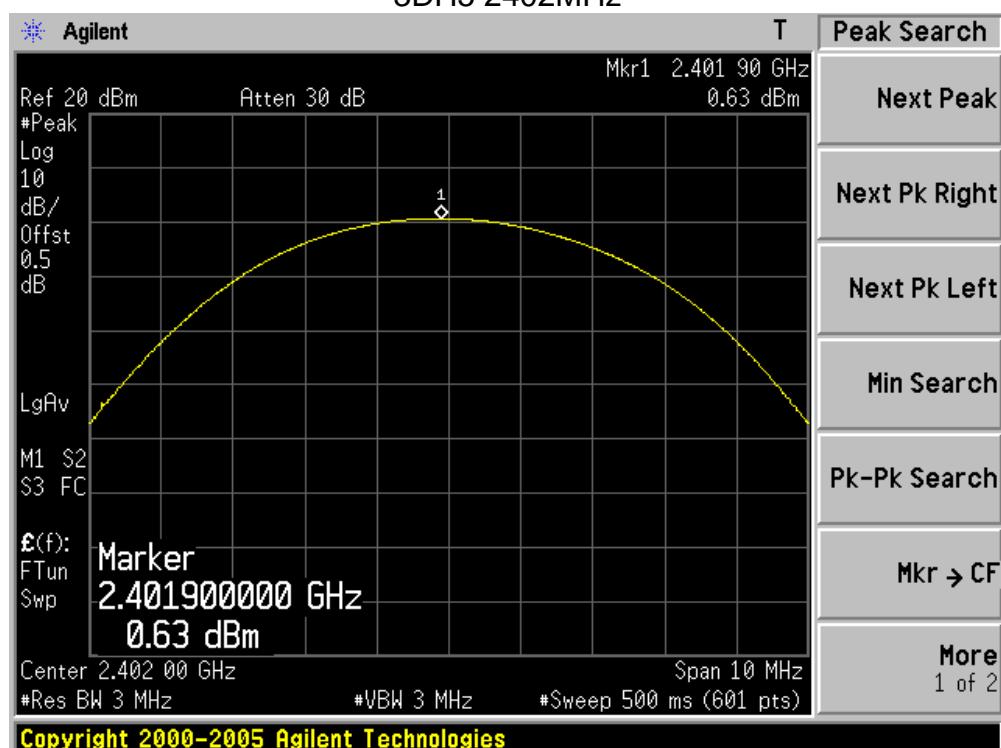

3DH5 2441MHz

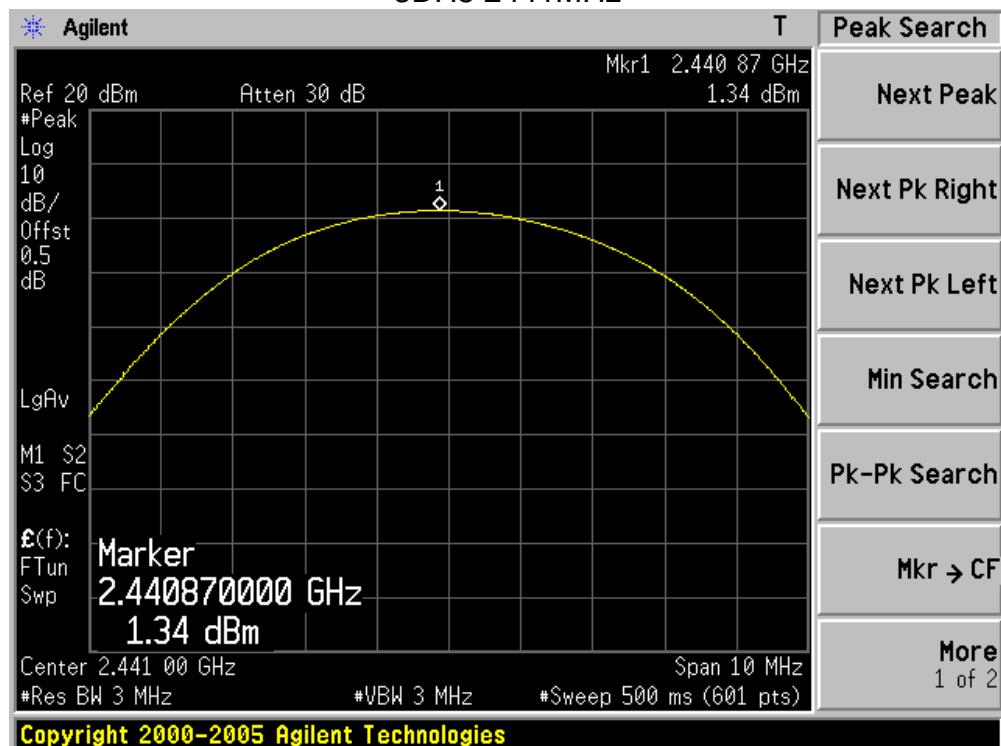

3DH5 2480MHz

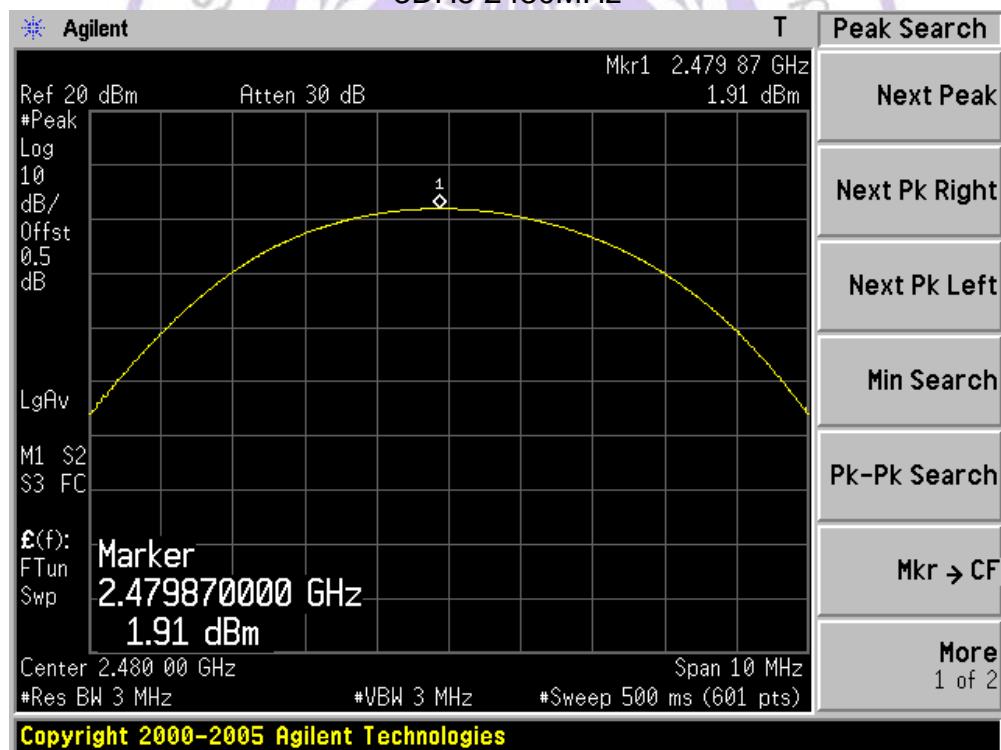

4.4. 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20dB bandwidth, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

LIMIT


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

TEST RESULTS


Product	:	Smart Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	930.08	850.25
39	2441	929.97	851.58
78	2480	925.03	850.59


Channel 00 (2402MHz)

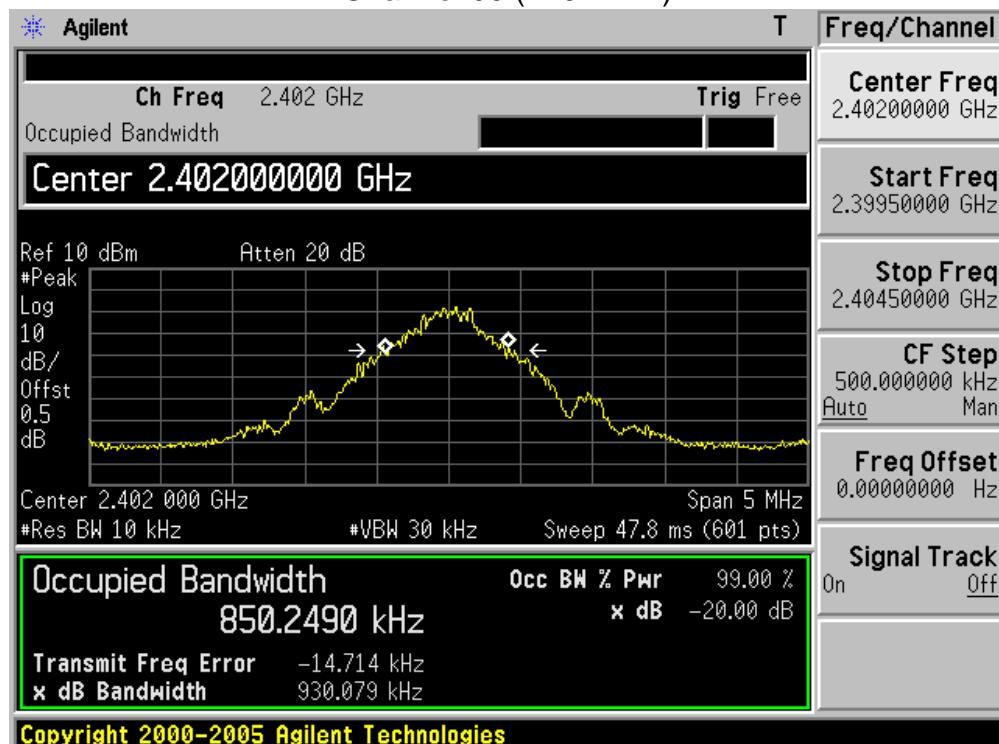

Channel 39 (2441MHz)

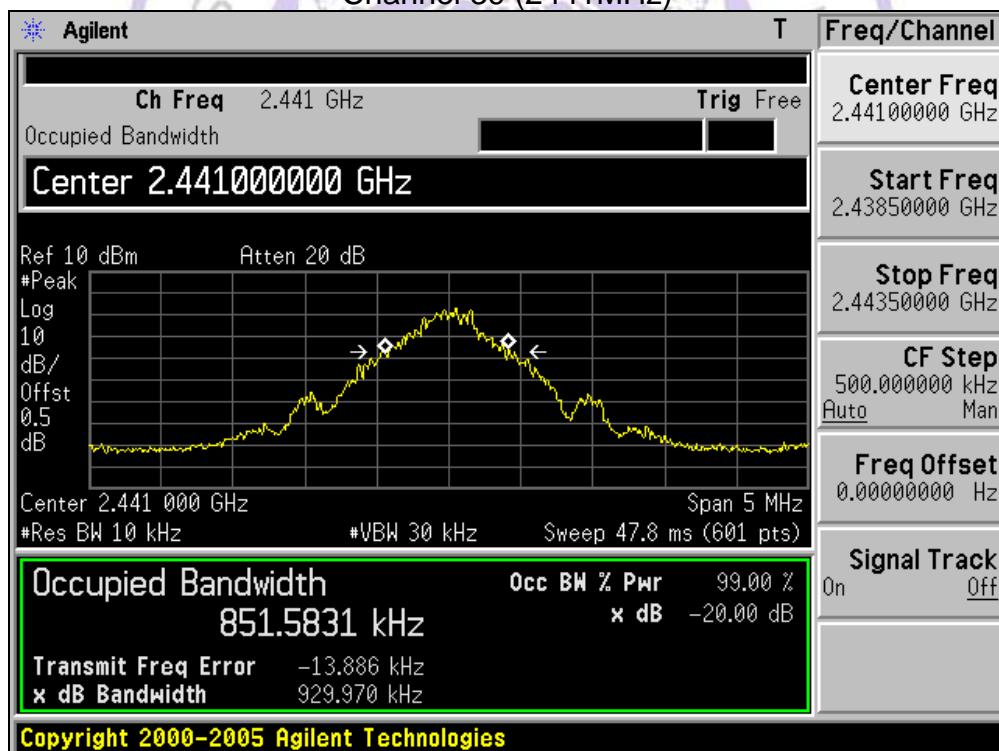


Channel 78 (2480MHz)

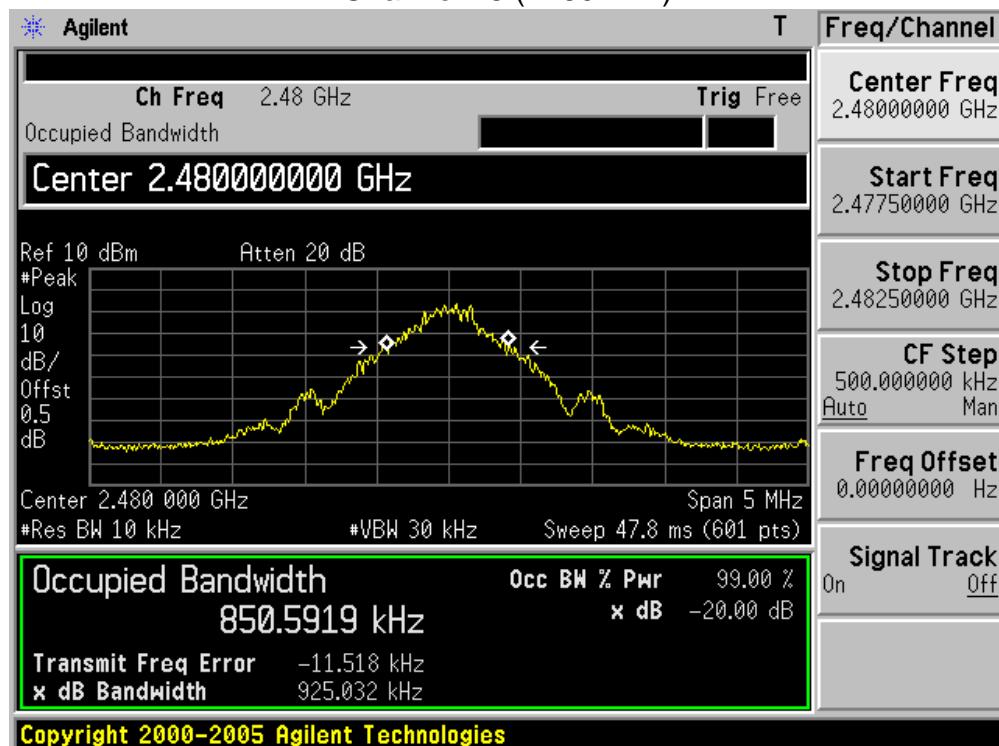

Product	:	Smart Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1321.0	1175.1
39	2441	1323.0	1176.9
78	2480	1324.0	1176.5


Channel 00 (2402MHz)

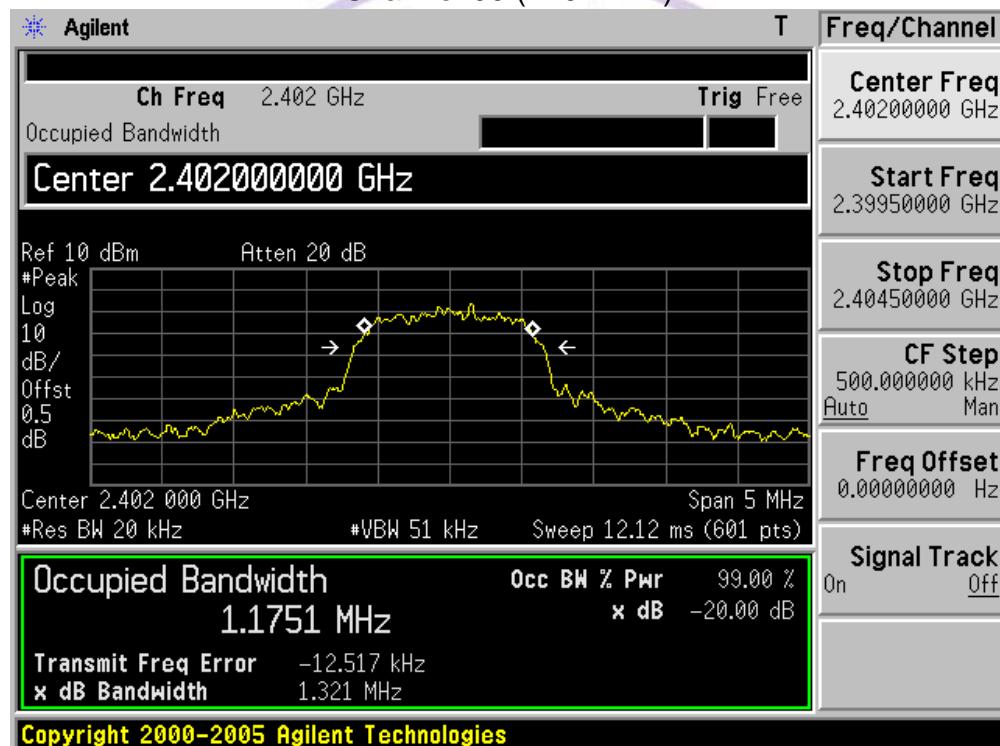

Channel 39 (2441MHz)




Channel 78 (2480MHz)

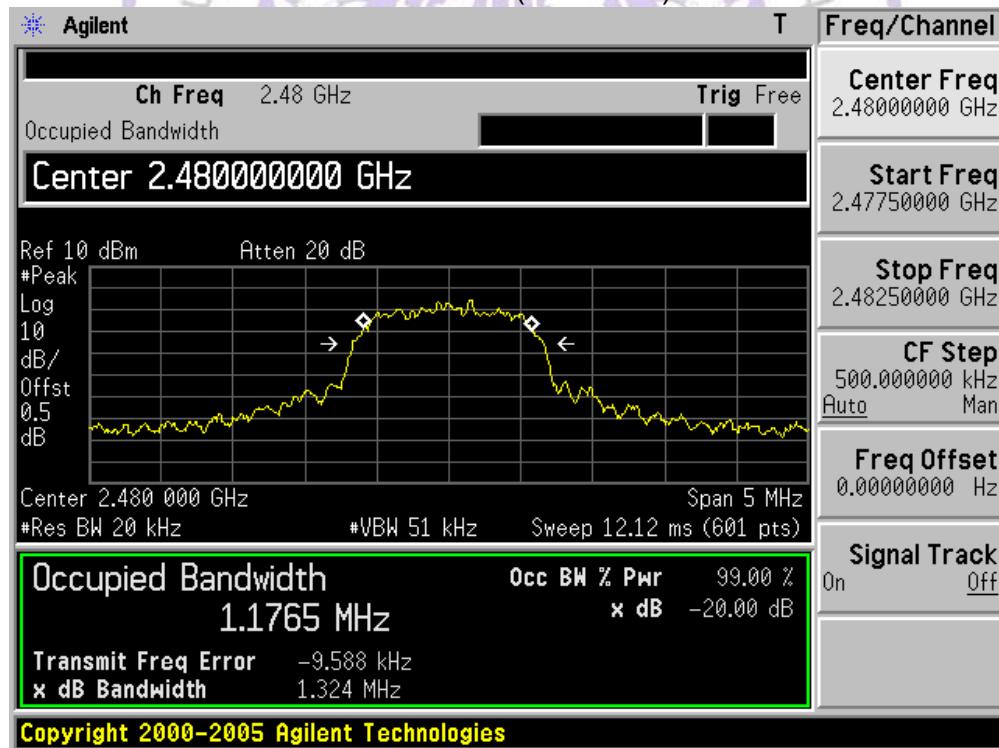


Product	:	Smart Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1278.0	1177.6
39	2441	1274.0	1178.6
78	2480	1274.0	1177.7


Channel 00 (2402MHz)

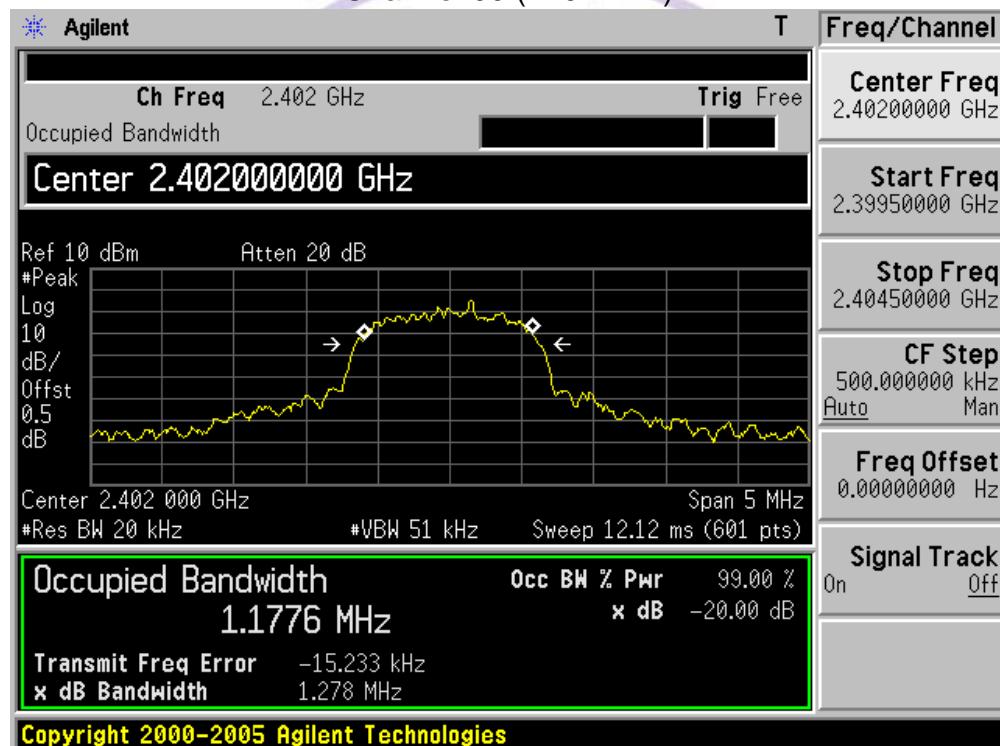

Channel 39 (2441MHz)

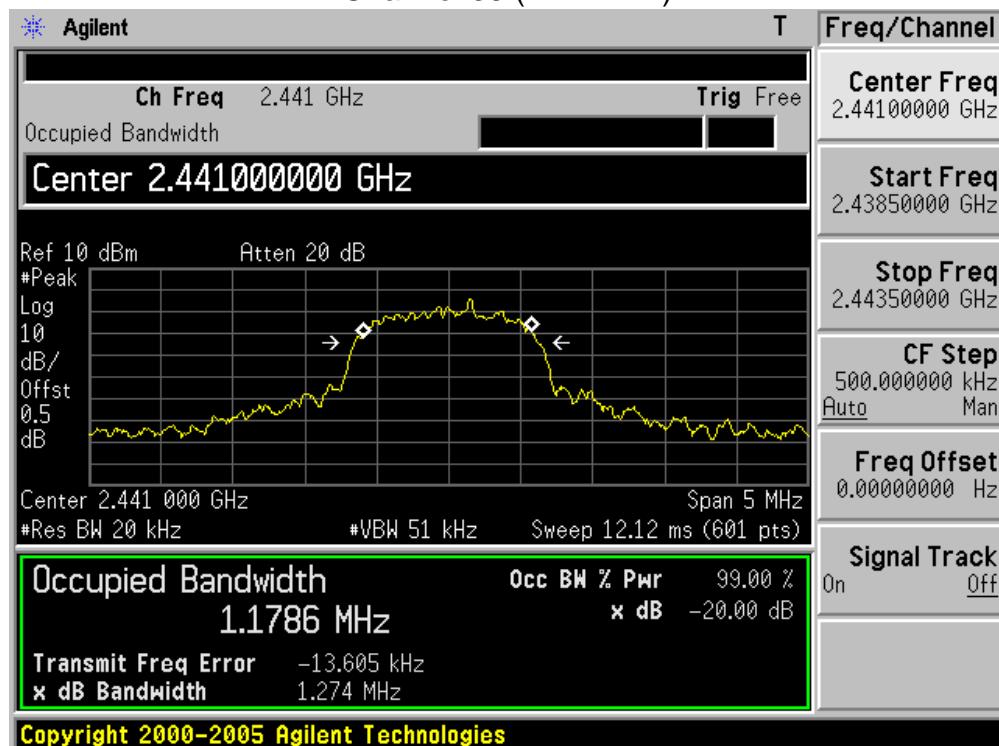

Channel 78 (2480MHz)

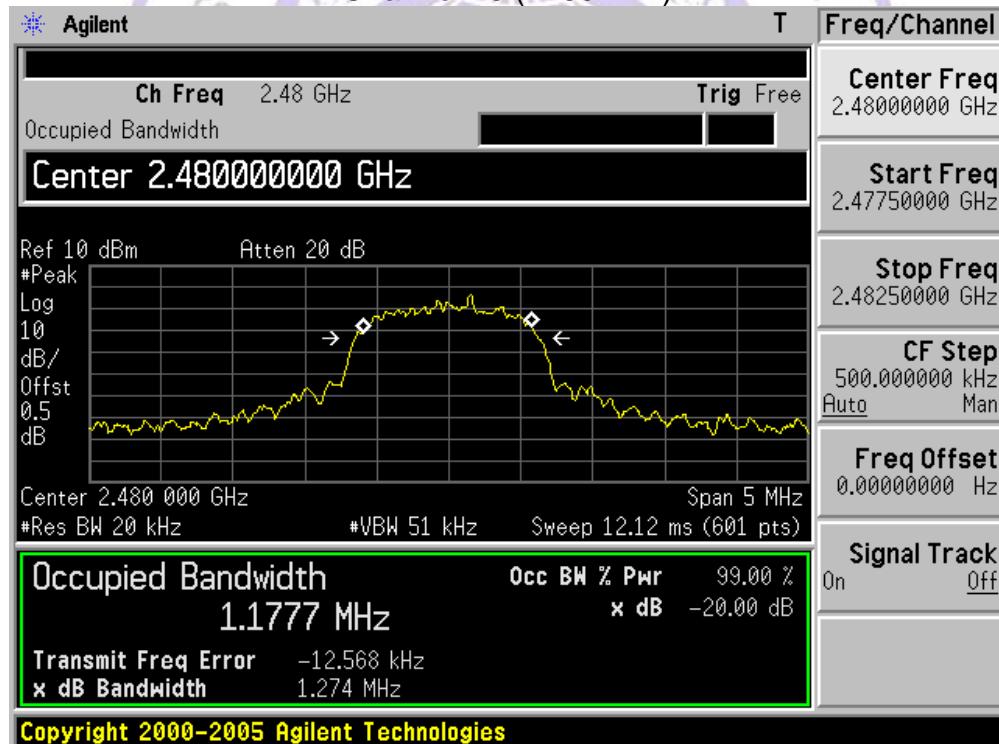

4.5. Band Edge

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.


Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

TEST RESULTS


Conducted Test:

Product	:	Smart Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel 00 (2402MHz)

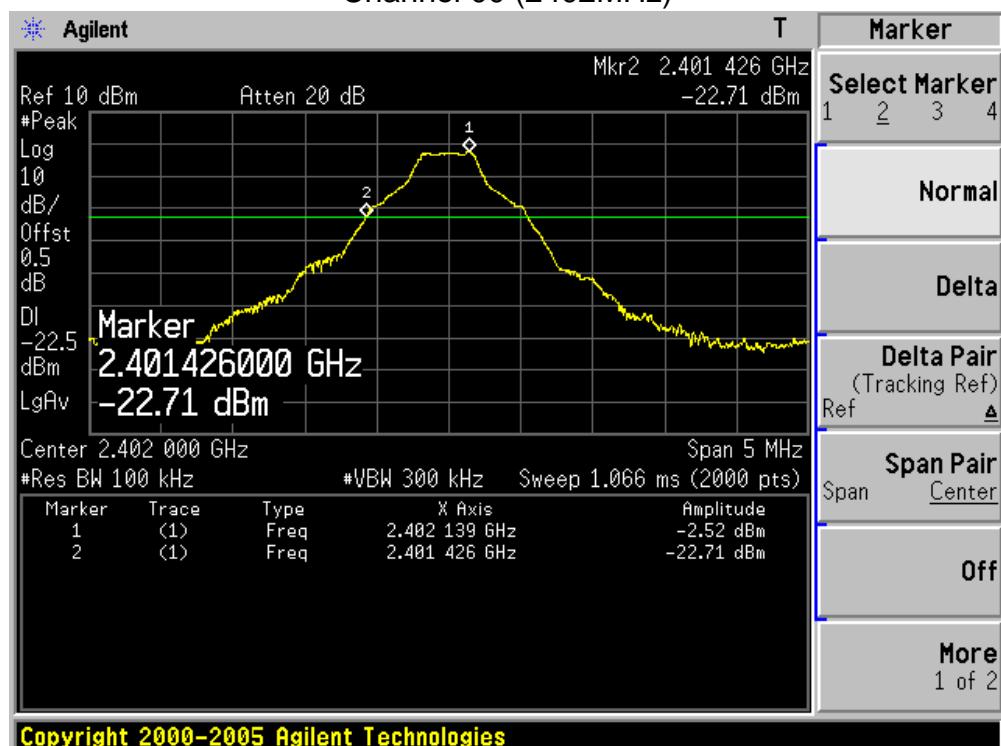


Channel 78 (2480MHz)

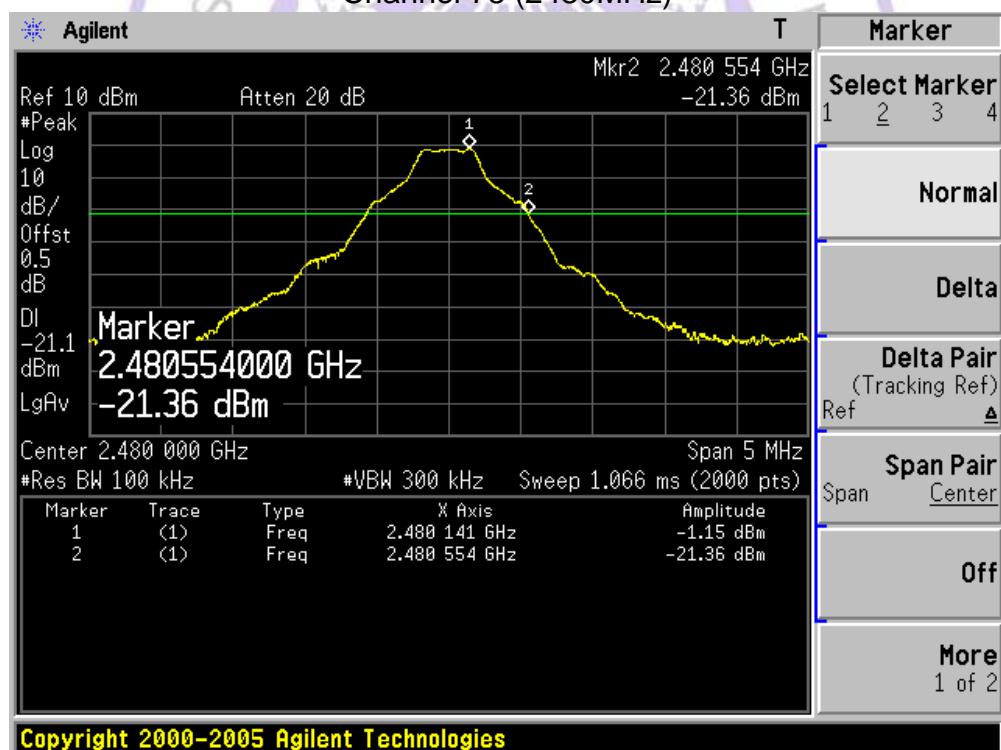


Product	:	Smart Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel 00 (2402MHz)

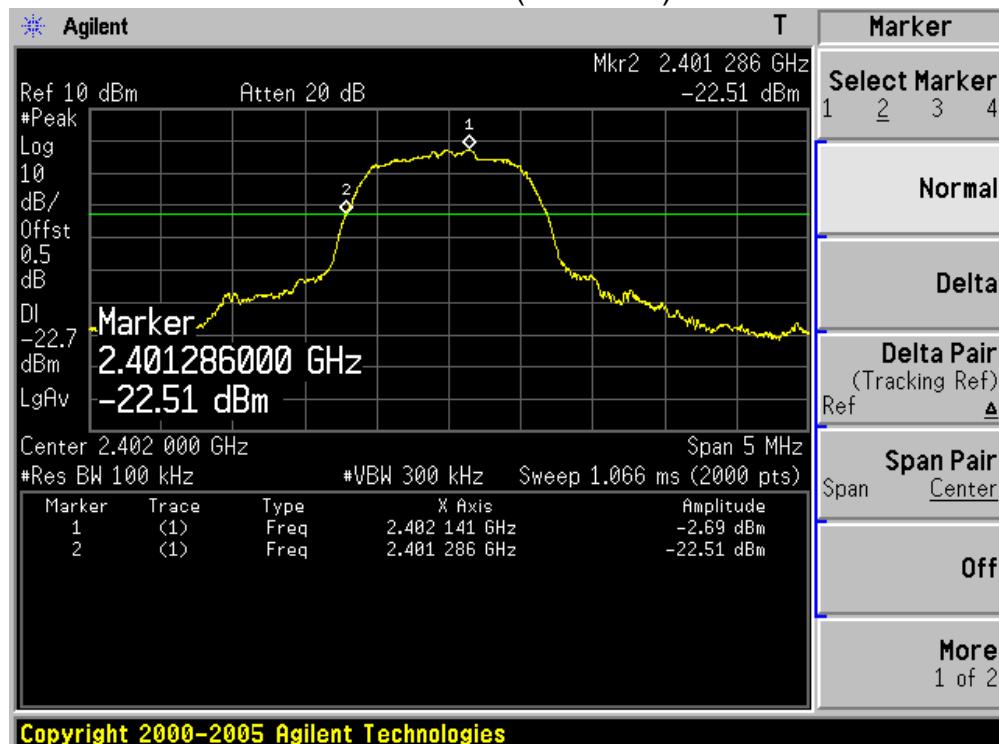


Channel 78 (2480MHz)

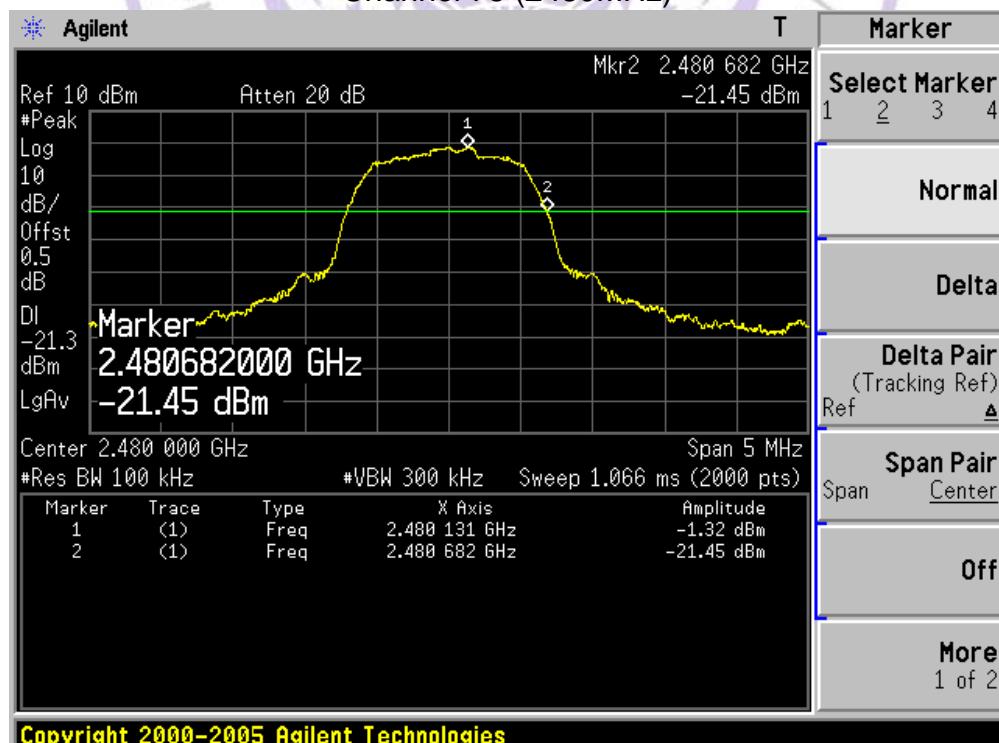


Product	:	Smart Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel 00 (2402MHz)


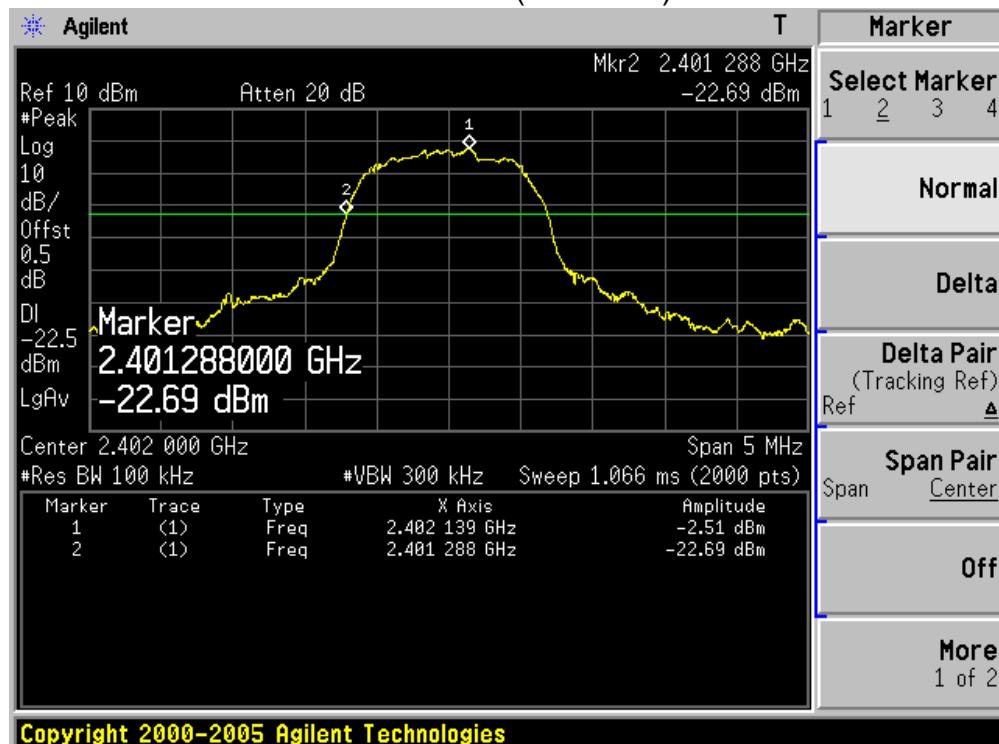


Channel 78 (2480MHz)

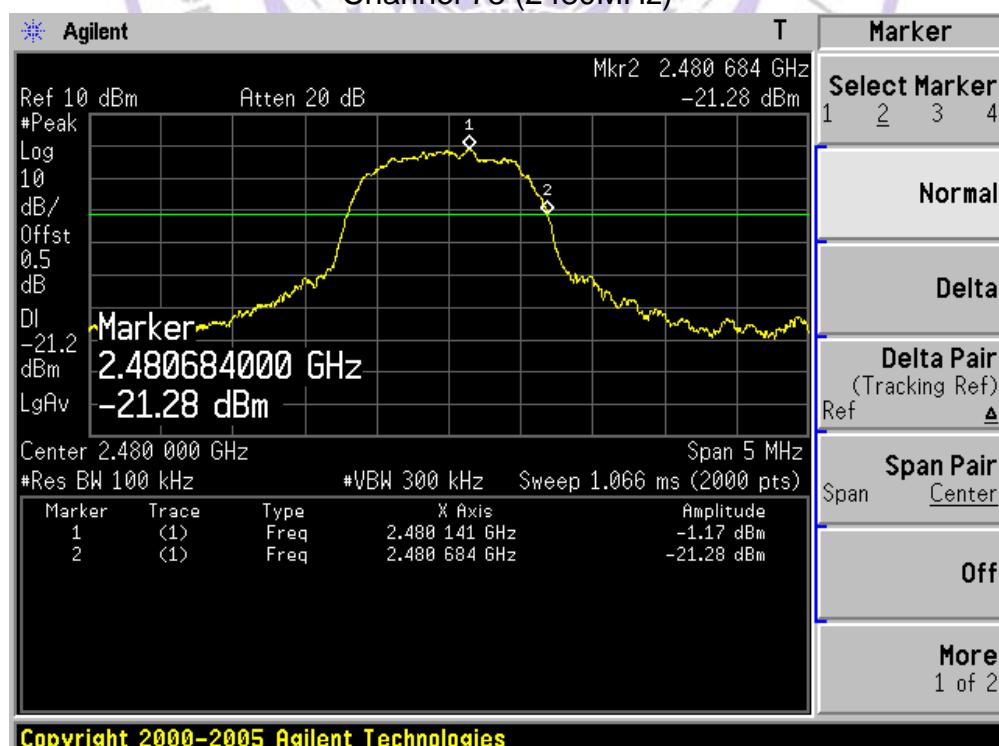


Product	:	Smart Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Hopping Mode

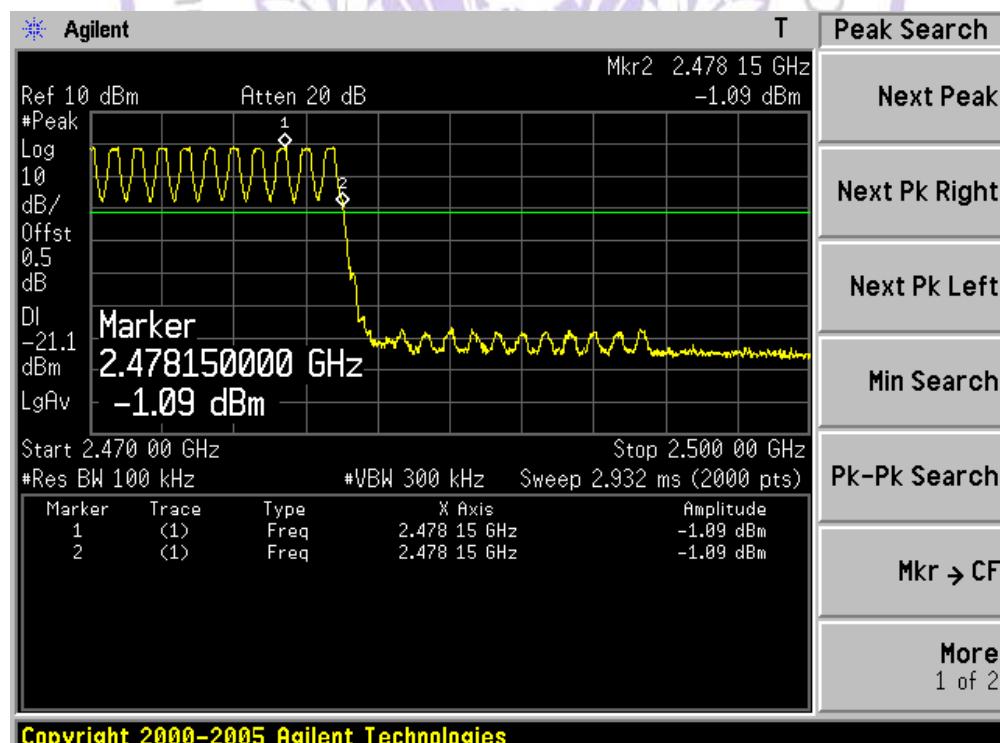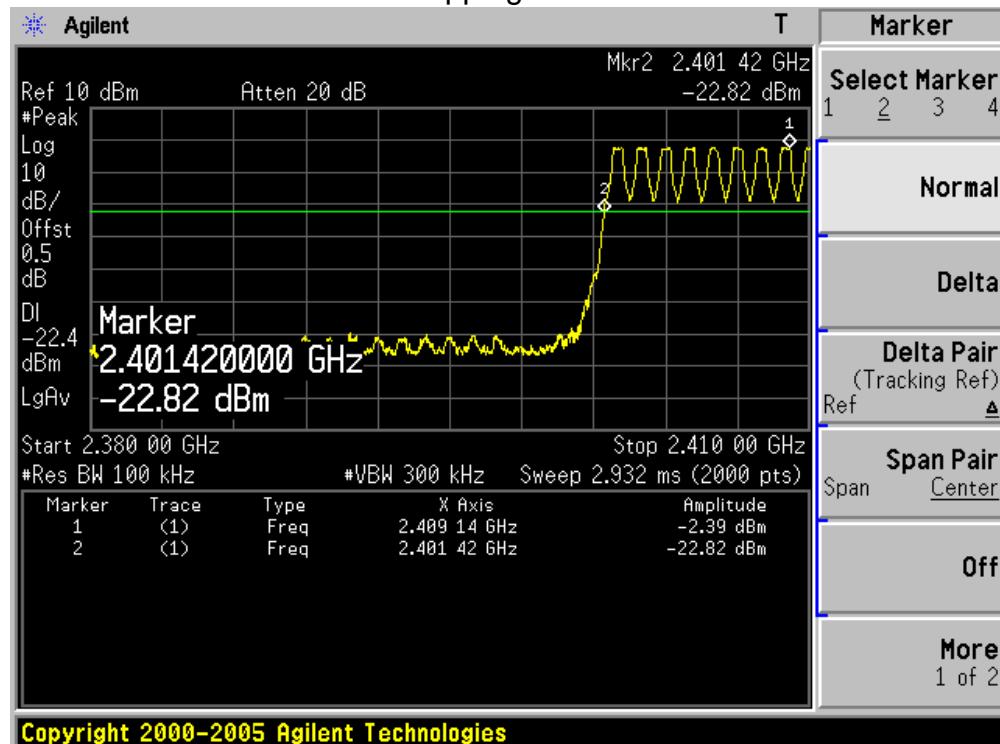


Radiated Test:

Site: AC5	Time: 2013/07/22 - 16:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2402 MHz by DH5	

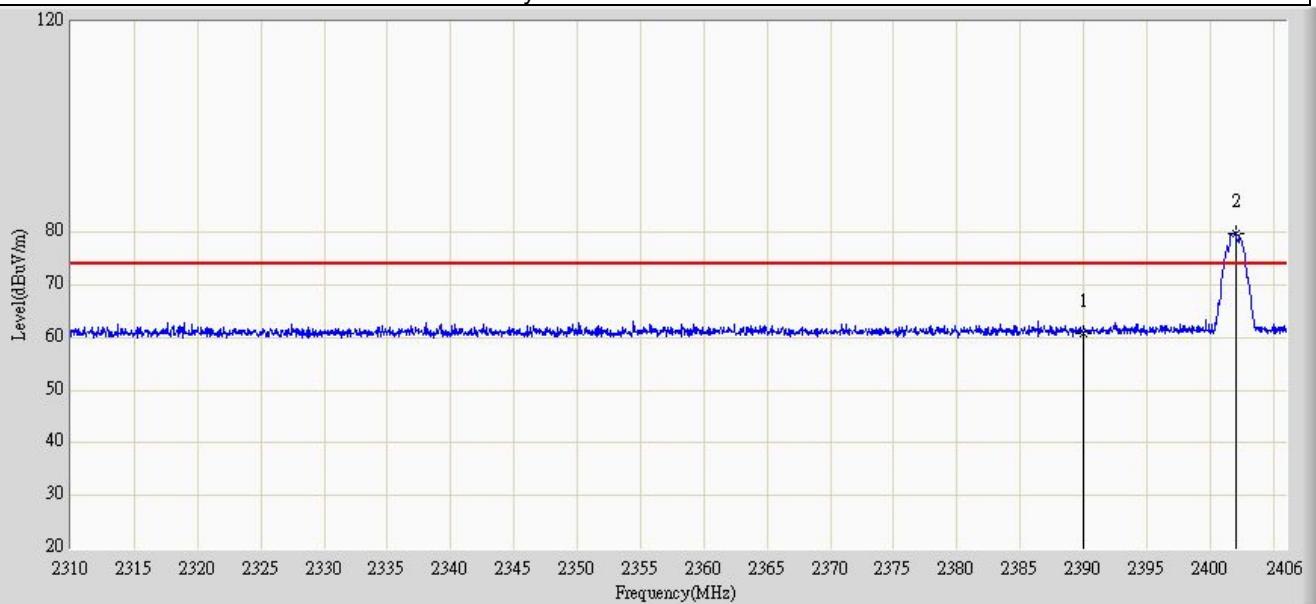


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.881	29.696	-13.119	74.000	31.185	PK
2	*		2402.064	79.833	48.653	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 16:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2402 MHz by DH5	

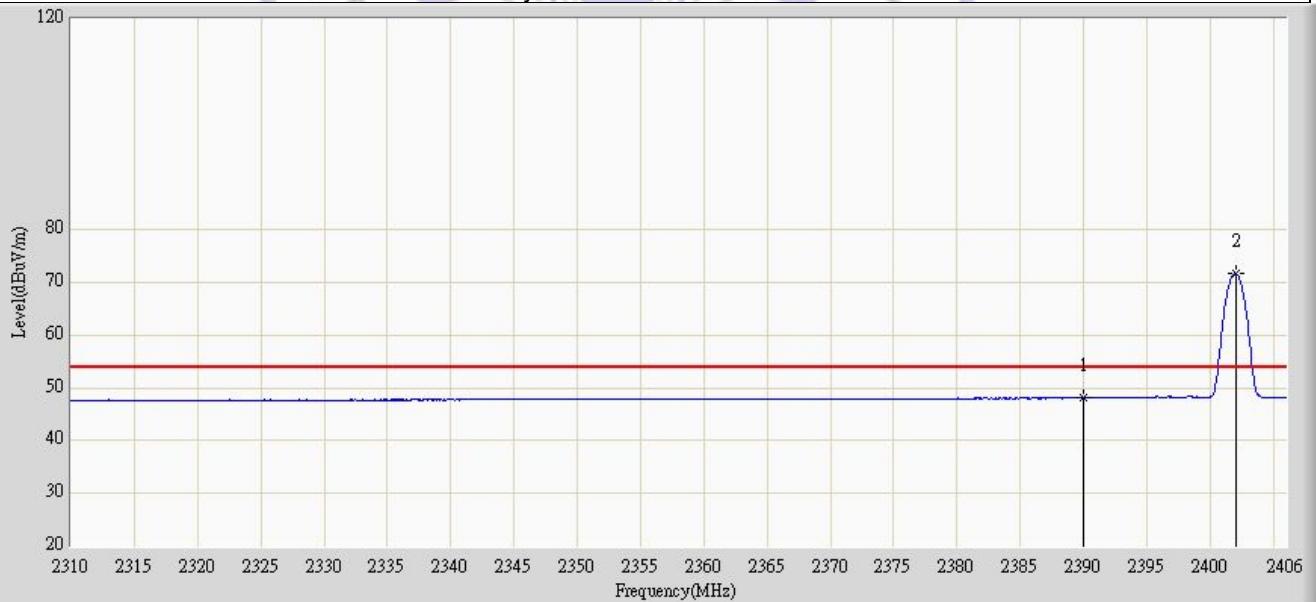


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.034	16.849	-5.966	54.000	31.185	AV
2	*		2402.064	71.623	40.443	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 16:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2402 MHz by DH5	

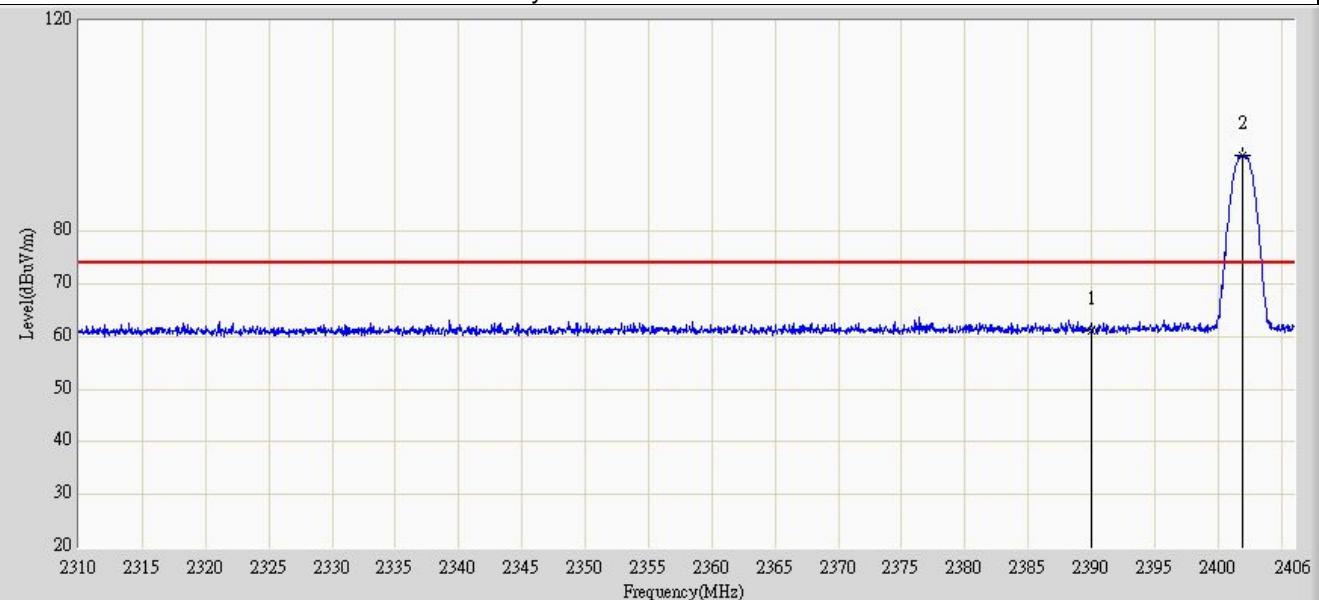


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.099	29.914	-12.901	74.000	31.185	PK
2	*		2401.920	94.520	63.340	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 16:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2402 MHz by DH5	

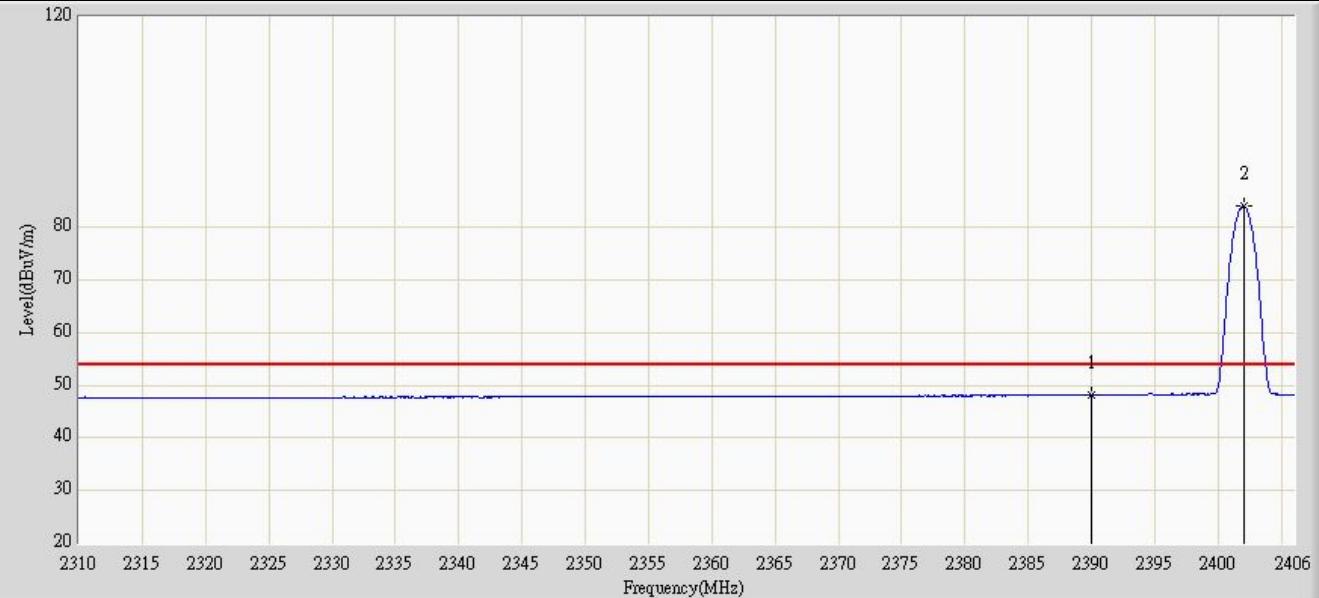


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.086	16.901	-5.914	54.000	31.185	AV
2	*		2402.064	84.008	52.828	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 17:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2480 MHz by DH5	

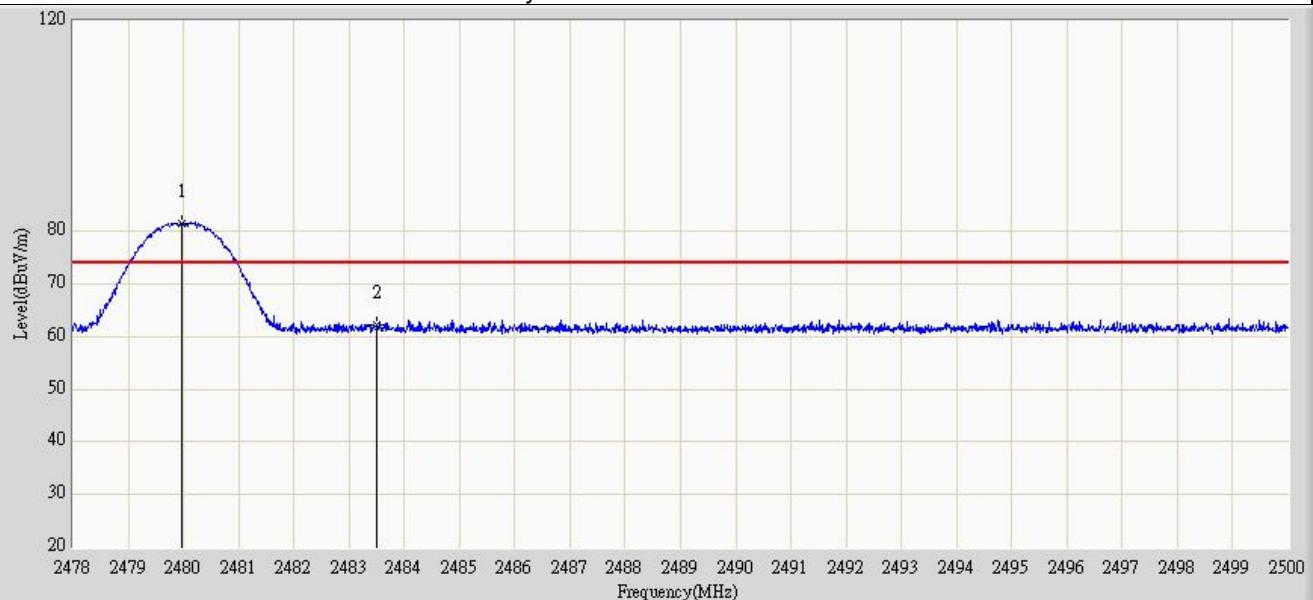


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.969	81.380	50.175	N/A	N/A	31.205	PK
2			2483.500	62.304	31.096	-11.696	74.000	31.208	PK

Site: AC5	Time: 2013/07/22- 17:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2480 MHz by DH5	

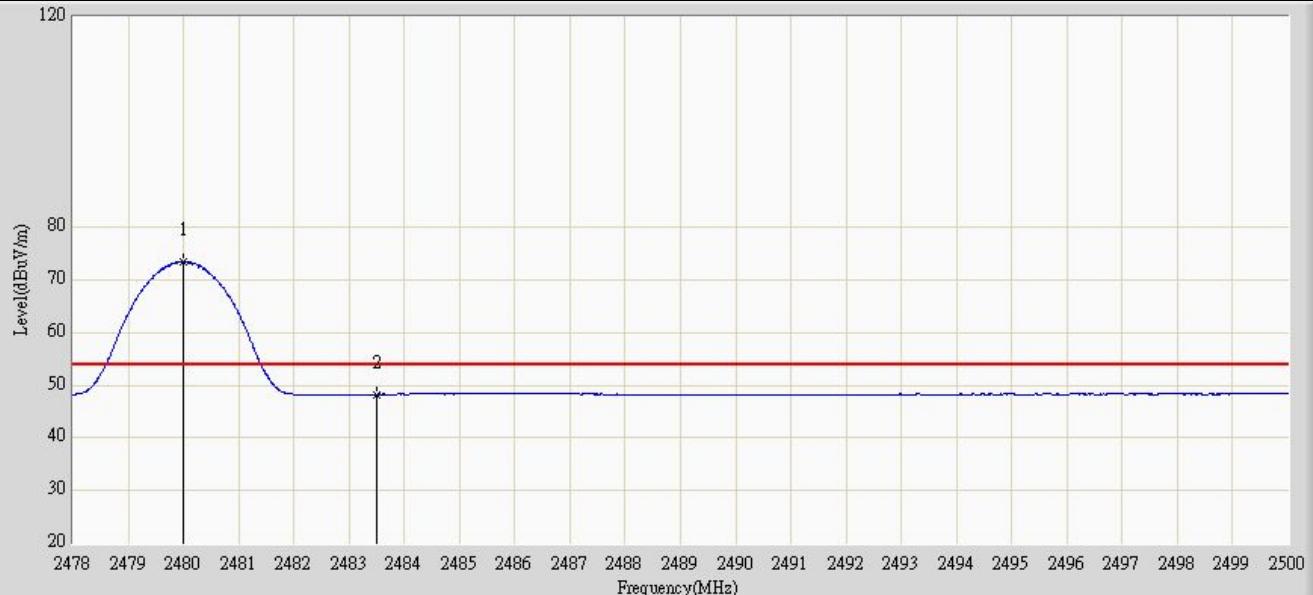


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2480.002	73.497	42.292	N/A	N/A	31.205	AV
2			2483.500	48.268	17.060	-5.732	54.000	31.208	AV

Site: AC5	Time: 2013/07/22 - 17:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2480 MHz by DH5	

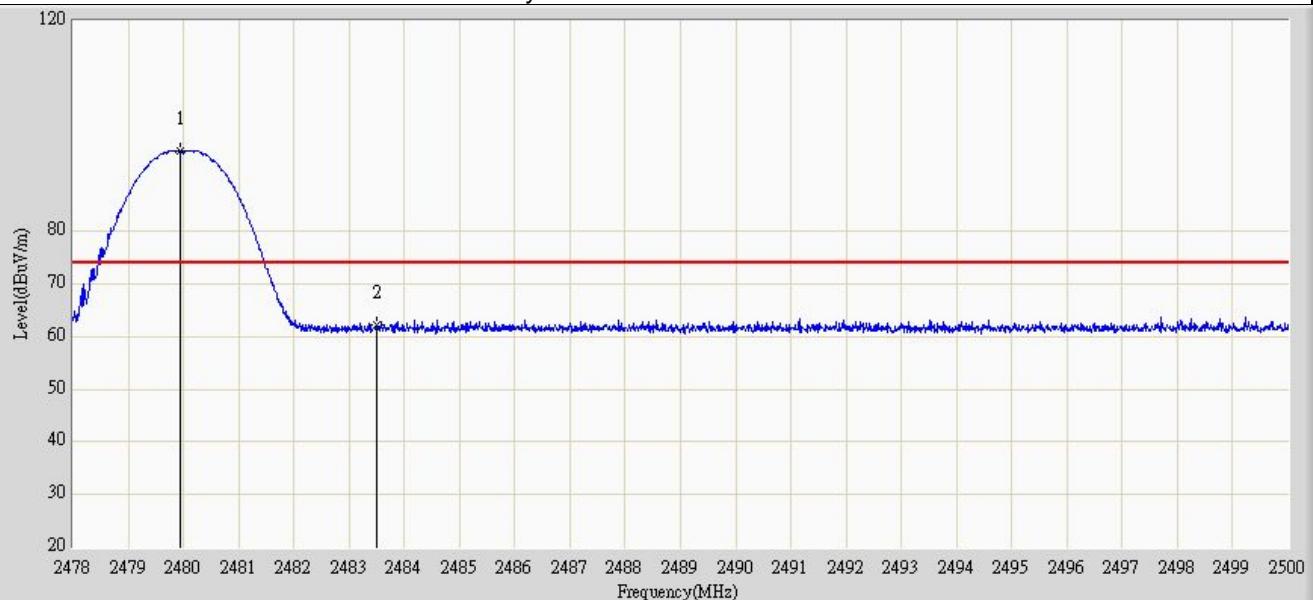


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.947	95.330	64.125	N/A	N/A	31.205	PK
2			2483.500	62.109	30.901	-11.891	74.000	31.208	PK

Site: AC5	Time: 2013/07/22 - 17:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 1: Transmit at channel 2480 MHz by DH5	

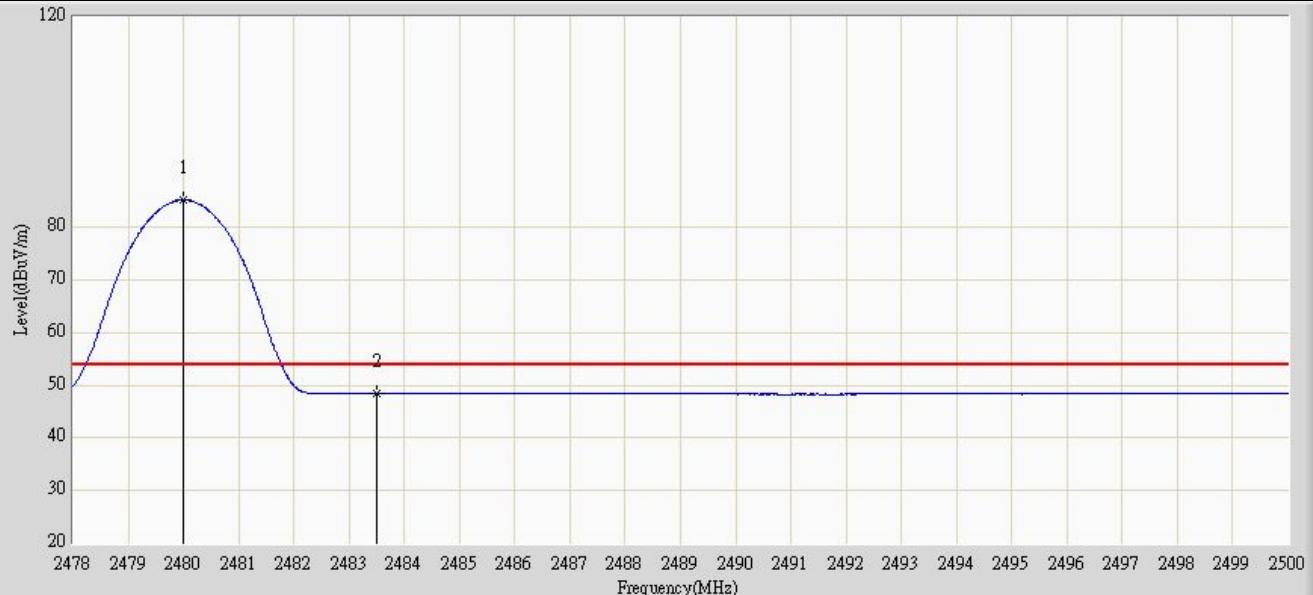


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2480.002	85.187	53.982	N/A	N/A	31.205	AV
2			2483.500	48.381	17.173	-5.619	54.000	31.208	AV

Site: AC5	Time: 2013/07/22 - 17:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2402 MHz by 2DH5	

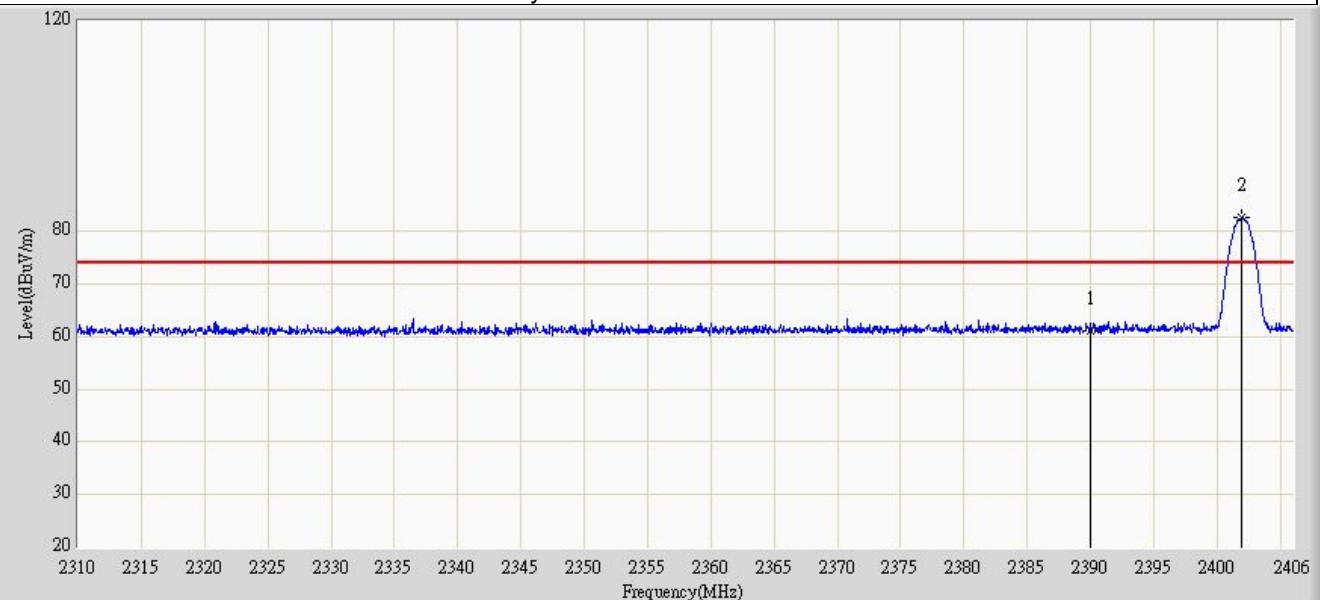


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.104	29.919	-12.896	74.000	31.185	PK
2	*		2401.920	82.557	51.377	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 17:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2402 MHz by 2DH5	

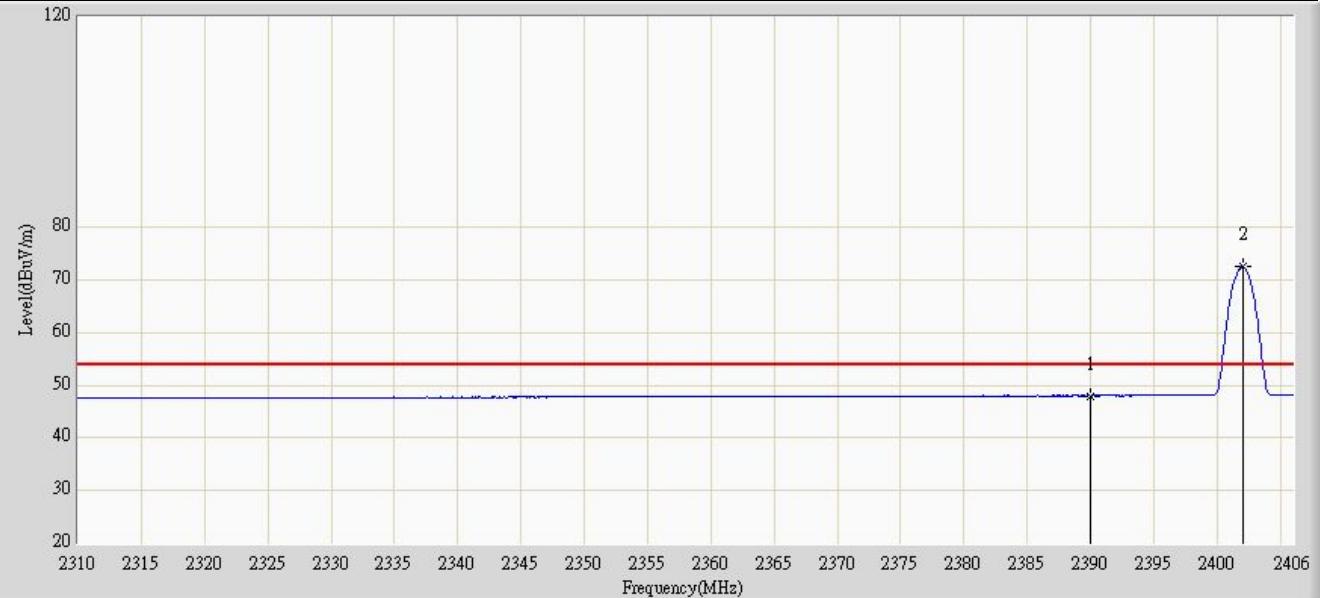


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	47.996	16.811	-6.004	54.000	31.185	AV
2	*		2402.064	72.546	41.366	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 17:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2402 MHz by 2DH5	

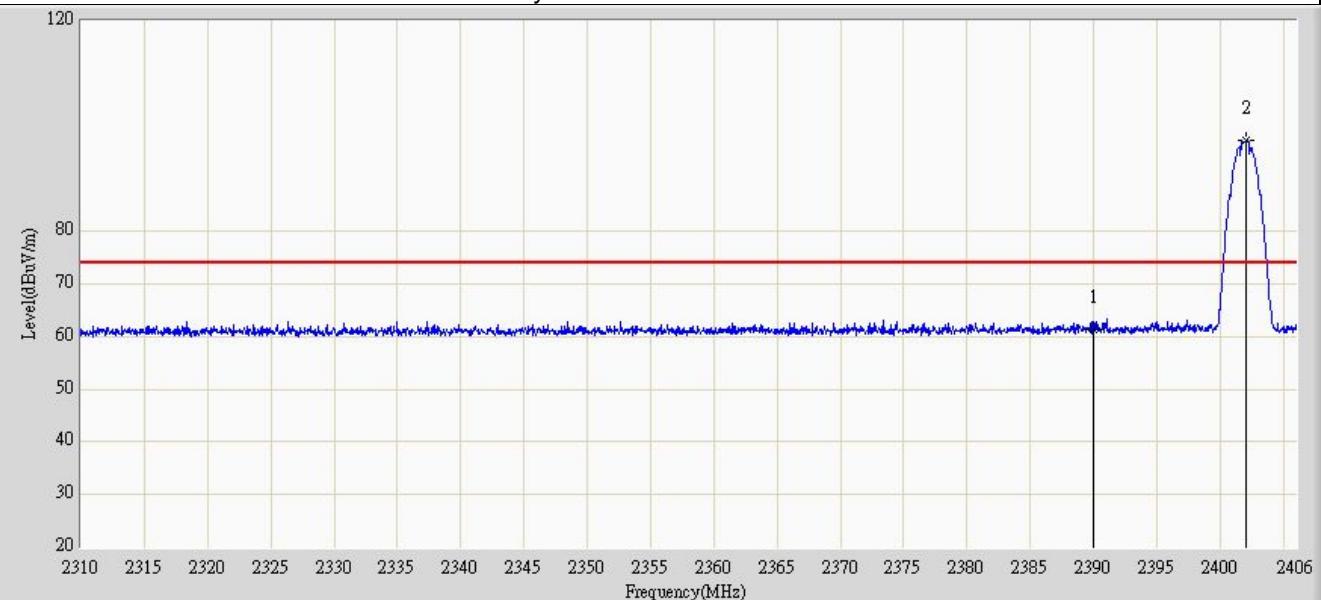


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.352	30.167	-12.648	74.000	31.185	PK
2	*		2402.064	97.269	66.089	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2402 MHz by 2DH5	

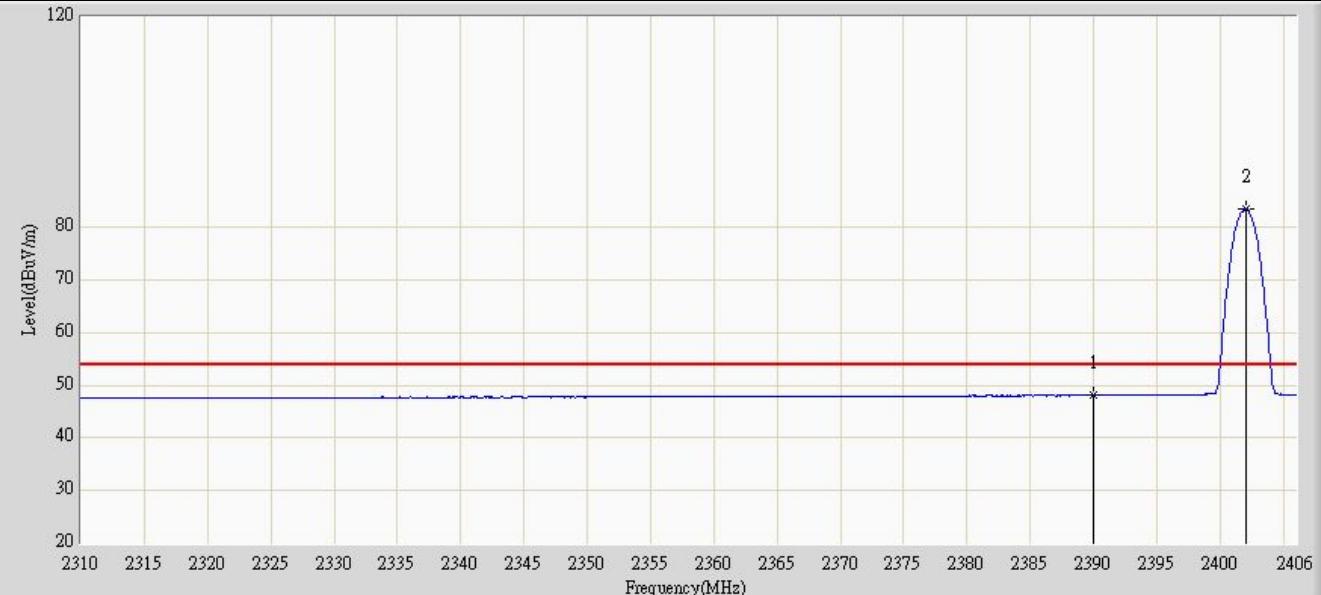


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.095	16.910	-5.905	54.000	31.185	AV
2	*		2402.064	83.609	52.429	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2480 MHz by 2DH5	

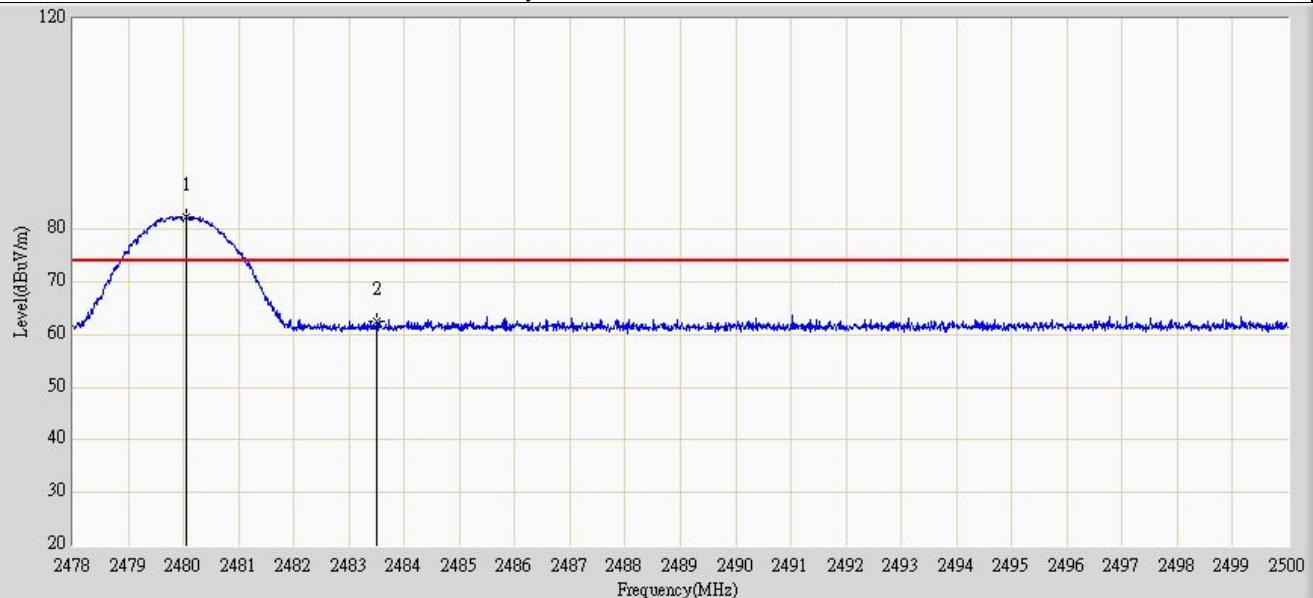


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2480.046	82.267	51.062	N/A	N/A	31.205	PK
2			2483.500	62.638	31.430	-11.362	74.000	31.208	PK

Site: AC5	Time: 2013/07/22 - 17:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2480 MHz by 2DH5	

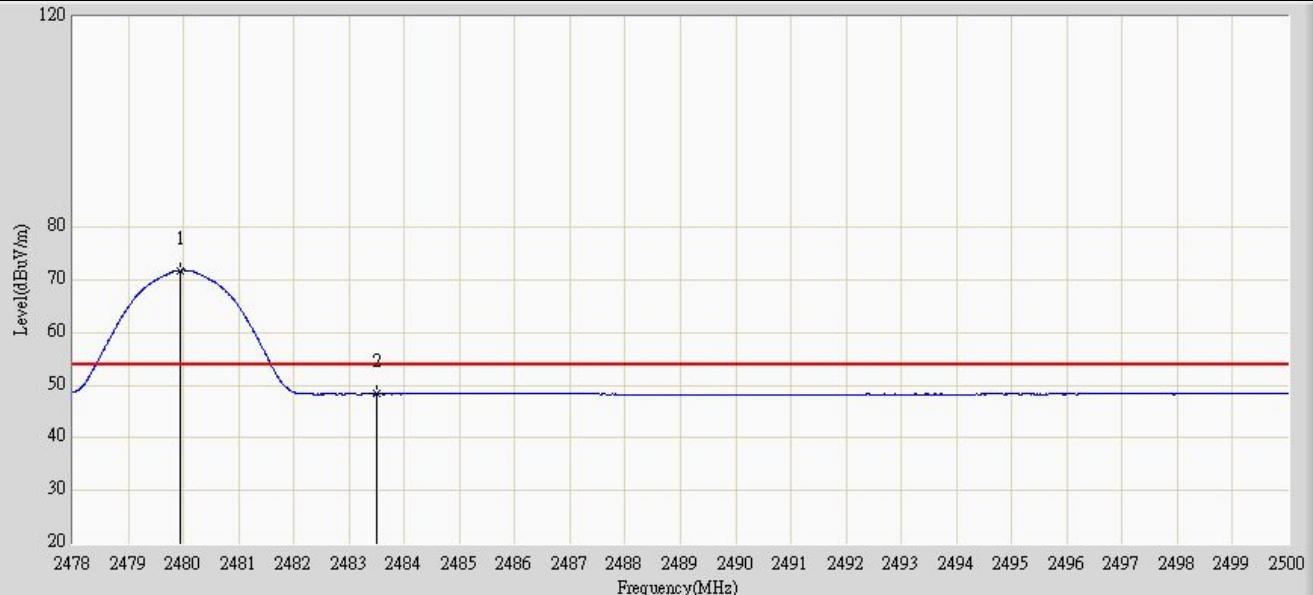


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.936	71.838	40.633	N/A	N/A	31.205	AV
2			2483.500	48.333	17.125	-5.667	54.000	31.208	AV

Site: AC5	Time: 2013/07/22 - 17:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2480 MHz by 2DH5	

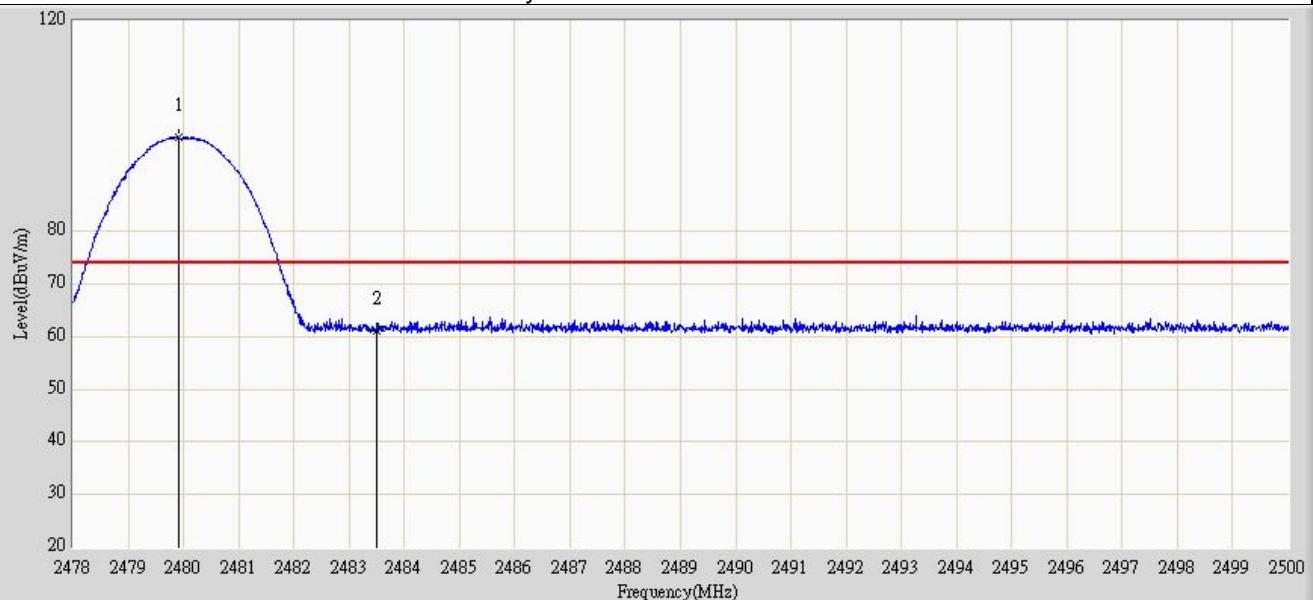


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.903	97.824	66.619	N/A	N/A	31.205	PK
2			2483.500	61.069	29.861	-12.931	74.000	31.208	PK

Site: AC5	Time: 2013/07/22 - 17:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 2: Transmit at channel 2480 MHz by 2DH5	

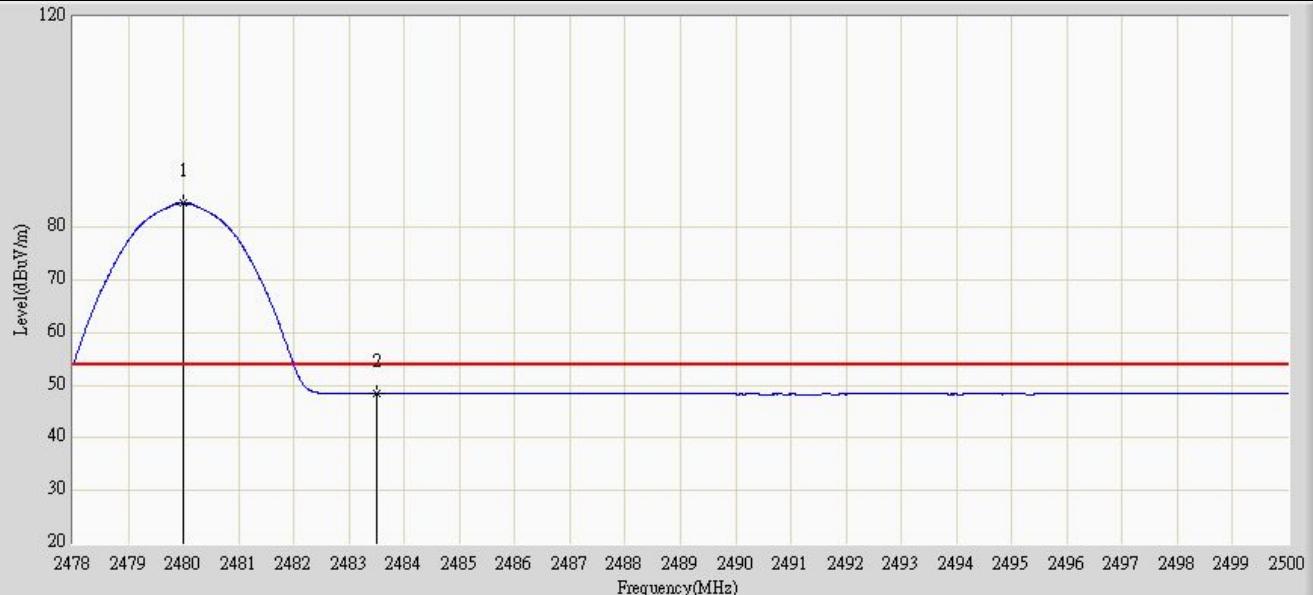


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2480.002	84.548	53.343	N/A	N/A	31.205	AV
2			2483.500	48.405	17.197	-5.595	54.000	31.208	AV

Site: AC5	Time: 2013/07/22 - 17:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2402 MHz by 3DH5	

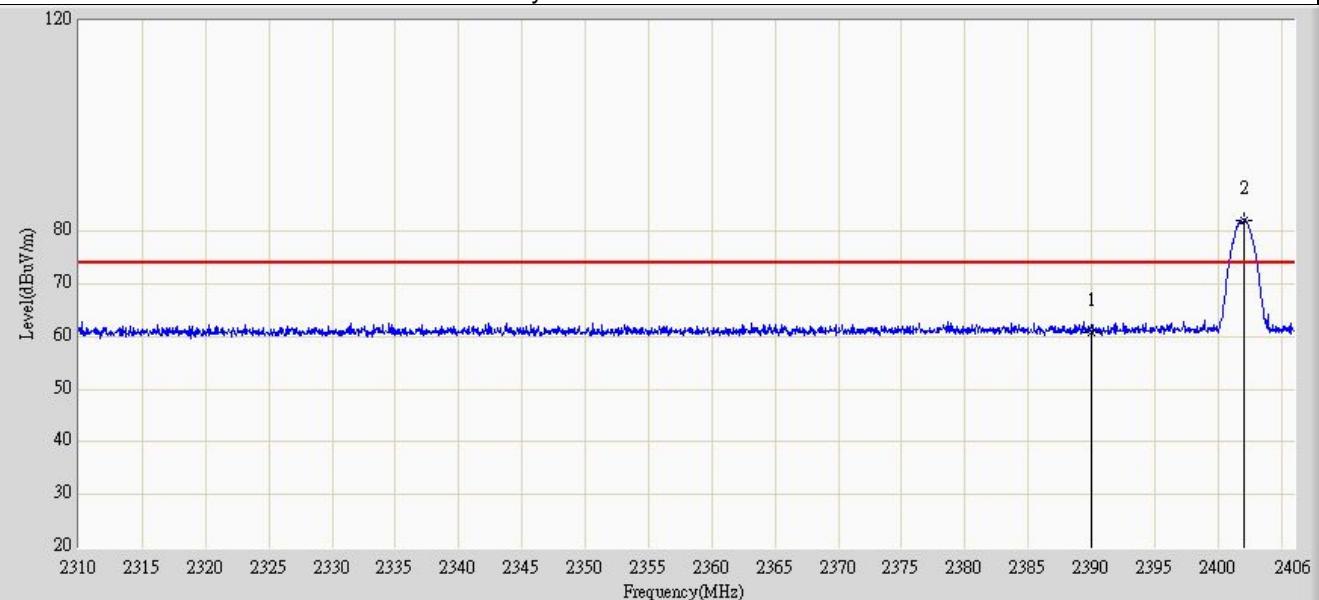


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	60.786	29.601	-13.214	74.000	31.185	PK
2	*		2402.016	81.993	50.813	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 17:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2402 MHz by 3DH5	

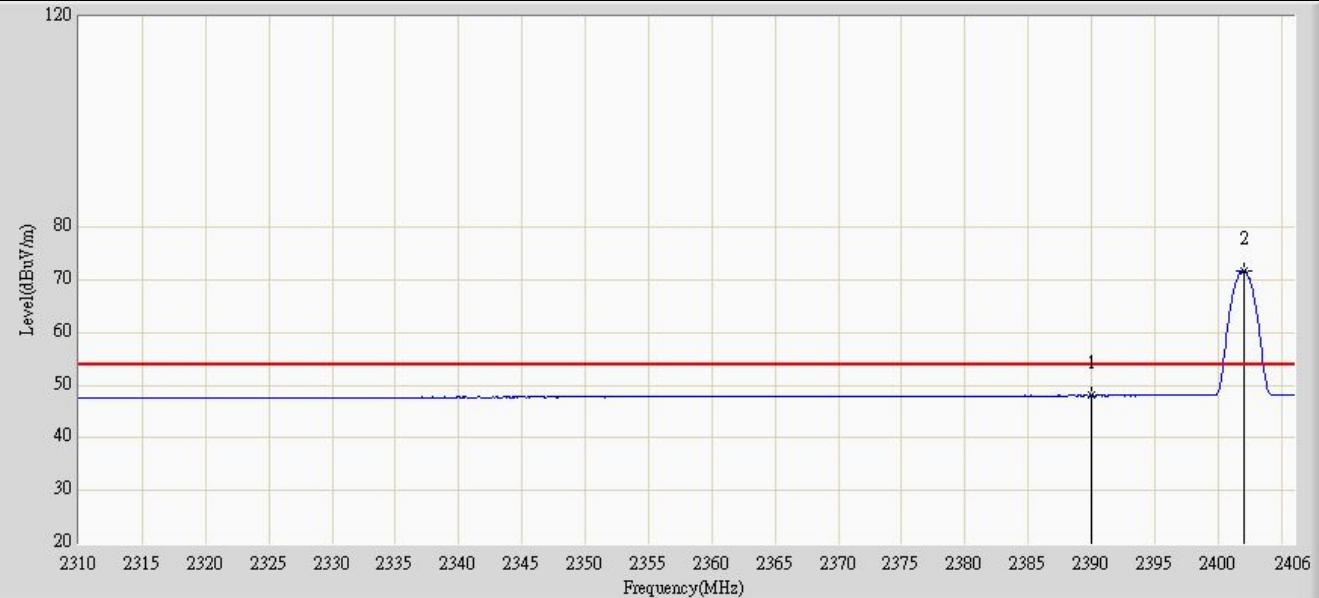


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.030	16.845	-5.970	54.000	31.185	AV
2	*		2402.064	71.681	40.501	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 17:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2402 MHz by 3DH5	

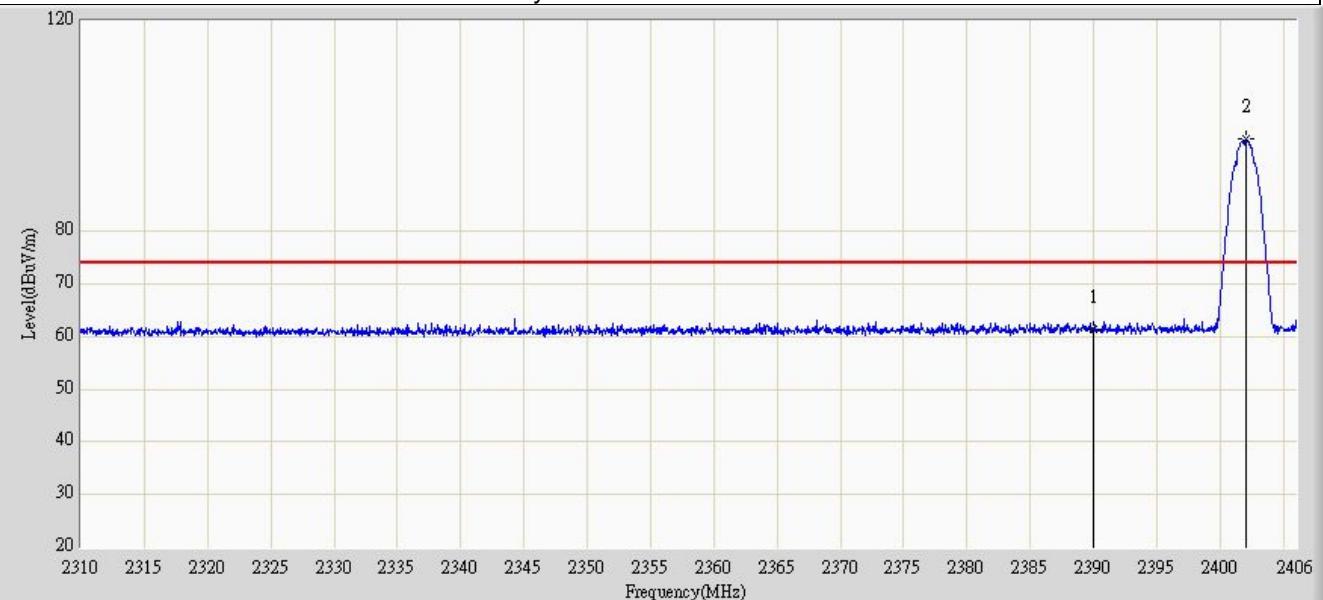


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	61.427	30.242	-12.573	74.000	31.185	PK
2	*		2402.064	97.461	66.281	N/A	N/A	31.179	PK

Site: AC5	Time: 2013/07/22 - 17:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2402 MHz by 3DH5	

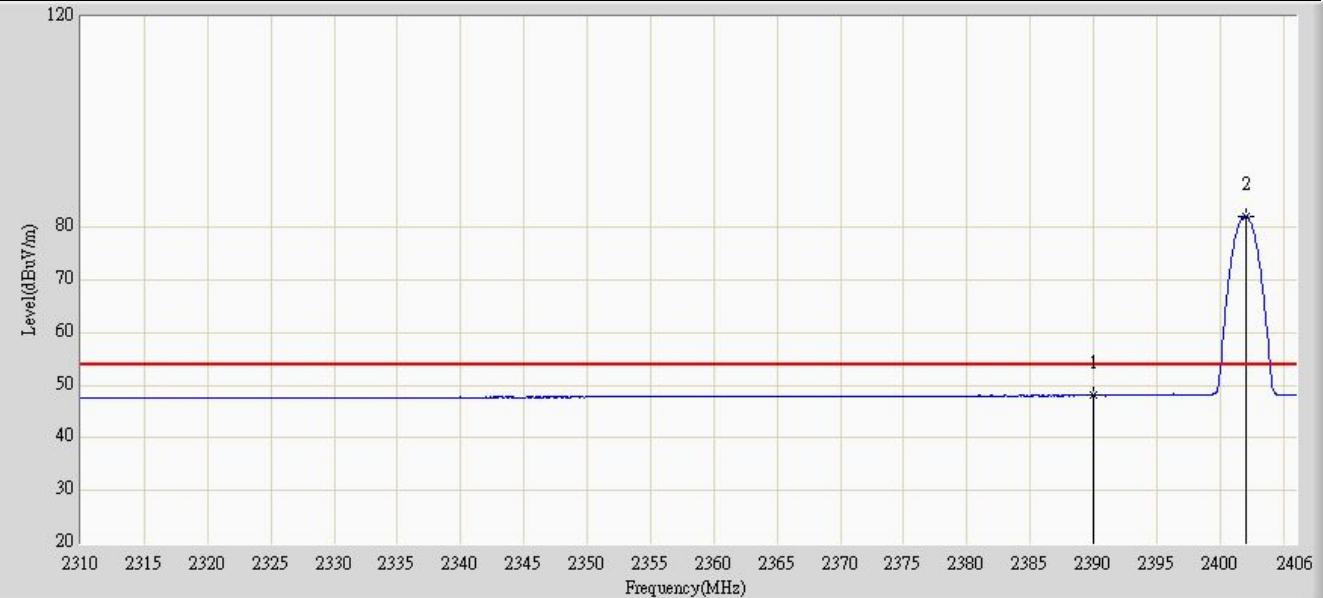


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			2390.000	48.044	16.859	-5.956	54.000	31.185	AV
2	*		2402.064	82.116	50.936	N/A	N/A	31.179	AV

Site: AC5	Time: 2013/07/22 - 17:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2480 MHz by 3DH5	

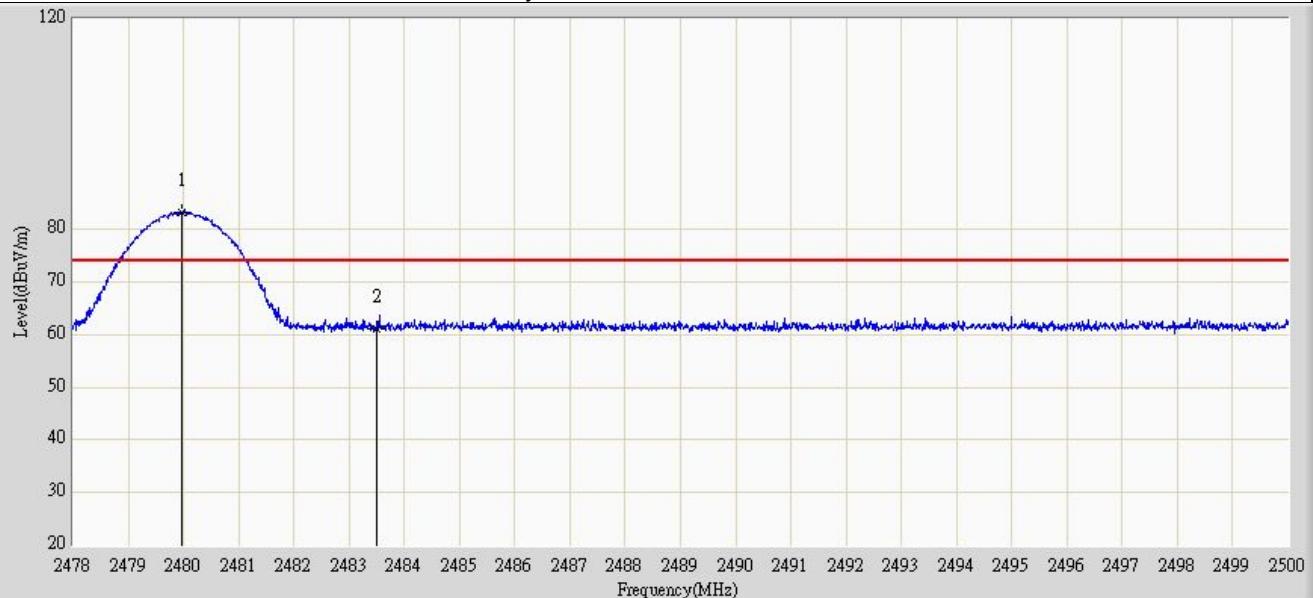


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.969	83.203	51.998	N/A	N/A	31.205	PK
2			2483.500	61.024	29.816	-12.976	74.000	31.208	PK

Site: AC5	Time: 2013/07/22 - 17:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2480 MHz by 3DH5	

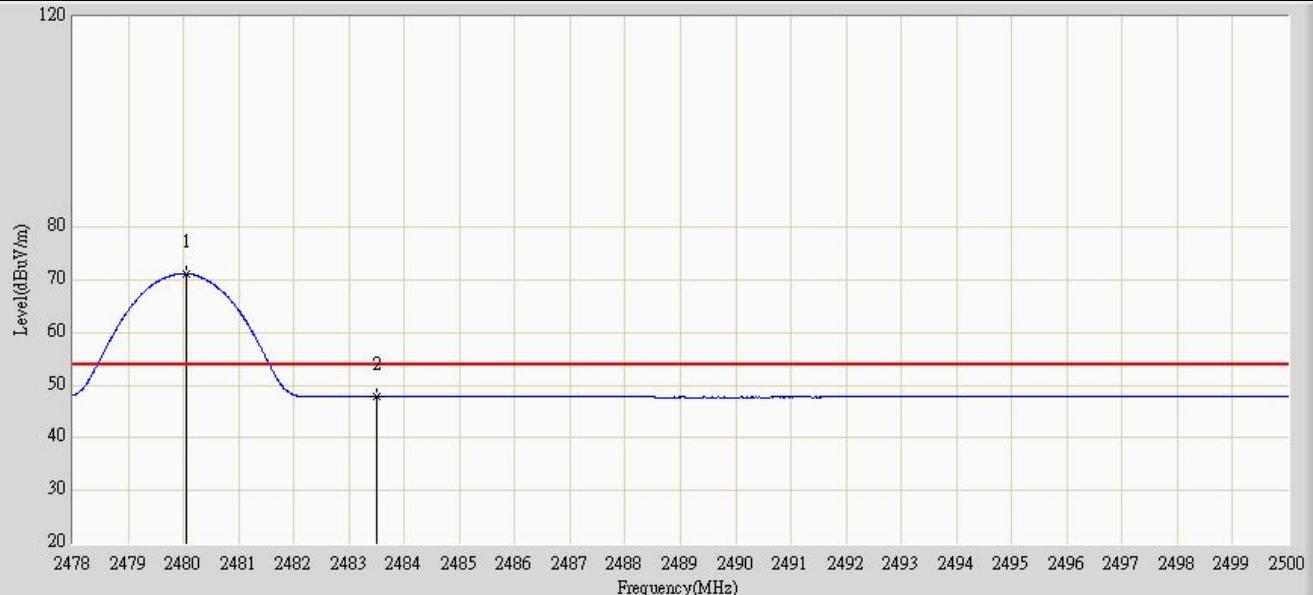


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2480.046	71.173	39.968	N/A	N/A	31.205	AV
2			2483.500	47.819	16.611	-6.181	54.000	31.208	AV

Site: AC5	Time: 2013/07/22 - 17:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2480 MHz by 3DH5	

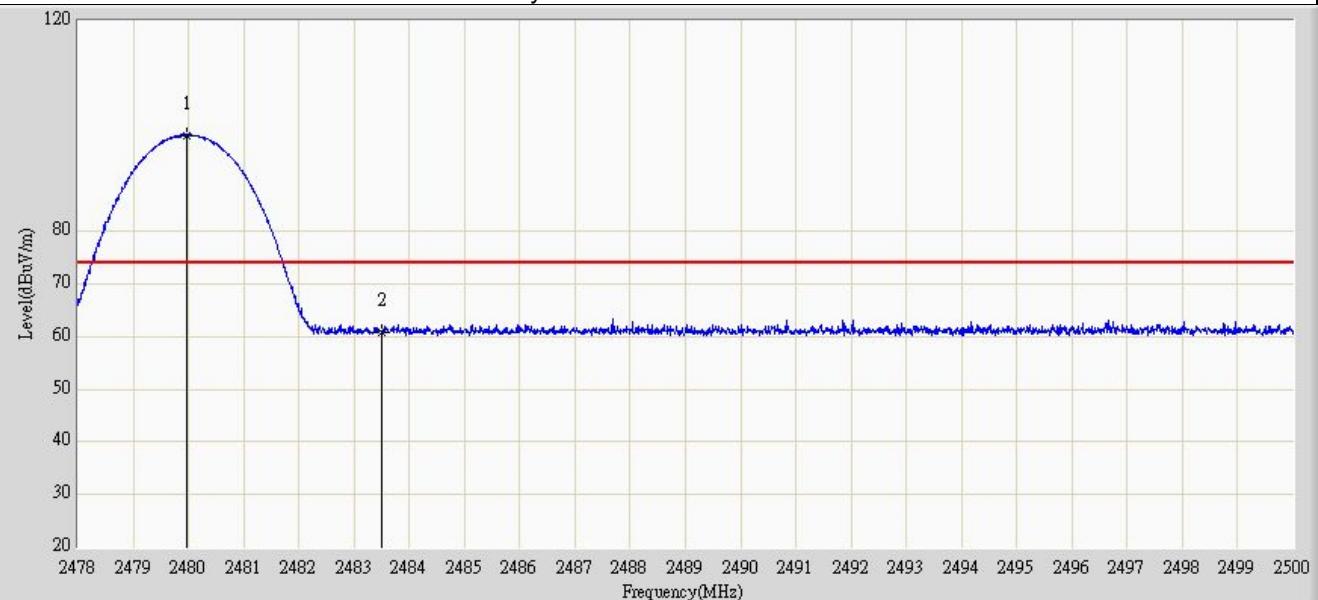

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.969	98.267	67.062	N/A	N/A	31.205	PK
2			2483.500	60.741	29.533	-13.259	74.000	31.208	PK


Site: AC5	Time: 2013/07/22 - 17:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: Smart Phone	Power: DC 3.7V
Note: Mode 3: Transmit at channel 2480 MHz by 3DH5	

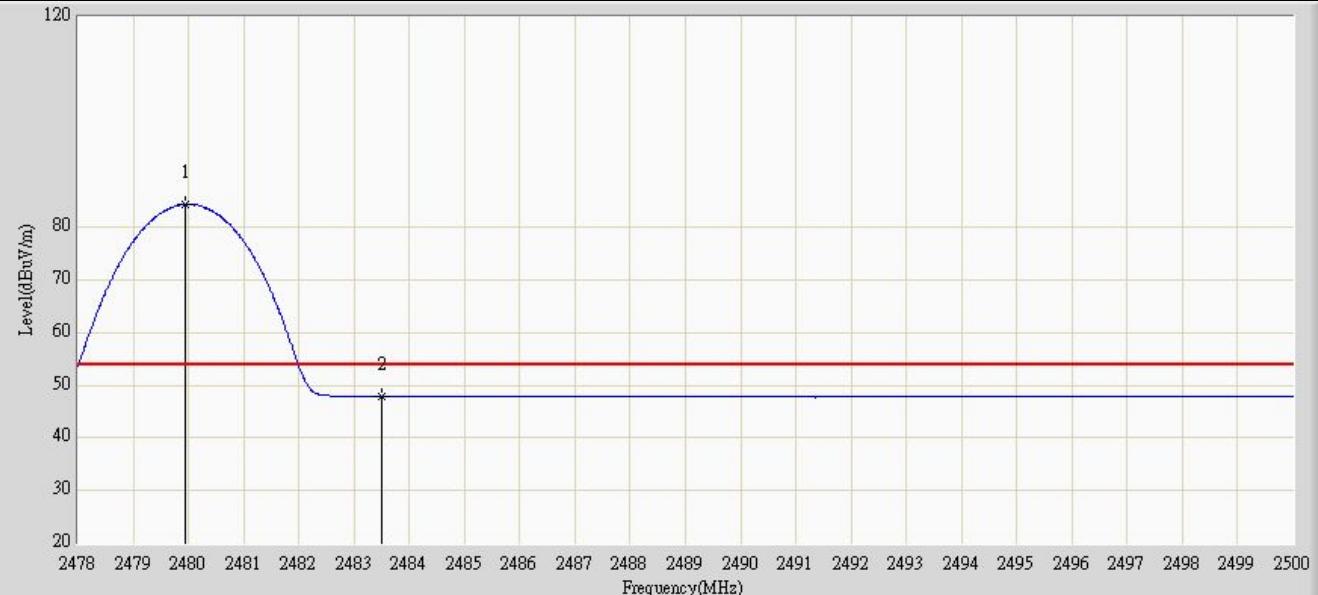

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1	*		2479.936	84.355	53.150	N/A	N/A	31.205	AV
2			2483.500	47.918	16.710	-6.082	54.000	31.208	AV

4.6. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

LIMIT


According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

TEST RESULTS


Product	:	Smart Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)

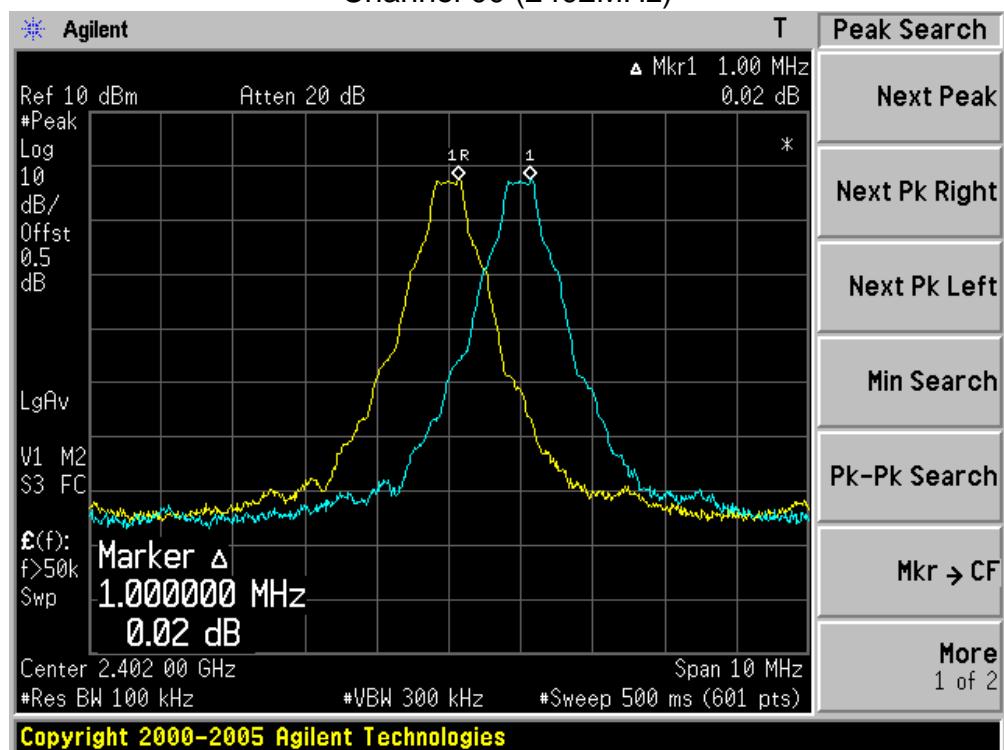

Channel 39 (2441MHz)

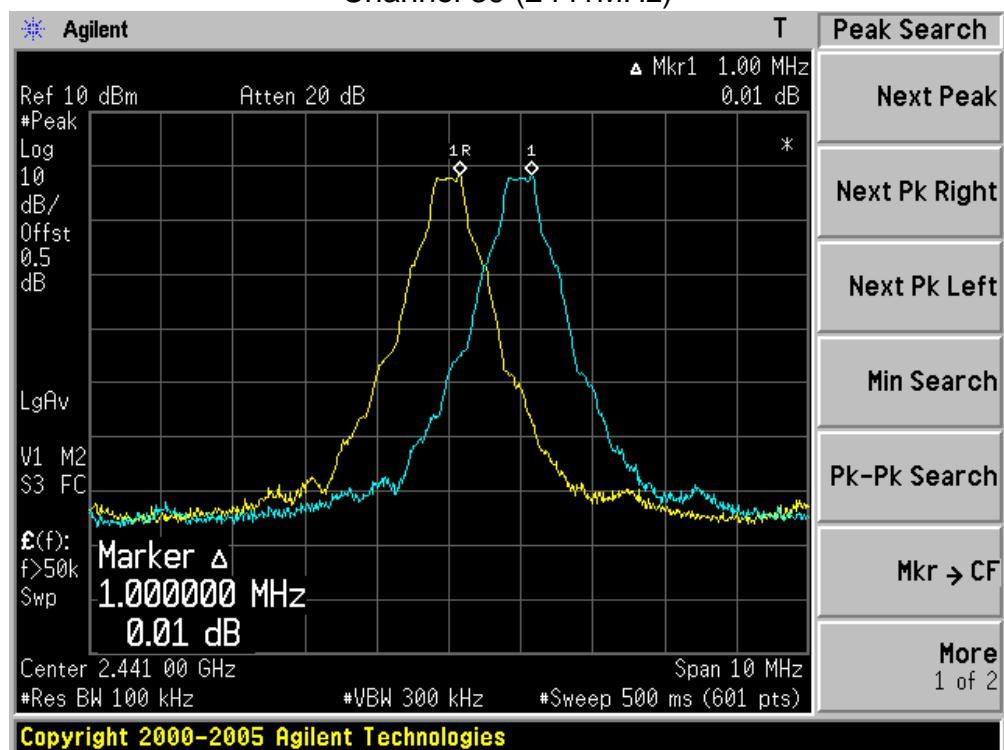


Channel 78 (2480MHz)

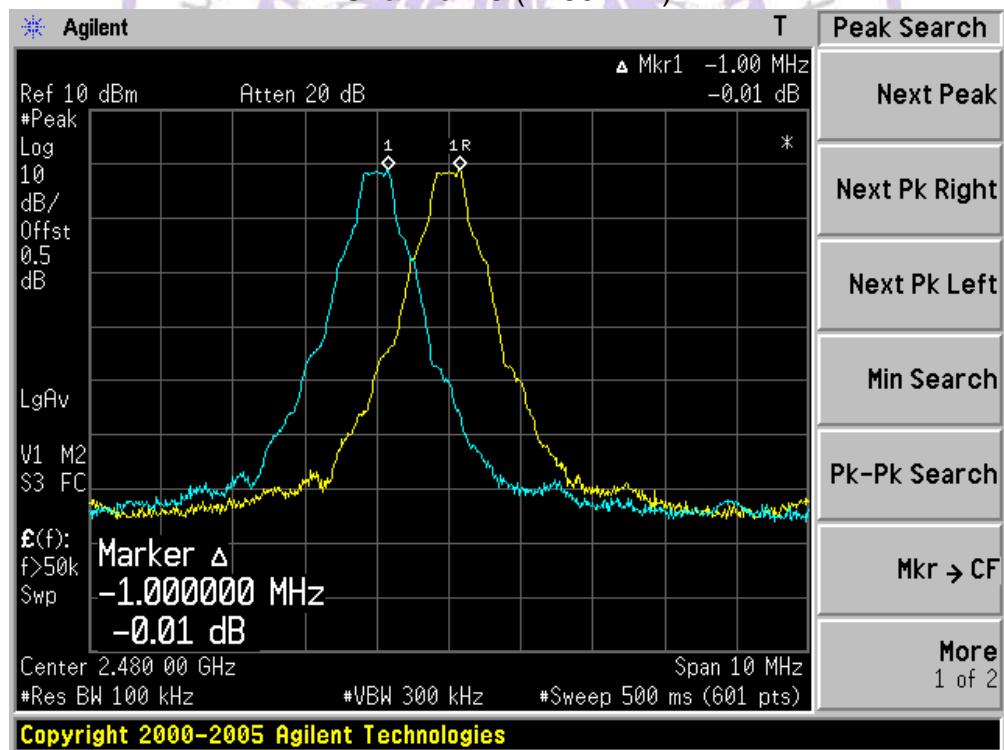


Product	:	Smart Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)


Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass

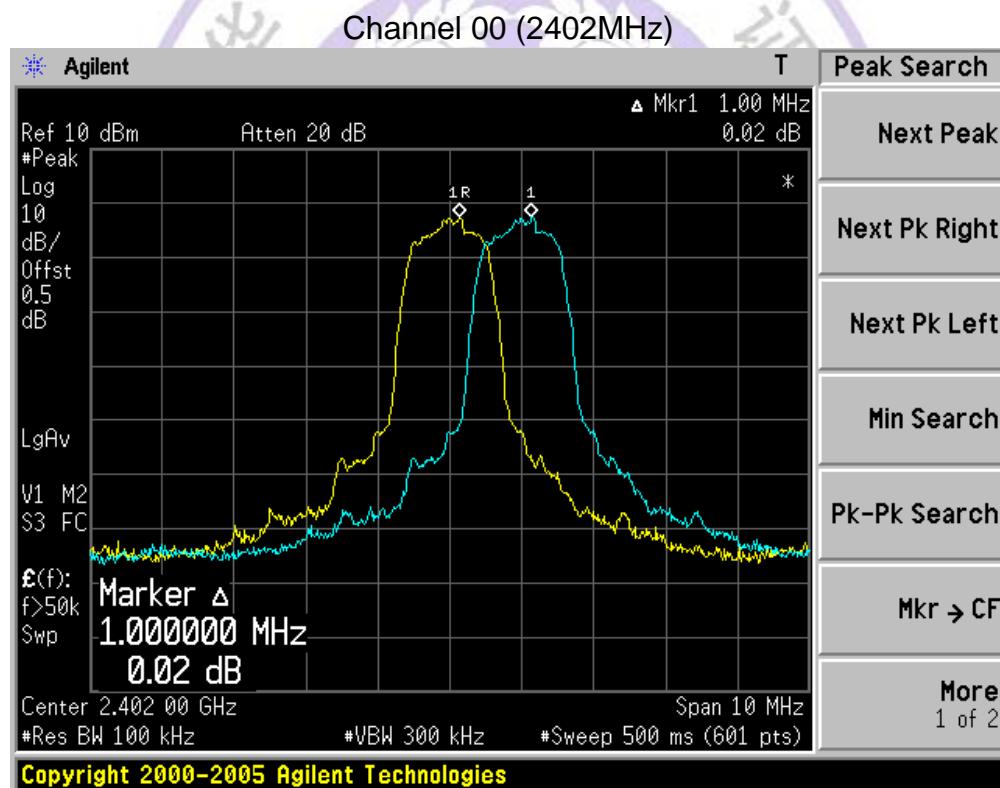

Channel 39 (2441MHz)

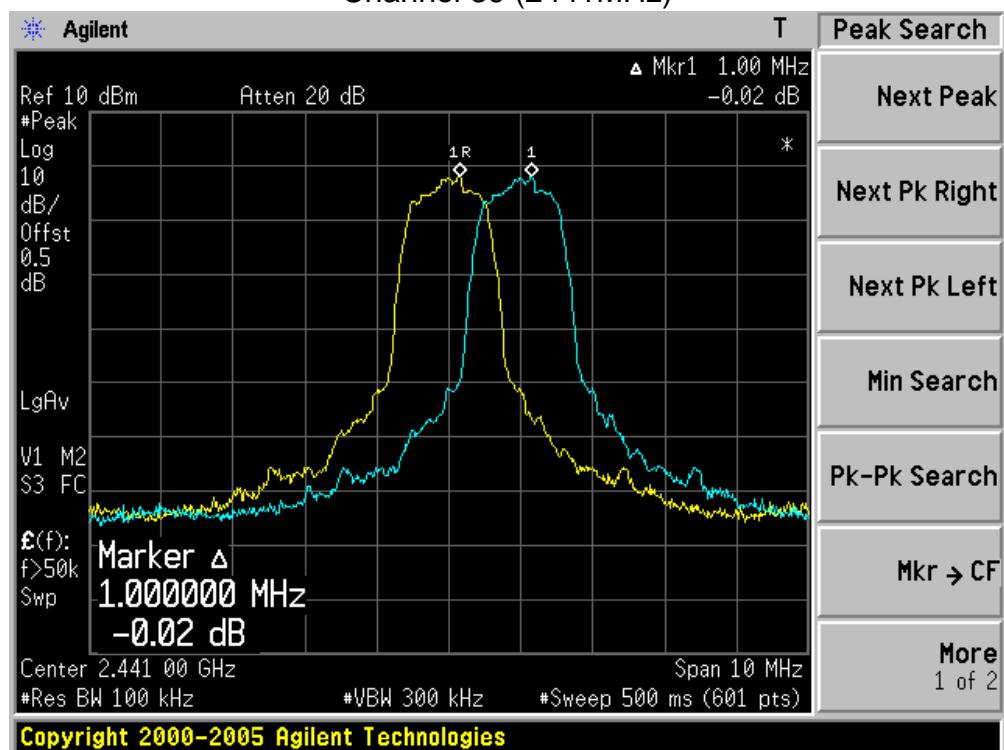


Channel 78 (2480MHz)

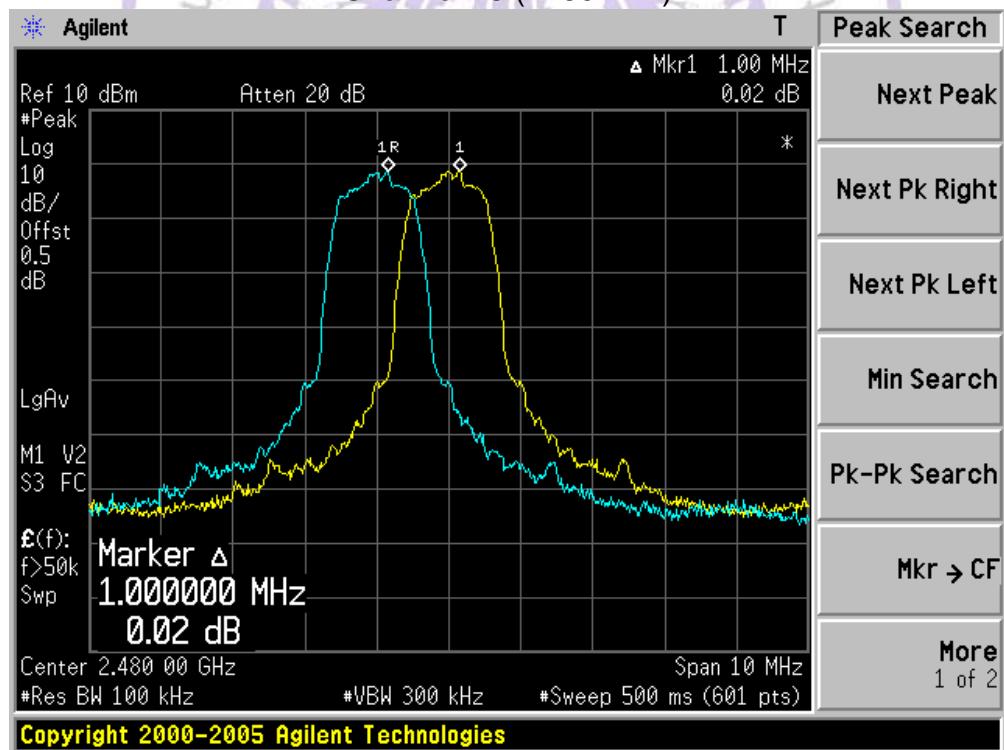


Product	:	Smart Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)


Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass

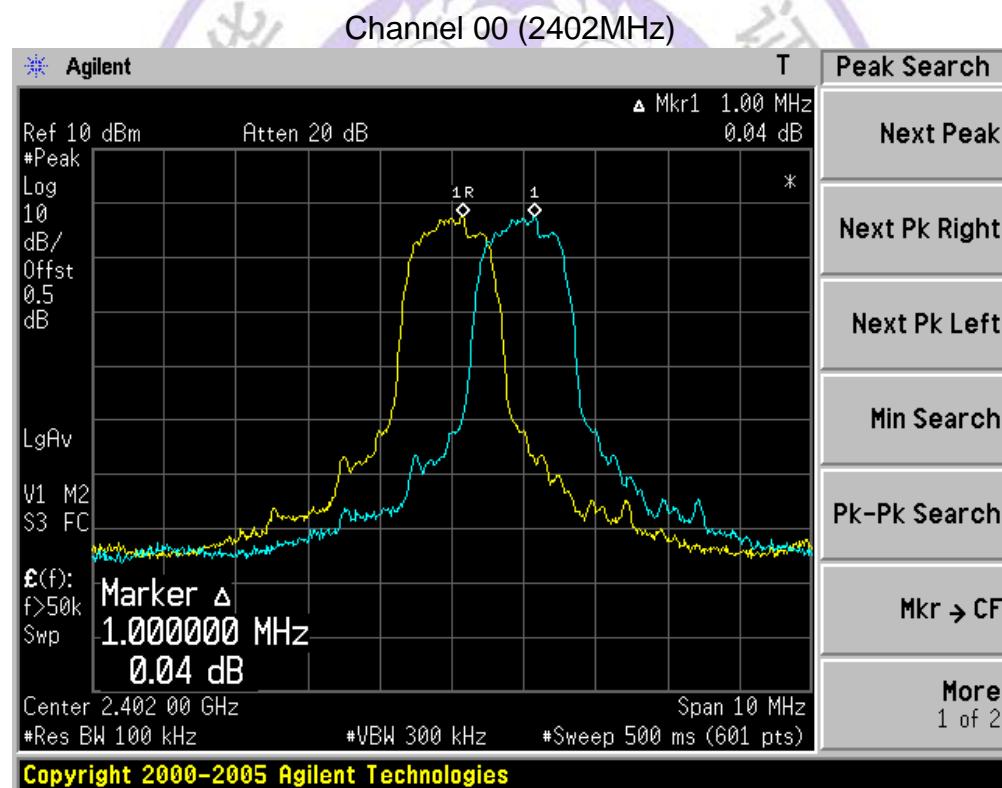

Channel 39 (2441MHz)

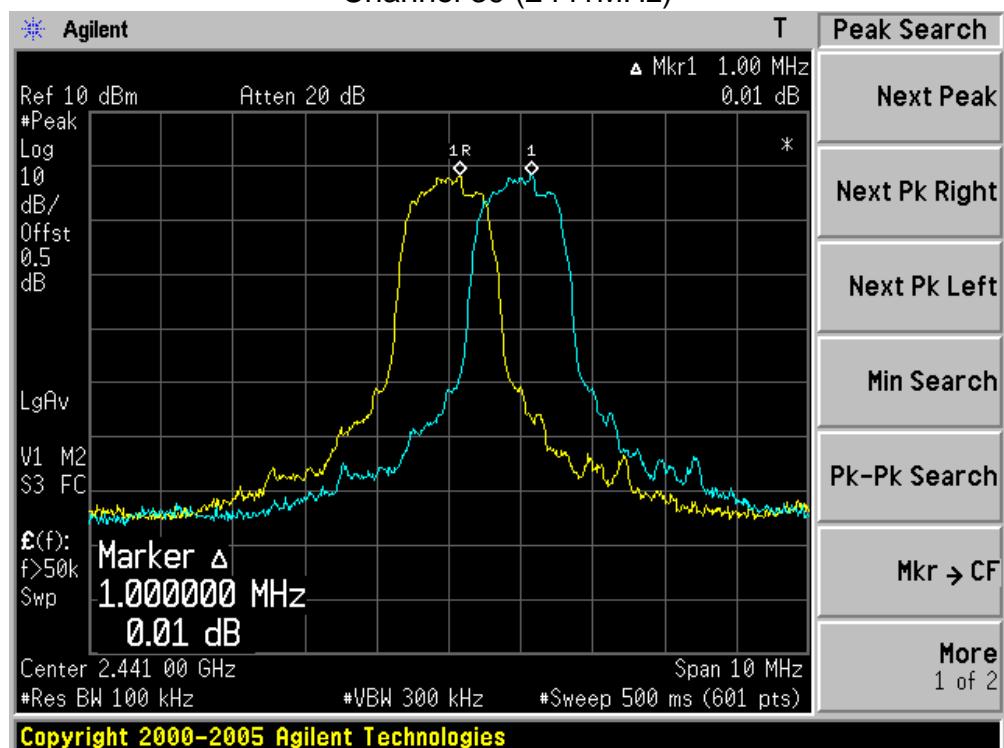

Channel 78 (2480MHz)

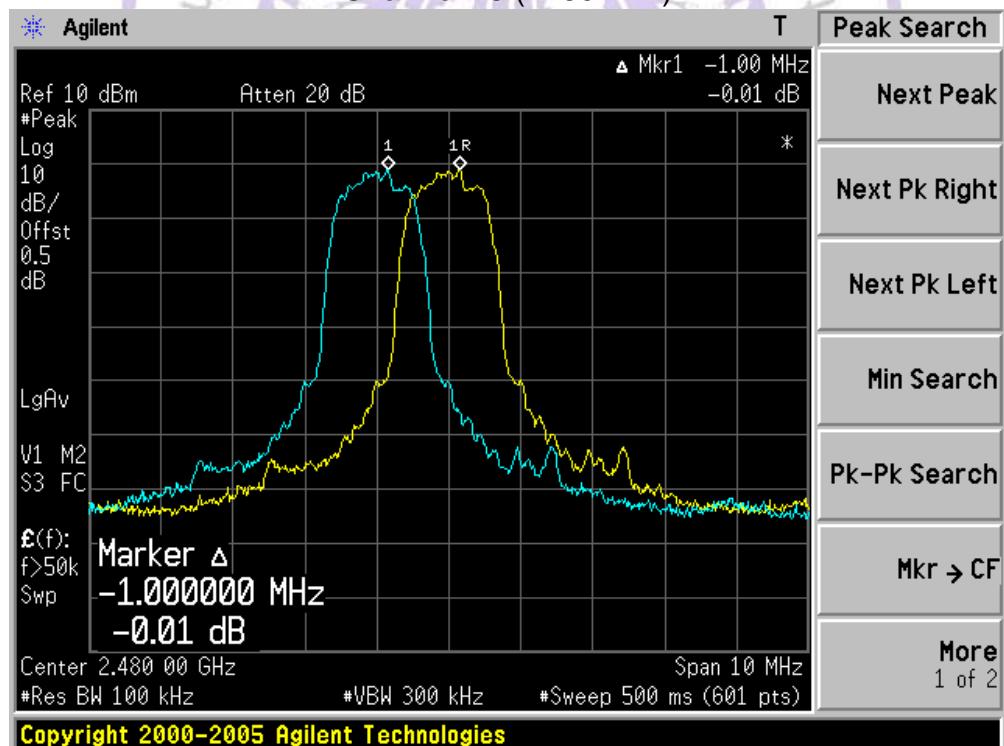

4.7. Number of hopping frequency

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to bread the span up to sections, in order to clearly show all of the hopping frequencies.

LIMIT


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

TEST RESULTS


Product	:	Smart Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

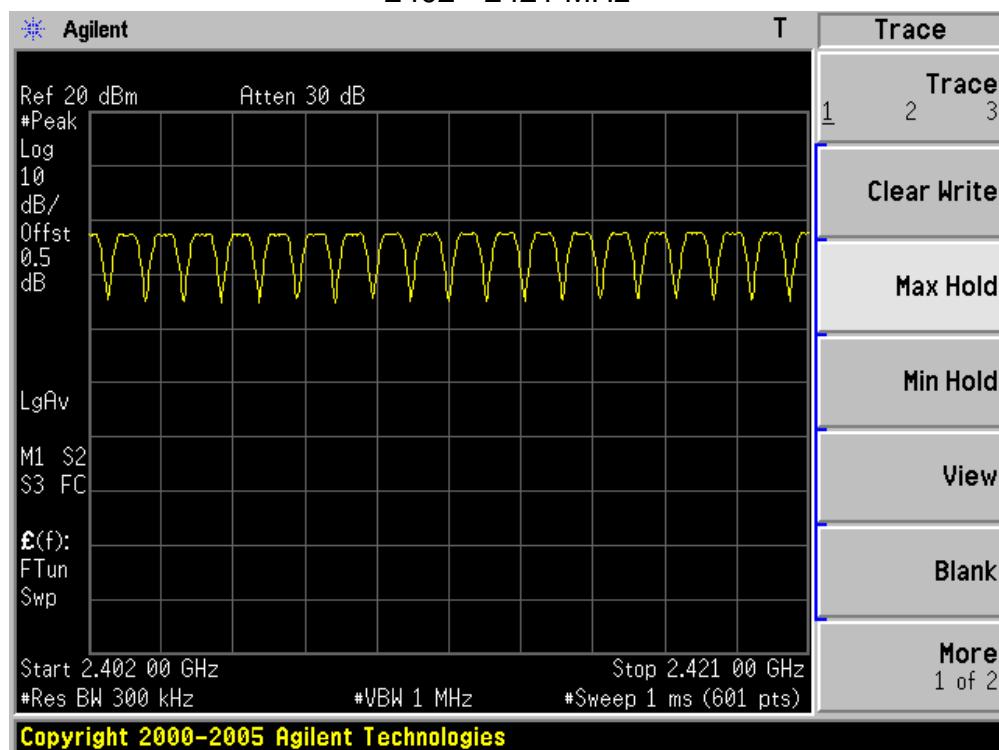


2422 - 2441 MHz

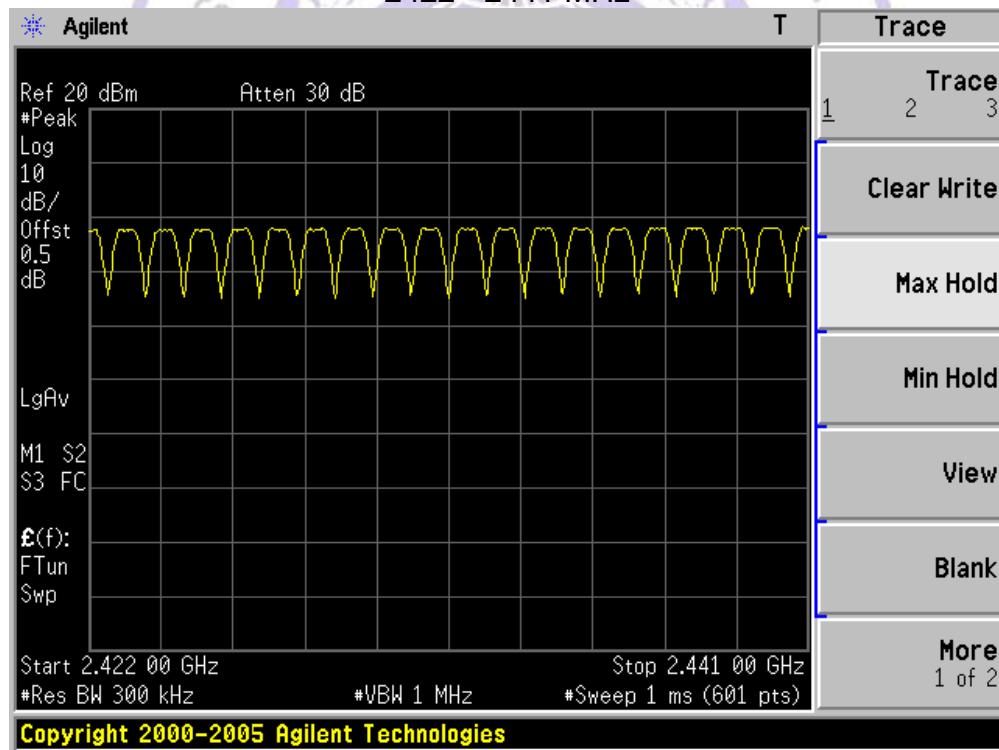

2442 - 2461 MHz

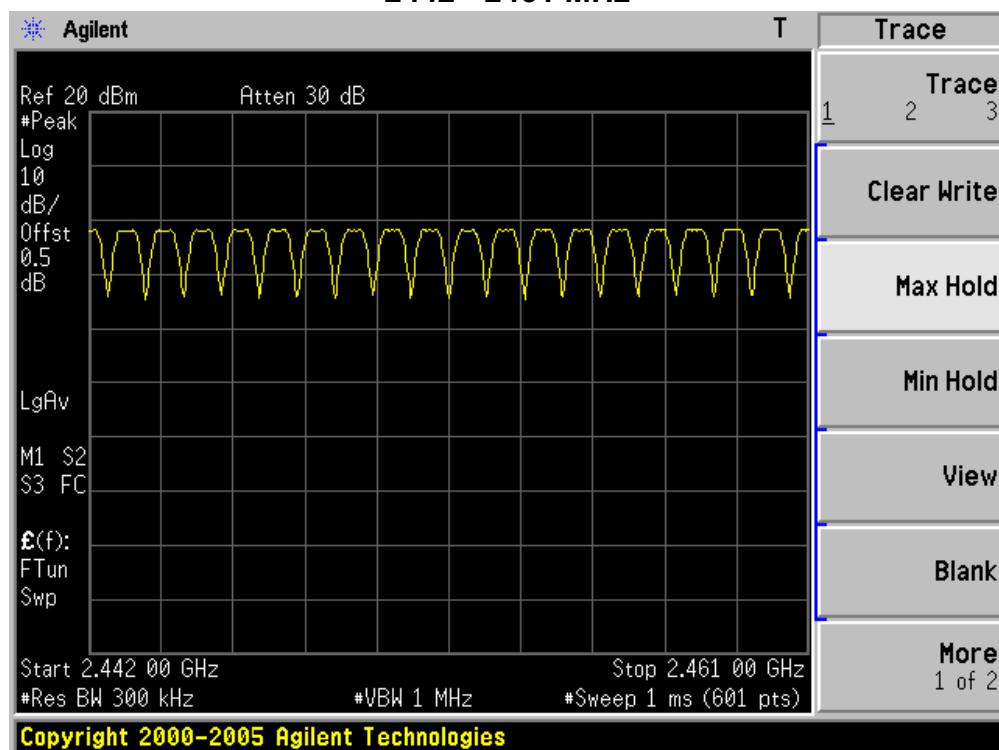


2462 - 2480 MHz

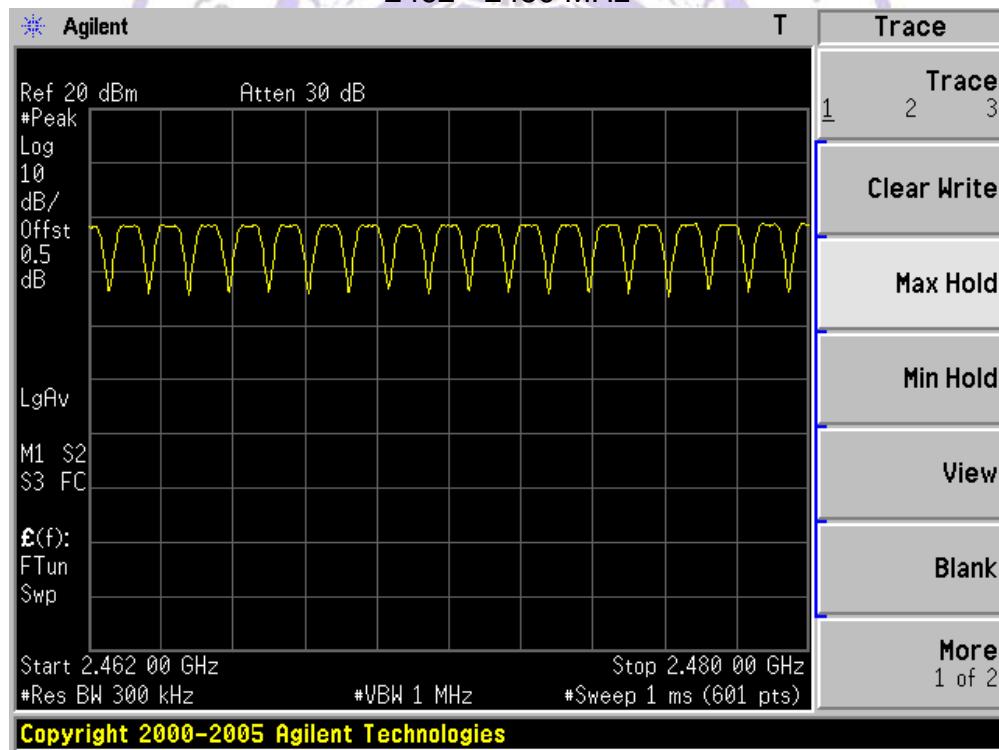


Product	:	Smart Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

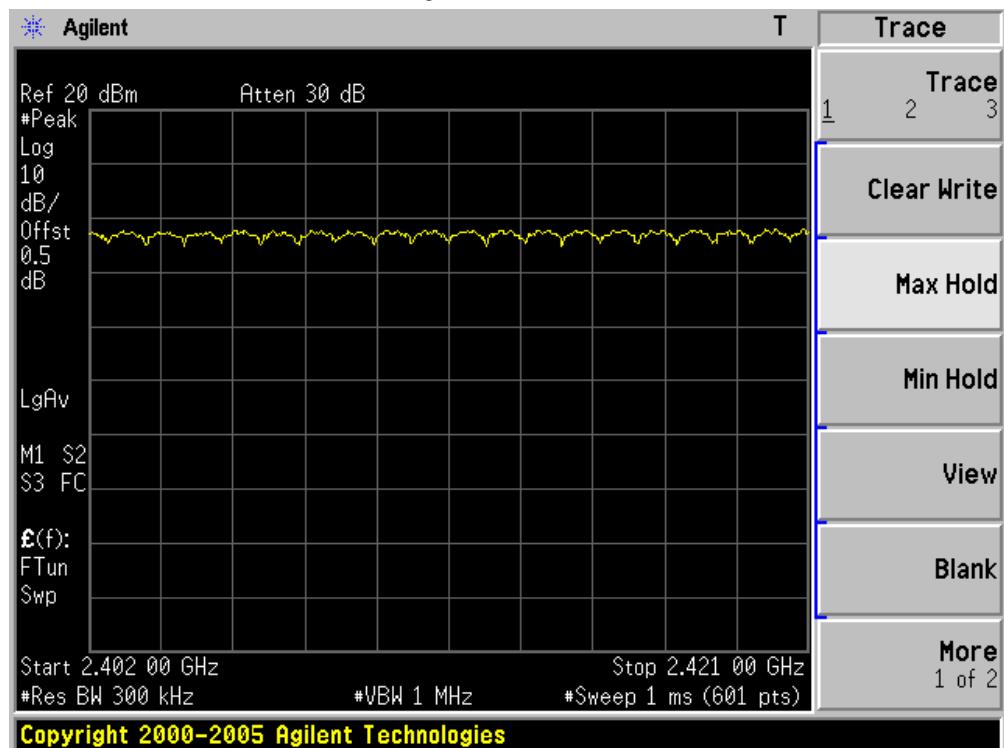


2422 - 2441 MHz

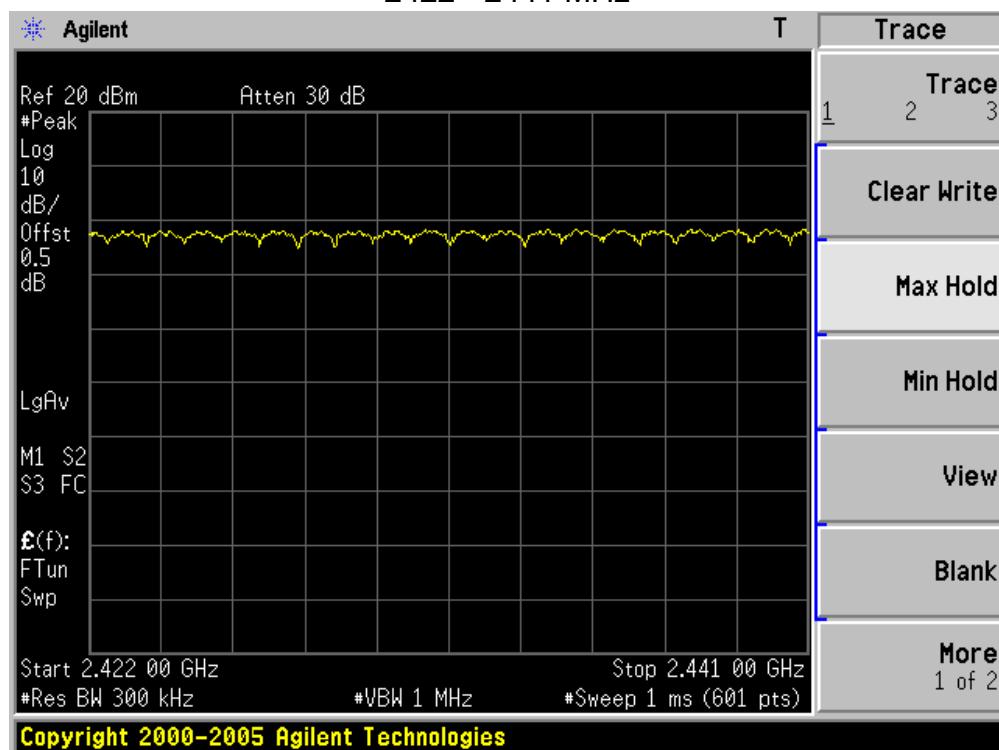

2442 - 2461 MHz

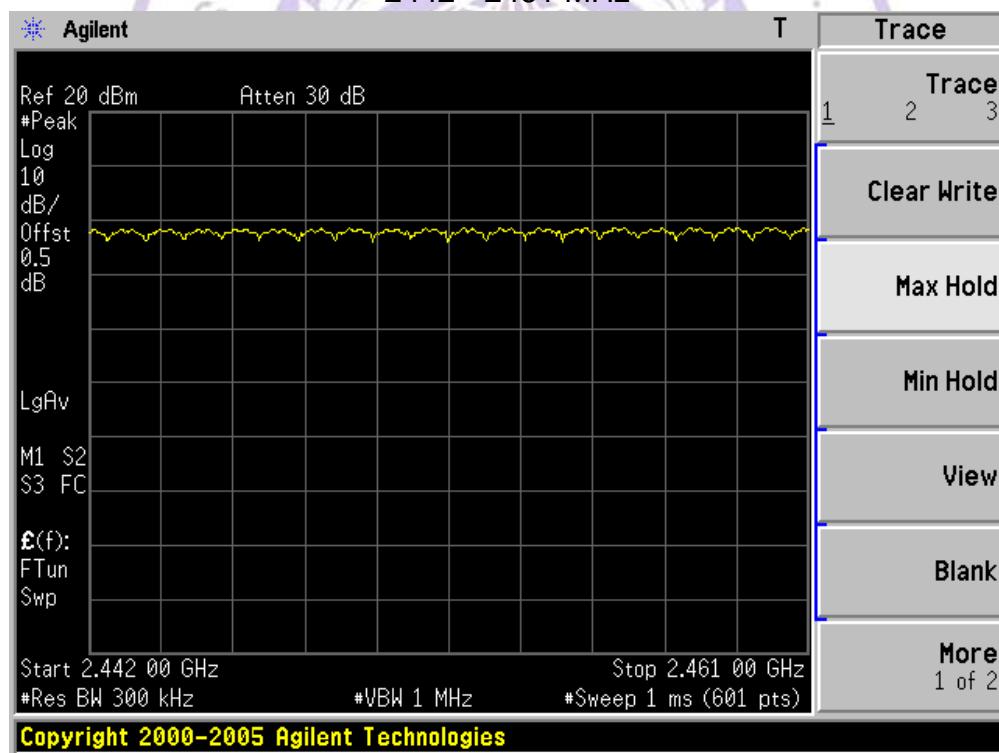


2462 - 2480 MHz

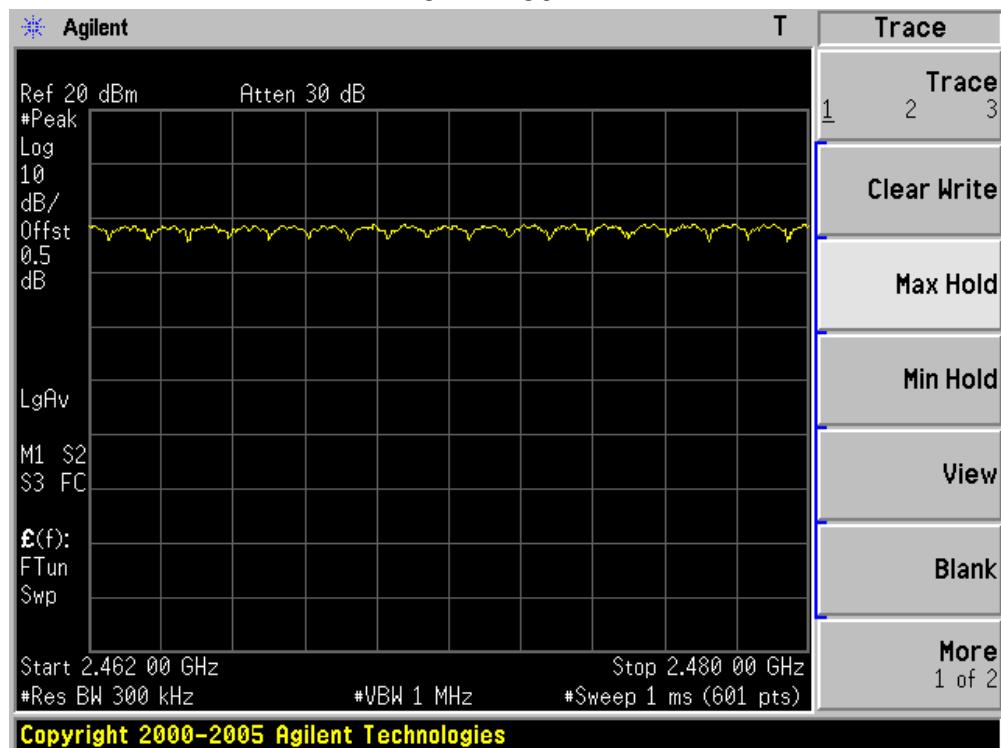


Product	:	Smart Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

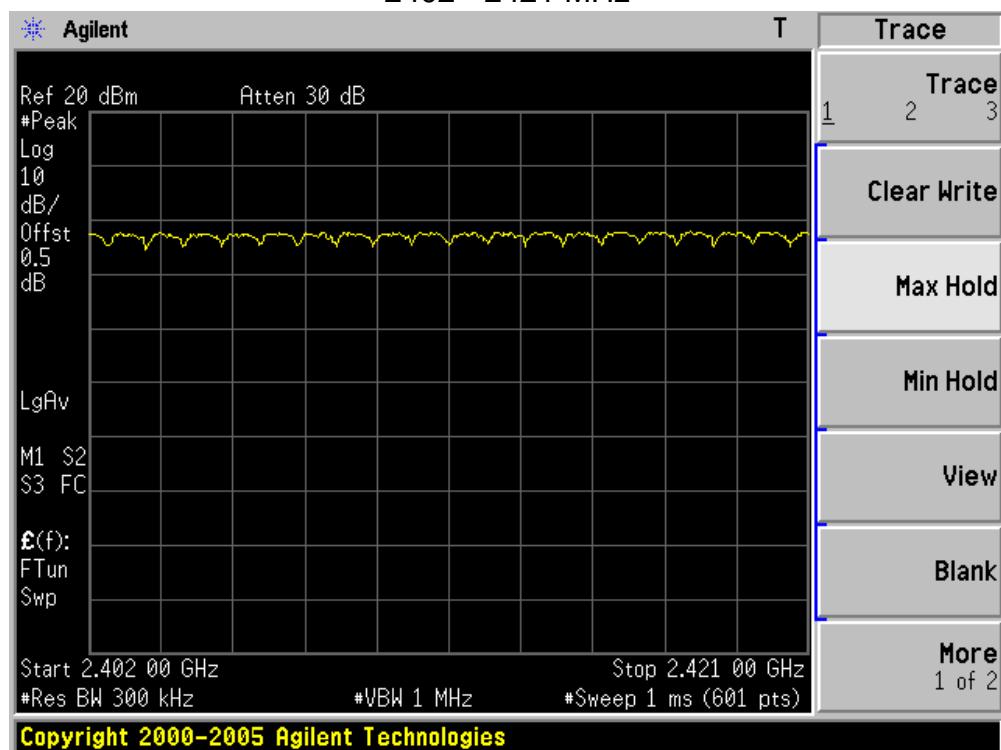


2422 - 2441 MHz

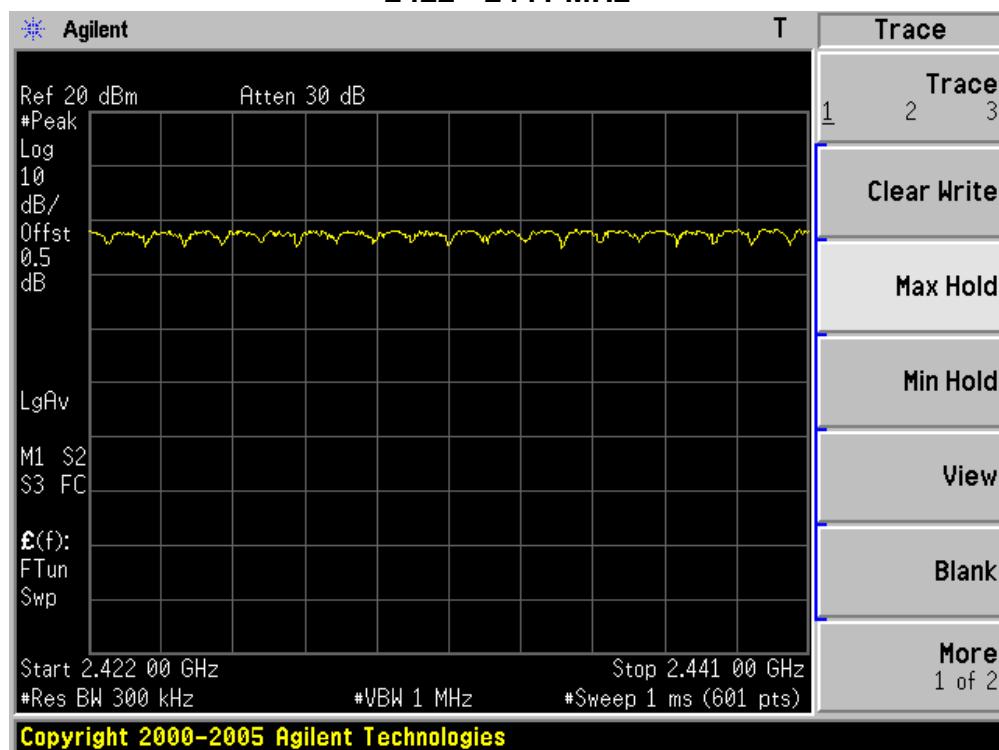

2442 - 2461 MHz

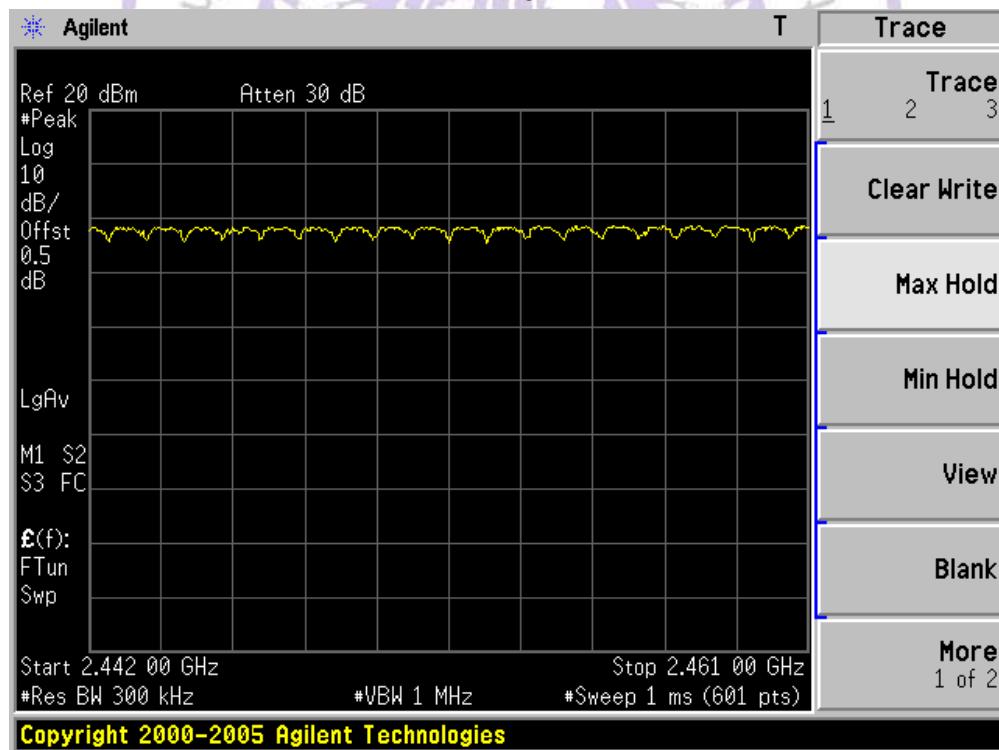


2462 - 2480 MHz

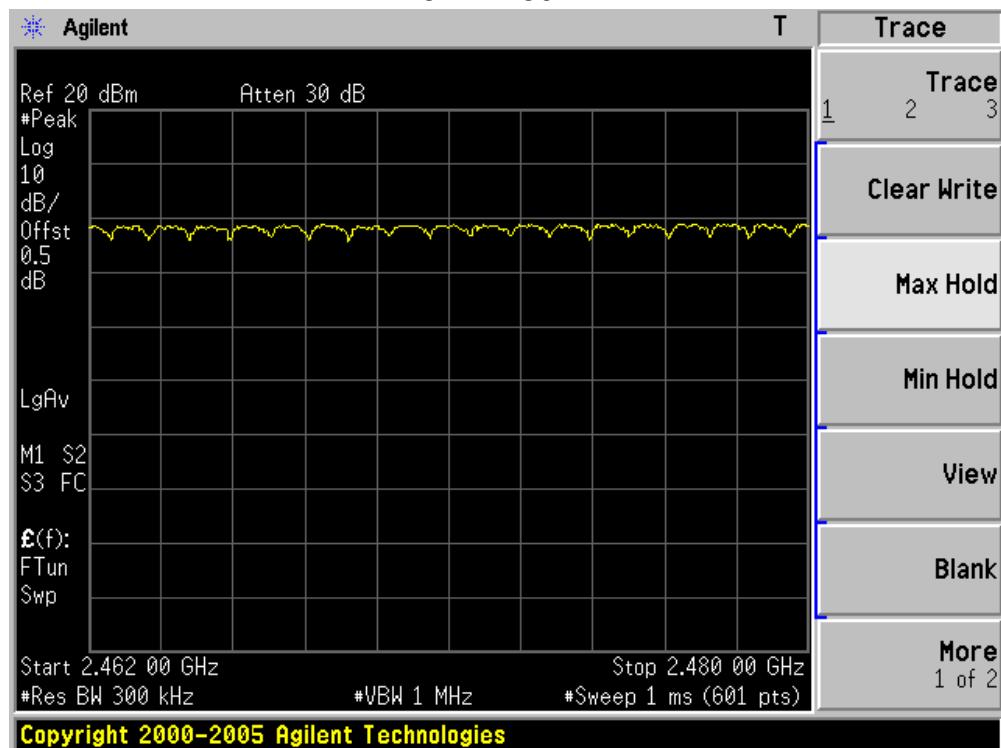

4.8. Time Of Occupancy(Dwell Time)

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1MHz

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST RESULTS



Product	:	Smart Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH1)

Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	122.67	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $40/50\text{msec} = 800$ hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(383.33 \mu\text{s} \times 800)/79] \times 31.6 = 122.67\text{msec}$

Channel 39 (2441MHz)-(3DH1)

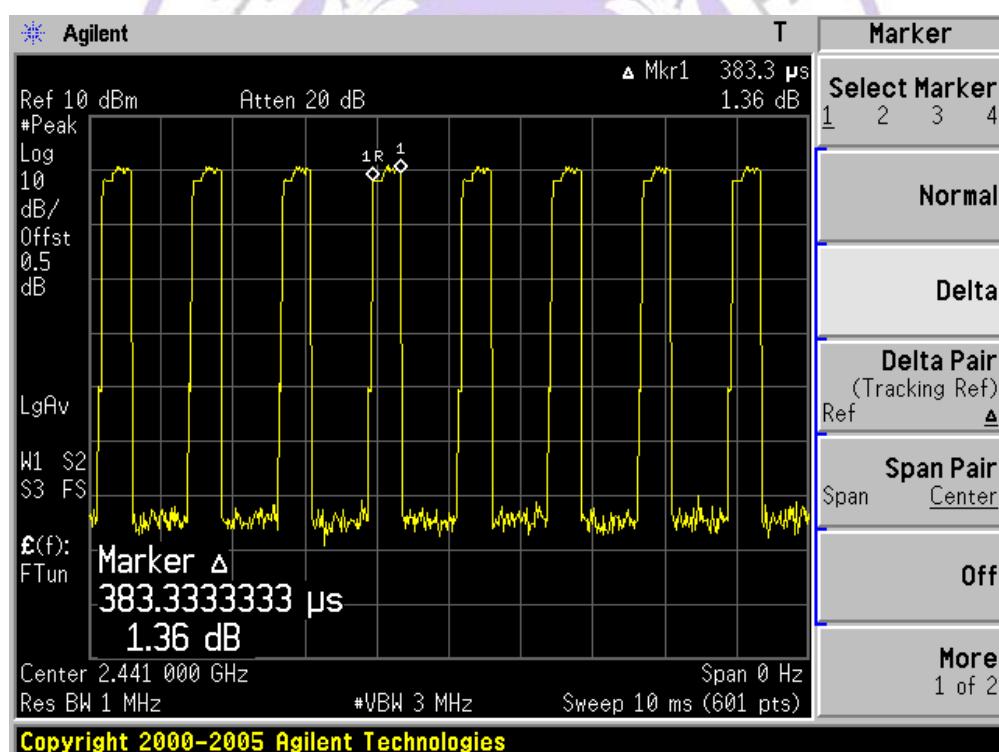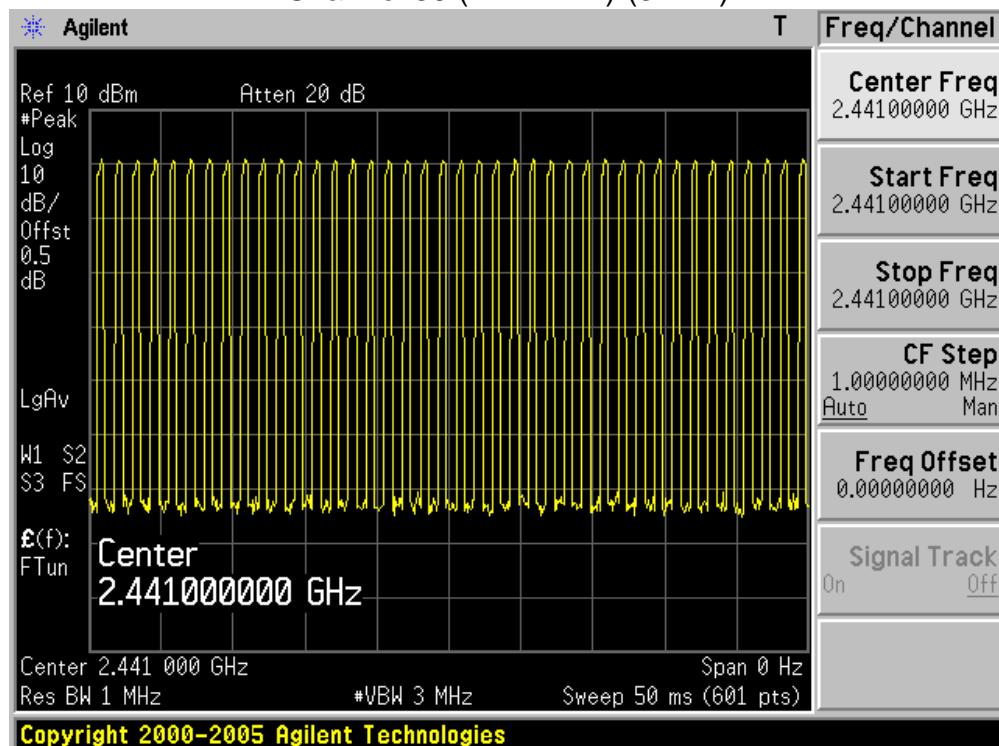

Product	:	Smart Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH3)



Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	264.00	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $20/50\text{msec} = 400\text{hops/sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(1.65 \text{ ms} \times 400)/79] \times 31.6 = 264.00\text{msec}$



Channel 39 (2441MHz) - (3DH3)

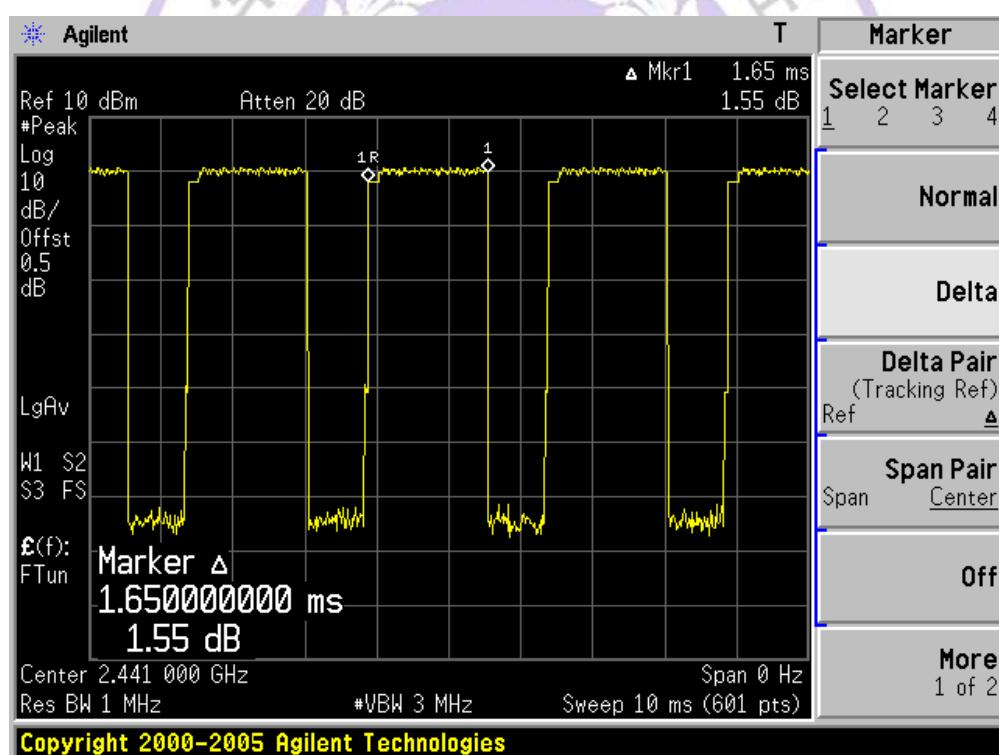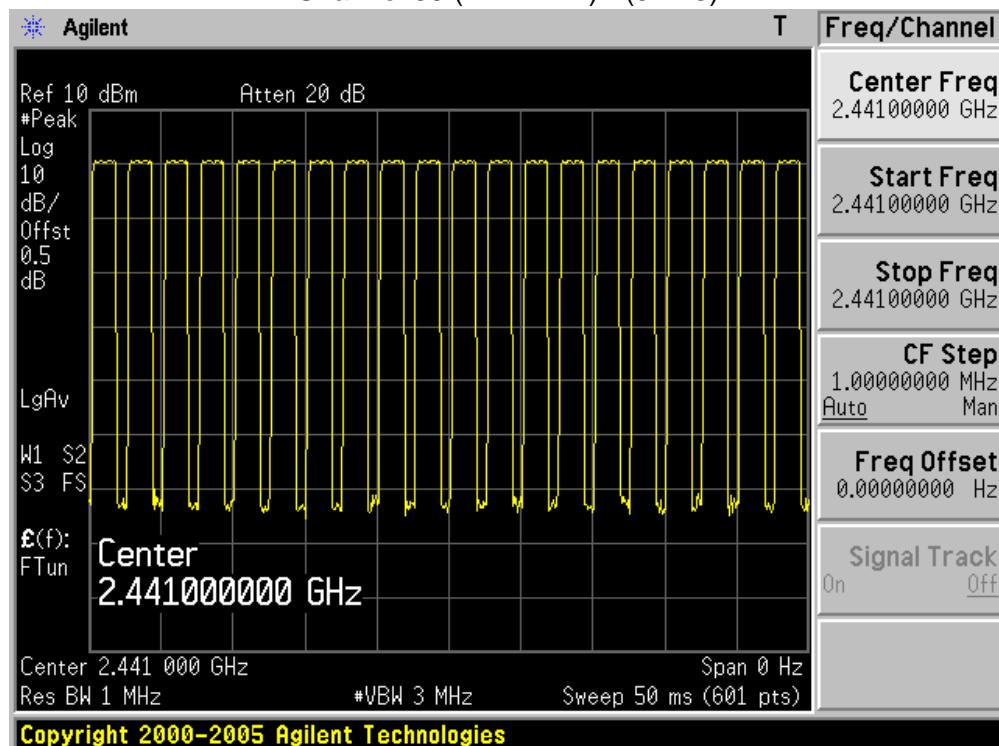

Product	:	Smart Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH5)



Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	322.93	< 400	Pass

Test Time Period: $0.4*79=31.6$ sec, Hopping Times Within 1sec: $14/50$ msec=280 hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(2.883\text{ms} * 280) / 79] * 31.6 = 322.93$ msec




Channel 39 (2441MHz) - (3DH5)

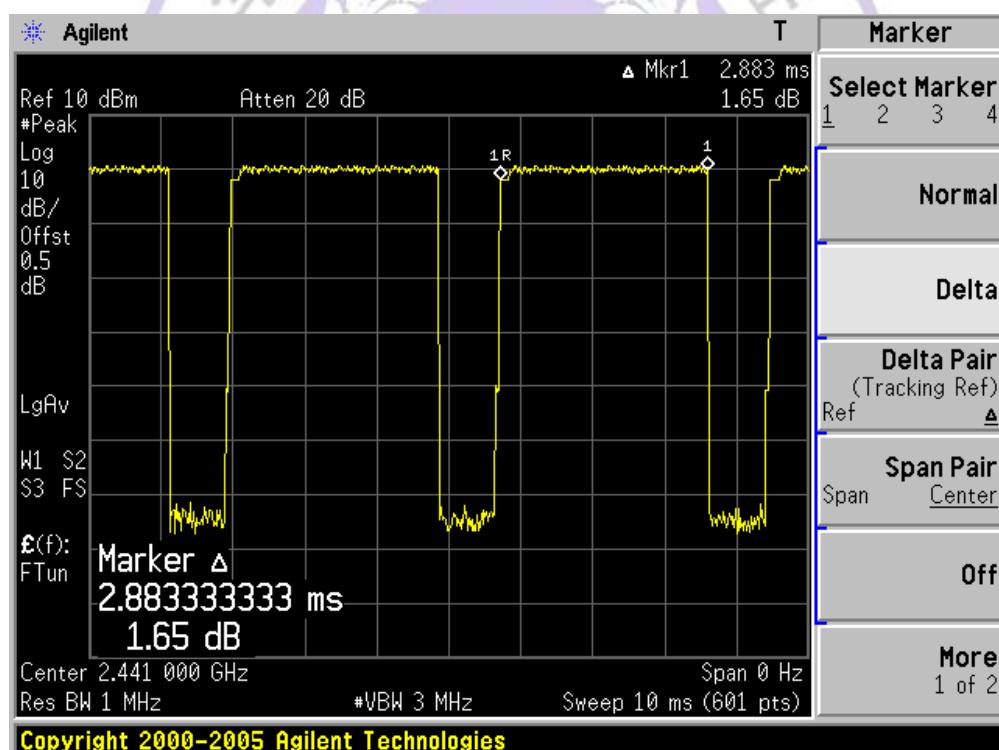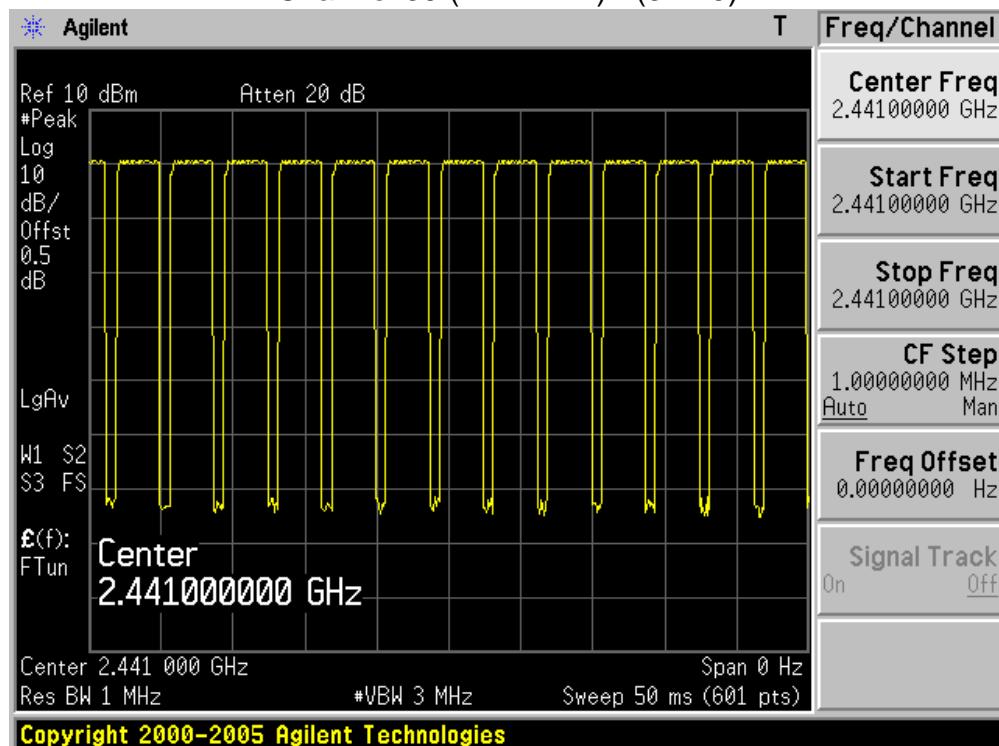

4.9. Spurious RF Conducted Emissions

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100KHz, VBW \geq RBW, Sweep =auto, Detector function = peak, Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) of FCC part 15 is not required.


TEST RESULT

Product	:	Smart Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)


Channel 00 (2402MHz)

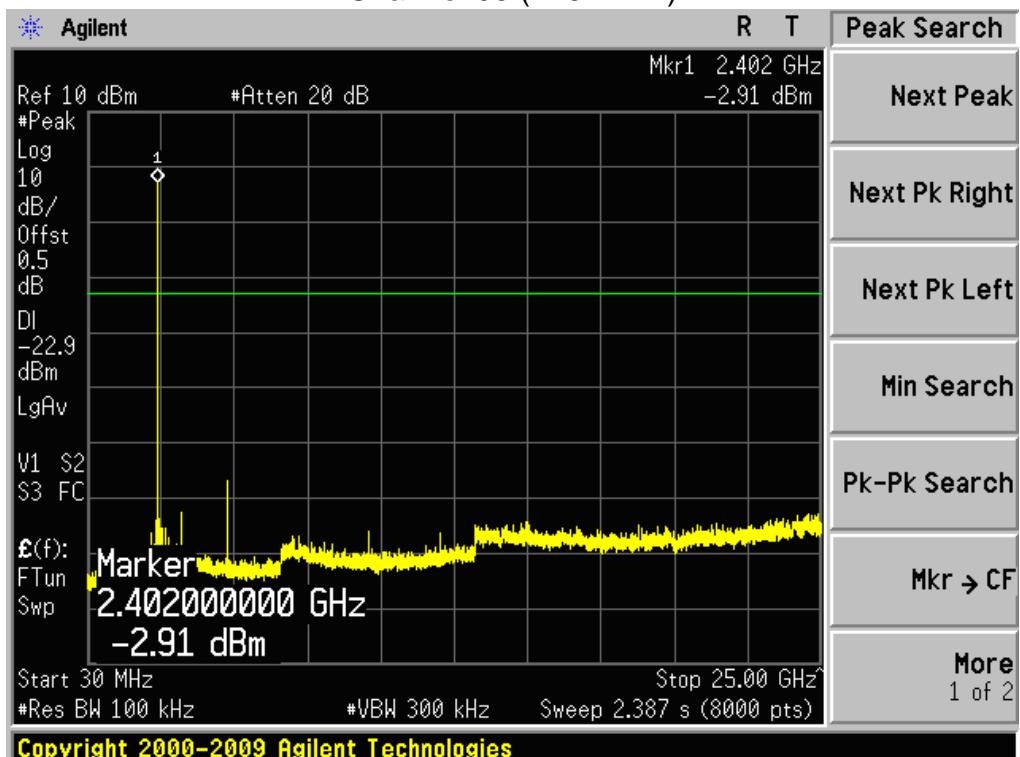


Channel 39 (2441MHz)

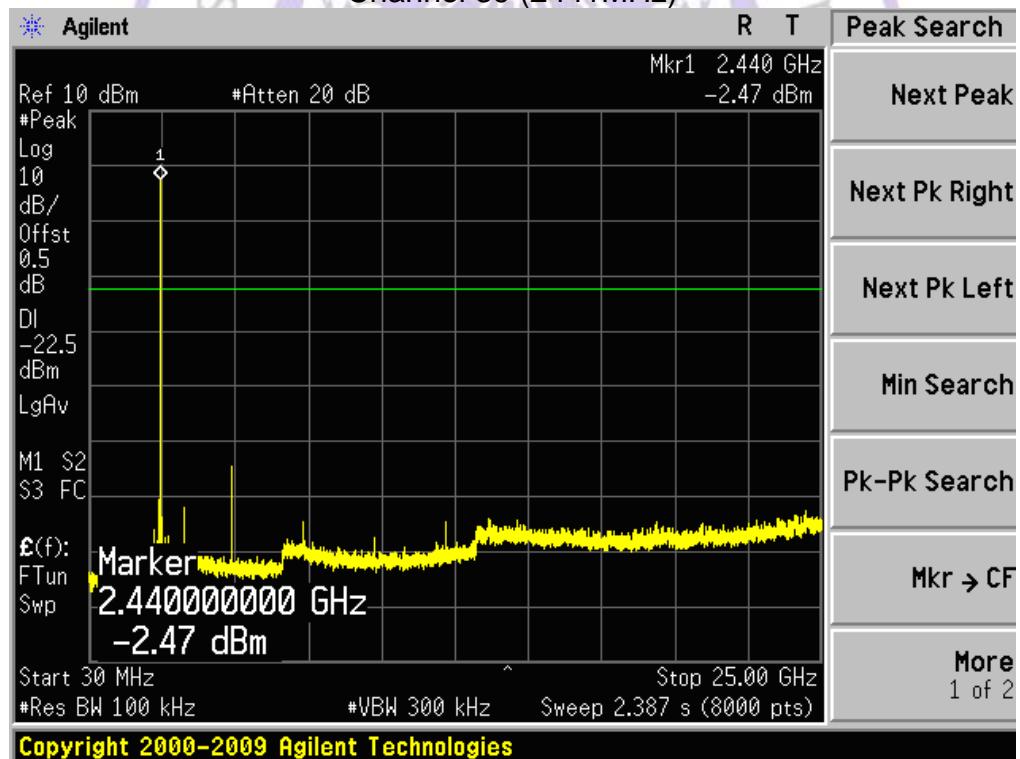


Channel 78 (2480MHz)

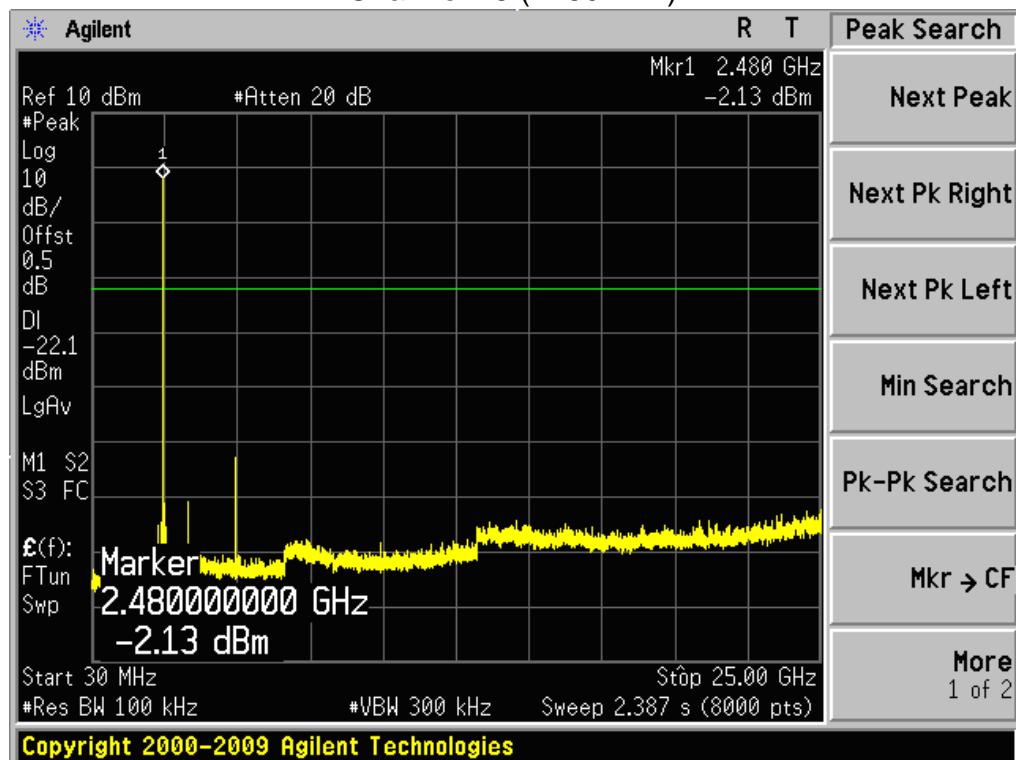


Product	:	Smart Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

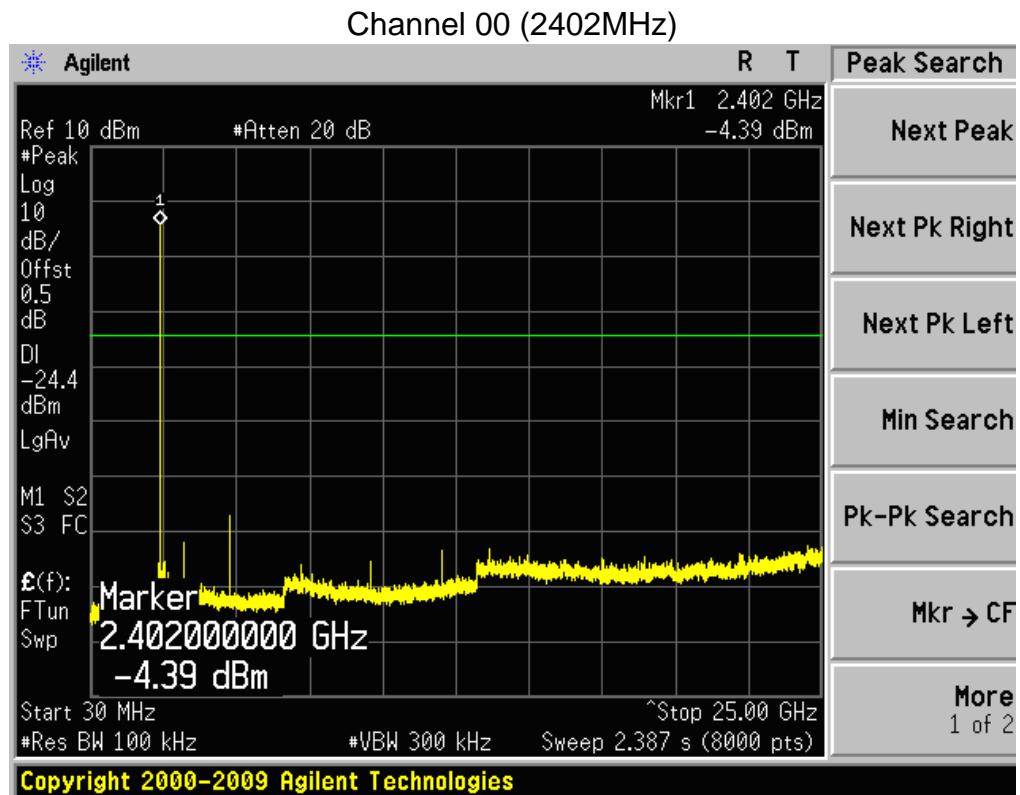


Channel 39 (2441MHz)

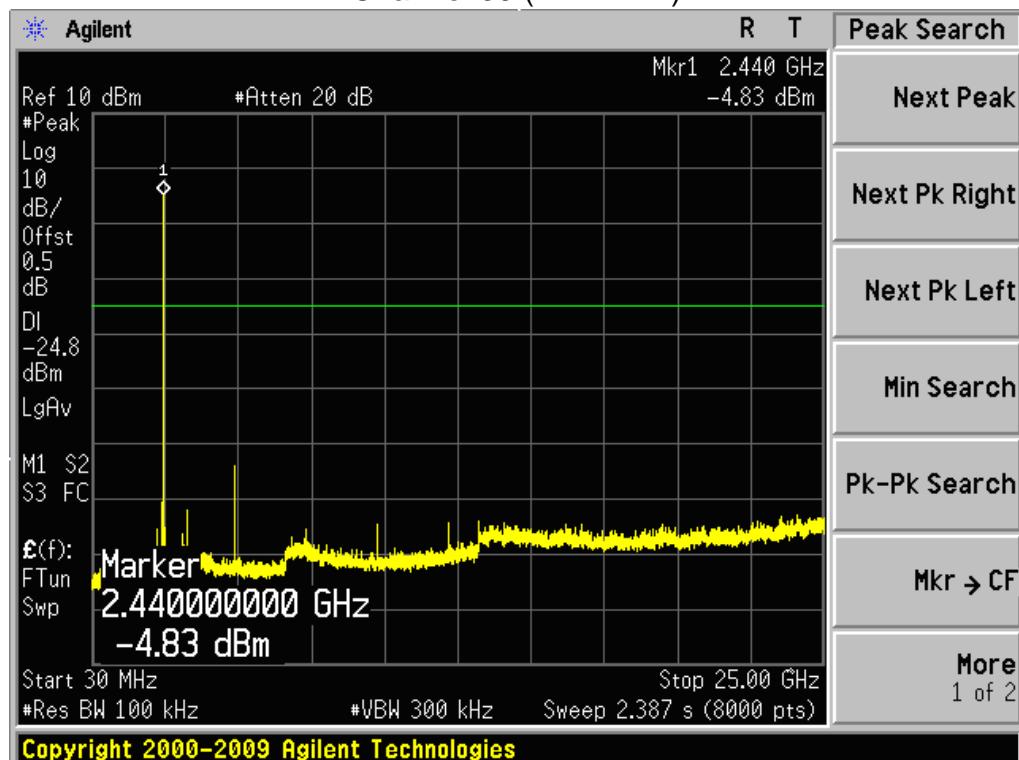


Channel 78 (2480MHz)

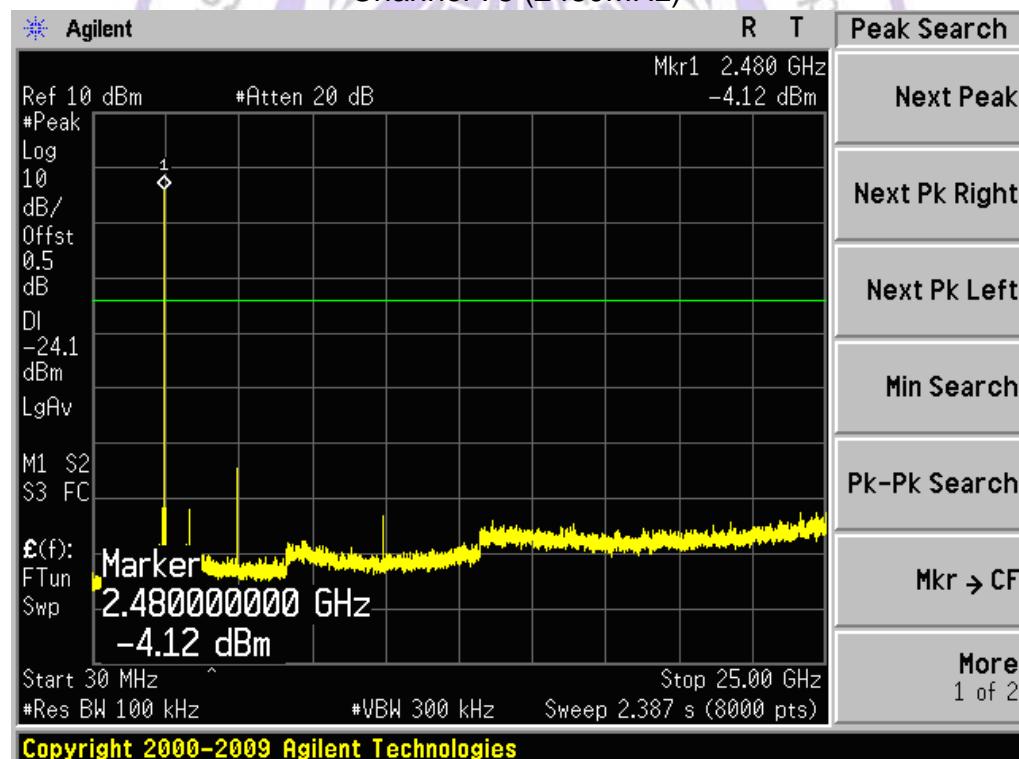


Product	:	Smart Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

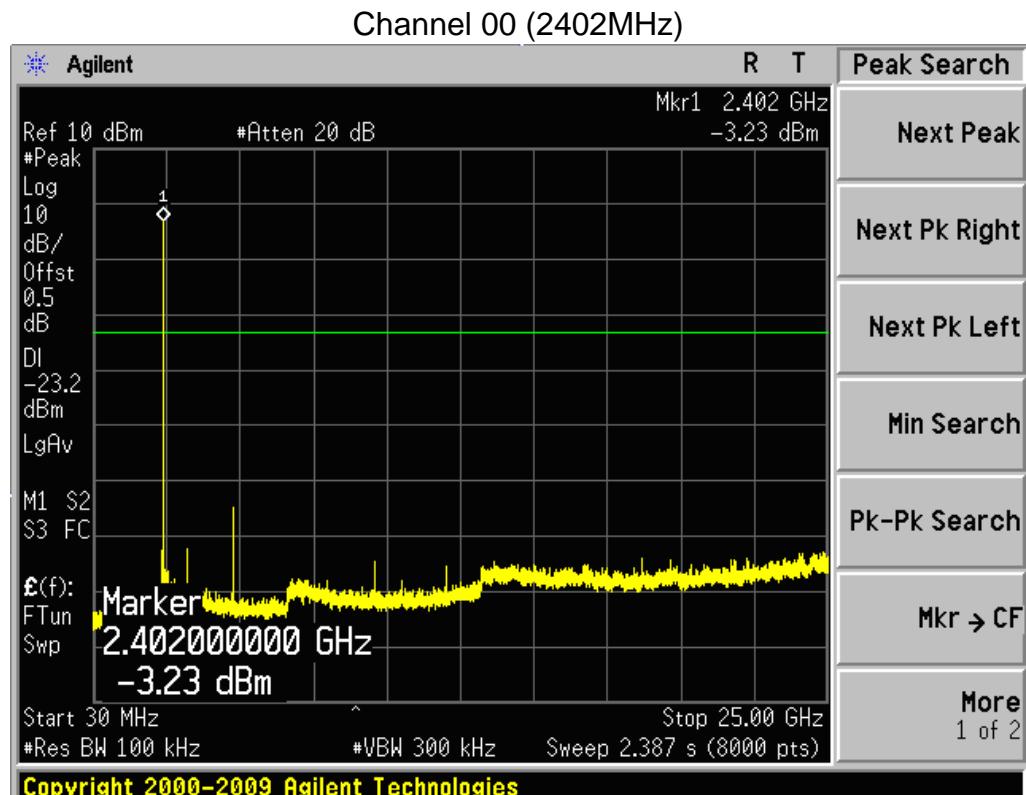

Channel 39 (2441MHz)

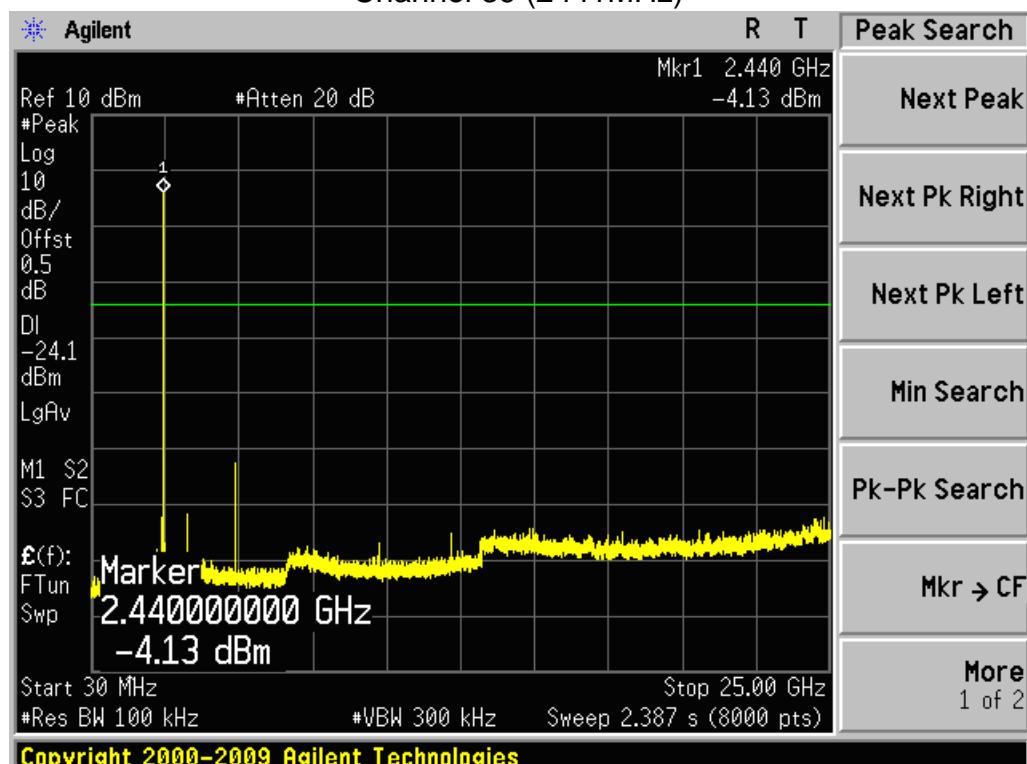

Channel 78 (2480MHz)

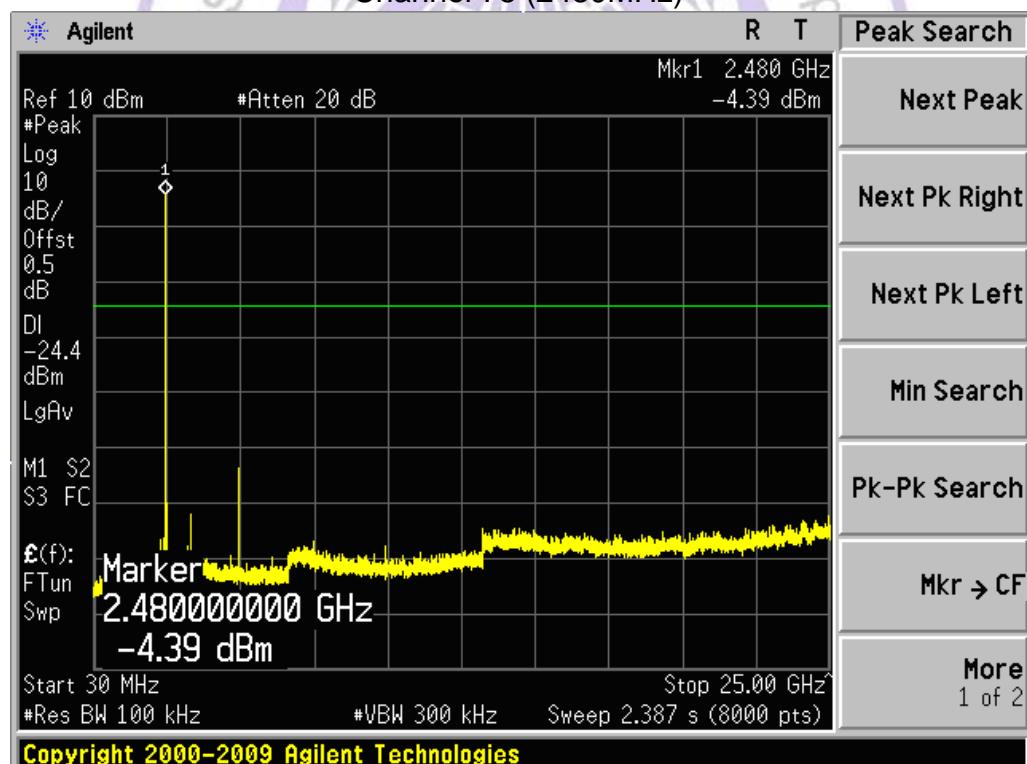

4.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a internal Antenna, The directional gains of antenna used for transmitting is 1 dBi.

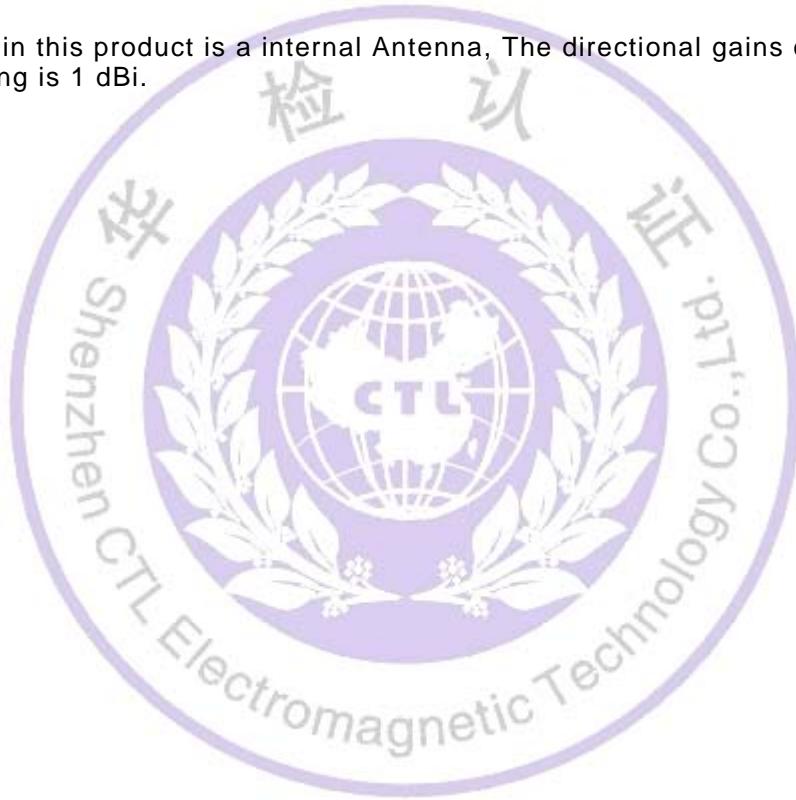

4.11. RF Exposure

STANDARD APPLICABLE

According to § 1.1307 (b)(1), system operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a device with bluetooth function.

LIMIT

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (Minutes)
(A) Limits for Occupational/ Control Exposures				
300-1500	--	--	F/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/ Uncontrolled Exposures				
300-1500	--	--	F/1500	6
1500-100,000	--	--	1	30


F= Frequency in MHz

MEASUREMENT RESULTS


Per KDB 447498 D01 V05


This is a bluetooth function and the Max peak output power is 1.91dBm (1.55 mW) lower than low threshold 10 mW in general population category.

The SAR measurement is not necessary.

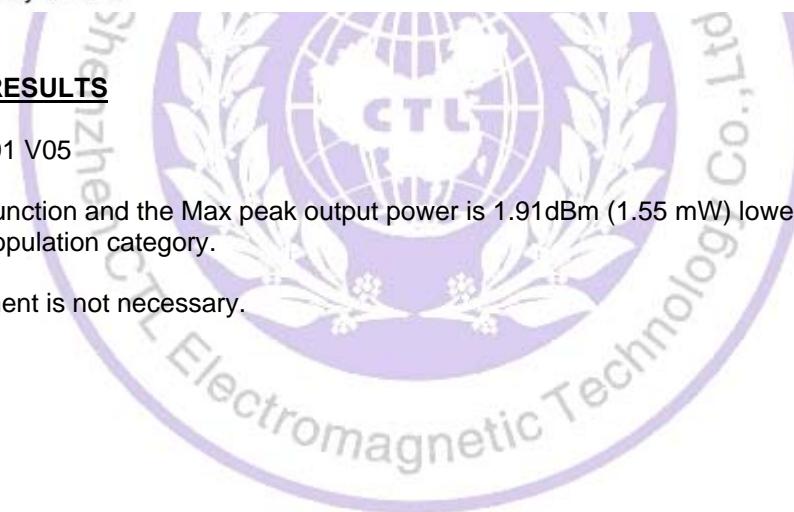

5. Test Setup Photos of the EUT

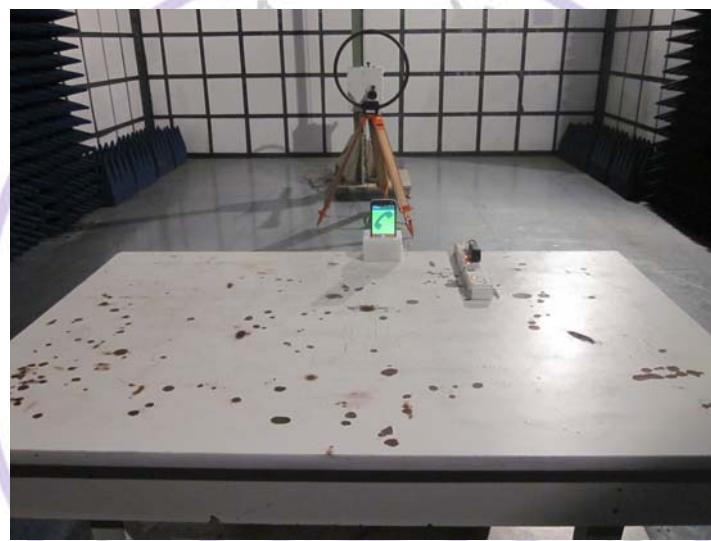

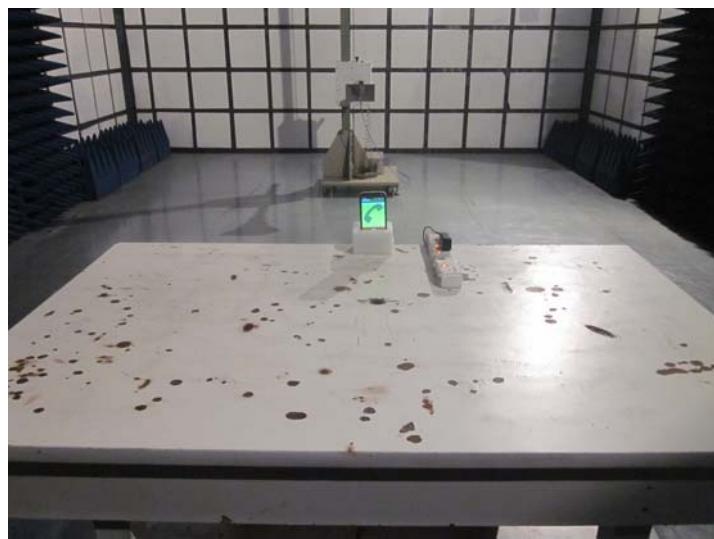

6. External and Internal Photos of the EUT



External Photos of EUT









Internal Photos of EUT

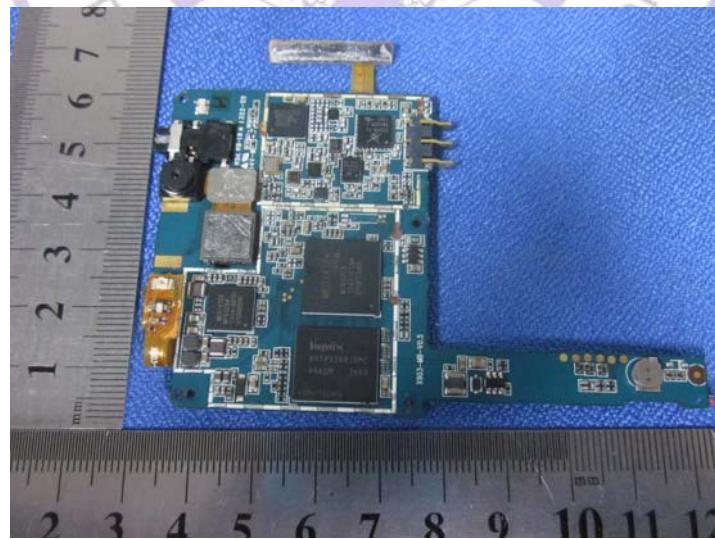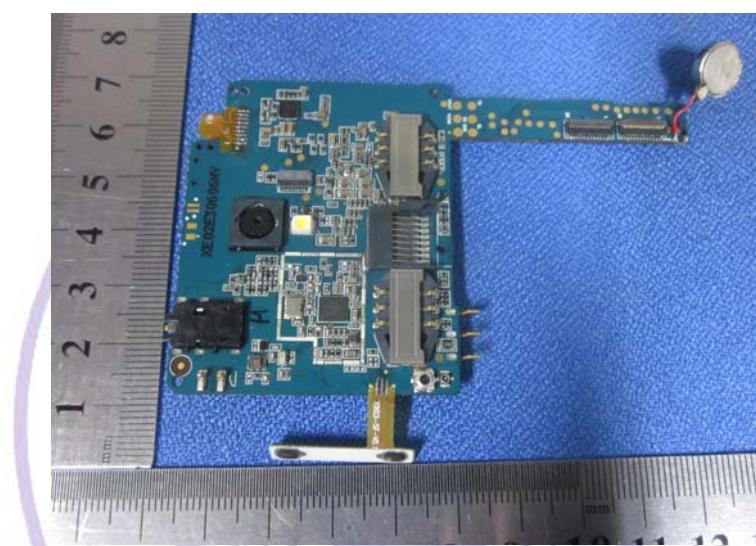

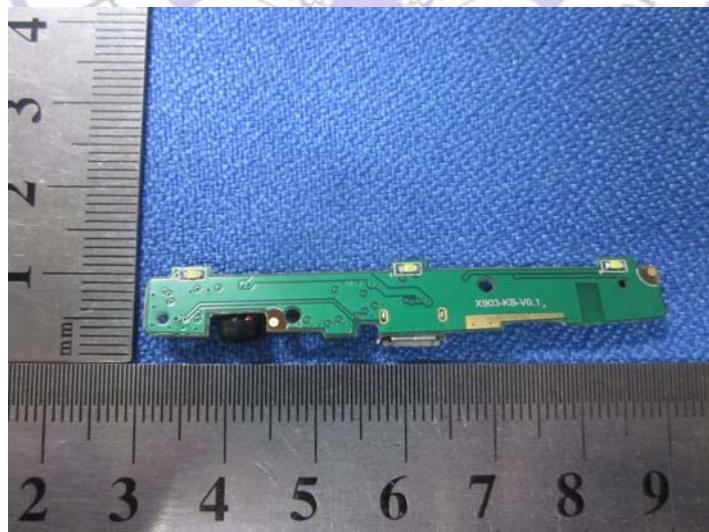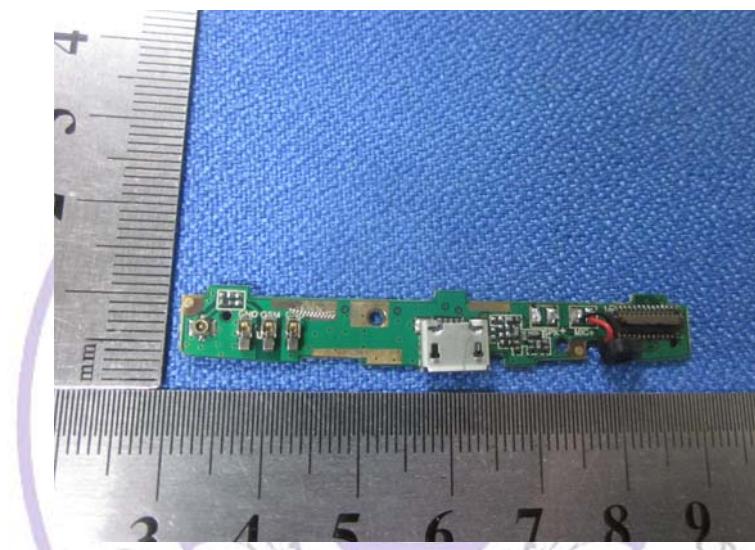

.....End of Report.....