

Shenzhen CTL Electromagnetic Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-26636041

Jackychen Lung Chi Lung Chi

## FCC PART 15 SUBPART C & RSS-210 TEST REPORT

Report Reference No...... CTL1311221809-WF

Compiled by

( position+printed name+signature)..: File administrators Jacky Chen

Name of the organization performing

the tests

Test Engineer Tracy Qi

( position+printed name+signature)..:

Approved by

( position+printed name+signature)..: Manager Tracy Qi

Date of issue...... Dec.14, 2013

Shenzhen CTL Electromagnetic Technology Co., Ltd. Representative Laboratory Name .:

Address..... Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road,

Nanshan, Shenzhen 518055 China.

Test Firm.... **Bontek Compliance Testing Laboratory Ltd** 

Address....: 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East

Road, Nanshan, Shenzhen, China

Applicant's name...... ONTOP TECHNOLOGY LTD

Address......: Unit 10, 21/F, Block B, New Trade Plaza, 6 On Ping Street, Shatin,

N.T., H.K.

Test specification:

FCC Part 15.249: Operation within the bands 920-928 MHz, 2400-Standard .....

2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

RSS-210 Issue 8 (2010): Licence-exempt Radio Apparatus (All

Frequency Bands): Category I Equipment

TRF Originator.....: Shenzhen CTL Electromagnetic Technology Co., Ltd.

Master TRF..... Dated 2011-01

0

#### Shenzhen CTL Electromagnetic Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: BLUETOOTH SPEAKER

Trade Mark ...... ontop

Models/Type reference...... WB-210

Modulation ..... FHSS

Work Frequency...... 2402 MHz~2480 MHz

Antenna Type..... internal

FCC ID ...... 2AANRWB-210

Result..... Positive

## TEST REPORT

Test Report No. :	CTL1311221809-WF	Dec. 14, 2013
rest Report No	C1L1311221009-VVF	Date of issue

Report No.: CTL1311221809-WF

**Equipment under Test** : BLUETOOTH SPEAKER

Model /Type : WB-210

Applicant : ONTOP TECHNOLOGY LTD

Address : Unit 10, 21/F, Block B, New Trade Plaza, 6 On Ping

Street, Shatin, N.T., H.K.

Manufacturer ONTOP TECHNOLOGY LTD

Address Unit 10, 21/F, Block B, New Trade Plaza, 6 On Ping

Street, Shatin, N.T., H.K.

standards on page 4:
----------------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Report No.: CTL1311221809-WF

# **Contents**

SUMMARY	<u></u>
General Remarks	
Equipment Under Test	
Short description of the Equipment under Test (EUT)	
EUT operation mode	
EUT configuration	
Related Submittal(s) / Grant (s)	
Modifications	
TEST ENVIRONMENT	
Address of the test laboratory	
Test Facility	
Environmental conditions	
Configuration of Tested System	
Statement of the measurement uncertainty	
Equipments Used during the Test	
CO NE THE	
TEST CONDITIONS AND RESULTS	<u></u>
Conducted Emissions Test	
Radiated Emission Test	
Band Edge Measurement	
Occupied Bandwidth Measurement	
ANTENNA REQUIREMENT	
ANTENNA REQUIREMENT	<del></del>
, E. Chi.	
1804	
TEST SETUP PHOTOS OF THE EUT	

# 1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

Report No.: CTL1311221809-WF

#### **ANSI C63.4-2003**

RSS-210 Issue 8 (2010): Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



## 2. SUMMARY

#### 2.1. General Remarks

Date of receipt of test sample : Dec. 05, 2013

Testing commenced on : Dec. 05, 2013

Testing concluded on : Dec. 14, 2013

## 2.2. Equipment Under Test

## Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz o 24 V DC

Other (specified in blank below)

DC 12V from adapter input AC120V/60Hz

## 2.3. Short description of the Equipment under Test (EUT)

The EUT is a BLUETOOTH SPEAKER work at 2402~2480 MHz. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	-54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Power Range: -5dBm~5dBm

Modulation: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK)

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

V1.0 Page 6 of 32 Report No.: CTL1311221809-WF

### 2.4. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Bottom Channel Transmitting	/
TM2	Middle Channel Transmitting	/
TM3	Top Channel Transmitting	/
TM4	Charging	AC Adapter

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Remark: The worst case mode is TM1(1Mbps) reported for unwanted emission and band edge test.

## 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- o supplied by the manufacturer
- o supplied by the lab

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AANRWB-210 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

CH The Ctromagnetic Technology

#### 2.7. Modifications

No modifications were implemented to meet testing criteria.

V1.0 Page 7 of 32 Report No.: CTL1311221809-WF

## 3. TEST ENVIRONMENT

## 3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

## 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

#### FCC-Registration No.: 338263


Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

## 3.3. Environmental conditions

During the measurement the envir Temperature:	ronmental conditions were within the listed ranges: 15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

## 3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



#### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

Report No.: CTL1311221809-WF

## 3.6. Equipments Used during the Test

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	EMI Test Receiver	R&S	ESCI	100687	2013-4-5	2014-4-4
2	EMI Test Receiver	R&S	ESPI	100097	2013-7-25	2014-7-24
3	Amplifier	HP	8447D	1937A02492	2013-4-5	2014-4-4
4	Single Power Conductor Module	FCC	FCC-LISN-5- 50-1-01- CISPR25	07101	2013-4-5	2014-4-4
5	Single Power Conductor Module	FCC	FCC-LISN-5- 50-1-01- CISPR25	07102	2013-4-5	2014-4-4
6	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
7	Signal generator	Rhode & Schwarz	SMIQ 03HD + option SM-B1, SMIQB11, SMIQB12, SMIQB14, SMIQB17, SMIQB20	1125.5555.46	2013-4-5	2014-4-4
8	GSM system simulator	Rhode & Schwarz	CMU200 + option K20, K21, K22, K23, K24, K27, K28, K29, K42, K65, B12, B41, B52, B66, B56	1100.0008.34	2013-4-5	2014-4-4
9	GSM system simulator	Agilent	8960 Series 10 E1985A + GSM_AMPS	B.01.76 GB42450443	2013-4-5	2014-4-4
10	Spectrum Analyzer	Agilent	E4404B	US41192833	2013-4-5	2014-4-4
11	6dB Attenuator	Atten	Attenuator	DC-4GHz	2013-4-5	2014-4-4
12	Digital Multimeter	Fluke	15B	91280239	2013-4-5	2014-4-4
13	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2013-4-9	2014-4-8
14	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-27	2013-11-26
15	Horn Antenna	SCHWARZBEC	BBHA9170	1562	2012-11-27	2013-11-26
16	Active Loop Antenna	DAZE	ZN30900A	1200	2013-4-5	2014-4-4
17	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99- 457-8730	112260/042	2013-4-5	2014-4-4
18	10dB attenuator	ELECTRO- METRICS	EM-7600	836	2013-4-5	2014-4-4
19	Spectrum Analyzer	R&S	FSP	100397	2012-11-2	2013-11-1
20	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2013-4-5	2014-4-4
21	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2013-4-5	2014-4-4


<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

V1.0 Page 9 of 32 Report No.: CTL1311221809-WF

## 4. TEST CONDITIONS AND RESULTS

#### 4.1. Conducted Emissions Test

#### **TEST CONFIGURATION**

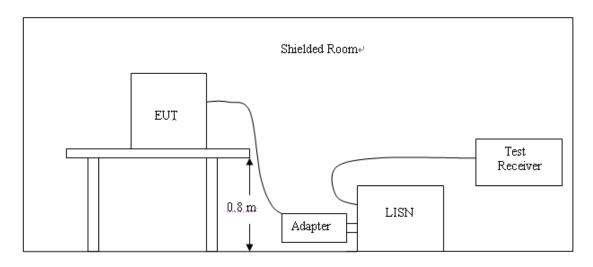

#### **TEST PROCEDURE**

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

The RBW/VBW for 150KHz to 30MHz: 9KHz

V1.0 Page 10 of 32 Report No.: CTL1311221809-WF

#### **CONDUCTED POWER LINE EMISSION LIMIT**

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:


F=====================================	Maximum RF Line Voltage (dBμV)					
Frequency (MHz)	CLAS	SS A	CLASS B			
(141112)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

<sup>\*</sup> Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

## **TEST RESULTS**



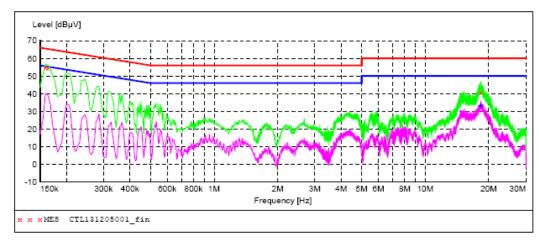


#### MEASUREMENT RESULT: "CTL131205001 fin"

12/5/2013 9:2	1AM						
Frequency				_	Detector	Line	PΕ
MHz	dΒμV	dB	dΒμV	dB			
0.159000	55.10	9.8	66	10.4	QP	N	GND
0.163500	54.60	9.8	65	10.7	QP	N	GND
18.384000	40.70	10.4	60	19.3	QP	N	GND

#### MEASUREMENT RESULT: "CTL131205001\_fin2"

12/5/	2013 9:21	LAM						
Fr	equency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
18	.312000	33.20	10.4	50	16.8	AV	N	GND
18	.321000	33.30	10.4	50	16.7	AV	N	GND
18	.366000	33.40	10.4	50	16.6	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

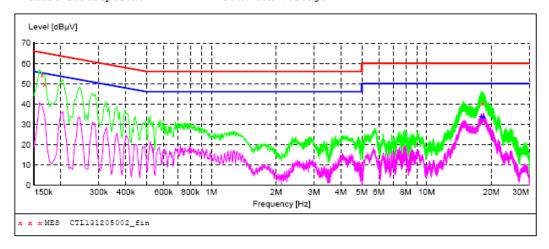

#### MEASUREMENT RESULT: "CTL131205002 fin"

12/5/20	13 9:24	AM						
Freq	quency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.1	63500	54.20	9.8	65	11.1	QP	L1	GND
0.1	.68000	50.00	9.8	65	15.1	QP	L1	GND
18.1	32000	40.10	10.4	60	19.9	QP	L1	GND

#### MEASUREMENT RESULT: "CTL131205002\_fin2"

1	2/5/2013 9:2	4AM						
	Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
	17.965500	33.50	10.4	50	16.5	AV	L1	GND
	18.366000	33.50	10.4	50	16.5	AV	L1	GND
	18.406500	33.40	10.4	50	16.6	ΔV	T.1	GND




V1.0 Page 12 of 32 Report No.: CTL1311221809-WF


## 4.2. Radiated Emission Test

## **TEST CONFIGURATION**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

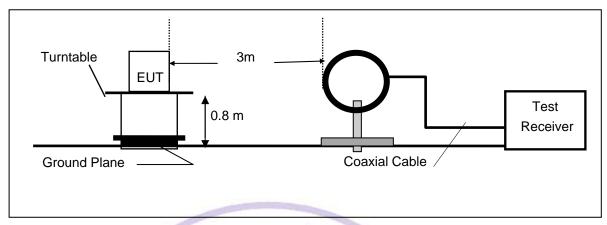

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

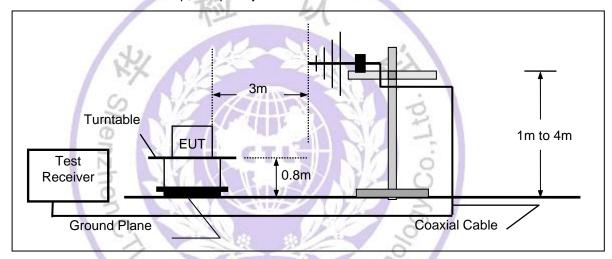

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

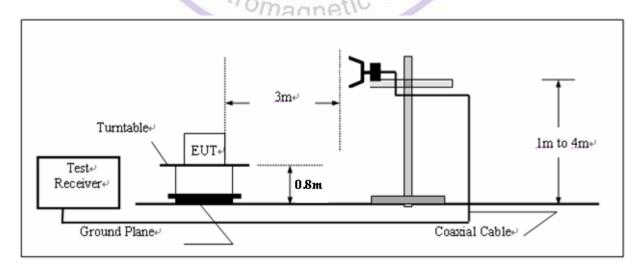

V1.0 Page 13 of 32 Report No.: CTL1311221809-WF

#### FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

#### **RADIATION LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (μV/m)
// -	AVIANI	70 17 1	. ,
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500
N			

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

#### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. Based on the Frequency Generator in the device include 16MHz. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

#### Note:

Three axes are chosen for pretest, the Y axis is the worst mode for final test. For battery operated equipment, the equipment tests shall be performed using a new battery.


V1.0 Page 14 of 32 Report No.: CTL1311221809-WF

#### **TEST RESULTS**

All the test modes (TM1, TM2, TM3 and TM4) completed for test. The worst case of Radiated Emission is TM1; the test data of this mode was reported.

Below 1GHz Test Results:

SWEEP TABLE: "test (30M-1G)"
Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

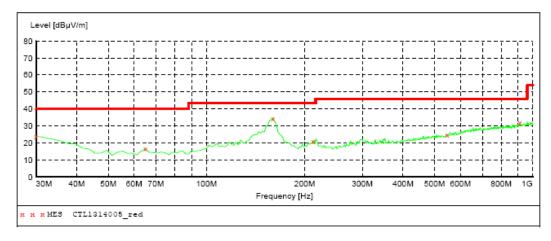


#### MEASUREMENT RESULT: "CTL1314005\_red"

12/14/2013 9: Frequency MHz		Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.00	21.1	40.0	16.0		0.0	0.00	VERTICAL
64.920000	16.60	8.4	40.0	23.4		0.0	0.00	VERTICAL
159.980000	34.60	13.9	43.5	8.9		0.0	0.00	VERTICAL
212.360000	21.20	14.3	43.5	22.3		0.0	0.00	VERTICAL
546.040000	24.90	20.9	46.0	21.1		0.0	0.00	VERTICAL
912.700000	32.20	26.2	46.0	13.8		0.0	0.00	VERTICAL

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

SWEEP TABLE: "test (30M-1G)"

/ .. Field Strength ^ Meas. IF Short Description: Start Stop Detector Meas. Transducer Frequency Frequency Time Bandw. 30.0 MHz JB1 1.0 GHz MaxPeak 300.0 ms 120 kHz

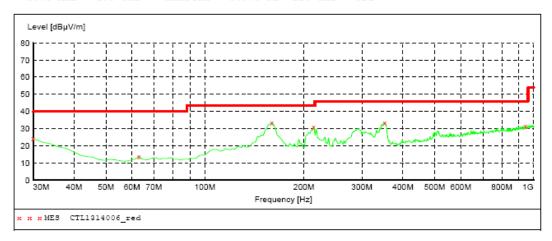

#### MEASUREMENT RESULT: "CTL1314006 red"

12/14/2013 9: Frequency MHz		Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	24.30	21.1	40.0	15.7		0.0	0.00	HORIZONTAL
62.980000	13.80	8.4	40.0	26.2		0.0	0.00	HORIZONTAL
159.980000	33.60	13.9	43.5	9.9		0.0	0.00	HORIZONTAL
214.300000	31.20	14.3	43.5	12.3		0.0	0.00	HORIZONTAL
352.040000	33.60	17.0	46.0	12.4		0.0	0.00	HORIZONTAL
945.680000	31.40	26.6	46.0	14.6		0.0	0.00	HORIZONTAL

- Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz (1) was verified, and no any emission was found except system noise floor.
- (2)\* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz (3)for measuring above 1 GHz, below 30MHz was 10KHz. \_. .\_, Solow Sulvi⊓z was 10KHz.

#### **Above 1 GHz Test Results:**

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
2480	V	Peak	76.82	-3.30	73.52	113.98	-40.46
2480	Н	Peak	68.17	-3.30	64.87	113.98	-49.11
4960	V	Peak	48.71	3.90	52.61	74.00	-21.39
4960	Н	Peak	43.97	3.90	47.87	74.00	-26.13
7440	V						
7440	Н						
Others							

Freq.	Ant.Pol.	DetectorMode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	Η/V	(PK/AV)	(dBuV)	Amp. CF(dB)	(dBuV/m)	(dBuV/m)	(dB)
2441	V	Peak	76.03	-3.40	72.63	113.98	-41.35
2441	Н	Peak	66.58	-3.40	63.18	113.98	-50.80
4882	V	Peak	48.72	3.70	52.42	74.00	-21.58
4882	Н	Peak	43.19	3.70	46.89	74.00	-27.11
7323	V						
7323	Н						
Others							


Freq.	Ant.Pol.	DetectorMode	Reading	Ant./CL/	Actual FS	Limit3m	Safe Margin
(MHz)	Η/V	(PK/AV)	(dBuV)	Amp. CF(dB)	(dBuV/m)	(dBuV/m)	(dB)
2402	V	Peak	75.90	-3.30	72.60	113.98	-41.38
2402	Н	Peak	67.03	-3.30	63.73	113.98	-50.25
4804	V	Peak	49.93	3.50	53.43	74.00	-20.57
4804	Н	Peak	43.29	3.50	46.79	74.00	-27.21
7206	V						
7206	Н						
Others							

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "--- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.52dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.43 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Below 1GHz Test Results (Receiver):

# SWEEP TABLE: "test (30M-1G)" Short Description: Fi

Field Strength Start Stop Detector Meas. ΙF Transducer Frequency Frequency Time Bandw. Coupled 30.0 MHz 1.0 GHz 100 kHz VULB9163 NEW MaxPeak

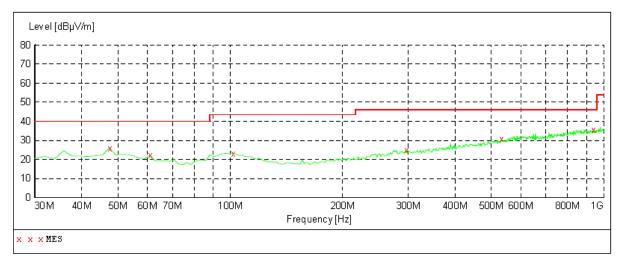


#### MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.00	15.8	40.0	14.0		100.0	0.00	VERTICAL
61.040000	22.30	14.2	40.0	17.7		100.0	0.00	VERTICAL
101.780000	23.20	17.3	43.5	20.3		100.0	0.00	VERTICAL
295.780000	24.90	18.6	46.0	21.1		100.0	0.00	VERTICAL
532.460000	30.90	24.6	46.0	15.1		100.0	0.00	VERTICAL
939.860000	35.60	29.5	46.0	10.4		100.0	0.00	VERTICAL

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

# SWEEP TABLE: "test (30M-1G)" Short Description: Fi

Field Strength Start Meas. Transducer Stop Detector Bandw. Frequency Frequency Time 30.0 MHz 1.0 GHz Coupled 100 kHz VULB9163 NEW MaxPeak

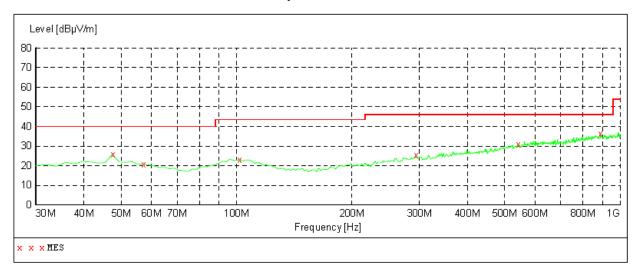

#### MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	25.90	15.8	40.0	14.1		100.0	0.00	HORIZONTAL
57.160000	20.90	15.1	40.0	19.1		100.0	0.00	HORIZONTAL
101.780000	23.10	17.3	43.5	20.4		100.0	0.00	HORIZONTAL
293.840000	25.40	18.6	46.0	20.6		100.0	0.00	HORIZONTAL
542.160000	31.00	24.8	46.0	15.0		100.0	0.00	HORIZONTAL
889.420000	36.30	29.1	46.0	9.7		100.0	0.00	HORIZONTAL

#### Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

nagne

## 4.3. Band Edge Measurement

#### **TEST CONFIGURATION**

#### Same as Section 4.2

#### **TEST PROCEDURE**

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBM to 300 KHz, to measure the conducted peak band edge.

#### **LIMIT**


FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

#### **TEST RESULTS**

#### **Radiated Test:**

Operation Mode: TX on Bot Channel


Polarity: Hor.

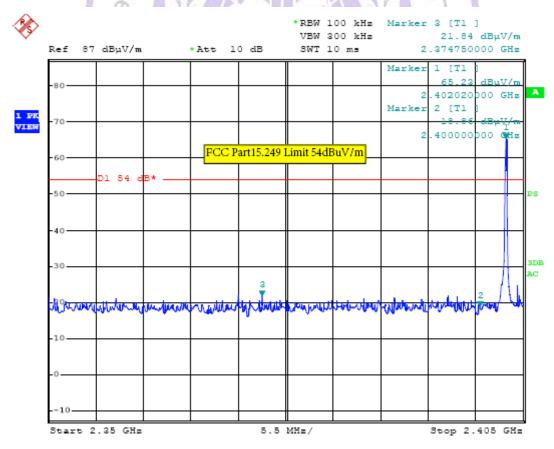

Report No.: CTL1311221809-WF

Polarity: Ver.

Operation Mode: TX on Bot Channel

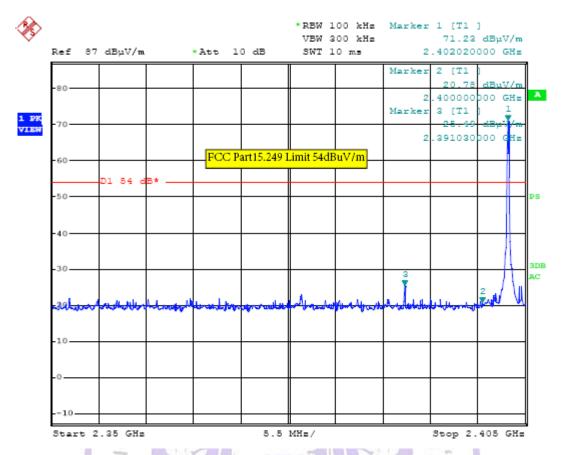


#### Note:

- 1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- 2. The average measurement was not performed when the peak measured data under the limit of average Tilectromagnetic Techno detection.

Operation Mode: TX on Top Channel


Polarity: Hor.

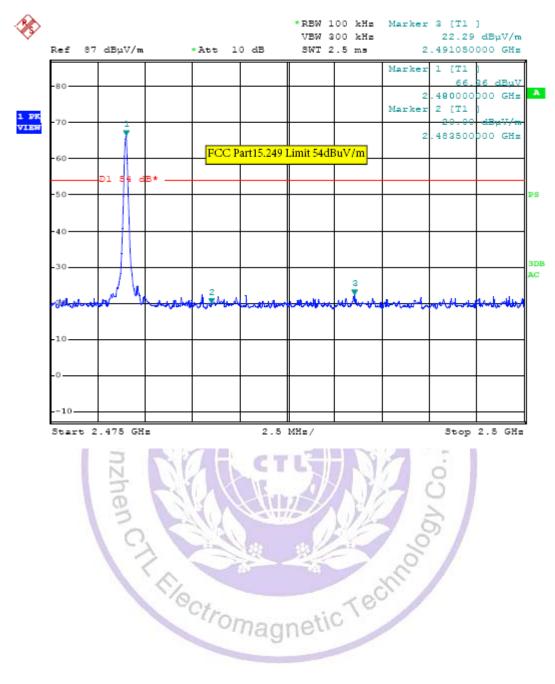

Report No.: CTL1311221809-WF

Operation Mode: TX on Top Channel

Polarity: Ver.

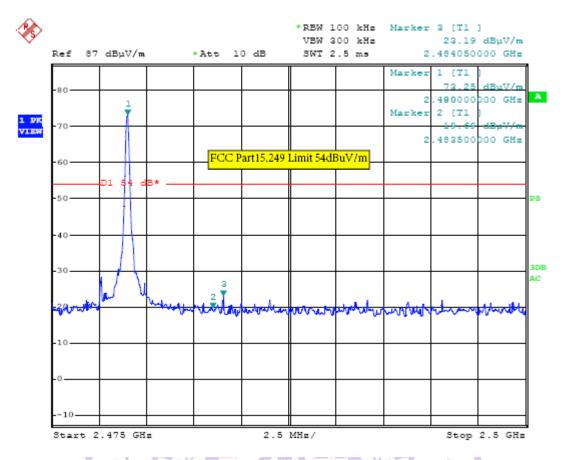

#### Note:

- 1. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- The average measurement was not performed when the peak measured data under the limit of average detection.

V1.0 Page 23 of 32 Report No.: CTL1311221809-WF

### 4.4. Occupied Bandwidth Measurement

#### **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation.
- 3. Based on FCC Part15 C Section 15.239(a): RBW= 10KHz. VBW= 30 KHz, Span=1MHz.
- 4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

### **Test SET-UP (Block Diagram of Configuration)**

Same as 4.2 Radiated Emission Measurement.

#### **Measurement Equipment Used:**

Same as 4.2 Radiated Emission Measurement.


#### Measurement Results






20dB Bandwidth: 930.08KHz

#### 2441MHz

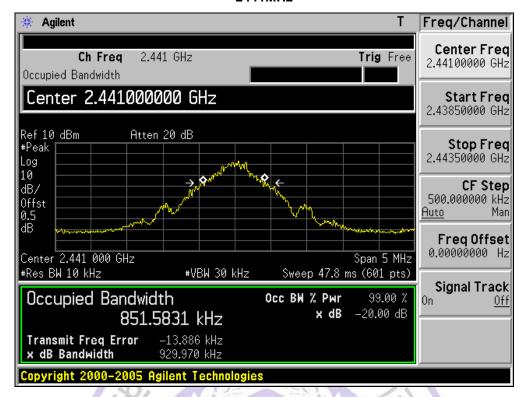

20dB Bandwidth: 929.97KHz

#### 2480MHz

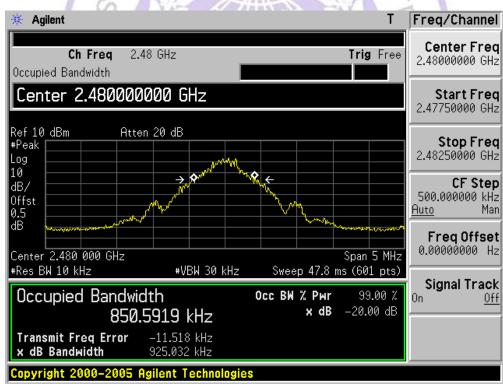

20dB Bandwidth: 925.03KHz

V1.0 Page 25 of 32 Report No.: CTL1311221809-WF

## 5. Antenna Requirement

#### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **Antenna Connected Construction**

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0 dBi.



## Report No.: CTL1311221809-WF

# 6. Test Setup Photos of the EUT












V1.0 Page 28 of 32 Report No.: CTL1311221809-WF

# 7. External and Internal Photos of the EUT

## **External Photos of EUT**



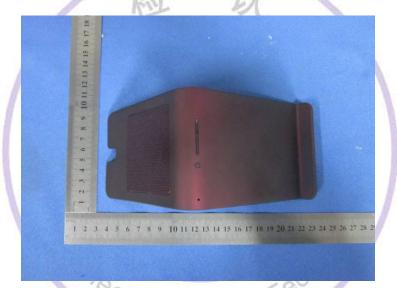











## **Internal Photos of EUT**





