



### 3.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz (DC $\geq$ 0.98) $\geq$ 1/T (DC<0.98)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

## Test Setup:

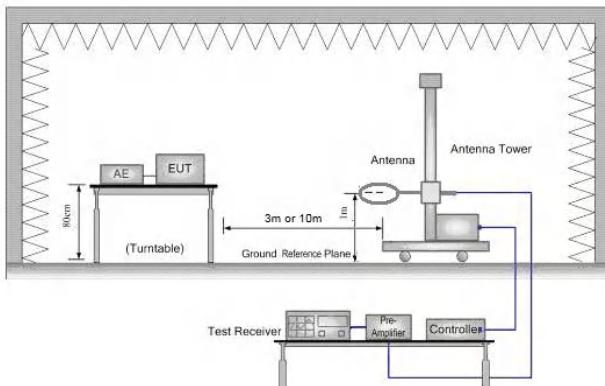


Figure 1. Below 30MHz

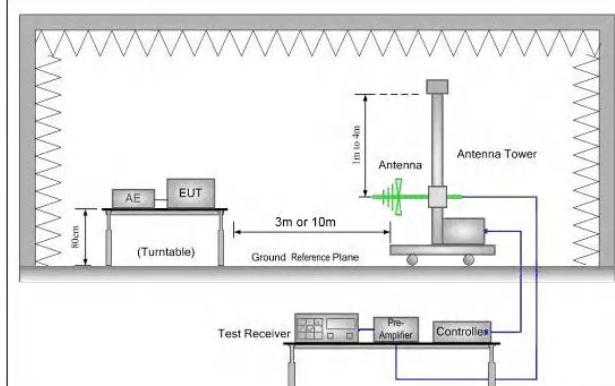


Figure 2. 30MHz to 1GHz

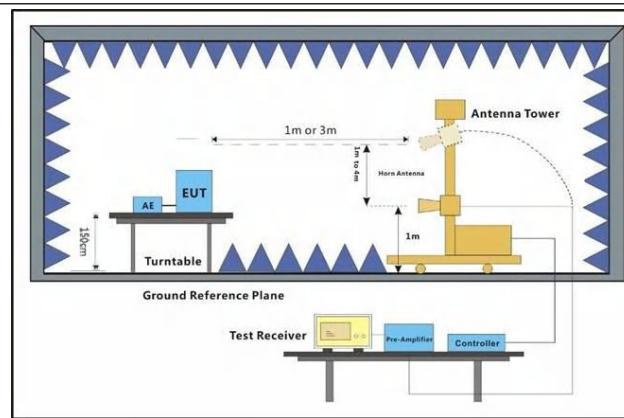



Figure 3. Above 1 GHz

## Test Procedure:


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.



Test Configuration:	<p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"><li>• RBW = 120 kHz</li><li>• VBW = 300 kHz</li><li>• Detector = Peak</li><li>• Trace mode = max hold</li></ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW <math>\geq 3</math> MHz</li><li>• Detector = Peak</li><li>• Sweep time = auto</li><li>• Trace mode = max hold</li></ul> <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW = 10 Hz, when duty cycle is no less than 98 percent.</li><li>• VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</li></ul>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge+Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode. Through Pre-scan, find the DH5 of data type is the worst case of All modulation type.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

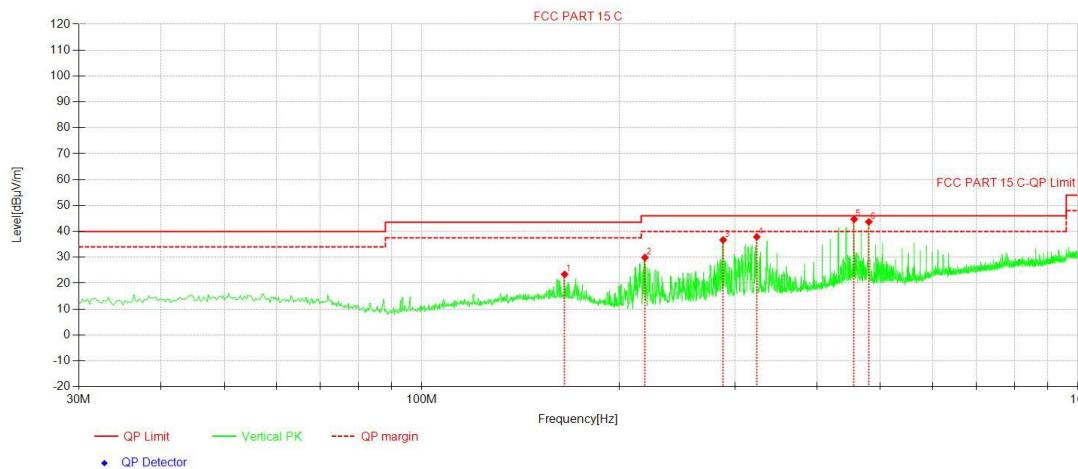**Test data**
**For 30-1000MHz**


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	165.05	31.38	-7.97	23.41	43.50	20.09	100	90	PK	Vertical
2	218.80	40.99	-11.09	29.90	46.00	16.10	100	0	PK	Vertical
3	287.88	44.01	-7.30	36.71	46.00	9.29	100	349	PK	Vertical
4	323.97	44.05	-6.16	37.89	46.00	8.11	100	0	PK	Vertical
5	455.92	47.38	-2.68	44.70	46.00	1.30	100	341	PK	Vertical
6	479.98	45.93	-2.24	43.69	46.00	2.31	100	356	PK	Vertical

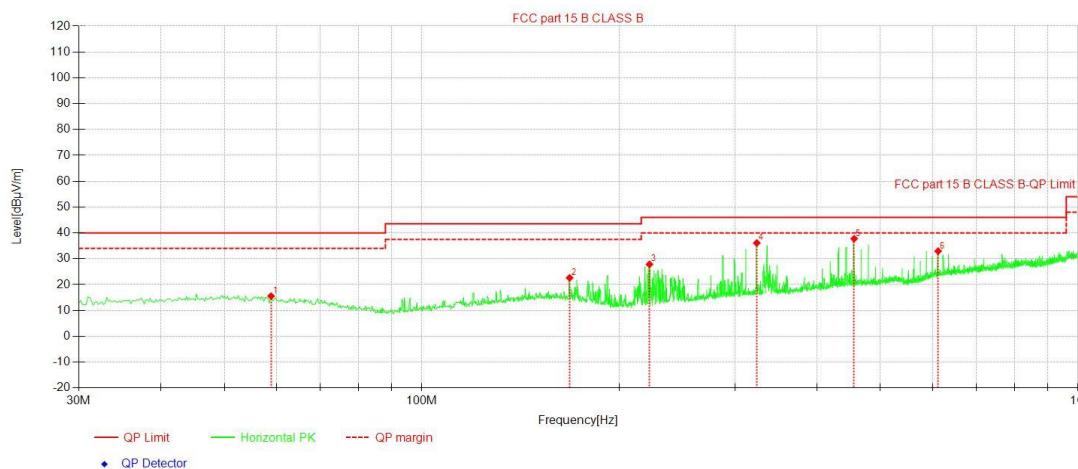


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	58.91	24.20	-8.65	15.55	40.00	24.45	100	178	PK	Horizontal
2	167.96	30.77	-8.15	22.62	43.50	20.88	200	96	PK	Horizontal
3	222.29	38.88	-11.04	27.84	46.00	18.16	100	277	PK	Horizontal
4	323.97	42.28	-6.16	36.12	46.00	9.88	100	72	PK	Horizontal
5	455.92	40.44	-2.68	37.76	46.00	8.24	200	90	PK	Horizontal
6	612.12	32.00	0.95	32.95	46.00	13.05	100	272	PK	Horizontal




For above 1GHz

DH5 2402MHz

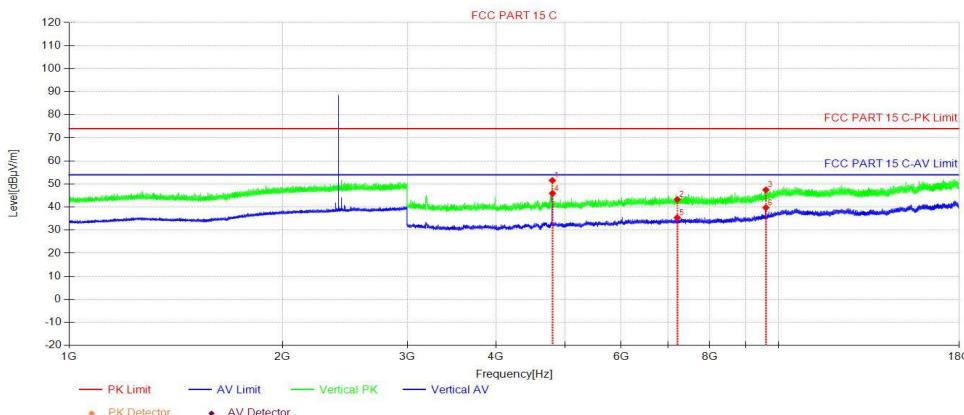


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4803.84	56.15	-4.61	51.54	74.00	22.46	150	110	Peak	Vertical
2	7206.21	45.02	-1.76	43.26	74.00	30.74	150	349	Peak	Vertical
3	9608.58	46.57	0.88	47.45	74.00	26.55	150	58	Peak	Vertical
4	4804.59	50.57	-4.61	45.96	54.00	8.04	150	93	AV	Vertical
5	7206.21	37.15	-1.76	35.39	54.00	18.61	150	360	AV	Vertical
6	9608.58	38.86	0.88	39.74	54.00	14.26	150	165	AV	Vertical

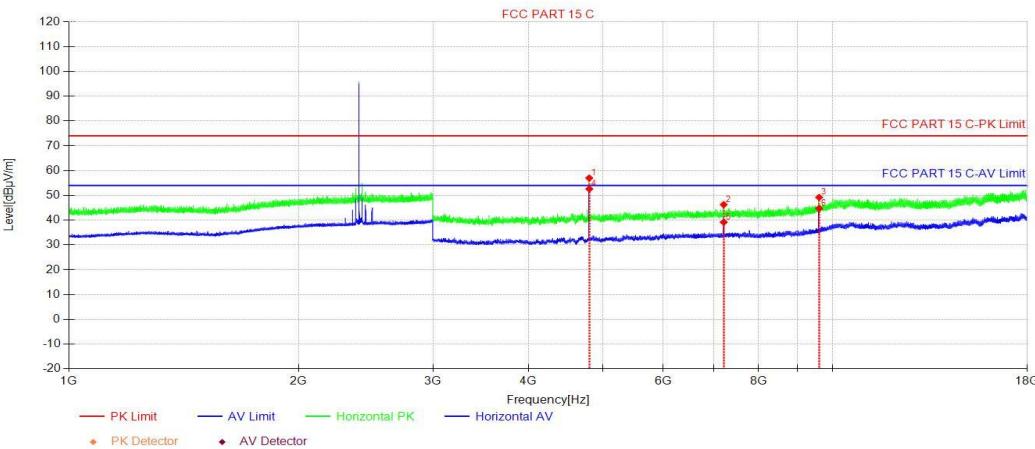


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4803.84	61.60	-4.61	56.99	74.00	17.01	150	56	PK	Horizon
2	7206.21	48.01	-1.76	46.25	74.00	27.75	150	310	PK	Horizon
3	9608.58	48.31	0.88	49.19	74.00	24.81	150	360	PK	Horizon
4	4804.59	57.21	-4.61	52.60	54.00	1.40	150	74	AV	Horizon
5	7206.21	40.94	-1.76	39.18	54.00	14.82	150	272	AV	Horizon
6	9608.58	43.85	0.88	44.73	54.00	9.27	150	360	AV	Horizon



DH5 2441MHz

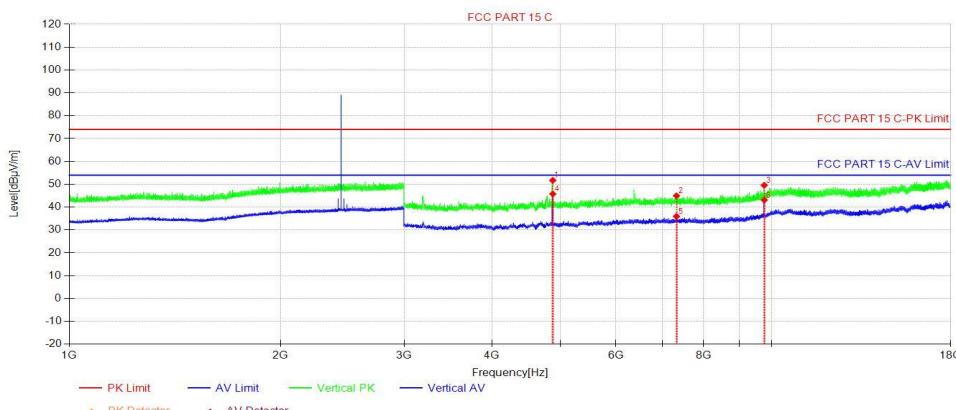


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4881.84	56.43	-4.72	51.71	74.00	22.29	150	108	Peak	Vertical
2	7323.22	46.45	-1.49	44.96	74.00	29.04	150	40	Peak	Vertical
3	9764.59	47.92	1.64	49.56	74.00	24.44	150	341	Peak	Vertical
4	4882.59	50.47	-4.72	45.75	54.00	8.25	150	341	AV	Vertical
5	7323.22	37.41	-1.49	35.92	54.00	18.08	150	288	AV	Vertical
6	9764.59	41.46	1.64	43.10	54.00	10.90	150	323	AV	Vertical

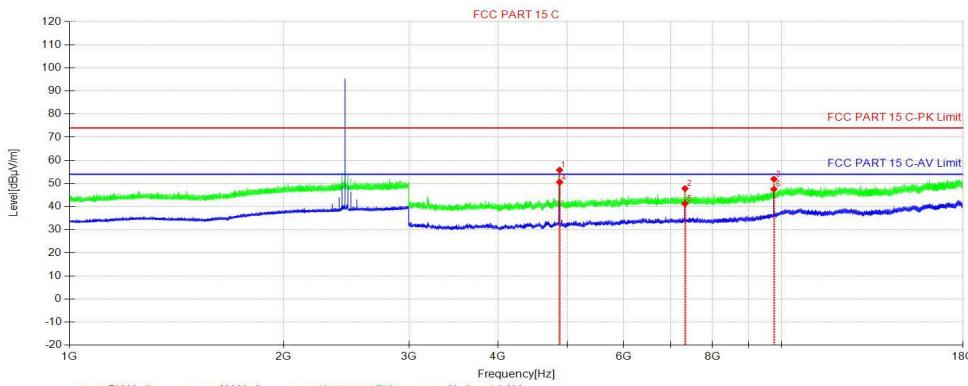


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4881.84	60.49	-4.72	55.77	74.00	18.23	150	56	Peak	Horizon
2	7323.22	49.29	-1.49	47.80	74.00	26.20	150	271	Peak	Horizon
3	9764.59	50.25	1.64	51.89	74.00	22.11	150	307	Peak	Horizon
4	4882.59	55.28	-4.72	50.56	54.00	3.44	150	56	AV	Horizon
5	7323.97	42.75	-1.49	41.26	54.00	12.74	150	271	AV	Horizon
6	9764.59	45.87	1.64	47.51	54.00	6.49	150	307	AV	Horizon



## DH5 2480MHz

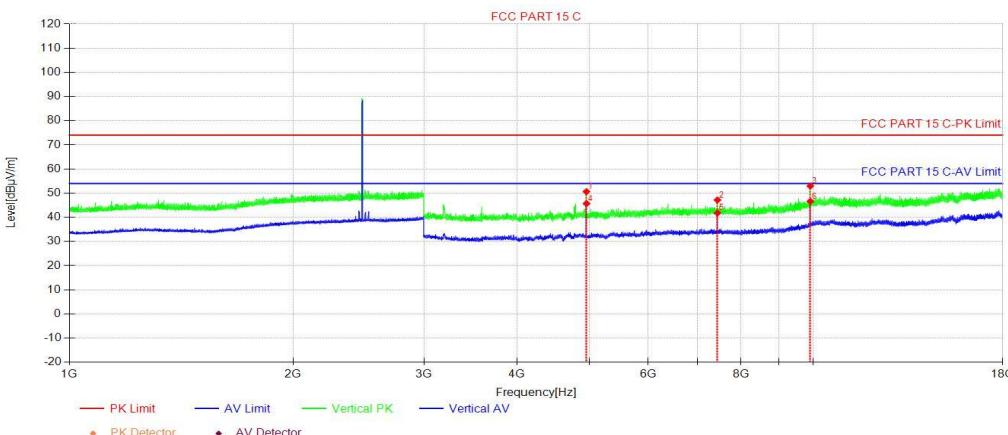

NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4959.85	55.48	-4.86	50.62	74.00	23.38	150	93	Peak	Vertical
2	7440.22	48.50	-1.34	47.16	74.00	26.84	150	293	Peak	Vertical
3	9919.85	50.70	2.26	52.96	74.00	21.04	150	273	Peak	Vertical
4	4960.60	50.55	-4.86	45.69	54.00	8.31	150	93	AV	Vertical
5	7440.97	43.12	-1.34	41.78	54.00	12.22	150	293	AV	Vertical
6	9920.60	44.32	2.27	46.59	54.00	7.41	150	273	AV	Vertical

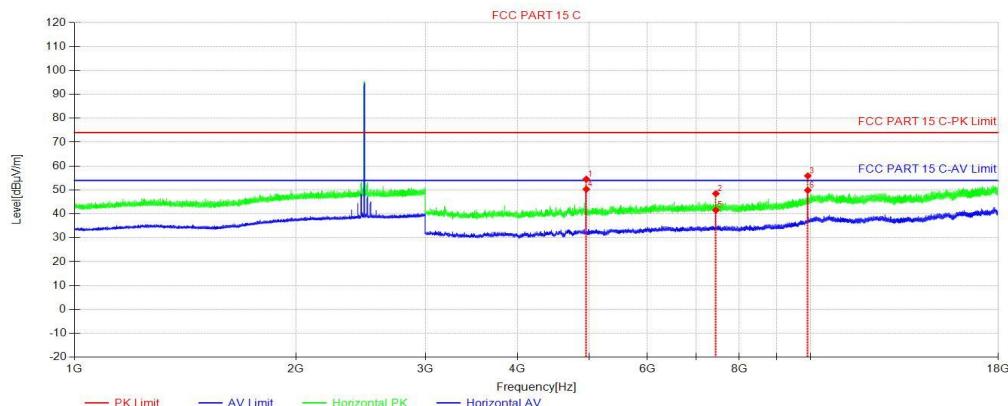

NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	4959.85	59.38	-4.86	54.52	74.00	19.48	150	55	Peak	Horizon
2	7440.22	49.82	-1.34	48.48	74.00	25.52	150	268	Peak	Horizon
3	9919.85	53.63	2.26	55.89	74.00	18.11	150	357	Peak	Horizon
4	4960.60	55.17	-4.86	50.31	54.00	3.69	150	55	AV	Horizon
5	7440.97	42.88	-1.34	41.54	54.00	12.46	150	252	AV	Horizon
6	9920.60	47.59	2.27	49.86	54.00	4.14	150	360	AV	Horizon



Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor, Cable Factor etc. )

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test,DH5 is the worst case, only the worst case was reported.

### 3.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

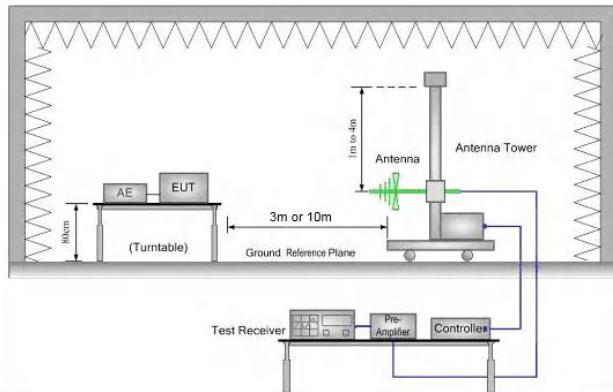


Figure 1. 30MHz to 1GHz

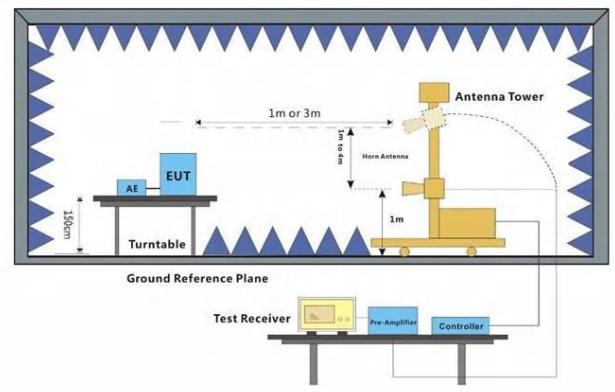


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> <li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>Test the EUT in the lowest channel, the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>
Test Configuration:	Measurements Below 1000MHz

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: [www.dn-testing.com](http://www.dn-testing.com)

Tel: +86-769-88087383

E-mail: [service@dn-testing.com](mailto:service@dn-testing.com)




	<ul style="list-style-type: none"><li>• RBW = 120 kHz</li><li>• VBW = 300 kHz</li><li>• Detector = Peak</li><li>• Trace mode = max hold</li></ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW <math>\geq 3</math> MHz</li><li>• Detector = Peak</li><li>• Sweep time = auto</li><li>• Trace mode = max hold</li></ul> <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW = 10 Hz, when duty cycle is no less than 98 percent.</li><li>• VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum</li></ul> <p>transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT Transmitting mode. Through Pre-scan, find the DH5 of data type is the worst case of all modulation type. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass




Test Date

DH5 2402MHz

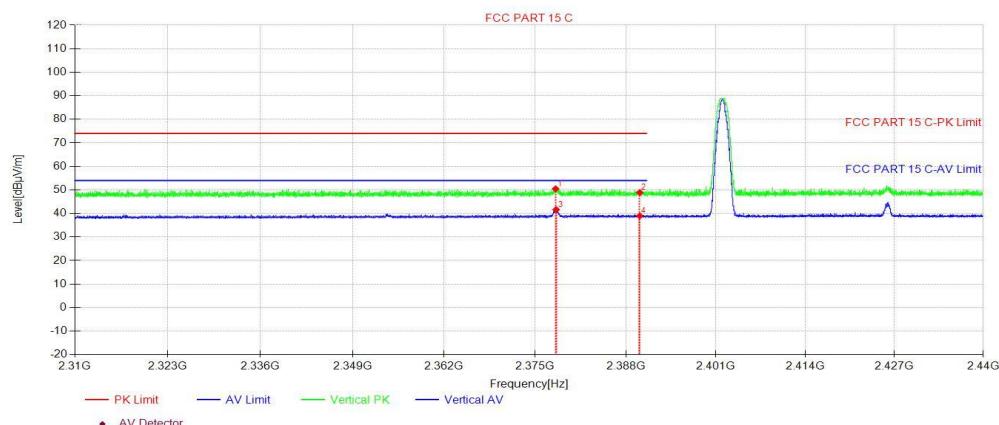


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2377.92	51.32	-0.84	50.48	74.00	23.52	150	205	Peak	Vertical
2	2390.01	49.70	-0.80	48.90	74.00	25.10	150	340	Peak	Vertical
3	2378.00	42.48	-0.84	41.64	54.00	12.36	150	295	AV	Vertical
4	2390.01	39.75	-0.80	38.95	54.00	15.05	150	3	AV	Vertical

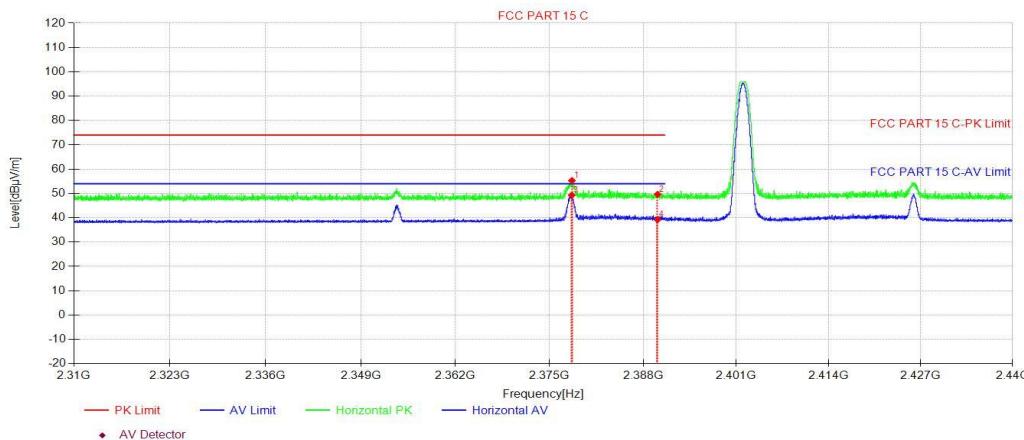


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2378.10	56.12	-0.84	55.28	74.00	18.72	150	277	Peak	Horizon
2	2390.01	50.40	-0.80	49.60	74.00	24.40	150	277	Peak	Horizon
3	2378.07	50.11	-0.84	49.27	54.00	4.73	150	277	AV	Horizon
4	2390.01	40.02	-0.80	39.22	54.00	14.78	150	321	AV	Horizon

## DH5 2480MHz

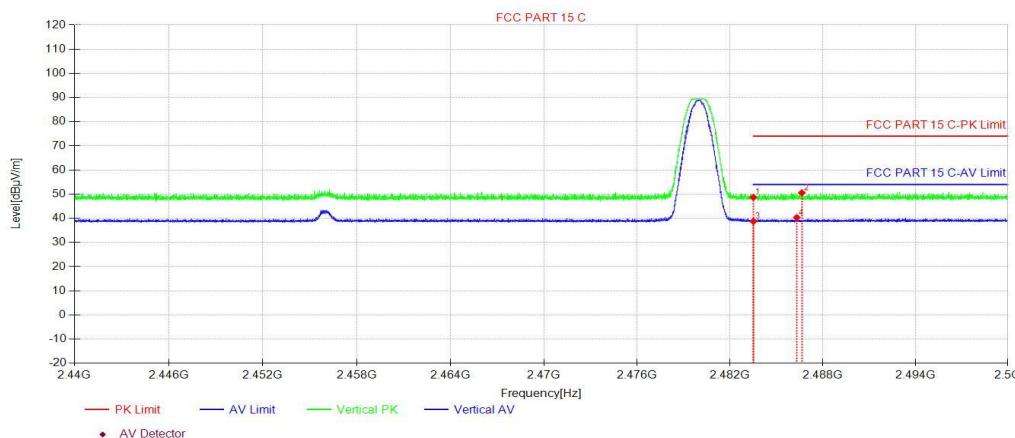

NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2483.50	48.97	-0.29	48.68	74.00	25.32	150	38	Peak	Vertical
2	2486.64	50.81	-0.26	50.55	74.00	23.45	150	229	Peak	Vertical
3	2483.50	39.02	-0.29	38.73	54.00	15.27	150	50	AV	Vertical
4	2486.31	40.59	-0.26	40.33	54.00	13.67	150	15	AV	Vertical

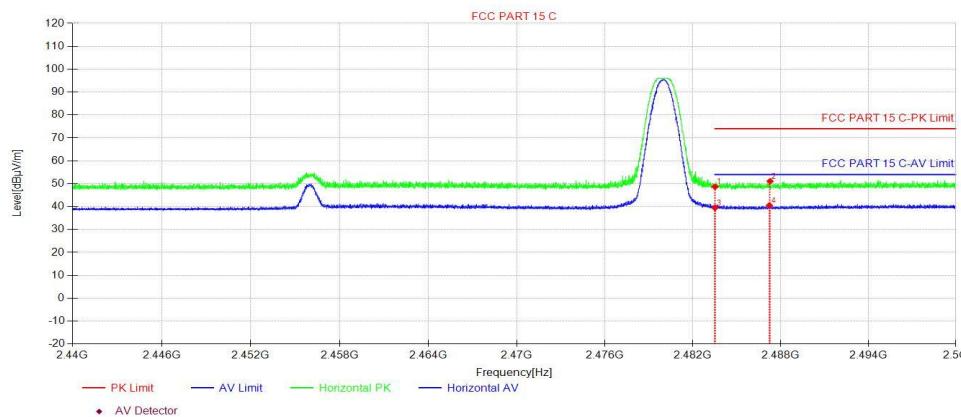

NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark	Polarity
1	2483.51	48.96	-0.29	48.67	74.00	25.33	150	357	Peak	Horizon
2	2487.27	51.31	-0.26	51.05	74.00	22.95	150	263	Peak	Horizon
3	2483.51	39.77	-0.29	39.48	54.00	14.52	150	275	AV	Horizon
4	2487.22	40.76	-0.26	40.50	54.00	13.50	150	275	AV	Horizon

## Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor ,Cable Factor etc.

2.All channels had been pre-test, DH5 is the worst case, only the worst case was reported.

### 3.11 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207															
Test Method:	ANSI C63.10: 2013															
Test Frequency Range:	150kHz to 30MHz															
Limit:	<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														
Test Procedure:	<p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2013 on conducted measurement.</p>															
Test Setup:																
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.</p> <p>Charge + Transmitting mode.</p>															




Final Test Mode:	Through Pre-scan, find the the worst case.
Instruments Used:	Refer to section 2.9 for details
Test Results:	PASS

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

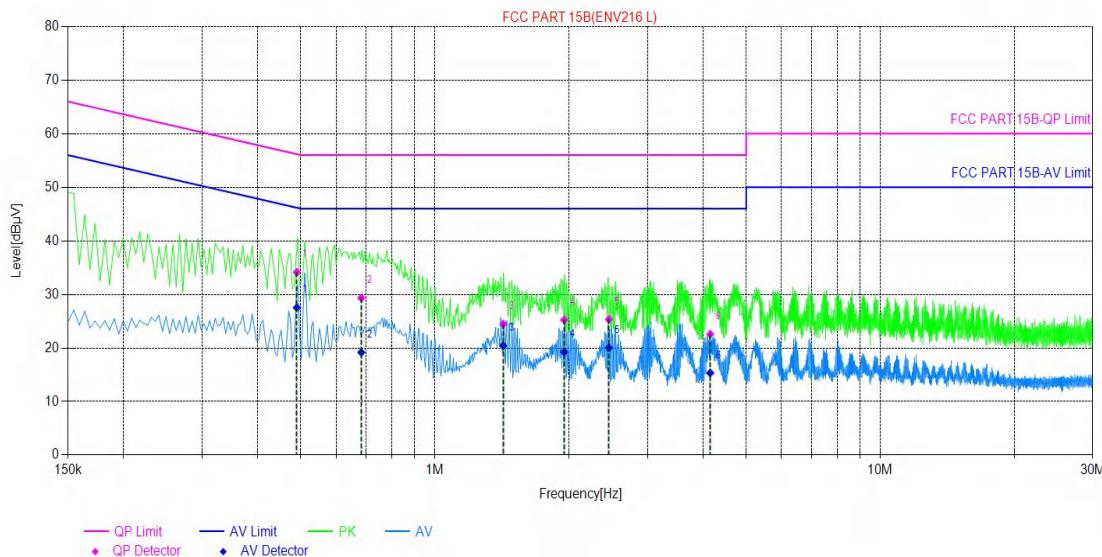


### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	AV Value [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]	Verdict
1	0.4897	9.87	34.14	56.17	22.03	27.52	46.17	18.65	PASS
2	0.6835	9.77	29.32	56.00	26.68	19.17	46.00	26.83	PASS
3	1.4235	9.73	24.46	56.00	31.54	20.43	46.00	25.57	PASS
4	1.9513	9.74	25.22	56.00	30.78	19.24	46.00	26.76	PASS
5	2.4589	9.74	25.33	56.00	30.67	20.03	46.00	25.97	PASS
6	4.1515	9.75	22.57	56.00	33.43	15.33	46.00	30.67	PASS



Neutral Line:

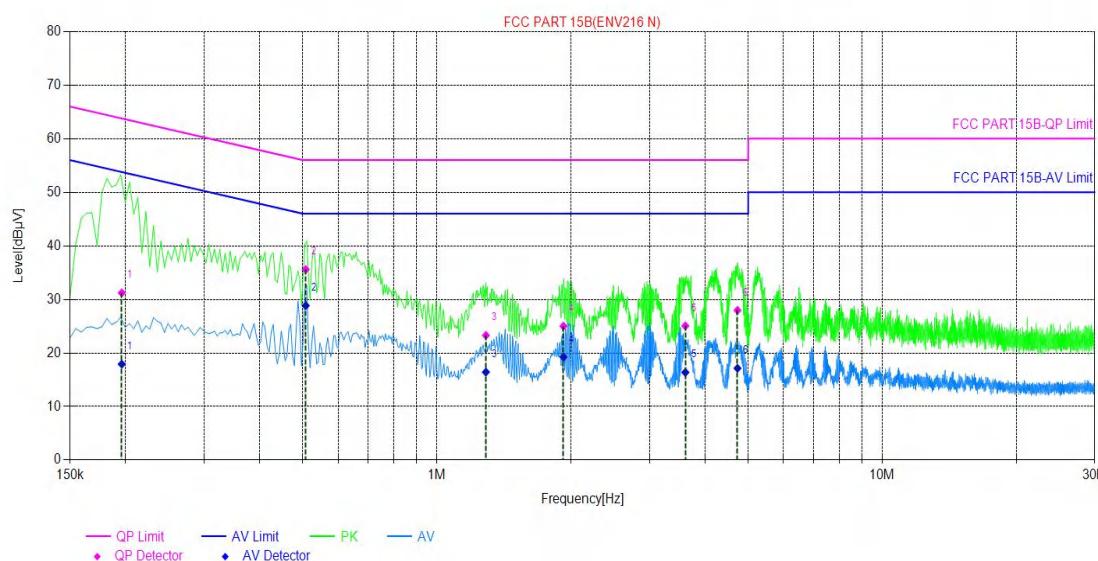

### Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	AV Value [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]	Verdict
1	0.1960	9.85	31.22	63.78	32.56	17.91	53.78	35.87	PASS
2	0.5075	9.72	35.59	56.00	20.41	28.83	46.00	17.17	PASS
3	1.2881	9.71	23.28	56.00	32.72	16.43	46.00	29.57	PASS
4	1.9240	9.76	25.00	56.00	31.00	19.23	46.00	26.77	PASS
5	3.6127	9.93	25.04	56.00	30.96	16.37	46.00	29.63	PASS
6	4.7308	9.97	27.95	56.00	28.05	17.14	46.00	28.86	PASS

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor etc)



## 4 Appendix

### Appendix A: 20dB Emission Bandwidth


#### Test Result

TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.047	2401.478	2402.525	---	---
		2441	1.053	2440.472	2441.525	---	---
		2480	1.074	2479.454	2480.528	---	---
2DH5	Ant1	2402	1.329	2401.337	2402.666	---	---
		2441	1.329	2440.340	2441.669	---	---
		2480	1.362	2479.328	2480.690	---	---
3DH5	Ant1	2402	1.323	2401.343	2402.666	---	---
		2441	1.317	2440.349	2441.666	---	---
		2480	1.356	2479.325	2480.681	---	---




## Test Graphs


DH5 Ant1\_2402

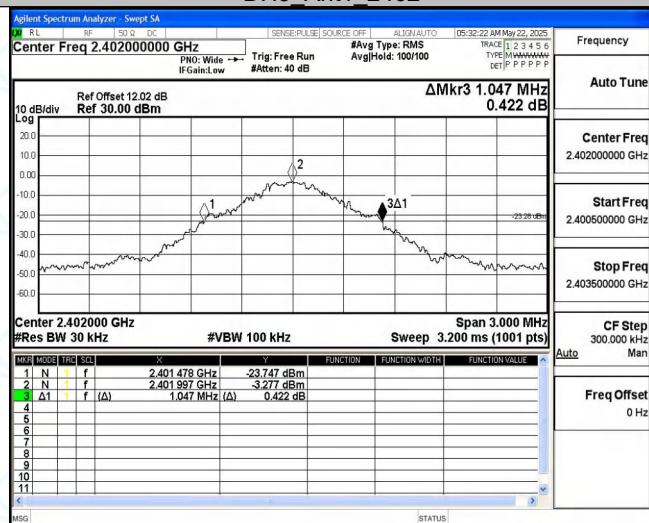

DH5 Ant1\_2441

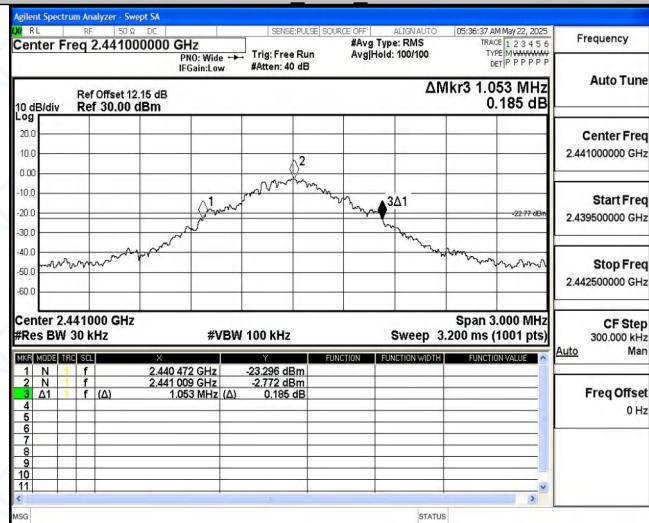


DH5 Ant1\_2480

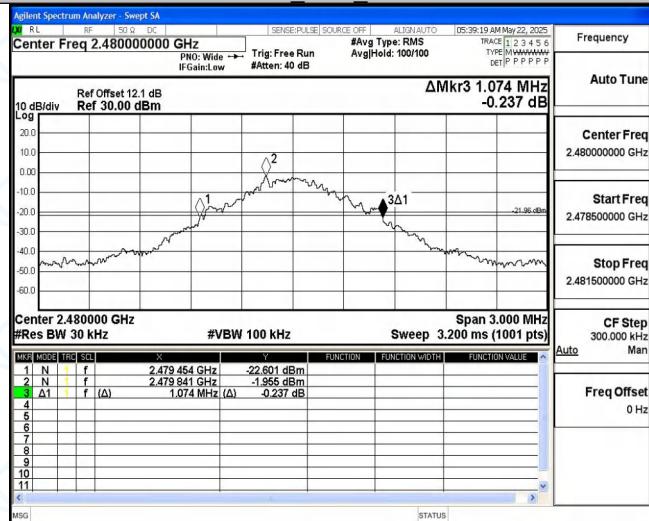





## 2DH5 Ant1 2402

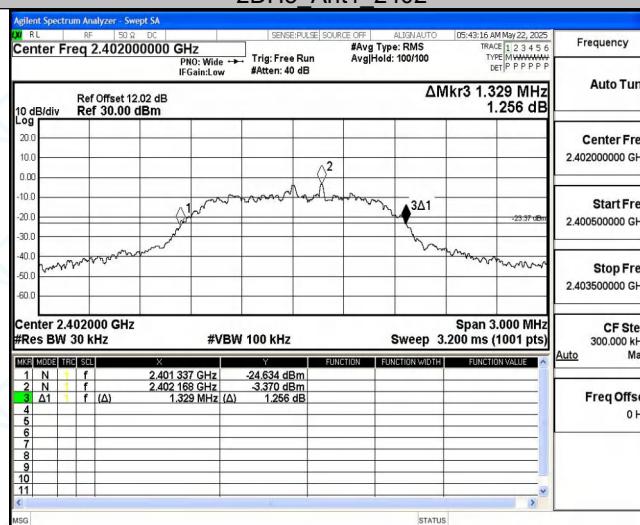

## 2DH5 Ant1 2441

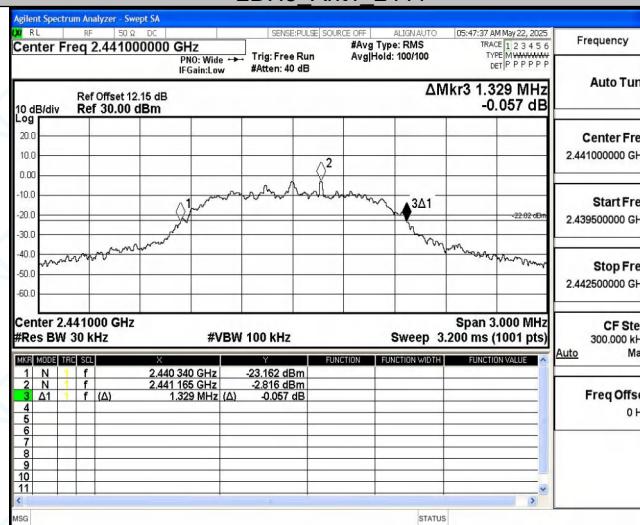


## 2DH5 Ant1 2480

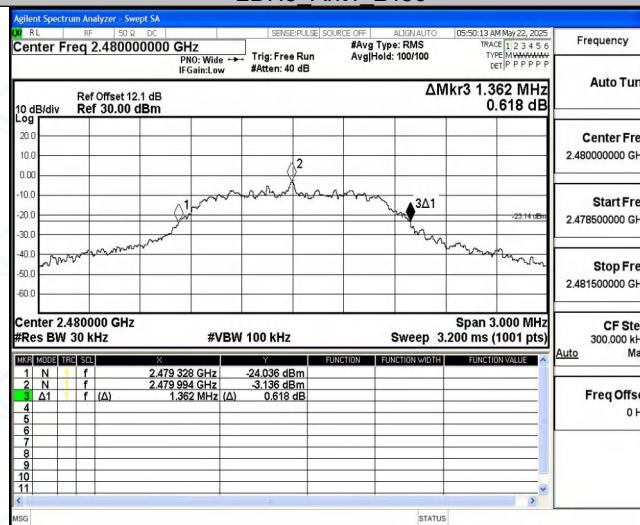




## 3DH5 Ant1 2402

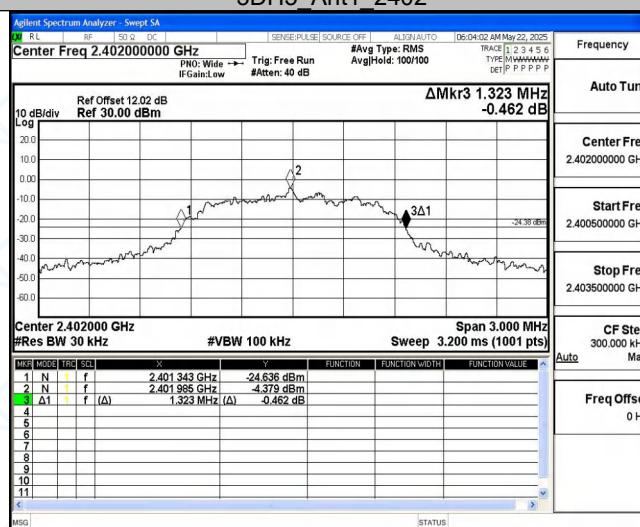

## 3DH5 Ant1 2441

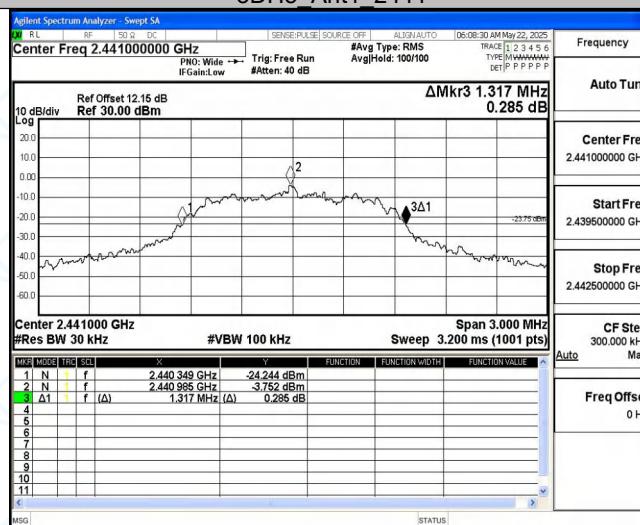

## 3DH5 Ant1 2480

