
FCC Test Report

Report No.: AGC04900160702FE03

FCC ID : 2AANZUSARCMRP
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Remote Control for RC Army Car
BRAND NAME : N/A
MODEL NAME : USA-RC-MRP
CLIENT : DGL Group LTD.
DATE OF ISSUE : July 26, 2016
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) :
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | July 26, 2016 | Valid | Original Report |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. VERIFICATION OF CONFORMITY..... | 4 |
| 2. GENERAL INFORMATION | 5 |
| 3. MEASUREMENT UNCERTAINTY | 6 |
| 4. DESCRIPTION OF TEST MODES | 6 |
| 5. SYSTEM TEST CONFIGURATION..... | 7 |
| 5.1. CONFIGURATION OF EUT SYSTEM..... | 7 |
| 5.2. EQUIPMENT USED IN EUT SYSTEM..... | 7 |
| 5.3. SUMMARY OF TEST RESULTS..... | 7 |
| 6. TEST FACILITY..... | 8 |
| 7. RADIATED EMISSION..... | 9 |
| 7.1 TEST LIMIT | 9 |
| 7.2. MEASUREMENT PROCEDURE | 10 |
| 7.3. TEST SETUP | 11 |
| 7.4. TEST RESULT | 12 |
| 8. 20DB BANDWIDTH..... | 15 |
| 8.1. MEASUREMENT PROCEDURE | 15 |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 15 |
| 8.3. MEASUREMENT RESULTS | 16 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP..... | 17 |
| APPENDIX B: PHOTOGRAPHS OF EUT..... | 18 |


1. VERIFICATION OF CONFORMITY

| | |
|---------------------------------|---|
| Applicant | DGL Group LTD. |
| Address | 195 Raritan Center Parkway Edison, New Jersey United States 08837 |
| Manufacturer | DGL Group LTD. |
| Address | 195 Raritan Center Parkway Edison, New Jersey United States 08837 |
| Product Designation | Remote Control for RC Army Car |
| Brand Name | N/A |
| Test Model | USA-RC-MRP |
| Date of test | July 04, 2016 to July 07, 2016 |
| Deviation | None |
| Condition of Test Sample | Normal |
| Report Template | AGCRT-US-BR/RF |

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.227.


Tested by



Max Zhang(Zhang Yi)

July 26, 2016


Reviewed by



Rock Huang(Huang Dinglue)

July 26, 2016

Approved by



Solger Zhang(Zhang Hongyi)

Authorized Officer

July 26, 2016

2. GENERAL INFORMATION

A major technical description of EUT is described as following

| | |
|-------------------------------|---|
| Operation Frequency | 27.145MHz |
| Maximum field strength | 62.1 dB μ V/m@3m(AV) |
| Modulation | ASK |
| Number of channels | 1 |
| Antenna Gain | 0dBi |
| Antenna Designation | Wire Antenna (Met 15.203 Antenna requirement) |
| Hardware Version | WF160612T |
| Software Version | N/A |
| Power Supply | DC3V by battery |

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

| No. | Item | Uncertainty |
|-----|-------------------------|-------------------------|
| 1 | Conducted Emission Test | $\pm 3.18\text{dB}$ |
| 2 | All emissions, radiated | $\pm 3.91\text{dB}$ |
| 3 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 4 | Humidity | $\pm 2\%$ |

4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION |
|-----|-----------------------|
| 1 | TX ON |
| 4 | TX OFF |

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure :



5.2. EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment | Model No. | ID or Specification | Remark |
|------|--------------------------------|------------|----------------------|--------|
| 1 | Remote Control for RC Army Car | USA-RC-MRP | FCC ID:2AANZUSARCMRP | EUT |

5.3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT |
|-----------|---------------------|-----------|
| §15.227 | Radiated Emission | Compliant |
| §15.215 | 20dB bandwidth | Compliant |

6. TEST FACILITY

| | |
|-----------------------------|---|
| Site | Dongguan Precise Testing Service Co., Ltd. |
| Location | Building D, Baoding Technology Park, Guangming Road 2, Dongcheng District, Dongguan, Guangdong, China. |
| FCC Registration No. | 371540 |
| Description | The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013. |

ALL TEST EQUIPMENT LIST

| Radiated Emission Test Site | | | | | |
|-------------------------------------|-----------------|--------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| EMI Test Receiver | Rohde & Schwarz | ESCI | 101417 | July 3, 2016 | July 2, 2017 |
| Trilog Broadband Antenna (25M-1GHz) | SCHWARZBECK | VULB9160 | 9160-3355 | July 3, 2016 | July 2, 2017 |
| Signal Amplifier | SCHWARZBECK | BBV 9475 | 9745-0013 | July 3, 2016 | July 2, 2017 |
| RF Cable | SCHWARZBECK | AK9515E | 96221 | July 3, 2016 | July 2, 2017 |
| 3m Anechoic Chamber | CHENGYU | 966 | PTS-001 | June 3, 2016 | June 2, 2017 |
| MULTI-DEVICE Positioning Controller | Max-Full | MF-7802 | MF780208339 | N/A | N/A |
| Active loop antenna (9K-30MHz) | Schwarzbeck | FMZB1519 | 1519-038 | June 3, 2016 | June 2, 2017 |
| Spectrum analyzer | Agilent | E4407B | MY46185649 | June 3, 2016 | June 2, 2017 |

7. RADIATED EMISSION

7.1 TEST LIMIT

Standard FCC15.227

| Fundamental Frequency | Field Strength of Fundamental (micro volts/meter) AV Detector | Field Strength of Fundamental (micro volts/meter) PK Detector |
|-----------------------|--|--|
| 26.96-27.28MHz | 10000(80 dB μ V/m) | 100000(100 dB μ V/m) |

Standard FCC 15.209

| Frequency (MHz) | Distance Meters | Field Strengths Limit | |
|--------------------|--------------------|--|----------------|
| | | μ V/m | dB(μ V)/m |
| 0.009 ~ 0.490 | 300 | 2400/F(kHz) | --- |
| 0.490 ~ 1.705 | 30 | 24000/F(kHz) | --- |
| 1.705 ~ 30 | 30 | 30 | --- |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average) | |

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |


| Receiver Parameter | Setting |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |

7.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

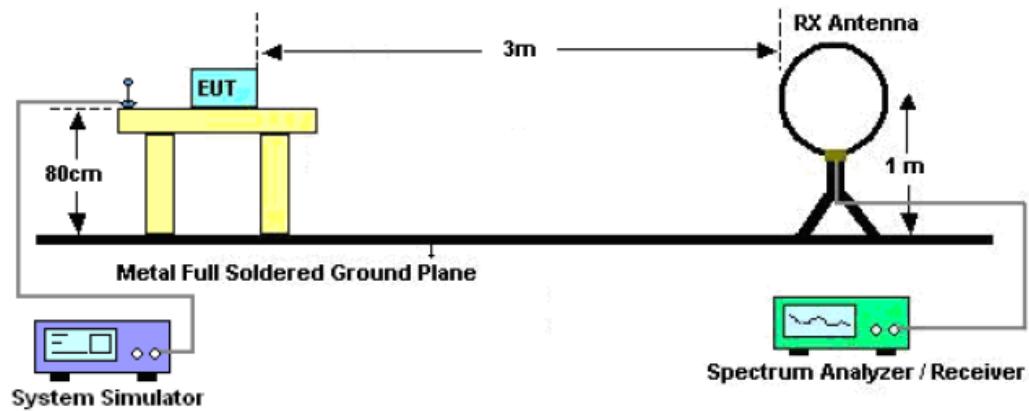

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

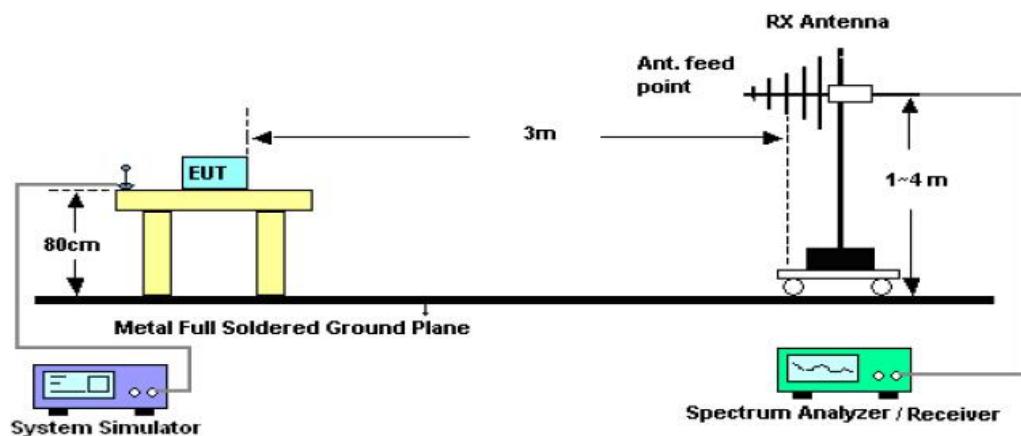

7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ


| | | | |
|---------------|--------------------------------|---------------------|------------|
| EUT : | Remote Control for RC Army Car | Model Name. : | USA-RC-MRP |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010 hPa | Test Voltage : | DC3V |
| Test Mode : | Mode 1 | Polarization : | -- |

| Frequency MHz | Polarization | Reading dB(uV) PK | Factor dB (1/m) | Level dB(uV/m) PK | Limit dB(uV/m) PK | Margin dB | Pass/Fail |
|------------------|--------------|-------------------------|-----------------------|-------------------------|-------------------------|--------------|-----------|
| 27.145 | Face | 48.9 | 14.5 | 63.4 | 100 | 36.6 | Pass |
| 27.145 | Side | 41.5 | 14.5 | 56.0 | 100 | 44.0 | Pass |
| Frequency MHz | Polarization | Reading dB(uV) AV | Factor dB (1/m) | Level dB(uV/m) AV | Limit dB(uV/m) AV | Margin dB | Pass/Fail |
| 27.145 | Face | 46.6 | 14.5 | 62.1 | 80 | 17.9 | Pass |
| 27.145 | Side | 39.5 | 14.5 | 54.0 | 80 | 26.0 | Pass |

Note: Other emissions from 9 kHz to 30 MHz are considered as ambient noise. No recording in the test report.

RADIATED EMISSION 30MHz- 1GHZ


| | | | |
|---------------|--------------------------------|---------------------|------------|
| EUT : | Remote Control for RC Army Car | Model Name. : | USA-RC-MRP |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010 hPa | Test Voltage : | DC3V |
| Test Mode : | Mode 1 | Polarization : | Horizontal |

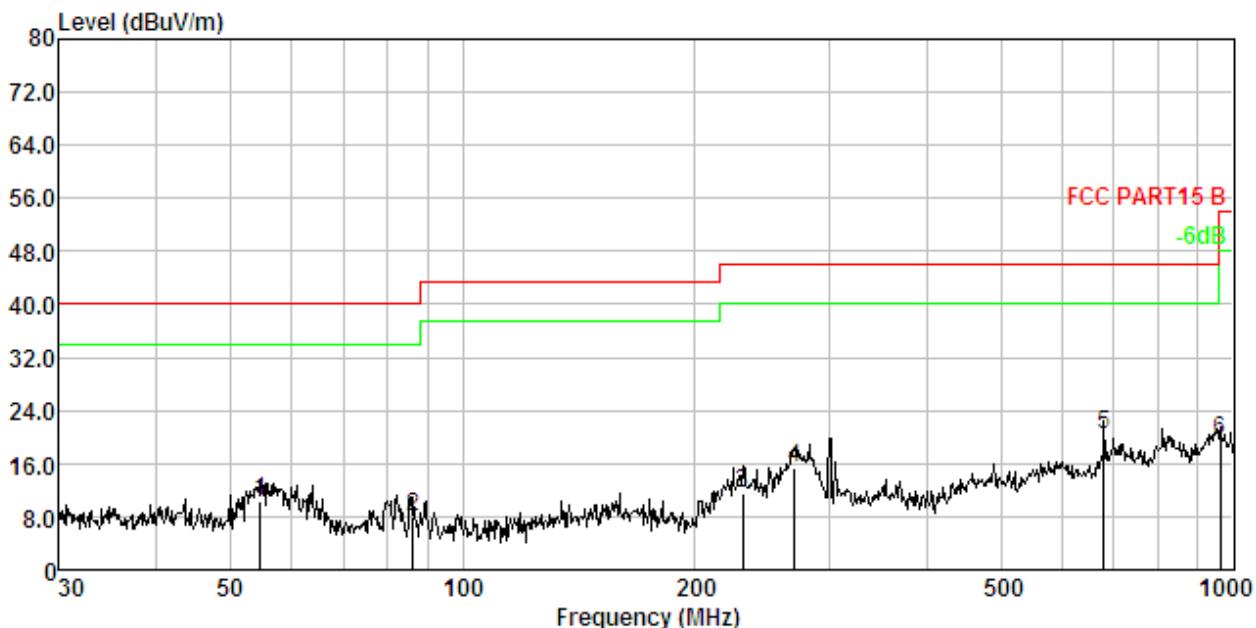

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1. | 54.643 | 1.60 | 11.93 | 27.12 | 30.18 | 10.47 | 40.00 | -29.53 | QP |
| 2. | 86.200 | 2.01 | 8.83 | 27.35 | 30.34 | 7.85 | 40.00 | -32.15 | QP |
| 3. | 230.907 | 2.90 | 11.29 | 28.11 | 30.68 | 11.62 | 46.00 | -34.38 | QP |
| 4. | 269.428 | 3.04 | 12.46 | 30.46 | 30.73 | 15.23 | 46.00 | -30.77 | QP |
| 5. | 679.960 | 3.88 | 19.88 | 27.73 | 31.06 | 20.43 | 46.00 | -25.57 | QP |
| 6. | 962.162 | 4.20 | 23.43 | 23.04 | 31.18 | 19.49 | 54.00 | -34.51 | QP |

RESULT: PASS

| | | | |
|---------------|--------------------------------|---------------------|------------|
| EUT : | Remote Control for RC Army Car | Model Name. : | USA-RC-MRP |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010 hPa | Test Voltage : | DC3V |
| Test Mode : | Mode 1 | Polarization : | Vertical |

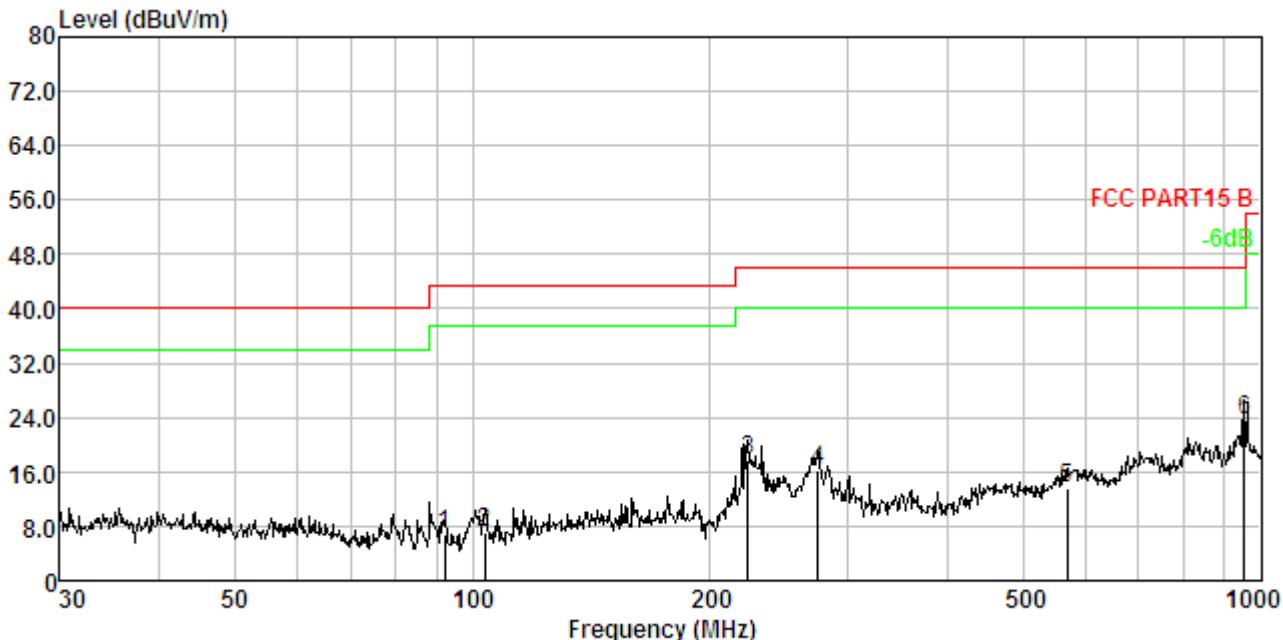

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1. | 92.139 | 2.07 | 9.49 | 25.71 | 30.36 | 6.91 | 43.50 | -36.59 | QP |
| 2. | 103.806 | 2.18 | 10.57 | 24.85 | 30.40 | 7.20 | 43.50 | -36.30 | QP |
| 3. | 223.733 | 2.87 | 10.94 | 34.45 | 30.67 | 17.59 | 46.00 | -28.41 | QP |
| 4. | 274.194 | 3.06 | 12.62 | 31.16 | 30.74 | 16.10 | 46.00 | -29.90 | QP |
| 5. | 568.613 | 3.72 | 18.37 | 22.34 | 30.99 | 13.44 | 46.00 | -32.56 | QP |
| 6. | 952.094 | 4.19 | 23.43 | 27.07 | 31.17 | 23.52 | 46.00 | -22.48 | QP |

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
2. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
3. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
4. Steps 1 through 3 might require iteration to adjust within the specified tolerances.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

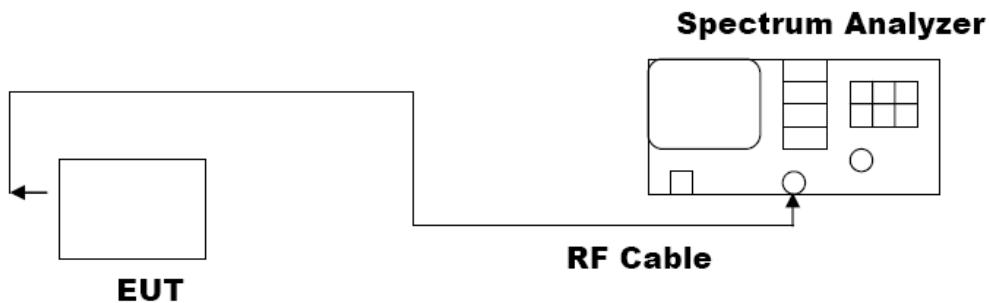

8.3. MEASUREMENT RESULTS


| | |
|-----------|----------------|
| TEST ITEM | 20DB BANDWIDTH |
| TEST MODE | Mode1 |

| Test Data (kz) | Criteria |
|-----------------|----------|
| Operate channel | 6.302 |

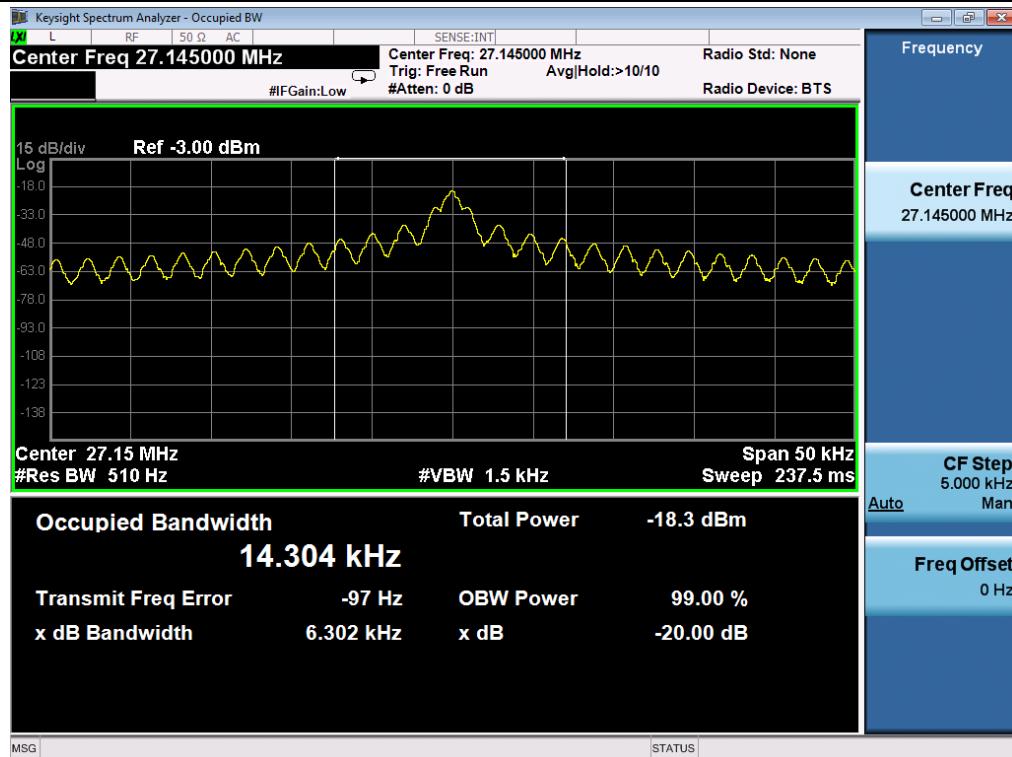


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHz

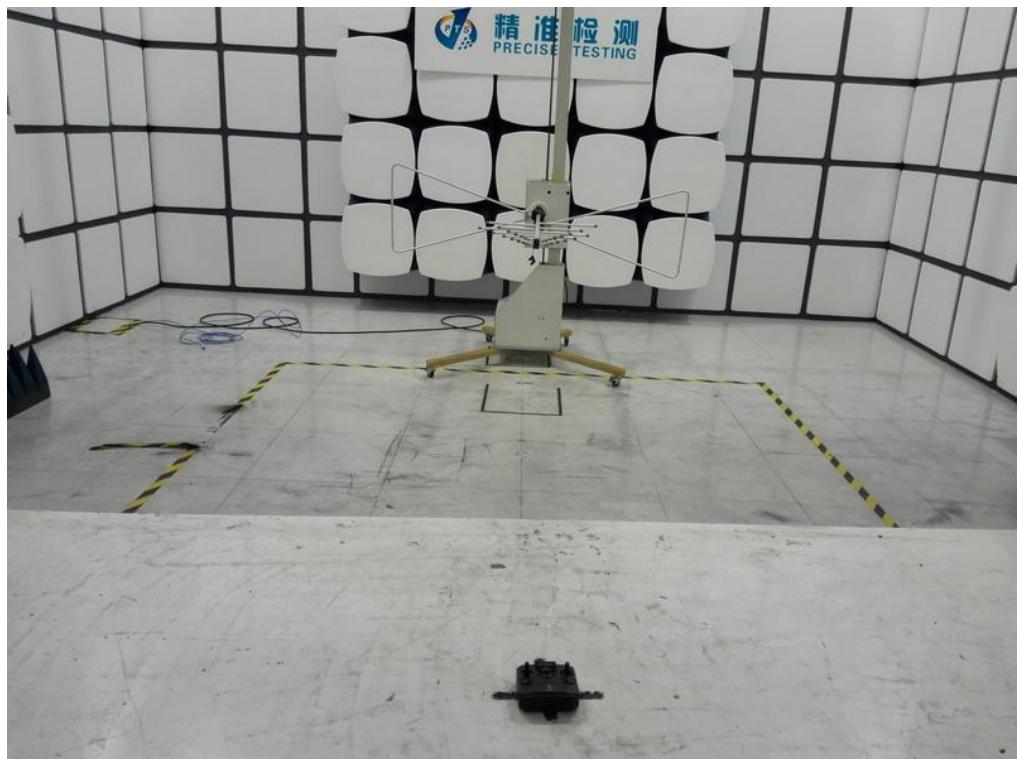

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT

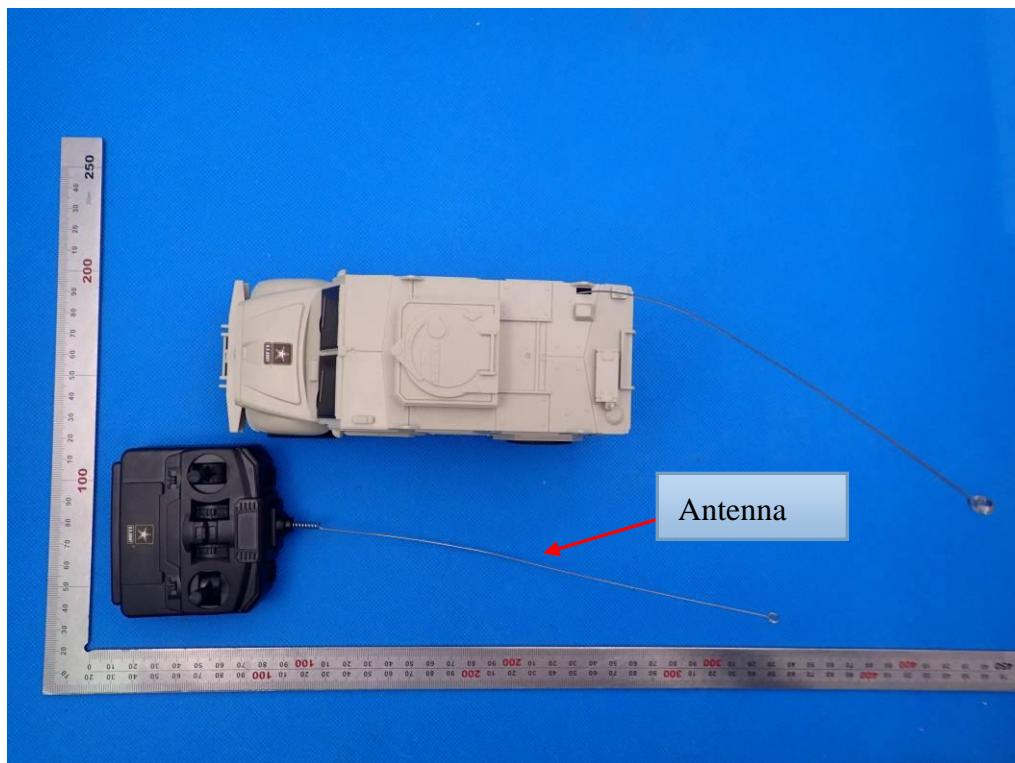

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT

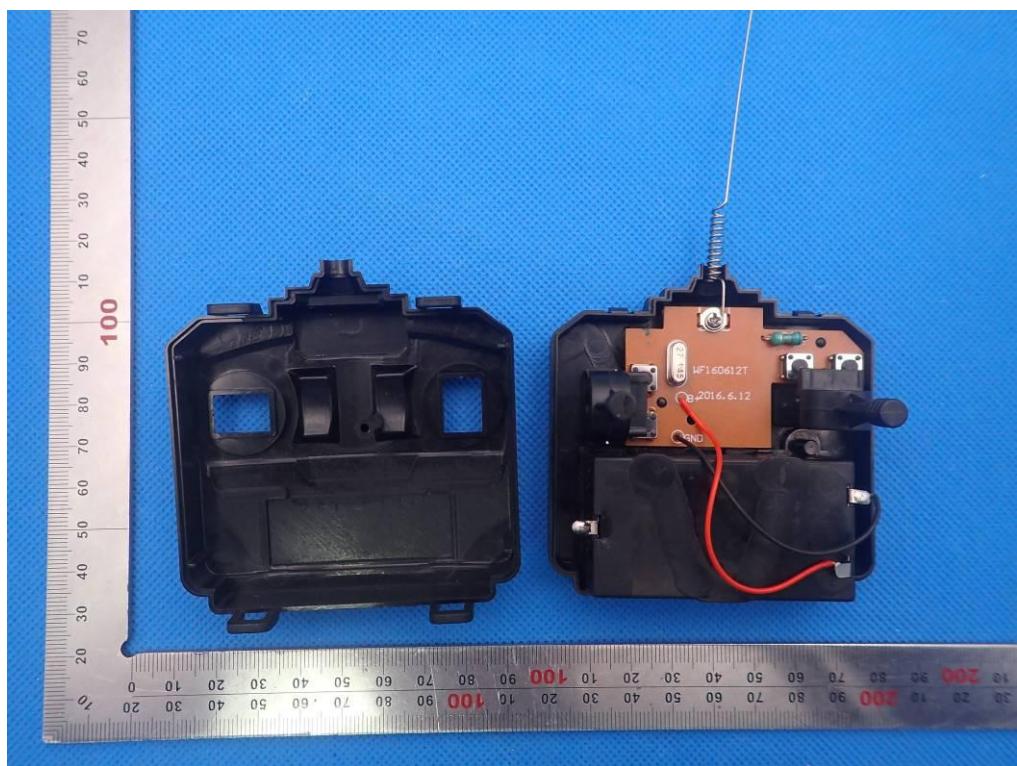

INTERNAL VIEW OF EUT-1

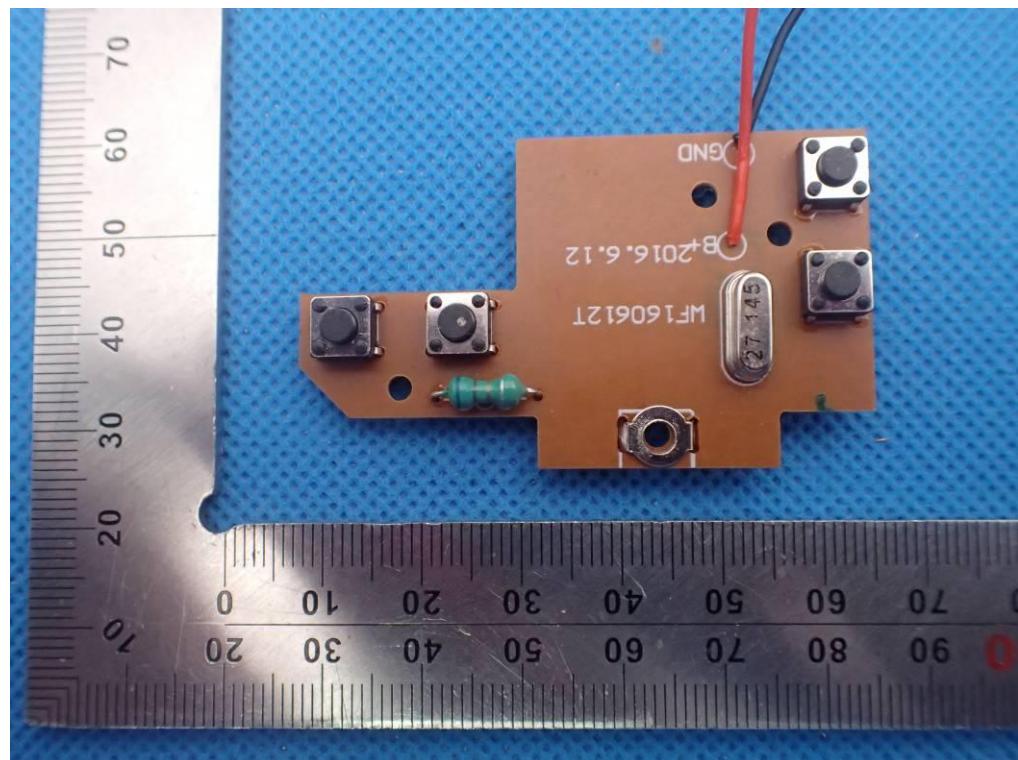

INTERNAL VIEW OF EUT-2

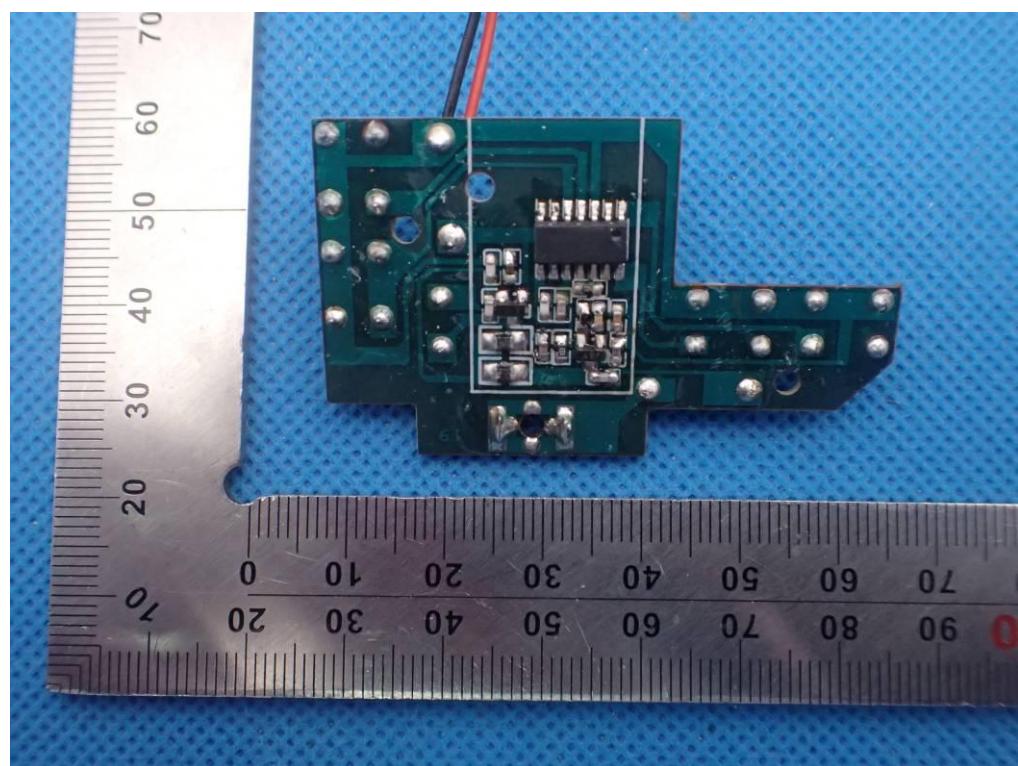

----END OF REPORT----