

Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2024/05/22

26_WLAN2.4GHz_802.11b-1M_CH11_Top_0mm_ANT Main

DUT: Speech Generating Device; Type: TDI-110

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.15, 7.15, 7.15) @ 2462 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.34 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.929 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 1.53 W/kg

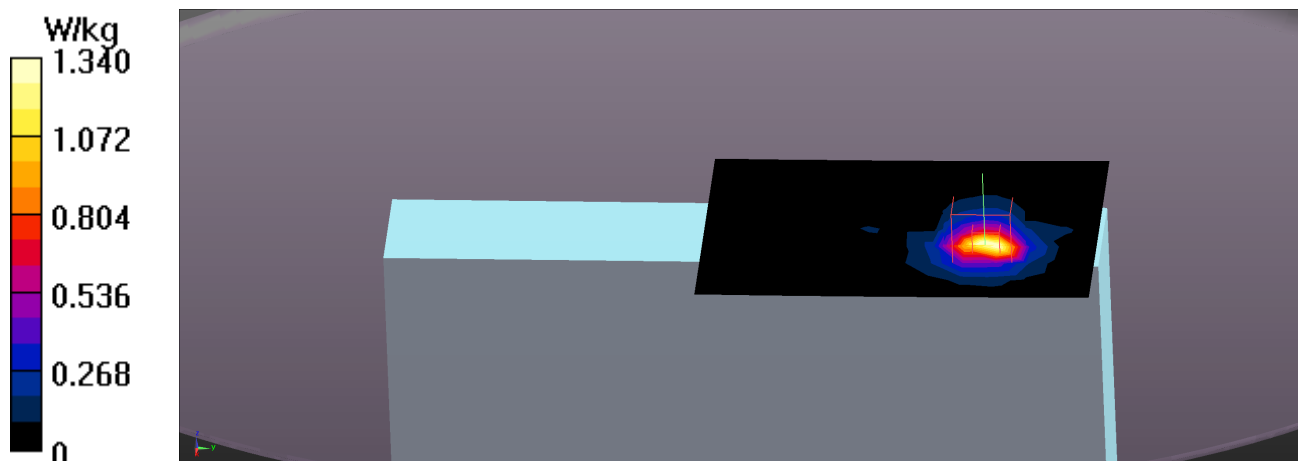

Test Laboratory: DEKRA

Date: 2024/05/22

39_Bluetooth_BT-1M_CH39_Top_0mm_ANT Aux**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.24$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.15, 7.15, 7.15) @ 2441 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (8x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.107 W/kg**Configuration/Flat/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.159 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.120 W/kg

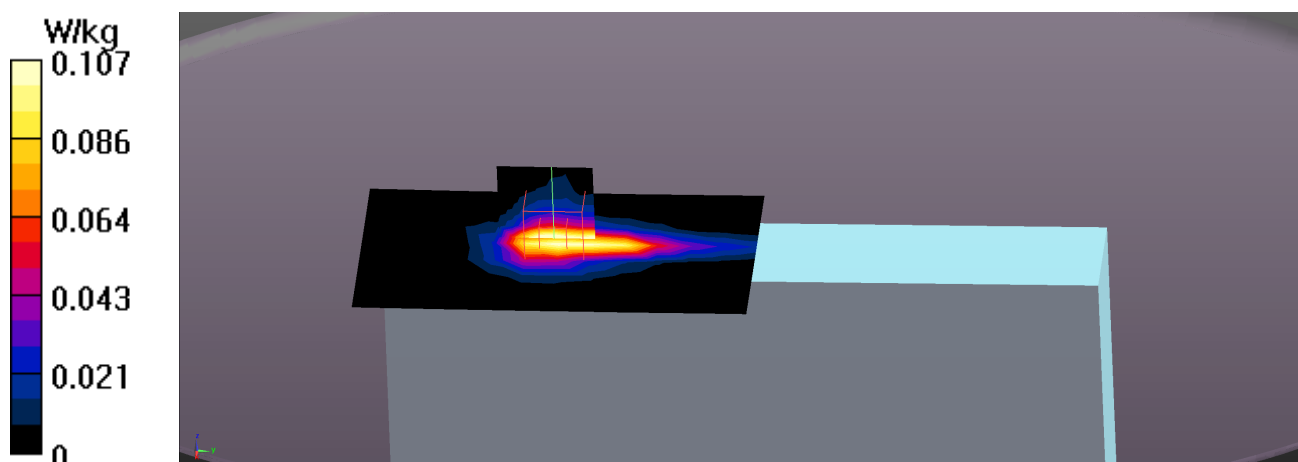

Test Laboratory: DEKRA

Date: 2024/05/23

27_WLAN5GHz_802.11ac-80M_CH58_Top_0mm_ANT Aux**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.83$ S/m; $\epsilon_r = 36.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.71, 4.71, 4.71) @ 5290 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (8x12x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.02 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.17 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 2.04 W/kg

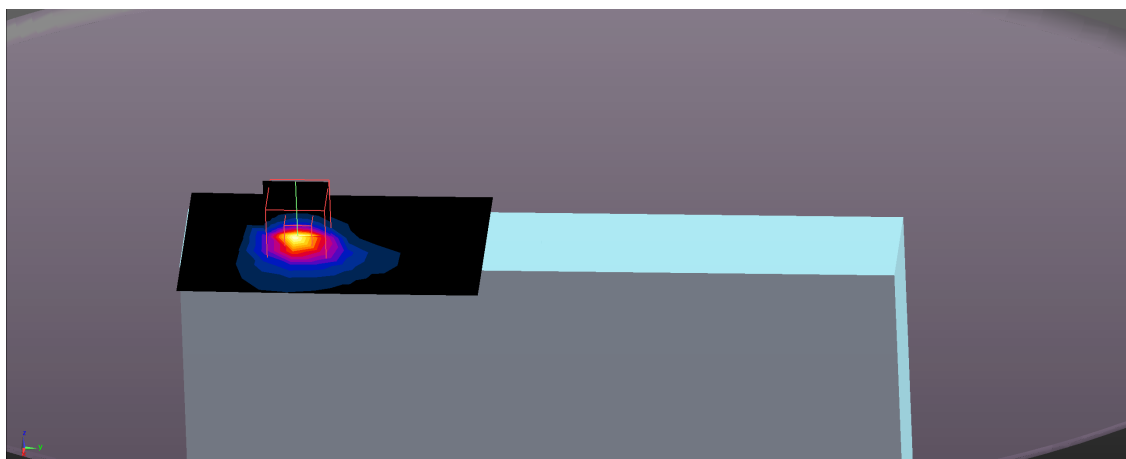

Test Laboratory: DEKRA

Date: 2024/05/23

33_WLAN5GHz_802.11ac-80M_CH138_Top_0mm_ANT Aux**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 35.22$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.41, 4.41, 4.41) @ 5690 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.59 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.39 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 1.83 W/kg

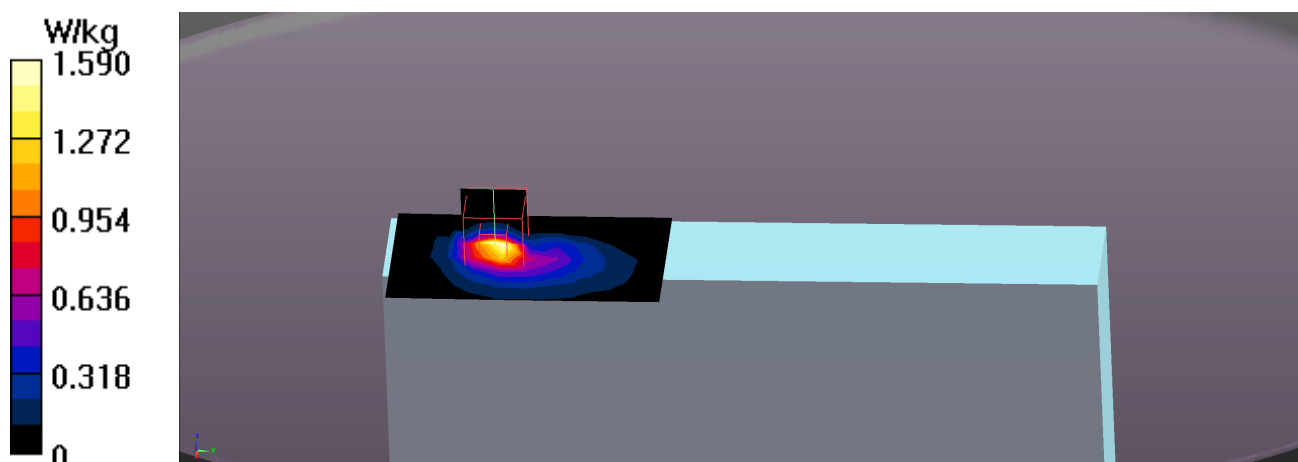

Test Laboratory: DEKRA

Date: 2024/05/23

29_WLAN5GHz_802.11ac-80M_CH155_Top_0mm_ANT Aux**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.48$ S/m; $\epsilon_r = 34.98$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.6, 4.6, 4.6) @ 5775 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.70 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.79 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 1.79 W/kg

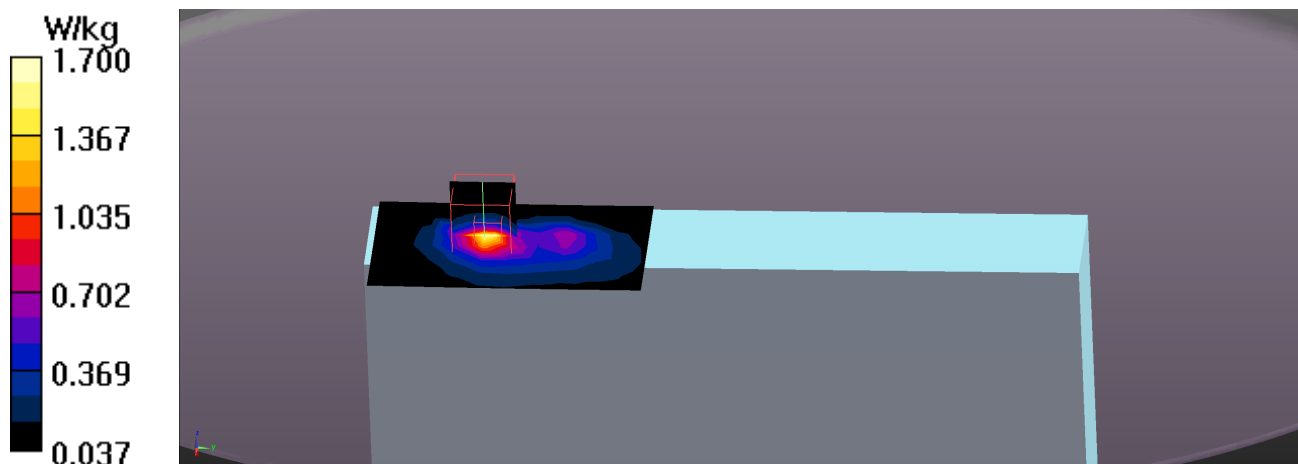

Test Laboratory: DEKRA

Date: 2024/05/23

30_WLAN5GHz_802.11ac-80M_CH171_Top_0mm_ANT Aux**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, WLAN 5G; Frequency: 5855 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5855$ MHz; $\sigma = 5.58$ S/m; $\epsilon_r = 34.76$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.6, 4.6, 4.6) @ 5855 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.84 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9390 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 0.791 W/kg; SAR(10 g) = 0.246 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 1.91 W/kg

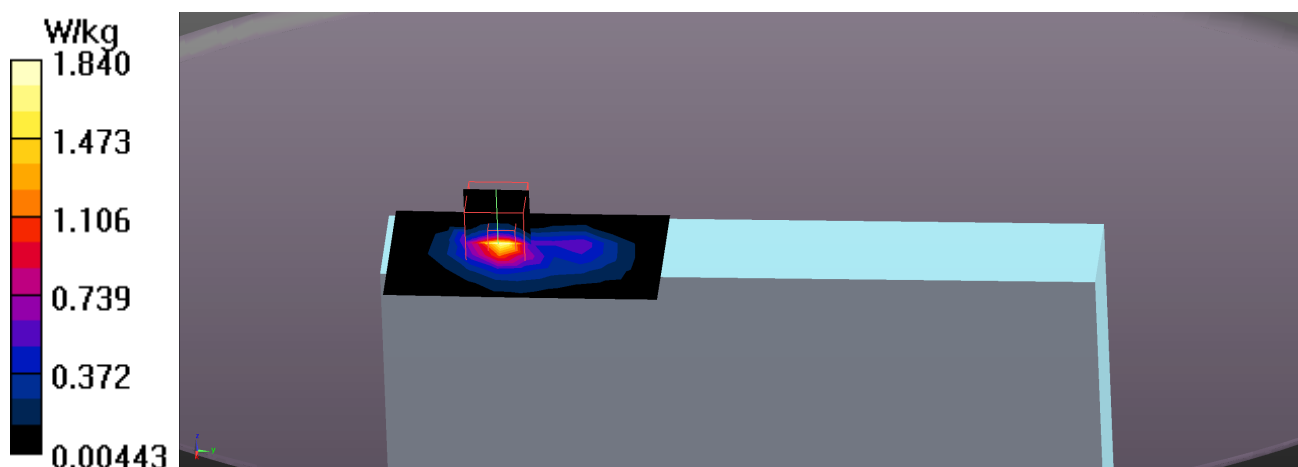

Test Laboratory: DEKRA

Date: 2024-05-12

12_WLAN6GHz_802.11ax160-HE0_CH111_Top_0mm_ANT Aux

Communication System: UID 10755-AAC, WLAN; Frequency: 6505.000 MHz

Medium parameters used: $f = 6505.000$ MHz; Conductivity = 6.01 S/m; Permittivity = 35.5

Phantom section: Flat

DASY Configuration:

- Probe: EX3DV4 - SN7784; ConvF(4.71, 4.83, 4.78); Calibrated: 2024-04-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1791; Calibrated: 2024-04-22
- Phantom: ELI V8.0 (20deg probe tilt)
- Measurement SW: V16.2.4.2524

Area Scan (85.0 mm x 119.0 mm): Measurement grid: 8.5 mm x 8.5 mm

SAR (1 g) = 0.727 W/kg; SAR (10 g) = 0.223 W/kg

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.04 dB

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.236 W/kg

psAPD (4.0cm², sq) = 5.48 W/m²

Smallest distance from peaks to all points 3 dB below = 5.5

Ratio of SAR at M2 to SAR at M1 = 51.6

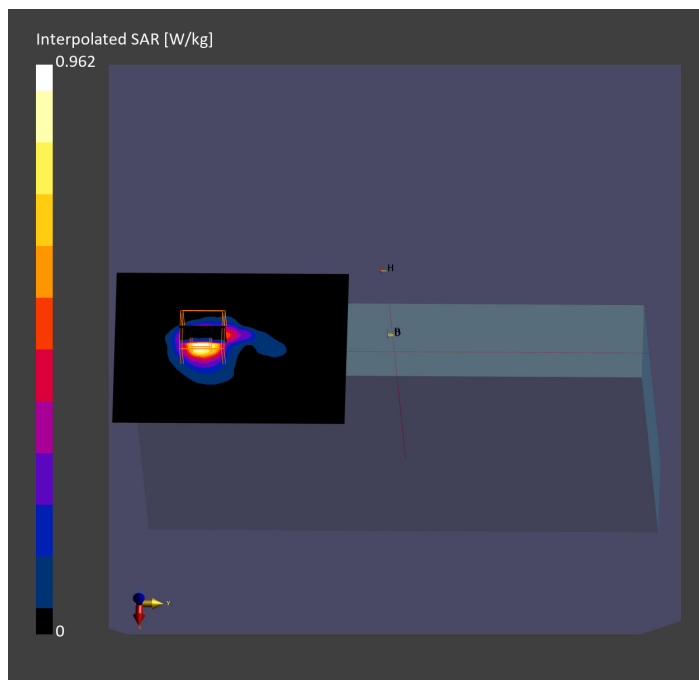

2_WLAN6GHz_802.11ax160-HE0_CH175_Top_2mm_ANT Main
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
, TDI-110	189.0 x 261.0 x 41.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	EDGE TOP, 2.00	U-NII-7	WLAN, 10755-AAC	6825.0, 175	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1068	Air---	EUmmWV4 - SN9546_F1-55GHz, 2024-04-18	DAE4 Sn1651, 2024-02-15

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [lambda]	0.05 x 0.05
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

	5G Scan
Date	2024-05-13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.49
psPDtot+ [W/m ²]	3.84
psPDmod+ [W/m ²]	4.14
E _{max} [V/m]	48.5
Power Drift [dB]	-0.06

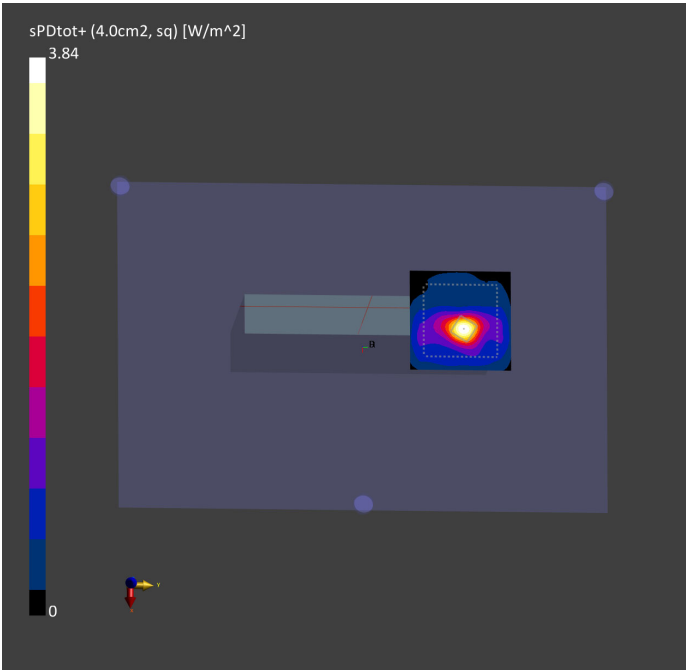

SAR Measurement Variability

Test Laboratory: DEKRA

Date: 2024/05/22

57_WLAN2.4GHz_802.11b-1M_CH11_Top_0mm_ANT Main-Verify

DUT: Speech Generating Device; Type: TDI-110

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.15, 7.15, 7.15) @ 2462 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.15 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.85 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.45 W/kg



Test Laboratory: DEKRA

Date: 2024/05/23

56_WLAN5GHz_802.11ac-80M_CH58_Top_0mm_ANT Aux-Verify**DUT: Speech Generating Device; Type: TDI-110**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.83$ S/m; $\epsilon_r = 36.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.71, 4.71, 4.71) @ 5290 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: ELI 5.0; Type: QDOVA002AA; Serial: 1199
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (8x12x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.75 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.278 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 1.93 W/kg

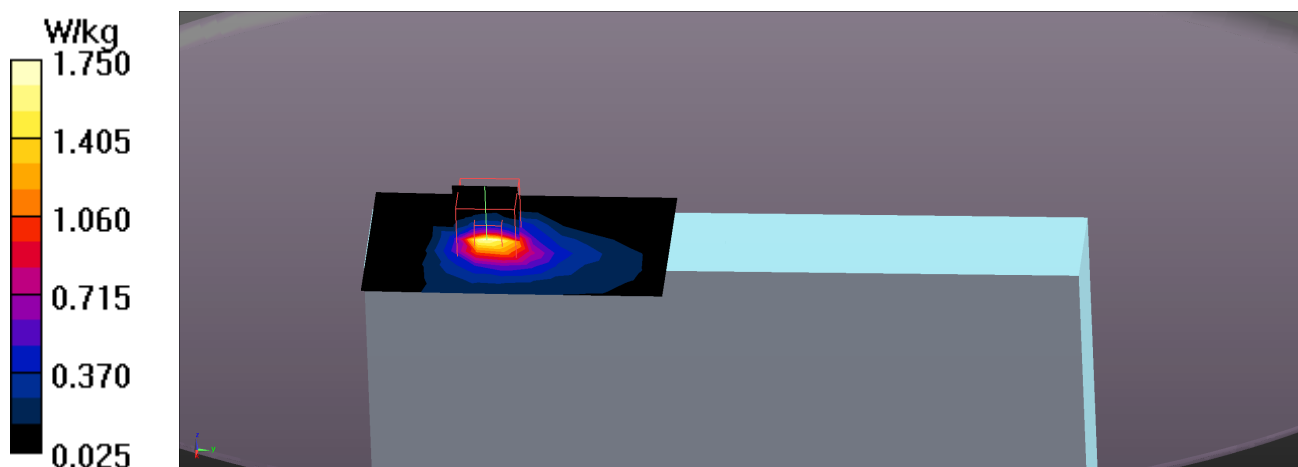

Test Laboratory: DEKRA

Date: 2024-05-12

23_WLAN6GHz_802.11ax160-HE0_CH111_Top_0mm_ANT Aux-Verify

Communication System: UID 10755-AAC, WLAN; Frequency: 6505.000 MHz

Medium parameters used: $f = 6505.000$ MHz; Conductivity = 6.01 S/m; Permittivity = 35.5

Phantom section: Flat

DASY Configuration:

- Probe: EX3DV4 - SN7784; ConvF(4.71, 4.83, 4.78); Calibrated: 2024-04-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1791; Calibrated: 2024-04-22
- Phantom: ELI V8.0 (20deg probe tilt)
- Measurement SW: V16.2.4.2524

Area Scan (85.0 mm x 119.0 mm): Measurement grid: 8.5 mm x 8.5 mm

SAR (1 g) = 0.710 W/kg; SAR (10 g) = 0.221 W/kg

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.12 dB

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.235 W/kg

psAPD (4.0cm², sq) = 5.44 W/m²

Smallest distance from peaks to all points 3 dB below = 6.2

Ratio of SAR at M2 to SAR at M1 = 51.7

