# **Acorn Projects ApS**

#### Leikr Watch

Main Model: LKR1 Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7, LKR8,LKR9,LKR10,LKR11,LKR12

August 16, 2013

Report No.: 13070285-FCC-E (This report supersedes NONE)



**Modifications made to the product: None** 

This Test Report is Issued Under the Authority of:

Pruk Hung

Back Huang Alex Liu



**Compliance Engineer** 

Alex Liu Technical Manager

This test report may be reproduced in full only.

Test result presented in this test report is applicable to the representative sample only.

# EMC Test Repor



Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 2 of 34

# **Laboratory Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to <u>testing</u> and <u>certification</u>, SIEMIC provides initial design reviews and <u>compliance</u> <u>management</u> through out a project. Our extensive experience with <u>China</u>, <u>Asia Pacific</u>, <u>North America</u>, <u>European</u>, <u>and international</u> compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the <u>global markets</u>.

**Accreditations for Conformity Assessment** 

editations for Comornity Assessment					
Country/Region	Accreditation Body	Scope			
USA	FCC, A2LA	EMC, RF/Wireless, Telecom			
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom			
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom, Safety			
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom			
Australia	NATA, NIST	EMC, RF, Telecom, Safety			
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety			
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom			
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom			
Europe	A2LA, NIST	EMC, RF, Telecom, Safety			

#### **Accreditations for Product Certifications**

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB , NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom



Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 3 of 34

This page has been left blank intentionally.

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 4 of 34

www.siemic.com.cn

# **CONTENTS**

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS	6
3	MODIFICATION	7
4	TEST SUMMARY	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
ANI	NEX A. TEST INSTRUMENTATION & GENERAL PROCEDURES	.14
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	.19
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	.29
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST	.33
ANI	NEX E. DECLARATION OF SIMILARITY	.34



Report No.: 13070285-FCC-E Issue Date: August 16, 2013

## **EXECUTIVE SUMMARY & EUT INFORMATION**

The purpose of this test programme was to demonstrate compliance of the Acorn Projects ApS, Leikr Watch and Model: LKR1 against the current Stipulated Standards. The Leikr Watch has demonstrated compliance with the FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009.

#### **EUT Information**

**EUT** 

**Description** 

: Leikr Watch

**Main Model** : LKR1

**Serial Model** 

LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8,LKR9,LKR10,LKR11,

LKR12

Antenna Gain

WIFI: 3 dBi ANT+: 3 dBi

**Battery:** 

**Input Power** 

**Model: GEB303242** 

Li-ion Battery: 3.7V 330mAh

Classification

Per Stipulated

**Class B Emission Product Per** 

Test Standard

FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 6 of 34

# 2 TECHNICAL DETAILS

Purpose	Compliance testing of Leikr Watch with stipulated standards
Applicant / Client	Acorn Projects ApS Smedeland 2, DK-2600 Glostrup, Denmark
Manufacturer	Acorn Projects ApS Smedeland 2, DK-2600 Glostrup, Denmark
Laboratory performing the tests	SIEMIC (Shenzhen-China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: China@siemic.com.cn
Test report reference number	13070285-FCC-E
Date EUT received	July 25, 2013
Standard applied	FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009
Dates of test (from – to)	August 13, 2013
No of Units	#1
<b>Equipment Category</b>	JBP
Trade Name	Leikr
RF Operating Frequency (ies)	WIFI: 802.11b/g/n(20) : 2412-2462 MHz ANT+: 2403-2480 MHz GPS: 1575.42 MHz
Number of Channels	WIFI: 11CH ANT+: 78CH GPS: 1CH
Modulation	WIFI: DSSS/OFDM ANT+: GFSK GPS: BPSK
FCC ID	2AAPI-LKR
IC ID	11342A-LKR



Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 7 of 34

# **MODIFICATION**

**NONE** 

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 8 of 34

www.siemic.com.cn

# 4 TEST SUMMARY

The product was tested in accordance with the following specifications. All testing has been performed according to below product classification:

#### **Class B Emission Product**

**Test Results Summary** 

Emissions						
Test Standard	Description	Product Class	Pass / Fail			
FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009	Conducted Emissions	See Above	Pass			
FCC Part 15 Subpart B Class B: 2012, ANSI C63.4: 2009	Radiated Emissions	See Above	Pass			

All measurement uncertainty is not taken into consideration for all presented test result.

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 9 of 34

www.siemic.com.cn

# 5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

#### **5.1** Conducted Emissions Test Result

#### *Note:*

- 1. All possible modes of operation were investigated. Only the several worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
- 2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- 3. <u>Conducted Emissions Measurement Uncertainty</u>

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz - 30MHz (Average & Quasi-peak) is  $\pm 3.86dB$ .

4. Environmental Conditions Temperature 25 °C

Relative Humidity 58%


Atmospheric Pressure 1007mbar

5. Test date: August 13, 2013 Tested By: Back Huang

**Test Result: Pass** 

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 10 of 34

Test Mode: Charging & Downloading

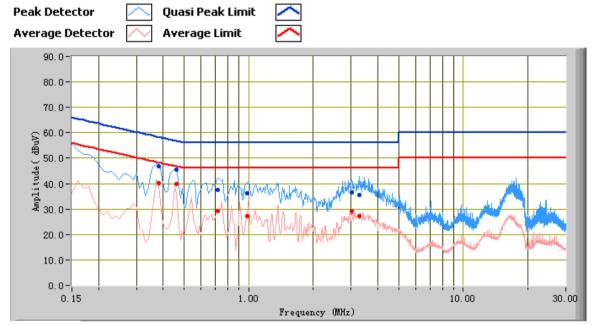


Test Data

#### Phase Line Plot at 120V AC, 60Hz

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.38	46.84	58.28	-11.44	40.12	48.28	-8.16	11.38
0.46	45.34	56.69	-11.35	39.94	46.69	-6.75	11.17
0.72	37.61	56.00	-18.39	29.32	46.00	-16.68	10.87
3.26	35.42	56.00	-20.58	27.37	46.00	-18.63	10.79
3.02	36.57	56.00	-19.43	29.17	46.00	-16.83	10.78
0.98	36.08	56.00	-19.92	27.16	46.00	-18.84	10.69

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 11 of 34

Test Mode: Charging & Downloading

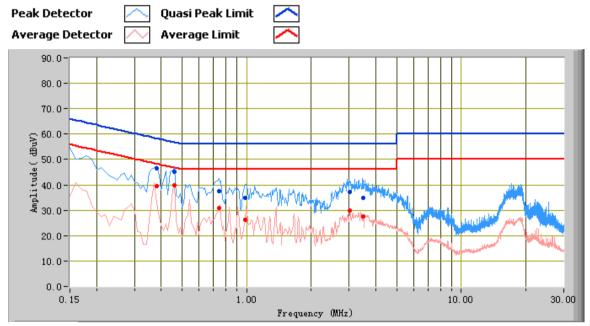

Test Data

#### Phase Natural Plot at 120V AC, 60Hz

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.46	45.14	56.69	-11.55	39.85	46.69	-6.84	11.17
0.38	46.35	58.28	-11.93	39.36	48.28	-8.92	11.38
0.74	37.50	56.00	-18.50	30.92	46.00	-15.08	10.86
3.50	34.80	56.00	-21.20	27.45	46.00	-18.55	10.81
3.02	37.18	56.00	-18.82	29.73	46.00	-16.27	10.78
0.98	34.89	56.00	-21.11	26.26	46.00	-19.74	10.69

#### **5.2** Radiated Emissions Test Result

#### *Note:*

- 1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- 3. <u>Radiated Emissions Measurement Uncertainty</u>

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 1GHz (QP only @ 3m & 10m) is +6dB/-6dB (for EUTs  $< 0.5m \times 0.5m \times 0.5m$ ).

Atmospheric Pressure 1015mbar


5. Test date: August 13, 2013 Tested By: Back Huang

**Test Result: Pass** 

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 13 of 34 www.siemic.com.c

Test Mode: Charging & Downloading

#### **Below 1GHz**

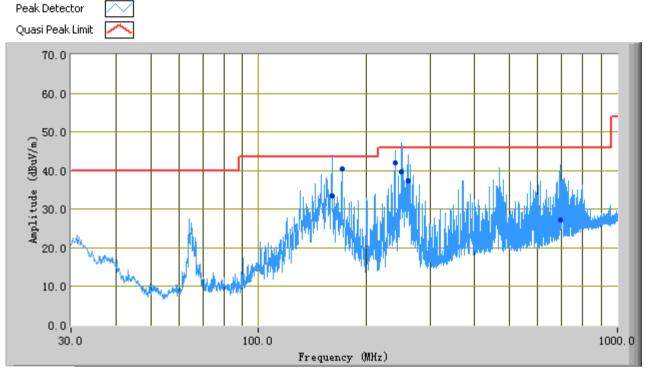

Test Data

#### Vertical & Horizontal Polarity Plot at 3m

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity(H/ V)	Height (cm)	Factors (dB)	Limit (dBuV)	Margin (dB)
250.33	39.70	209.00	Н	225.00	-7.39	46.00	-6.30
160.06	33.39	239.00	Н	354.00	-8.16	43.52	-10.13
240.08	41.94	21.00	Н	142.00	-7.54	46.00	-4.06
261.54	37.42	356.00	Н	100.00	-7.23	46.00	-8.58
170.74	40.46	284.00	Н	214.00	-8.54	43.52	-3.06
691.37	27.26	159.00	Н	257.00	0.34	46.00	-18.74

Note: The data above 1 GHz which below 20 dB to the limit was not recorded.

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 14 of 34

#### **TEST INSTRUMENTATION & GENERAL PROCEDURES** Annex A.

#### **Annex A.i. TEST INSTRUMENTATION**


Instrument	Model	Serial #	Calibration Date	Calibration Due Date
AC Line Conducted Emissions				
EMI test receiver	ESL6	100262	11/19/2012	11/19/2013
Line Impedance Stabilization Network	LI-125A	191106	11/14/2012	11/13/2013
Line Impedance Stabilization Network	LI-125A	191107	11/14/2012	11/13/2013
Transient Limiter	LIT-153	531118	03/03/2013	03/02/2014
Radiated Emissions				
EMI test receiver	ESL6	100262	11/19/2012	11/19/2013
Positioning Controller	UC3000	MF78020828 2	11/19/2012	11/19/2013
OPT 010 AMPLIFIER(0.1- 1300MHz)	8447E	2727A02430	11/19/2012	11/19/2013
Microwave Preamplifier(0.5~ 18GHz)	PAM-118	443008	11/08/2012	11/07/2013
Bilog Antenna (30MHz~6GHz)	JB6	A110712	01/27/2013	01/26/2014
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	071283	11/20/2012	11/19/2013

#### Annex A.ii. AC LINE CONDUCTED EMISSIONS TEST DESCRIPTION

#### **Test Set-up**

- 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
- 2. The power supply for the EUT was fed through a  $50\Omega/50\mu$ H EUT LISN, connected to filtered mains.
- 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.

4. All other supporting equipments were powered separately from another main supply.

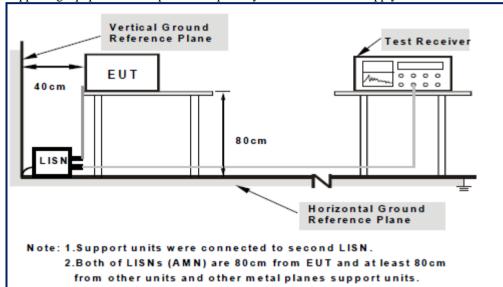

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1

#### **Test Method**

- 1. The EUT was switched on and allowed to warm up to its normal operating condition.
- 2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
- 3. High peaks, relative to the limit line, were then selected.
- 4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
- 5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

#### **Description of Conducted Emission Program**

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 16 of 34

www.siemic.com.cn

#### **Sample Calculation Example**

At 20 MHz  $limit = 250 \mu V = 47.96 dB\mu V$ 

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver =  $40.00 \text{ dB}\mu\text{V}$ 

(Calibrated for system losses)

Therefore, Q-P margin = 47.96 - 40.00 = 7.96 i.e. **7.96 dB below limit** 

#### Annex A. iii. RADIATED EMISSIONS TEST DESCRIPTION


#### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8 m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred; clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or 3m EMC chamber.

#### **Test Set-up**

- 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5mX1.0mX0.8m high, non-conductive table.
- The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
- The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

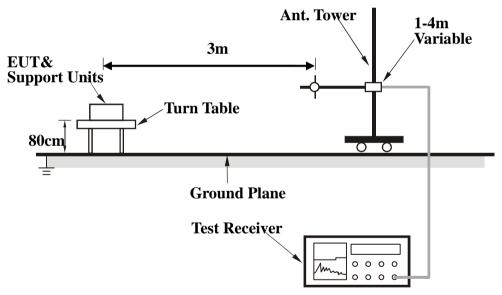

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration2

#### **Test Method**

The following procedure was performed to determine the maximum emission axis of EUT:

- 1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
- 2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
- 3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

#### Final Radiated Emission Measurement

- 1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
- 2. For emission frequencies measured below 1GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on an open test site. As the same purpose, for emission frequencies measured above 1GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
- 3. For emission frequencies measured below and above 1GHz, set the spectrum analyzer on a 100kHz and 1MHz resolution bandwidth respectively for each frequency measured in step 2.
- 4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
- 5. Repeat step 4 until all frequencies need to be measured was complete.
- 6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100kHz	100kHz
Above 1000	Peak	1MHz	1MHz
Above 1000	Average	1MHz	10Hz

#### **Sample Calculation Example**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

Peak = Reading + Corrected Factor

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any) And the average value is

> Average = Peak Value + Duty Factor or Set RBW = 1MHz, VBW = 10Hz.

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1GHz. And the measuring instrument is set to quasi peak detector function.



Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 19 of 34

## Annex B. EUT AND TEST SETUP PHOTOGRAPHS

#### Annex B.i. Photograph 1: EUT External Photo



EUT - Front View



EUT - Rear View

SIEMIC, INC.

Title: EMC Fest Report for Leikr Watch
Main Model: LKR1
Serial Model: LKR2, LKR3, LKR4, LKR5, LKR6, LKR7, LKR8,
LKR9, LKR10, LKR11, LKR12
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 20 of 34



EUT - Top View



EUT - Bottom View

# SIEMIC, INC. Title: EMC Report for Leikr Watch Main Model: LKR1 Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8, LKR9,LKR10,LKR11,LKR12 To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 21 of 34



EUT - Left View



EUT - Right View

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 22 of 34

# Annex B.ii. Photograph 2: EUT Internal Photo



Cover Off - Top View




Cover Off - Rear View


SIEMIC, INC.

Title: EMC Test Report for Leikr Watch
Main Model: LKR1
Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8,
LKR9,LKR10,LKR11,LKR12
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 23 of 34

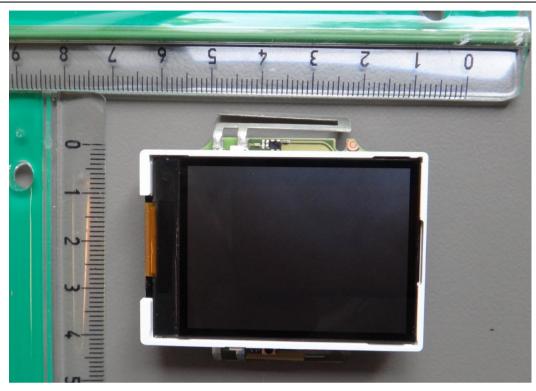


Mainboard With Display - Top view

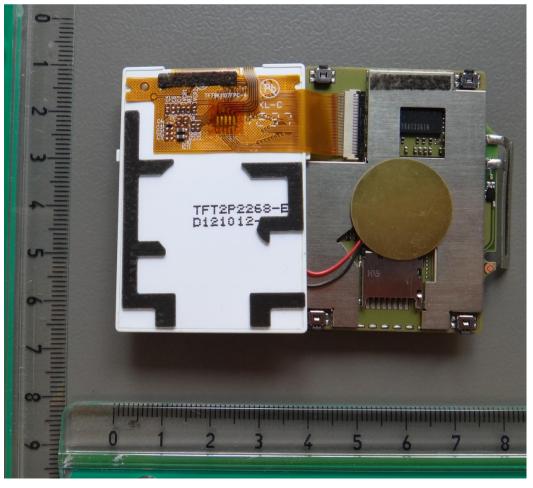


Mainboard With Display Off - Top view

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 24 of 34

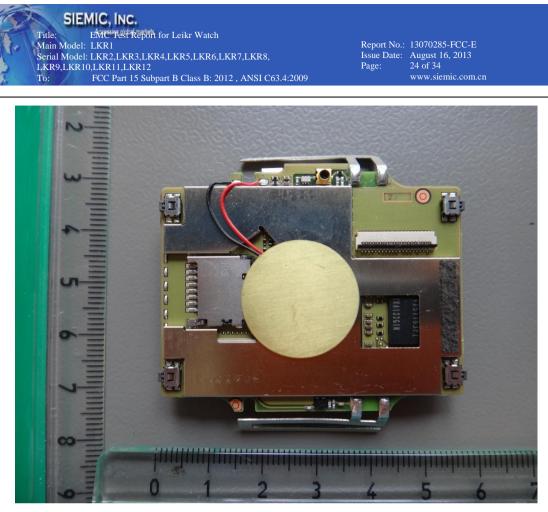

Mainboard With Shielding Can - Top view

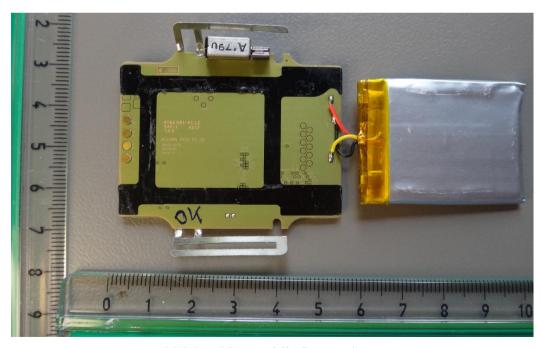


Mainboard Battery Off - Bottom view


SIEMIC, INC.

Title: EMC Fest Report for Leikr Watch
Main Model: LKR1
Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8,
LKR9,LKR10,LKR11,LKR12
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 25 of 34

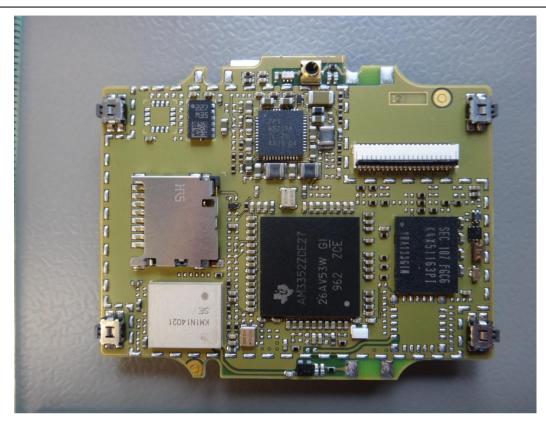

Mainboard Without Shielding Can - Top view

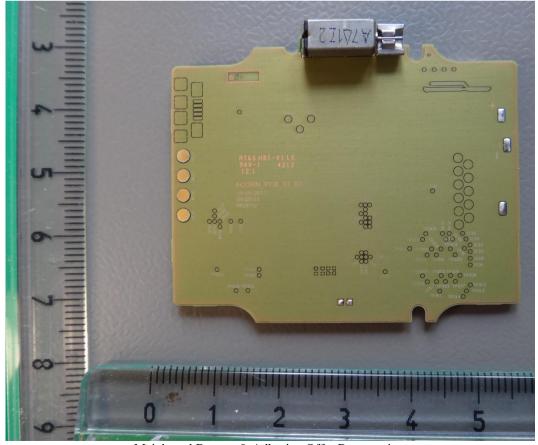


Mainboard Battery & Adhesive Off - Bottom view


SIEMIC, INC.

Title: EMC Fest Report for Leikr Watch
Main Model: LKR1
Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8,
LKR9,LKR10,LKR11,LKR12
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009.

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 26 of 34

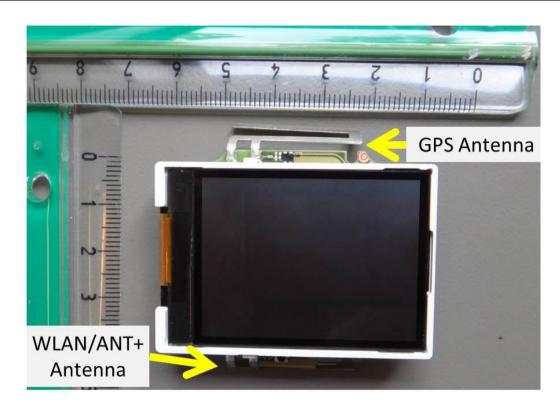

Antenna view - Top view

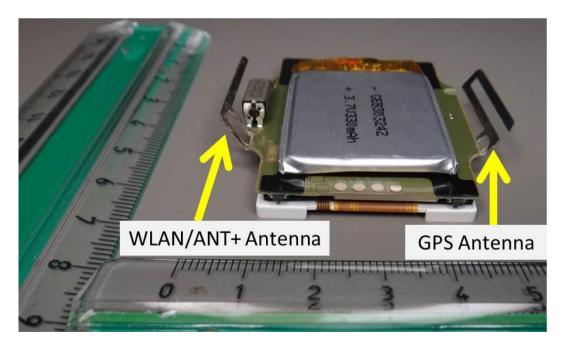


Antenna view - Bottom view

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 27 of 34

#### Annex B.iii. Photograph 3: Test Setup Photo



Conducted Emissions Test Setup Front View

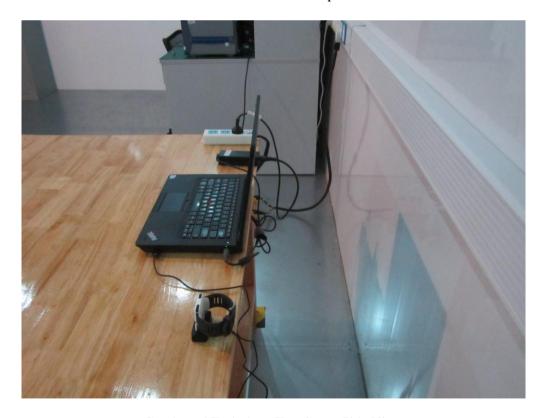


Conducted Emissions Test Setup Side View

SIEMIC, INC.

Title: EMC Fest Report for Leikr Watch
Main Model: LKR1
Serial Model: LKR2,LKR3,LKR4,LKR5,LKR6,LKR7,LKR8,
LKR9,LKR10,LKR11,LKR12
To: FCC Part 15 Subpart B Class B: 2012, ANSI C63.4:2009

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 28 of 34

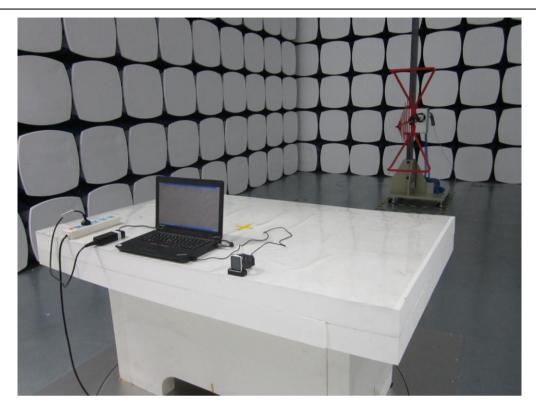

Radiated Spurious Emissions Test Setup Below 1GHz - Front View



Radiated Spurious Emissions Test Setup Above 1GHz -Front View

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 29 of 34

#### **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**

#### **EUT TEST CONDITIONS**


#### Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.


Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
lenovo Laptop	E40& 0579A52	N/A



# **Block Configuration Diagram for Conducted Emissions Mode: Charging & Downloading**

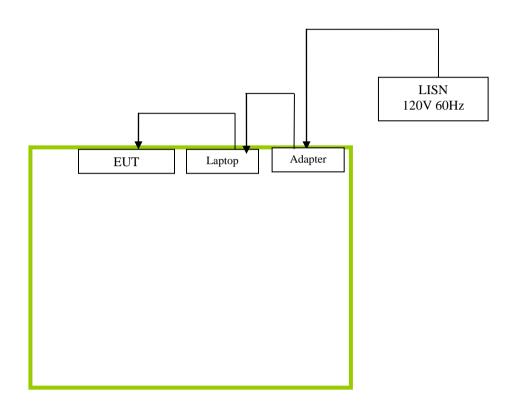

# **Block Configuration Diagram for Radiated Emissions Mode: Charging & Downloading**

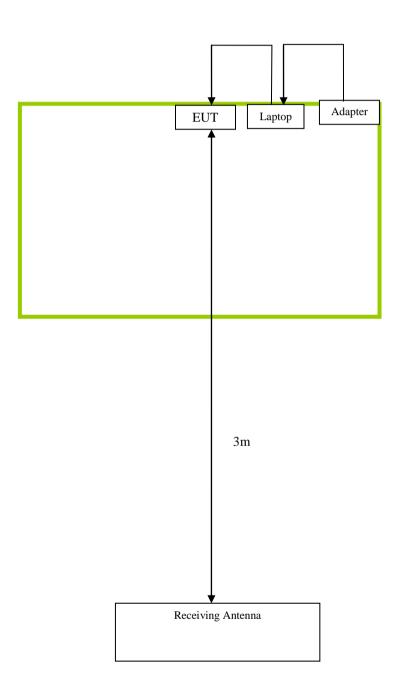

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 32 of 34

www.siemic.com.cn

#### Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions	Charging & Downloading

Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 33 of 34

# Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



Report No.: 13070285-FCC-E Issue Date: August 16, 2013 Page: 34 of 34

#### **Annex E. DECLARATION OF SIMILARITY**

**NONE**