

TEST REPORT

FCC ID: 2AAPLCQL1501-B

Product: Bluetooth Speaker

Model No.: CQL1501-B

Additional Model: SBT501

Trade Mark: SURE

Report No.: TCT150713E005

Issued Date: July 23, 2015

Issued for:

Sure Wave (Hongkong) Limited
A-703, Building 2, Tianan Cyber Park, HuangGe North Road, LongGang
District, Shenzhen 518172, P.R. China.

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com





TABLE OF CONTENTS

	Test Certification			
2.	Test Result Summary	(6)	(60)	4
	EUT Description			
4. (Genera Information)		6
4	4.1. Test environment and mod	de		6
	4.2. Description of Support Un			
5. I	Facilities and Accreditatio	ns	(7
į	5.1. Facilities			7
	5.2. Location			
ŧ	5.3. Measurement Uncertainty.	<u>) </u>	<u>(0)</u>	7
6.	Test Results and Measure	ment Data		8
	6.1. Antenna requirement			
	6.2. Conducted Emission			9
•	6.3. Conducted Output Power.			13
(6.4. 20dB Occupy Bandwidth	······	<u></u>	17
(6.5. Carrier Frequencies Separ	ration		21
	6.6. Hopping Channel Number			
	6.7. Dwell Time			
	6.8. Pseudorandom Frequency	/ Hopping Sequ	ence	31
	6.9. Conducted Band Edge Me			
(6.10. Conducted Spurious Emi	ssion Measuren	nent	35
(6.11.Radiated Spurious Emissi	ion Measuremer	nt	38
Ap	pendix A: Photographs of	Test Setup		
Ар	pendix B: Photographs of	EUT		



1. Test Certification

Product:	Bluetooth Speaker
Model No.:	CQL1501-B
Additional Model:	SBT501
Applicant:	Sure Wave (Hongkong) Limited
Address:	A-703, Building 2, Tianan Cyber Park, HuangGe North Road, LongGang District, Shenzhen 518172, P.R. China.
Manufacturer:	Sure Wave (Hongkong) Limited
Address:	A-703, Building 2, Tianan Cyber Park, HuangGe North Road, LongGang District, Shenzhen 518172, P.R. China
Date of Test:	July 13 –July 22, 2015
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Beryl Zhao

Beryl Zhao

Date: July 22, 2015

Date: July 23, 2015

Date: July 23, 2015

Date: July 23, 2015

Tomsin




2. Test Result Summary

Requirement	CFR 47 Section	Result		
Antenna Requirement	§15.203/§15.247 (c)	PASS		
AC Power Line Conducted Emission	§15.207	PASS		
Conducted Peak Output Power	§15.247 (b)(1)	PASS		
20dB Occupied Bandwidth	§15.247 (a)(1)	PASS		
Carrier Frequencies Separation	§15.247 (a)(1)	PASS		
Hopping Channel Number	§15.247 (a)(1)	PASS		
Dwell Time	§15.247 (a)(1)	PASS		
Radiated Emission	§15.205/§15.209	PASS		
Band Edge	§15.247(d)	PASS		

Note:

- 1. PASS: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.





3. EUT Description

Product Name:	Bluetooth Speaker			
Model:	CQL1501-B			
Additional Model:	SBT501			
Trade Mark:	SURE			
Operation Frequency:	2402MHz~2480MHz			
Transfer Rate:	1/2 Mbits/s			
Number of Channel:	79			
Modulation Type:	GFSK, π/4-DQPSK			
Modulation Technology:	FHSS			
Antenna Type:	Internal Antenna			
Antenna Gain:	0dBi			
Power Supply:	Rechargeable Li-ion Battery DC3.7V			

Operation Frequency each of channel for GFSK, π/4-DQPSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
(C)		٥)	🖔	<u>(,)</u>	<	(C)	KO
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
	····	((6)		(.c)		(6)
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		-
Remark:	Channel 0./3	9 &78 ha	ve been tes	ted for GI	-SK, π/4-D0	PSK mo	dulation mode.



4. Genera Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Notebook	G485			Lenove

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
- 3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

Page 6 of 45



5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

• IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

CNAS - Registration No.: CNAS L6165
 Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005
 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

Report No.: TCT150713E005



Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Bluetooth antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 0dBi.



Antenna



6.2. Conducted Emission

6.2.1. Test Specification

A) A)								
Test Requirement:	FCC Part15 C Section 15.207							
Test Method:	ANSI C63.4:2009							
Frequency Range:	150 kHz to 30 MHz	(4)						
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto							
Limits:	Frequency range (MHz) 0.15-0.5 0.5-5	Limit (Quasi-peak 66 to 56* 56	Áverage 56 to 46*					
	5-30	60	50					
Test Setup:	Reference Plane 40cm 80cm Filter AC power E.U.T AC power EMI Receiver Remark E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m							
Test Mode:	Reference to item 4.1							
Test Procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement. 							
Test Result:	PASS							



6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)										
Equipment	Manufacturer	Model	Serial Number	Calibration Due						
EMI Test Receiver	R&S	ESCS30	100139	Sep. 16, 2015						
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 29, 2015						
Coax cable	TCT	CE-05	N/A	Sep.15 , 2015						
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A						








6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

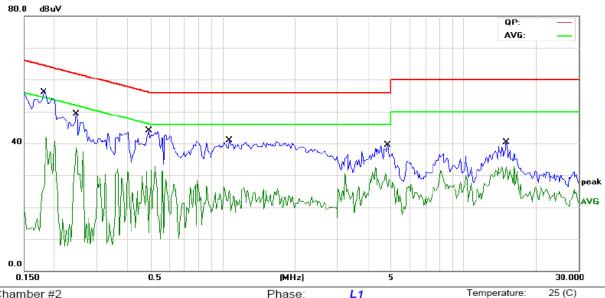

Site Chamber #2 Phase: L1 Temperature: 25 (C)
Limit: FCC PART15 Conduction(QP) Power: AC 120V/60Hz Humidity: 56 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1812	42.25	11.48	53.73	64.43	-10.70	QP	
2		0.1812	23.32	11.48	34.80	54.43	-19.63	AVG	
3		0.2477	32.83	11.44	44.27	61.83	-17.56	QP	
4		0.2477	17.36	11.44	28.80	51.83	-23.03	AVG	
5		0.4938	29.25	11.30	40.55	56.10	-15.55	QP	
6		0.4938	15.57	11.30	26.87	46.10	-19.23	AVG	
7		4.8320	21.97	10.67	32.64	56.00	-23.36	QP	
8		4.8320	11.10	10.67	21.77	46.00	-24.23	AVG	
9		15.0742	25.26	11.62	36.88	60.00	-23.12	QP	
10		15.0742	19.48	11.62	31.10	50.00	-18.90	AVG	
11		1.0680	23.93	11.21	35.14	56.00	-20.86	QP	
12		1.0680	9.05	11.21	20.26	46.00	-25.74	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level ($dB\mu V$) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement ($dB\mu V$) = Reading level ($dB\mu V$) + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$


Q.P. =Quasi-Peak

AVG =average

^{*} is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

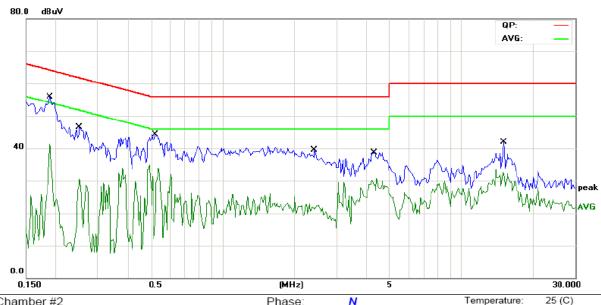

Site Chamber #2 Phase: N Temperature:
Limit: FCC PART15 Conduction(QP) Power: AC 120V/60Hz Humidity:

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBuV	dBu∀	dB	Detector	Comment
1 *	0.1890	40.70	11.47	52.17	64.08	-11.91	QP	
2	0.1890	25.61	11.47	37.08	54.08	-17.00	AVG	
3	0.2515	32.88	11.43	44.31	61.70	-17.39	QP	
4	0.2515	15.47	11.43	26.90	51.70	-24.80	AVG	
5	0.5210	29.40	11.29	40.69	56.00	-15.31	QP	
6	0.5210	14.47	11.29	25.76	46.00	-20.24	AVG	
7	2.4273	21.12	11.52	32.64	56.00	-23.36	QP	
8	2.4273	8.04	11.52	19.56	46.00	-26.44	AVG	
9	4.3358	22.25	10.85	33.10	56.00	-22.90	QP	
10	4.3358	10.51	10.85	21.36	46.00	-24.64	AVG	
11	15.0703	25.08	11.62	36.70	60.00	-23.30	QP	
12	15.0703	19.29	11.62	30.91	50.00	-19.09	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level ($dB\mu V$) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement $(dB\mu V)$ = Reading level $(dB\mu V)$ + Corr. Factor (dB)

 $Limit (dB\mu V) = Limit stated in standard$

 $Margin (dB) = Measurement (dB\mu V) - Limits (dB\mu V)$

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Note2:

Measurements were conducted in all three channels (high, middle, low) and three modulation(GFSK, Pi/4 DQPSK), and the worst case Mode (Highest channel and GFSK) was submitted only.



6.3. Conducted Output Power

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)		
Test Method:	ANSI C63.4:2009 and DA00-705		
Limit:	Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	Use the following spectrum analyzer settings: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.		
Test Result:	PASS		

6.3.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015
RF Cable	TCT	RE-06	N/A	Sep.15 , 2015
Antenna Connector	TCT	RFC-01	N/A	Sep.15 , 2015



6.3.3. Test Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.13	21.00	PASS
Middle	-0.58	21.00	PASS
Highest	-1.93	21.00	PASS

Pi/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.77	21.00	PASS
Middle	-2.09	21.00	PASS
Highest	-2.29	21.00	PASS

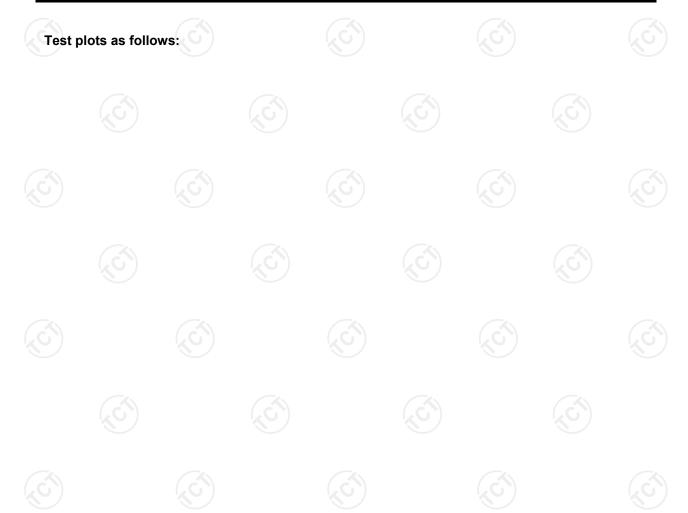



Lowest channel




Date: 15.JUL.2015 15:26:02

Middle channel




Date: 15.JUL.2015 15:26:25



Date: 15.JUL.2015 15:26:48




Lowest channel




Date: 20.JUL.2015 10:59:27

Middle channel



Date: 20.JUL.2015 11:11:50

Highest channel



Date: 20.JUL.2015 11:13:23



6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.4:2009 and DA00-705		
Limit:	N/A		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Transmitting mode with modulation		
Test Procedure:	 The testing follows FCC Public Notice DA 00-705 Measurement Guidelines. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW≥1% of the 20 dB bandwidth; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 		
Test Result:	PASS CO.		

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015
RF cable	TCT	RE-06	N/A	Sep.15 , 2015
Antenna Connector	TCT	RFC-01	N/A	Sep.15 , 2015



6.4.3. Test data


Test channel	20dB Occupy Bandwidth (kHz)		
rest channel	GFSK	π/4-DQPSK	Conclusion
Lowest	1024.04	1326.12	PASS
Middle	1028.04	1344.55	PASS
Highest	1024.04	1332.53	PASS

Test plots as follows:






Lowest channel




Date: 15.JUL.2015 15:39:07

Middle channel



Date: 15.JUL.2015 15:37:28


Highest channel



Date: 15.JUL.2015 15:33:36




Lowest channel




Date: 20.JUL.2015 14:38:31

Middle channel



Date: 20.JUL.2015 14:39:56

Highest channel



Date: 20.JUL.2015 14:43:24



6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.4:2009 and DA00-705		
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.		
Test Setup:	Spectrum Analyzer EUT		
Test Mode:	Hopping mode		
Test Procedure:	 The testing follows FCC Public Notice DA 00-705 Measurement Guidelines. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW≥1% of the span; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 		
Test Result:	PASS		

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015
RF cable	TCT	RE-06	N/A	Sep.15 , 2015
Antenna Connector	тст	RFC-01	N/A	Sep.15 , 2015



6.5.3. Test data

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000.80	685.36	PASS
Middle	1004.00	685.36	PASS
Highest	1000.00	685.36	PASS

Pi/4 DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1019.23	896.37	PASS
Middle	1014.42	896.37	PASS
Highest	1000.00	896.37	PASS

Note: According to section 6.4

Note. According to section 0.4		X Y
Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1028.04	685.36
π/4-DQPSK	1344.55	896.37

Test plots as follows:






Lowest channel



Date: 15.JUL.2015 15:44:18

Middle channel



Date: 15.JUL.2015 15:49:59

Highest channel



Date: 15.JUL.2015 15:54:33




Lowest channel




Date: 20.JUL.2015 11:35:08

Middle channel



Date: 20.JUL.2015 11:29:23

Highest channel



Date: 20.JUL.2015 11:24:06



6.6. Hopping Channel Number

6.6.1. Test Specification

FCC Part15 C Section 15.247 (a)(1)				
ANSI C63.4:2009 and DA00-705				
Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.				
Spectrum Arabasa EUT				
Spectrum Analyzer Hopping mode				
The testing follows FCC Public Notice DA 00-705				
 Measurement Guidelines. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW ≥1% of the span; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. The number of hopping frequency used is defined as the number of total channel. Record the measurement data derived from spectrum analyzer. 				
PASS				

6.6.2. Test Instruments

(*, *)									
RF Test Room									
Equipment Manufacturer Model Serial Number Calibration									
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015					
RF cable	TCT	RE-06	N/A	Sep.15 , 2015					
Antenna Connector	ТСТ	RFC-01	N/A	Sep.15 , 2015					



6.6.3. Test data

Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK	79	15	PASS

Test plots as follows:





















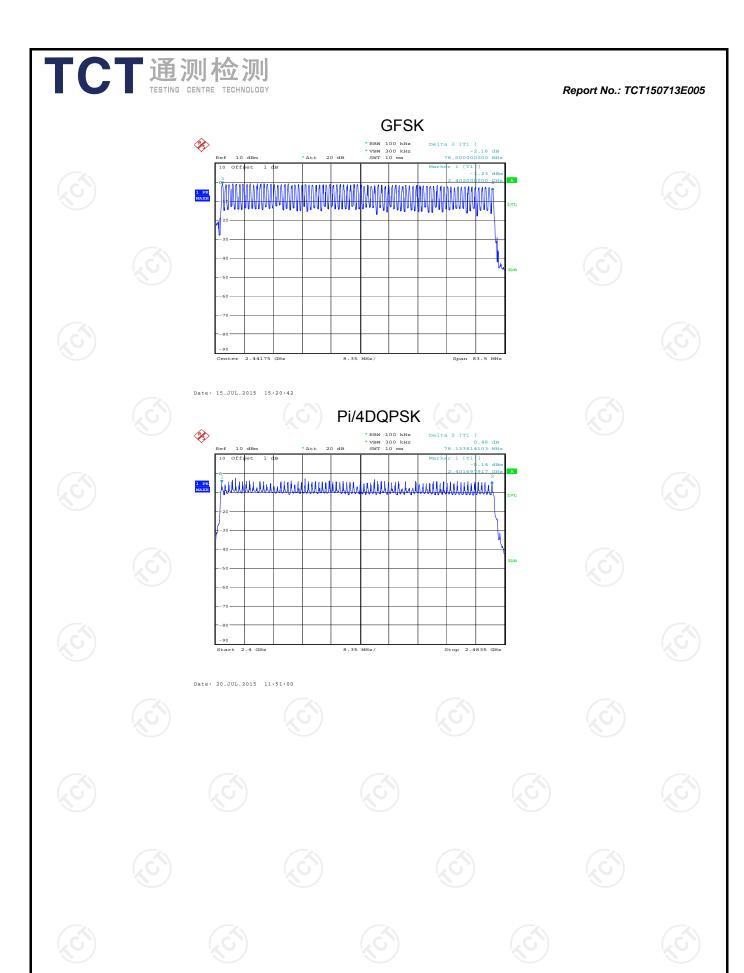



6.7. Dwell Time

6.7.1. Test Specification

FCC Part15 C Section 15.247 (a)(1)				
ANSI C63.4:2009 and DA00-705				
The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.				
Spectrum Analyzer EUT				
Hopping mode				
 The testing follows FCC Public Notice DA 00-705 Measurement Guidelines. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Enable the EUT hopping function. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW≥RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. Measure and record the results in the test report. 				
PASS				

6.7.2. Test Instruments

(*, *)									
RF Test Room									
Equipment Manufacturer Model Serial Number Calibration									
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015					
RF cable	TCT	RE-06	N/A	Sep.15 , 2015					
Antenna Connector	ТСТ	RFC-01	N/A	Sep.15 , 2015					



6.7.3. Test Data

Mode	Packet	Hops Over Occupancy Time (hops)	Package Transfer Time (ms)	Dwell time (second)	Limit (second)	Result
GFSK	DH5	106.67	2.97	0.32	0.4	PASS
Pi/4 DQPSK	2-DH5	106.67	2.97	0.32	0.4	PASS

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.


With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops

2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:





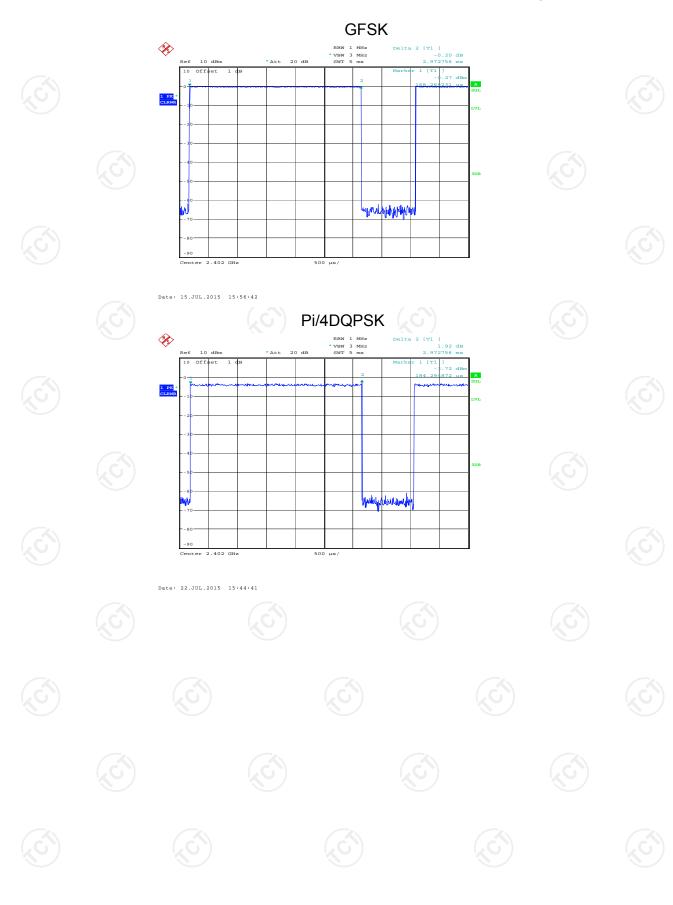



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement:

FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 2⁹-1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.4:2009 and DA00-705					
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.					
Test Setup:	Spectrum Analyzer EUT					
Test Mode:	Transmitting mode with modulation					
Test Procedure:	 The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines. Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz (≥1% span=10MHz), VBW = 300 kHz (≥RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. Enable hopping function of the EUT and then repeat step 2 and 3. Measure and record the results in the test report. 					
Test Result:	PASS					
C.Y. L.C.Y.						

6.9.2. Test Instruments


RF Test Room								
Equipment Manufacturer Model Serial Number Calibration Due								
Spectrum Analyzer	R&S	FSU	200054	Sep. 15, 2015				
RF cable	тст	RE-06	N/A	Sep.15 , 2015				
Antenna Connector	TCT	RFC-01	N/A	Sep.15 , 2015				



6.9.3. Test Data

Report No.: TCT150713E005

GFSK Modulation

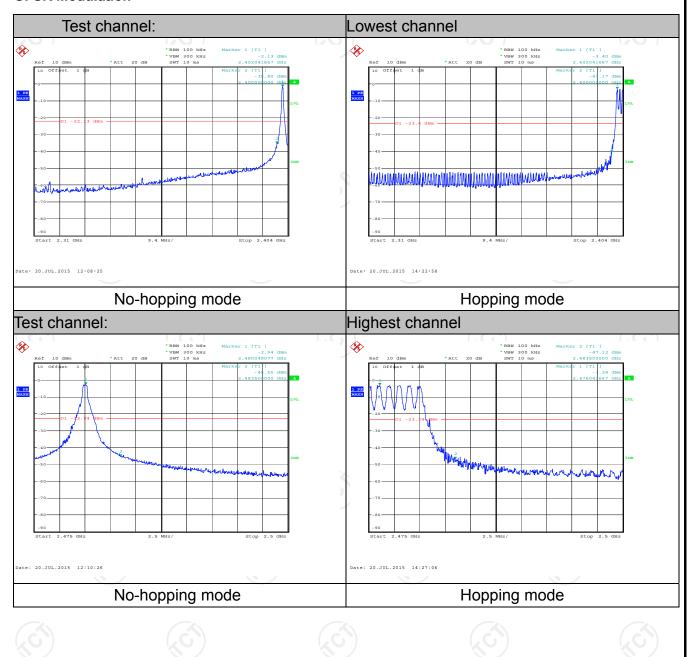






Pi/4DQPSK Modulation

Report No.: TCT150713E005

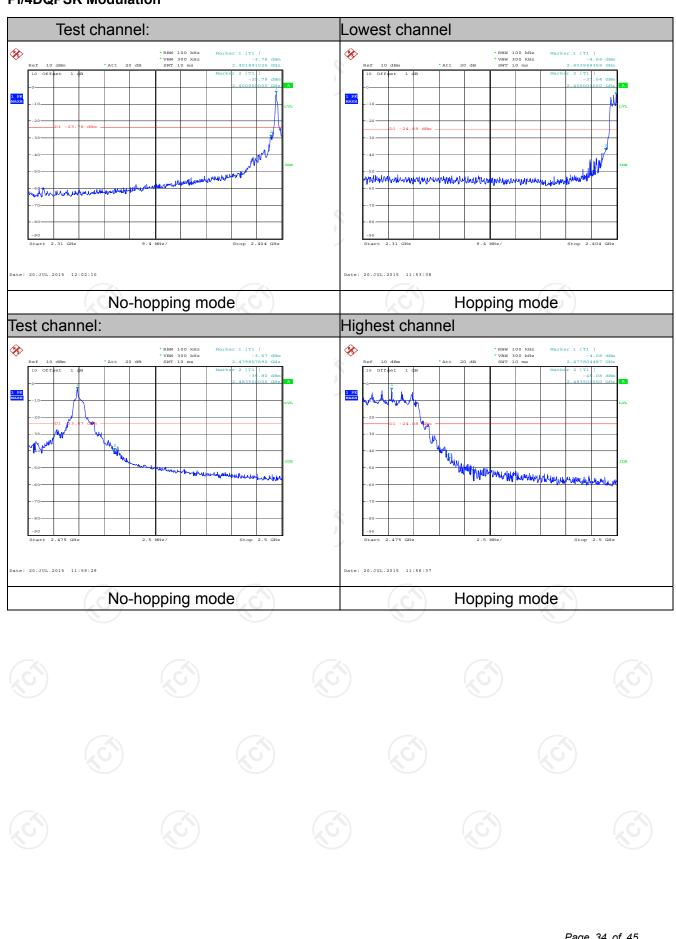



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2009 and DA00-705
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	 The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. Set to the maximum power setting and enable the EUT transmit continuously. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Measure and record the results in the test report. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

6.10.2. Test Instruments


RF Test Room							
Equipment Manufacturer Model Serial Number Calibration Du							
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 21, 2015			
RF cable	тст	RE-06	N/A	Sep.15 , 2015			
Antenna Connector	тст	RFC-01	N/A	Sep.15 , 2015			




6.10.3. Test Data

GFSK mode


Lowest Channel



Middle Channel

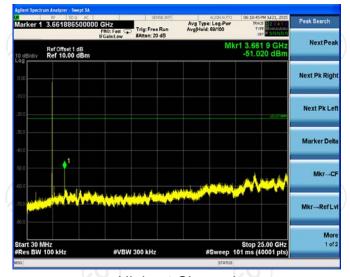

Highest Channel




Report No.: TCT150713E005




Pi/4DQPSK mode


Lowest Channel



Middle Channel



Highest Channel







TCT通测检测 TESTING CENTRE TECHNOLOGY

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

		<i>X</i> \						
Test Requirement:	FCC Part15	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.4:	ANSI C63.4: 2009 and ANSI C63.10: 2009						
Frequency Range:	9 kHz to 25 (9 kHz to 25 GHz						
Measurement Distance:	3 m	3 m						
Antenna Polarization:	Horizontal & Vertical							
	Frequency	Detector	RBW	VBW		Remark		
	9kHz- 150kHz	Quasi-pea	ak 200Hz	1kHz	Quas	si-peak Value		
Receiver Setup:	150kHz- 30MHz	Quasi-pea		30kHz		si-peak Value		
	30MHz-1GHz	Quasi-pea	ak 100KHz	300KHz	Quas	si-peak Value		
	(C)	Peak	1MHz	3MHz		eak Value		
	Above 1GHz	Peak	1MHz	10Hz		erage Value		
	Frequen	ісу	Field Strength (microvolts/meter)		_	asurement nce (meters)		
	0.009-0.4	0.009-0.490		(KHz)		300		
	0.490-1.7	705	24000/F	(KHz)		30		
	1.705-30		30		30			
	30-88	30-88		100		3		
	88-216	6	150		3			
Limit:	216-960		20	0		3		
	Above 9	60	50)		3		
	Frequency	Frequency Field Strength (microvolts/meter)		Measure Distan (mete	ice	Detector		
	Above 1GHz	,	500	3		Average		
	Above IGHZ	2	5000	3		Peak		
	For radiated emis	ssions belov	w 30MHz		60			
	Di	stance = 3m			Compt	uter		
Test setup:	FUT	(Pre -	Amplifier	Ъ «°		
	EUT	Turn table	nd Plane	_ [Receiver			
	30MHz to 1GHz	Giod	T HUIV					
(.0.7)		- (4)				(c		

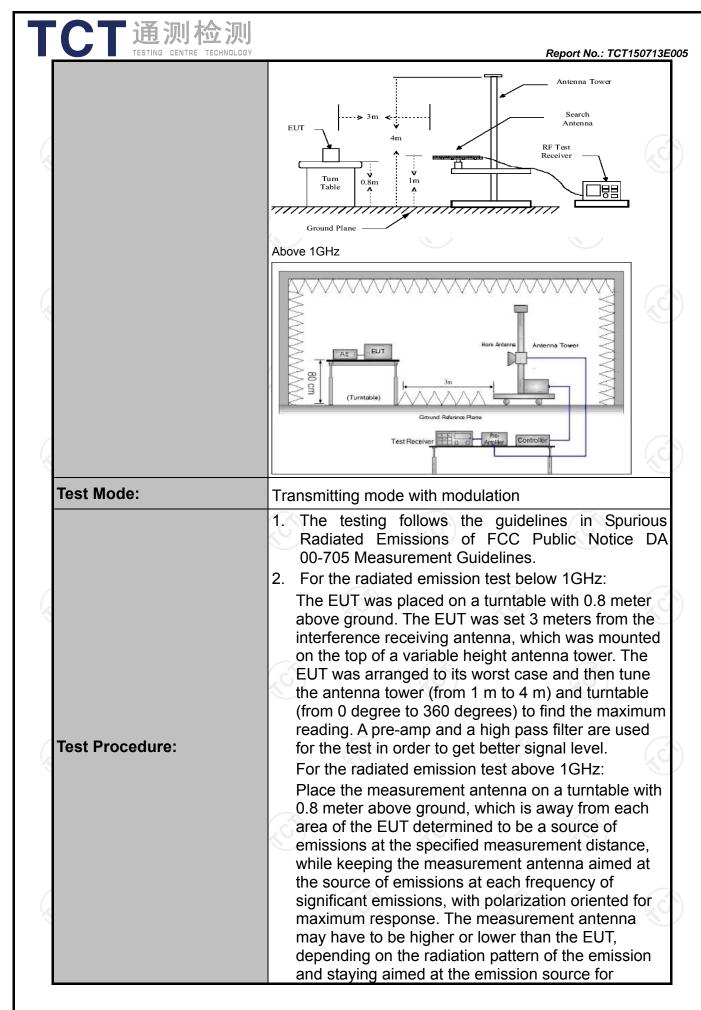

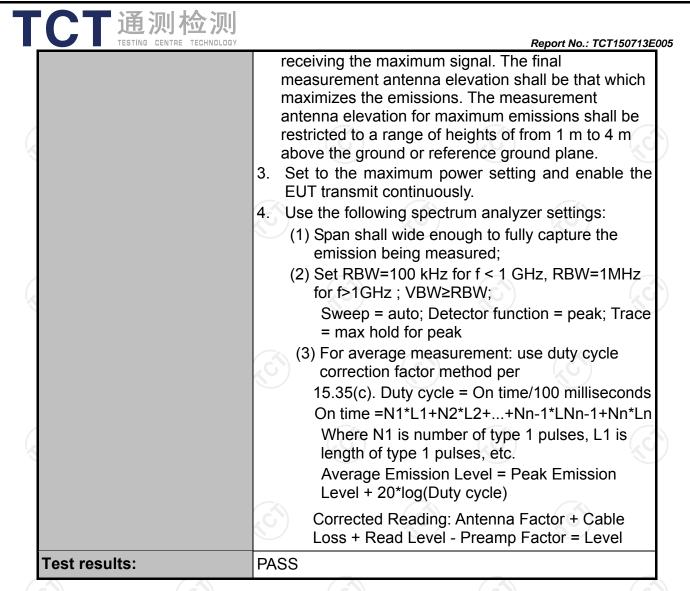





6.11.2. Test Instruments

Radiated Emission Test Site (966)								
Name of Equipment	Manufacturer	nufacturer Model		Calibration Due				
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep.16, 2015				
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep.16 , 2015				
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 21, 2015				
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep.16 , 2015				
Pre-amplifier	HP	8447D	2727A05017	Sep.16, 2015				
Loop antenna	ZHINAN	ZN30900A	12024	Dec.14, 2015				
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep.16 , 2015				
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep.16 , 2015				
Horn Antenna	Schwarzbeck	BBHA 9170	373	Sep.16 , 2015				
Antenna Mast	CCS	CC-A-4M	N/A	N/A				
Coax cable	TCT	RE-low-01	N/A	Sep.15, 2015				
Coax cable	TCT	RE-high-02	N/A	Sep.15, 2015				
Coax cable	тст	RE-low-03	N/A	Sep.15 , 2015				
Coax cable	тст	RE-high-04	N/A	Sep.15 , 2015				
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A				






6.11.3. Test Data


Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39



Date: 15.JUL.2015 15:57:41

DH5 on time (Count Pulses) Plot on Channel 39



Date: 15.JUL.2015 15:58:46

Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = (2.981*26+1.000)/ 100 = 0.785
- 2. Worst case Duty cycle correction factor = 20*log (Duty cycle) = -2.10dB
- 3. DH5 has the highest duty cycle worst case and is reported.
- 4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-2.10dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.


Report No.: TCT150713E005



Please refer to following diagram for individual

Below 1GHz

Horizontal:

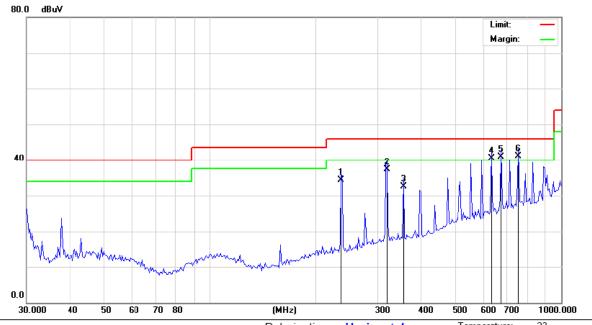


Site Polarization: Horizontal Temperature: 23 Limit: FCC Part 15B Class B RE_3 m Power: DC 3.7V Humidity: 55 %

1	No.	Mł	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree	Comment
	1		236.7927	44.63	-10.42	34.21	46.00	-11.79	QP		0	
	2		318.0874	45.24	-7.87	37.37	46.00	-8.63	QP		0	
	3		355.9397	39.54	-7.10	32.44	46.00	-13.56	QP		0	
	4	İ	633.3284	41.77	-1.25	40.52	46.00	-5.48	QP		0	
	5	İ	674.6767	41.23	-0.39	40.84	46.00	-5.16	QP		0	
	6	*	754.9628	40.31	0.86	41.17	46.00	-4.83	QP		0	





Vertical:

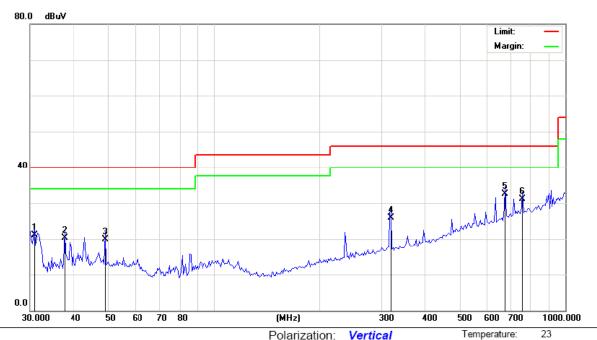

Limit: FCC Part 15B Class B RE_3 m Power: DC 3.7V Humidity: 55 %

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree	Comment
1	30.8551	34.63	-13.61	21.02	40.00	-18.98	QP		0	
2	37.5647	33.03	-12.78	20.25	40.00	-19.75	QP		0	
3	49.0626	32.03	-12.08	19.95	40.00	-20.05	QP		0	
4	318.0874	33.72	-7.87	25.85	46.00	-20.15	QP		0	
5 *	674.6766	32.96	-0.39	32.57	46.00	-13.43	QP		0	
6	754.9628	30.19	0.86	31.05	46.00	-14.95	QP		0	

Note: 1.The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and three modulation(GFSK, Pi/4 DQPSK), and the worst case Mode (Highest channel and GFSK) was submitted only.





Above 1GHz

Modulation Type: GFSK												
Low channel: 2402 MHz												
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBuV)	Correction Factor (dB/m)	Peak	n Level AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)			
2390	I	45.62		-8.23	37.39		74	54	-16.61			
4804	Н	38.66		6.59	45.25		74	54	-8.75			
7206	T	36.44		12.87	49.31		74	54	-4.69			
	·CH		+,0		(·C `} -		(-C)				
2390	V	40.70		-8.23	32.47		74	54	-21.53			
4804	V	39.61		6.59	46.20		74	54	-7.80			
7206	V	36.59		12.87	49.46		74	54	-4.54			
0)	V	(40)		/<)		(CL)		120			

Middle channel: 2441 MHz										
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Emissic Peak (dBµV/m)	AV	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)	
4882	Ŧ	38.50		7.01	45.51		74	54	-8.49	
7323	Η	36.54	-	13.21	49.75	-	74	54	-4.25	
	Η		-				I			
4882	V	38.74		7.01	45.75		74	54	-8.25	
7323	V	36.59		13.21	49.80		74	54	-4.20	
	V									

High chann	nel: 2480 N	ЛHz	(.G			.Ġ`\\		(G)	
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Peak	n Level AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
2483.5	I	41.50		-7.52	33.98		74	54	-20.02
4960	Н	40.83		7.44	48.27		74	54	-5.73
7440	Н	36.29		13.54	49.83		74	54	-4.17
	Н								
2483.5	V	39.69		-7.52	32.17	(\\ -	74	54	-21.83
4960	VOV	41.14	-420	7.44	48.58	(O .)	74	54	-5.42
7440	V	35.22		13.54	48.76	<u></u>	74	54	-5.24
	V								

Note:

- 1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss Pre-amplifier
- 2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 5. Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- 6. Measurements were conducted in all three modulation(GFSK, Pi/4 DQPSK), and the worst case Mode (GFSK) was submitted only.

