



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM130700345302
Page: 1 of 12
FCC ID:2AAQM435002898

TEST REPORT

| | |
|----------------------|---|
| Application No.: | GZEM1307003453RF |
| Applicant: | YIDA TOYS FACTORY |
| FCC ID: | 2AAQM435002898 |
| Product Name: | Remote control car series |
| Product Description: | Radio toys with 49.860 MHz as a carrier. |
| Model No.: | No: 333-1, No: 333-2, No: 333-3, No: 333-4, No: 333-5, No: 333-6, No: 333-7, No: 333-8, No: 333-9, No: 333-10, No: 333-11, No: 333-12, No: 333-1/A, No: 333-2/A, No: 333-3/A, No: 333-4/A, No: 333-5/A, No: 333-6/A, No: 333-7/A, No: 333-8/A, No: 333-9/A, No: 777-1, No: 777-2, No: 777-3, No: 777-4, No: 777-5, No: 777-6, No: 777-7, No: 777-8, No: 777-91♦ |
| ♦ | Please refer to section 3 of this report for more details. |
| Standards: | CFR 47 FCC PART 15 SUBPART B:2012 |
| Date of Receipt: | 2013-07-26 |
| Date of Test: | 2013-07-30 |
| Date of Issue: | 2013-08-09 |
| Test Result : | Pass* |

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature: 
Richard Li
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 00 | | 2013-08-09 | | Original |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | |
|--------------------------|--|--------------------|
| Authorized for issue by: | | |
| Tested By |  (Storm Shu) /Project Engineer | 2013-07-30 Date |
| Prepared By |  (Millie Li) /Clerk | 2013-08-09 Date |
| Checked By |  (Jeffery Chen) /Reviewer | 2013-08-09 Date |

3 Test Summary

| Electromagnetic Interference (EMI) | | | | |
|---|-------------------------------|-----------------|------------------|--------|
| Test | Test Requirement | Test Method | Class / Severity | Result |
| Radiated Emission (30 MHz to 1 GHz) | FCC PART 15 SUBPART B:2012 | ANSI C63.4:2009 | Class B | PASS |
| Radiated Emission above 1 GHz | FCC PART 15 SUBPART B:2012 | N/A | Class B | N/A |
| Remark : | | | | |
| EUT: In this whole report EUT means Equipment Under Test. | | | | |
| N/A: Not applicable, please refer to section 7.2 of this report for details. | | | | |
| • Model No.: No: 333-1, No: 333-2, No:333-3, No: 333-4, No: 333-5, No: 333-6, No: 333-7, No: 333-8, No: 333-9, No: 333-10, No: 333-11, No: 333-12, No: 333-1/A, No: 333-2/A, No: 333-3/A, No: 333-4/A, No: 333-5/A, No: 333-6/A, No: 333-7/A, No: 333-8/A, No: 333-9/A, No: 777-1, No: 777-2, No: 777-3, No: 777-4, No: 777-5, No: 777-6, No: 777-7, No: 777-8, No: 777-9 | | | | |
| According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the model names and appearance. Therefore only one model 333-2 was tested in this report. | | | | |

4 Contents

| | |
|--|----|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENTS | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 Client Information | 5 |
| 5.2 General Description of E.U.T. | 5 |
| 5.3 Details of E.U.T. | 5 |
| 5.4 Deviation from Standards | 5 |
| 5.5 Abnormalities from Standard Conditions | 5 |
| 5.6 General Test Climate During Testing | 5 |
| 5.7 Description of Support Units..... | 5 |
| 5.8 Test Location | 5 |
| 5.9 Test Facility | 6 |
| 6 EQUIPMENT USED DURING TEST | 7 |
| 7 EMISSION TEST RESULTS | 8 |
| 7.1 Radiated Emissions, 30MHz to 1GHz..... | 8 |
| 7.2 Radiated Emissions above 1 GHz..... | 12 |

5 General Information

5.1 Client Information

Applicant: YIDA TOYS FACTORY
Address of Applicant: ROAD BAYYI, JIANYANG INDUSTRIAL AREA, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA

5.2 General Description of E.U.T.

Product Name: Remote control car series
Product Description: Radio toys with 49.860 MHz as a carrier.
Model No: 333-2

5.3 Details of E.U.T.

Rated Supply (Voltage): DC 4.5 V (3 x 1.5 V 'AA' batteries)
Power Cord: N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 General Test Climate During Testing

Temperature: 15-30 °C Humidity: 30~70 %RH Atmospheric Pressure: 860~1060 mbar

5.7 Description of Support Units

The EUT had been tested as an independent unit.

5.8 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

6 Equipment Used during Test

| RE in Chamber | | | | | | |
|---------------|--|----------------------------------|-------------|------------|------------------------------|-------------------------|
| No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Due date (YYYY-MM-DD) | Calibration Interval |
| EMC0525 | Compact Semi-Anechoic Chamber | ChangZhou ZhongYu | N/A | N/A | 2014-08-30 | 2Y |
| EMC0522 | EMI Test Receiver | Rohde & Schwarz | ESIB26 | 100283 | 2014-05-06 | 1Y |
| EMC0056 | EMI Test Receiver | Rohde & Schwarz | ESCI | 100236 | 2014-03-04 | 1Y |
| EMC0528 | RI High frequency Cable | SGS | 20 m | N/A | 2014-05-09 | 1Y |
| EMC2025 | Trilog Broadband Antenna 30-3000MHz | SCHWARZBECK MESS-ELEKTRONIK | VULB 9163 | 9163-450 | 2013-12-17 | 2Y |
| EMC0524 | Bi-log Type Antenna | Schaffner -Chase | CBL6112B | 2966 | 2013-11-27 | 2Y |
| EMC0519 | Bilog Type Antenna | Schaffner -Chase | CBL6143 | 5070 | 2014-06-02 | 2Y |
| EMC2026 | Horn Antenna 1-18GHz | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D | 9120D-841 | 2013-11-28 | 2Y |
| EMC0518 | Horn Antenna | Rohde & Schwarz | HF906 | 100096 | 2014-07-01 | 2Y |
| EMC0521 | 1-26.5 GHz Pre-Amplifier | Agilent | 8449B | 3008A01649 | 2014-03-04 | 1Y |
| EMC2065 | Amplifier | HP | 8447F | N/A | 2013-11-7 | 1Y |
| EMC2063 | 1-26GHz Pre Amplifier | Compliance Direction System Inc. | PAP-1G26-48 | 6279.628 | 2014-07-29 | 1Y |
| EMC0075 | 310N Amplifier | Sonoma | 310N | 272683 | 2014-03-04 | 1Y |
| EMC0523 | Active Loop Antenna | EMCO | 6502 | 42963 | 2014-04-07 | 2Y |
| EMC2041 | Broad-Band Horn Antenna (14)15-26.5(40)GHz | SCHWARZBECK MESS-ELEKTRONI | BBHA 9170 | 9170-375 | 2014-06-01 | 3Y |
| EMC2069 | 2.4GHz filter | Micro-Tronics | BRM 50702 | 149 | 2014-6-5 | 1Y |
| EMC0530 | 10m Semi-Anechoic Chamber | ETS | N/A | N/A | 2014-04-27 | 2Y |

| General used equipment | | | | | | |
|------------------------|----------------|--------------|-----------|------------|------------------------------|-------------------------|
| No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Due date (YYYY-MM-DD) | Calibration Interval |
| EMC0006 | DMM | Fluke | 73 | 70681569 | 2013-11-5 | 1Y |
| EMC0007 | DMM | Fluke | 73 | 70671122 | 2013-11-5 | 1Y |

7 Emission Test Results

7.1 Radiated Emissions, 30MHz to 1GHz

Test Requirement: FCC Part15 B
Test Method: ANSI C63.4
Test Voltage: 120V AC, 60Hz
Test Date: 2013-07-30
Frequency Range: 30MHz to 1GHz
Measurement Distance: 3 m
Detector: Peak for pre-scan
Quasi-Peak if maximised peak within 6dB of limit
(120 kHz resolution bandwidth)
Class / Limit: Class B
For Class B
For 3M

| Frequency range MHz | Quasi-peak limits dB (μ V/m) |
|------------------------|--------------------------------------|
| 30 to 88 | 40 |
| 88 to 216 | 43.5 |
| 216 to 960 | 46 |
| Above 960 | 54 |


At transitional frequencies the lower limit applies.

7.1.1 E.U.T. Operation

Pre-test the RX in motor running mode & cohere mode (with an unmodulated CW signal to the receiver) in order to find the worse case.

Test the RX in motor running mode for the compliance test as the worse case was found.

7.1.2 Test Setup and Procedure

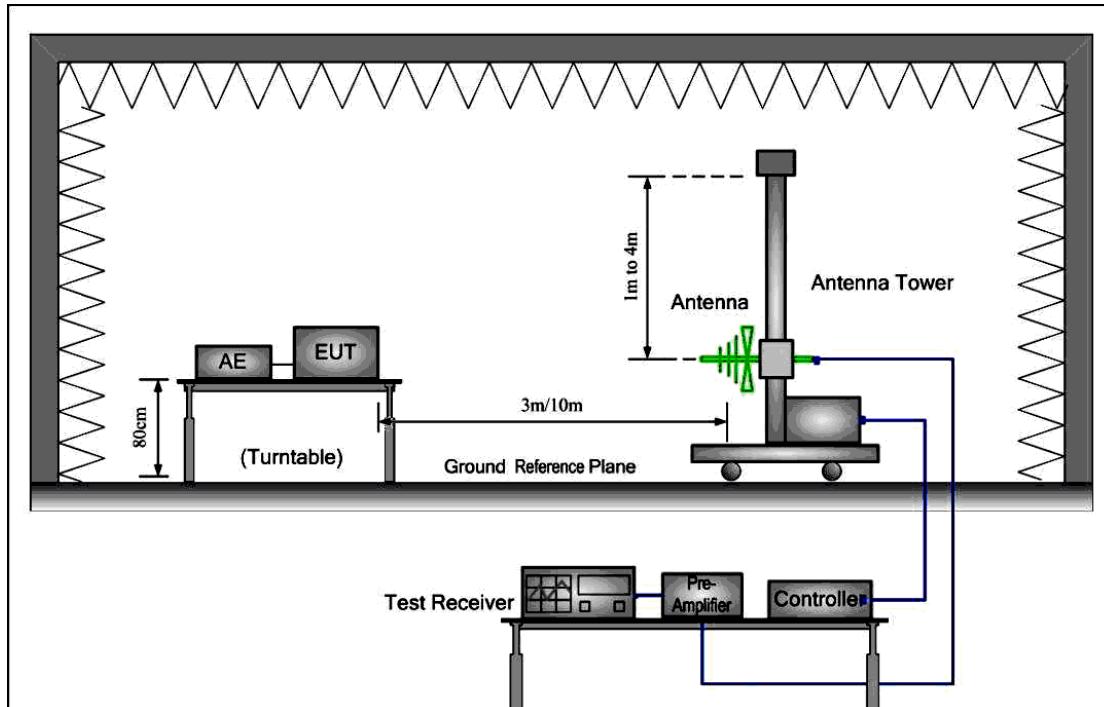


1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. Biconical and log periodic antenna was used for the frequency range from 30MHz to 1GHz
3. The EUT was connected to nominal power supply through a mains power outlet which was bonded to the ground reference plane; The mains cables were draped to the ground reference plane. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

7.1.3 Measurement Data

Vertical:

Peak scan

Level (dB μ V/m)

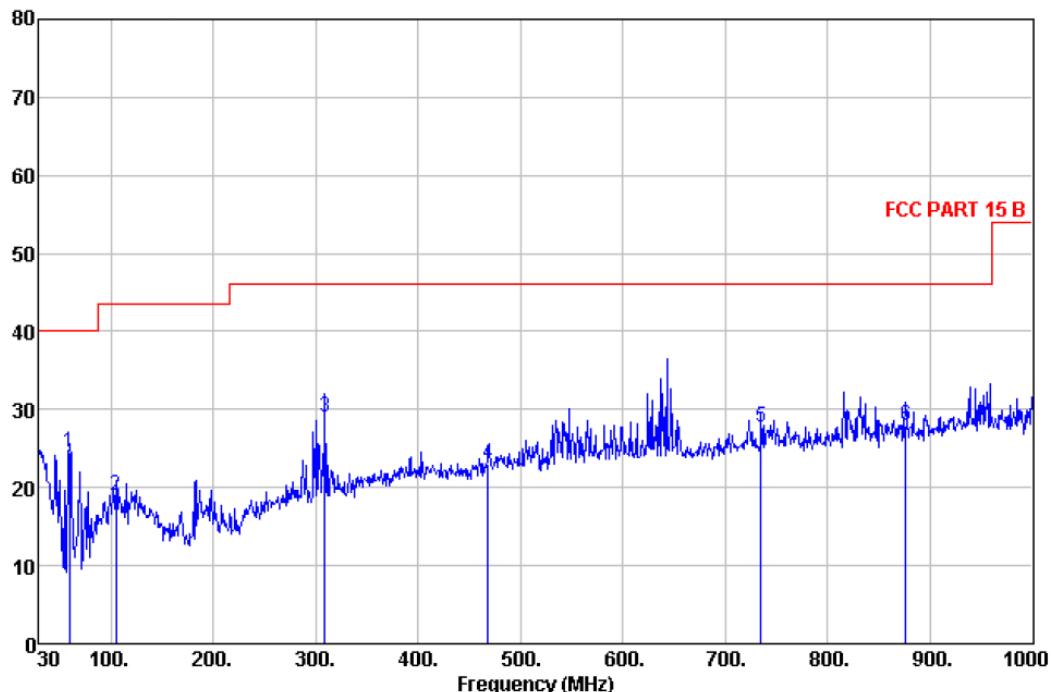


Quasi-peak measurement

| Freq | Read | | Antenna | | Cable | | Preamp | Level | Limit | Over | Line | Limit | Remark |
|---------|------------|----------------|---------|--------|-------|--------------|--------------|--------|-------|------|------|-------|--------|
| | Level | Antenna Factor | Loss | Factor | dB | dB | | | | | | | |
| MHz | dB μ V | dB/m | | | dB | dB μ V/m | dB μ V/m | | | | | | |
| 59.100 | 46.24 | 4.80 | 0.21 | 26.68 | 24.57 | 40.00 | 40.00 | -15.43 | QP | | | | |
| 104.690 | 33.78 | 11.54 | 0.22 | 26.57 | 18.97 | 43.50 | 43.50 | -24.53 | QP | | | | |
| 309.360 | 40.76 | 13.13 | 1.01 | 25.85 | 29.05 | 46.00 | 46.00 | -16.95 | QP | | | | |
| 468.440 | 31.56 | 17.00 | 1.40 | 26.93 | 23.03 | 46.00 | 46.00 | -22.97 | QP | | | | |
| 735.190 | 33.12 | 19.85 | 1.85 | 27.09 | 27.73 | 46.00 | 46.00 | -18.27 | QP | | | | |
| 875.840 | 32.04 | 20.75 | 1.99 | 26.84 | 27.94 | 46.00 | 46.00 | -18.06 | QP | | | | |

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor.

Horizontal:

Peak scan

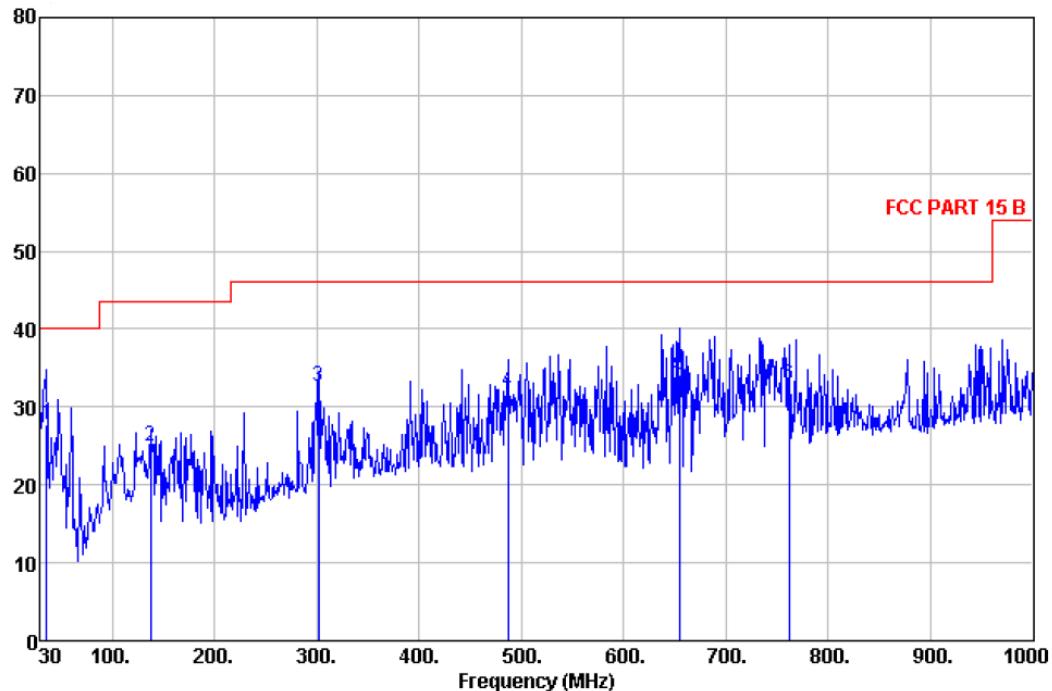Level (dB μ V/m)

Quasi-peak measurement

| Freq | Read Antenna | | Cable Preamp | | Limit | Over Line | Over Limit | Remark |
|---------|--------------|--------|--------------|--------|--------------|--------------|------------|--------|
| | Level | Factor | Loss | Factor | | | | |
| MHz | dB μ V | dB/m | dB | dB | dB μ V/m | dB μ V/m | dB | |
| 35.820 | 37.54 | 16.87 | 0.14 | 26.79 | 27.76 | 40.00 | -12.24 | QP |
| 137.670 | 39.79 | 11.22 | 0.44 | 26.41 | 25.04 | 43.50 | -18.46 | QP |
| 301.600 | 44.80 | 12.67 | 0.99 | 25.82 | 32.64 | 46.00 | -13.36 | QP |
| 486.870 | 40.06 | 17.37 | 1.54 | 26.99 | 31.98 | 46.00 | -14.02 | QP |
| 654.680 | 40.87 | 18.66 | 1.80 | 27.19 | 34.14 | 46.00 | -11.86 | QP |
| 761.380 | 38.07 | 20.10 | 1.83 | 27.08 | 32.92 | 46.00 | -13.08 | QP |

Level = Read Level + Antenna Factor + Cable Loss – Preamp Factor.

7.2 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 B

Frequency Range: 1GHz to 40GHz

Measurement Distance: 3 m

Class / Limit: Class B

Test Date: N/A: See Remark Below

Remark:

There is no need for Radiated Emissions (above 1G) test to be performed on this product in accordance with FCC Part 15: 2012 because the highest internal source is less than 108 MHz.

For further details, please refer to Subject B section 15.33 (b) (1)of FCC Part 15 which states:

The spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement Range (MHz) |
|--|---|
| Below 1.705 | 30 |
| 1.705 to 108 | 1000 |
| 108 to 500 | 2000 |
| 500 to 1000 | 5000 |
| Above 1000 | 5th harmonic of the highest frequency or 40 GHz, whichever is lower |

--End of Report--