

Ke Mei Ou Laboratory Co., Ltd.

E506, 5th Floor, No.39 Keji Middle 2nd Rd, Science & Technology Park, Nanshan District, Shenzhen, P. R. China
Tel: + 86 755 83642690 Fax: + 86 755 83297077
www.kmolab.com

FCC TEST REPORT

Under
FCC 15 Subpart C, Paragraph 15.239

Prepared For :

UP Global Sourcing Ltd.

UP Global Sourcing, Manor Mill, Victoria Street, Chadderton, Oldham OL9 0DD UK.

FCC ID: 2AAR2-EE0795

EUT: Wireless Headphones

Model: EE0795

August 14, 2013

Issue Date:

Original Report

Report Type:

Eric Guo

Test Engineer: Eric Guo

Apollo Liu

Review By: Apollo Liu / Manager

The test report consists 21 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

TABLE OF CONTENTS

1. General Information	3
1. 1 Notes.....	3
1. 2 Testing Laboratory.....	3
1. 3 Details of Applicant.....	3
1. 4 Application Details	3
1. 5 Test Item	3
1. 6 Test Standards.....	3
2. Technical Test.....	4
2. 1 Summary of Test Results	4
2. 2 Antenna Requirement	4
3. EUT Modifications	4
4. Conducted Power Line Test.....	5
4. 1 Test Equipment	5
4. 2 Test Procedure	5
4. 3 Test Setup	5
4. 4 Configuration of the EUT	6
4. 5 EUT Operating Condition.....	7
4. 6 Conducted Power Line Emission Limits	7
4. 7 Conducted Power Line Test Result.....	7
5. Radiated Emission Test	8
5. 1 Test Equipment	8
5. 2 Test Procedure	8
5. 3 Radiated Test Setup	8
5. 4 Configuration of the EUT.....	9
5. 5 EUT Operating Condition.....	9
5. 6 Radiated Emission Limit	10
5. 7 Radiated Emission Test Result.....	11
6. Band Edge	12
6. 1 Test Equipment	12
6. 2 Test Procedure	12
6. 3 Radiated Test Setup	12
6. 4 Configuration of The EUT.....	13
6. 5 EUT Operating Condition.....	13
6. 6 Band Edge FCC 15.239 Limit	13
6. 7 Band Edge Test Result.....	13
7. Photos of Testing.....	14
7. 1 EUT Test Photographs.....	14
7. 2 EUT Detailed Photographs	15
8. FCC ID Label.....	20
9. Test Equipment.....	21

1. General Information

1. 1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

1. 2 Testing Laboratory

SinTek Laboratory Co., Ltd.

Site on File with the Federal Communications Commission – United States
Registration Number: 963441

1. 3 Details of Applicant

Name : UP Global Sourcing Ltd.
Address : UP Global Sourcing, Manor Mill, Victoria Street, Chadderton, Oldham OL9 0DD UK.
Contact : Mr. Mak Wood Lung
Tel : 852 3906 3987
Fax : N/A

1. 4 Application Details

Date of Receipt of Application: : March 22, 2010
Date of Receipt of Test Item: : March 22, 2010
Date of Test : July 19~July 30, 2013

1. 5 Test Item

Manufacturer : Dongguan Xiang peng Electronics Co.,Ltd
Address : No.6, South No.2 Xiangxi Industrial Road, Shipai Town, Dongguan City.
Trade Name : N/A
Model No.(Base) : EE0795
Model No.(Extension) : N/A
Description : Wireless Headphones

Additional Information

Frequency : 88.3MHz
Maximum Range : N/A
Number of Channels : N/A
Transmitter Antenna : The transmitter's antenna is on PCB layout
Power Supply : DC 3V(AAA 1.5V*2)
Antenna : PCB Antenna

1. 6 Test Standards

FCC 15 Subpart C, Paragraph 15.239

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

2. Technical Test

2. 1 Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	PASS	Complies
FCC Part 15, Paragraph 15.207	Conducted Test	N/A	Complies
FCC Part 15 Subpart C Paragraph 15.239 Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Subpart C Paragraph 15.239 Limit & Paragraph 15.209	Radiated Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.239 Limit	Measured Bandwidth	PASS	Complies.

2. 2 Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The transmitter's antenna is on PCB layout which is a copper trace on PCB, this is permanently attached antenna and meets the requirements of this section.

3. EUT Modifications

No modification by test lab.

4. Conducted Power Line Test

4. 1 Test Equipment


Please refer to Section 9 this report.

4. 2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4. 3 Test Setup

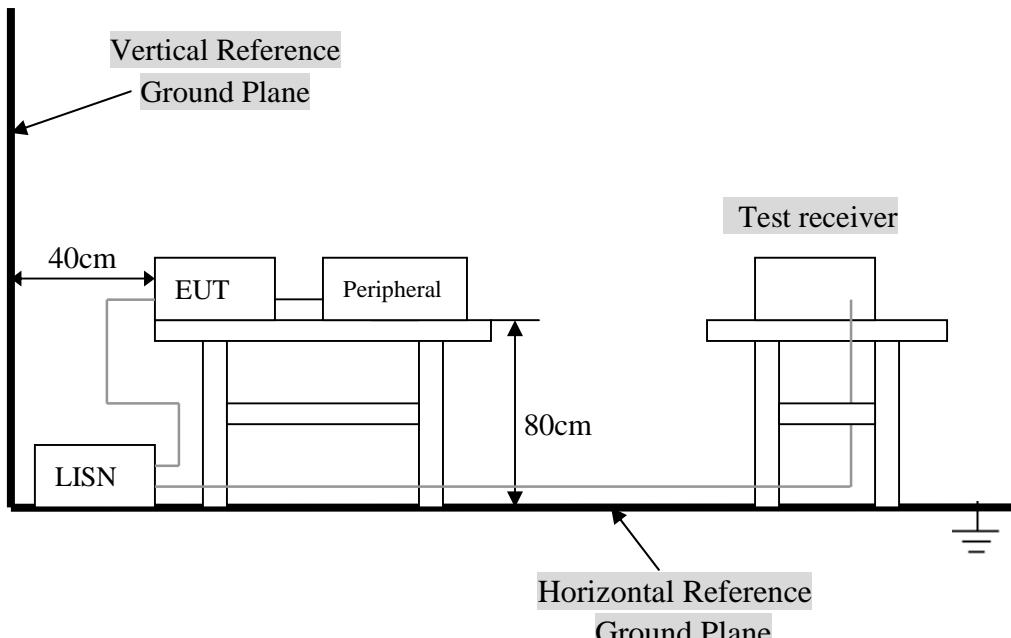

For the actual test configuration, Please refer to the related items – Photos of Testing.

4.4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used DC3V. The operation frequency is 88.3MHz. Enable the signal transmitted from the external antenna from EUT to receiver. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

- 1) Below 1GHz, the channel low, middle, high were pre-tested, The channel middle, worst case one, was chosen for conducted and radiated emission test.
- 2) Above 1GHz, the channel low, middle, high were tested individually.

Test with a iPod Player / Notebook as the sound source for the EUT.

A. EUT

Device	Manufacturer	Model #	FCC ID
Wireless Headphones	Dongguan Xiang peng Electronics Co.,Ltd	EE0795	2AAR2-EE0795

B. Internal Devices

Device	Manufacturer	Model #	FCC ID
N/A			


C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord
PC	Dell	2400n	DoC	1.5m unshielded power cord

4.5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

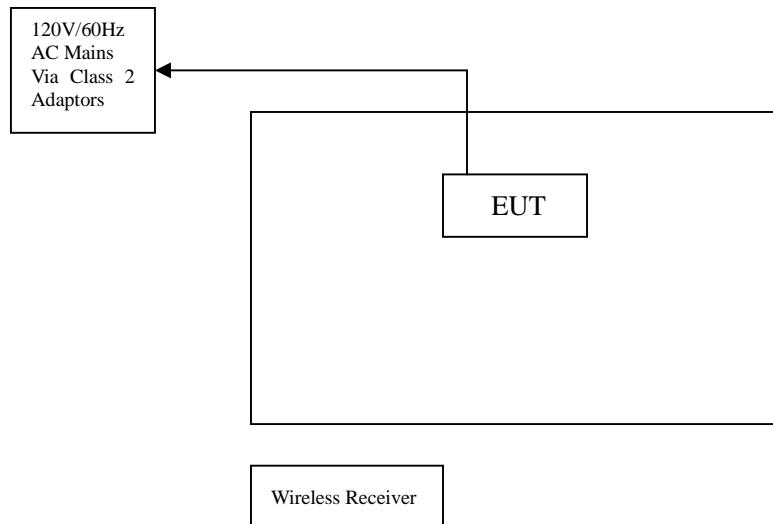

4.6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

Note: In the above table, the tighter limit applies at the band edges.

4.7 Conducted Power Line Test Result

Owing to the DC operation of EUT, this test item is not performed.

5. Radiated Emission Test

5. 1 Test Equipment


Please refer to Section 9 this report.

5. 2 Test Procedure


1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 9 kHz to 25 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4 - 2003.

5. 3 Radiated Test Setup

For Frequencies below 30 MHz

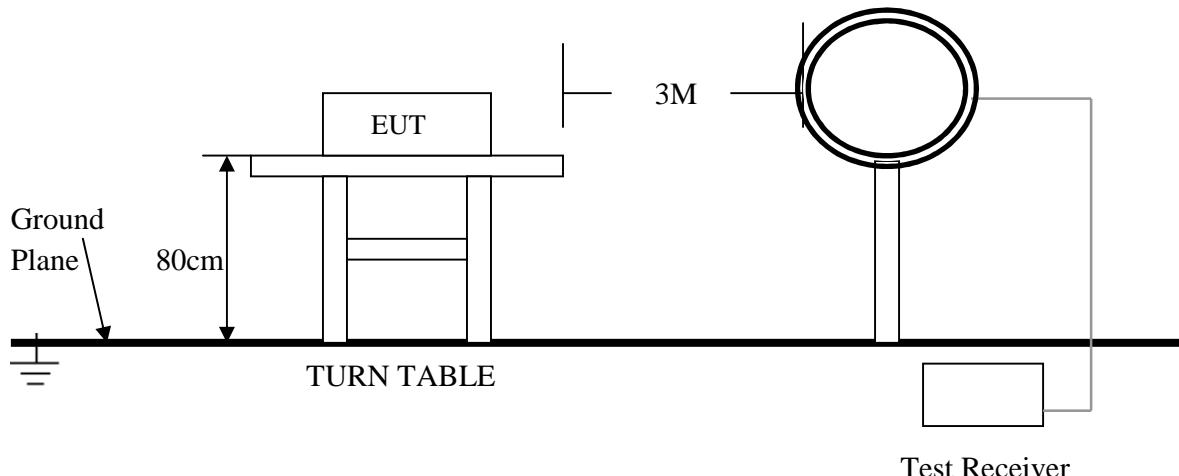

For the actual test configuration , please refer to the related items – Photos of Testing

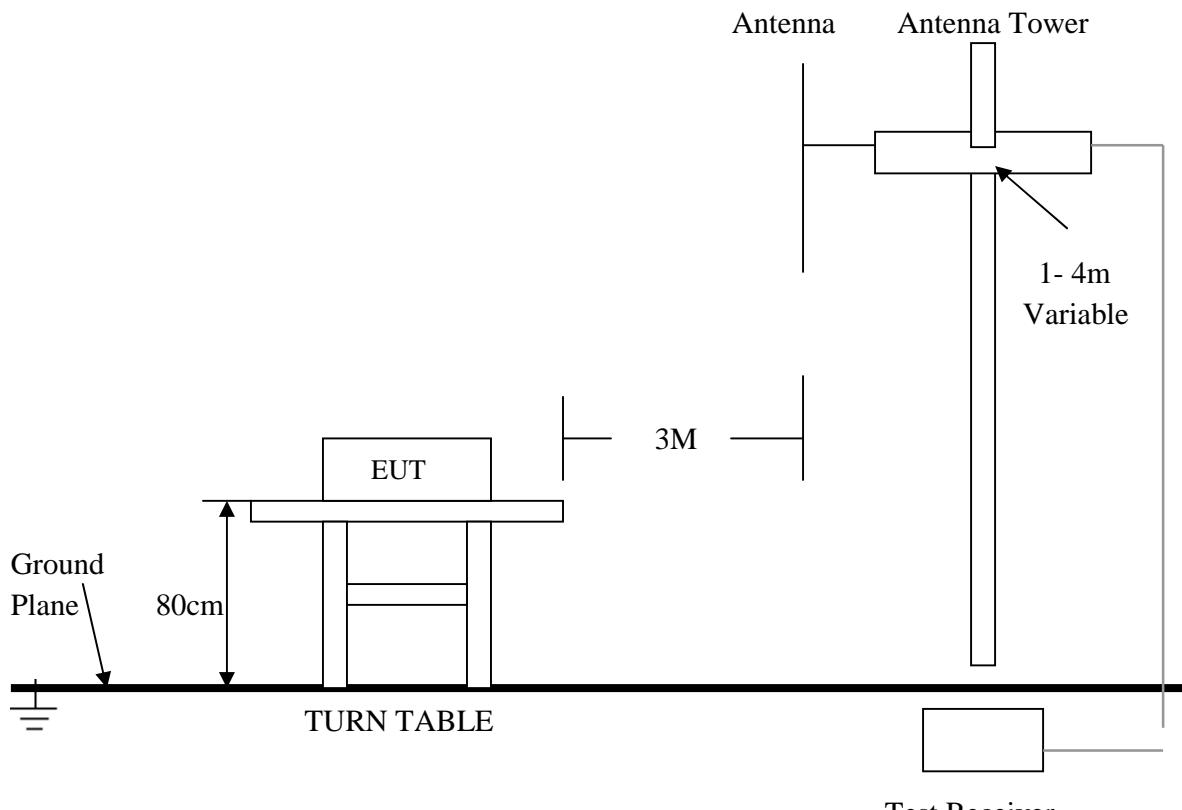For Frequencies above 30 MHz

For the actual test configuration , please refer to the related items – Photos of Testing

5.4 Configuration of the EUT

Same as section 4.4 of this report

5.5 EUT Operating Condition

Same as section 4.5 of this report.

5.6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

A. FCC Part 15 Subpart C Paragraph 15.239 Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)	
	Peak (dBuV/m)	Average (dBuV/m)
88 to 108	67.96	47.96

Note:

- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

Note:

- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
- (2) In the Above Table, the tighter limit applies at the band edges.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5. 7 Radiated Emission Test Result

A. Fundamental Radiated Emission Data - FCC 15.239

Product	: Wireless Headphones	Test Mode	: Channel 88.3MHz
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3V	Humidity	: 56%RH
Test Result	: PASS		

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
88.300	38.93	HORIZ	67.96 / 47.96	-29.03
88.300	41.71	VERT	67.96 / 47.96	-26.25

Note:

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

B. General Radiated Emission Data

Product	: Wireless Headphones	Test Mode	: Channel 88.3MHz
Test Item	: General Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 3V	Humidity	: 56%RH
Test Result	: PASS		

For Frequency Below 30MHz

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A

Note:

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

For Frequency Above 30MHz

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
353.160	32.32	HORIZ	46.0	-13.68
529.840	44.28	VERT	46.0	-1.72
529.800	40.21	HORIZ	46.0	-5.79
618.160	44.79	VERT	46.0	-1.21
882.800	38.98	HORIZ	46.0	-7.02
882.920	43.65	VERT	46.0	-2.35

Note:

- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

6. Band Edge


6. 1 Test Equipment

Please refer to Section 9 this report.

6. 2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.

6. 3 Radiated Test Setup

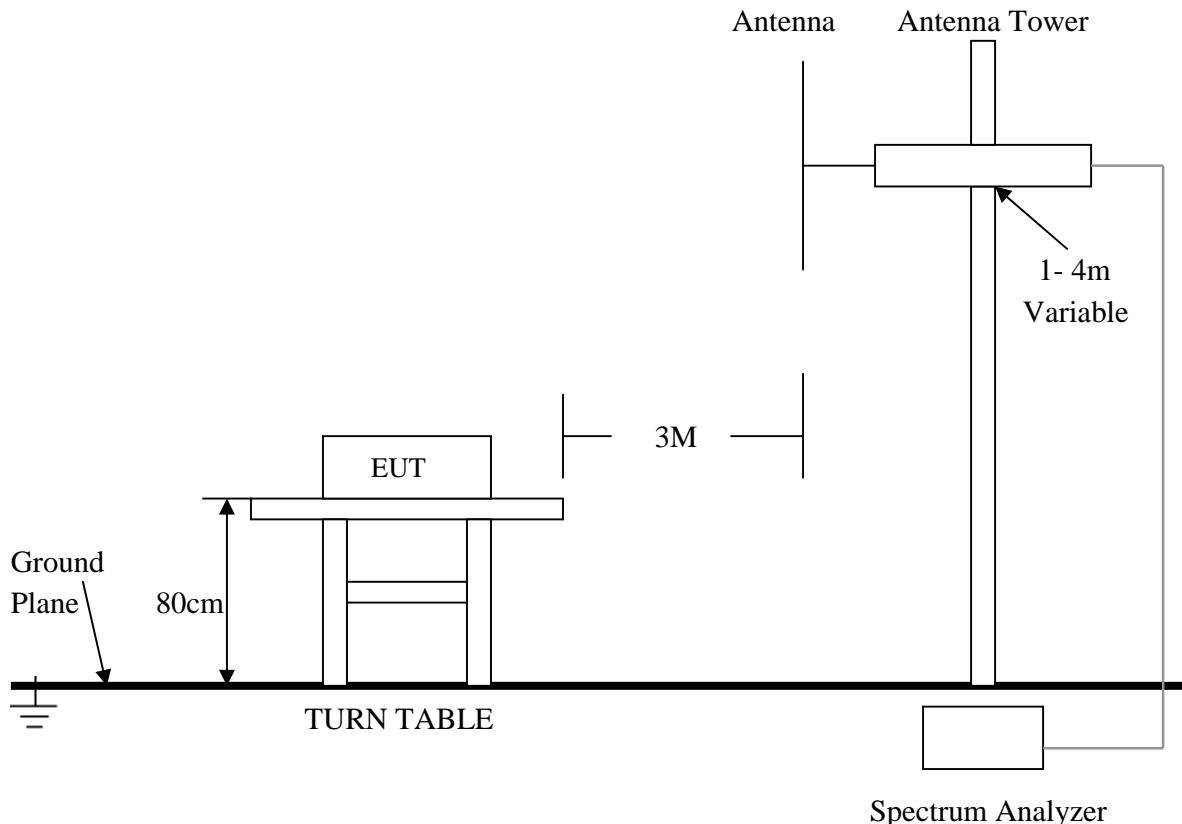

For the actual test configuration , please refer to the related items – Photos of Testing

6. 4 Configuration of The EUT

Same as section 4 . 4 of this report

6. 5 EUT Operating Condition


Same as section 4 . 5 of this report.

6. 6 Band Edge FCC 15.239 Limit

Emission from the intentional radiator shall be confined within a bands 200kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88 to 108 MHz.

6. 7 Band Edge Test Result

Product	: Wireless Headphones	Test Mode	: Channel 88.3MHz
Test Item	: Band Edge Data	Temperature	: 25 °C
Test Voltage	: DC 3V	Humidity	: 56%RH
Test Result	: PASS		

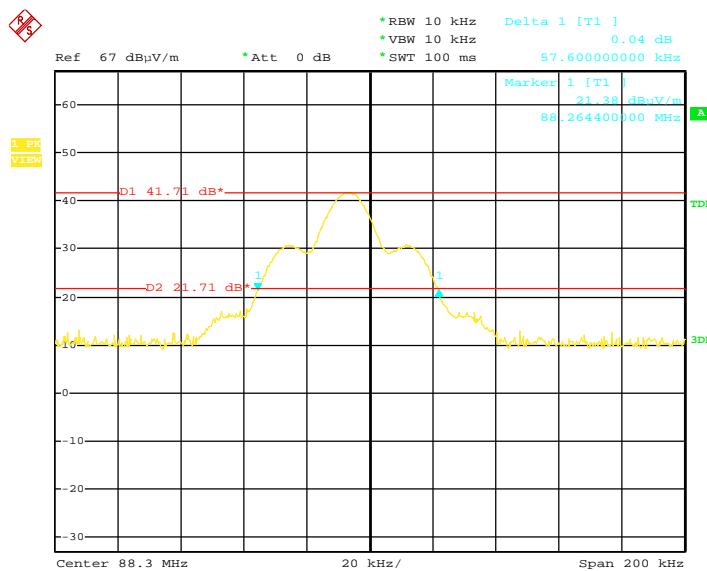

Date: 30.JUL.2013 17:29:54

Note:

- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- (2) The average measurement was not performed when the peak measured data under the limit of average detection.

7. Photos of Testing

7.1 EUT Test Photographs

Radiated emission test view



7.2 EUT Detailed Photographs

EUT top view






EUT bottom view







EUT inside whole view

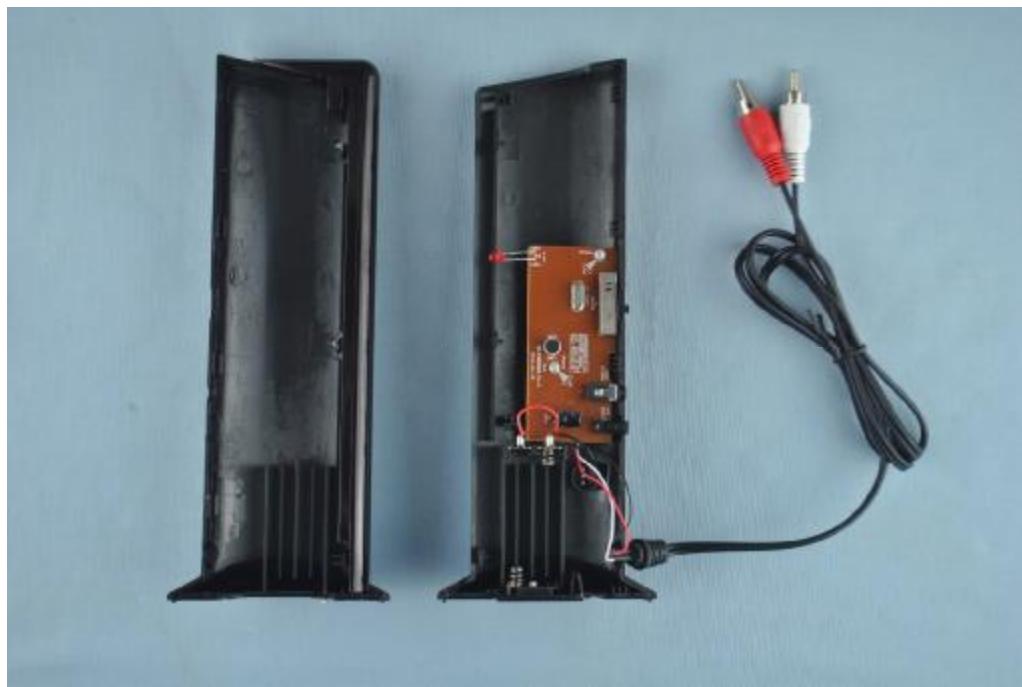

Main&RF board component side

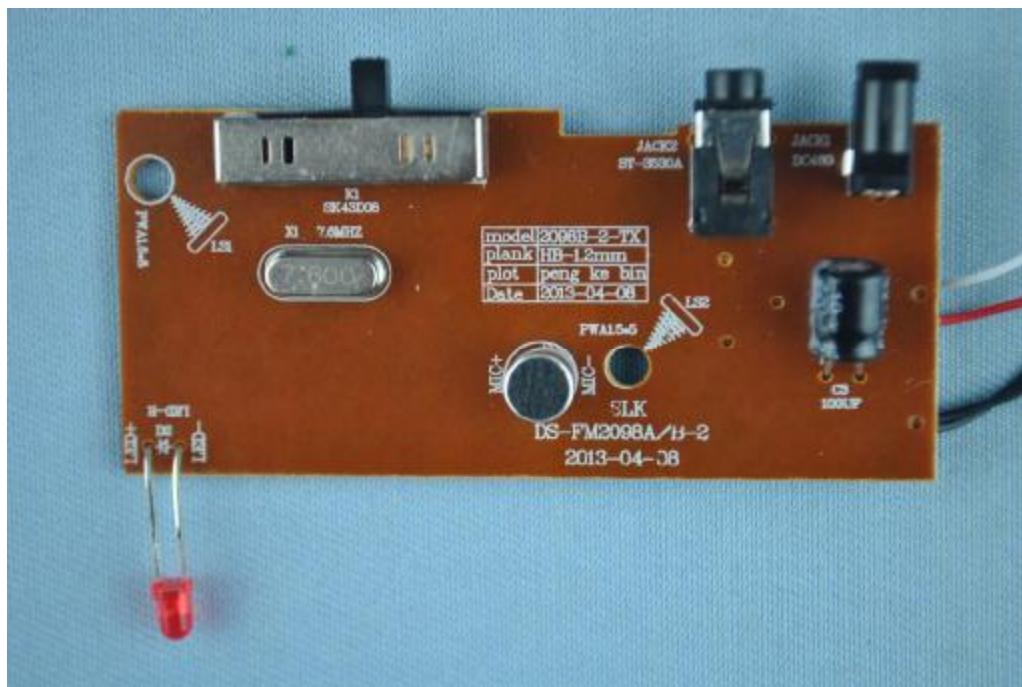

Main&RF board solder side

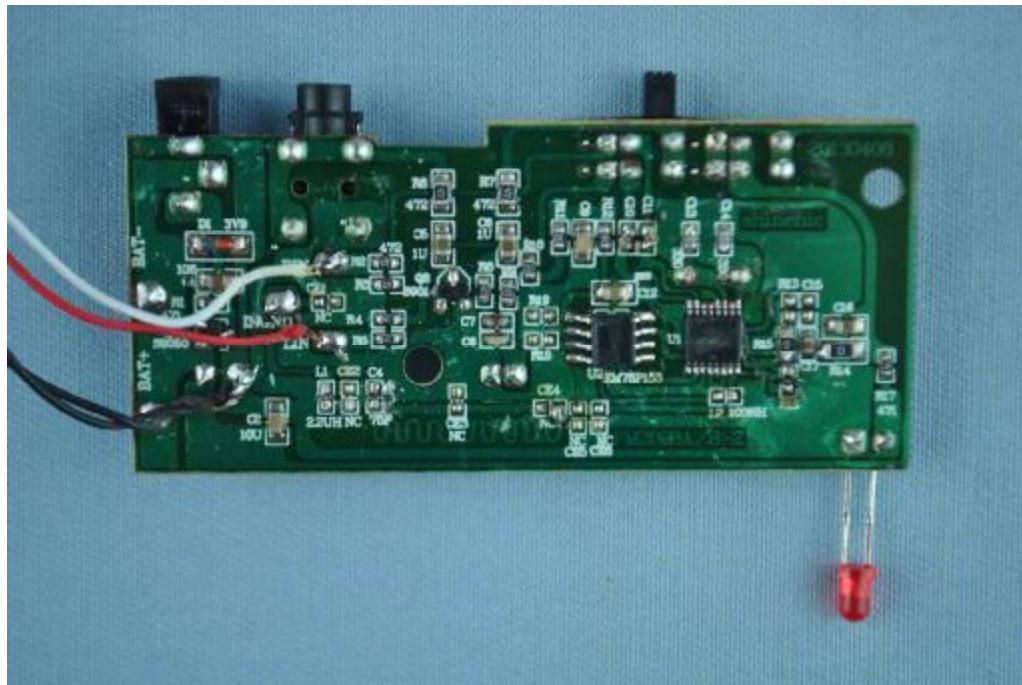

8. FCC ID Label


FCC ID: 2AAR2-EE0795

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location

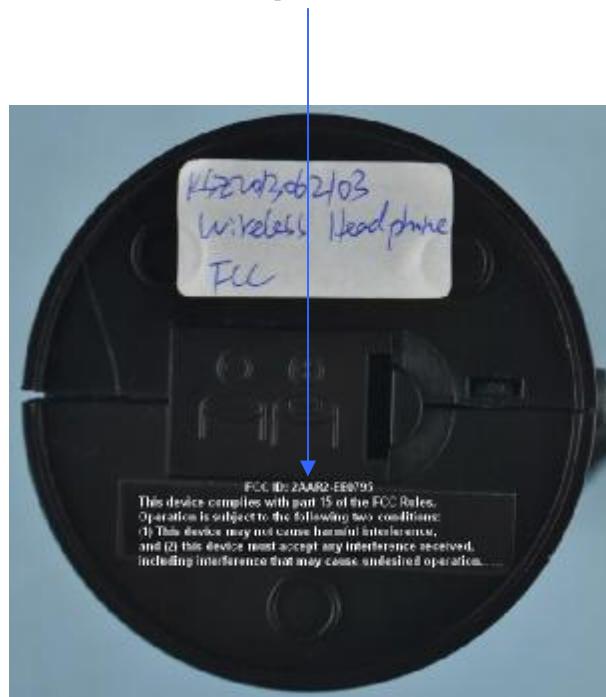

9. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Due Date
Turntable	SinTek	N/A	N/A	NCR
Antenna Tower	SinTek	N/A	N/A	NCR
OATS	SinTek	N/A	N/A	Sep.28, 2013
Pre-Amplifier	Agilent	87405C	KMO-SZ155	Dec.6, 2013
Pre-Amplifier	Com-Power	PAM-840	KMO-SZ156	Dec.6, 2013
Horn Antenna	Com-Power	AH-840	KMO-SZ157	Dec.6, 2013
EMI Test Receiver	Rohde & Schwarz	ESPI7	KMO-SZ002	June 27, 2014
Spectrum Analyzer	Rohde & Schwarz	FSP40	KMO-SZ003	June 27, 2014
Loop Antenna	Rohde & Schwarz	HFH2-Z2	KMO-SZ004	Jan. 30, 2014
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ005	Sep.18, 2013
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ006	Sep.18, 2013
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ007	Sep.18, 2013
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ008	Sep.18, 2013
AMN	Rohde & Schwarz	ESH3-Z5	KMO-SZ009	June 27, 2014
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	KMO-SZ077	June 27, 2014
ISN	SCHWARZBECK	NTFM 8158 CAT3	KMO-SZ070	Nov.19, 2013
ISN	SCHWARZBECK	NTFM 8158 CAT5	KMO-SZ071	Nov.19, 2013
ISN	SCHWARZBECK	NTFM 8158 CAT6	KMO-SZ072	Nov.19, 2013
KMO Shielded Room	KMO	KMO-001	N/A	N/A
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	KMO-SZ037	Sep.18, 2013
SOHO Telephone Switching System	IKE	2000-108C	N/A	NCR
3m Anechoic Chamber	KMO	KMO-3AC	KMO-3AC-1	May 29, 2014