


Appendix A: Test Results of FCC Part 15C


APPENDIX A: TEST RESULTS OF FCC PART 15C.....	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	3
APPENDIX A.3: TEST RESULTS OF RADIATED SPURIOUS EMISSION.....	4
9kHz - 90KHz.....	4
9KHz - 30MHz	7
110KHz - 490KHz	10
30MHz - 1GHz.....	13
APPENDIX A.4: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	15

Appendix A.1: Test Results of 20dB Bandwidth

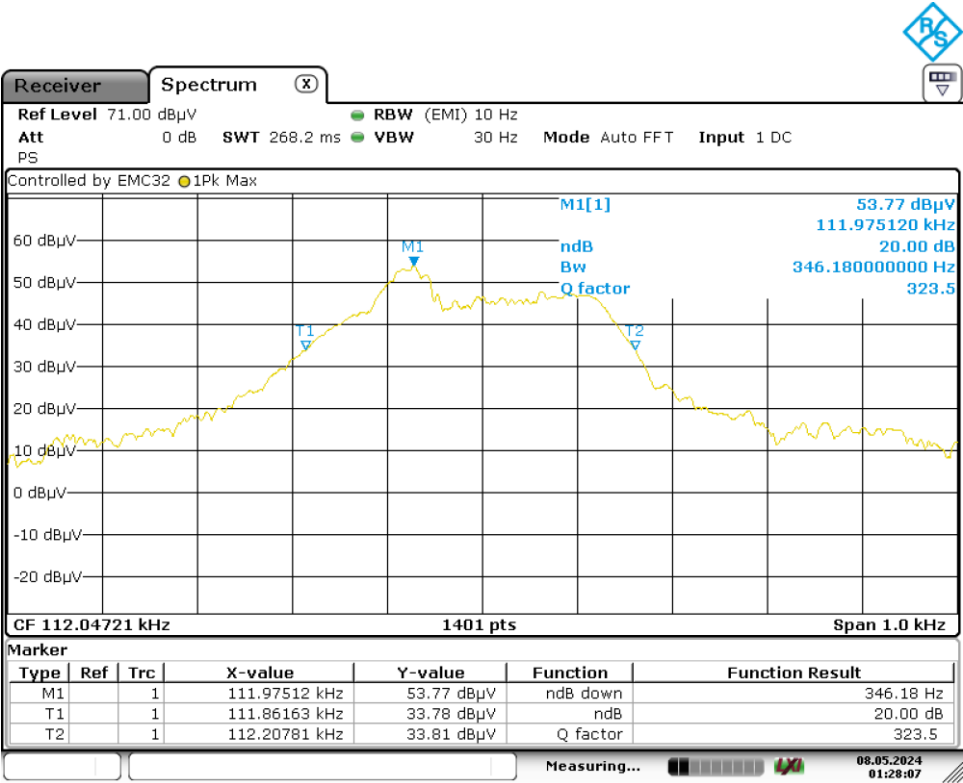

Date: 8.MAY.2024 01:28:07

Appendix A.2: Test Results of 99% Bandwidth

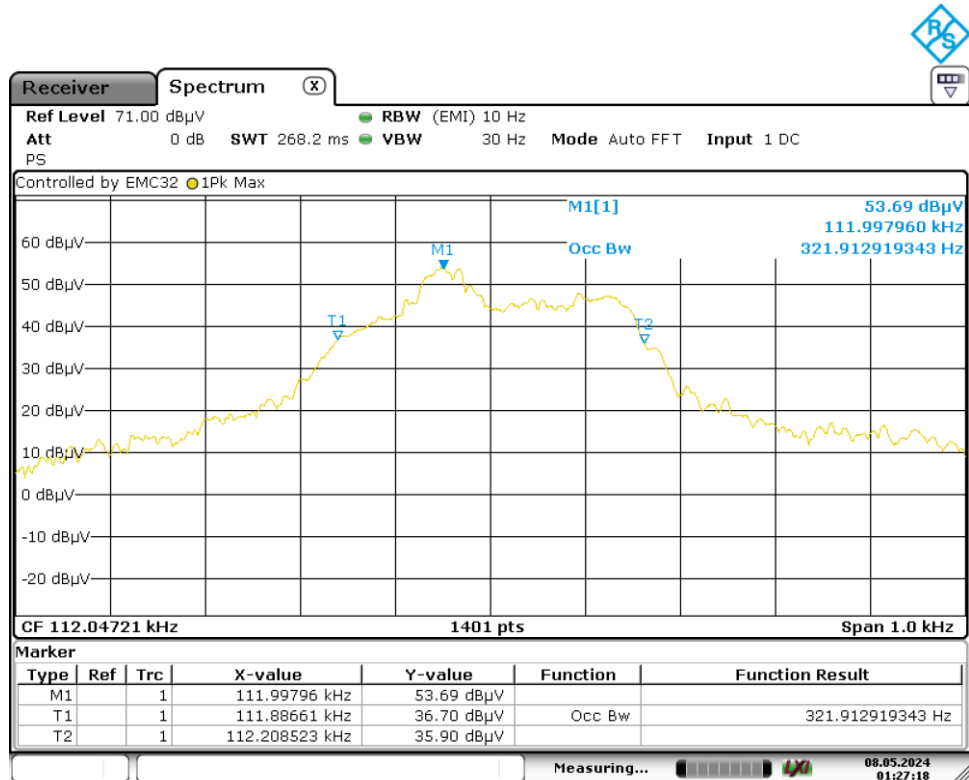


Date: 8.MAY.2024 01:27:18

Appendix A.3: Test Results of Radiated Spurious Emission

9kHz - 90KHz

EUT Information

EUT Name:	5000MAH SUCTION CUP POWERBANK
Model:	EE7800
Test Mode:	Charging
Order No/Sample No:	168479564/A003698067-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

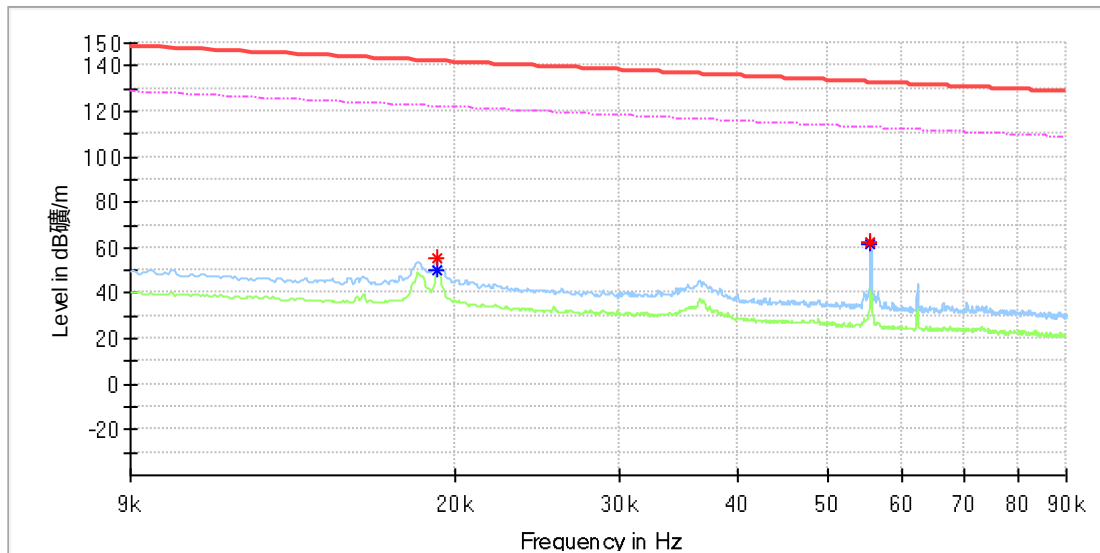


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	55.86	---	141.93	86.07	100.0	X	359.0	20.0
0.019183	---	50.33	121.93	71.60	100.0	X	359.0	20.0
0.055633	62.36	---	132.69	70.33	100.0	X	293.0	20.0
0.055633	---	61.83	112.69	50.86	100.0	X	293.0	20.0

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

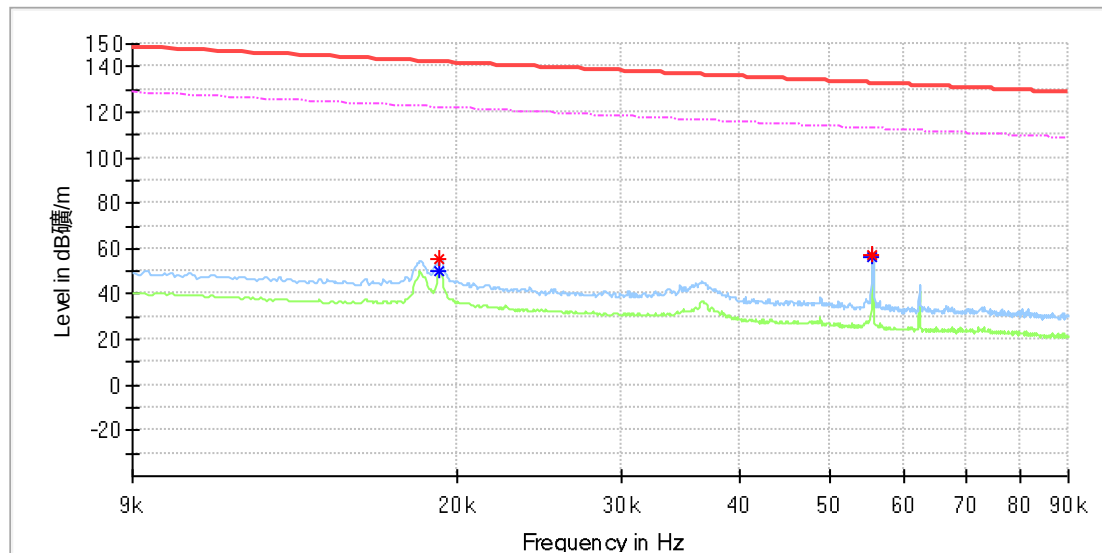


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019125	55.83	---	141.96	86.13	100.0	Y	124.0	20.0
0.019183	---	50.44	121.93	71.49	100.0	Y	44.0	20.0
0.055633	57.46	---	132.69	75.23	100.0	Y	6.0	20.0
0.055633	---	56.68	112.69	56.01	100.0	Y	6.0	20.0

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

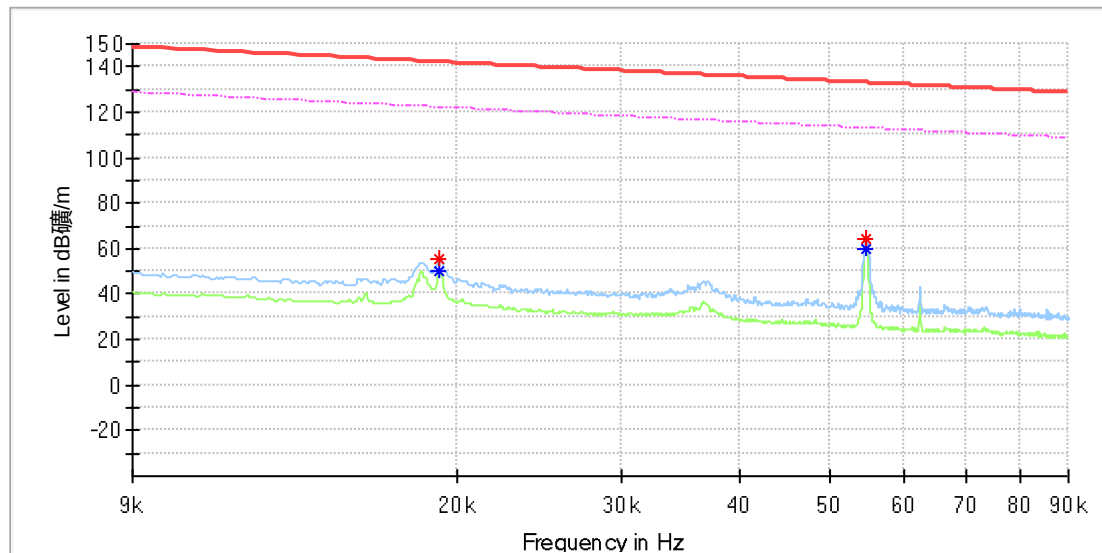

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	55.76	---	141.93	86.17	100.0	Z	321.0	20.0
0.019183	---	49.94	121.93	71.99	100.0	Z	321.0	20.0
0.054765	---	59.90	112.82	52.92	100.0	Z	22.0	20.0
0.054823	64.31	---	132.81	68.50	100.0	Z	22.0	20.0

9KHz – 30MHz

Note: The highest waveform in the figure is Fundamental.

EUT Information

EUT Name:	5000MAH SUCTION CUP POWERBANK
Model:	EE7800
Test Mode:	Charging
Order No/Sample No:	168479564/A003698067-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

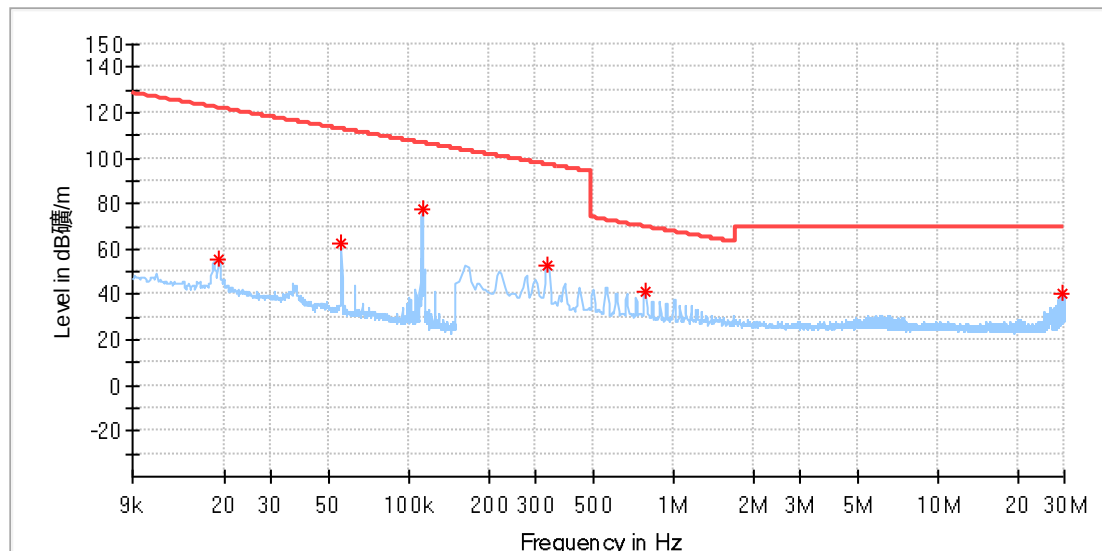

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	55.05	121.98	66.93	100.0	X	258.0	20.1
0.055530	62.42	112.70	50.28	100.0	X	281.0	20.1
0.112333	77.41	106.59	29.18	100.0	X	150.0	20.1
0.334368	53.02	97.12	44.10	100.0	X	101.0	20.1
0.782118	41.41	69.75	28.34	100.0	X	107.0	20.1
29.591757	40.29	69.50	29.21	100.0	X	0.0	20.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

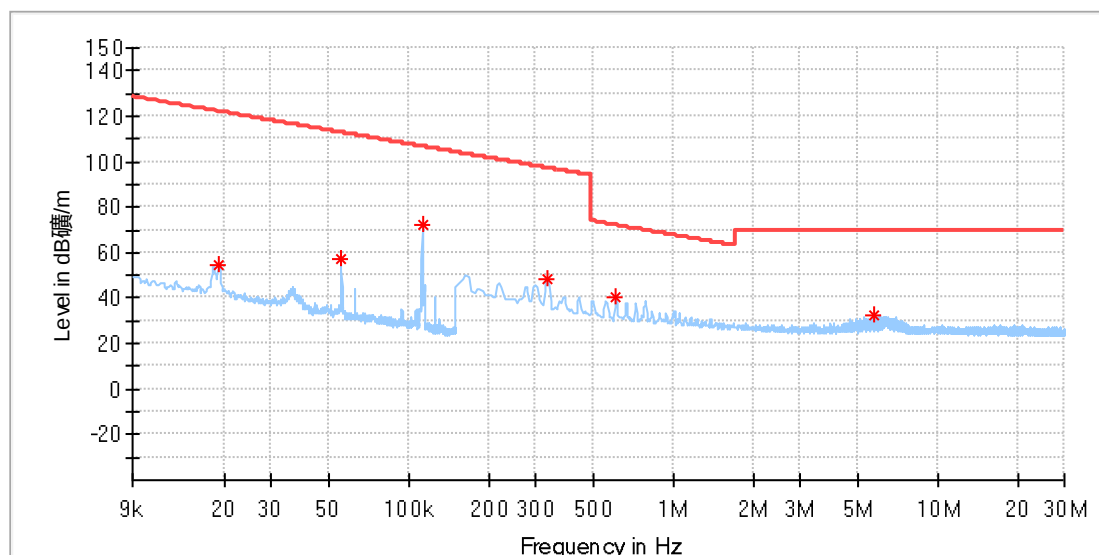

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	54.93	121.98	67.05	100.0	Y	165.0	20.1
0.055329	57.27	112.74	55.47	100.0	Y	0.0	20.1
0.112232	72.06	106.60	34.54	100.0	Y	224.0	20.1
0.334368	48.13	97.12	48.99	100.0	Y	14.0	20.1
0.606530	40.09	71.95	31.86	100.0	Y	11.0	20.1
5.755655	32.36	69.50	37.14	100.0	Y	14.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

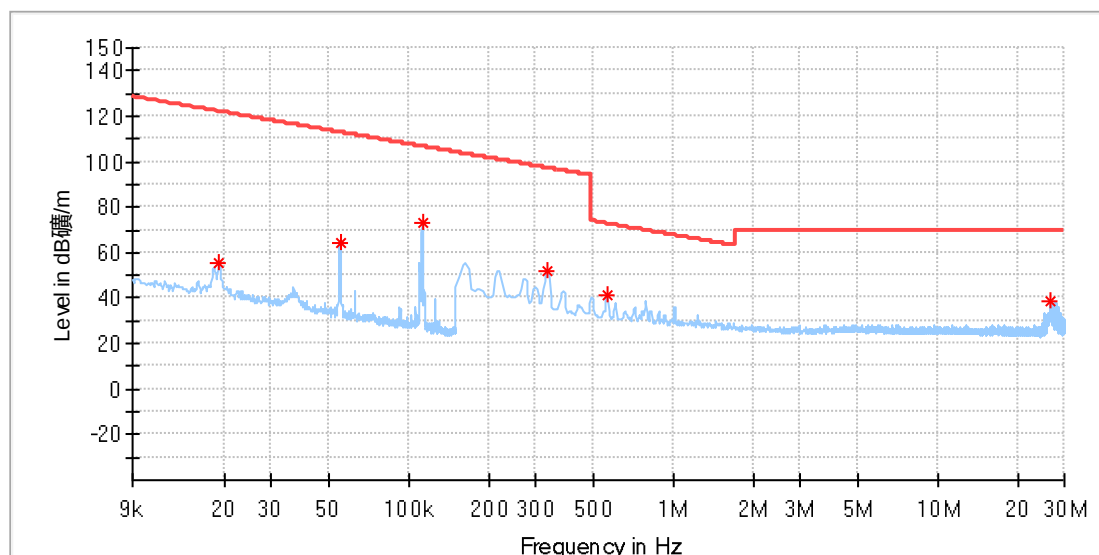

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	55.50	121.94	66.43	100.0	Z	209.0	20.1
0.054926	64.08	112.80	48.72	100.0	Z	47.0	20.1
0.112232	73.41	106.60	33.18	100.0	Z	128.0	20.1
0.334368	51.68	97.12	45.44	100.0	Z	137.0	20.1
0.558243	41.71	72.67	30.96	100.0	Z	97.0	20.1
26.725279	38.73	69.50	30.77	100.0	Z	46.0	20.7

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

110KHz - 490KHz

Note: The highest waveform in the figure is Fundamental.

EUT Information

EUT Name:	5000MAH SUCTION CUP POWERBANK
Model:	EE7800
Test Mode:	Charging
Order No/Sample No:	168479564/A003698067-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

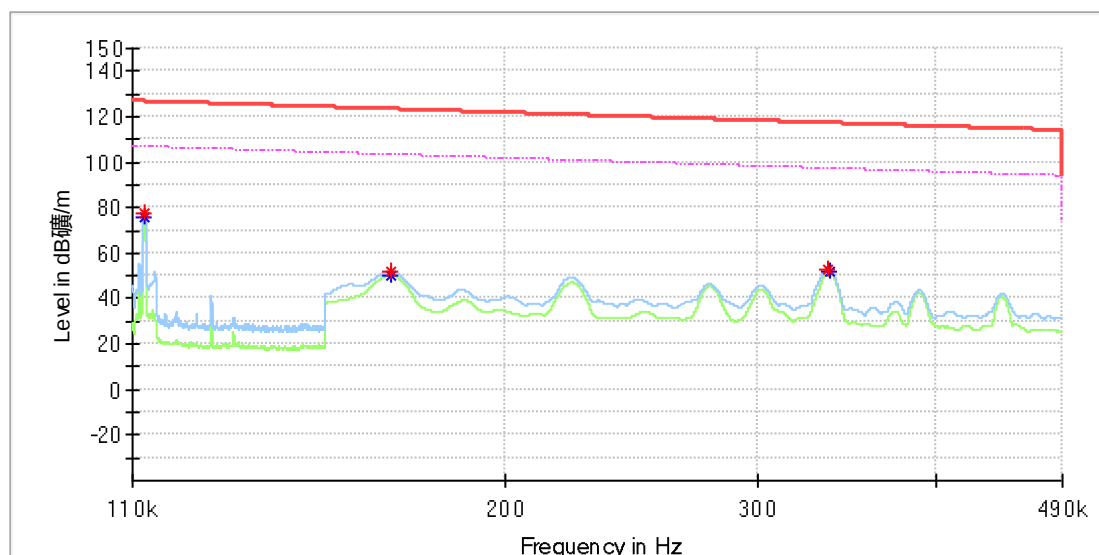


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.112086	---	75.79	106.61	30.81	100.0	X	145.0	20.0
0.112286	77.48	---	126.59	49.11	100.0	X	119.0	20.0
0.166850	---	50.29	103.15	52.87	100.0	X	271.0	20.0
0.166900	51.52	---	123.15	71.63	100.0	X	271.0	20.0
0.336200	52.70	---	117.07	64.37	100.0	X	122.0	20.0
0.336750	---	51.64	97.06	45.42	100.0	X	122.0	20.0

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

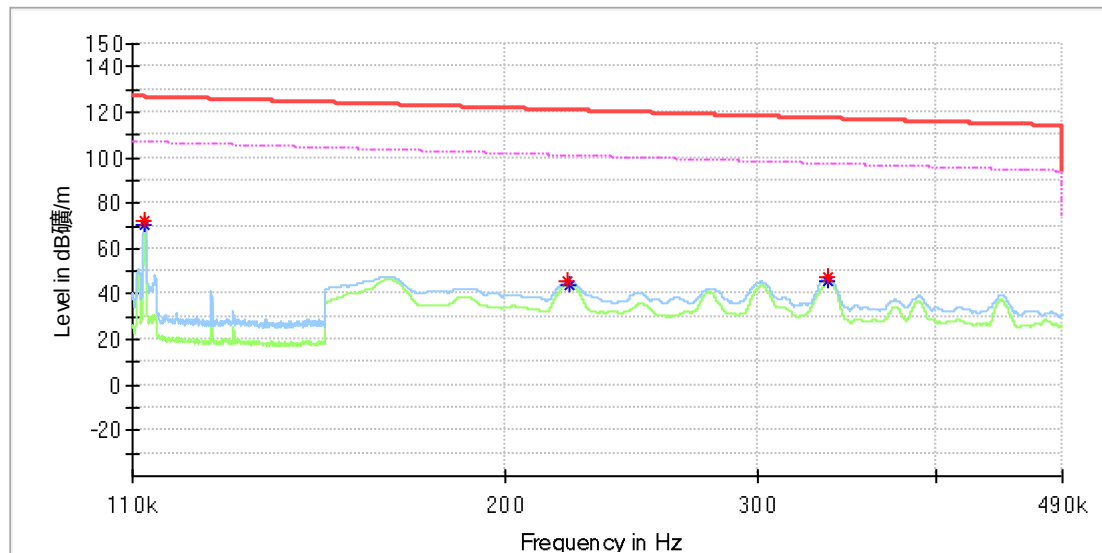


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.112143	---	70.44	106.60	36.16	100.0	Y	46.0	20.0
0.112314	72.43	---	126.59	54.16	100.0	Y	73.0	20.0
0.221250	45.62	---	120.70	75.08	100.0	Y	0.0	20.0
0.221750	---	44.16	100.68	56.52	100.0	Y	0.0	20.0
0.335850	47.43	---	117.08	69.65	100.0	Y	20.0	20.0
0.336500	---	45.51	97.06	51.55	100.0	Y	20.0	20.0

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

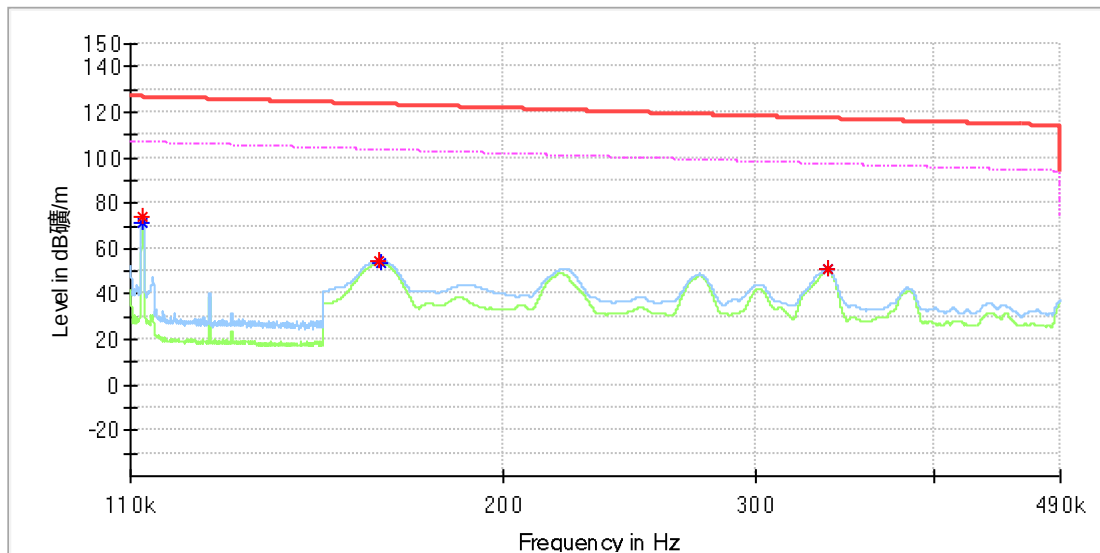


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.112114	---	71.36	106.60	35.25	100.0	Z	152.0	20.0
0.112286	73.64	---	126.59	52.95	100.0	Z	139.0	20.0
0.164100	54.79	---	123.30	68.51	100.0	Z	16.0	20.0
0.164500	---	53.64	103.28	49.63	100.0	Z	16.0	20.0
0.336850	51.04	---	117.05	66.01	100.0	Z	129.0	20.0
0.336900	---	50.63	97.05	46.42	100.0	Z	129.0	20.0

30MHz - 1GHz

EUT Information

EUT Name:	5000MAH SUCTION CUP POWERBANK
Model:	EE7800
Test Mode:	Charging
Order No/Sample No:	168479564/A003698067-003
Test Voltage:	Adaptor
Remark:	Temp 23 Humi:53%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

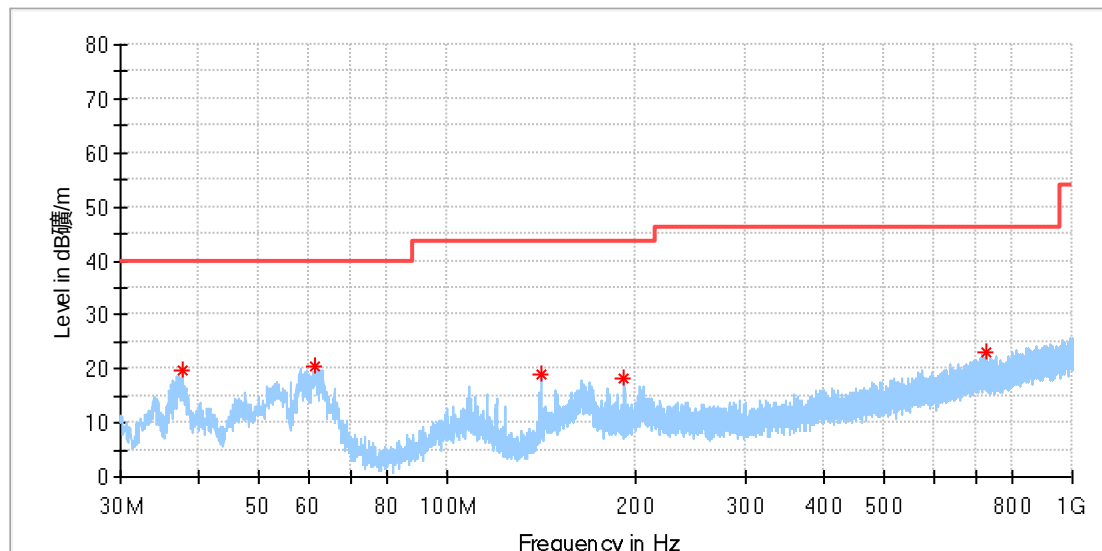

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.722692	19.61	40.00	20.39	100.0	H	0.0	-21.2
61.413077	20.29	40.00	19.71	100.0	H	2.0	-19.6
141.363462	18.87	43.50	24.63	100.0	H	311.0	-22.6
191.990000	18.33	43.50	25.17	100.0	H	355.0	-19.7
725.639231	23.07	46.00	22.93	100.0	H	355.0	-8.0

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Model: EE7800
Test Mode: Charging
Order No/Sample No: 168479564/A003698067-003
Test Voltage: Adaptor
Remark: Temp 23 Humi:53%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

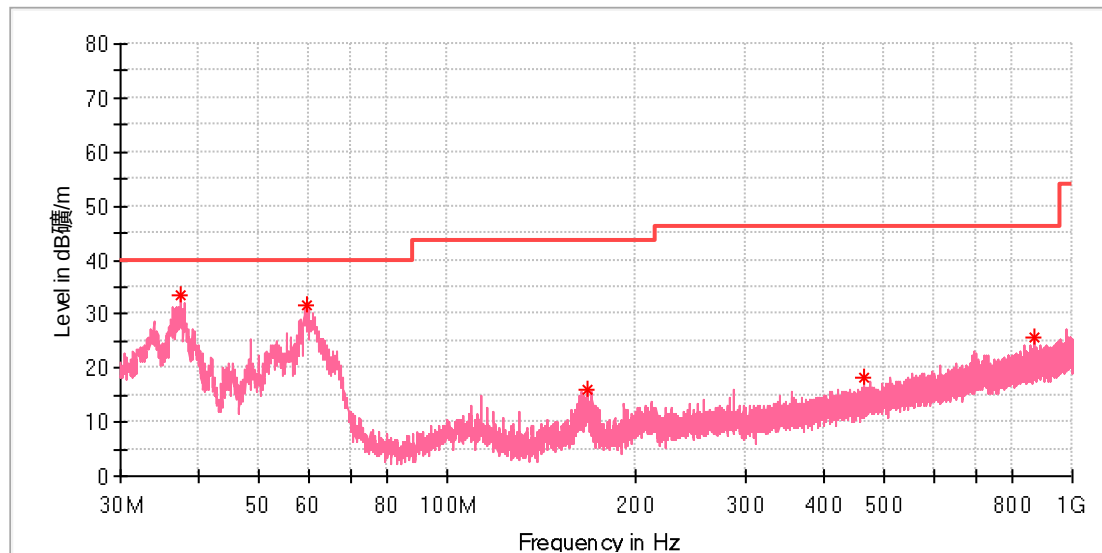

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.536154	33.30	40.00	6.70	100.0	V	305.0	-21.2
59.696923	31.55	40.00	8.45	100.0	V	246.0	-19.3
167.180385	16.08	43.50	27.42	100.0	V	30.0	-21.7
465.604615	18.21	46.00	27.79	100.0	V	323.0	-12.9
872.071923	25.82	46.00	20.18	100.0	V	198.0	-5.7


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.4: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	5000MAH SUCTION CUP POWERBANK
Order Number:	168479564 ItemXX
Model:	EE7800
Test Mode:	Wireless Charging (5W)
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15C
Test By:/Review By:	Junhua/ Shower Dai
Tem./Hum./Pressure:	24.3°C/52.2%/101kPa
Remark:	SR2

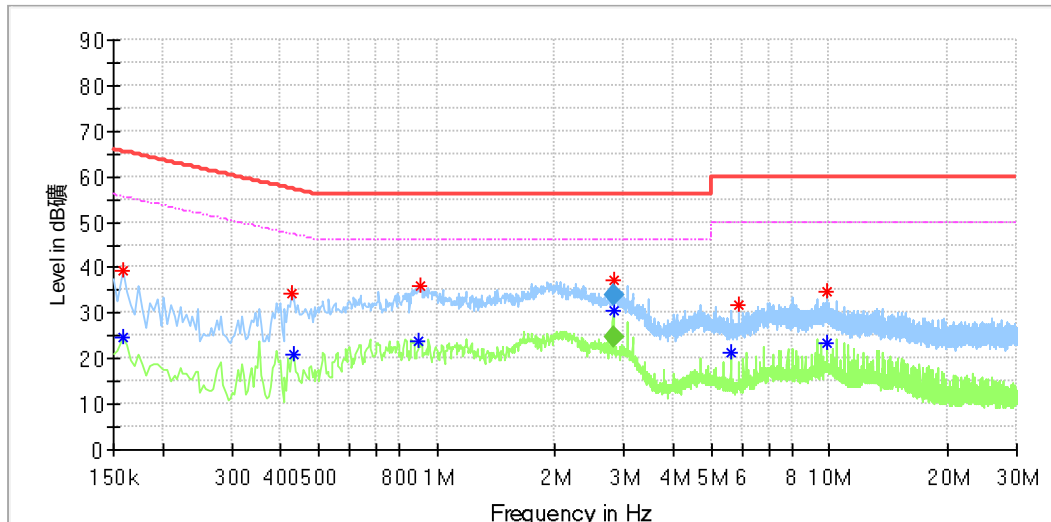

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.158000	---	24.55	55.57	31.02	L1	9.9
0.158000	39.28	---	65.57	26.29	L1	9.9
0.426000	34.22	---	57.33	23.11	L1	9.9
0.434000	---	20.95	47.18	26.22	L1	9.9
0.898000	---	23.80	46.00	22.20	L1	10.0
0.906000	36.18	---	56.00	19.82	L1	10.0
2.813500	---	30.46	46.00	15.54	L1	10.2
2.813500	37.42	---	56.00	18.58	L1	10.2
5.626000	---	21.31	50.00	28.69	L1	10.3
5.854000	31.83	---	60.00	28.17	L1	10.3
9.838000	---	23.28	50.00	26.72	L1	10.3
9.838000	34.55	---	60.00	25.45	L1	10.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.813500	---	24.58	46.00	21.42	1000.0	9.000	L1	10.2
2.813500	33.97	---	56.00	22.03	1000.0	9.000	L1	10.2

EUT Information

EUT Name: 5000MAH SUCTION CUP POWERBANK
Order Number: 168479564 ItemXX
Model: EE7800
Test Mode: Wireless Charging (5W)
Test Voltage: AC 120V/60Hz
Test Standard: FCC Part 15C
Test By:/Review By: Junhua/ Shower Dai
Tem./Hum./Pressure: 24.3°C/52.2%/101kPa
Remark: SR2

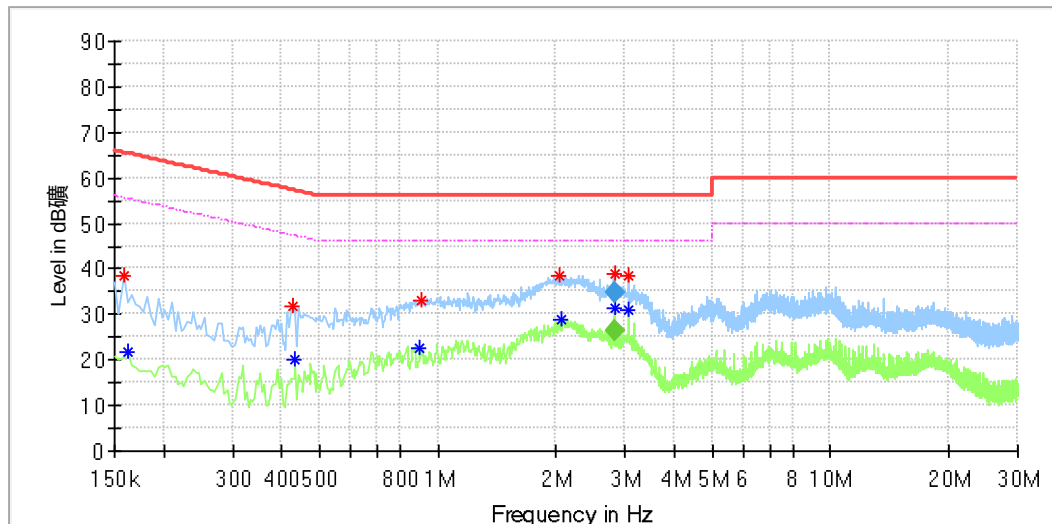

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.158000	38.53	---	65.57	27.03	N	9.8
0.162000	---	21.73	55.36	33.63	N	9.8
0.426000	31.64	---	57.33	25.69	N	9.8
0.434000	---	19.91	47.18	27.27	N	9.8
0.898000	---	22.60	46.00	23.40	N	9.8
0.906000	32.96	---	56.00	23.04	N	9.8
2.034000	38.34	---	56.00	17.66	N	9.9
2.066000	---	28.81	46.00	17.19	N	9.9
2.813500	---	31.39	46.00	14.61	N	9.9
2.813500	38.79	---	56.00	17.21	N	9.9
3.058000	---	30.82	46.00	15.18	N	9.9
3.058000	38.57	---	56.00	17.43	N	9.9

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.813500	---	26.46	46.00	19.54	1000.0	9.000	N	9.9
2.813500	34.72	---	56.00	21.28	1000.0	9.000	N	9.9