



TEST REPORT

Report No. : CHTEW21080167 Report Verification: 

Project No. : SHT2106042103EW

FCC ID. : 2AAR8TD103

Applicant's name : Henan Eshow Electronic Commerce Co., Ltd.

Address : Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji District, Zhengzhou, Henan, China

Test item description : Wireless Calling System

Trade Mark : RETEKESS

Model/Type reference : TD103

Listed Model(s) : T118, T119, TD156, TD158, TD159, TD161, TD162, TD163, TD164, TD165, TD183, TD166, TD167, TD168, TD169, TD170, TD171

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.231

Date of receipt of test sample : Jun.28, 2021

Date of testing : Jun.29, 2021- Aug.25, 2021

Date of issue : Aug.27, 2021

Result : PASS

Compiled by
(position+printed name+signature) ... : File administrators Fanghui Zhu

Fanghui Zhu

Supervised by
(position+printed name+signature) ... : Project Engineer Cheng Xiao

Cheng Xiao

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Test mode	7
4.3.	Support unit used in test configuration and system	7
4.4.	Testing environmental condition	8
4.5.	Measurement uncertainty	8
4.6.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna Requirement	10
5.2.	AC Conducted Emission	11
5.3.	20dB bandwidth	14
5.4.	99% Occupied Bandwidth	16
5.5.	Transmission Time	18
5.6.	Duty Cycle Corrected Factor	19
5.7.	Radiated field strength of the fundamental signal	21
5.8.	Radiated Spurious Emission	23
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>27</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>29</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.231\(a\)](#): Periodic operation in the band 40.66–40.70 MHz and above 70 MHz.
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Revision No.	Date of issue	Description
N/A	2021-08-27	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	20dB Bandwidth	15.231(c)	PASS
5.4	99% Occupied Bandwidth	-	PASS*1
5.5	Transmission time	15.231(a)(1)	PASS
5.6	Duty cycle corrected factor	-	PASS*1
5.7	Field strength of the Fundamental signal	15.231(b)	PASS
5.8	Radiated Spurious Emission	15.231(b)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- *1: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Henan Eshow Electronic Commerce Co., Ltd.
Address:	Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji District,Zhengzhou, Henan, China
Manufacturer:	Henan Eshow Electronic Commerce Co., Ltd.
Address:	Room 722, Sanjiang Building, No.170 Nanyang Road, Huiji District,Zhengzhou, Henan, China
Factory:	Shenzhen Retevis Technology Co., Ltd.
Address:	7/F, 13-C, Zhonghaixin Science&Technology Park, No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen, China

3.2. Product Description

Name of EUT:	Wireless Calling System
Trade Mark:	RETEKESS
Model No.:	TD103
Listed Model(s):	T118,T119,TD156,TD158,TD159,TD161,TD162,TD163,TD164,TD165,TD183,TD166,TD167,TD168,TD169,TD170,TD171
Power supply:	DC12V for adapter
Adapter Information:	Model: DSA-12PFU-12 FUS 120100 Input: 100-240V, 50/60Hz, 0.5A Output: 12V, 1A Manufacturer:DEE VAN ENTERPRISE CO.,LTD.
Hardware version:	JT106_V10
Software version:	JT106_V20

3.3. Radio Specification Description

Operation frequency:	433.92MHz
Modulation:	OOK
Antenna type:	Rod antenna
Antenna gain:	2dBi

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to section ANSI C63.10 section 5.6.1,

Measurements of unlicensed wireless devices shall be performed and, if required, reported for each band in which the EUT can be operated with the device operating at the number of frequencies in each band specified in Table 4

Table 4—Number of frequencies to be tested

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

So test frequency as follow:

Channel	Frequency (MHz)
CH_M	433.92

4.2. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.3. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.4. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.5. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.6. Equipment Used during the Test

● Conducted Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2020/10/19	2021/10/18
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2020/10/15	2021/10/14
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2020/10/15	2021/10/14
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX 142	EF-NM-BNCM-2M	2020/10/15	2021/10/14
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-6th test site

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2020/10/19	2021/10/18
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2020/04/28	2023/04/27
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2021/02/26	2022/02/25
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2021/02/26	2022/02/25
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2020/10/20	2021/10/19
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2021/03/05	2022/03/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0126-01	RE-7-FH	N/A	2021/03/05	2022/03/04
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2020/10/19	2021/10/18
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2020/10/19	2021/10/18
●	Power Meter	Anritsu	ML249A	N/A	2020/10/19	2021/10/18
○	Radio communication tester	R&S	CMW500	137688-Lv	2020/10/19	2021/10/18

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

The antenna type is a non-standard antenna port, please see as follow:



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

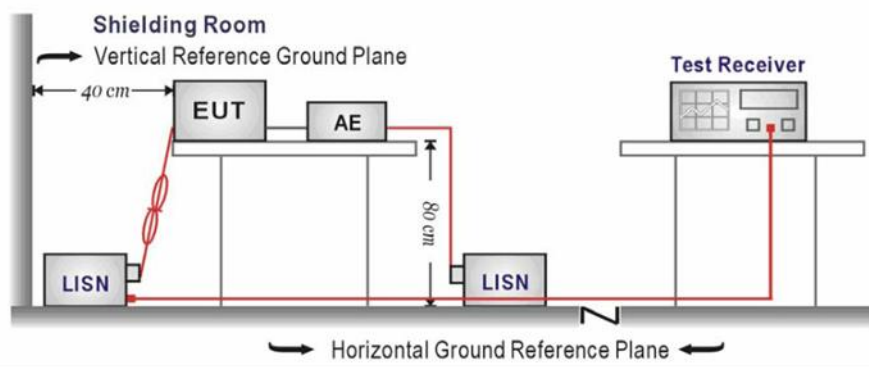

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:

L

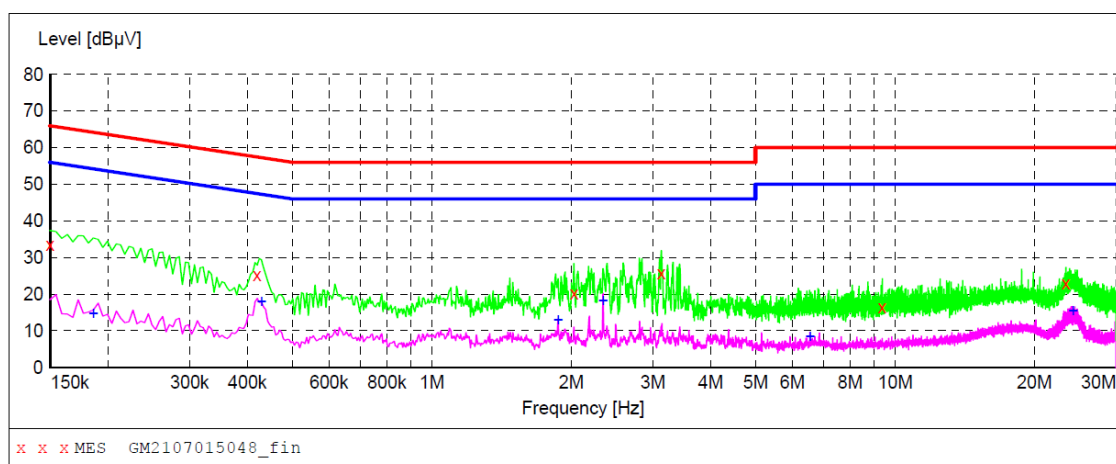**MEASUREMENT RESULT: "GM2107015048_fin"**

7/1/2021 8:56PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	33.60	10.2	66	32.4	QP	L1	GND
0.420000	25.30	10.2	57	32.1	QP	L1	GND
2.031000	20.30	10.2	56	35.7	QP	L1	GND
3.129000	25.60	10.2	56	30.4	QP	L1	GND
9.375000	16.50	10.4	60	43.5	QP	L1	GND
23.379000	23.00	10.5	60	37.0	QP	L1	GND


MEASUREMENT RESULT: "GM2107015048_fin2"

7/1/2021 8:56PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	14.80	10.2	54	39.4	AV	L1	GND
0.429000	17.90	10.2	47	29.4	AV	L1	GND
1.873500	13.00	10.2	46	33.0	AV	L1	GND
2.341500	18.30	10.2	46	27.7	AV	L1	GND
6.558000	8.50	10.2	50	41.5	AV	L1	GND
24.207000	15.40	10.5	50	34.6	AV	L1	GND

Test Line:

N

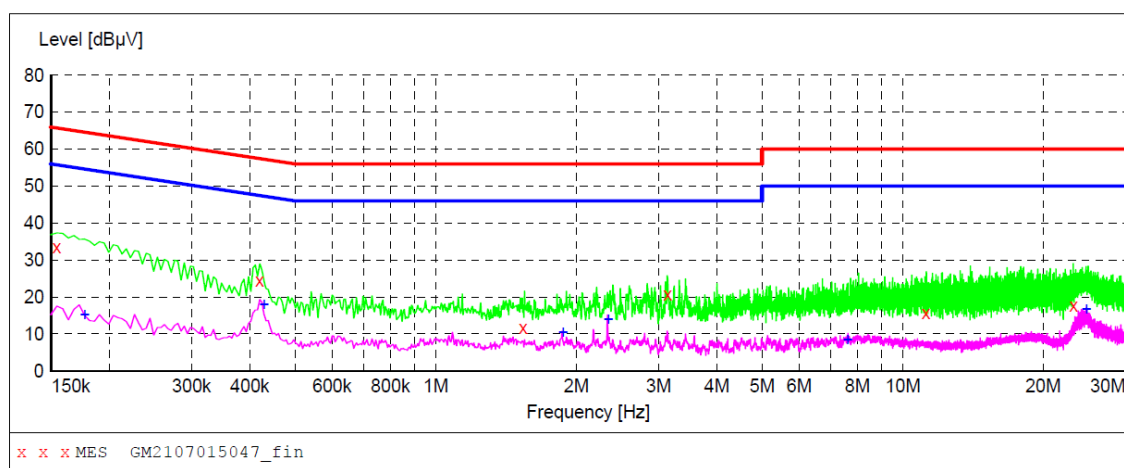**MEASUREMENT RESULT: "GM2107015047_fin"**

7/1/2021 8:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	33.40	10.2	66	32.4	QP	N	GND
0.420000	24.50	10.2	57	32.9	QP	N	GND
1.540500	11.80	10.2	56	44.2	QP	N	GND
3.138000	20.70	10.2	56	35.3	QP	N	GND
11.206500	15.60	10.5	60	44.4	QP	N	GND
23.230500	17.80	10.5	60	42.2	QP	N	GND

MEASUREMENT RESULT: "GM2107015047_fin2"

7/1/2021 8:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	15.30	10.2	55	39.3	AV	N	GND
0.429000	17.90	10.2	47	29.4	AV	N	GND
1.873500	10.30	10.2	46	35.7	AV	N	GND
2.341500	14.00	10.2	46	32.0	AV	N	GND
7.620000	8.40	10.3	50	41.6	AV	N	GND
24.715500	16.60	10.5	50	33.4	AV	N	GND


5.3. 20dB bandwidth

LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900 MHz.

For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

TEST CONFIGURATION

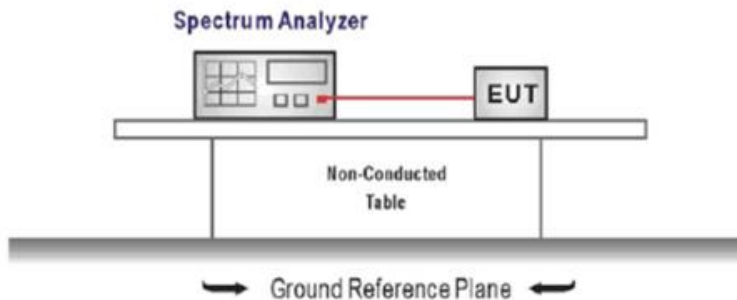

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
 Center Frequency = channel center frequency
 Span= approximately 2 to 3 times the 20 dB bandwidth
 RBW = 100 kHz, VBW $\geq 3 \times$ RBW
 Sweep time= auto couple
 Detector = Peak
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Channel	20dB Bandwidth (kHz)	Limit (kHz)	Result
CH _M	26.57	1084.8	Pass

NOTE: Limit=0.25%*Center Frequency=0.25%*433.92MHz=1084.8kHz

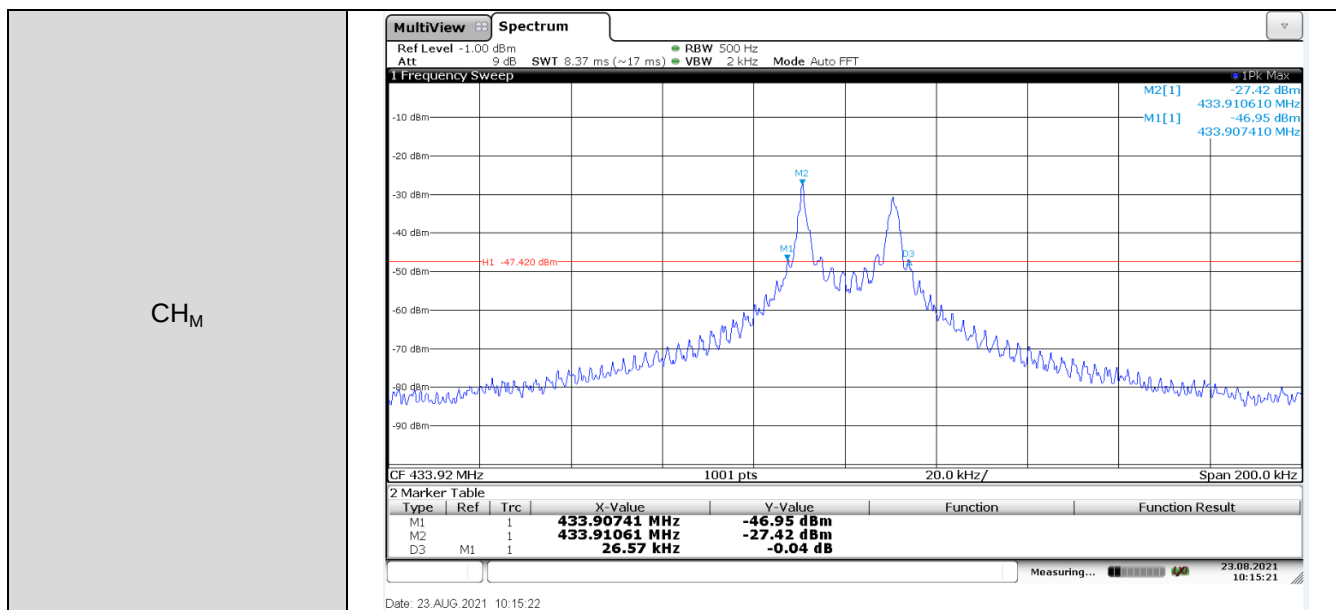


5.4. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

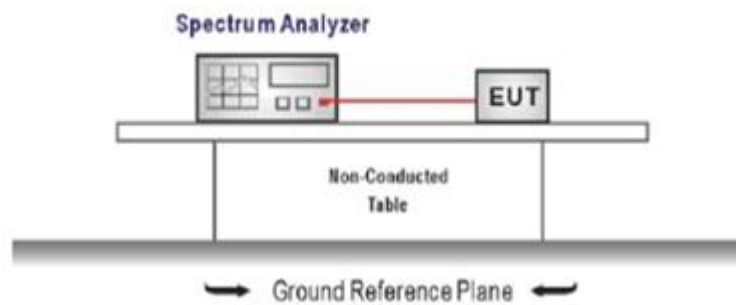

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
 Center Frequency = channel center frequency
 Span $\geq 1.5 \times \text{OBW}$
 RBW = 1%~5%OBW
 VBW $\geq 3 \times \text{RBW}$
 Sweep time = auto couple
 Detector = Peak
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.


TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Channel	99% Occupied Bandwidth (kHz)	Limit (kHz)	Result
CH _M	29.071	-	Pass

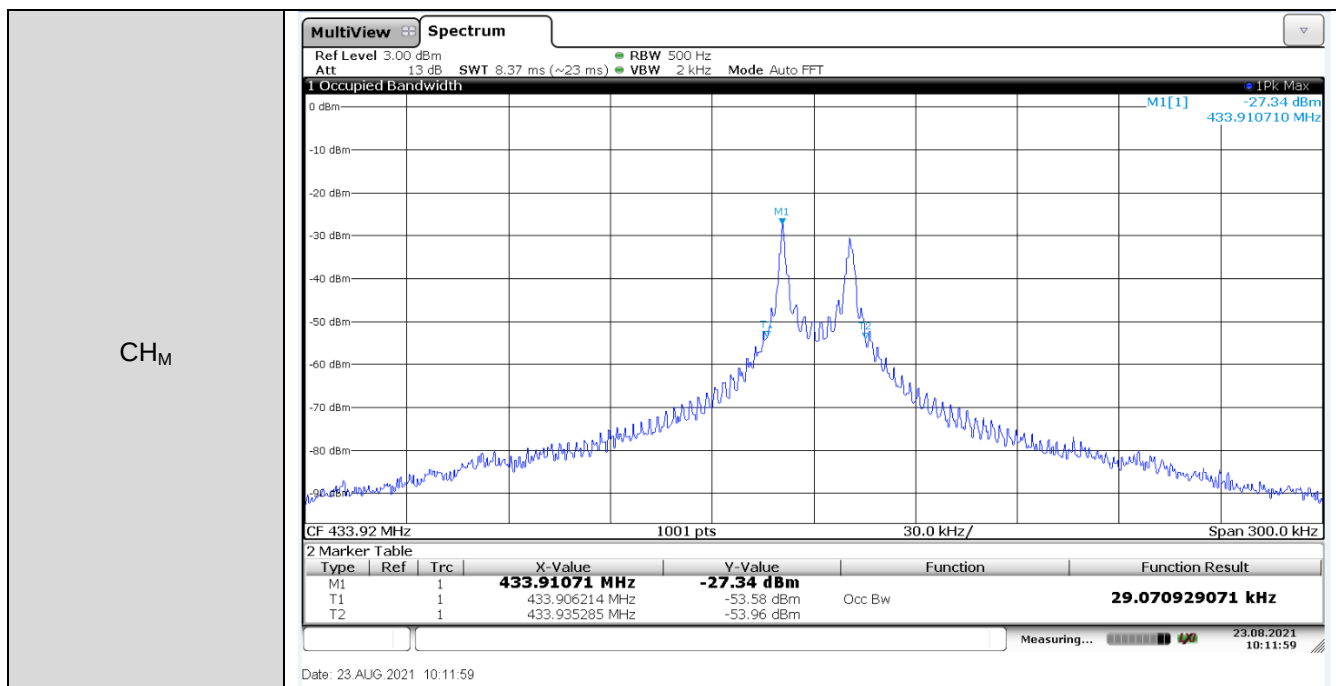


5.5. Transmission Time

LIMIT

A manually operated transmitter shall employ a switch that will auto-matically deactivate the transmitter within not more than 5 seconds of being released.

TEST CONFIGURATION

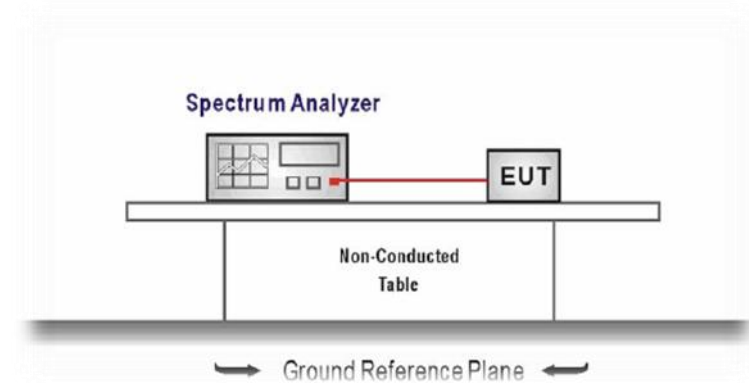

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Frequency=Center carrier frequency
RBW=100kHz, VBW=300kHz, Span= zero,
Sweep time= 10second, Detector function = peak, Trace = single
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

Transmission time (second)	Limit (second)	Result
2.795	5	Pass

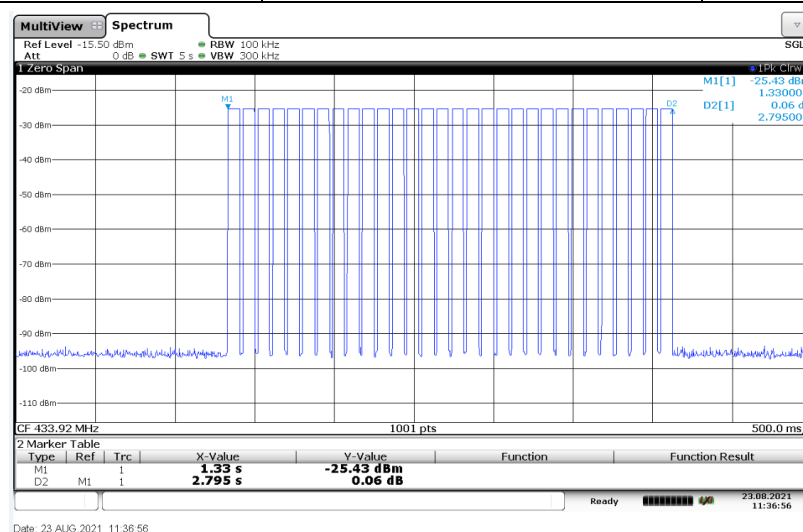


5.6. Duty Cycle Corrected Factor

LIMIT

N/A

TEST CONFIGURATION

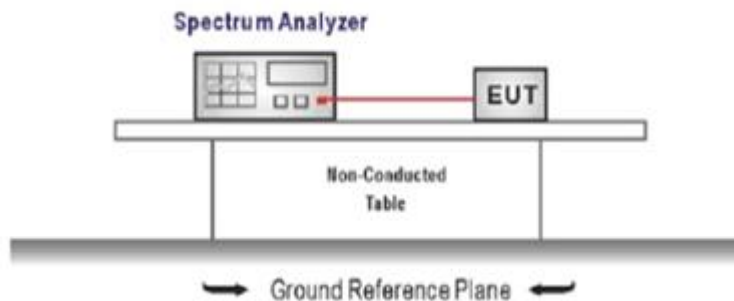

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1MHz, VBW $\geq$ RBW
Sweep time=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data


TEST MODE:

Please refer to the clause 4.2

TEST DATA:

Duty Cycle Corrected Factor/DCCF= $20 \times \log(\text{Duty Cycle})$

Total On Time / T_{on} (Second) :	$T_{on}=0.0726s$
Period (Second) :	0.1
Duty Cycle :	$0.0726/0.1=0.726$
Duty Cycle Corrected Factor:	$20\text{Log}(0.73)=-2.78$

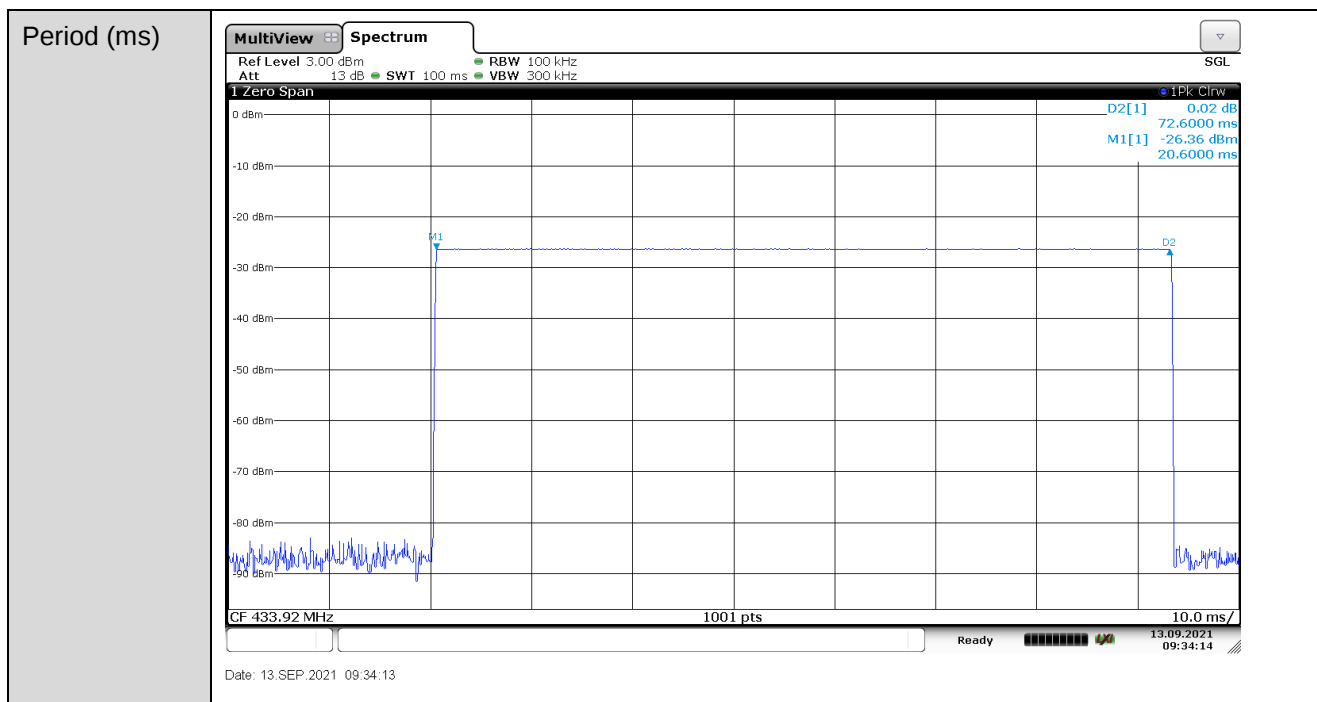


5.7. Radiated field strength of the fundamental signal

LIMIT

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations.

TEST CONFIGURATION

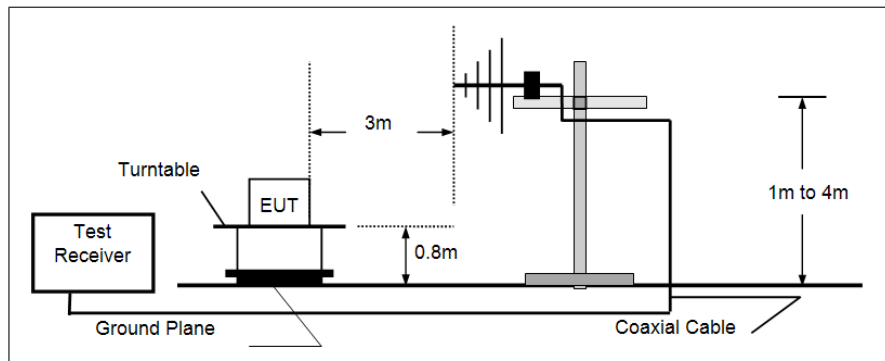

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1GHz, The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

TEST MODE:

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level

Test channel		CH _M			Polarity		Horizontal	
No	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity	Detector
1	433.92	40.85	15.87	56.72	100.80	44.08	Vertical	PK
2	433.92	56.72	-2.78	53.94	80.80	26.86	Horizontal	AV
Test channel		CH _M			Polarity		Vertical	
No	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity	Detector
1	433.92	36.01	15.87	51.88	100.80	48.92	Vertical	PK
2	433.92	51.88	-2.78	49.10	80.80	31.70	Horizontal	AV

5.8. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.231(b)

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

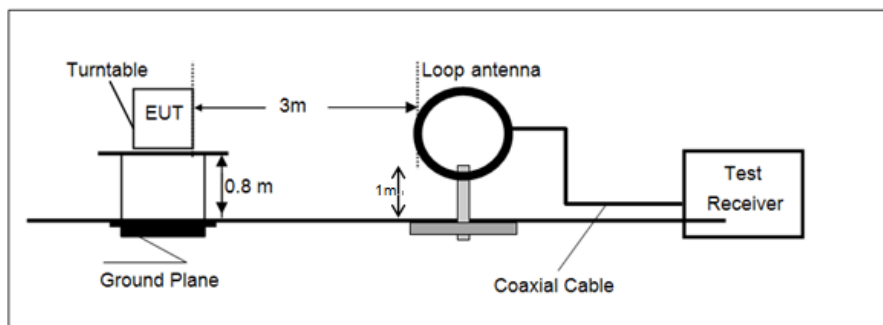

- 30 MHz ~ 1 GHz

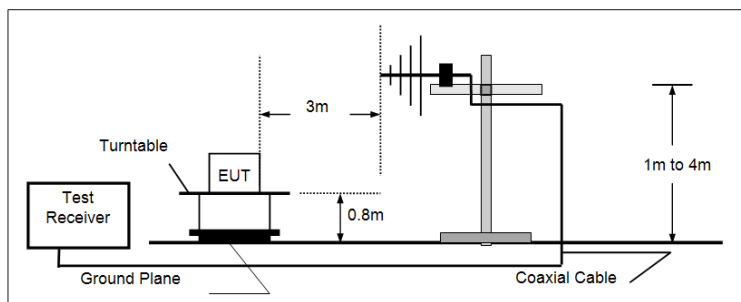

- Above 1 GHz

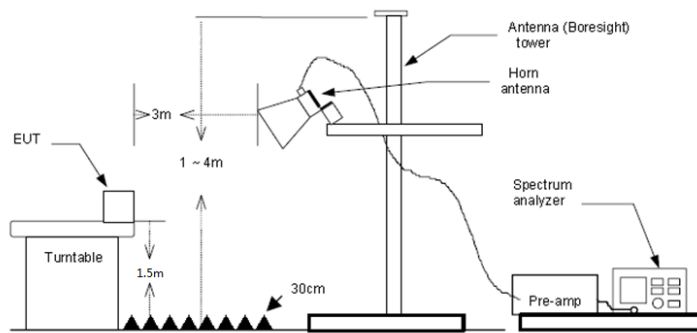

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

Average level = Peak level – DCCF

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.


TEST DATA FOR 9 kHz ~ 30 MHz

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz

Polarization:

Horizontal

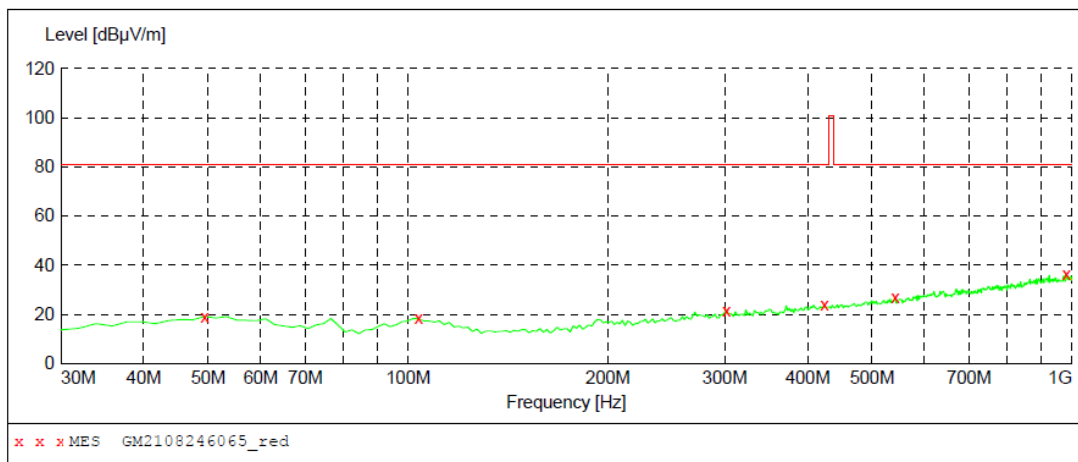
**MEASUREMENT RESULT: "GM2108246065_red"**

8/24/2021 6:01PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	19.20	-8.8	80.8	61.6	QP	100.0	337.00	HORIZONTAL
103.720000	18.30	-10.3	80.8	62.5	QP	100.0	168.00	HORIZONTAL
301.600000	21.50	-7.1	80.8	59.3	QP	100.0	0.00	HORIZONTAL
423.820000	23.80	-3.3	80.8	57.0	QP	100.0	127.00	HORIZONTAL
542.160000	26.80	-0.8	80.8	54.0	QP	100.0	357.00	HORIZONTAL
980.600000	36.20	8.2	80.8	44.6	QP	100.0	348.00	HORIZONTAL

Polarization:

Vertical

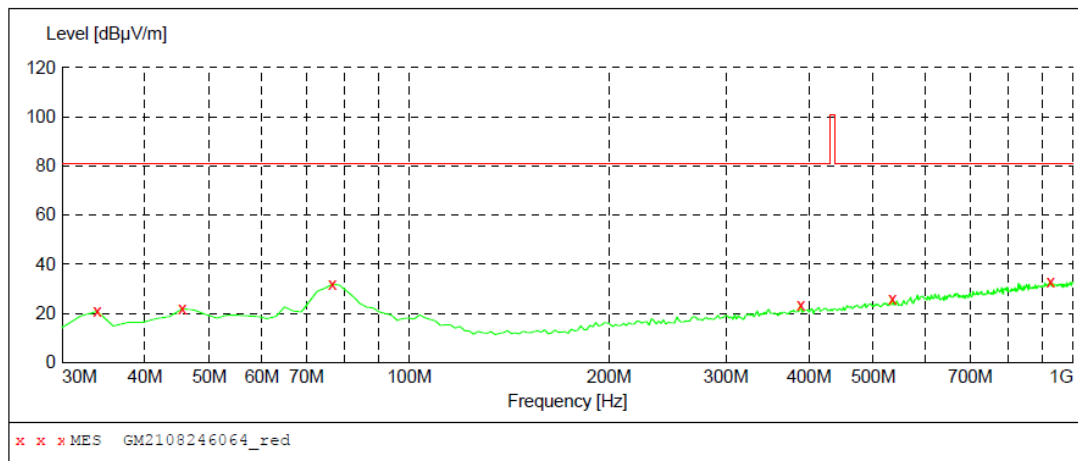
**MEASUREMENT RESULT: "GM2108246064_red"**

8/24/2021 5:59PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
33.880000	20.80	-11.9	80.8	60.0	QP	100.0	220.00	VERTICAL
45.520000	21.80	-8.9	80.8	59.0	QP	100.0	100.00	VERTICAL
76.560000	31.80	-15.4	80.8	49.0	QP	100.0	184.00	VERTICAL
388.900000	23.30	-4.4	80.8	57.5	QP	100.0	330.00	VERTICAL
534.400000	25.80	-1.0	80.8	55.0	QP	100.0	245.00	VERTICAL
924.340000	32.80	7.5	80.8	48.0	QP	100.0	151.00	VERTICAL


TEST DATA FOR 1 GHz ~ 5 GHz

Polarization:

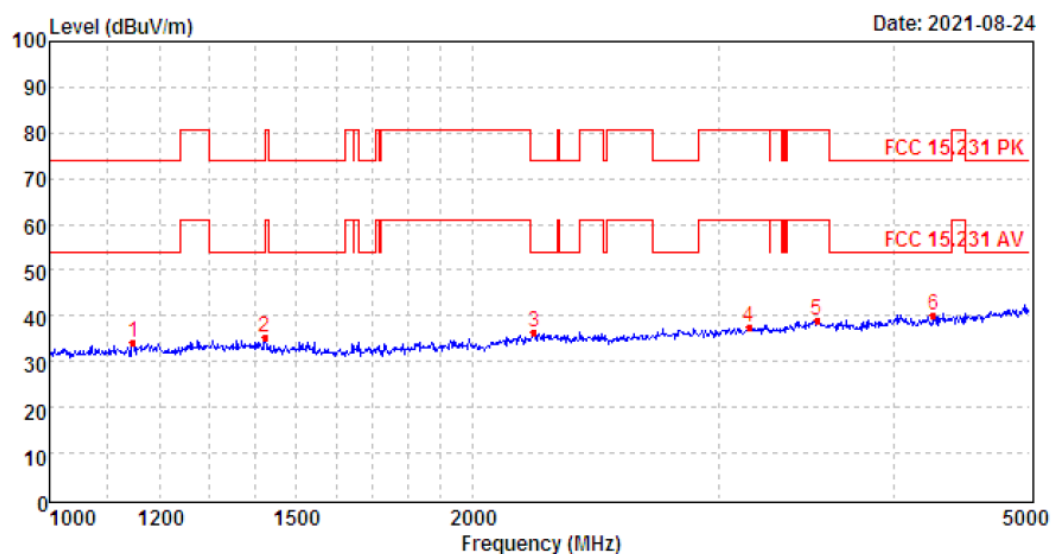Horizontal

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1146.60	41.99	25.40	3.78	36.79	34.38	74.00	-39.62	Peak
2	1424.86	41.51	26.10	4.21	36.69	35.13	74.00	-38.87	Peak
3	2214.58	40.23	28.17	5.33	37.41	36.32	74.00	-37.68	Peak
4	3155.47	39.45	28.99	6.39	37.17	37.66	80.80	-43.14	Peak
5	3526.09	39.75	29.20	6.82	36.71	39.06	80.80	-41.74	Peak
6	4270.42	38.30	30.24	7.74	36.11	40.17	74.00	-33.83	Peak

Polarization:

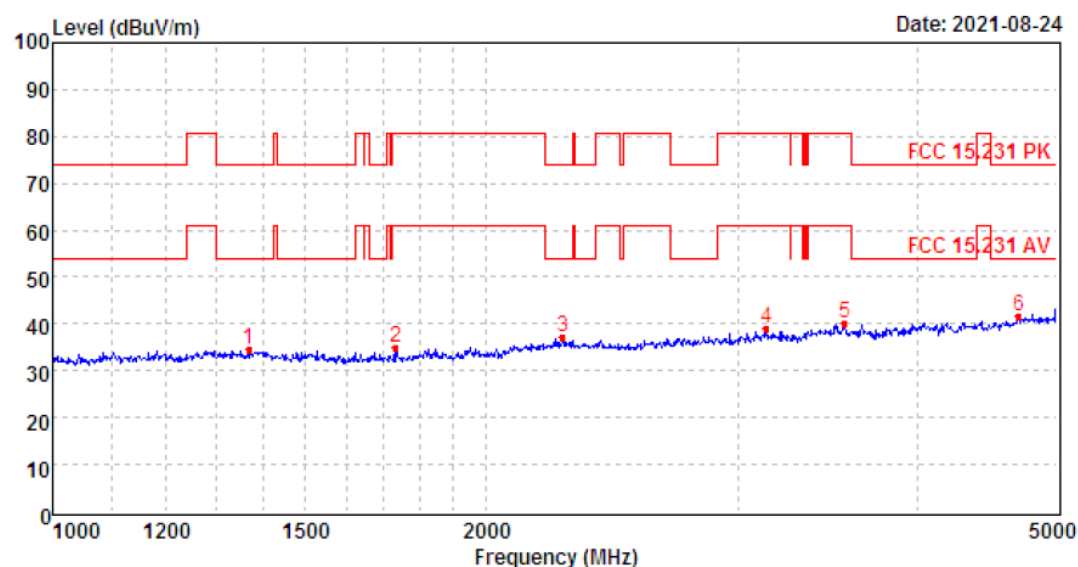Vertical

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1368.67	40.65	26.22	4.13	36.46	34.54	74.00	-39.46	Peak
2	1734.00	42.28	25.17	4.66	37.16	34.95	80.80	-45.85	Peak
3	2265.05	41.09	28.07	5.38	37.44	37.10	74.00	-36.90	Peak
4	3140.28	40.72	29.00	6.36	37.23	38.85	80.80	-41.95	Peak
5	3560.31	40.92	29.32	6.86	36.83	40.27	80.80	-40.53	Peak
6	4703.37	37.90	31.40	8.21	35.72	41.79	74.00	-32.21	Peak

6. TEST SETUP PHOTOS

Radiated Emission




AC Conducted Emission




7. EXTERANAL AND INTERNAL PHOTOS



External Photos





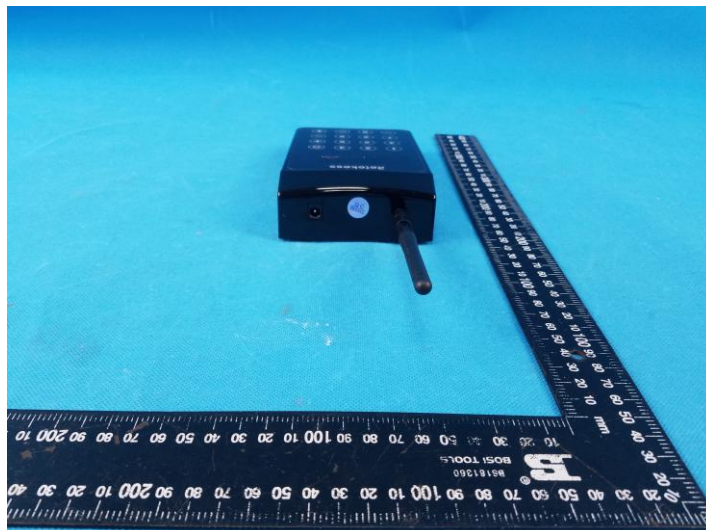

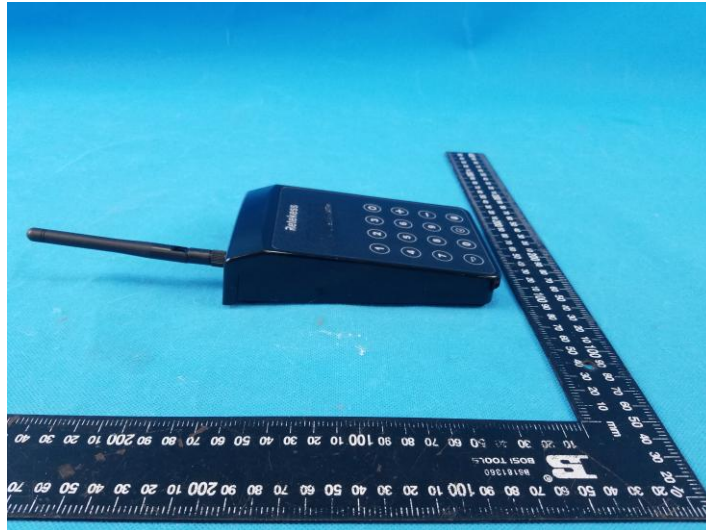

Internal Photos

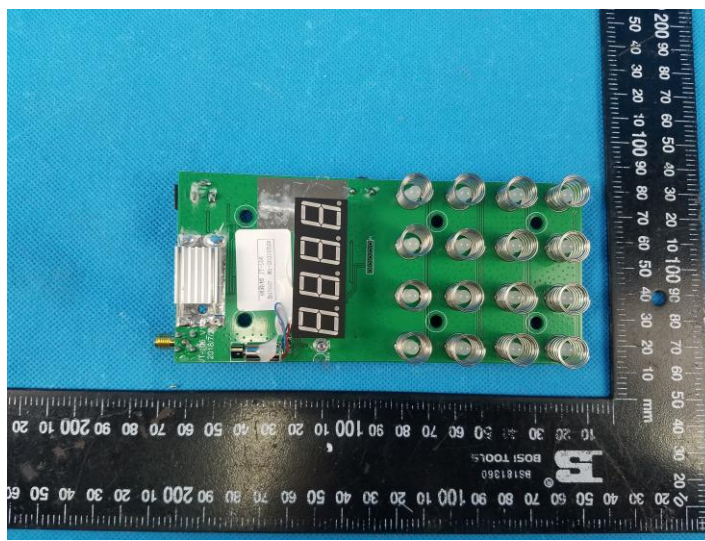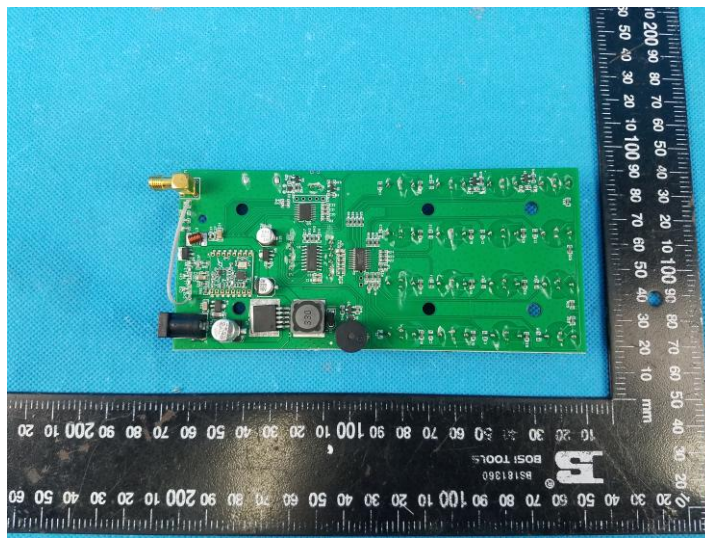

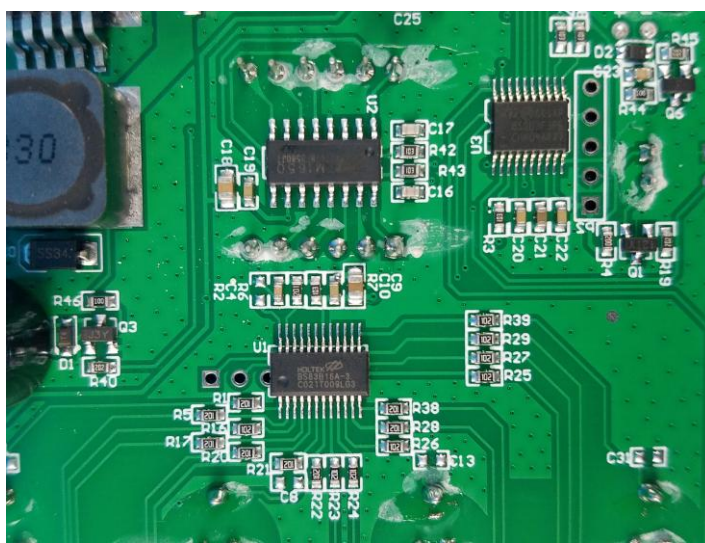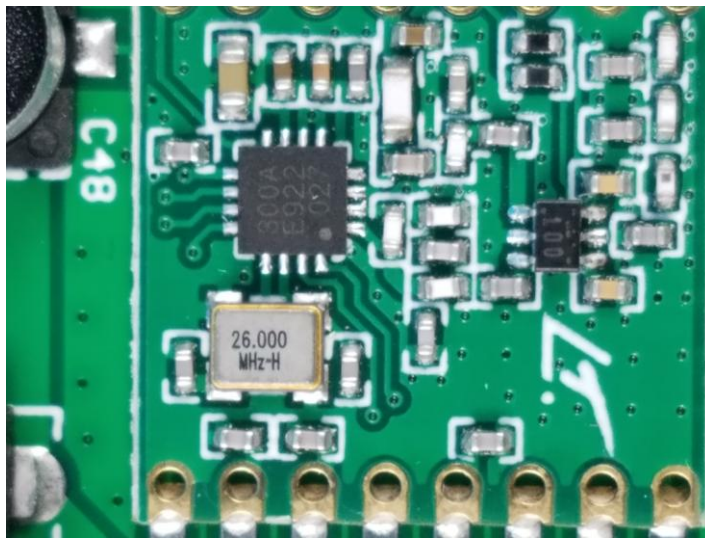

-----End of Report-----