

SAR EVALUATION REPORT

For

Fujian Beifeng Telecom Technology Co., Ltd.

A15 Huaqiao Economic Development Zone, Shuangyang, Luojiang, Quanzhou, Fujian, China

FCC ID: 2AARFBFP118001

Report Type: Product Type:
Original Report Digital Radio

Sandy Wang

Test Engineer: Sandy Wang

Report Number: RSZ130411003-20C

Report Date: 2013-08-30

Alvin Huang

Reviewed By: RF Leader

Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building,

Hrung

ShiHua Road, FuTian Free Trade Zone

Prepared By: Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

	Attestation of Test Results						
		Company Name	Fujian Beifeng Telecom Technology Co., Ltd.				
		EUT Description Digital radio					
	CUT mation	FCC ID	FCC ID 2AARFBFP118001				
		Model Number	BF-P108, BF-P118				
		Test Date	2013-07-28				
Model	Frequency (MHz)		Max. SAR Level(s) Report	Limit (W/Kg)			
BF-P108	400 470	Digital 6.25kHz	Face up: 4.347 W/kg Body-Back: 5.998 W/kg				
BF-P118	400-470	Digital 6.25kHz	Face up: 3.188 W/kg Body-Back: 3.856 W/kg	8			
Applicable Standards		ANSI / IEEE C95.1: 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds,3 kHz to 300 GHz.					
		ANSI / IEEE C95.3: 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields, 100 kHz—300 GHz.					
		IEEE1528:2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques					
		KDB procedures KDB 447498 D01 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies KDB 643646 SAR Test Reduction Considerations for Occupational PTT Radios					

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2003 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

SAR Evaluation Report 2 of 71

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUILDELINES	7
SAR LIMITS	
FACILITIES AND ACCREDITATION	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
Liquid Verification	18
System Accuracy Verification	20
SAR SYSTEM VALIDATION DATA	
EUT TEST STRATEGY AND METHODOLOGY	
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR	
CHEEK/TOUCH POSITION EAR/TILT POSITION	
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	
SAR EVALUATION PROCEDURE	
CONDUCTED OUTPUT POWER MEASUREMENT	29
PROVISION APPLICABLE	
TEST PROCEDURE	29
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITSTEST RESULTS:	
SAR MEASUREMENT RESULTSSAR TEST DATA	
TEST RESULT:	30
EUT SCAN RESULTS	
APPENDIX A – MEASUREMENT UNCERTAINTY	41
APPENDIX B – PROBE CALIBRATION CERTIFICATES	
APPENDIX C – DIPOLE CALIBRATION CERTIFICATES	52
APPENDIX D – EUT TEST POSITION PHOTOS	61
Liquid depth ≥ 15cm	61
FACE-UP 2.5 CM SEPARATION TO FLAT PHANTOM SETUP PHOTO.	
BODY-BACK 0.0 CM SEPARATION TO FLAT PHANTOM SETUP PHOTO	62
APPENDIX E – EUT PHOTOS	63
EUT – FRONT VIEW (P108)	
EUT – BACK VIEW (P108)	
EUT – LEFT VIEW (P108) EUT – RIGHT VIEW (P108)	
EUT – TOP VIEW (P108)	
EUT – BOTTOM VIEW (P108)	
EUT –UNCOVER VIEW (P108)	66
EUT – FRONT VIEW (P118)	
EUT – BACK VIEW (P118).	
EUT – LEFT VIEW (P118) EUT – RIGHT VIEW (P118)	

Bay	/ Area	Compliance	Laboratories	Corp	(Shenzhen)
Du	y I II Cu	Compilation	Lacoratories	COIP.	Differization

Report No: RSZ130411003-20C

EUT – TOP VIEW (P118)	69
EUT –UNCOVER VIEW (P118) APPENDIX F – PRODUCT SIMILARITY DECLARATION LETTER	
APPENDIX G – INFORMATIVE REFERENCES	71

SAR Evaluation Report 4 of 71

DOCUMENT REVISION HISTORY

Revision Number Report Number		Description of Revision	Date of Revision	
0	RSZ130411003-20C	Original Report	2013-08-30	

SAR Evaluation Report 5 of 71

EUT DESCRIPTION

This report has been prepared on behalf of Fujian Beifeng Telecom Technology Co., Ltd. and their product, FCC ID: 2AARFBFP118001, Model: BF-P108/BF-P118 or the EUT(Equipment Under Test) as referred to in the rest of this report.

Note: The product digital radio, model BF-P118 and BF-P108, the difference between them was explained in the attached product similarity declaration letter which was provided the guaranteed by applicant, both of them were selected to test.

Technical Specification

Product Type	Portable
Exposure Category:	Occupational/Controlled Exposure
Antenna Type(s):	External Antenna
Body-Worn Accessories:	Belt Clip and Headset Cable
Face-Head Accessories:	None
Modulation Type:	4FSK
Frequency Band:	400MHz-470MHz
Conducted RF Power:	36.46dBm
Dimensions (L*W*H):	217mm (L)×59mm (W)×51mm (H)
Weight:	304.3g
Power Source:	Rechargeable Li-ION Battery
Normal Operation:	Face Up and Body-worn

SAR Evaluation Report 6 of 71

REFERENCE, STANDARDS, AND GUILDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Evaluation Report 7 of 71

SAR Limits

FCC Limit (1g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

CE Limit (10g Tissue)

	SAR (W/kg)				
EXPOSURE LIMITS	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)			
Spatial Average (averaged over the whole body)	0.08	0.4			
Spatial Peak (averaged over any 10 g of tissue)	2.0	10			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

Occupational/Controlled environments Spatial Peak limit 8.0 W/kg (FCC/IC) & 10 W/kg (CE) applied to the EUT.

SAR Evaluation Report 8 of 71

FACILITIES AND ACCREDITATION

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

SAR Evaluation Report 9 of 71

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.



Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.

SAR Evaluation Report 10 of 71

ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

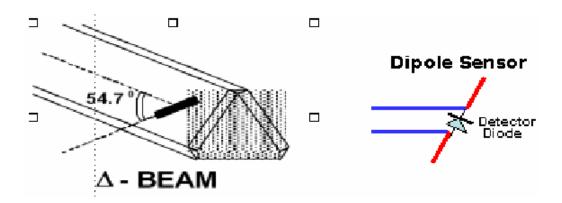

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

SAR Evaluation Report 11 of 71

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide			
Sensitivity	$0.70 \ \mu V/(V/m)^2$ to $0.85 \ \mu V/(V/m)^2$			
Dynamic Range	0.0005 W/kg to 100 W/kg			
Isotropic Response	Better than 0.1 dB			
Diode Compression Point (DCP)	Calibration for Specific Frequency			
Probe Tip Diameter	< 2.9 mm			
Sensor Offset	1.56 (+/- 0.02 mm)			
Probe Length	289 mm			
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB			
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm			
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe			

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu V$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

SAR Evaluation Report 12 of 71

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS		
Number of Axis	Six independently controlled axis		
Positioning Repeatability	0.05 mm		
Controller Type	Single phase Pentium based C500C		
Robot Reach	710 mm		
Communication	RS232 and LAN compatible		

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.

SAR Evaluation Report 13 of 71




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

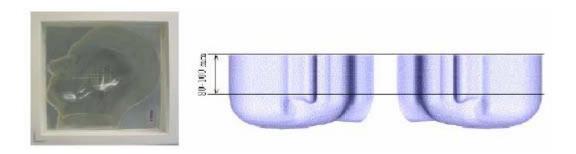


SAR Evaluation Report 14 of 71

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



SAR Evaluation Report 15 of 71

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients	Frequency (MHz)									
(% by weight)	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency	Head T	Γissue	Body Tissue		
(MHz)	Er	O (S/m)	Er	O (S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

SAR Evaluation Report 16 of 71

EQUIPMENT LIST AND CALIBRATION


Equipments List & Calibration Information

Equipment	Model	Calibration Date	S/N
CRS F3 robot	ALS-F3	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A
CRS C500C controller	ALS-C500	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2013-05-12	110-00212
Miniature E-Field Probe	E-020	2012-08-09	500-00283
Dipole, 450 MHz	ALS-D-450-S-2	2012-07-31	175-00503
Dipole Spacer	ALS-DS-U	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	150-00413
Simulated Tissue 450 MHz Head	ALS-TS-450-H	Each Time	260-01106
Simulated Tissue 450 MHz Body	ALS-TS-450-B	Each Time	260-02108
Power Amplifier	5S1G4	N/A	71377
Synthesized Sweeper	HP 8341B	2013-05-16	2624A00116
Signal Analyzer	FSIQ26	2012-08-08	8386001028

SAR Evaluation Report 17 of 71

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

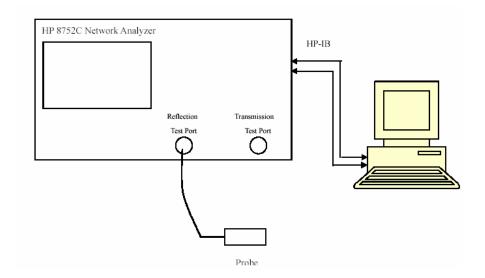

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Liquid Param		Parameter	neter Target Value		Delta (%)		Tolerance
(MHz)	Type	ε _r	O (S/m)	ε _r	O'(S/m)	$\Delta \epsilon_{ m r}$	$\triangle O'(S/m)$	(%)
400.0125	Head	42.34	0.85	43.5	0.87	-2.667	-2.299	±5
400.0123	Body	55.61	0.94	56.7	0.94	-1.922	0.000	±5
410.0125	Head	42.31	0.87	43.5	0.87	-2.736	0.000	±5
418.0125	Body	55.65	0.93	56.7	0.94	-1.852	-1.064	±5
435.0125	Head	42.29	0.88	43.5	0.87	-2.782	1.149	±5
433.0123	Body	55.68	0.93	56.7	0.94	-1.799	-1.064	±5
450.0125	Head	42.24	0.90	43.5	0.87	-2.897	3.448	±5
450.0125	Body	55.71	0.93	56.7	0.94	-1.746	-1.064	±5
460.0075	Head	42.12	0.91	43.5	0.87	-3.172	4.598	±5
469.9875	Body	55.76	0.94	56.7	0.94	-1.658	0.000	±5

^{*}Liquid Verification was performed on 2013-07-28.

Please refer to the following tables.

SAR Evaluation Report 18 of 71


	450 Head			450 Body			
Frequency (MHz)	e'	e''	Frequency (MHz)	e'	e''		
400.0	42.335977	38.306325	400.0	55.610276	42.176502		
401.5	42.304948	38.230878	401.5	55.613414	41.876013		
403.0	42.288288	38.155401	403.0	55.616547	41.688531		
404.5	42.183148	38.079932	404.5	55.619690	41.500965		
406.0	42.201506	38.004490	406.0	55.622828	41.336027		
407.5	42.223399	37.928990	407.5	55.625966	41.099758		
409.0	42.199886	37.853518	409.0	55.629104	41.014257		
410.5	42.247207	37.778050	410.5	55.632242	40.792393		
412.0	42.266813	37.702578	412.0	55.635380	40.726955		
413.5	42.273239	37.627118	413.5	55.638518	40.484378		
415.0	42.324170	37.551652	415.0	55.641656	40.288533		
416.5	42.272663	37.476181	416.5	55.644794	40.131362		
418.0	42.309031	37.400704	418.0	55.647932	40.009259		
419.5	42.269060	37.325234	419.5	55.651070	39.873647		
421.0	42.242058	37.249764	421.0	55.654207	39.758822		
422.5	42.261613	37.174304	422.5	55.657345	39.566246		
424.0	42.223431	37.098834	424.0	55.660483	39.543910		
425.5	42.198255	37.023364	425.5	55.663621	39.420609		
427.0	42.238791	36.947894	427.0	55.666759	39.750842		
428.5	42.270210	36.872424	428.5	55.669897	39.065440		
430.0	42.267635	36.796954	430.0	55.673035	38.917297		
431.5	42.266215	36.721494	431.5	55.676173	38.710259		
433.0	42.291044	36.646024	433.0	55.679311	38.553718		
434.5	42.292044	36.570554	434.5	55.682449	38.301425		
436.0	42.295644	36.495084	436.0	55.685587	38.108348		
437.5	42.280676	36.419614	437.5	55.688725	37.966155		
439.0	42.267473	36.344144	439.0	55.691863	37.893238		
440.5	42.261680	36.268674	440.5	55.695001	37.829504		
442.0	42.284853	36.193214	442.0	55.698139	37.713787		
443.5	42.243383	36.117744	443.5	55.701277	37.628991		
445.0	42.233314	36.042274	445.0	55.704415	37.451003		
446.5	42.235784	35.966804	446.5	55.707553	37.285961		
448.0 449.5	42.246851	35.891334	448.0 449.5	55.710691	37.253104		
	42.236213 42.219485	35.815864 35.740404		55.713829	37.098468 37.053596		
451.0 452.5	42.248927	35.664934	451.0 452.5	55.716967 55.720105			
454.0	42.250629	35.589464	454.0	55.723243	36.890333 36.766173		
455.5	42.254325	35.513994	455.5	55.726381	36.734686		
457.0	42.248420	35.438524	457.0	55.729519	36.595084		
458.5	42.172123	35.363054	458.5	55.732657	36.550595		
460.0	42.248375	35.287584	460.0	55.735795	36.368253		
461.5	42.202666	35.212124	461.5	55.738933	36.294160		
463.0	42.202000	35.136654	463.0	55.742071	36.203578		
464.5	42.143986	35.061184	464.5	55.745209	36.149964		
466.0	42.098569	34.985714	466.0	55.748347	36.022965		
467.5	42.139508	34.910244	467.5	55.751485	35.884369		
469.0	42.119777	34.834774	469.0	55.754622	35.833228		
470.5	42.122961	34.759314	470.5	55.757760	35.753529		
472.0	42.096563	34.683844	472.0	55.760898	35.643686		
473.5	42.101158	34.608374	473.5	55.764036	35.521770		
475.0	42.061426	34.532904	475.0	55.767174	35.421952		

SAR Evaluation Report 19 of 71

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

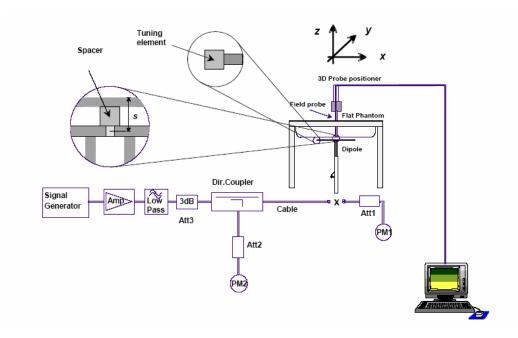

Probe and dipole antenna List and Detail

Manufa cturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
APREL	Probe	ALS-E-020	500-00283	2012-08-08	2013-08-07
APREL	Dipole antenna(450MHz)	ALS-D-450-S-2	175-00503	2012-07-31	2015-07-30

System Accuracy Check Results

Date	Frequency (MHz)	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
2013-07-28	450	Head	1g	4.612	4.572	0.875	±10
2013-07-28	430	Body	1g	4.683	4.508	3.882	±10

^{*}All SAR values are normalized to 1 Watt forward power.

SAR Evaluation Report 20 of 71

SAR SYSTEM VALIDATION DATA

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

System Performance Check 450 MHz Head Liquid

Dipole 450 MHz; Type: ALS-D-450-S-2; S/N: 175-00503

Product Data

Device Name : Dipole 450 MHz Serial No. : 175-00503 Type : Dipole

Model : ALS-D-450-S-2

Frequency Band : 450
Max. Transmit Pwr
Drift Time : 3 min(s)
Power Drift-Start : 4.393 W/kg
Power Drift-Finish
Power Drift (%) : -1.846

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

Type : Head Serial No. : 260-01106 Frequency : 450.00MHz Last Calib. Date : 28-Jul-2013 Temperature : 20.00 °C Ambient Temp. : 21.00 °C Humidity : 56.00 RH% **Epsilon** : 42.24 F/m Sigma : 0.90 S/m : 1000.00 kg/cu. m Density

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 09-Aug-2012

Frequency Band : 450 Duty Cycle Factor : 1 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 8x10x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 21 of 71

1 gram SAR value : 4.612 W/kg 10 gram SAR value : 2.861 W/kg Area Scan Peak SAR : 5.139 W/kg Zoom Scan Peak SAR : 9.415 W/kg

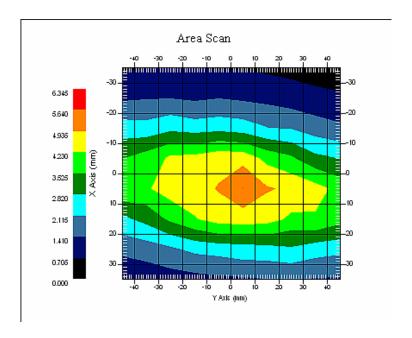

450 MHz System Validation with Head Tissue

SAR Evaluation Report 22 of 71

System Performance Check 450 MHz Body Liquid

Dipole 450 MHz; Type: ALS-D-450-S-2; S/N: 175-00503

Product Data

Device Name : Dipole 450 MHz Serial No. : 175-00503 Type : Dipole

Model : ALS-D-450-S-2

Frequency Band : 450
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 4.522 W/kg
Power Drift-Finish : 4.424 W/kg
Power Drift (%) : -2.078

Phantom Data

Name : APREL-Uni Type : Uni-Phantom Size (mm) : 280 x 280 x 200 Serial No. : System Default

Location : Center Description : Default

Phantom Data

Tissue Data

Type : Body : 260-02108 Serial No. Frequency : 450.00MHz Last Calib. Date : 28-Jul-2013 : 20.00 °C Temperature Ambient Temp. : 21.00 °C : 56.00 RH% Humidity : 55.61 F/m Epsilon Sigma : 0.94 S/m Density : 1000.00 kg/cu. m

Probe Data

Name : E-Field Model : E-020

Type : E-Field Triangle Serial No. : 500-00283 Last Calib. Date : 09-Aug-2012

Frequency Band : 450 Duty Cycle Factor : 1 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

Measurement Data


Crest Factor : 1

Scan Type : Complete Tissue Temp. : 21.00 °C Ambient Temp. : 21.00 °C

Area Scan : 8x10x1 : Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

SAR Evaluation Report 23 of 71

1 gram SAR value : 4.683 W/kg 10 gram SAR value : 2.901 W/kg Area Scan Peak SAR : 5.292 W/kg Zoom Scan Peak SAR : 9.634 W/kg

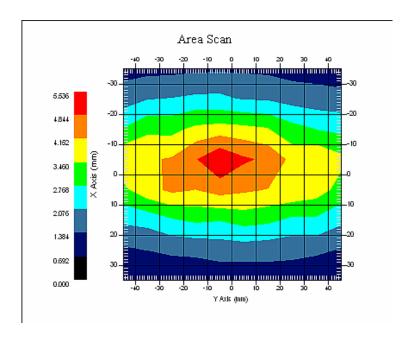

450 MHz System Validation with Body Tissue


SAR Evaluation Report 24 of 71


EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

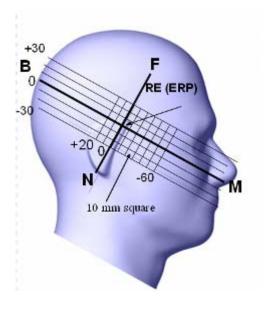

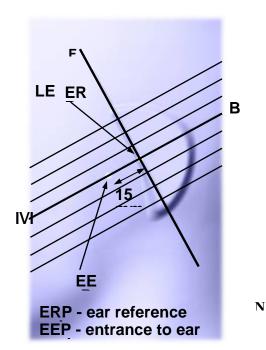

SAR Evaluation Report 25 of 71

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek / Touch Position

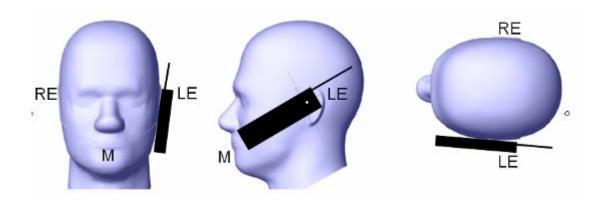

Ear/Tilt Position


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point isby 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

SAR Evaluation Report 26 of 71

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

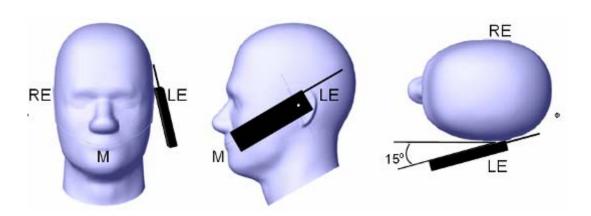

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

SAR Evaluation Report 27 of 71

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

- Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.
- Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
 - 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

SAR Evaluation Report 28 of 71


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the Signal Analyzer through sufficient attenuation.



PTT

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)							
PTT/Mode	Frequency						
r i i/wioue	400.0125	435.0125	469.9875				
Digital-6.25k	36.50	36.50	36.50				

Test Results:

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Output(dBm)	Output Power(W)	Power level
	Digital 6.25	400.0125	36.17	4.140	High
Digital		435.0125	36.46	4.426	High
		469.9875	36.41	4.375	High

SAR Evaluation Report 29 of 71

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21 °C
Relative Humidity:	50%
ATM Pressure:	1002 mbar

^{*} Testing was performed by Sandy Wang on 2013-7-28.

Test Result:

Digital (Modulation 4FSK; Channel Spacing 6.25 kHz) For P108:

EUT Position	Frequency Power Drift		Max. Meas. Rated	1 g SAR Value (W/Kg)			
	(MHz)	(%)	Power (dBm)	Power (dBm)	Scaled Factor	Meas. SAR	Scaled SAR
	400.0125	-2.644	36.17	36.50	1.079	4.029	4.347
Face up (2.5cm)	435.0125	-1.582	36.46	36.50	1.009	4.201	4.239
	469.9875	-1.106	36.41	36.50	1.021	3.047	3.111
	400.0125	-1.364	36.17	36.50	1.079	5.559	5.998
Body-Back (0.0cm)	435.0125	-2.124	36.46	36.50	1.009	5.408	5.457
	469.9875	-1.853	36.41	36.50	1.021	4.631	4.728

Digital (Modulation 4FSK; Channel Spacing 6.25 kHz) For P118:

	Frequency Power Drift		Power (dRm) Rated	Max.	1 g SAK value (W/Kg)		
	(MHz) (%)	Power (dBm)		Scaled Factor	Meas. SAR	Scaled SAR	
Face up (2.5cm)	435.0125	3.443	36.49	36.50	1.002	3.182	3.188
Body-Back (0.0cm)	400.0125	-2.378	36.22	36.50	1.067	3.615	3.856
	435.0125	2.063	36.49	36.50	1.002	3.759	3.768
	469.9875	-1.526	36.09	36.50	1.099	3.244	3.565

Note:

- 1. When the 1-g SAR tested using the default battery and default accessories is ≤ 3.5W/Kg, testing for other channels are optional.
- 2. Passive body-worn and audio accessories generally do not apply to the head SAR of PTT radios.
- 3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

SAR Evaluation Report 30 of 71

EUT SCAN RESULTS

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Face-Up 2.5cm (Digital 6.25 kHz -400.0125 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 3.314 W/kg Power Drift-Finish : 3.228 W/kg Power Drift (%) : -2.644

Tissue Data

Type : Head

Frequency : 400.0125 MHz
Epsilon : 42.34F/m
Sigma : 0.85 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283
Frequency Band : 450
Duty Cycle Factor : 2
Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 4.029 W/kg 10 gram SAR value : 2.928 W/kg Area Scan Peak SAR : 4.987 W/kg Zoom Scan Peak SAR : 8.357 W/kg



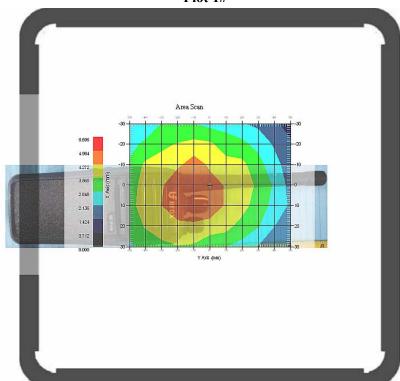

SAR Evaluation Report 31 of 71

Face-Up 2.5cm (Digital 6.25 kHz -435.0125 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 4.593 W/kg Power Drift-Finish : 4.522 W/kg Power Drift (%) : -1.582

Tissue Data

Type : Head

 Frequency
 : 435.0125 MHz

 Epsilon
 : 42.29 F/m

 Sigma
 : 0.88 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 4.201 W/kg 10 gram SAR value : 3.041 W/kg Area Scan Peak SAR : 4.896 W/kg Zoom Scan Peak SAR : 7.905 W/kg

Plot 2#

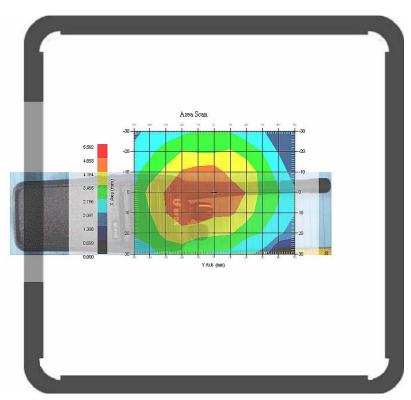

SAR Evaluation Report 32 of 71

Face-Up 2.5cm (Digital 6.25 kHz -469.9875 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 3.382 W/kg Power Drift-Finish : 3.347 W/kg Power Drift (%) : -1.106

Tissue Data

Type : Head

Frequency : 469.9875 MHz
Epsilon : 42.12 F/m
Sigma : 0.91 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 3.047 W/kg 10 gram SAR value : 1.862 W/kg Area Scan Peak SAR : 3.155 W/kg Zoom Scan Peak SAR : 5.391 W/kg

Plot 3#

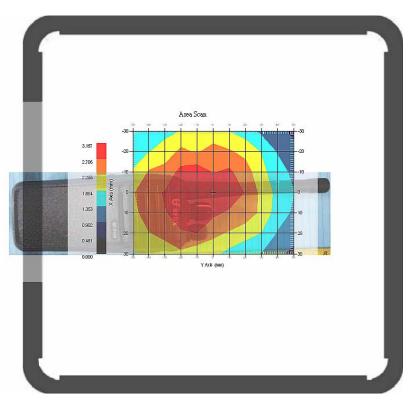

SAR Evaluation Report 33 of 71

Body-Back 0.0cm (Digital 6.25 kHz -400.0125 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK Crest Factor : 2 Scan Type : Comp

Scan Type : Complete
Area Scan : 11x8x1: Measurement:

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 8.814 W/kg Power Drift-Finish : 8.709 W/kg Power Drift (%) : -1.364

Tissue Data

Type : Body

Frequency : 400.0125 MHz
Epsilon : 55.61F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 5.559 W/kg 10 gram SAR value : 3.879 W/kg Area Scan Peak SAR : 7.293 W/kg Zoom Scan Peak SAR : 12.390 W/kg

Plot 4#

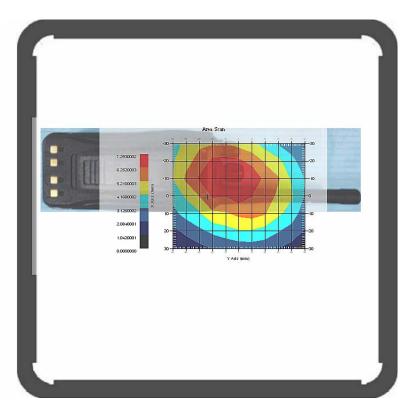

SAR Evaluation Report 34 of 71

Body-Back 0.0cm (Digital 6.25 kHz -435.0125 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 7.517 W/kg Power Drift-Finish : 7.308 W/kg Power Drift (%) : -2.124

Tissue Data

Type : Body

Frequency : 435.0125 MHz
Epsilon : 55.68F/m
Sigma : 0.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)2$

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 5.408 W/kg 10 gram SAR value : 3.740 W/kg Area Scan Peak SAR : 8.575 W/kg Zoom Scan Peak SAR : 13.987 W/kg

Plot 5#

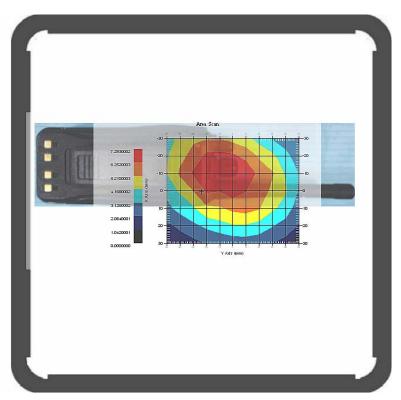

SAR Evaluation Report 35 of 71

Body-Back 0.0cm (Digital 6.25 kHz -469.9875 MHz); Model: P108

Measurement Data

Modulation mode : 4FSK Crest Factor : 2

Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 6.617 W/kg Power Drift-Finish : 6.508 W/kg Power Drift (%) : -1.853

Tissue Data

Type : Body

Frequency : 469.9875 MHz
Epsilon : 55.76F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 4.631 W/kg 10 gram SAR value : 2.618 W/kg Area Scan Peak SAR : 5.151 W/kg Zoom Scan Peak SAR : 7.364 W/kg

Plot 6#

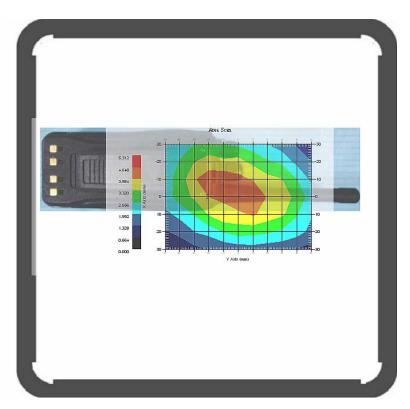

SAR Evaluation Report 36 of 71

Face-Up 2.5cm (Digital 6.25 kHz-435.0125 MHz); Model: P118

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 5.325 W/kg Power Drift-Finish : 5.509 W/kg Power Drift (%) : 3.443

Tissue Data

Type : Head

 Frequency
 : 435.0125 MHz

 Epsilon
 : 42.29 F/m

 Sigma
 : 0.88 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 3.182 W/kg 10 gram SAR value : 2.295 W/kg Area Scan Peak SAR : 3.990 W/kg Zoom Scan Peak SAR : 6.307 W/kg

Plot 7#

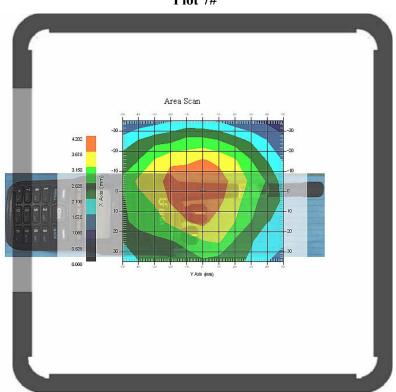

SAR Evaluation Report 37 of 71

Body-Back 0.0cm (Digital 6.25 kHz-400.0125 MHz); Model: P118

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 3.517 W/kg Power Drift-Finish : 3.488 W/kg Power Drift (%) : -2.378

Tissue Data

Type : Body

Frequency : 400.0125 MHz
Epsilon : 55.61F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 3.615 W/kg 10 gram SAR value : 1.738 W/kg Area Scan Peak SAR : 5.057 W/kg Zoom Scan Peak SAR : 7.463 W/kg

Plot 8#

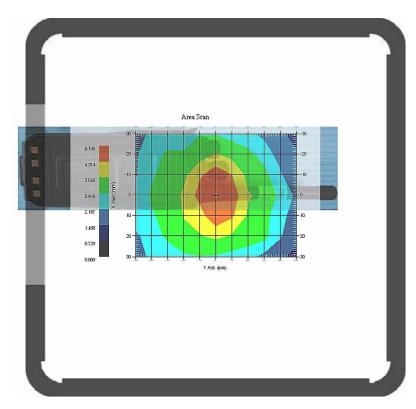

SAR Evaluation Report 38 of 71

Body-Back 0.0cm (Digital 6.25 kHz-435.0125 MHz); Model: P118

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 3.648 W/kg Power Drift-Finish : 3.742 W/kg Power Drift (%) : 2.063

Tissue Data

Type : Body

Frequency : 435.0125 MHz
Epsilon : 55.68F/m
Sigma : 0.93 S/m
Density : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 3.759 W/kg 10 gram SAR value : 1.879 W/kg Area Scan Peak SAR : 4.693 W/kg Zoom Scan Peak SAR : 7.390 W/kg

Plot 9#

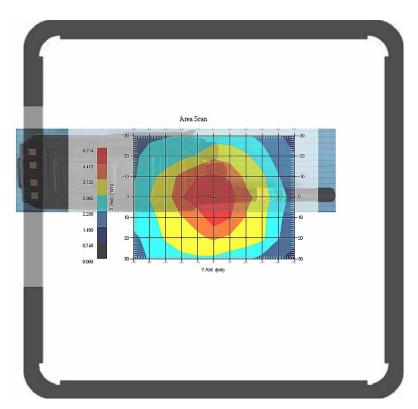

SAR Evaluation Report 39 of 71

Body-Back 0.0cm (Digital 6.25 kHz-469.9875 MHz); Model: P118

Measurement Data

Modulation mode : 4FSK
Crest Factor : 2
Scan Type : Complete

Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm

Power Drift-Start : 3.695 W/kg Power Drift-Finish : 3.614 W/kg Power Drift (%) : -1.526

Tissue Data

Type : Body

 Frequency
 : 469.9875 MHz

 Epsilon
 : 55.76 F/m

 Sigma
 : 0.94 S/m

 Density
 : 1000.00 kg/cu. m

Probe Data


Serial No. : 500-00283 Frequency Band : 450 Duty Cycle Factor : 2 Conversion Factor : 6.0

Probe Sensitivity : 1.20 1.20 1.20 $\mu V/(V/m)$ 2

Compression Point : 95.00 mV Offset : 1.56 mm

1 gram SAR value : 3.244 W/kg 10 gram SAR value : 1.572 W/kg Area Scan Peak SAR : 4.226 W/kg Zoom Scan Peak SAR : 6.458 W/kg

Plot 10#

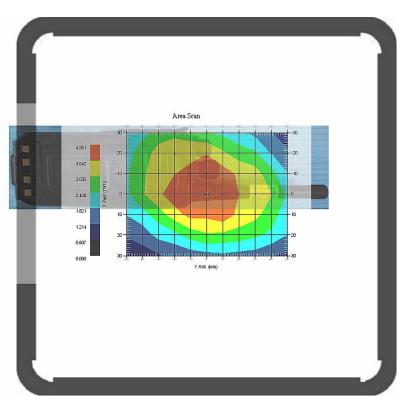

SAR Evaluation Report 40 of 71

APPENDIX A – MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement Uncertainty for 300MHz to 3GHz

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c _i ¹ (1-g)	c _i ¹ (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
	Measurement System						
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^1$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	√ср	√ср	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.006	rectangular	$\sqrt{3}$	1	1	0.003	0.003
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
		Res	triction				
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test Sample Positioning	0.023	normal	1	1	1	0.023	0.023
Device Holder Uncertainty	6.215	normal	1	1	1	6.215	6.215
Drift of Output Power	4.627	rectangular	$\sqrt{3}$	1	1	2.67	2.67
		Phantor	n and Setu	ıp			
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.938	normal	1	0.7	0.5	1.36	0.97
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	3.093	normal	1	0.6	0.5	1.86	1.55
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

SAR Evaluation Report 41 of 71

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: 1427-1430

Client .: BACL Lab

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe
Record of Calibration
Head and Body
Manufacturer: APREL Laboratories
Model No.: E-020

Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole

Project No: BACL-5673

Calibrated: 8th August 2012 Released on: 9th August 2012

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

VCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr. OTTAWA, ONTARIO CANADA K2K 3J1 Division of APREL Lab. TEL: (613) 435-8300 FAX: (613) 435-8306

SAR Evaluation Report 42 of 71

Division of APREL Inc.

Introduction

This Calibration Report reproduces the results of the calibration performed in line with the references listed below. Calibration is performed using accepted methodologies as per the references listed below. Probes are calibrated for air, and tissue and the values reported are the results from the physical quantification of the probe through meteorgical practices.

Calibration Method

Probes are calibrated using the following methods.

<1000MHz

TEM Cell for sensitivity in air

Standard phantom using temperature transfer method for sensitivity in tissue

>1000MHz

Waveguide* method to determine sensitivity in air and tissue

*Waveguide is numerically (simulation) assessed to determine the field distribution and power

The boundary effect for the probe is assessed using a standard flat phantom where the probe output is compared against a numerically simulated series of data points

References

- IEEE Standard 1528 (2003) including Amendment 1
 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- o EN 62209-1 (2006)
 - Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices Human models. instrumentation, and procedures-Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- o IEC 62209-2 Ed. 1.0 (2010-03)
 - Human exposure to RF fields from hand-held and body-mounted wireless devices Human models, instrumentation, and procedures Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- o D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

Page 2 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 43 of 71

Division of APREL Inc.

Conditions

Probe 500-00283 was a recalibration with the exception frequency of 450 MHz .which was a new calibration

Ambient Temperature of the Laboratory: $22 \degree C +/- 1.5 \degree C$ Temperature of the Tissue: $21 \degree C +/- 1.5 \degree C$ Relative Humidity: < 60%

Primary Measurement Standards

Instrument	Serial Number	Cal due date
Power meter Anritsu MA2408A	90025437	Nov.4, 2012
Power Sensor Anritsu MA2481D	103555	Nov 4, 2012
Attenuator HP 8495A (70dB)	1944A10711	Sept. 14, 2012
Network Analyzer Anritsu MT8801C	MB11855	Feb. 8, 2013

Secondary Measurement Standards

Signal Generator Agilent E4438C -506 MY55182336 June 7, 2013

Attestation

The below named signatories have conducted the calibration and review of the data which is presented in this calibration report.

We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Page 3 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 44 of 71

Division of APREL Inc.

Probe Summary

Probe Type: E-Field Probe E020

Serial Number: 500-00283

Frequency: As presented on page 5

Sensor Offset: 1.56

Sensor Length: 2.5

Tip Enclosure: Composite*

Tip Diameter: < 2.9 mm

Tip Length: 55 mm

Total Length: 289 mm

*Resistive to recommended tissue recipes per IEEE-1528

Sensitivity in Air

Diode Compression Point: 95 mV

SAR Evaluation Report 45 of 71

Page 4 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

Division of APREL Inc.

Calibration for Tissue (Head H, Body B)

Frequency	Tissue Type	Measured Epsilon	Measured Sigma	Calibration Uncertainty	Tolerance Uncertainty for 5%*	Conversion Factor
450 H	<mark>Head</mark>	43.98	0.9	<mark>3.5</mark>	<mark>3.4</mark>	<mark>6</mark>
450 B	<mark>Body</mark>	<mark>57.07</mark>	0.92	<mark>3.5</mark>	<mark>3.4</mark>	<mark>6</mark>
750 H	Head	X	X	X	X	X
750 B	Body	Х	X	X	X	X
835 H	<mark>Head</mark>	<mark>42.35</mark>	<mark>0.938</mark>	<mark>3.5</mark>	<mark>3.4</mark>	<mark>6.6</mark>
835 B	<mark>Body</mark>	<mark>56.65</mark>	1.018	<mark>3.5</mark>	<mark>3.4</mark>	<mark>6.6</mark>
900 H	<mark>Head</mark>	<mark>41.35</mark>	<mark>0.98</mark>	3.5	<mark>3.4</mark>	6
900 B	<mark>Body</mark>	<mark>56.08</mark>	1.05	<mark>3.5</mark>	<mark>3.4</mark>	<mark>6</mark>
1450 H	Head	Х	X	X	X	X
1450 B	Body	X	X	X	X	X
1500 H	Head	Х	X	X	X	X
1500 B	Body	Х	X	X	X	Х
1640 H	Head	Х	X	X	X	X
1640 B	Body	Х	X	X	X	Х
1750 H	Head	Х	X	X	X	Х
1750 B	Body	Х	X	X	X	X
1800 H	Head	Х	X	X	X	Х
1800 B	Body	X	X	X	X	Х
1900 H	<mark>Head</mark>	<mark>38.72</mark>	1.35	<mark>3.5</mark>	<mark>2.7</mark>	<mark>5.2</mark>
1900 B	<mark>Body</mark>	<mark>51.62</mark>	<mark>1.48</mark>	<mark>3.5</mark>	<mark>2.7</mark>	<mark>5</mark>
2000 H	Head	X	X	X	X	X
2000 B	Body	X	X	X	X	X
2100 H	Head	X	X	X	X	Х
2100 B	Body	X	X	X	Х	Х
2300 H	Head	Х	X	X	X	Х
2300 B	Body	X	X	X	X	X
2450 H	<mark>Head</mark>	<mark>38.06</mark>	1.87	<mark>3.5</mark>	<mark>3.5</mark>	<mark>4.9</mark>
2450B	<mark>Body</mark>	<mark>50.22</mark>	<mark>2.03</mark>	<mark>3.5</mark>	<mark>3.5</mark>	<mark>4.3</mark>
2600 H	Head	X	X	X	X	X
2600 B	Body	X	X	X	X	X
3000 H	Head	X	X	X	Х	X
3000 B	Body	X	X	X	X	X
3600 H	Head	X	X	X	X	X
3600 B	Body	Х	X	X	X	X
5200 H	Head	X	X	X	X	X
5200 B	Body	Х	X	X	X	X
5600 H	Head	Х	X	X	X	X
5600 B	Body	Х	X	X	X	X
5800 H	Head	Х	X	X	Х	X
5800 B	Body	Х	X	X	X	X

Page 5 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 46 of 71

Division of APREL Inc.

Boundary Effect:

Uncertainty resulting from the boundary effect is less than 2.1% for the distance between the tip of the probe and the tissue boundary, when less than 0.58mm.

Spatial Resolution:

The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe.

DAQ-PAQ Contribution

To minimize the uncertainty calculation all tissue sensitivity values were calculated using a load impedance of 5 $M\Omega$.

Boundary Effect:

For a distance of 0.58mm the worst case evaluated uncertainty (increase in the probe sensitivity) is less than 2.1%.

NOTES:

*The maximum deviation from the centre frequency when comparing the lower to upper range is listed.


Page 6 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 47 of 71

Division of APREL Inc.

Receiving Pattern Air

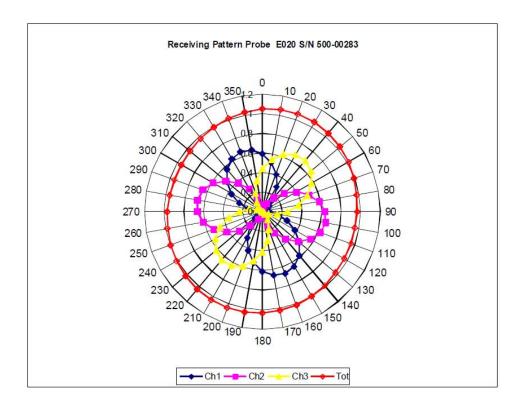


Page 7 of 10


This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 48 of 71

Division of APREL Inc.

Isotropy Error Air

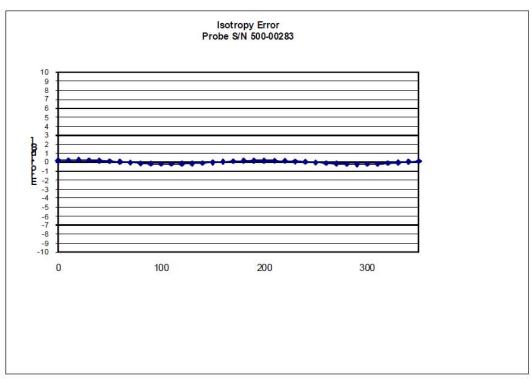

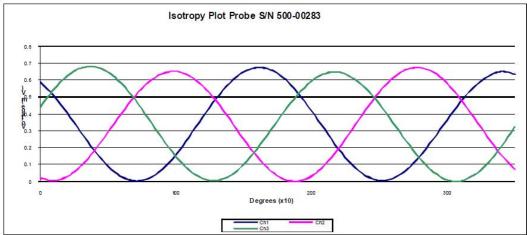

Isotropicity Tissue:

0.10 dB


Page 8 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 49 of 71

NCL Calibration Laboratories Division of APREL Inc.

Dynamic Range

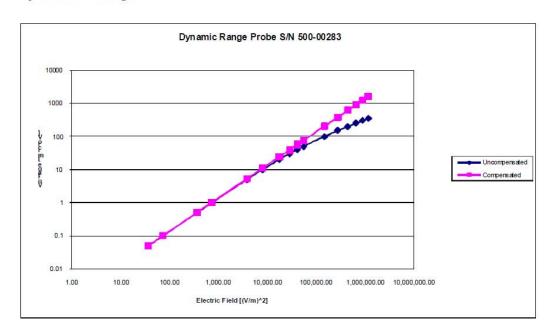

Page 9 of 10


This page has been reviewed for content and attested to on Page 2 of this document.

SAR Evaluation Report 50 of 71

Division of APREL Inc.

Video Bandwidth

Probe Frequency Characteristics

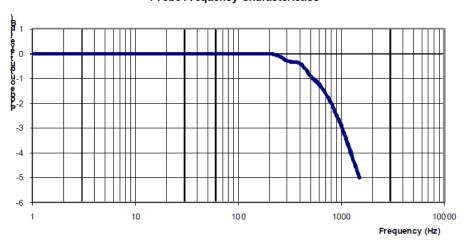

Video Bandwidth at 500 Hz 1 dB Video Bandwidth at 1.02 KHz: 3 dB

Test Equipment

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2012.

SAR Evaluation Report 51 of 71

Page 10 of 10

This page has been reviewed for content and attested to on Page 2 of this document.

APPENDIX C – DIPOLE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No: DC-1426 Project Number: BACL-5672

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

Validation Dipole

Manufacturer: APREL Laboratories Part number: ALS-D-450-S-2 Frequency: 450 MHz Serial No: 175-00503

Customer: Bay Area Compliance Head and Body Calibration

Calibrated: 31st July 2012 Released on: 2nd August 2012

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:

Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102 Division of APREL Kanata, Ontario TEL: (613) 435-8300 CANADA K2K 3J1

FAX: (613) 435-8306

SAR Evaluation Report 52 of 71

Division of APREL Laboratories.

Conditions

Dipole 175-00503 was taken from stock for an original calibration..

Ambient Temperature of the Laboratory: $22 \,^{\circ}\text{C} \, +/- \, 0.5 \,^{\circ}\text{C}$ Temperature of the Tissue: $21 \,^{\circ}\text{C} \, +/- \, 0.5 \,^{\circ}\text{C}$

> We the undersigned attest that to the best of our knowledge the calibration of this subject has been accurately conducted and that all information contained within the results pages have been reviewed for accuracy.

Art Brennan, Quality Manager

Dan Brooks, Test Engineer

Calibration Results Summary

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

Mechanical Dimensions

Length: 270.0 mm **Height:** 166.7 mm

Electrical Specification

	Head	Body
Return Loss	-30.726 dB	-33.258 dB
SWR	1.061 U	1.049 U
Impedance	50.600Ω	48.155 Ω


This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 53 of 71

Division of APREL Laboratories.


System Validation Results Head

Frequency	1 Gram	10 Gram	Peak
450 MHz	4.572	2.952	6.746



System Validation Results Body

Frequency	1 Gram	10 Gram	Peak
450 MHz	4.508	2.959	6.656



This page has been reviewed for content and attested to by signature within this document.

3

Division of APREL Laboratories.

Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole RFE-362. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-020 130 MHz to 26 GHz E-Field Probe Serial Number 212.

References

SSI-TP-018-ALSAS Dipole Calibration Procedure
SSI-TP-016 Tissue Calibration Procedure
IEEE 1528 "Recommended Practice for Determining the Peak Spatial-Average
Specific Absorption Rate (SAR) in the Human Body Due to Wireless
Communications Devices: Experimental Techniques"

Conditions

Original calibration.

Ambient Temperature of the Laboratory: $22 \,^{\circ}\text{C} \, +/- \, 0.5 \,^{\circ}\text{C}$ Temperature of the Tissue: $20 \,^{\circ}\text{C} \, +/- \, 0.5 \,^{\circ}\text{C}$

4

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 55 of 71

Division of APREL Laboratories.

Dipole Calibration Results

Mechanical Verification

APREL	APREL	Measured	Measured
Length	Height	Length	Height
280.0 mm	166.7 mm	280.0 mm	166.0 mm

Tissue Validation

Body Tissue 450MHz	Measured Head	Measured Body
Dielectric constant, ϵ_r	43.98	57.07
Conductivity, σ [S/m]	0.9	0.92

Dipole Calibration uncertainty

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

5

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 56 of 71


Division of APREL Laboratories.

Electrical Calibration

Test	Result Head	Result Body
S11 R/L	-30.726 dB	-33.258 dB
SWR	1.061 U	1.049 U
Impedance	50.600 Ω	48.155 Ω

The Following Graphs are the results as displayed on the Vector Network Analyzer.

S11 Parameter Return Loss

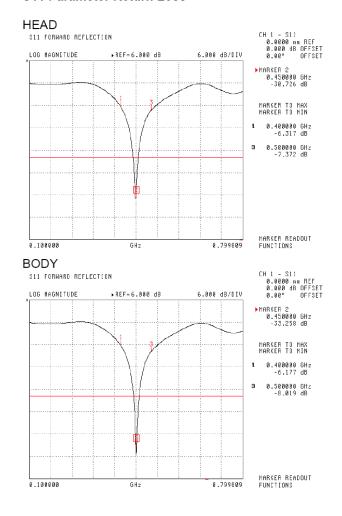


This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 57 of 71


6

NCL Calibration Laboratories Division of APREL Laboratories.

SWR



BODY




This page has been reviewed for content and attested to by signature within this document.

7

Division of APREL Laboratories.

Smith Chart Dipole Impedance

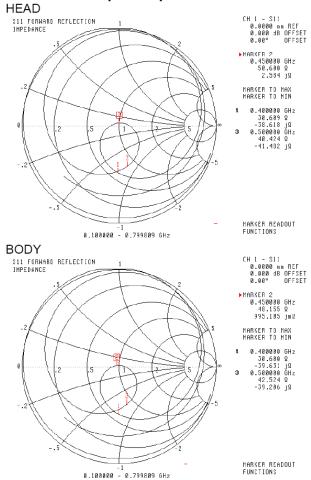

8

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 59 of 71

Division of APREL Laboratories.

Test Equipment


The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2012.

9

This page has been reviewed for content and attested to by signature within this document.

SAR Evaluation Report 60 of 71

APPENDIX D – EUT TEST POSITION PHOTOS






Face-Up 2.5 cm Separation to Flat Phantom Setup Photo



SAR Evaluation Report 61 of 71



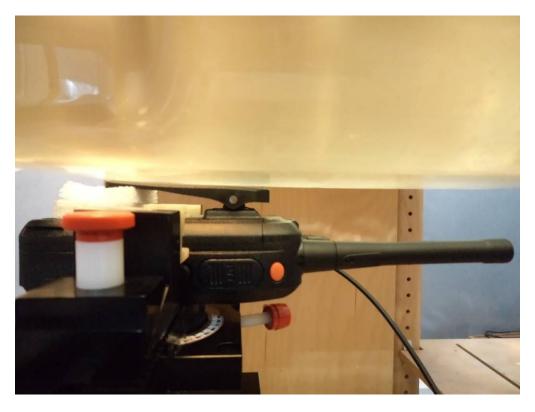

SAR Evaluation Report 62 of 71

APPENDIX E – EUT PHOTOS





EUT – Back View (P108)



SAR Evaluation Report 63 of 71

EUT – Left View (P108)



EUT – Right View (P108)



SAR Evaluation Report 64 of 71

EUT - Top View (P108)



EUT – Bottom View (P108)



SAR Evaluation Report 65 of 71

EUT – Uncover View (P108)



EUT – Front View (P118)



SAR Evaluation Report 66 of 71

EUT – Back View (P118)



EUT – Left View (P118)



SAR Evaluation Report 67 of 71

EUT – Right View (P118)



EUT – Top View (P118)



SAR Evaluation Report 68 of 71

EUT – Bottom View (P118)



EUT –Uncover View (P118)



SAR Evaluation Report 69 of 71

APPENDIX F - PRODUCT SIMILARITY DECLARATION LETTER



Fujian Beifeng Telecom Technology Co., Ltd.

A15 Huaqiao Economic Development Zone, Shuangyang, Luojiang, Quanzhou, Fujian, China
Tel: 0595-28396717 Fax: 0595-22771635

2013-10-11

Product Similarity Declaration Letter

To Whom It May Concern,

We, Fujian Beifeng Telecom Technology Co., Ltd. hereby declare that our product Digital radio, the model BF-P108 and BF-P118, they have the same PCB layout and main board, the only difference is that BF-P118 has the LCD screen and keyboard, but BF-P108 doesn't have LCD screen and keyboard. Model BF-P108 and BF-P118 were both tested by BACL.

Please contact me if you have any question.

Signature:

Cecilia Xiong

Cecilia Liny

Sales Manager

SAR Evaluation Report 70 of 71

APPENDIX G – INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetricPage 71 of 71 assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645 (652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15 {17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23 {25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainity in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.
- [15] FCC OET KDB643646 SAR Test Reduction Considerations for Occupational PTT Radios.

***** END OF REPORT *****

SAR Evaluation Report 71 of 71