

FCC Test Report

Report No.: RFBEKK-WTW-P20080111

FCC ID: 2AARN-DLWPH-8M

Test Model: DLWPH-8M

Series Model: DLWPH-8M-RW

Received Date: Aug. 06, 2020

Test Date: Sep. 10, 2020 ~ Sep. 24, 2020

Issued Date: Oct. 21, 2020

Applicant: PHIHONG TECHNOLOGY CO. LTD.

Address: No.568, Fu Xing 3rd Rd., Guishan, Tao Yuan Hsien, 333 Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and References	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	17
4.1.5 Test Set Up	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement.....	41
4.2.1 Limits of Conducted Emission Measurement	41
4.2.2 Test Instruments	41
4.2.3 Test Procedures.....	42
4.2.4 Deviation from Test Standard	42
4.2.5 Test Setup.....	42
4.2.6 EUT Operating Conditions.....	42
4.2.7 Test Results	43
4.3 6 dB Bandwidth Measurement.....	47
4.3.1 Limits of 6 dB Bandwidth Measurement.....	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments	47
4.3.4 Test Procedure	47
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Conditions.....	47
4.3.7 Test Results	48
4.4 Occupied Bandwidth Measurement.....	50
4.4.1 Test Setup.....	50
4.4.2 Test Instruments	50
4.4.3 Test Procedure	50
4.4.4 Deviation from Test Standard	50
4.4.5 EUT Operating Conditions.....	50
4.4.6 Test Results	51
4.5 Conducted Output Power Measurement	53
4.5.1 Limits of Conducted Output Power Measurement.....	53
4.5.2 Test Setup.....	53
4.5.3 Test Instruments	53
4.5.4 Test Procedures.....	53
4.5.5 Deviation from Test Standard	53
4.5.6 EUT Operating Conditions.....	53
4.5.7 Test Results	54

4.6	Power Spectral Density Measurement	55
4.6.1	Limits of Power Spectral Density Measurement.....	55
4.6.2	Test Setup.....	55
4.6.3	Test Instruments	55
4.6.4	Test Procedure	55
4.6.5	Deviation from Test Standard	55
4.6.6	EUT Operating Condition	55
4.6.7	Test Results	56
4.7	Conducted Out of Band Emission Measurement	58
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	58
4.7.2	Test Setup.....	58
4.7.3	Test Instruments	58
4.7.4	Test Procedure	58
4.7.5	Deviation from Test Standard	58
4.7.6	EUT Operating Condition	58
4.7.7	Test Results	59
5	Pictures of Test Arrangements.....	62
	Annex A- Band Edge Measurement	63
	Appendix – Information of the Testing Laboratories	69

Release Control Record

Issue No.	Description	Date Issued
RFBEKK-WTW-P20080111	Original Release	Oct. 21, 2020

1 Certificate of Conformity

Product: EV charging system module 4G with WI-FI

Brand: Phihong Technology Co., Ltd.

Test Model: DLWPH-8M

Series Model: DLWPH-8M-RW

Sample Status: Identical Prototype

Applicant: PHIHONG TECHNOLOGY CO. LTD.

Test Date: Sep. 10, 2020 ~ Sep. 24, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date: Oct. 21, 2020

Shelly Hsueh / Specialist

Approved by :



Date: Oct. 21, 2020

Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -11.03 dB at 5.354 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.3 dB at 44.55 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is SMA Male Reverse.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	EV charging system module 4G with WI-FI
Brand	Phihong Technology Co., Ltd.
Test Model	DLWPH-8M
Series Model	DLWPH-8M-RW
Status of EUT	Identical Prototype
Power Supply Rating	12 / 24 Vdc (adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS0
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Output Power	46.132 mW
Antenna Type	Refer to Note as below
Antenna Connector	Refer to Note as below
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. All models are listed as below

Brand	Model	WLAN Antenna type
Phihong Technology Co., Ltd.	DLWPH-8M	internal antenna
	DLWPH-8M-RW	external antenna

2. The EUT incorporates a SISO function. Physically, the EUT provides 1 completed transmitters and 1 receivers.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX

3. The following antennas were provided to the EUT.

Antenna	Brand	Model	Antenna Gain(dBi)	Antenna Type	Connector Type
Internal	Ublox	NA	2	Internal Antenna	NA
External	Gortec	DR0727-4201BSM	3.15	PCB	SMA Male Reverse

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT with External Antenna
B	√	√	√	-	EUT with Internal Antenna

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz - **RE<1G**: Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
NOTE: "-" means no effect.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5
B	802.11g	1 to 11	6	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5
B	802.11g	1 to 11	6	OFDM	BPSK	6.0

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Ivan Tseng
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

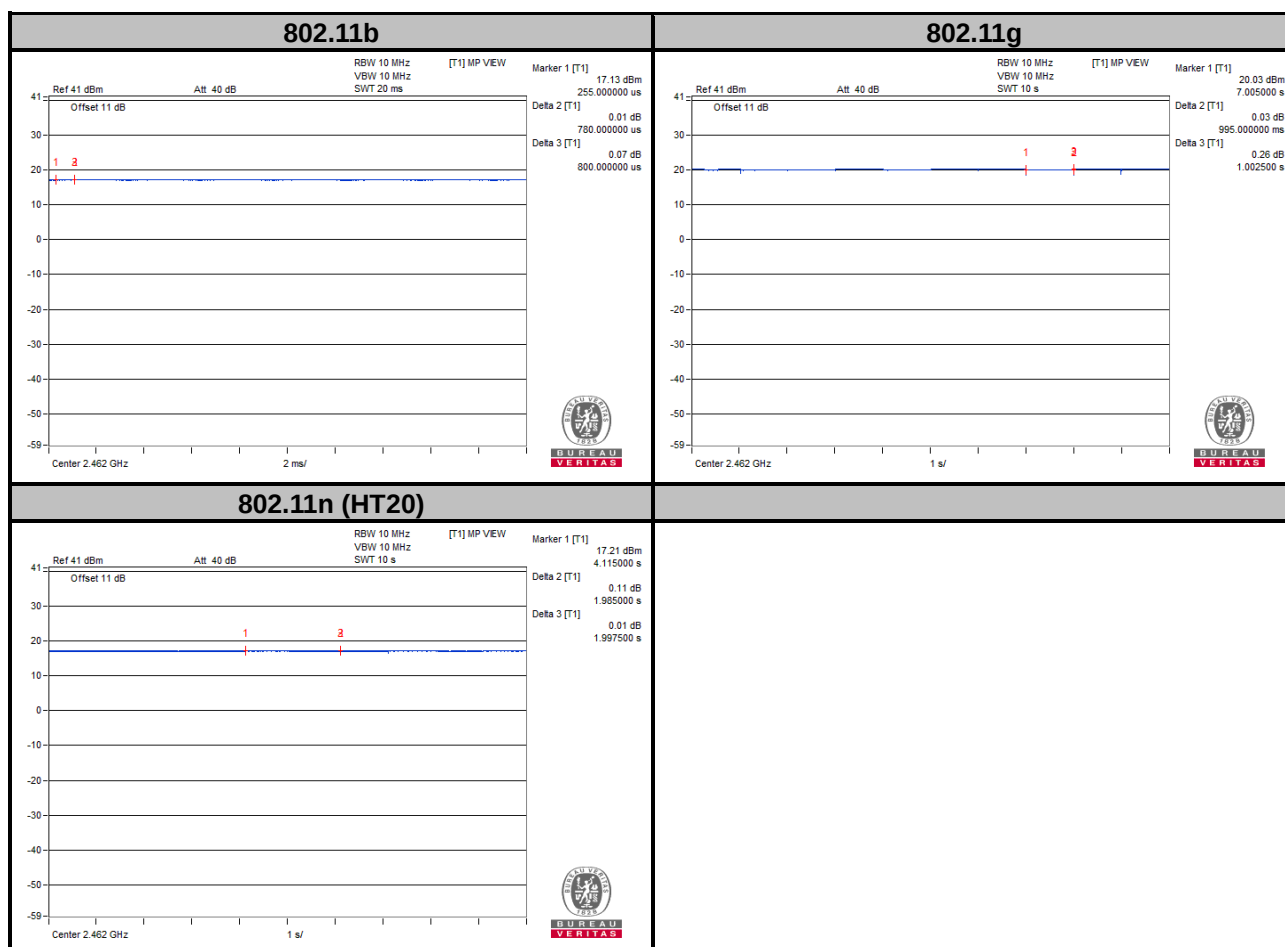


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Adapter	MEAN WELL	RID-125-1224	N/A	N/A

3.4.1 Configuration of System under Test

Mode A

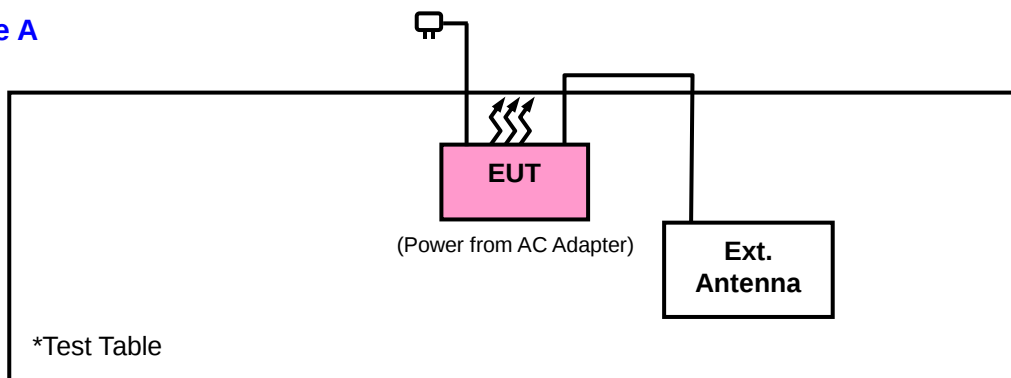

Mode B

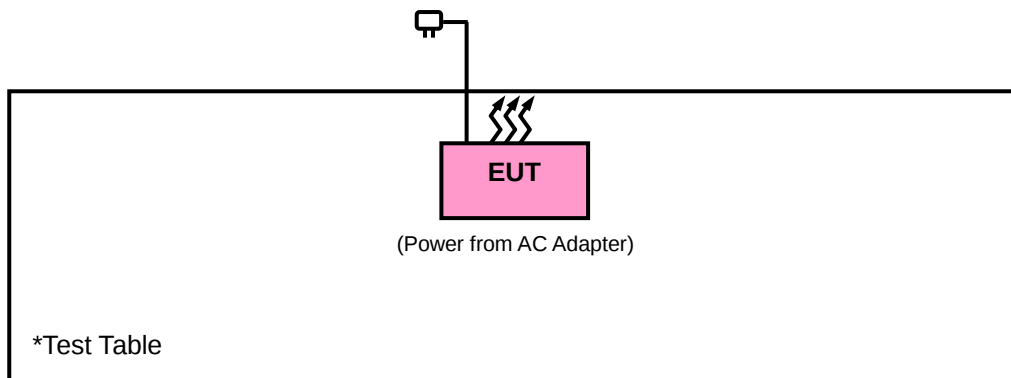

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Loop Antenna EMCI	EM-6879	269	Sep. 17, 2019	Sep. 16, 2020
			Sep. 17, 2020	Sep. 16, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable Woken	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55 190004/MY551900 07/MY55210005	Jul. 13, 2020	Jul. 12, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 2 kHz ; 11g: RBW = 1 MHz, VBW = 10 Hz ;
11n (HT20): RBW = 1 MHz, VBW = 10 Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

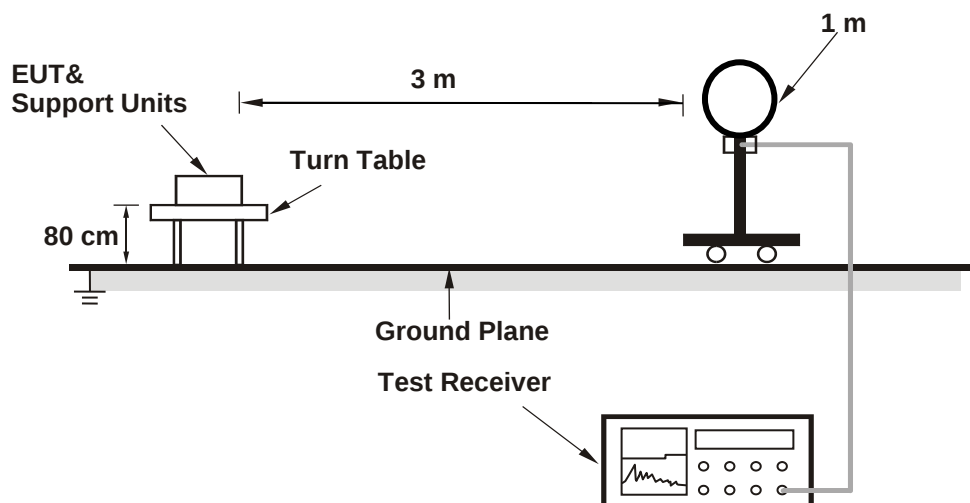

<Radiated Emission 30 MHz to 1 GHz>

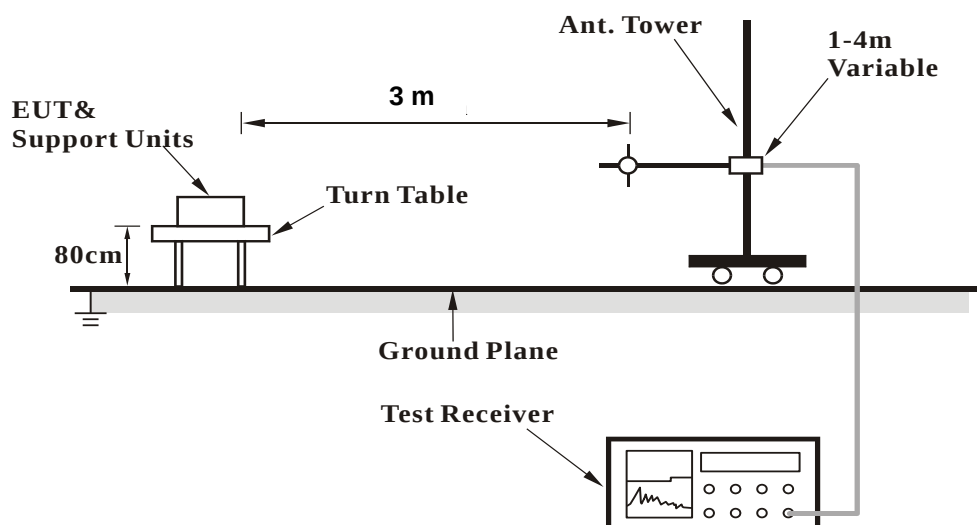

<Radiated Emission above 1 GHz>

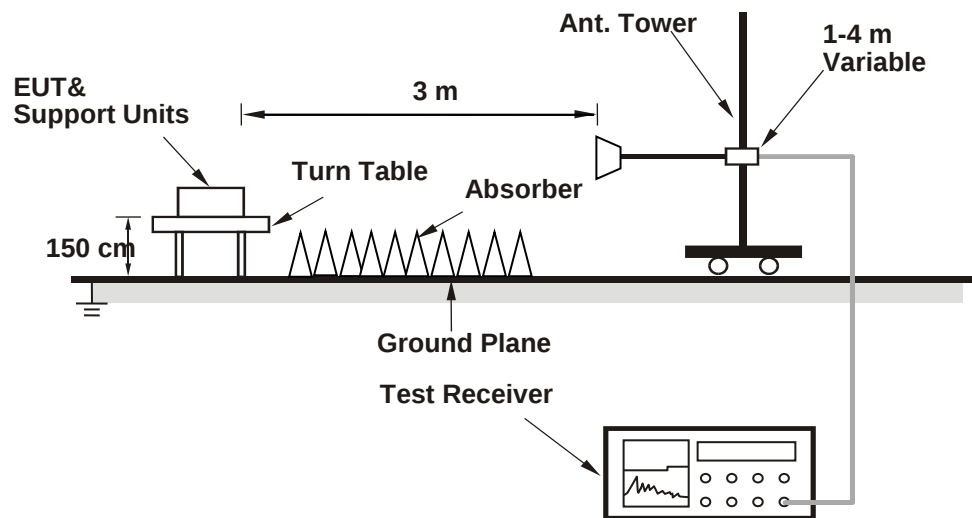

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data : Mode A

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	1.42 H	184	24.3	31.2
2	2390.00	43.3 AV	54.0	-10.7	1.42 H	184	12.1	31.2
3	*2412.00	94.9 PK			1.42 H	184	63.8	31.1
4	*2412.00	91.1 AV			1.42 H	184	60.0	31.1
5	4824.00	44.4 PK	74.0	-29.6	1.15 H	337	42.6	1.8
6	4824.00	32.0 AV	54.0	-22.0	1.15 H	337	30.2	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.54 V	198	25.6	31.2
2	2390.00	43.9 AV	54.0	-10.1	1.54 V	198	12.7	31.2
3	*2412.00	102.1 PK			1.54 V	198	71.0	31.1
4	*2412.00	98.3 AV			1.54 V	198	67.2	31.1
5	4824.00	46.3 PK	74.0	-27.7	1.57 V	161	44.5	1.8
6	4824.00	40.6 AV	54.0	-13.4	1.57 V	161	38.8	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	96.2 PK			1.37 H	189	65.1	31.1
2	*2437.00	92.4 AV			1.37 H	189	61.3	31.1
3	4874.00	45.2 PK	74.0	-28.8	1.24 H	331	43.2	2.0
4	4874.00	32.6 AV	54.0	-21.4	1.24 H	331	30.6	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.3 PK			1.59 V	203	72.2	31.1
2	*2437.00	99.5 AV			1.59 V	203	68.4	31.1
3	4874.00	47.3 PK	74.0	-26.7	1.51 V	162	45.3	2.0
4	4874.00	41.2 AV	54.0	-12.8	1.51 V	162	39.2	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.0 PK			1.44 H	187	63.9	31.1
2	*2462.00	92.2 AV			1.44 H	187	61.1	31.1
3	2483.50	55.1 PK	74.0	-18.9	1.44 H	187	23.9	31.2
4	2483.50	43.0 AV	54.0	-11.0	1.44 H	187	11.8	31.2
5	4924.00	44.9 PK	74.0	-29.1	1.17 H	327	42.8	2.1
6	4924.00	32.4 AV	54.0	-21.6	1.17 H	327	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.1 PK			1.55 V	196	72.0	31.1
2	*2462.00	99.3 AV			1.55 V	196	68.2	31.1
3	2483.50	55.6 PK	74.0	-18.4	1.55 V	196	24.4	31.2
4	2483.50	44.3 AV	54.0	-9.7	1.55 V	196	13.1	31.2
5	4924.00	46.9 PK	74.0	-27.1	1.59 V	167	44.8	2.1
6	4924.00	41.0 AV	54.0	-13.0	1.59 V	167	38.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.48 H	192	30.7	31.2
2	2390.00	46.3 AV	54.0	-7.7	1.48 H	192	15.1	31.2
3	*2412.00	96.4 PK			1.48 H	192	65.3	31.1
4	*2412.00	86.5 AV			1.48 H	192	55.4	31.1
5	4824.00	44.2 PK	74.0	-29.8	1.26 H	341	42.4	1.8
6	4824.00	31.2 AV	54.0	-22.8	1.26 H	341	29.4	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.56 V	198	33.2	31.2
2	2390.00	47.8 AV	54.0	-6.2	1.56 V	198	16.6	31.2
3	*2412.00	102.9 PK			1.56 V	198	71.8	31.1
4	*2412.00	93.1 AV			1.56 V	198	62.0	31.1
5	4824.00	45.2 PK	74.0	-28.8	1.64 V	158	43.4	1.8
6	4824.00	32.4 AV	54.0	-21.6	1.64 V	158	30.6	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.7 PK			1.38 H	191	68.6	31.1
2	*2437.00	89.9 AV			1.38 H	191	58.8	31.1
3	4874.00	45.1 PK	74.0	-28.9	1.08 H	329	43.1	2.0
4	4874.00	31.8 AV	54.0	-22.2	1.08 H	329	29.8	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.8 PK			1.74 V	184	75.7	31.1
2	*2437.00	97.0 AV			1.74 V	184	65.9	31.1
3	4874.00	46.2 PK	74.0	-27.8	1.52 V	163	44.2	2.0
4	4874.00	33.6 AV	54.0	-20.4	1.52 V	163	31.6	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.6 PK			1.53 H	190	64.5	31.1
2	*2462.00	85.7 AV			1.53 H	190	54.6	31.1
3	2483.50	61.3 PK	74.0	-12.7	1.53 H	190	30.1	31.2
4	2483.50	45.5 AV	54.0	-8.5	1.53 H	190	14.3	31.2
5	4924.00	44.2 PK	74.0	-29.8	1.09 H	331	42.1	2.1
6	4924.00	31.2 AV	54.0	-22.8	1.09 H	331	29.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.6 PK			1.64 V	191	71.5	31.1
2	*2462.00	92.7 AV			1.64 V	191	61.6	31.1
3	2483.50	68.3 PK	74.0	-5.7	1.64 V	191	37.1	31.2
4	2483.50	50.4 AV	54.0	-3.6	1.64 V	191	19.2	31.2
5	4924.00	45.1 PK	74.0	-28.9	1.53 V	165	43.0	2.1
6	4924.00	32.4 AV	54.0	-21.6	1.53 V	165	30.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.46 H	188	29.2	31.2
2	2390.00	45.3 AV	54.0	-8.7	1.46 H	188	14.1	31.2
3	*2412.00	94.3 PK			1.46 H	188	63.2	31.1
4	*2412.00	84.4 AV			1.46 H	188	53.3	31.1
5	4824.00	43.7 PK	74.0	-30.3	1.18 H	339	41.9	1.8
6	4824.00	30.9 AV	54.0	-23.1	1.18 H	339	29.1	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.82 V	178	31.3	31.2
2	2390.00	47.4 AV	54.0	-6.6	1.82 V	178	16.2	31.2
3	*2412.00	101.2 PK			1.82 V	181	70.1	31.1
4	*2412.00	91.3 AV			1.82 V	181	60.2	31.1
5	4824.00	44.6 PK	74.0	-29.4	1.49 V	164	42.8	1.8
6	4824.00	32.1 AV	54.0	-21.9	1.49 V	164	30.3	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.5 PK			1.39 H	186	69.4	31.1
2	*2437.00	90.7 AV			1.39 H	186	59.6	31.1
3	4874.00	44.5 PK	74.0	-29.5	1.07 H	326	42.5	2.0
4	4874.00	31.4 AV	54.0	-22.6	1.07 H	326	29.4	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.4 PK			1.75 V	188	76.3	31.1
2	*2437.00	97.6 AV			1.75 V	188	66.5	31.1
3	4874.00	45.6 PK	74.0	-28.4	1.55 V	169	43.6	2.0
4	4874.00	32.6 AV	54.0	-21.4	1.55 V	169	30.6	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	93.4 PK			1.44 H	195	62.3	31.1
2	*2462.00	83.6 AV			1.44 H	195	52.5	31.1
3	2483.50	59.1 PK	74.0	-14.9	1.44 H	195	27.9	31.2
4	2483.50	44.8 AV	54.0	-9.2	1.44 H	195	13.6	31.2
5	4924.00	43.7 PK	74.0	-30.3	1.17 H	331	41.6	2.1
6	4924.00	31.0 AV	54.0	-23.0	1.17 H	331	28.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.3 PK			2.17 V	190	69.2	31.1
2	*2462.00	90.5 AV			2.17 V	190	59.4	31.1
3	2483.50	64.6 PK	74.0	-9.4	2.17 V	190	33.4	31.2
4	2483.50	47.3 AV	54.0	-6.7	2.17 V	190	16.1	31.2
5	4924.00	44.9 PK	74.0	-29.1	1.50 V	166	42.8	2.1
6	4924.00	32.3 AV	54.0	-21.7	1.50 V	166	30.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Mode B

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.5 PK	74.0	-18.5	3.02 H	353	24.3	31.2
2	2390.00	43.6 AV	54.0	-10.4	3.02 H	353	12.4	31.2
3	*2412.00	99.2 PK			3.02 H	353	68.1	31.1
4	*2412.00	95.4 AV			3.02 H	353	64.3	31.1
5	4824.00	45.0 PK	74.0	-29.0	2.23 H	279	43.2	1.8
6	4824.00	33.4 AV	54.0	-20.6	2.23 H	279	31.6	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.9 PK	74.0	-18.1	3.22 V	181	24.7	31.2
2	2390.00	43.9 AV	54.0	-10.1	3.22 V	181	12.7	31.2
3	*2412.00	101.8 PK			3.22 V	181	70.7	31.1
4	*2412.00	98.0 AV			3.22 V	181	66.9	31.1
5	4824.00	45.6 PK	74.0	-28.4	2.96 V	335	43.8	1.8
6	4824.00	34.0 AV	54.0	-20.0	2.96 V	335	32.2	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.1 PK			2.97 H	334	69.0	31.1
2	*2437.00	96.3 AV			2.97 H	334	65.2	31.1
3	4874.00	45.6 PK	74.0	-28.4	2.27 H	293	43.6	2.0
4	4874.00	37.8 AV	54.0	-16.2	2.27 H	293	35.8	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.5 PK			3.28 V	187	71.4	31.1
2	*2437.00	98.7 AV			3.28 V	187	67.6	31.1
3	4874.00	46.7 PK	74.0	-27.3	3.05 V	215	44.7	2.0
4	4874.00	38.3 AV	54.0	-15.7	3.05 V	215	36.3	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.9 PK			3.02 H	355	64.8	31.1
2	*2462.00	92.1 AV			3.02 H	355	61.0	31.1
3	2483.50	54.9 PK	74.0	-19.1	3.02 H	355	23.7	31.2
4	2483.50	43.3 AV	54.0	-10.7	3.02 H	355	12.1	31.2
5	4924.00	44.4 PK	74.0	-29.6	2.17 H	289	42.3	2.1
6	4924.00	36.2 AV	54.0	-17.8	2.17 H	289	34.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.3 PK			3.10 V	198	67.2	31.1
2	*2462.00	94.5 AV			3.10 V	198	63.4	31.1
3	2483.50	55.1 PK	74.0	-18.9	3.10 V	198	23.9	31.2
4	2483.50	43.5 AV	54.0	-10.5	3.10 V	198	12.3	31.2
5	4924.00	46.1 PK	74.0	-27.9	3.11 V	306	44.0	2.1
6	4924.00	37.5 AV	54.0	-16.5	3.11 V	306	35.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	2.93 H	349	28.5	31.2
2	2390.00	45.4 AV	54.0	-8.6	2.93 H	349	14.2	31.2
3	*2412.00	100.2 PK			1.71 H	184	69.1	31.1
4	*2412.00	90.2 AV			1.71 H	184	59.1	31.1
5	4824.00	43.0 PK	74.0	-31.0	1.63 H	249	41.2	1.8
6	4824.00	29.6 AV	54.0	-24.4	1.63 H	249	27.8	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	3.39 V	191	35.6	31.2
2	2390.00	49.6 AV	54.0	-4.4	3.39 V	191	18.4	31.2
3	*2412.00	103.3 PK			3.39 V	191	72.2	31.1
4	*2412.00	93.4 AV			3.39 V	191	62.3	31.1
5	4824.00	44.1 PK	74.0	-29.9	2.43 V	7	42.3	1.8
6	4824.00	30.2 AV	54.0	-23.8	2.43 V	7	28.4	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.8 PK			2.97 H	352	71.7	31.1
2	*2437.00	93.1 AV			2.97 H	352	62.0	31.1
3	4874.00	43.4 PK	74.0	-30.6	1.69 H	254	41.4	2.0
4	4874.00	30.0 AV	54.0	-24.0	1.69 H	254	28.0	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.3 PK			3.43 V	198	74.2	31.1
2	*2437.00	95.6 AV			3.43 V	198	64.5	31.1
3	4874.00	44.6 PK	74.0	-29.4	2.51 V	11	42.6	2.0
4	4874.00	30.7 AV	54.0	-23.3	2.51 V	11	28.7	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.2 PK			2.87 H	339	67.1	31.1
2	*2462.00	88.5 AV			2.87 H	339	57.4	31.1
3	2483.50	58.5 PK	74.0	-15.5	2.87 H	339	27.3	31.2
4	2483.50	45.4 AV	54.0	-8.6	2.87 H	339	14.2	31.2
5	4924.00	43.0 PK	74.0	-31.0	1.66 H	258	40.9	2.1
6	4924.00	29.6 AV	54.0	-24.4	1.66 H	258	27.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.7 PK			3.44 V	180	69.6	31.1
2	*2462.00	90.9 AV			3.44 V	180	59.8	31.1
3	2483.50	60.9 PK	74.0	-13.1	3.44 V	180	29.7	31.2
4	2483.50	47.6 AV	54.0	-6.4	3.44 V	180	16.4	31.2
5	4924.00	44.2 PK	74.0	-29.8	2.53 V	17	42.1	2.1
6	4924.00	30.3 AV	54.0	-23.7	2.53 V	17	28.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.8 PK	74.0	-13.2	3.03 H	352	29.6	31.2
2	2390.00	45.3 AV	54.0	-8.7	3.03 H	352	14.1	31.2
3	*2412.00	97.8 PK			3.03 H	352	66.7	31.1
4	*2412.00	87.8 AV			3.03 H	352	56.7	31.1
5	4824.00	42.5 PK	74.0	-31.5	1.72 H	256	40.7	1.8
6	4824.00	29.1 AV	54.0	-24.9	1.72 H	256	27.3	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	3.21 V	180	31.4	31.2
2	2390.00	47.4 AV	54.0	-6.6	3.21 V	180	16.2	31.2
3	*2412.00	100.4 PK			3.21 V	180	69.3	31.1
4	*2412.00	90.4 AV			3.21 V	180	59.3	31.1
5	4824.00	43.6 PK	74.0	-30.4	2.53 V	9	41.8	1.8
6	4824.00	29.9 AV	54.0	-24.1	2.53 V	9	28.1	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.6 PK			2.98 H	339	70.5	31.1
2	*2437.00	91.6 AV			2.98 H	339	60.5	31.1
3	4874.00	43.4 PK	74.0	-30.6	1.75 H	250	41.4	2.0
4	4874.00	30.0 AV	54.0	-24.0	1.75 H	250	28.0	2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.1 PK			3.47 V	187	73.0	31.1
2	*2437.00	94.2 AV			3.47 V	187	63.1	31.1
3	4874.00	44.6 PK	74.0	-29.4	2.55 V	14	42.6	2.0
4	4874.00	30.5 AV	54.0	-23.5	2.55 V	14	28.5	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.6 PK			2.99 H	342	64.5	31.1
2	*2462.00	85.7 AV			2.99 H	342	54.6	31.1
3	2483.50	56.9 PK	74.0	-17.1	2.99 H	342	25.7	31.2
4	2483.50	44.4 AV	54.0	-9.6	2.99 H	342	13.2	31.2
5	4924.00	42.7 PK	74.0	-31.3	1.71 H	255	40.6	2.1
6	4924.00	29.4 AV	54.0	-24.6	1.71 H	255	27.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.3 PK			3.24 V	175	67.2	31.1
2	*2462.00	88.2 AV			3.24 V	175	57.1	31.1
3	2483.50	58.6 PK	74.0	-15.4	3.24 V	175	27.4	31.2
4	2483.50	46.0 AV	54.0	-8.0	3.24 V	175	14.8	31.2
5	4924.00	43.8 PK	74.0	-30.2	2.37 V	3	41.7	2.1
6	4924.00	30.2 AV	54.0	-23.8	2.37 V	3	28.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


Mode A

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.70	34.6 QP	40.0	-5.4	1.25 H	107	44.5	-9.9
2	137.67	39.2 QP	43.5	-4.3	1.00 H	228	48.5	-9.3
3	194.90	39.5 QP	43.5	-4.0	1.50 H	43	51.0	-11.5
4	285.11	34.6 QP	46.0	-11.4	1.00 H	214	41.9	-7.3
5	390.84	30.8 QP	46.0	-15.2	1.00 H	91	36.0	-5.2
6	964.11	35.0 QP	54.0	-19.0	1.25 H	122	29.3	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

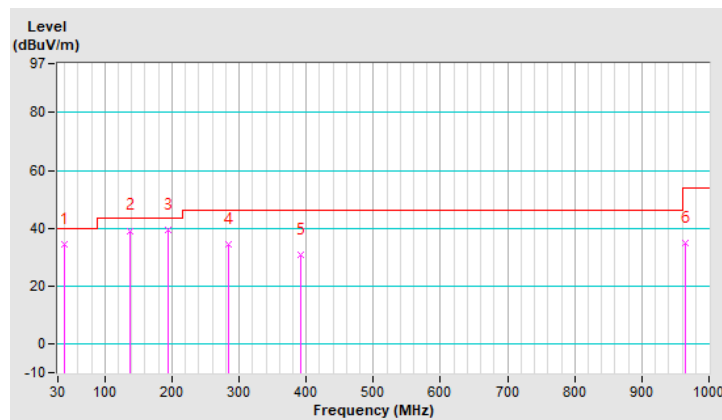


RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	36.4 QP	40.0	-3.6	1.25 V	228	46.9	-10.5
2	44.55	38.7 QP	40.0	-1.3	1.00 V	149	48.1	-9.4
3	128.94	32.3 QP	43.5	-11.2	1.25 V	86	42.5	-10.2
4	200.72	29.5 QP	43.5	-14.0	1.50 V	136	41.1	-11.6
5	299.66	30.2 QP	46.0	-15.8	1.00 V	19	37.3	-7.1
6	870.02	33.8 QP	46.0	-12.2	1.25 V	55	29.9	3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

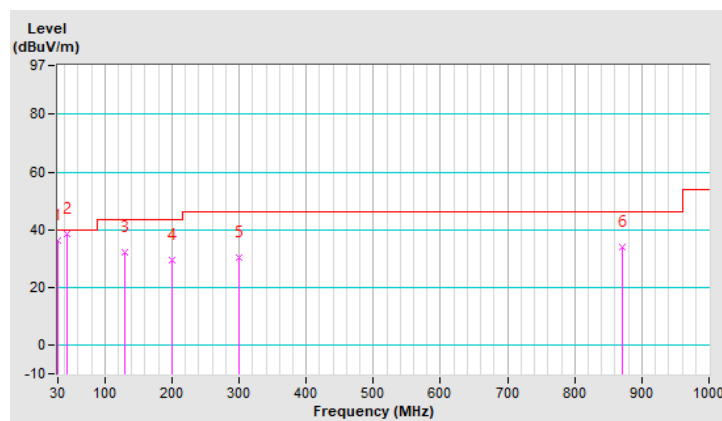


Mode B

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.55	29.5 QP	40.0	-10.5	1.00 H	107	38.9	-9.4
2	109.54	36.9 QP	43.5	-6.6	1.25 H	133	48.9	-12.0
3	172.59	39.9 QP	43.5	-3.6	1.50 H	337	49.2	-9.3
4	232.73	37.5 QP	46.0	-8.5	1.25 H	257	47.9	-10.4
5	299.66	33.7 QP	46.0	-12.3	1.00 H	34	40.8	-7.1
6	805.03	33.0 QP	46.0	-13.0	1.00 H	131	30.0	3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

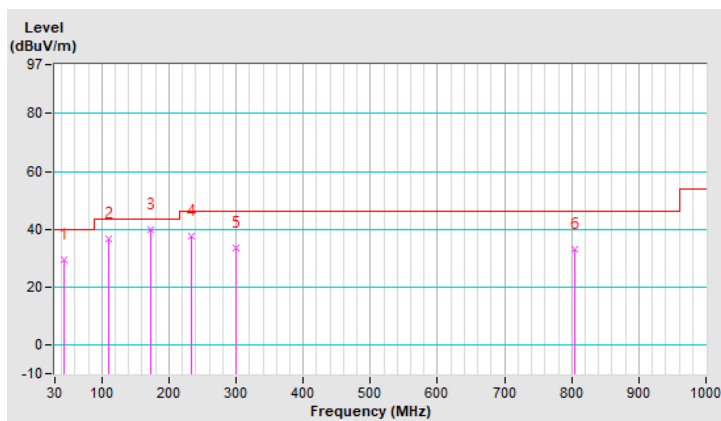


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	36.9 QP	40.0	-3.1	1.50 V	179	47.9	-11.0
2	70.74	36.6 QP	40.0	-3.4	1.00 V	228	47.7	-11.1
3	135.73	33.6 QP	43.5	-9.9	1.25 V	107	43.1	-9.5
4	235.64	29.8 QP	46.0	-16.2	1.00 V	175	39.8	-10.0
5	472.32	28.2 QP	46.0	-17.8	1.25 V	156	31.4	-3.2
6	943.74	36.5 QP	46.0	-9.5	1.00 V	11	31.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

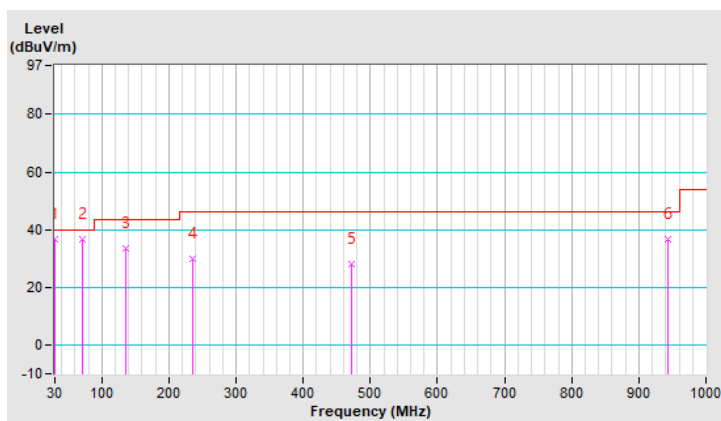

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 11, 2019	Dec. 10, 2020
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 04, 2020	Sep. 03, 2021
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ENV216	101196	Apr. 20, 2020	Apr. 19, 2021
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

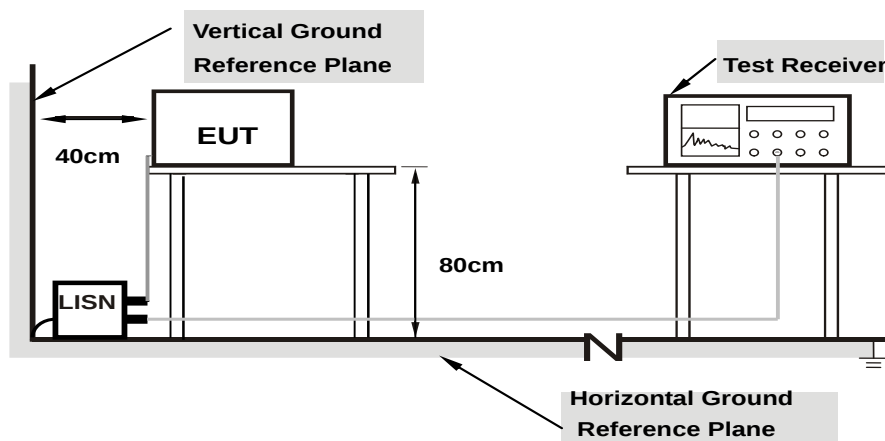

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results


Mode A

Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20960	9.59	31.19	22.94	40.78	32.53	63.22	53.22	-22.44	-20.69
2	0.25800	9.59	34.47	24.15	44.06	33.74	61.50	51.50	-17.44	-17.76
3	0.35400	9.58	32.64	19.47	42.22	29.05	58.87	48.87	-16.65	-19.82
4	0.83000	9.59	32.19	20.83	41.78	30.42	56.00	46.00	-14.22	-15.58
5	5.22600	9.68	32.95	26.42	42.63	36.10	60.00	50.00	-17.37	-13.90
6	26.27400	9.76	28.13	22.21	37.89	31.97	60.00	50.00	-22.11	-18.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

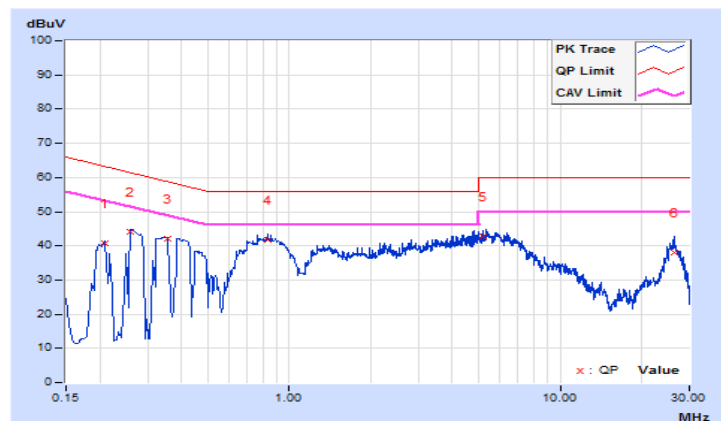


Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21350	9.57	31.53	19.11	41.10	28.68	63.07	53.07	-21.97	-24.39
2	0.25800	9.57	34.68	24.30	44.25	33.87	61.50	51.50	-17.25	-17.63
3	0.35000	9.56	32.35	21.33	41.91	30.89	58.96	48.96	-17.05	-18.07
4	0.83000	9.57	32.15	20.77	41.72	30.34	56.00	46.00	-14.28	-15.66
5	5.35400	9.66	33.90	29.31	43.56	38.97	60.00	50.00	-16.44	-11.03
6	26.41400	9.84	27.41	21.42	37.25	31.26	60.00	50.00	-22.75	-18.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

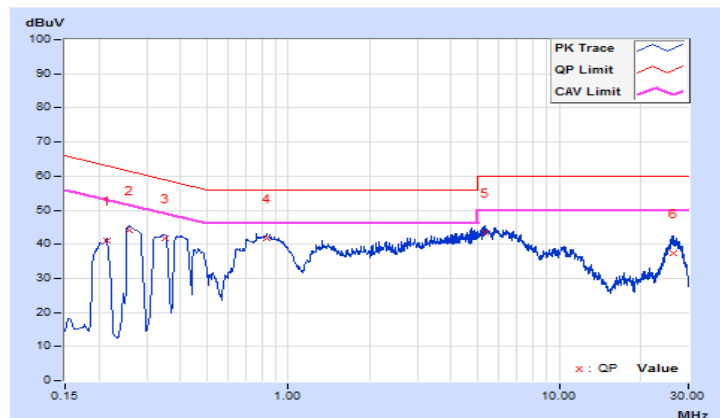


Mode B

Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21294	9.59	32.22	20.55	41.81	30.14	63.09	53.09	-21.28	-22.95
2	0.26499	9.59	34.46	25.25	44.05	34.84	61.27	51.27	-17.22	-16.43
3	0.35400	9.58	32.66	19.51	42.24	29.09	58.87	48.87	-16.63	-19.78
4	0.83000	9.59	32.16	20.77	41.75	30.36	56.00	46.00	-14.25	-15.64
5	5.29000	9.68	33.33	28.18	43.01	37.86	60.00	50.00	-16.99	-12.14
6	25.93000	9.76	26.67	21.49	36.43	31.25	60.00	50.00	-23.57	-18.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

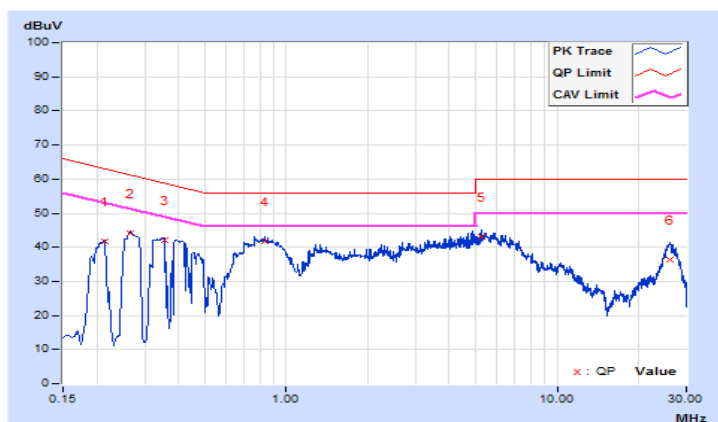


Frequency Range	150kHz ~ 30MHz	Detector Function & Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21400	9.57	31.33	18.41	40.90	27.98	63.05	53.05	-22.15	-25.07
2	0.25606	9.57	35.29	22.52	44.86	32.09	61.56	51.56	-16.70	-19.47
3	0.34486	9.56	32.46	21.78	42.02	31.34	59.09	49.09	-17.07	-17.75
4	0.85400	9.58	31.92	20.67	41.50	30.25	56.00	46.00	-14.50	-15.75
5	5.29000	9.66	33.31	28.28	42.97	37.94	60.00	50.00	-17.03	-12.06
6	26.33400	9.84	27.60	21.64	37.44	31.48	60.00	50.00	-22.56	-18.52

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

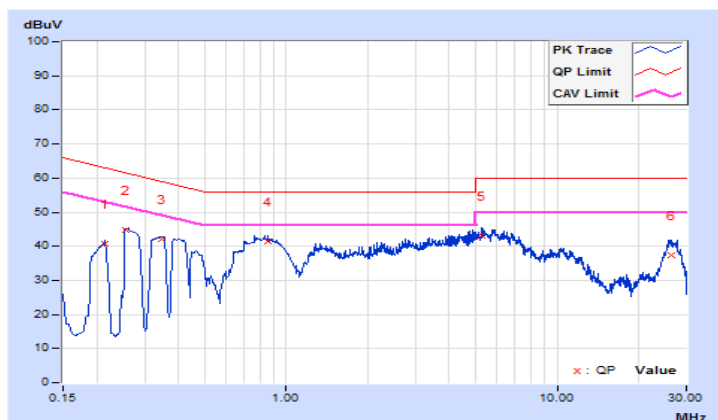


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.78	0.5	Pass
6	2437	10.09	0.5	Pass
11	2462	10.06	0.5	Pass

802.11g


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.57	0.5	Pass
6	2437	16.62	0.5	Pass
11	2462	16.60	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.77	0.5	Pass
6	2437	17.75	0.5	Pass
11	2462	17.87	0.5	Pass

Spectrum Plot of Worst Value


802.11b

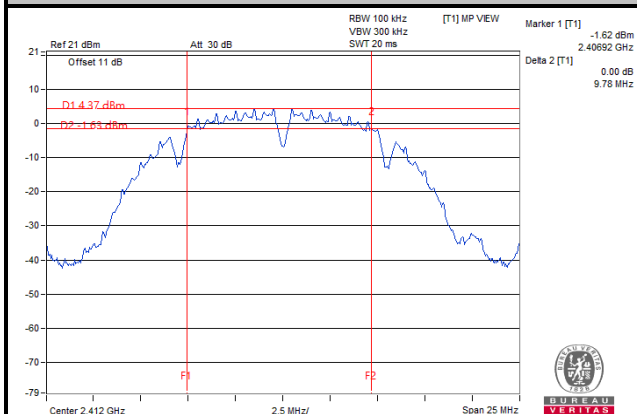

802.11g

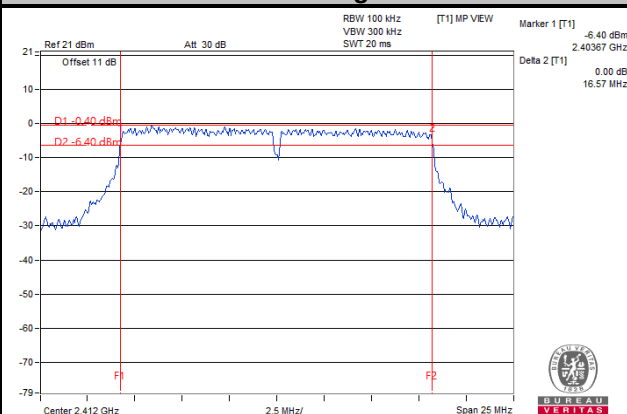


802.11n (HT20)

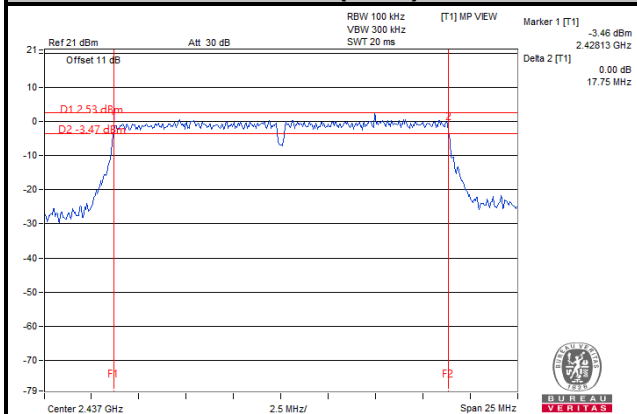

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	13.65	Pass
6	2437	13.68	Pass
11	2462	13.68	Pass

802.11g


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	17.04	Pass
6	2437	17.04	Pass
11	2462	16.92	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	18.00	Pass
6	2437	18.12	Pass
11	2462	18.00	Pass

Spectrum Plot of Worst Value


802.11b

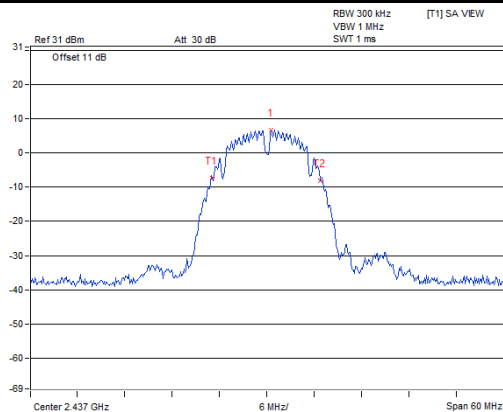

802.11g

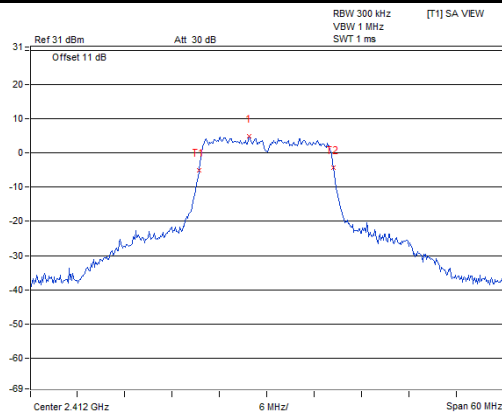

802.11n (HT20)

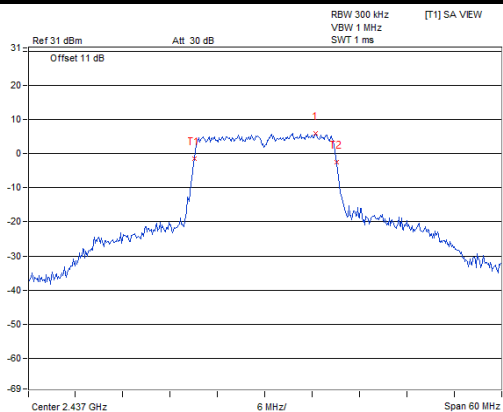

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20 MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	41.115	16.14	30	Pass
6	2437	41.976	16.23	30	Pass
11	2462	40.738	16.10	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	28.119	14.49	30	Pass
6	2437	43.451	16.38	30	Pass
11	2462	23.121	13.64	30	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	20.137	13.04	30	Pass
6	2437	46.132	16.64	30	Pass
11	2462	13.868	11.42	30	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

For 802.11g, 802.11n (HT20)

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set VBW $\geq 3 \times \text{RBW}$.
- e. Detector = power averaging (RMS) or sample detector (when RMS not available).
- f. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g. Sweep time = auto couple.
- h. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-17.88	8	Pass
6	2437	-18.16	8	Pass
11	2462	-17.80	8	Pass

802.11g


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-22.56	8	Pass
6	2437	-20.68	8	Pass
11	2462	-22.68	8	Pass

802.11n (HT20)


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-24.11	8	Pass
6	2437	-21.64	8	Pass
11	2462	-26.10	8	Pass

Spectrum Plot of Worst Value


802.11b

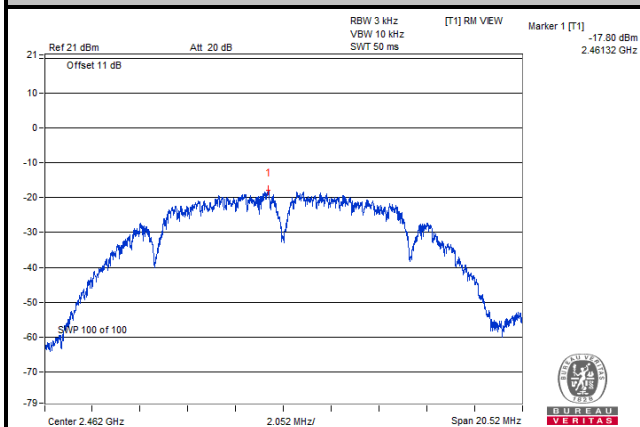

802.11g

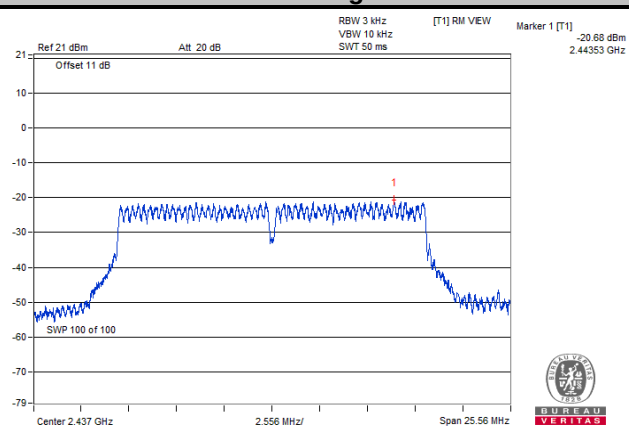

802.11n (HT20)

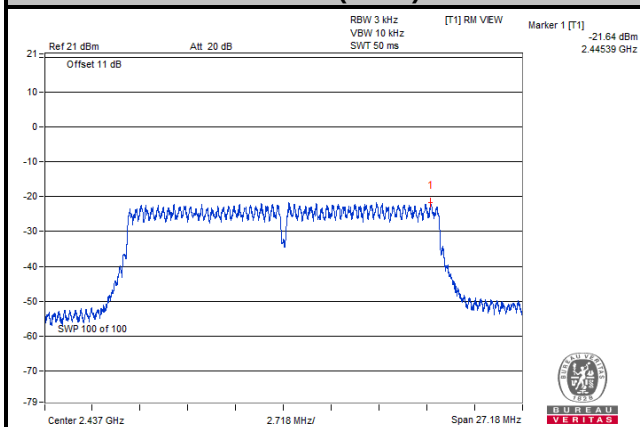


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.


4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 30 dB offset below D1. It shows compliance with the requirement.

802.11b


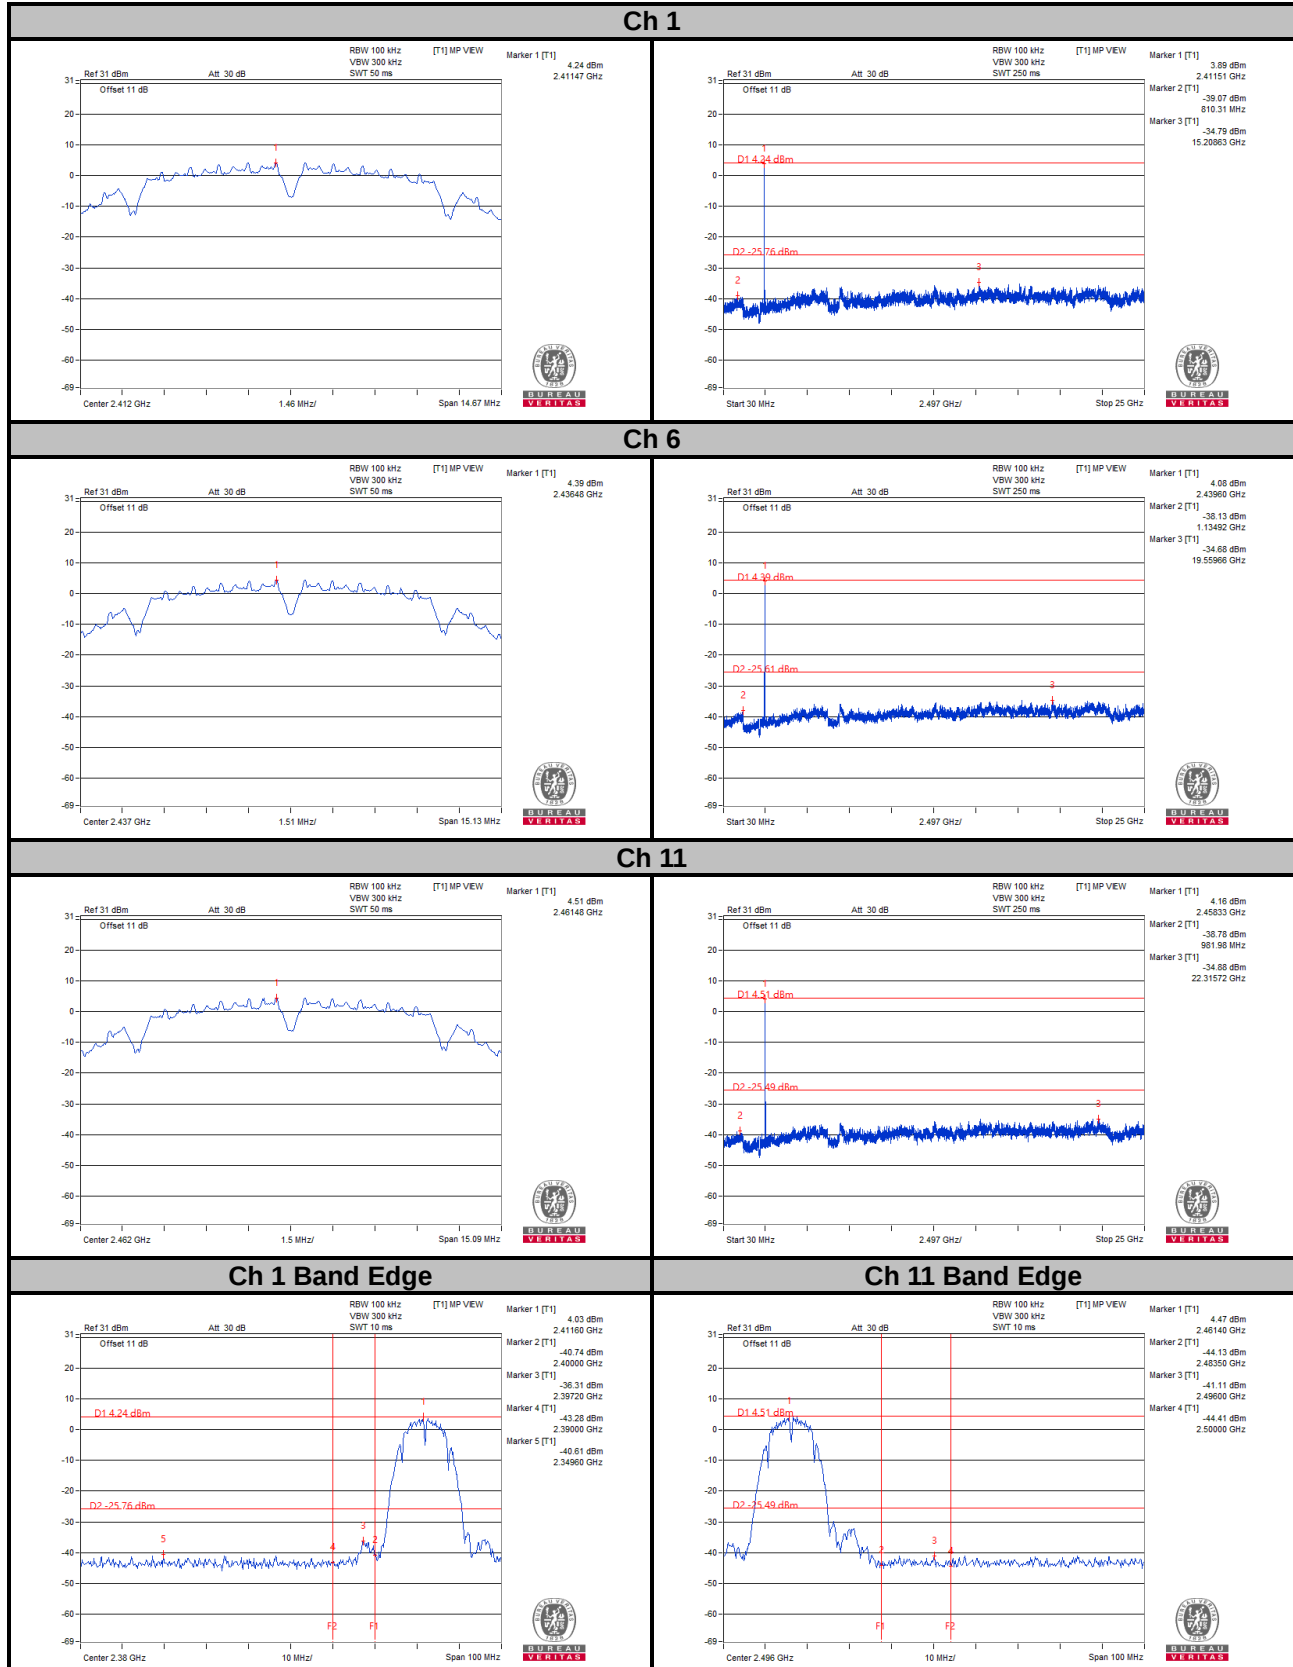


802.11g



Ch 1

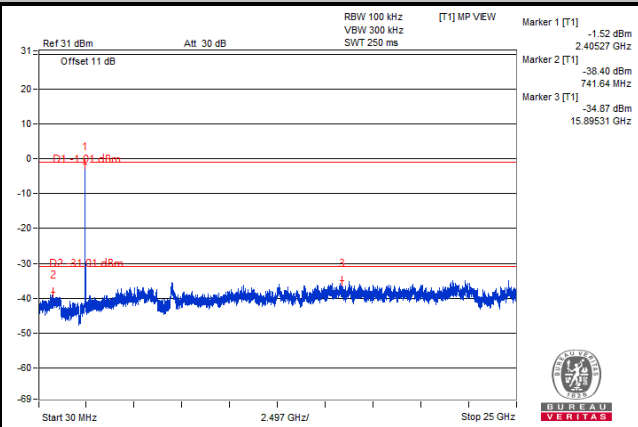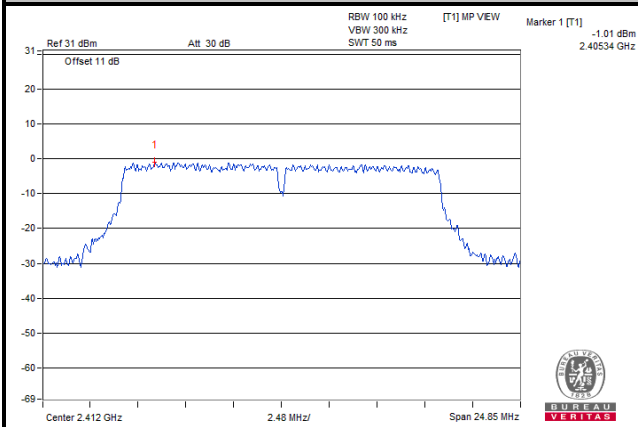

Ch 6

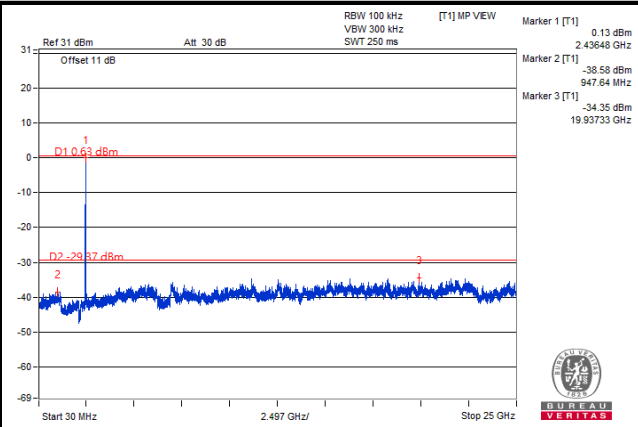
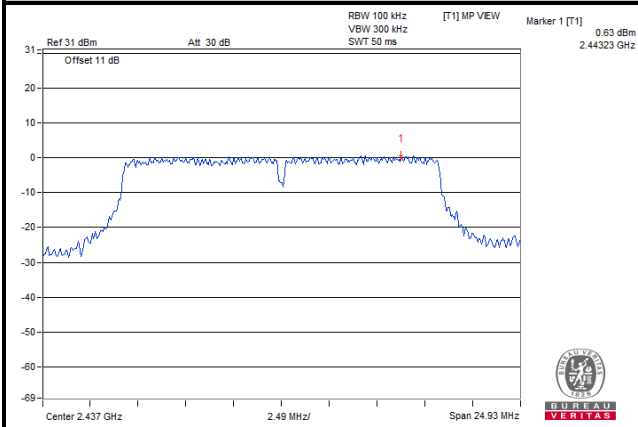


Ch 11

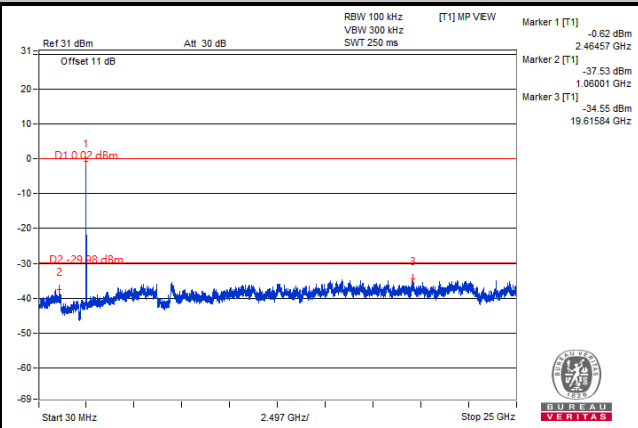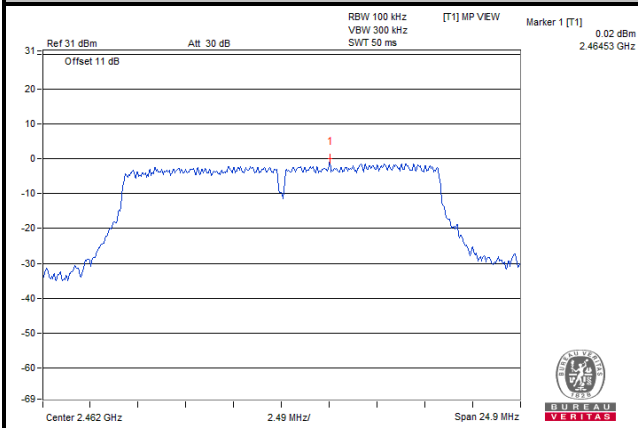



Ch 1 Band Edge

Ch 11 Band Edge

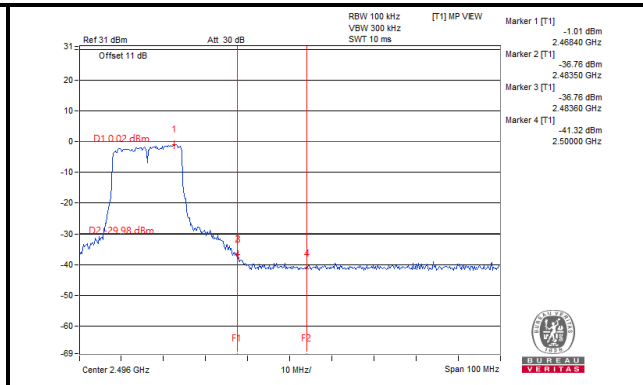
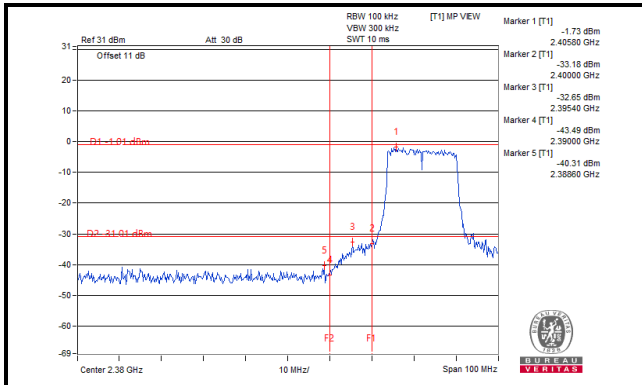


802.11n (HT20)



Ch 1

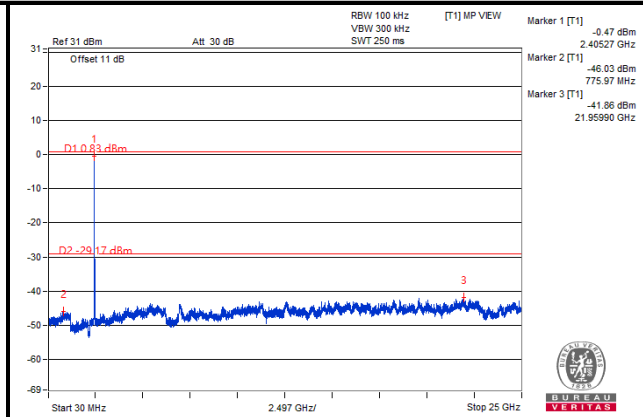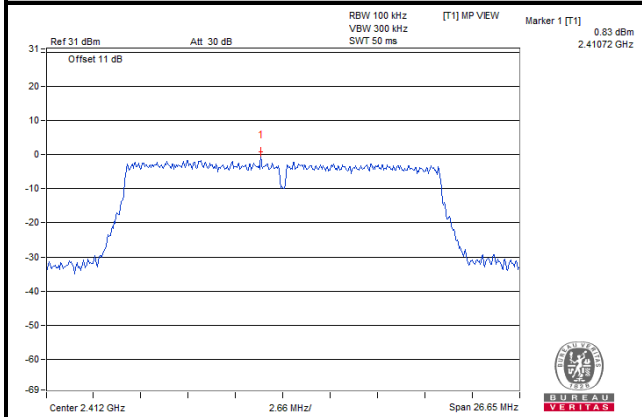

Ch 6

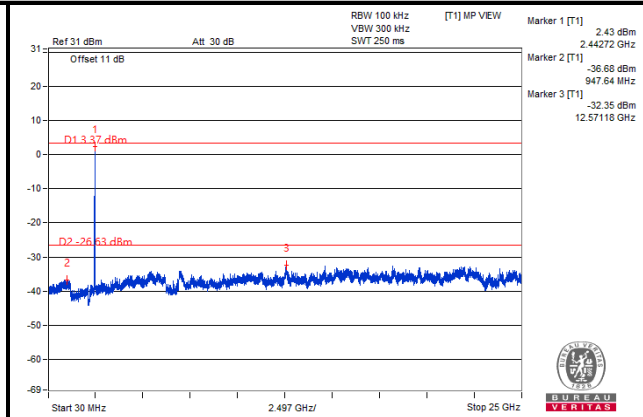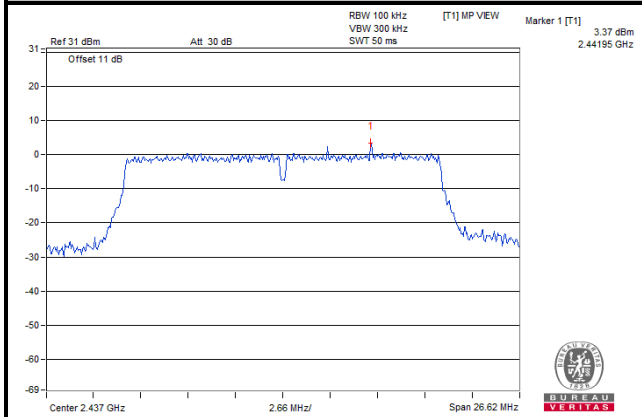


Ch 11

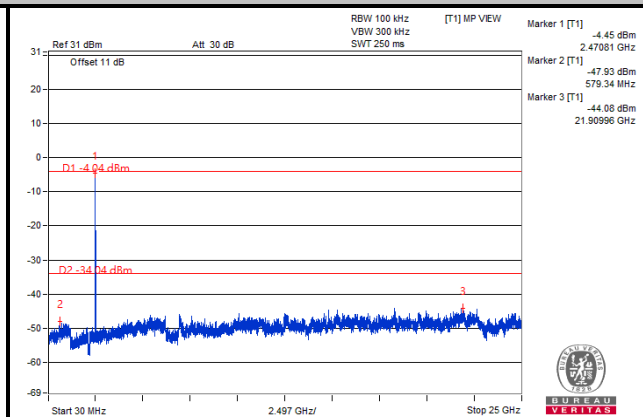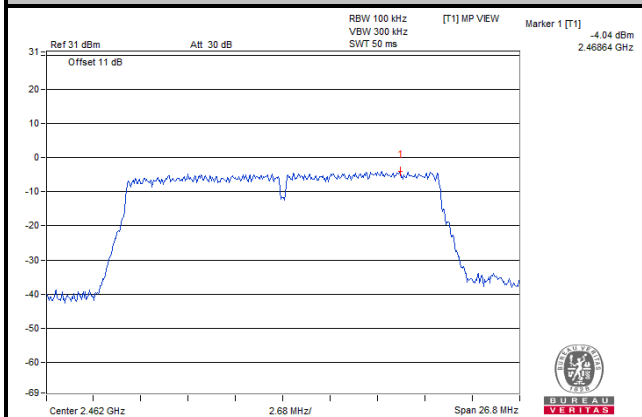

Ch 1 Band Edge

Ch 11 Band Edge

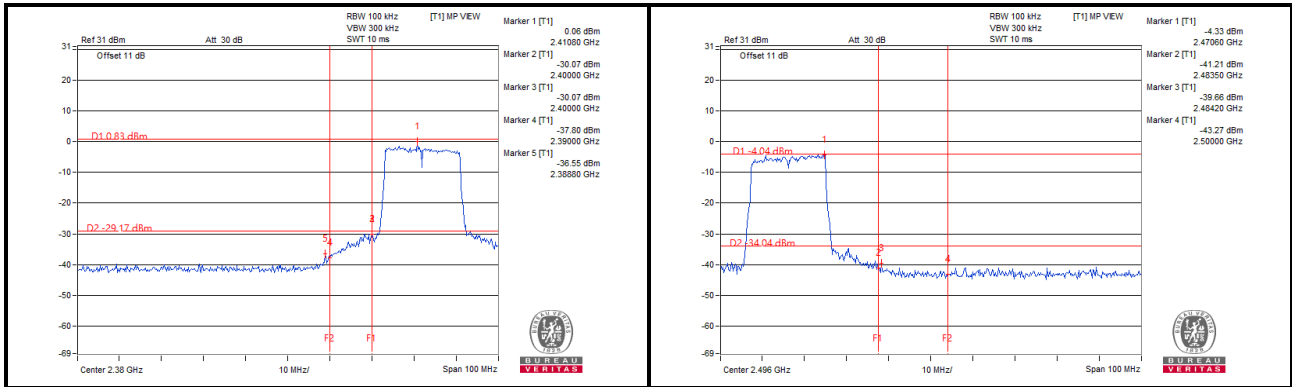


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement

Mode A


802.11b

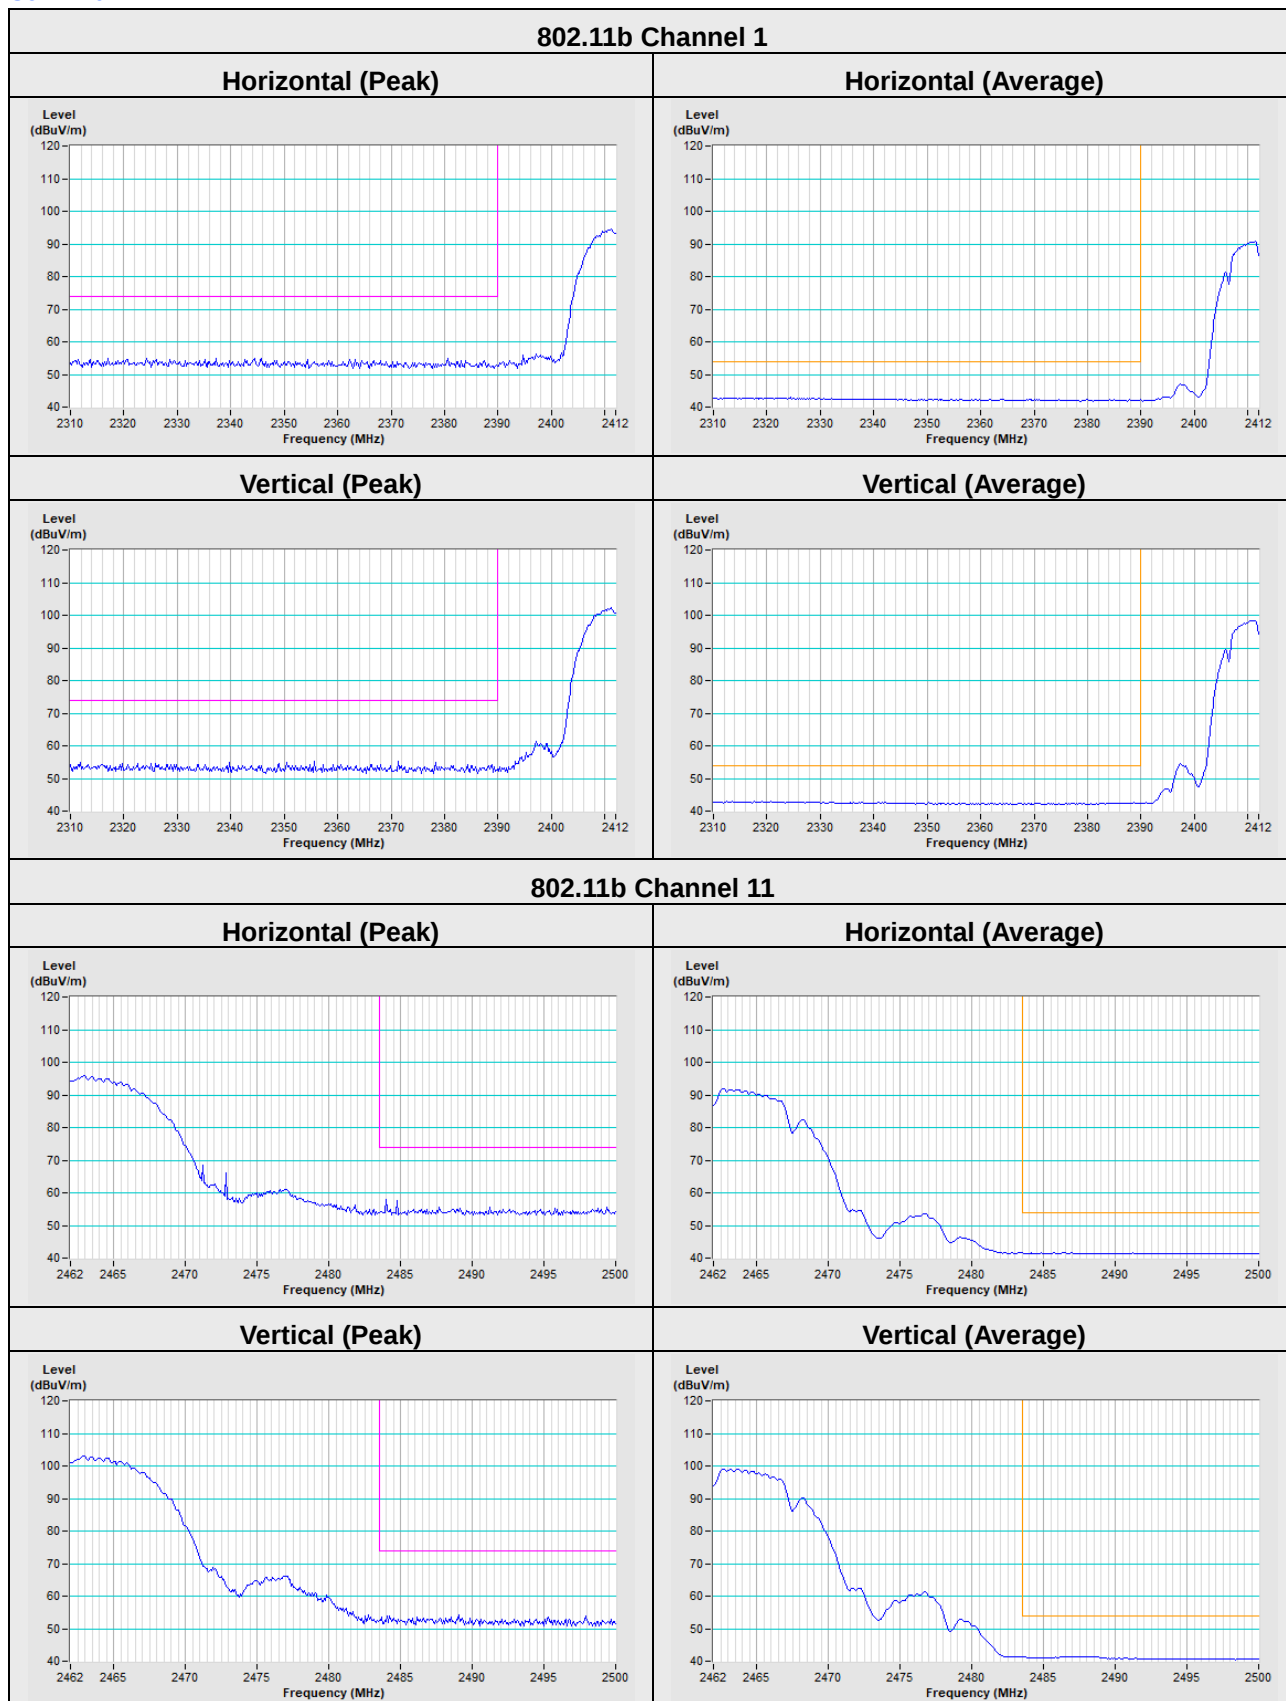


802.11g

802.11g Channel 1


Horizontal (Peak)

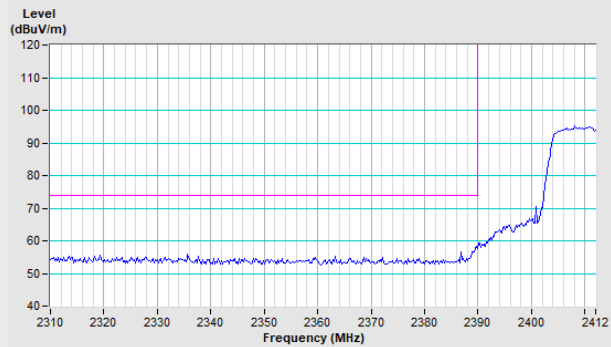


Horizontal (Average)

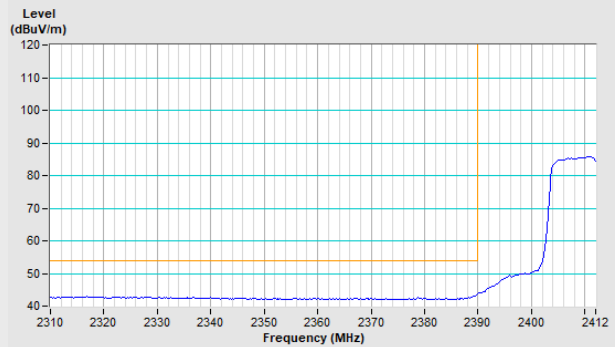

Vertical (Peak)

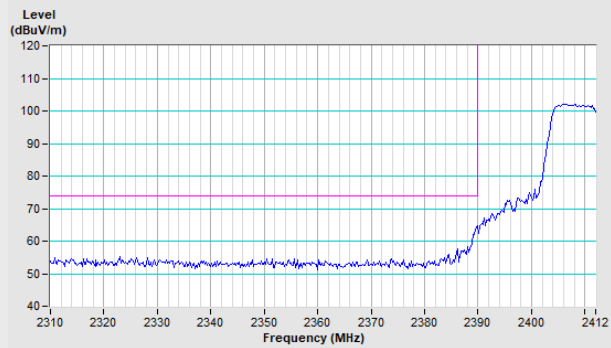


Vertical (Average)

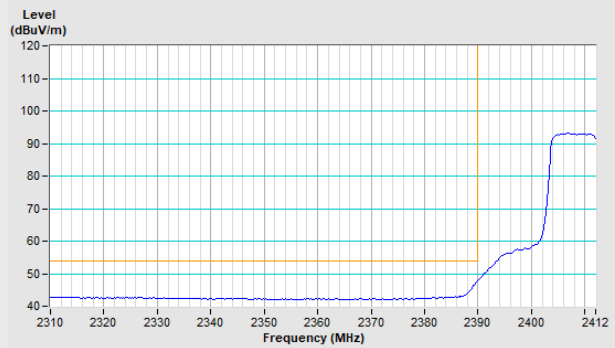


802.11g Channel 11


Horizontal (Peak)

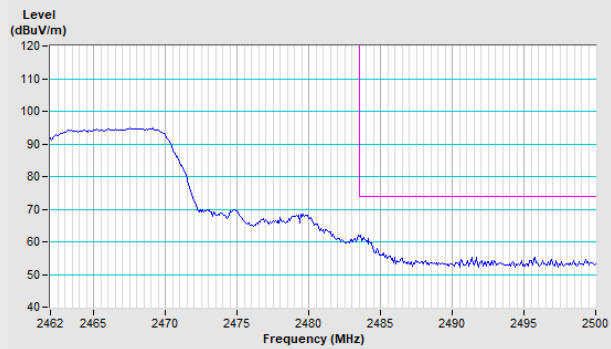


Horizontal (Average)

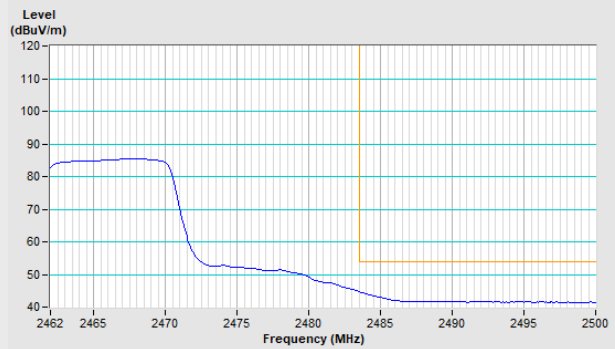

Vertical (Peak)

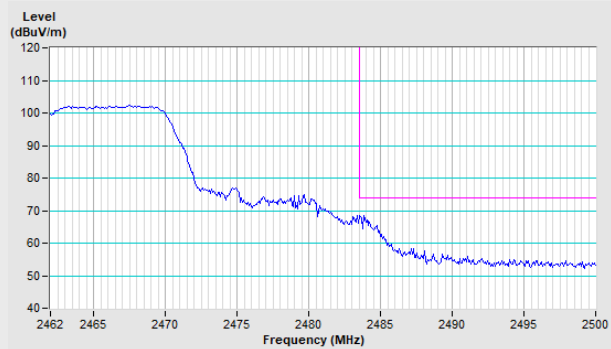


Vertical (Average)

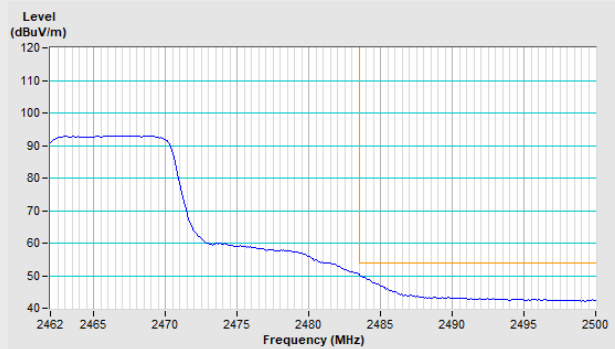


802.11n (HT20)

802.11n (HT20) Channel 1


Horizontal (Peak)

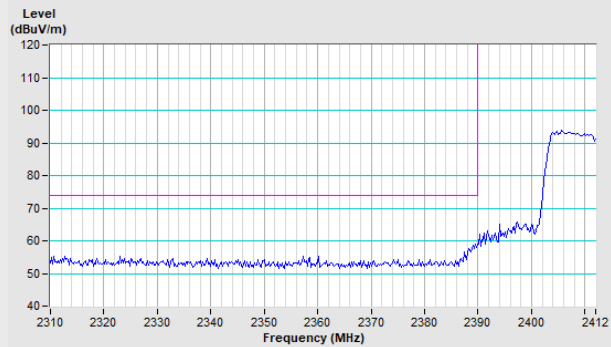


Horizontal (Average)

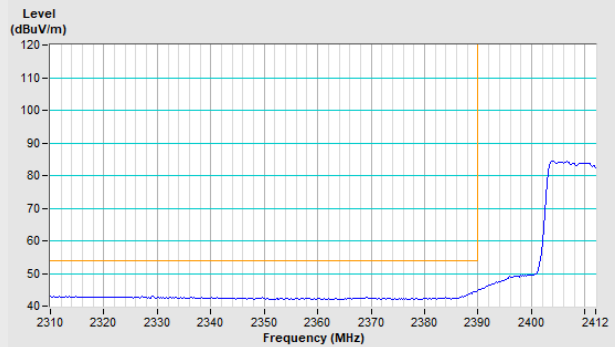

Vertical (Peak)

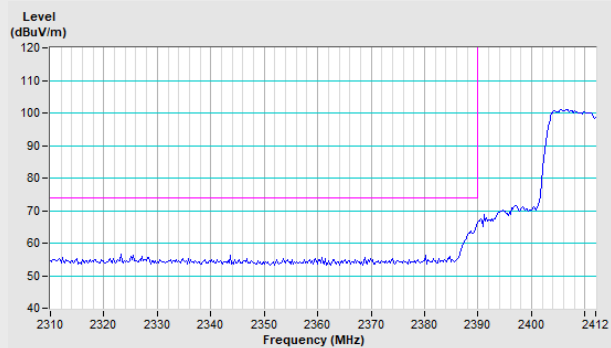


Vertical (Average)

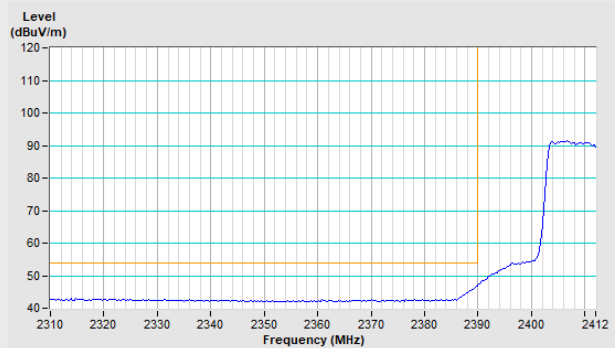


802.11n (HT20) Channel 11


Horizontal (Peak)

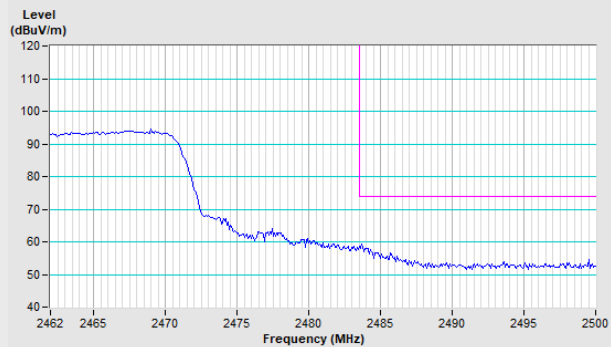


Horizontal (Average)

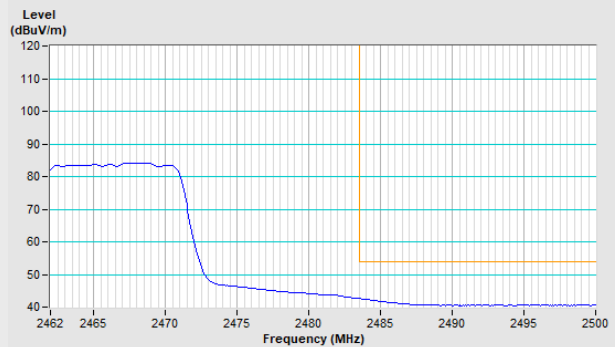


Vertical (Peak)

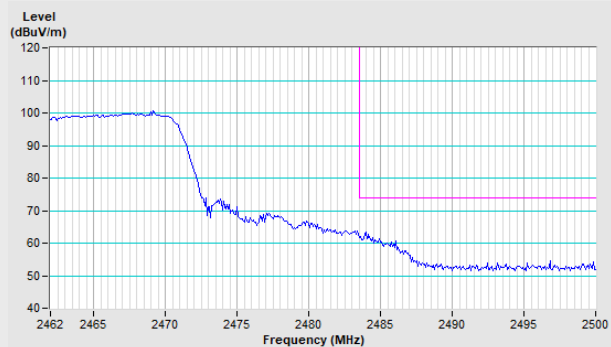

Vertical (Average)

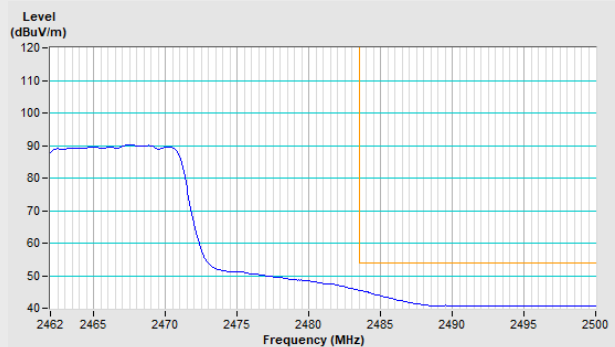


Mode B
802.11b

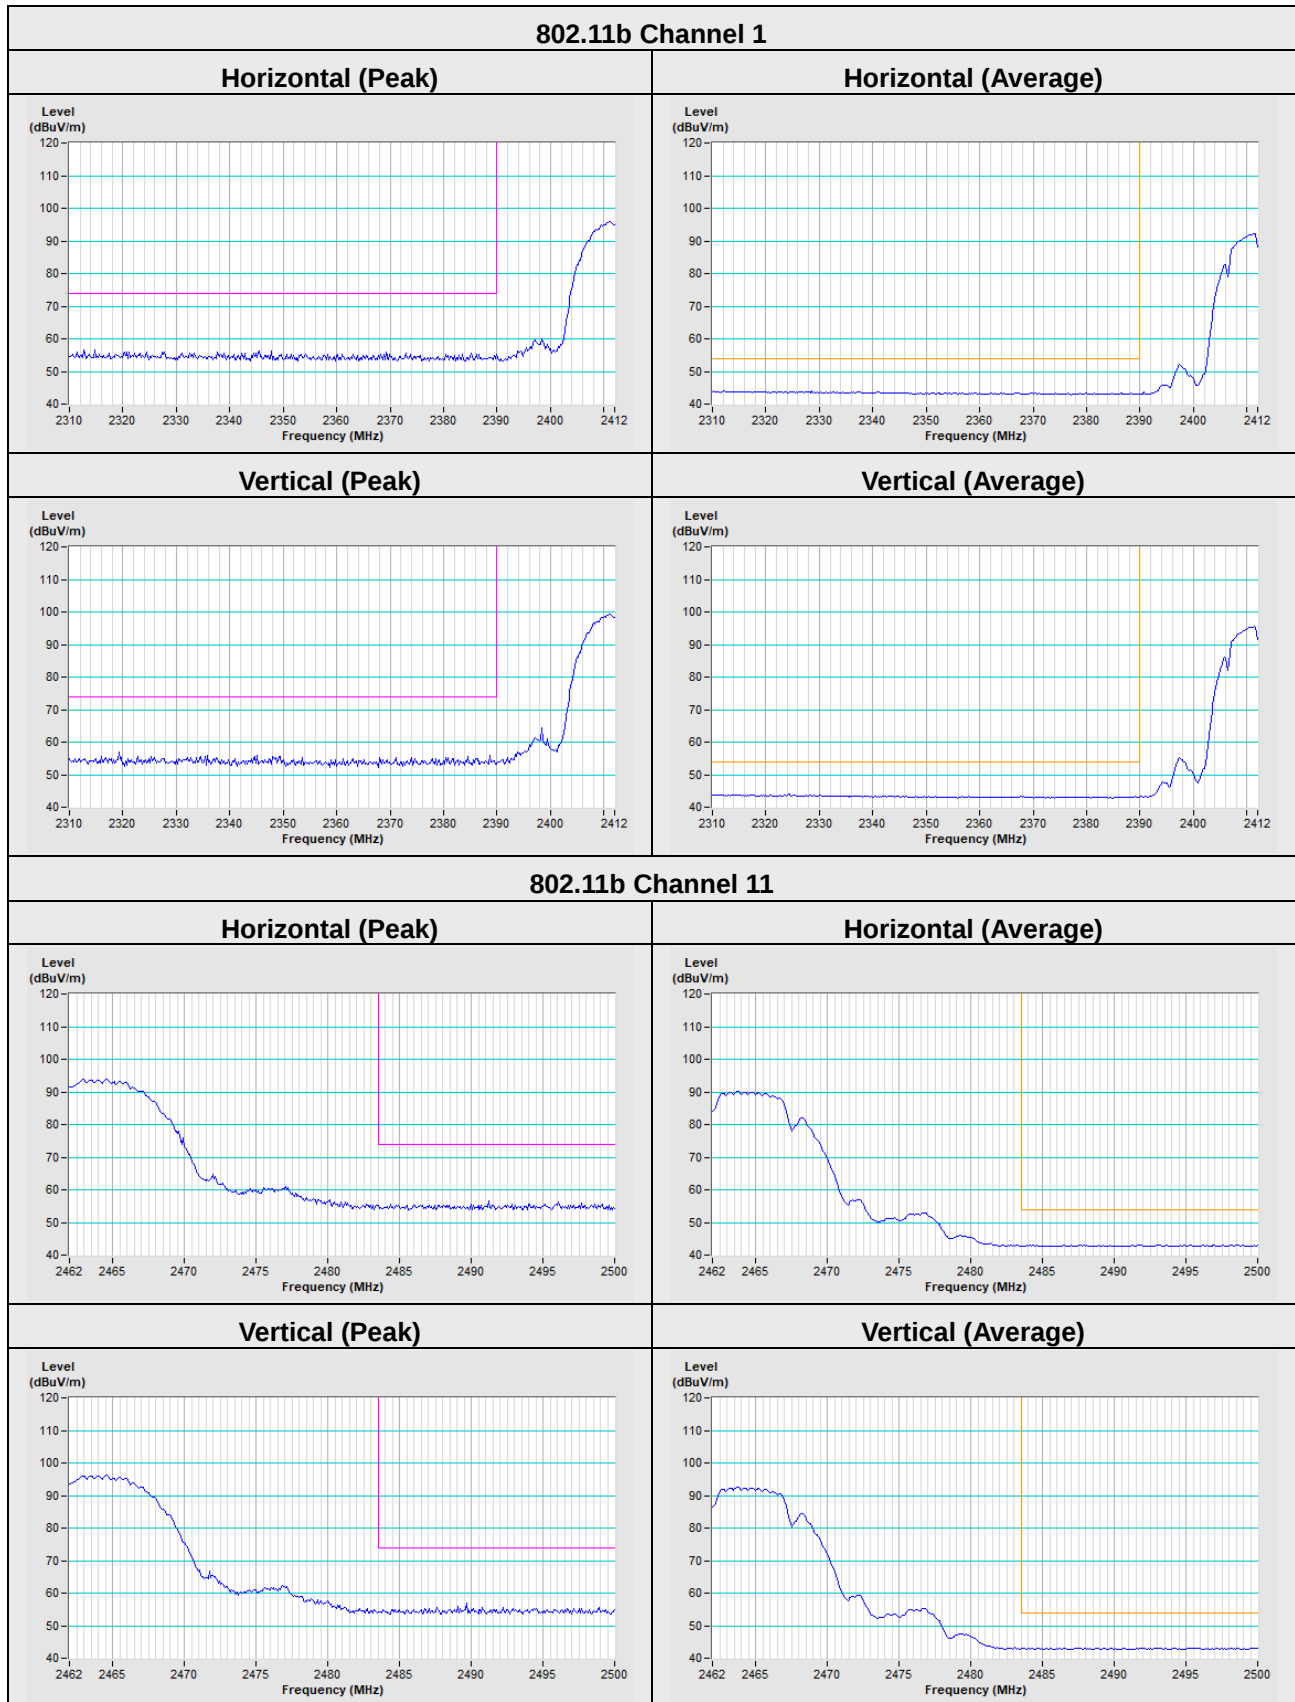


802.11g

802.11g Channel 1


Horizontal (Peak)

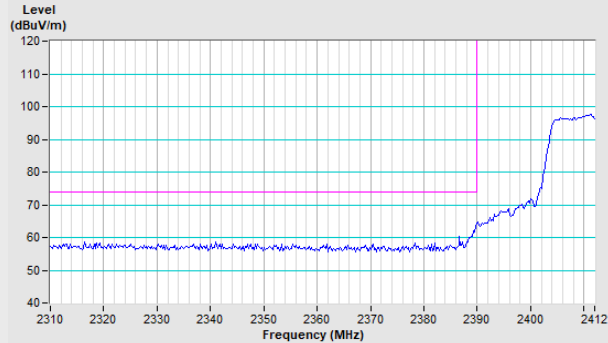


Horizontal (Average)

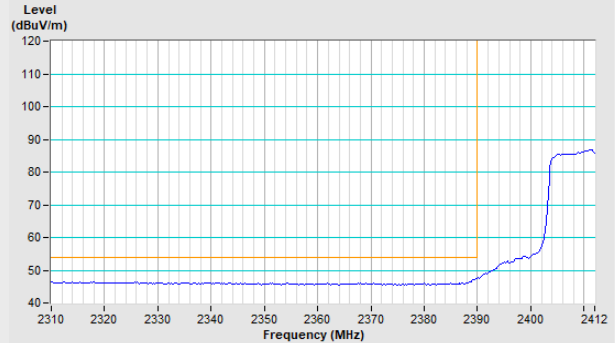

Vertical (Peak)

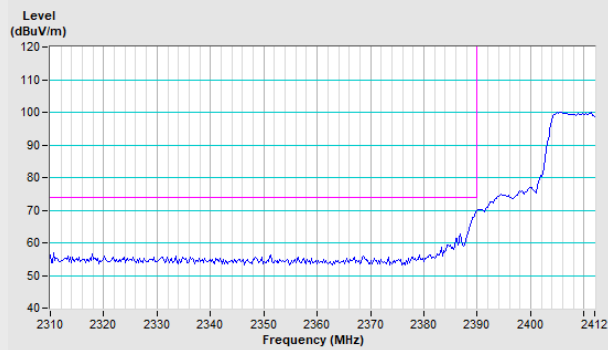


Vertical (Average)

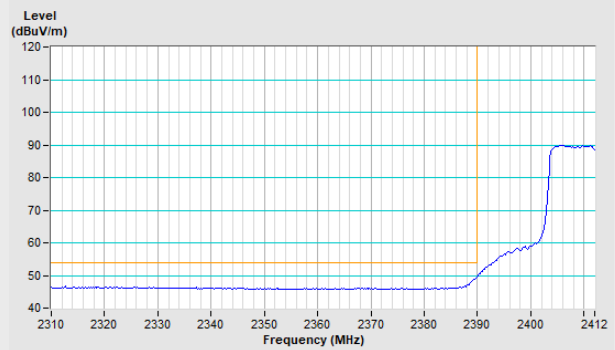


802.11g Channel 11


Horizontal (Peak)

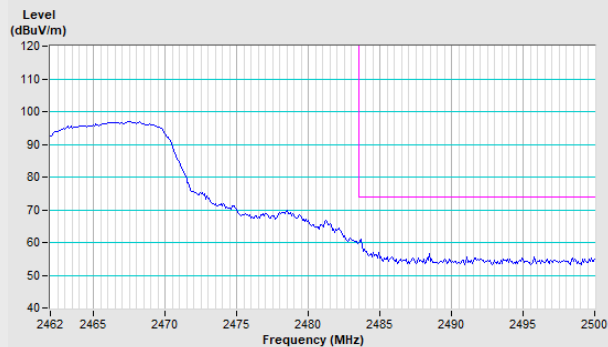


Horizontal (Average)

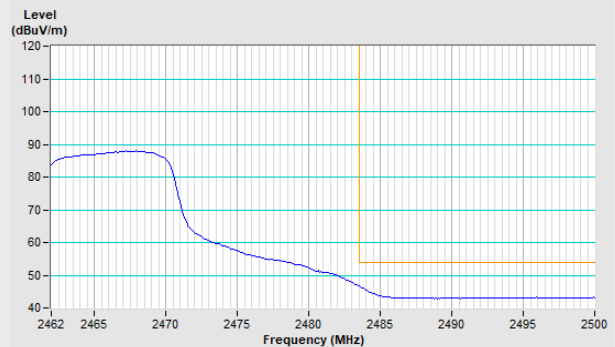

Vertical (Peak)

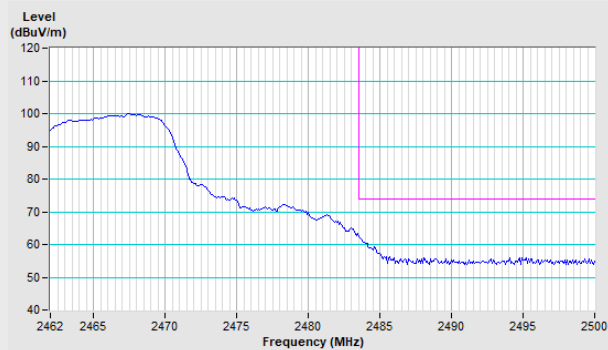


Vertical (Average)

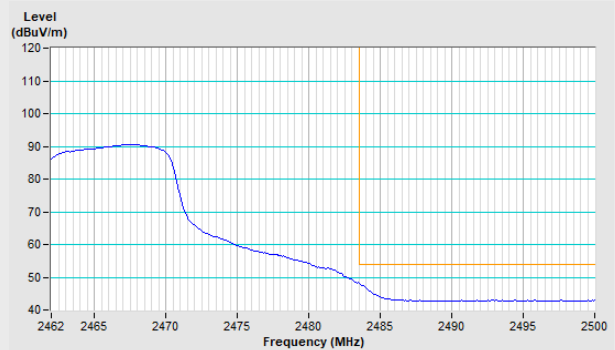


802.11n (HT20)

802.11n (HT20) Channel 1


Horizontal (Peak)

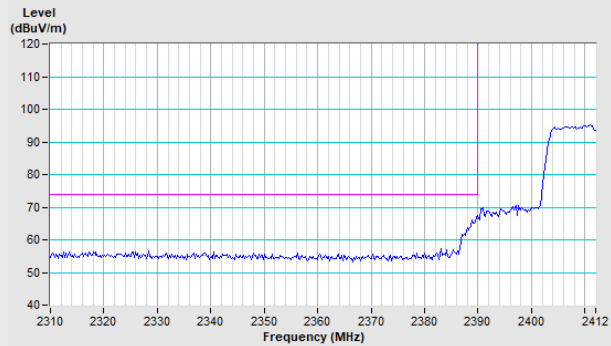


Horizontal (Average)

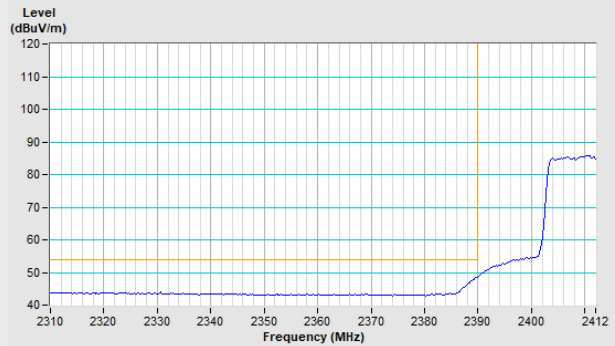

Vertical (Peak)

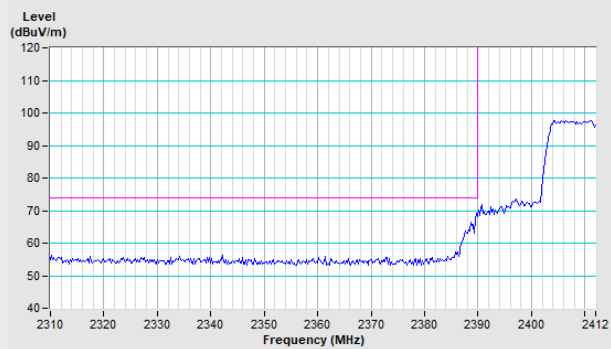


Vertical (Average)

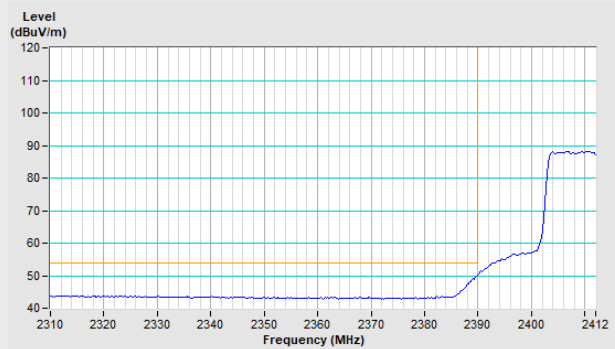


802.11n (HT20) Channel 11


Horizontal (Peak)

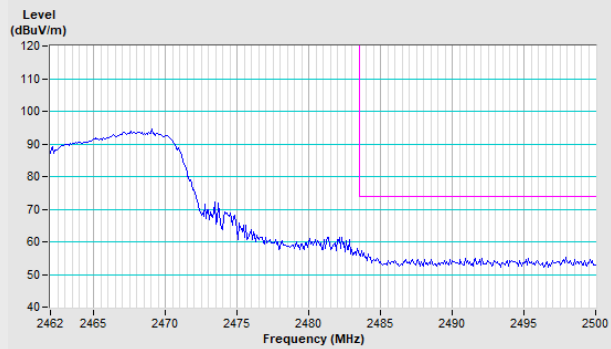


Horizontal (Average)

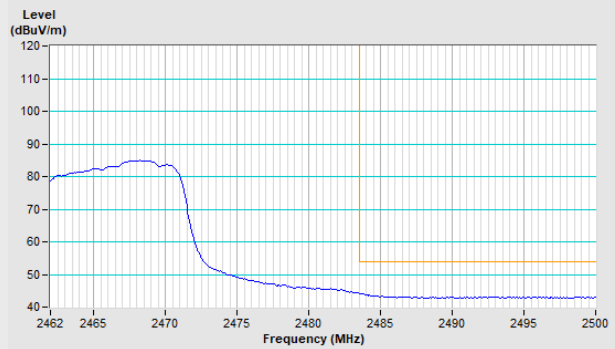

Vertical (Peak)

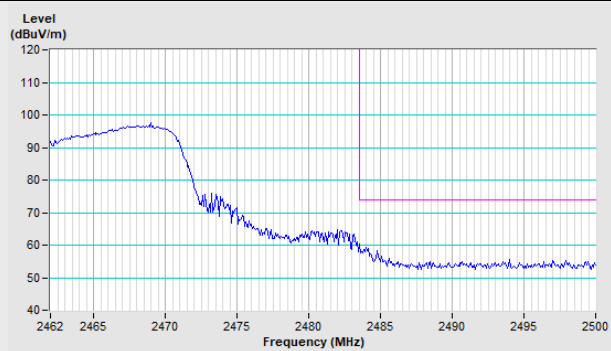

Vertical (Average)

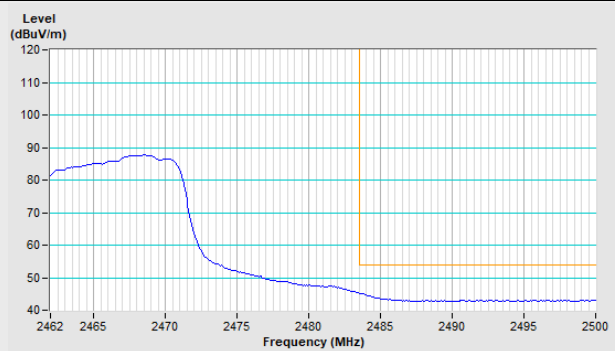

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---