

# **Prism Mesh Router**

---

## **User Guide v1.1**

## Copyright

© 2021 BROWAN COMMUNICATIONS.

This USER GUIDE is copyrighted with all rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without the written permission of BROWAN.

## Notice

BROWAN reserves the right to change specifications without prior notice.

While the information in this document has been compiled with great care, it may not be deemed an assurance of product characteristics. BROWAN shall be liable only to the degree specified in the terms of sale and delivery.

The reproduction and distribution of the documentation and software supplied with this product and the use of its contents is subject to written authorization from BROWAN.

## Trademarks

The product described in this book is a licensed product of BROWAN.

Microsoft, Windows 95, Windows 98, Windows Millennium, Windows NT, Windows 2000, Windows XP, Windows 7, Windows 10, and MS-DOS are registered trademarks of the Microsoft Corporation.

MacOS is a registered trademark of Apple Computer, Inc.

Wi-Fi is a registered trademark of Wi-Fi Alliance.

All other brand and product names are trademarks or registered trademarks of their respective holders.

# Contents

Copyright.....	1
Notice.....	1
Trademarks.....	1
<b>CONTENTS.....</b>	<b>2</b>
<b>ABOUT THIS GUIDE.....</b>	<b>4</b>
Purpose.....	4
Prerequisite Skills and Knowledge.....	4
Conventions Used in this Document.....	4
<b>CHAPTER 1 – INTRODUCTION.....</b>	<b>5</b>
Configuration.....	5
<b>CHAPTER 2 – WEB MENU.....</b>	<b>7</b>
Web Interface.....	7
<b>CHAPTER 3 - DASHBOARD.....</b>	<b>9</b>
Dashboard > Site.....	9
Dashboard > Network.....	10
Dashboard > Interfaces.....	11
Dashboard > Clients.....	12
Dashboard > Activity.....	13
<b>CHAPTER 4 - MESH.....</b>	<b>14</b>
Mesh > Mesh Wizard.....	15
Mesh > Mesh Wizard (Create a CAP).....	15
Mesh > Mesh Wizard (Add a RE).....	17
Mesh > Mesh Information.....	18
Mesh > Mesh Information.....	19
Settings > Wireless > Networks.....	19
<b>CHAPTER 5 - DPI.....</b>	<b>24</b>
DPI > DPI graphs.....	24
<b>CHAPTER 6 - SETTINGS.....</b>	<b>25</b>
Settings > Network > Zones.....	25
Settings > Network > Ethernet.....	26
Settings > Network > Static routes.....	27
Settings > Wireless > Networks.....	27
Settings > Wireless > Radios.....	29
Settings > Services.....	31
Settings > Services > Web.....	31
Settings > Services > SSH.....	31
Settings > Services > Telnet.....	32
Settings > Services > NTP.....	32
Settings > Services > Device discovery.....	32
Settings > Services > SNMP.....	33
Settings > Services > SNMP Traps.....	33
Settings > Services > Remote syslog.....	33
Settings > Services > Ping Watchdog.....	33
Settings > Services > DPI.....	34
Settings > System.....	34

Settings > Users.....	35
<b>CHAPTER 7 - TOOLS.....</b>	<b>36</b>
Tools > Site survey.....	36
Tools > Ping.....	36
Tools > Traceroute.....	37
Tools > View log.....	37
Tools > Device discovery.....	37
Tools > Speedtest.....	38
<b>CHAPTER 8 - APPENDIX.....</b>	<b>39</b>
I/O Description, Wall Mount, and Basic Installation of MO10.....	39
I/O Description, Wall Mount, and Basic Installation of MI10.....	41
FCC/IC Statement.....	43

## About this Guide

### Purpose

This document provides information of web configuration of the Prism Mesh Access Points:

- MI10
- MO10

### Prerequisite Skills and Knowledge

To use this document effectively, you should have a working knowledge of Local Area Networking (LAN) concepts and wireless Internet access infrastructures. In addition, you should be familiar with the following:

- Hardware installers should have a working knowledge of basic electronics and mechanical assembly, and should understand related local building codes.
- Device administrators should have a solid understanding of device management, network operations and troubleshooting knowledge.
- 

### Conventions Used in this Document

The following typographic conventions and symbols are used throughout this document:

	Very important information. Failure to observe this may result in damage.
	Important information that should be observed.
	Additional information that may be helpful but which is not required.
<b>bold</b>	Menu commands, buttons and input fields are displayed in bold
code	File names, directory names, form names, and system-generated output such as error messages are displayed in constant-width type
<value>	Placeholder for certain values, e.g. user inputs
[value]	Input field format, limitations, and/or restrictions.

# Chapter 1 – Introduction

Thank you for choosing the Prism Mesh Access Point product.

The Prism Mesh Access Point product features 2.4GHz+5GHz 2x2 and 5GHz 4x4 tri-band with a superior connectivity capability across large-range density deployments such as office spaces, training and meeting facilities, shopping mall and hotel.

By utilizing AX6600 data rate, Prism Mesh Access Point product handles multiple clients on each channel, regardless of device or traffic type, delivers very high speed and reliable wireless connection in both outdoor and indoor environments.

## Configuration

Access and configure the access point by executing web browser and enter IP address. The default IP address is:

MO10 IP 192.168.1.1 subnet 255.255.255.0 on WAN port

MI10 IP 192.168.2.1 subnet 255.255.255.0 on LAN port

IP 192.168.1.1 subnet 255.255.255.0 on WAN port

**Step 1** Configure your PC with a static IP address on the 192.168.1.x subnet with mask 255.255.255.0. Connect the Access Point into the same physical network as your PC. Open the Web browser and type the default IP address.




Please refer to quick installation guide for hardware installation and physical Ethernet port connection on each model.

**Step 2** Enter the administrator login details to access the Web management.



The default administrator settings for web interfaces are:  
Username: **prism**  
Password: **prism**

Click Log In to proceed:

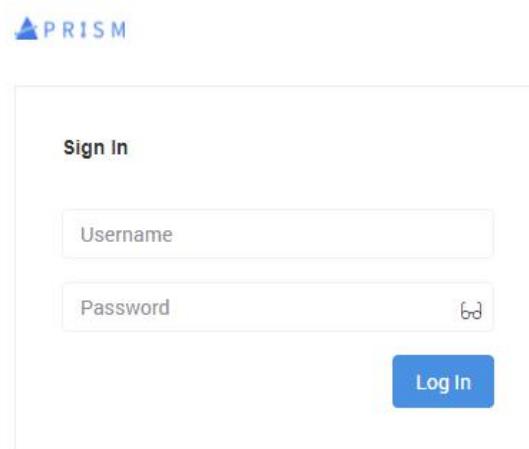

You can choose to click Skip or enter a new password then click Save to proceed:



**Update your credentials**

For security reasons we suggest you to update your username and password

prism

Password

Repeat Password

Skip

Save

The form is a modal window titled "Update your credentials". It contains three input fields: "prism" (username), "Password" (current password), and "Repeat Password" (new password). Below the fields are two buttons: "Skip" (gray) and "Save" (blue).

## Chapter 2 – Web Menu

This chapter describes the configuration menu page of the Prism Mesh Access Point which works in AP mode, Station mode or Mesh mode by using the Web Interface configuration.




The default configuration is AP mode.

The **main menu** consists of the following sub menus:

- **Dashboard** – to show current status
- **Mesh** – to perform Mesh Wizard and show mesh connection information
- **DPI** – to detect and show user's traffic and application information
- **Settings** – to configure the access point
- **Tools** – built-in tools that help to debug the connection

## Web Interface

The dashboard page is displayed after successfully logging into the system (see the figure below). From this menu all essential configuration pages are accessible.

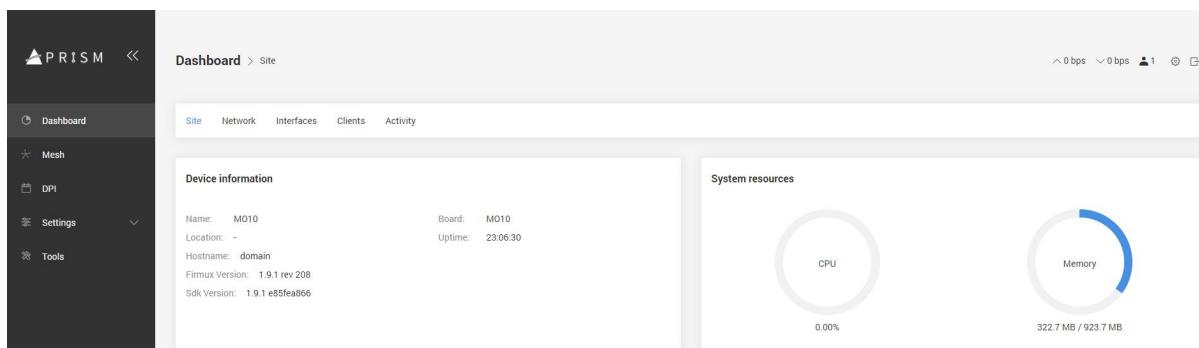

The **web management** has the following structure:

### Dashboard

- Site** – show the status related with the whole device
- Network** – show the status of the network
- Interfaces** – show the status of each interface, including Ethernet and radios
- Client** – show the status of client (users) information
- Activity** – show the event log related to the access point

### Mesh

- Mesh Wizard** – perform mesh configuration
- Mesh Information** – show the status of the mesh interface, including CAP and RE
- Topology** – show the topology of mesh connection

## DPI



**DPI graphs** – show user's traffic and application information

## Settings

- Network** – specify the network parameters
- Wireless** – specify the settings of Wi-Fi radios
- Services** – specify management's interfaces
- System** – configure basic access point's information
- Users** – manage the login credentials

## Tools

- Site Survey** – perform site survey on specific radio and show results
- Ping** – perform ping to specific address and show results
- Traceroute** – perform traceroute to specific address and show results
- View log** – show detailed syslog
- Device discovery** – perform and show discovered device
- Speedtest** – perform Speedtest and show results

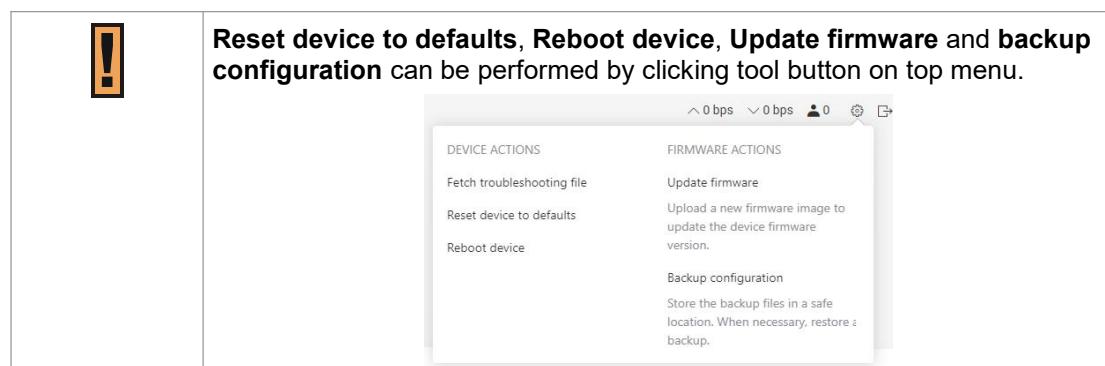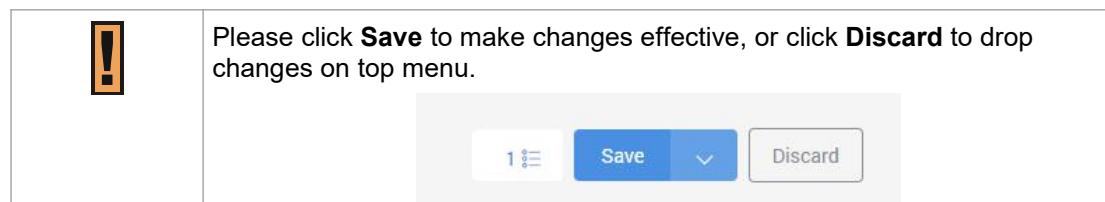


# Chapter 3 - Dashboard

This chapter describes the dashboard page of the Prism Mesh Access Point.

## Dashboard > Site

The **Site** page shows important information of system and network status.

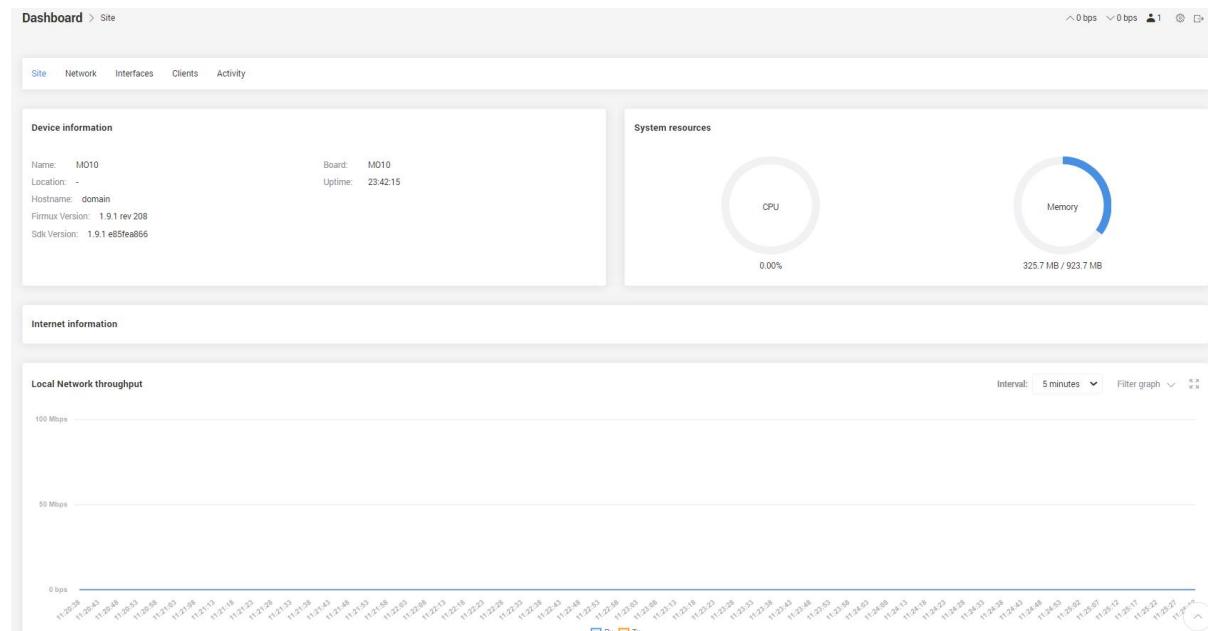


**Device information** – display the access point's basic information

**System resources** – display the system utilization

**Local Network throughput** – show the network throughput in 5 mins, 2 hours, day, week or year

## Dashboard > Network

The **Network** page shows the status of the network

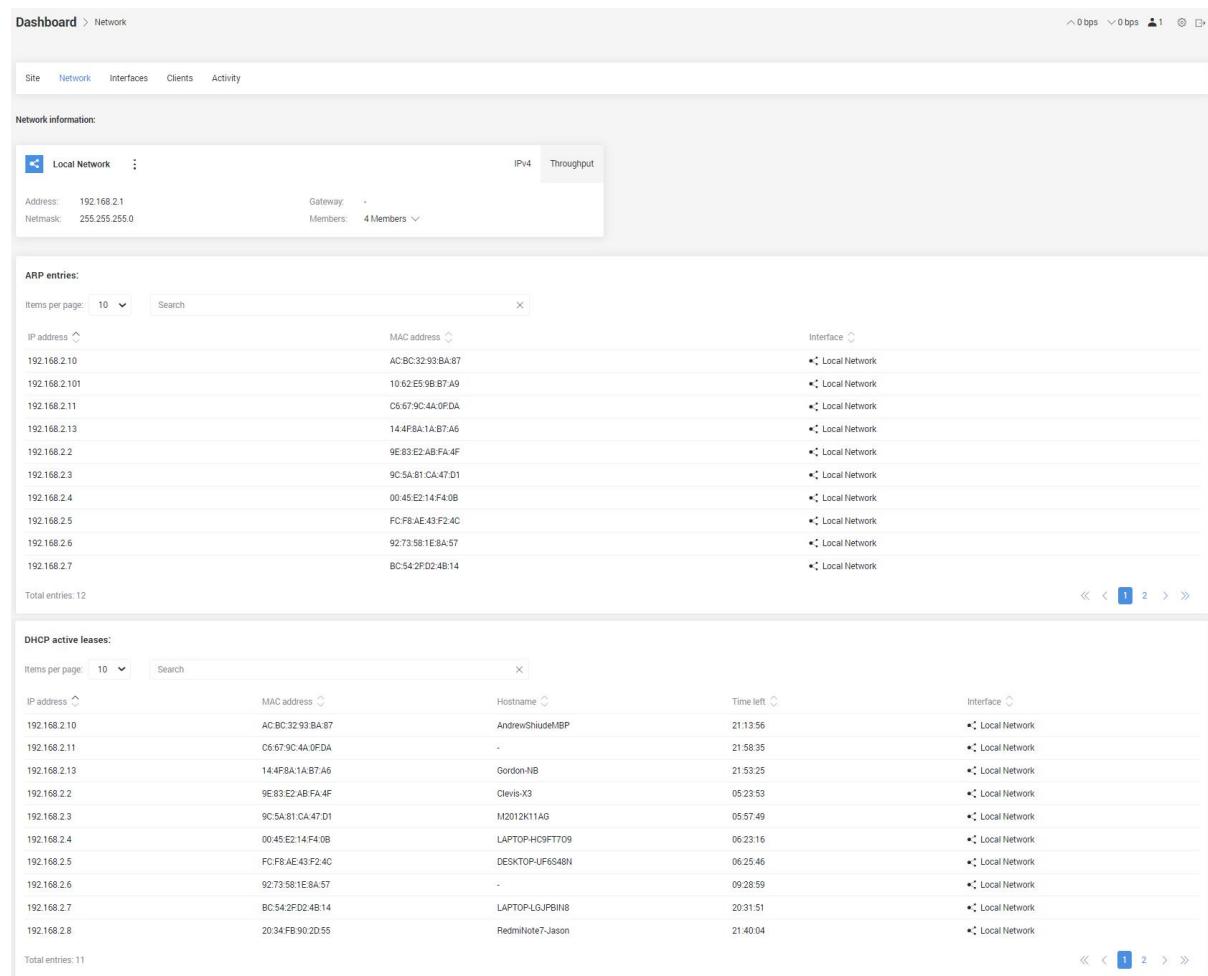

The screenshot shows the Prism Network dashboard with the following sections:

- Network information:** Shows the local network address (192.168.2.1), gateway (10.62.15.98), and members (4 Members).
- ARP entries:** A table listing ARP entries with columns for IP address, MAC address, and Interface. The table includes 12 entries.
- DHCP active leases:** A table listing DHCP active leases with columns for IP address, MAC address, Hostname, Time left, and Interface. The table includes 11 entries.

**Local Network** – display the IP information of network interface of the access point

**ARP entries** – show all IP and MAC information of the whole network

**DHCP active leases** – show DHCP active lease time

## Dashboard > Interfaces

The **Interfaces** page shows the status of each interface, including Ethernet and radios.

**Ethernet ports:**

Ethernet Port	MAC	Link	Speed	Bytes Tx	Bytes Rx
Ethernet 0	BA:EF:43:0D:4B:65	No	-	0 B	0 B
Ethernet 1	76:59:D6:27:3A:6E	No	-	0 B	0 B
Ethernet 2	46:29:AE:08:E7:B9	Yes	100 Mbps Full Duplex	8.3 GB	58.5 GB

**Wireless radios:**

Radio	Channel	Clients	TxPower	Mode	Security
5 GHz Radio (IPQ6018)	144 (5720 MHz), 80 MHz	0	10 dBm	Access point	WPA2-PSK (TKIP/AES)
2.4 GHz Radio (IPQ6018)	6 (2437 MHz), 40+ MHz	0	10 dBm	Access point	WPA2-PSK (TKIP/AES)
5 GHz Radio (QCN9024)	100 (5500 MHz), 160 MHz	0	10 dBm	Access point	WPA2-PSK (TKIP/AES)

**Ethernet Ports** – display the status of each Ethernet port

	<p>For MI10, there are three Ethernet ports:</p> <ul style="list-style-type: none"> <li>- Ethernet 0 (LAN2)</li> <li>- Ethernet 1 (LAN1)</li> <li>- Ethernet 2 (WAN)</li> </ul> <p>For MO10, there is only one Ethernet port:</p> <ul style="list-style-type: none"> <li>- Ethernet 0 (water-proof Ethernet port)</li> </ul>
--	--

**Wireless Radios** – display the status of each radio, including channel, bandwidth, Tx power, connected clients (users) and SSID information

	Please follow country-specific regulation.
--	--

## Dashboard > Clients

The **Clients** page shows the status of connected clients (wireless users) information.

**23 wireless clients**

MAC	Radio	SSID	Security	Uptime	Signal
00:48:E2:14:F4:08	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	01:08:58	-68.65,-64.62 dBm
08:69:42:76:FF:58	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	2 days 3 hours	-95.05 dBm
0A:21:54:07:8E:52	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	1 days 23 hours	-69.66,-65.00 dBm
0C:54:15:86:09:09	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	2 days 4 hours	-77.77,-74.72 dBm
0C:7A:15:07:82:48	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	03:01:49	-68.62,-62.49 dBm
14:4F:8A:14:B7:48	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	01:07:36	-64.65,-61.70 dBm
16:6E:A2:33:91:81	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	00:07:54	-69.95,-61.49 dBm
2A:16:38:05:09:3A	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	01:32:48	-74.78,-75.75 dBm
4C:ED:F8:53:28:87	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	17:42:03	-95.05 dBm
60:51:11:00:64:8E	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	00:04:57	-65.05,-65.45 dBm
80:02:1D:02:24:65	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	00:23:03	-95.05 dBm
9C:5A:81:CA:47:D1	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	00:03:02	-65.05,-61.91 dBm
A0:C5:65:AB:99:CE	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	03:55:44	-64.66,-61.47 dBm
AC:9C:92:91:84:87	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	01:14:48	-61.03,-70.43 dBm
B4:8B:86:CA:D6:05	5 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	02:33:55	-95.05 dBm
C4:D0:17:78:89:80	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	18:38:51	-95.05 dBm
C4:D0:17:78:89:FC	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	16:17:10	-95.05 dBm
C4:D0:17:78:8C:58	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	15:41:59	-95.05 dBm
C4:D0:17:78:8C:90	2.4 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	16:28:22	-95.05 dBm
CB:67:9C:4A:0D:0A	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	00:04:56	-95.05,-95.95 dBm
CE:09:48:E2:87:75	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	03:05:50	-63.61,-62.42 dBm
DA:1A:3F:90:F4:48	5 GHz Radio (ID9918)	PrismOffice	WPA2-PSK (TKIP/AES)	21:47:32	-95.05 dBm
FA:EC:89:84:7F:09	5 GHz Radio (ID9924)	PrismOffice	WPA2-PSK (TKIP/AES)	04:03:46	-64.60,-68.53 dBm

**Backhaul**

MAC	Radio	SSID	Security	Uptime	Signal
No data					

**Clients information**

Interval: 2 hours


**Wireless clients** – show the connected clients (wireless users) information, including MAC, Radio, SSID, Security and Uptime

**Backhaul** – show the connected mesh clients information, including MAC, Radio, SSID, Security and Uptime

**Clients information** – show the numbers of connected clients in 2 hours, day, week or year

## Dashboard > Activity

The **Activity** page shows the event log related to the access point.

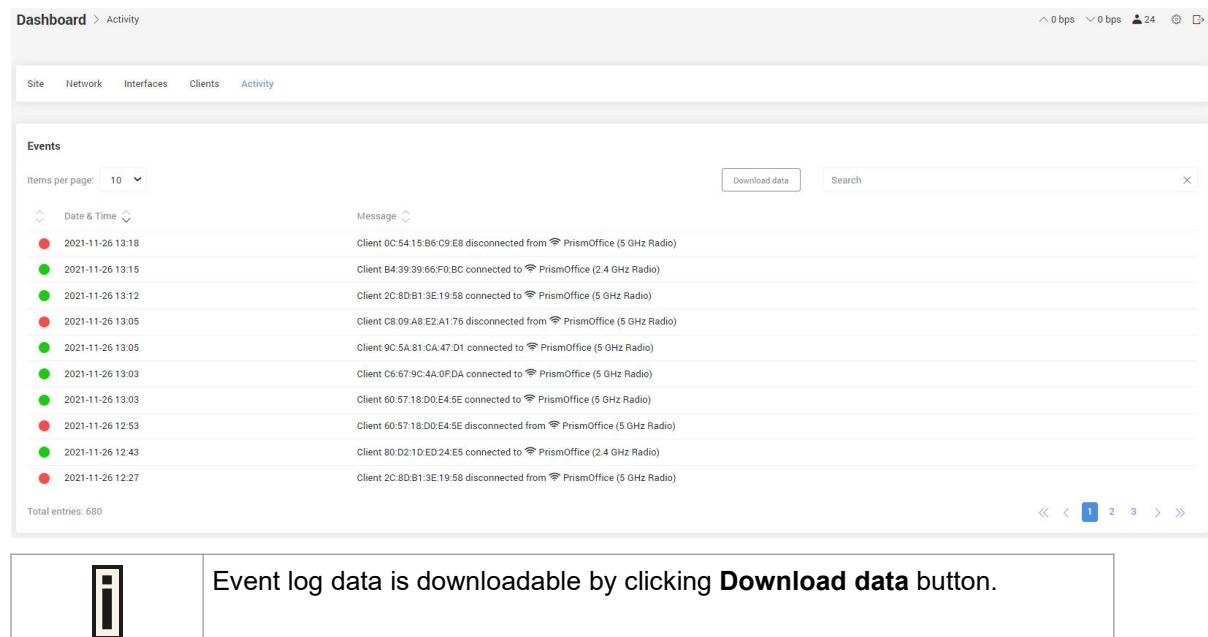

The screenshot shows the 'Activity' page of the Prism User Guide. The top navigation bar includes 'Dashboard', 'Activity', and other tabs like 'Site', 'Network', 'Interfaces', and 'Clients'. The main content area is titled 'Events' and displays a list of network events. The list includes columns for 'Date & Time' and 'Message'. The events are as follows:



Date & Time	Message
2021-11-26 13:18	Client 0C:54:15:B6:C9:E8 disconnected from PrismOffice (5 GHz Radio)
2021-11-26 13:15	Client B4:39:39:66:F0:BC connected to PrismOffice (2.4 GHz Radio)
2021-11-26 13:12	Client 2C:8D:B1:3E:19:58 connected to PrismOffice (5 GHz Radio)
2021-11-26 13:05	Client C8:09:4E:2A:41:76 disconnected from PrismOffice (5 GHz Radio)
2021-11-26 13:05	Client 9C:5A:81:CA:47:D1 connected to PrismOffice (5 GHz Radio)
2021-11-26 13:03	Client C6:67:9C:4A:0F:DA connected to PrismOffice (5 GHz Radio)
2021-11-26 13:03	Client 60:57:18:D0:E4:5E connected to PrismOffice (5 GHz Radio)
2021-11-26 12:53	Client 60:57:18:D0:E4:5E disconnected from PrismOffice (5 GHz Radio)
2021-11-26 12:43	Client 80:D2:1D:ED:24:E5 connected to PrismOffice (2.4 GHz Radio)
2021-11-26 12:27	Client 2C:8D:B1:3E:19:58 disconnected from PrismOffice (5 GHz Radio)

At the bottom of the list, it says 'Total entries: 680' and there are navigation arrows for the page.

**Event log data is downloadable by clicking **Download data** button.**

## Chapter 4 - Mesh

This chapter describes the mesh configuration of the Prism Mesh Access Point.

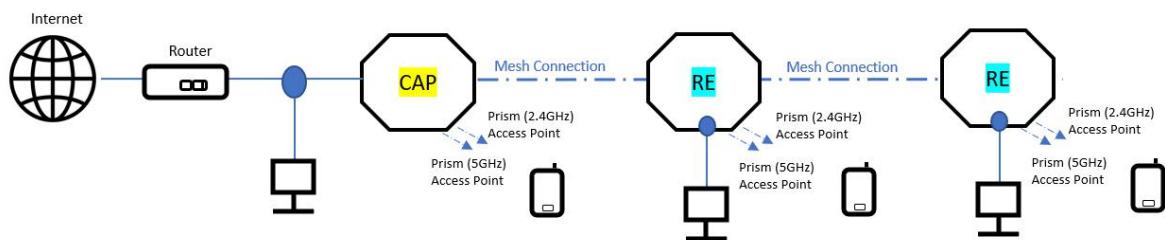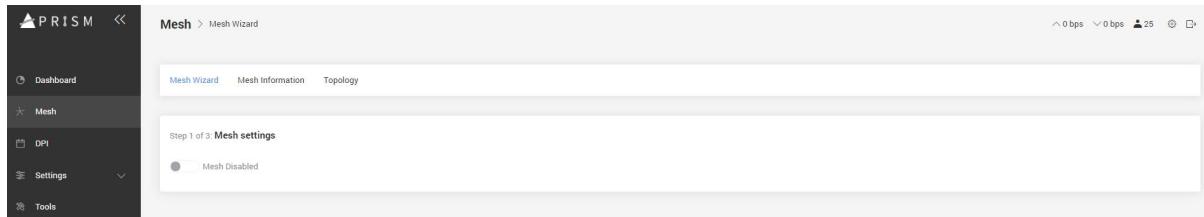

Central Access Point (CAP) is the Root (also known as Master) of mesh network that provides Internet connectivity to whole mesh network.


Range Extender (RE) is the Node (also known as Slave) of mesh network that extend Internet connectivity to remote area wirelessly.



As far as throughput is concerned, suggest not to install more than 4 REs in a daisy chain.

## Mesh > Mesh Wizard

The **Mesh Wizard** page will guide you to establish mesh network step by step.

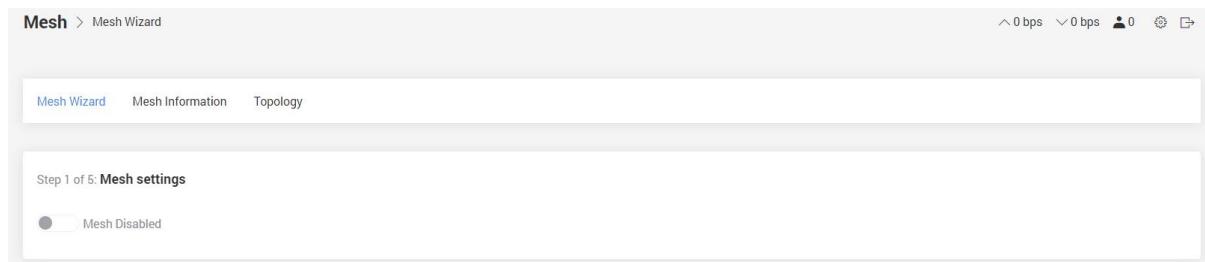

Mesh > Mesh Wizard

Mesh Wizard Mesh Information Topology


Step 1 of 5: Mesh settings

Mesh Disabled

## Mesh > Mesh Wizard (Create a CAP)

### Step 1

To create a CAP, select **Central Access Point (CAP)** from **Mesh Configuration**, then click **Next**.

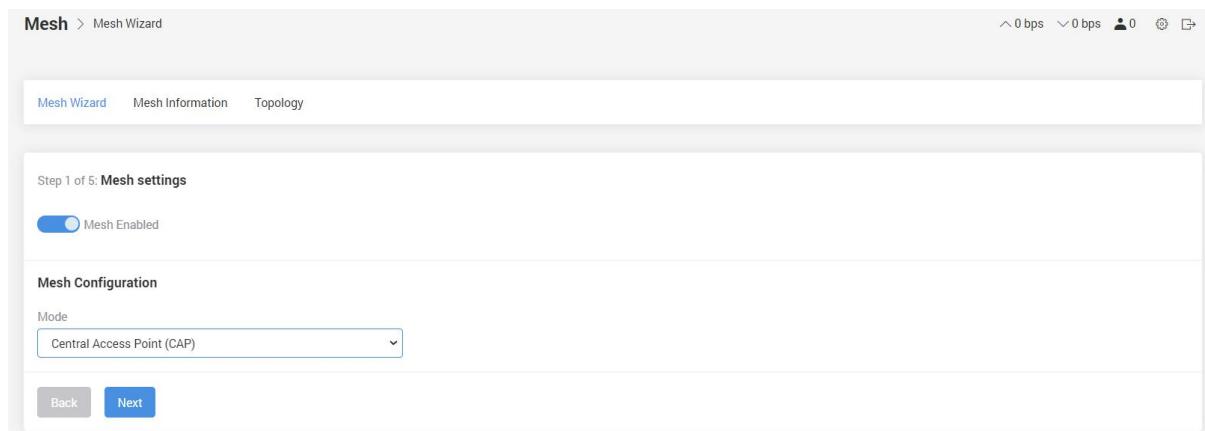

Mesh > Mesh Wizard

Mesh Wizard Mesh Information Topology

Step 1 of 5: Mesh settings

Mesh Enabled

Mesh Configuration


Mode

Central Access Point (CAP)

Back Next

### Step 2

Enter **Alias** and **Location**, then click **Next**.

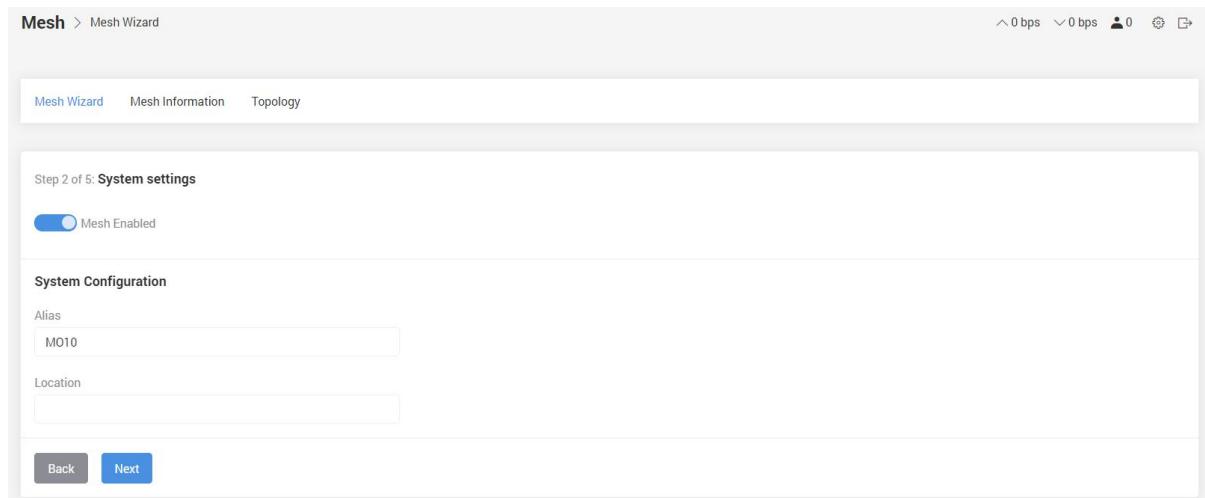

Mesh > Mesh Wizard

Mesh Wizard Mesh Information Topology

Step 2 of 5: System settings

Mesh Enabled


System Configuration

Alias

M010


Location

Back Next




## Step 3

Enter **Backhaul SSID** and **Backhaul passphrase**, then click **Next**.

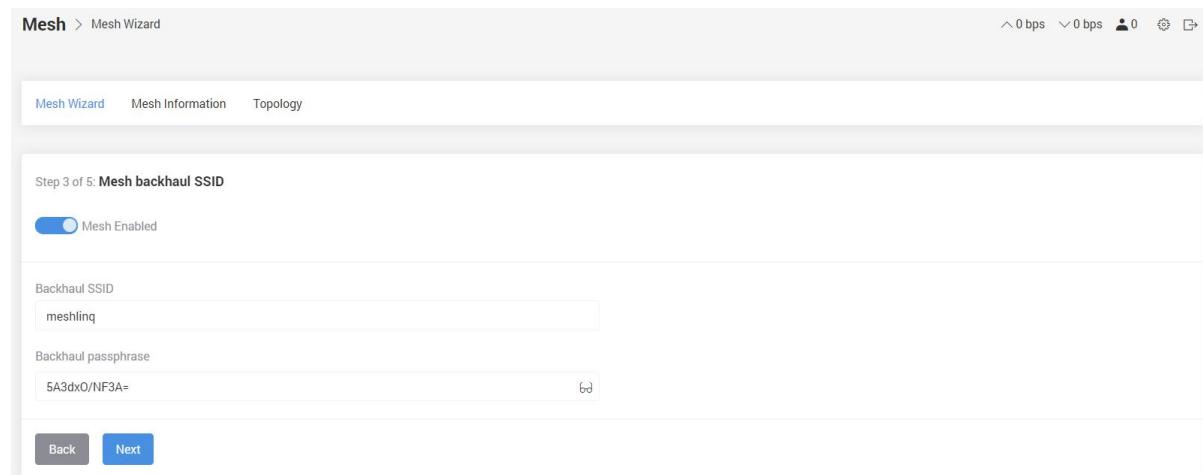


**Backhaul SSID** – an unique ID for establishing wireless mesh connection

**Backhaul passphrase** – password for wireless mesh connection

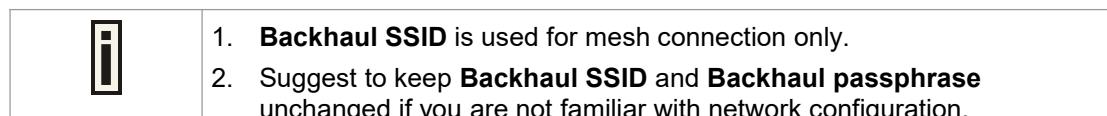

## Step 4

Enter **WiFi name (SSID)**, **Security Mode** and **Passphrase**, then click **Next**.

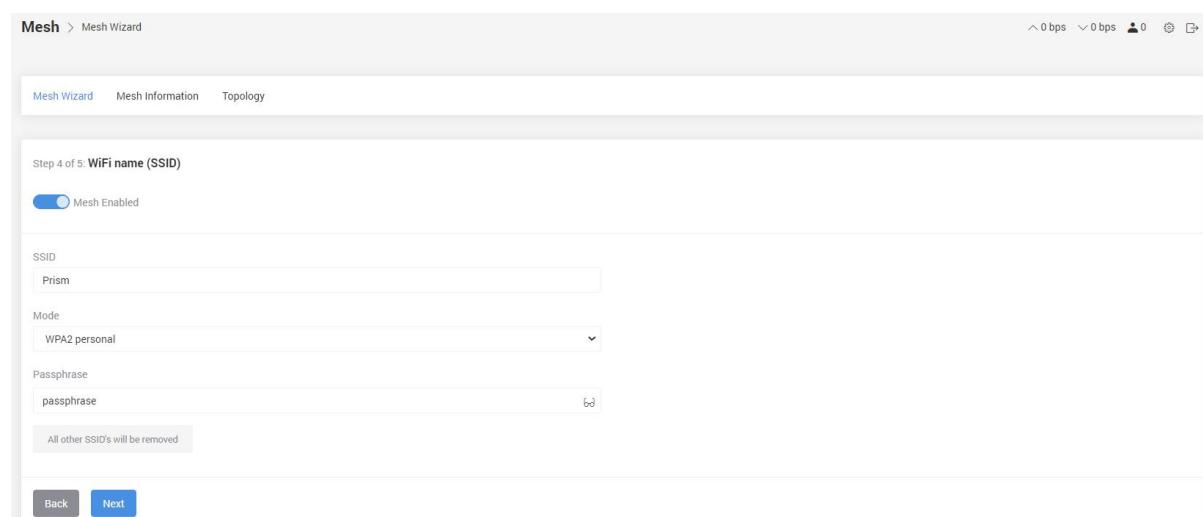

**WiFi name** – specify the WiFi SSID name that can be associated by station (user) devices


**Mode** – specify the security mode from menu, including Open, WPA2 personal, WPA2 enterprise and WPA3 enterprise

**Passphrase** – specify the password of the WiFi SSID

	<ol style="list-style-type: none"> <li>1. <b>WiFi name (SSID), Security Mode and Passphrase</b>, are used for stations (users) to connect.</li> <li>2. WPA2 enterprise and WPA3 enterprise are required to connect external RADIUS server.</li> </ol>
---	---

## Step 5

Enter **Network ID**, then click **Finish**.

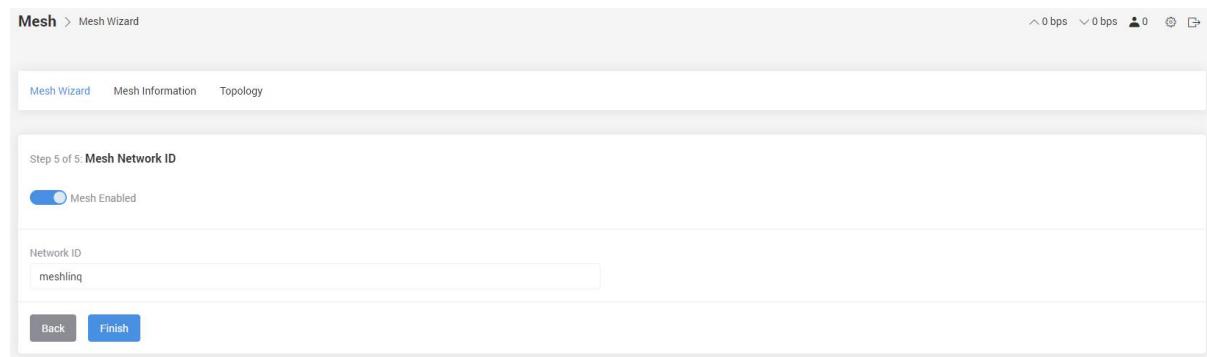


**Network ID** – an unique ID for adding RE into existing mesh connection

	<p>Please note that RE's Network ID should be the same as CAP's.</p>
---	--

## Mesh > Mesh Wizard (Add a RE)

### Step 1

To add a RE, select **Range Extender (RE)** from **Mesh Configuration**, then click **Next**.

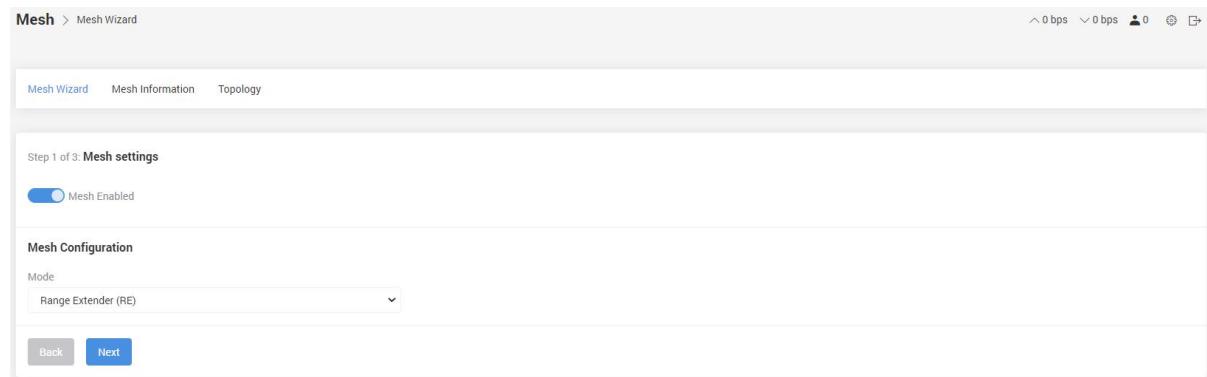

### Step 2

Enter **Alias** and **Location**, then click **Next**.

Mesh Wizard > Mesh Wizard

Step 2 of 3: **System settings**


Mesh Enabled

**System Configuration**

Alias  
MO10

Location

**Back** **Next**



## Step 3

Enter **Network ID**, then click **Finish**.

Mesh Wizard > Mesh Wizard

Step 3 of 3: **Mesh Network ID**

Mesh Enabled

Network ID  
meshing


**Back** **Finish**

**Network ID** – an unique ID for adding RE into existing mesh connection



## Mesh > Mesh Information

Mesh status is shown here.

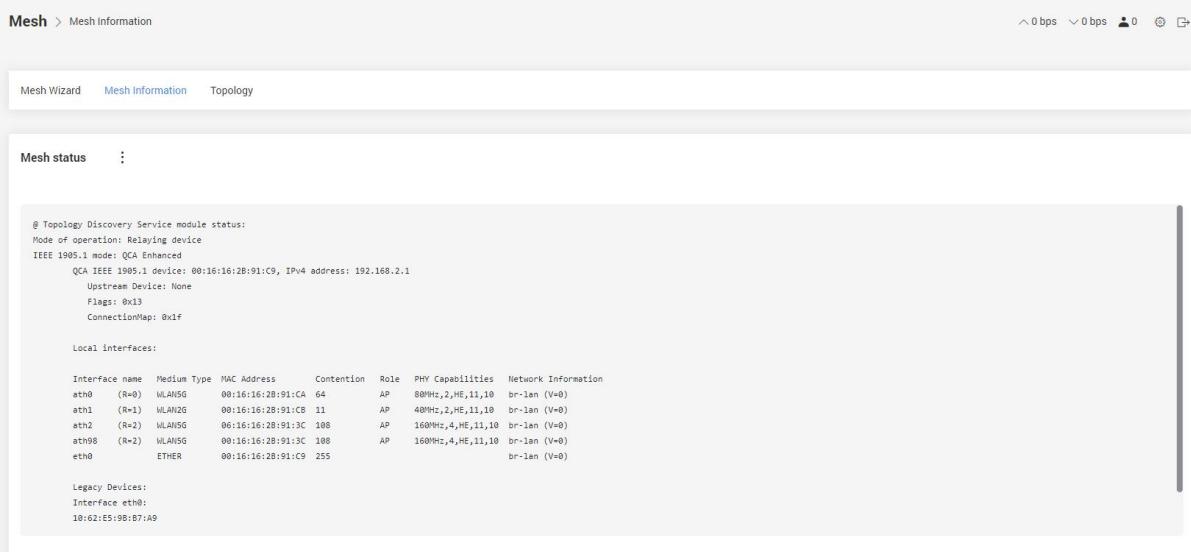

Mesh > Mesh Information

Mesh Wizard Mesh Information Topology

Mesh status :

```

@Topology Discovery Service module status:
Mode of operation: Relaying device
IEEE 1905.1 mode: QCA Enhanced
  QCA IEEE 1905.1 device: 00:16:16:2B:91:C9, IPv4 address: 192.168.2.1
  Upstream Device: None
  Flags: 0x13
  ConnectionMap: 0x1f


Local Interfaces:
Interface name Medium Type MAC Address Contention Role PHY Capabilities Network Information
ath0 (R=0) WLAN5G 00:16:16:2B:91:CA 64 AP 80MHz,2,HE,11,10 br-lan (V=0)
ath1 (R=1) WLAN2G 00:16:16:2B:91:CB 11 AP 40MHz,2,HE,11,10 br-lan (V=0)
ath2 (R=2) WLAN5G 00:16:16:2B:91:3C 108 AP 160MHz,4,HE,11,10 br-lan (V=0)
ath98 (R=2) WLAN5G 00:16:16:2B:91:3C 108 AP 160MHz,4,HE,11,10 br-lan (V=0)
eth0 ETHER 00:16:16:2B:91:C9 255

Legacy Devices:
Interface eth0:
10:62:E5:9B:87:A9

```

## Mesh > Mesh Information

Mesh topology is shown here.

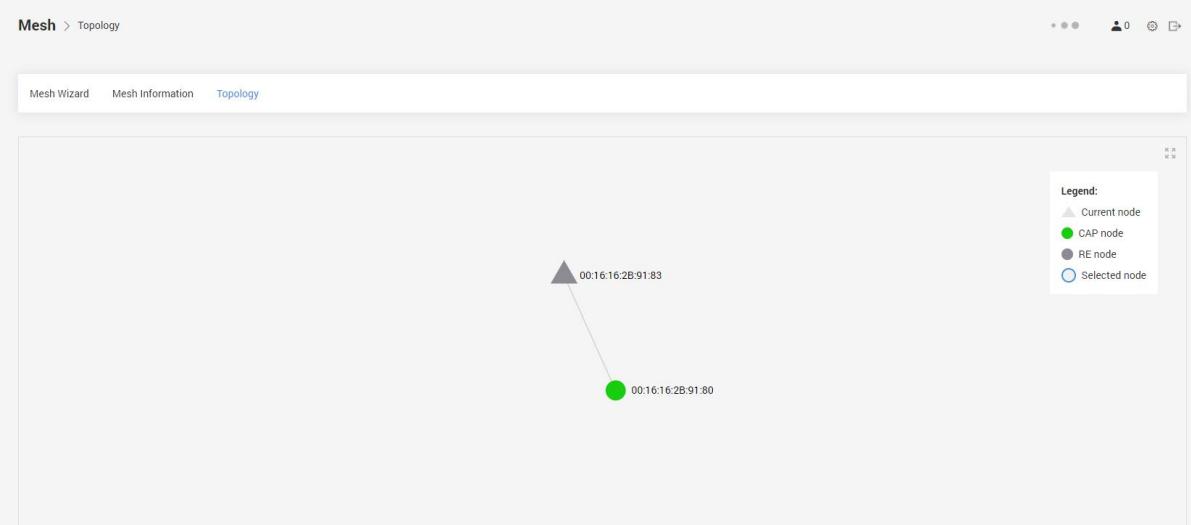

Mesh > Topology

Mesh Wizard Mesh Information Topology

Legend:

- Current node (triangle)
- CAP node (green circle)
- RE node (grey circle)
- Selected node (blue circle)

00:16:16:2B:91:83

00:16:16:2B:91:80

## Settings > Wireless > Networks

Once mesh configuration is enabled, go to **Settings > Wireless > Networks** for detailed settings.

The following describes the default settings of **Central Access Point (CAP)**.

**Networks** > Wireless > Networks

**Mesh configuration**

Enabled

Network zone: Local Network

Only those SSIDs that are added to the selected network zone will be a part of the Mesh

Mode: Central Access Point (CAP)

Backhaul radio: 5 GHz Radio (5G-2)

Backhaul SSID: meshlink

Backhaul passphrase: nh3lWJwwgsM=

Coordinated ATF

Network ID: meshlink

Gateway redundancy

**Connect (WPS push)** **Resync**

Select network: AP (Prism) **AP (Prism)** + Add network

**AP (Prism) configuration** **Remove**

General	Security
Mode: Access point	Mode: WPA2 personal
SSID: Prism	Passphrase: .....
Network zone: Local Network	
Enable on radio: <input checked="" type="checkbox"/> 5 GHz Radio (5G-1)	
<input checked="" type="checkbox"/> 2.4 GHz Radio	
Access Control List: <input checked="" type="radio"/> Disabled	

**Network zone** – Local Network in default



To know more about **Network zone**, please refer **Settings > Network > Zones**. In CAP mode, the **DHCP client** is enabled in **Local Network** configuration, and **DHCP server** is enabled as well. If no IP assigned by external DHCP server to this interface, it will fall back to default IP address 192.168.2.1.

**Mode – Central Access Point (CAP)** is selected

**Backhaul radio** – the default radio of mesh connection is **5GHz Radio (5G-2)**

**Backhaul SSID** – the default is **meshlink** for mesh connection

**Backhaul passphrase** – the default is generated as a random password

**Coordinated ATF** – disabled in mesh settings

**Network ID** – an unique ID for adding RE into existing mesh connection

**Gateway redundancy** – disabled in mesh settings

**Connect (WPS push)** – force to send the Network ID manually

**Resync** – force to send the CAP's RF configuration to RE

**Select Network AP (Prism)** – once mesh is configured as CAP, the other two radio interfaces will be changed to **Access Point** mode automatically

**SSID** – the name of Access Point

**Network zone – Local Network** in default

**Enable on radio** – both of **5 GHz Radio (5G-1)** and **2.4 GHz Radio** are enabled

**Access Control List – disabled** in default

The following describes the default settings of **Range Extender (RE)**.

**Mesh configuration**

Enabled

Network zone: Local Network

Mode: Range Extender (RE)

Backhaul radio: 5 GHz Radio (5G-2)

Fronthaul Cloning

Network ID: meshling

Gateway redundancy

Connect (WPS push)

Select network: AP (Prism) + Add network

**AP (Prism) configuration**

**General**

Mode: Access point

SSID: Prism

Network zone: Local Network

Enable on radio: 5 GHz Radio (5G-1), 2.4 GHz Radio

**Access Control List**

Disabled

**Security**

Mode: WPA2 personal

Passphrase: ..... 6d

### Network zone – Local Network in default



To know more about **Network zone**, please refer **Settings > Network > Zones**. In RE mode, the **DHCP client** is enabled in **Local Network** configuration, but **DHCP server** is disabled. If no IP assigned by external DHCP server to this interface, it will fall back to default IP address 192.168.2.1.

### Mode – Range Extender (RE) is selected

**Backhaul radio** – the default radio of mesh connection is **5GHz Radio (5G-2)**

**Fronthaul Cloning** – enabled to get the same Wi-Fi radio settings from CAP

**Network ID** – an unique ID for adding RE into existing mesh connection

**Gateway redundancy** – disabled in mesh settings

**Connect (WPS push)** – force to send the Network ID manually

**Select Network AP (Prism)** – once mesh is configured as RE, one radio is configured to mesh connection and the other two radio interfaces will be changed to **Access Point** mode automatically

**SSID** – the name of Access Point

**Network zone** – **Local Network** in default

**Enable on radio** – show radio interface used by the Wi-Fi access point


**Access Control List** – **disabled** in default

**Security** – the security settings of the Wi-Fi access point

# Chapter 5 - DPI

## DPI > DPI graphs

DPI will be available in future release.

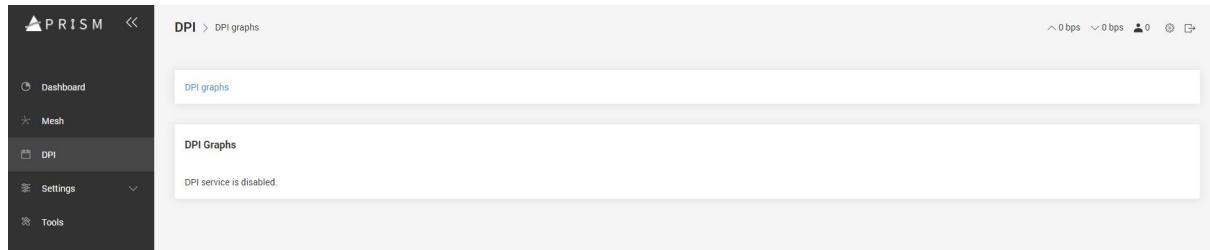


# Chapter 6 - Settings


This chapter describes the settings of the Prism Mesh Access Point.

## Settings > Network > Zones

There are two default configurations for interface type in network zones, **Internet** for WAN type and **Local Network** for LAN type. You can also define some new user-defined zone configurations for your network planning.

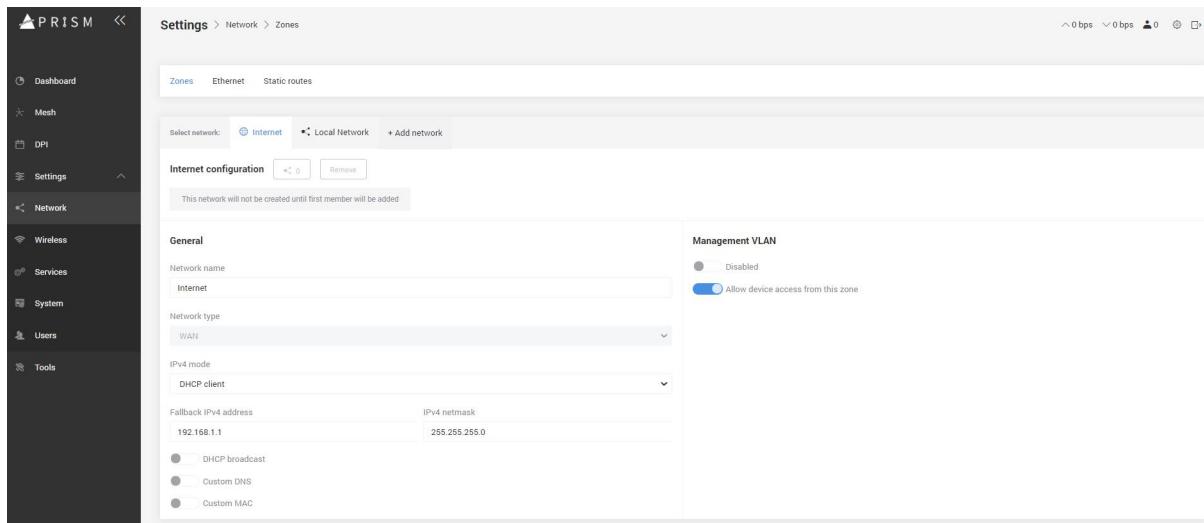

**Internet** configuration in default is defined as DHCP client. If no IP assigned by external DHCP server to this interface, it will fall back to defined IP address.

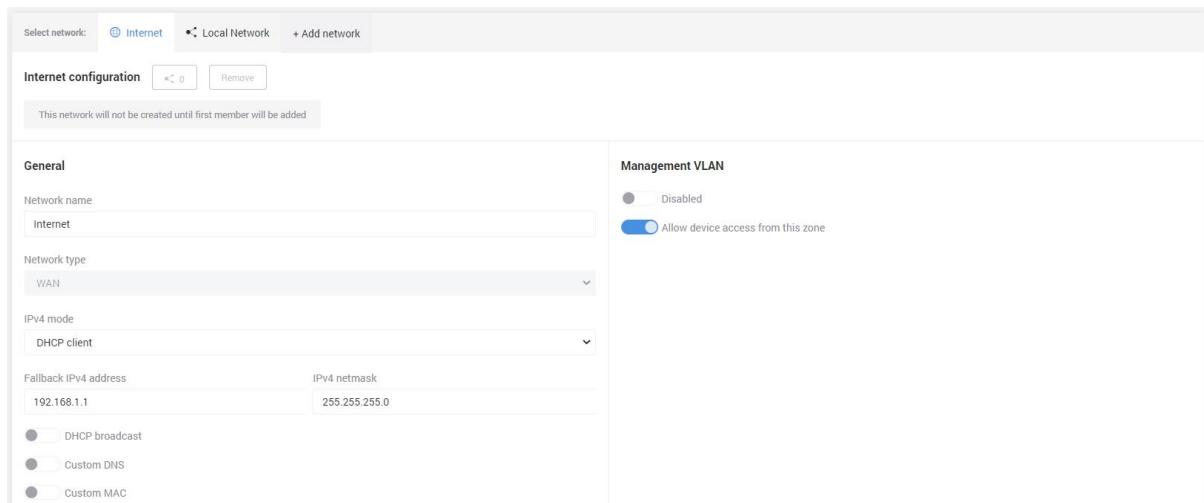

**Network name** – editable name

**IPv4 mode** – can be selected as DHCP client or static mode. Once the interface is assigned to a new IP, the web login IP address is changed accordingly.

**Fallback IPv4 address** – enter the defined IP address. The IP address can also be used for web login.

**IPv4 netmask** - enter the defined netmask

**DHCP broadcast** – enable to broadcasting DHCP dicover message

**Custom DNS** – a DNS server can be specified

**Custom MAC** – the MAC address of physical Ethernet port can be changed to meet network setting

**Local Network** configuration in default is defined as a fixed IP and DHCP server is enabled.

Name	IP address	MAC	Status
No static leases configured			

**Network name** – editable name

**Custom MAC** – the MAC address of physical Ethernet port can be changed to meet network setting

**IPv4** – default is enabled. The interface will be changed to bridge mode by disabling it.

**IP address** – enter the defined IP address. The IP address can also be used for web login.

**Netmask** – enter the defined netmask

**DHCP server** – default is enabled. IP range and lease time can be user-defined

**Static DHCP leases** – a static IP can be assign to specific MAC address

## Settings > Network > Ethernet

The Ethernet physical port can be flexibly assigned to different zone, according network plan and topology case by case.

MO10 has only one physical port - Ethernet 0.  
MI10 has three physical ports - Ethernet 0, Ethernet 1 and Ethernet 2.

## Settings > Network > Static routes

Static routes allow you to manually adding routing rules to remote networks in table.

No static routes configured

**Route name** – user defined name

**Network** - The network address of destination network

**Subnet mask** - The subnet mask of destination network

**Gateway** - the ip address of the router to the desired network

## Settings > Wireless > Networks

All wireless settings can be configured from here.

### Mesh configuration – disable in default



Suggest to configure mesh connection by using Mesh Wizard.  
Please refer to Chapter 4 when mesh configuration is enabled.

### Mode – The mode can be selected to **Access Point** or **Station** mode

#### Access Point Mode

#### SSID – The name of Wi-Fi network

#### Network zone – Select the default network zone or user-defined zone

#### Enable on radio – the setting can be applied to other radio by clicking enable button

#### Load balancing – two or more of radios should be selected before enabling it

#### Security – the security of Wi-Fi network


#### Access Control List – two policies can be choosed, **Deny** or **Allow**

**Deny** – to permit specific MAC

**Allow** – to block specific MAC

	Maximum 8 SSIDs can be added and configured.
---	--

## Station Mode

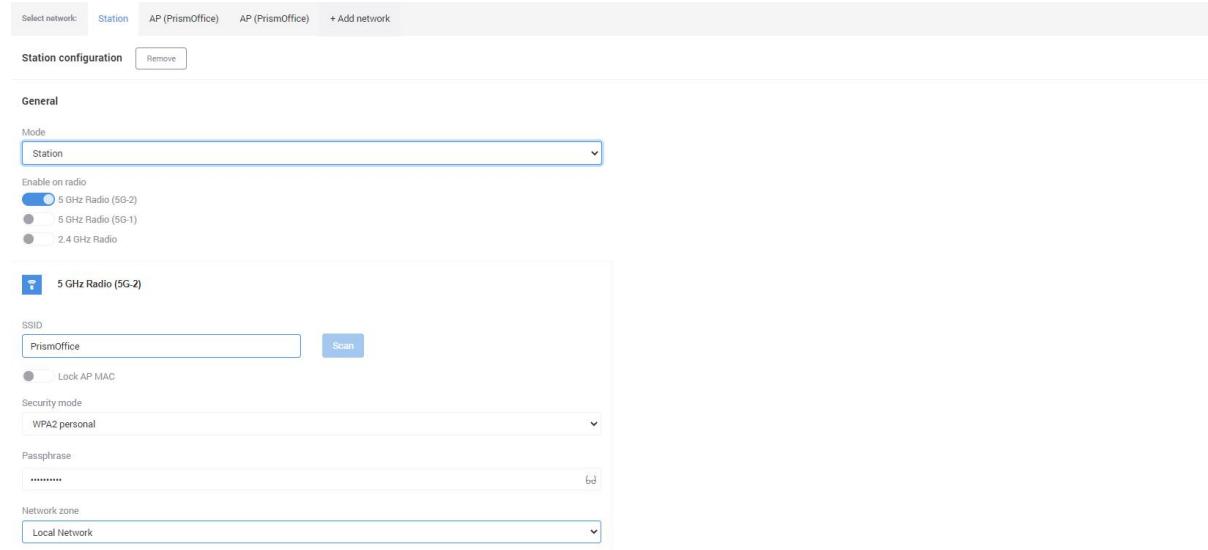

**Enable on radio** – select the radio to work as station

**SSID** – Clicking **Scan** to do the site survey and select the Wi-Fi network the station would like to connect.


**Security** – the security of Wi-Fi network

**Network zone** – Select the default network zone or user-defined zone

	It requires network administrator to carefully plan the network.
---	--

## Settings > Wireless > Radios

This page shows you the radio parameters for each radio.

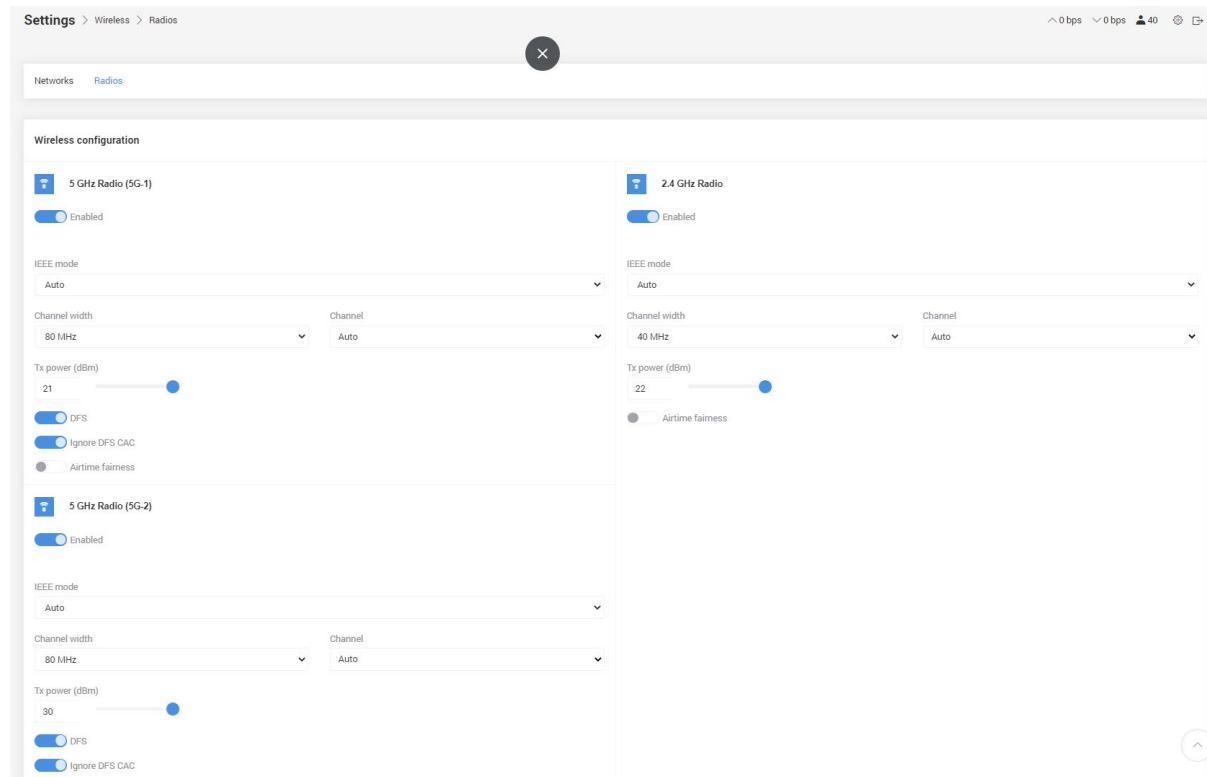

**5 GHz Radio (5G-1)** – Wi-Fi 5GHz 2x2 radio, normally as Access Point

**2.4 GHz Radio** – Wi-Fi 2.4GHz 2x2 radio, normally as Access Point

**5 GHz Radio (5G-2)** – Wi-Fi 5GHz 4x4 radio, dedicated backhaul radio once mesh is enabled

**Enable** – default is **enabled**

**IEEE mode** – **Auto** in default. 4 modes can be chosen from Auto, 802.11ac, 802.11ax or 802.11n

**Channel width** – 4 channel width parameters can be chosen from drop-down menu 20MHz, 40MHz , 80MHz or 160MHz, depending on radio capability

**Channel** – **Auto** in default. Channel can be selected from drop-down menu

**Tx power (dBm)** – **10** dBm in default

**DFS** – default is enabled



In many countries, regulatory requirements may limit the number of 5 GHz channels available or place additional restrictions on their use because the spectrum is shared with other technologies and services. For instance, some of the Unlicensed National Information Infrastructure (U-NII) bands are used by radar systems. Wi-Fi networks operating in those bands are required to employ a radar detection and avoidance capability.

**Ignore DFS CAC** – default is enabled



Channel Availability Check (CAC) is used to detect radar signals. The radio scans a target dynamic frequency selection (DFS) channel for radar signals for 60 seconds. After the 60-second scan, if no radar signals are detected, the radio can transmit on the target DFS channel. During the 60-second scan, if radar signals are detected on a target DFS channel, the radio must move to another DFS channel and restart the 60-second CAC.

**Airtime fairness** – default is disabled



Airtime Fairness ensures that every client has equal access to air time, regardless of client capability (for example, operating system, 802.11 mode, low RSSI). The regulated wireless spectrum, where all wireless communication takes place, is shared amongst all clients on the wireless access point as well as neighboring APs on the same channel.

## Settings > Services

The function of services allows network administrator to manage the mesh access point easily.

APRISM < Settings > Services > Web

Dashboard Mesh DPI Settings Network Wireless Services System Users Tools

Web services

Configure which ports are used to access the web services.

HTTP port: 80

HTTPS port: 443

## Settings > Services > Web

It provides you to configure specific port to access the web services through HTTP or HTTPS.

Settings > Services > Web

Web SSH Telnet NTP Device discovery SNMP SNMP Traps Remote syslog Ping Watchdog DPI

Web services

Configure which ports are used to access the web services.

HTTP port: 80

HTTPS port: 443

## Settings > Services > SSH

It allows you to enable SSH port for accessing the mesh access point.

Settings > Services > SSH

Web SSH Telnet NTP Device discovery SNMP SNMP Traps Remote syslog Ping Watchdog DPI

SSH

The Secure Shell Protocol (SSH) is a cryptographic network protocol for operating network services securely over an unsecured network.

Enabled

Port: 22

Password login

## Settings > Services > Telnet

It allows you to enable Telnet for accessing the mesh access point.

## Settings > Services > NTP

It allows you to enable NTP and configure NTP server address to synchronize the mesh access point time with NTP server.

## Settings > Services > Device discovery

This feature allows to find other devices, as well as to broadcast information to other devices, in the same network.

## Settings > Services > SNMP

It allows you to enable SNMP to be managed by a network management system (NMS).

## Settings > Services > SNMP Traps

The SNMP trap is a type of SNMP protocol, that sends an unrequested message to the manager to notify about an important event.

## Settings > Services > Remote syslog

By enabling this function, syslog will be stored in a file or sent a remote logging server.

## Settings > Services > Ping Watchdog

By enabling ping watchdog, the device will be reboot when it cannot ping a particular IP address with defined rules.

Settings > Services > Ping Watchdog

Web SSH Telnet NTP Device discovery SNMP SNMP Traps Remote syslog Ping Watchdog DPI

**Ping Watchdog**

The purpose of ping watchdog is to reboot the device when it cannot ping a particular IP address.

Disabled

## Settings > Services > DPI

DPI will be available at future release.

Settings > Services > DPI

Web SSH Telnet NTP Device discovery SNMP SNMP Traps Remote syslog Ping Watchdog DPI

**DPI**

Currently it's EXPERIMENTAL! Deep packet inspection (DPI) inspects live network traffic flows, detects and classifies traffic by transport/application protocols and outputs statistics. Warning: this service will impact performance.

Disabled

## Settings > System

This page allows you to configure system-related settings.

Settings > System

System configuration

**Device information**

Device name: MO10

Device location:

Country: Other country

Hostname: domain

**Automatic firmware update**

Check for firmware updates

**Time settings**

Time zone: (UTC-5) America/New York

Date: 2021/11/17

Time: 下午 05:09

Set current time

**Other settings**

Physical reset button

**Device information** – Device name, Device location, Country, Hostname can be edited here

**Time settings** – can be manually entered or synchronized with NTP server

**Automatic firmware update** – external HTTP server is necessary when enabling firmware update

i
Example files in http server:

```
Mango_zefir-master-cc99739-7773762.bin 2021-Nov-24 20:01:11 21.2M application/octet-stream
firmwares.json 2021-Nov-24 20:01:12 0.2K application/octet-stream
```


Example firmwares.json:

```
{  
  "mango": {  
    "checksum": "0675d2cd94a1af66c3fa0a3553ab5bee",  
    "image": "Mango_zefir-master-cc99739-7773762.bin",  
    "version": {  
      "firmux": "7773762",  
      "release": "1.9.0",  
      "sdk": "cc99739"  
    }  
  }  
}
```

**Other settings – Physical reset button** can be enabled/disabled

## Settings > Users

This function allows you to change the username or reset the password, and to add new credentials.

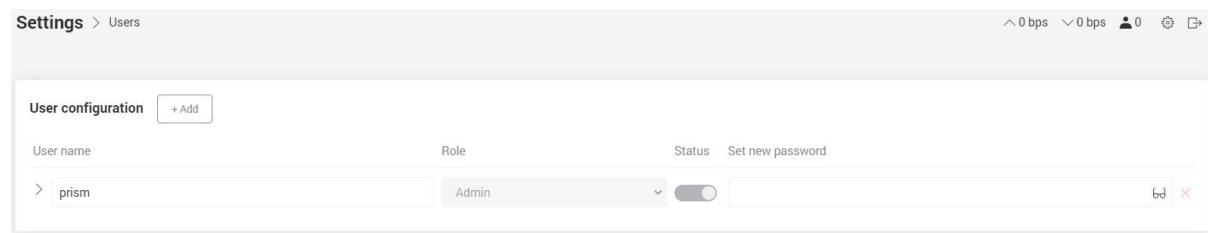

User name	Role	Status	Set new password
prism	Admin	Active	<a href="#">Set new password</a>

## Chapter 7 - Tools

This chapter describes the utility functions of the Prism Mesh Access Point.

### Tools > Site survey

This function allows you to perform site survey per radio to understand the usage of other Wi-Fi networks in the environment.

**Select radio** – choose the radio from drop-down menu

**Scan** – by clicking the button can see the results of site survey

### Tools > Ping

This Ping can verify if a domain/server is operating and network accessible.

## Tools > Traceroute

The Traceroute is a utility that uses ICMP packets to record the route through the internet from one computer/server to another.

## Tools > View log


It shows you the real-time system log.

## Tools > Device discovery

It shows you the discovered devices in the same netowrk.

## Tools > Speedtest

It helps to check upload and download speeds of the mesh access point.

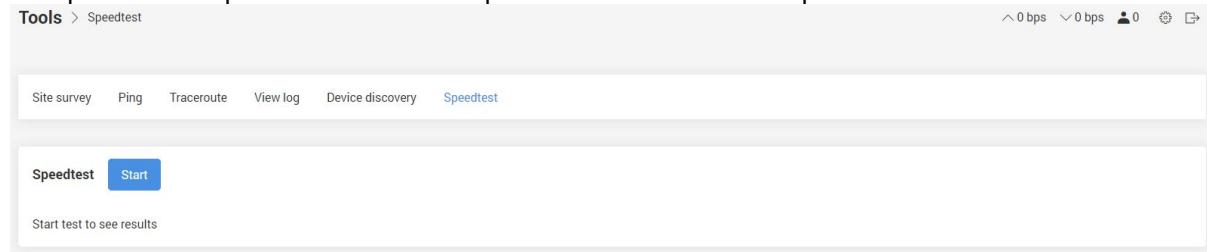

Tools > Speedtest

Site survey Ping Traceroute View log Device discovery Speedtest


Speedtest Start

Start test to see results

0 bps 0 bps 0

## Chapter 8 - Appendix

### I/O Description, Wall Mount, and Basic Installation of MO10

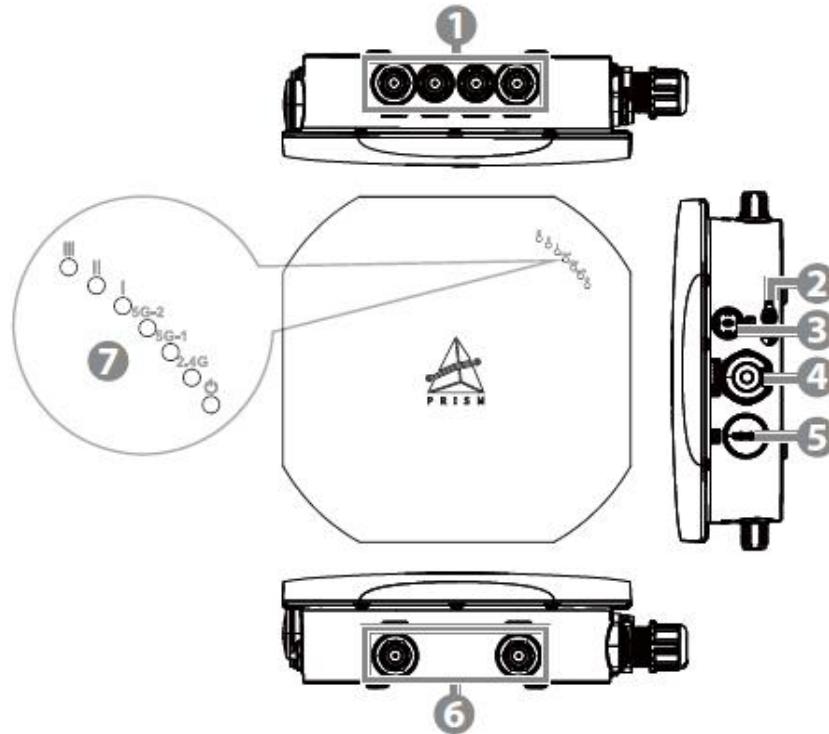


No.	Description
1	Antennas 1 – 4: 5GHz 4x4 (Tx/Rx)
2	Grounding
3	Gore-tex
4	Ethernet (RJ-45): For PoE/data transfer
5	DC 12V (optional)
6	Antennas 5 – 6: 2.4GHz/5GHz 2x2 (Tx/Rx)
7	LEDs (see table below for definitions)


LED	Color	Definition
		On: Powered on and ready Off: Powered off or not working properly
2.4G		2.4GHz Wireless is working
5G-1	Green	5GHz Wireless is working
5G-2	Green	5GHz Wireless is working
I		Mesh link established (signal strength -80 dBm to -66 dBm)
II		Mesh link established (signal strength -65 dBm to -56 dBm)
III		Mesh link established (signal strength > -55 dBm)

## Installing the Wall Mount


1 Measure and install two screw anchors into the wall.

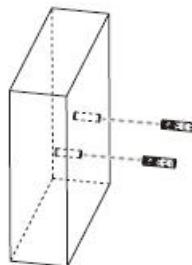


2 Secure the bracket to the wall using two sets of bolts, washers, and cushions.

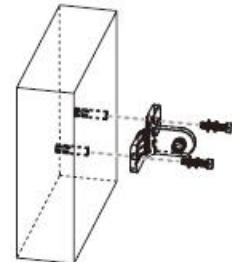

3 Secure the mount to the router using four sets of bolts, washers, and cushions.

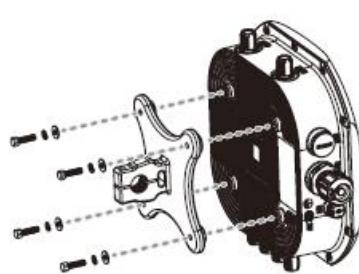

4 Secure the router to the bracket using two sets of bolts, washers, cushions, and nuts.

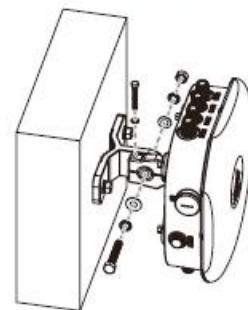


## Connecting the Router (PoE)


The PoE (Power over Ethernet) adapter allows the router to be powered by the same Ethernet (RJ-45) connection that also provides it data. To setup the PoE connection for the router follow the steps below:

1. Following the instructions in the “Connecting an RJ-45 Cable” section, connect the Ethernet port on the router to the **OUT** port on the PoE adapter using an RJ-45 cable.
2. Connect the **IN** port on the PoE adapter to a hub/router with Internet access using an RJ-45 cable.
3. Connect the power socket on the PoE adapter to a 100 - 220V power outlet/source using the supplied power cable.

This Equipment Is Not Suitable for Use in Locations Where Children Are Likely to Be Present.

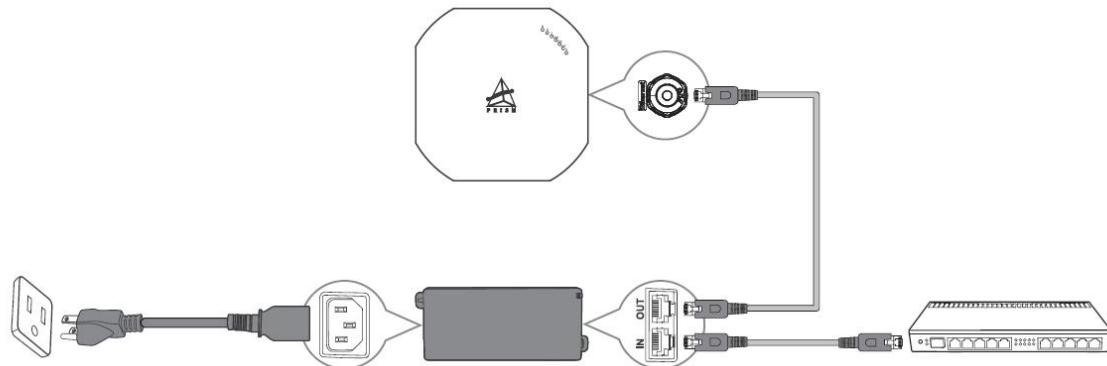

## I/O Description, Wall Mount, and Basic Installation of MI10

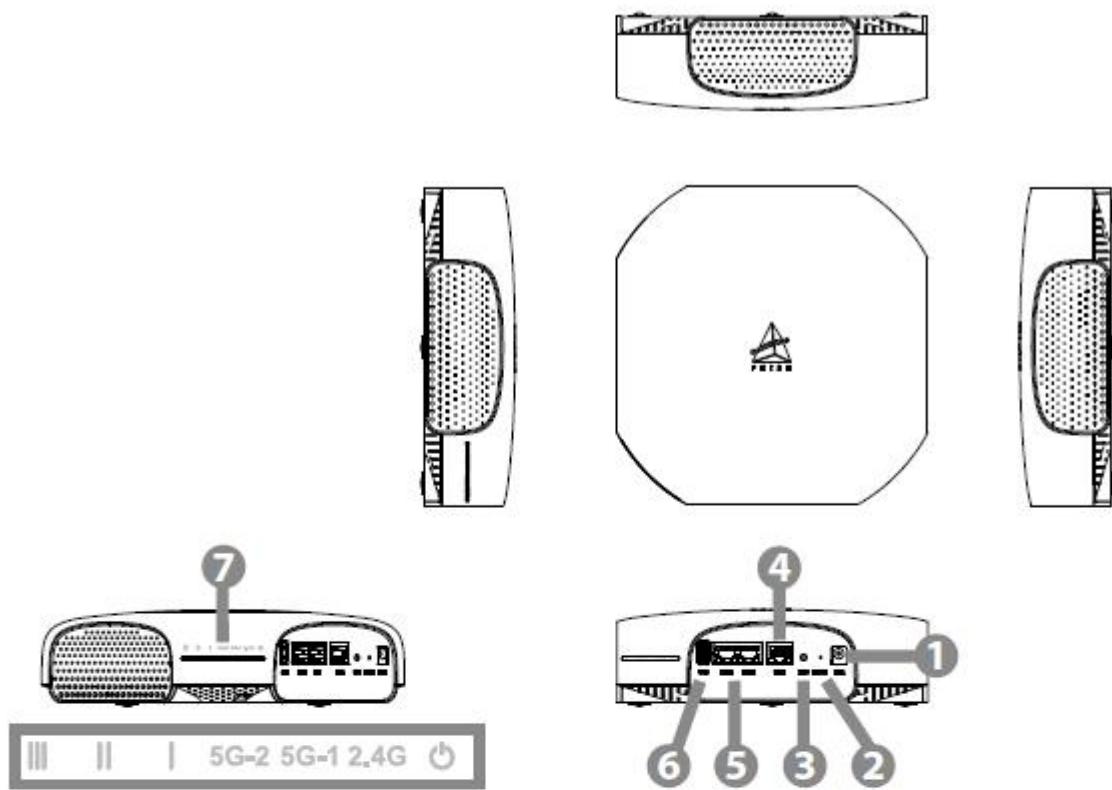


No.	Description
1	Power (DC 12V)
2	Reset
3	WPS
4	Ethernet (RJ-45): WAN
5	Ethernet (RJ-45): LAN
6	USB
7	LEDs (see table below for definitions)


LED	Color	Definition
		On: Powered on and ready Off: Powered off or not working properly
2.4G		2.4GHz Wireless is working
5G-1	Green	5GHz Wireless is working
5G-2	Green	5GHz Wireless is working
I		Mesh link established (signal strength -80 dBm to -66 dBm)
II		Mesh link established (signal strength -65 dBm to -56 dBm)
III		Mesh link established (signal strength > -55 dBm)

## Installing the Wall Mount


**1** Measure and install 4 anchors into the wall.



**2** Secure the mounting bracket to the wall using 4 screws.




**3** Turn and secure MI10 to the mounting bracket.



## Connecting the Router

To setup the router with DC power connection follow the steps below:

1. Connecting an RJ-45 cable to the WAN port on the MI10
2. Following step1, connect this RJ-45 cable to a hub/router with Internet access
3. Plug in the power adaptor to the power socket on the MI10
4. Connect the power adaptor to a 100 - 220V power outlet/source

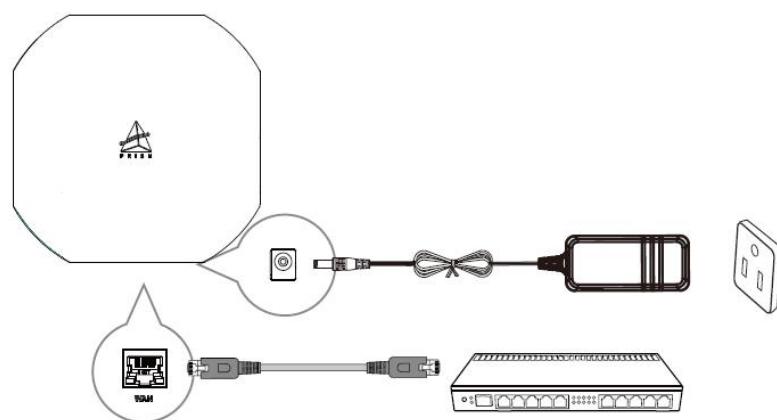

## FCC/IC Statement

### MO10 Statement

#### **Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **IMPORTANT NOTE:**

#### **Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **31 cm** between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/CANADA

## Industry Canada statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This radio transmitter [IC: 26296-MO10] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Le présent émetteur radio [IC: 26296-MO10] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

Type	Connector	Gain				
		2.4G	UNII 1	UNII 2A	UNII 2C	UNII 3
<b>Dipole ANT6</b>	<b>N type</b>	-	-	-	5.3	4.9
<b>Dipole ANT2</b>	<b>N type</b>	-	-	-	5.1	6.8
<b>Dipole ANT5</b>	<b>N type</b>	-	-	-	5.4	4.8
<b>Dipole ANT4</b>	<b>N type</b>	-	-	-	5.7	6.3
<b>Dipole ANT3</b>	<b>N type</b>	5.6	4.3	5.2	-	-
<b>Dipole ANT1</b>	<b>N type</b>	7.4	5.3	5.6	-	-

**Caution:**

the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

**Avertissement:**

les dispositifs fonctionnant dans la bande de 5150 à 5250MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

**Radiation Exposure Statement:**

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **31 cm** between the radiator & your body.

**Déclaration d'exposition aux radiations:**

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de **31 cm** entre le radiateur et votre corps.

## Professional installation instruction (MO10)

Please be advised that due to the unique function supplied by this product, the device is intended for use with our interactive entertainment software and licensed third-party only. The product will be distributed through controlled distribution channel and installed by trained professional and will not be sold directly to the general public through retail store.

### 1. Installation personal

This product is designed for specific application and needs to be installed by a qualified personal who has RF and related rule knowledge. The general user shall not attempt to install or change the setting.

### 2. Installation location

The product shall be installed at a location where the radiating antenna can be kept **31 cm** from nearby person in normal operation condition to meet regulatory RF exposure requirement.

### 3. External antenna

Use only the antennas which have been approved by the applicant. The non-approved antenna(s) may produce unwanted spurious or excessive RF transmitting power which may lead to the violation of FCC/IC limit and is prohibited.

### 4. Installation procedure

Please refer to user's manual for the detail.

### 5. Warning

Please carefully select the installation position and make sure that the final output power does not exceed the limit set force in relevant rules. The violation of the rule could lead to serious federal penalty.

## Instructions d'installation professionnelle (MO10)

Veuillez noter que l'appareil etant dedie a une fonction unique, il doit etre utilise avec notre logiciel proprietaire de divertissement interactif . Ce produit sera propose par un reseau de distribution controle et installe par des professionnels; il ne sera pas propose au grand public par le reseau de la grande distribution.

### 1. Installation

Ce produit est destine a un usage specifique et doit etre installe par un personnel qualifie maitrisant les radiofrequencies et les regles s'y rapportant. L'installation et les reglages ne doivent pas etre modifies par l'utilisateur final.

### 2. Emplacement d'installation

En usage normal, afin de respecter les exigences reglementaires concernant l'exposition aux radiofrequencies, ce produit doit etre installe de facon a respecter une distance de **31 cm** entre l'antenne emettrice et les personnes.

### 3. Antenn externe.

Utiliser unicamente les antennes approuvees par le fabricant. L'utilisation d'autres antennes peut conduire a un niveau de rayonnement essentiel ou non essentiel depassant les niveaux limites definis par FCC/IC, ce qui est interdit.

### 4. Procedure d'installation

Consulter le manuel d'utilisation.

### 5. Avertissement

Choisir avec soin la position d'installation et s'assurer que la puissance de sortie ne depasse pas les limites en vigueur. La violation de cette regle peut conduire a de serieuses penalites federales.

## MI10 Statement

### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **IMPORTANT NOTE:**

#### **Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **28 cm** between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/CANADA

## Industry Canada statement:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### **Caution:**

- (i) the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands **5250-5350** MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- (iii) for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and

Operations in the 5.25-5.35GHz band are restricted to indoor usage only.

### **Avertissement:**

- (i) les dispositifs fonctionnant dans la bande de 5 150 à 5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5 250 à 5 350 MHz et de 5 470 à 5 725 MHz doit être conforme à la limite de la p.i.r.e;
- (iii) pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée, selon le cas;

Les opérations dans la bande de 5.25-5.35GHz sont limités à un usage intérieur seulement.

### **Radiation Exposure Statement:**

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **28 cm** between the radiator & your body.

**Déclaration d'exposition aux radiations:**

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de **28 cm** entre le radiateur et votre corps.