


FCC Test Report

FCC ID : 2AAS9TBSP100
Equipment : LoRaWAN Sensor
Model No. : TBAM100, TBSL100, TBWL100
(refer to item 1.1.1 for more details)
Brand Name : BROWAN
Applicant : BROWAN COMMUNICATIONS INCORPORATION
Address : No.15-1 Zhonghua Rd., Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan (R.O.C.), 30352
Standard : 47 CFR FCC Part 15.247
Received Date : Aug. 18, 2020
Tested Date : Aug. 25 ~ Oct. 05, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:

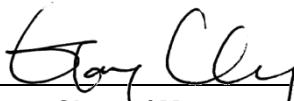

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty	9
2	TEST CONFIGURATION.....	10
2.1	Testing Facility.....	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	6dB and Occupied Bandwidth	11
3.2	RF Output Power.....	14
3.3	Power Spectral Density	16
3.4	Unwanted Emissions into Restricted Frequency Bands	18
3.5	Emissions in Non-Restricted Frequency Bands.....	44
4	TEST LABORATORY INFORMATION	47

Release Record

Report No.	Version	Description	Issued Date
FR081801AH	Rev. 01	Initial issue	Oct. 27, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	Note	N/A
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 9142.00MHz 45.61 (Margin -8.39dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 19.11	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass
Note: The EUT consumes power from battery, so the test is not required.			

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
BROWAN	TBAM100	Ambient Light Sensor	With Sensor Board: Ambient Light Sensor
	TBSL100	Sound Level Sensor	With Sensor Board: Sound Level Sensor
	TBWL100	Water Leak Sensor	With Sensor Board: Water Leak Sensor

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Data Rate (bit/sec)	Spread Factor	Channel Bandwidth (kHz)
902 ~ 928	903 ~ 914.2	65 ~ 72 [8]	980 ~ 21900	12 ~ 7	500
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.					
Note 2: The device uses CSS modulation.					

1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)
1	monopole	N/A	-1.7

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.6Vdc from battery
-------------------	---------------------

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	RAMWAY Battery	Model: ER14250 Rating: 3.6Vdc
2	FANSO Battery	Model: ER14250H Rating: 3.6Vdc
3	Detachable probe (For Water Leak Sensor)	1m non-shielded without core

1.1.6 Channel List

Channel	Frequency(MHz)
65	903
66	904.6
67	906.2
68	907.8
69	909.4
70	911
71	912.6
72	914.2

1.1.7 Test Tool and Duty Cycle

Test Tool	Python, version: 3.8.5	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
	100%	0

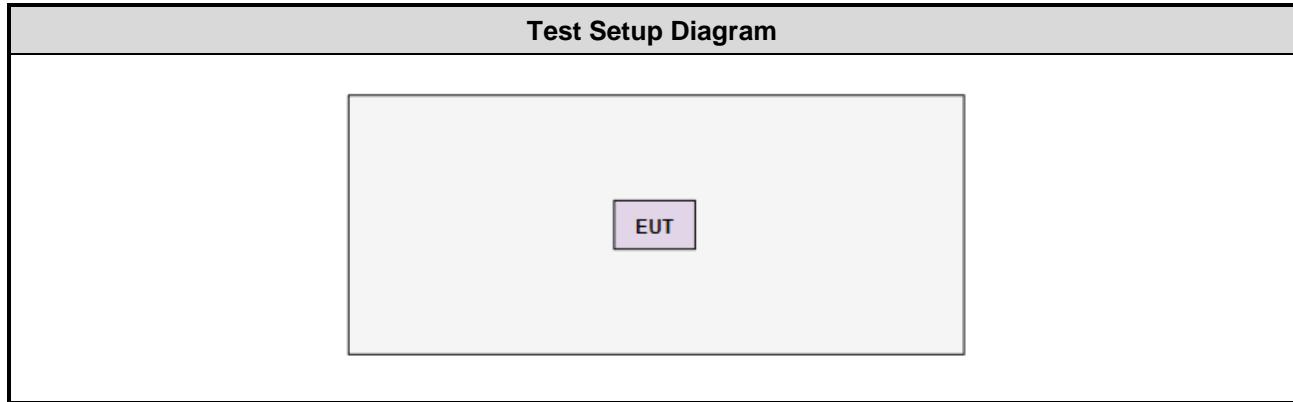
1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)		
	903	907.8	914.2
CSS	20	20	20

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E5470	DoC	---

1.3 Test Setup Chart



Note: The support notebook is disconnected from EUT and removed from test table after sending command from notebook to control EUT to transmit continuously.

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Aug. 25 ~ Oct. 05, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 10, 2020	Jul. 09, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HF2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 03, 2020	Jul. 02, 2021
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Aug. 13, 2020	Aug. 12, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Sep. 07, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 12, 2019	Dec. 11, 2020
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Test Frequency (MHz)	Channel Bandwidth (kHz)	Modulation / SF	Test Configuration
Conducted Emissions				
Radiated Emissions >1GHz				
Maximum Output Power	903 / 907.8 / 914.2	500	CSS / 12	1
6dB Bandwidth				
Power Spectral Density				
Radiated Emissions ≤1GHz	903 / 907.8 / 914.2	500	CSS / 12	1, 2, 3

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** result was found as the worst case and was shown in this report.
2. Test configurations for radiated emission below 1GHz test are listed as follows:
 - 1) Test configuration 1: model TBAM100
 - 2) Test configuration 2: model TBSL100
 - 3) Test configuration 3: model TBWL100

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures

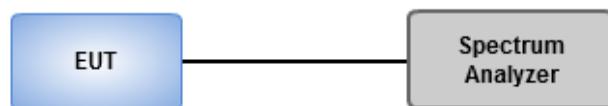
6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 10kHz, Video bandwidth = 30kHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

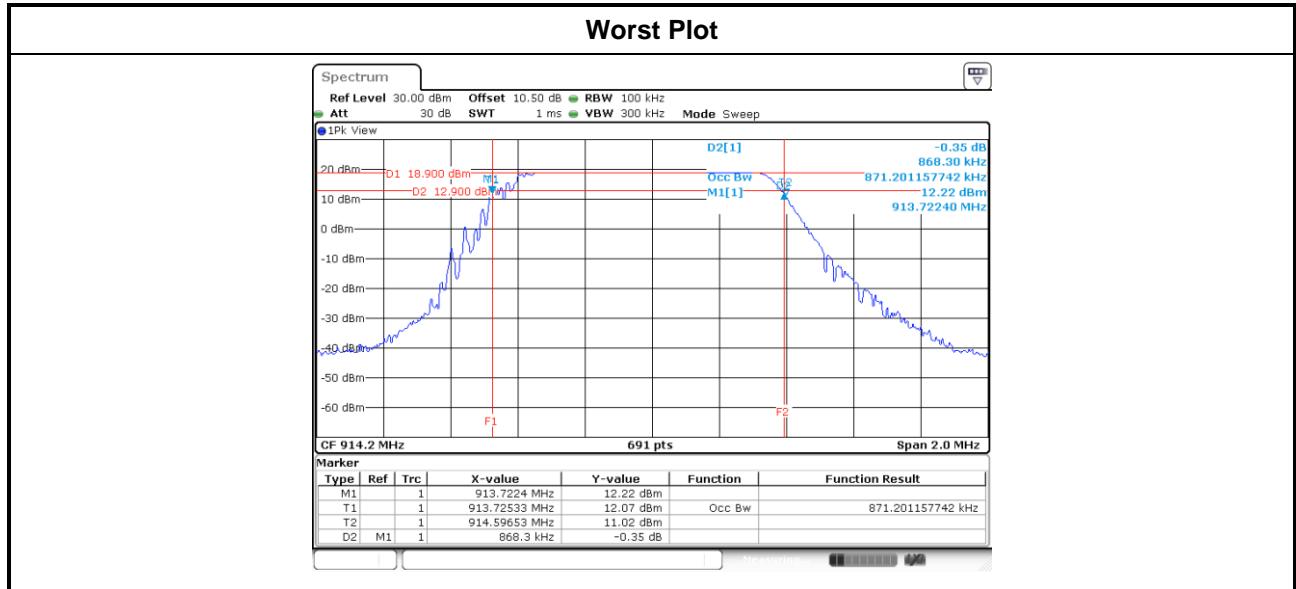
3.1.3 Test Setup



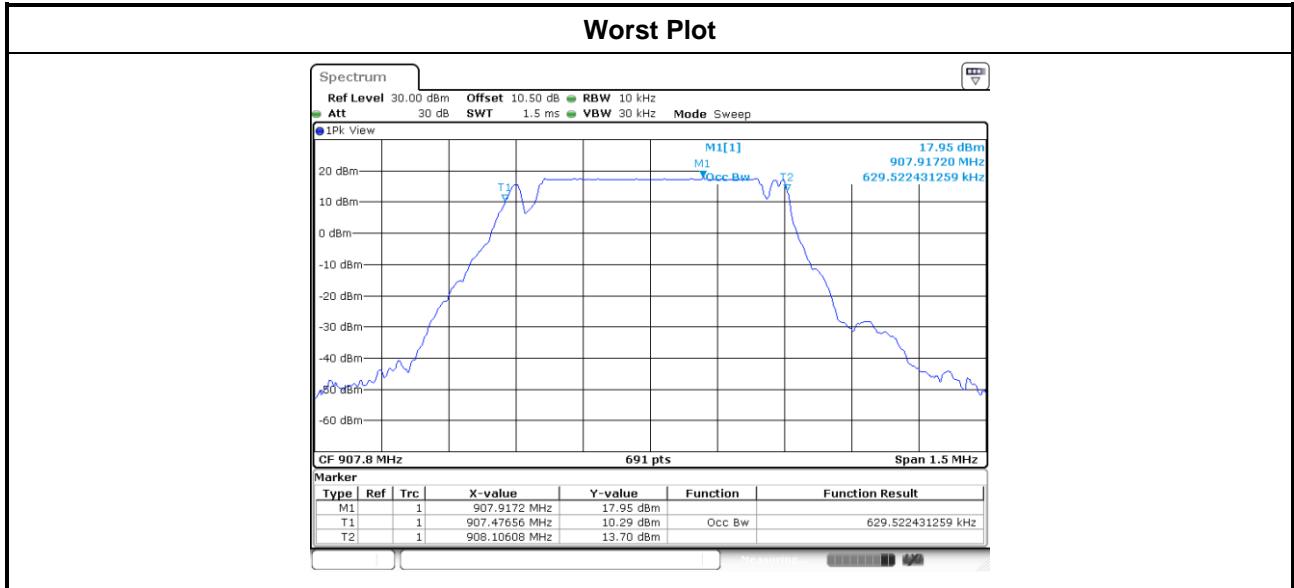
3.1.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	23°C / 63%	Tested By	Brad Wu
--------------------------	------------	------------------	---------

Modulation / SF	Freq. (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
CSS / 12	903	0.848	0.5
CSS / 12	907.8	0.822	0.5
CSS / 12	914.2	0.868	0.5



Modulation / SF	Freq. (MHz)	99% Occupied Bandwidth (MHz)
CSS / 12	903	0.597
CSS / 12	907.8	0.630
CSS / 12	914.2	0.625



3.2 RF Output Power

3.2.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

- Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.
- Antenna gain > 6dBi

Transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

3.2.2 Test Procedures

- Maximum Peak Conducted Output Power
 - Spectrum analyzer**
 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
 - Power meter**
 1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
 - Power meter**
 1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Result of Maximum Output Power

Ambient Condition	23°C / 63%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Modulation / SF	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (dBm)
CSS / 12	903	80.7235	19.07	30
CSS / 12	907.8	81.09611	19.09	30
CSS / 12	914.2	81.47043	19.11	30

3.3 Power Spectral Density

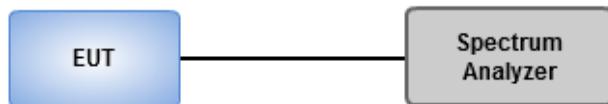
3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

1. Set the RBW = 3kHz, VBW = 10 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Employ trace averaging (RMS) mode over a minimum of 100 traces
4. Use the peak marker function to determine the maximum amplitude level.

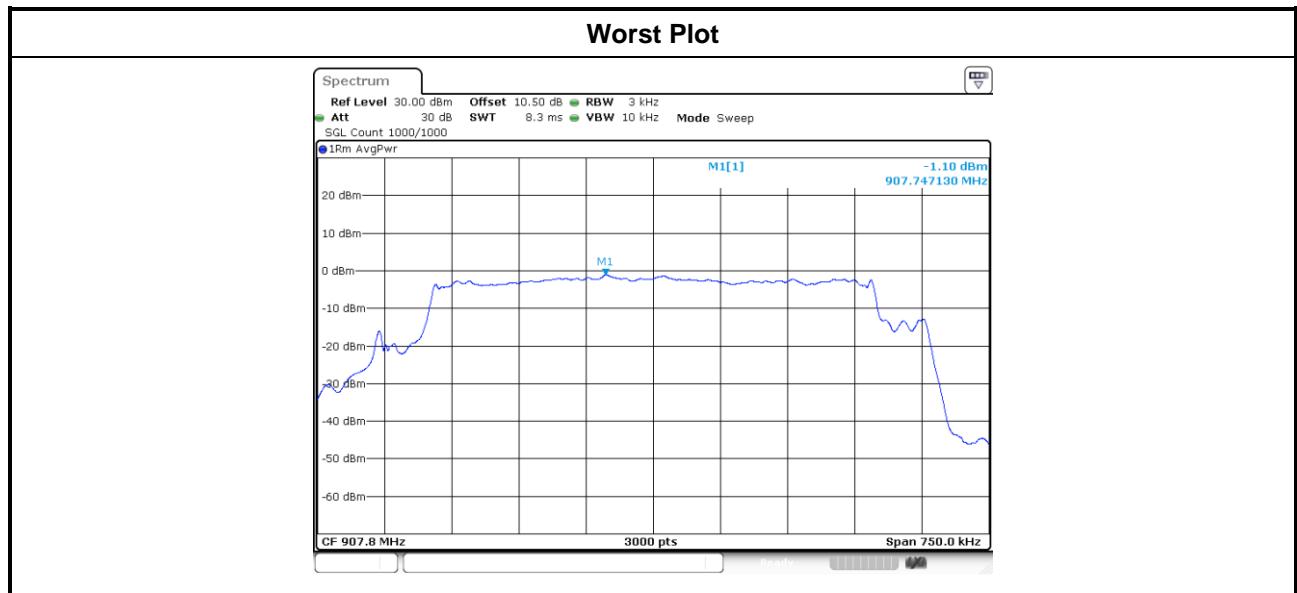
3.3.3 Test Setup



3.3.4 Test Result of Power Spectral Density

Ambient Condition	23°C / 63%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Modulation / SF	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
CSS / 12	903	-1.20	8.00
CSS / 12	907.8	-1.10	8.00
CSS / 12	914.2	-1.19	8.00



3.4 Unwanted Emissions into Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures

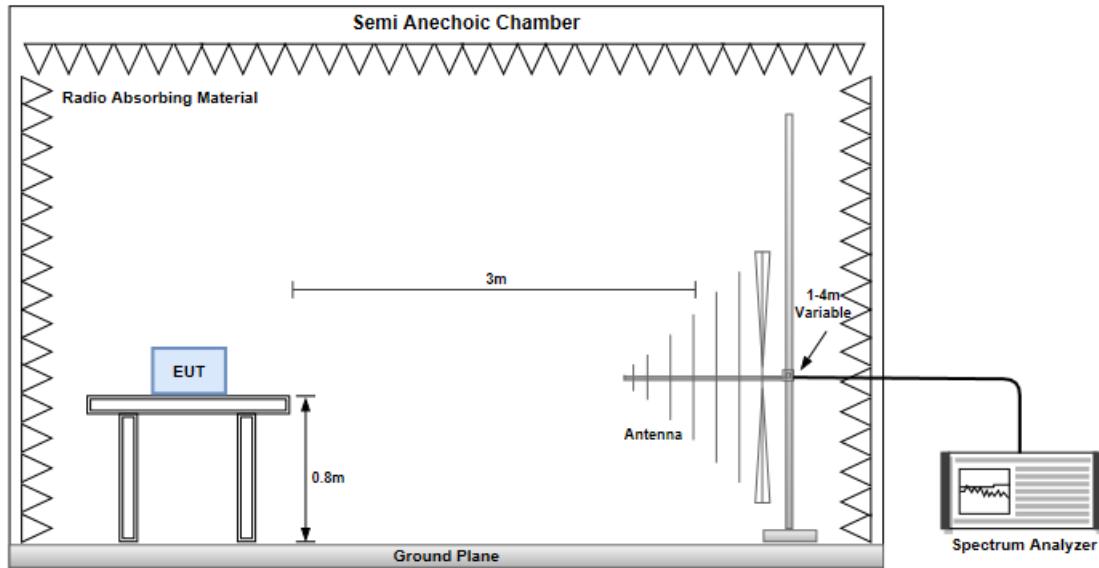
1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

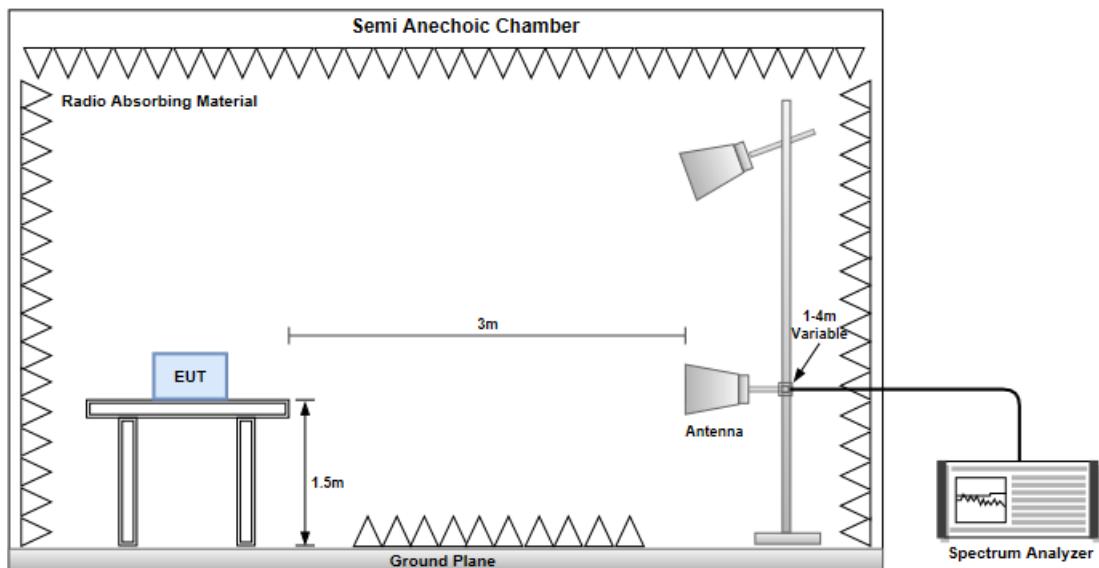
1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

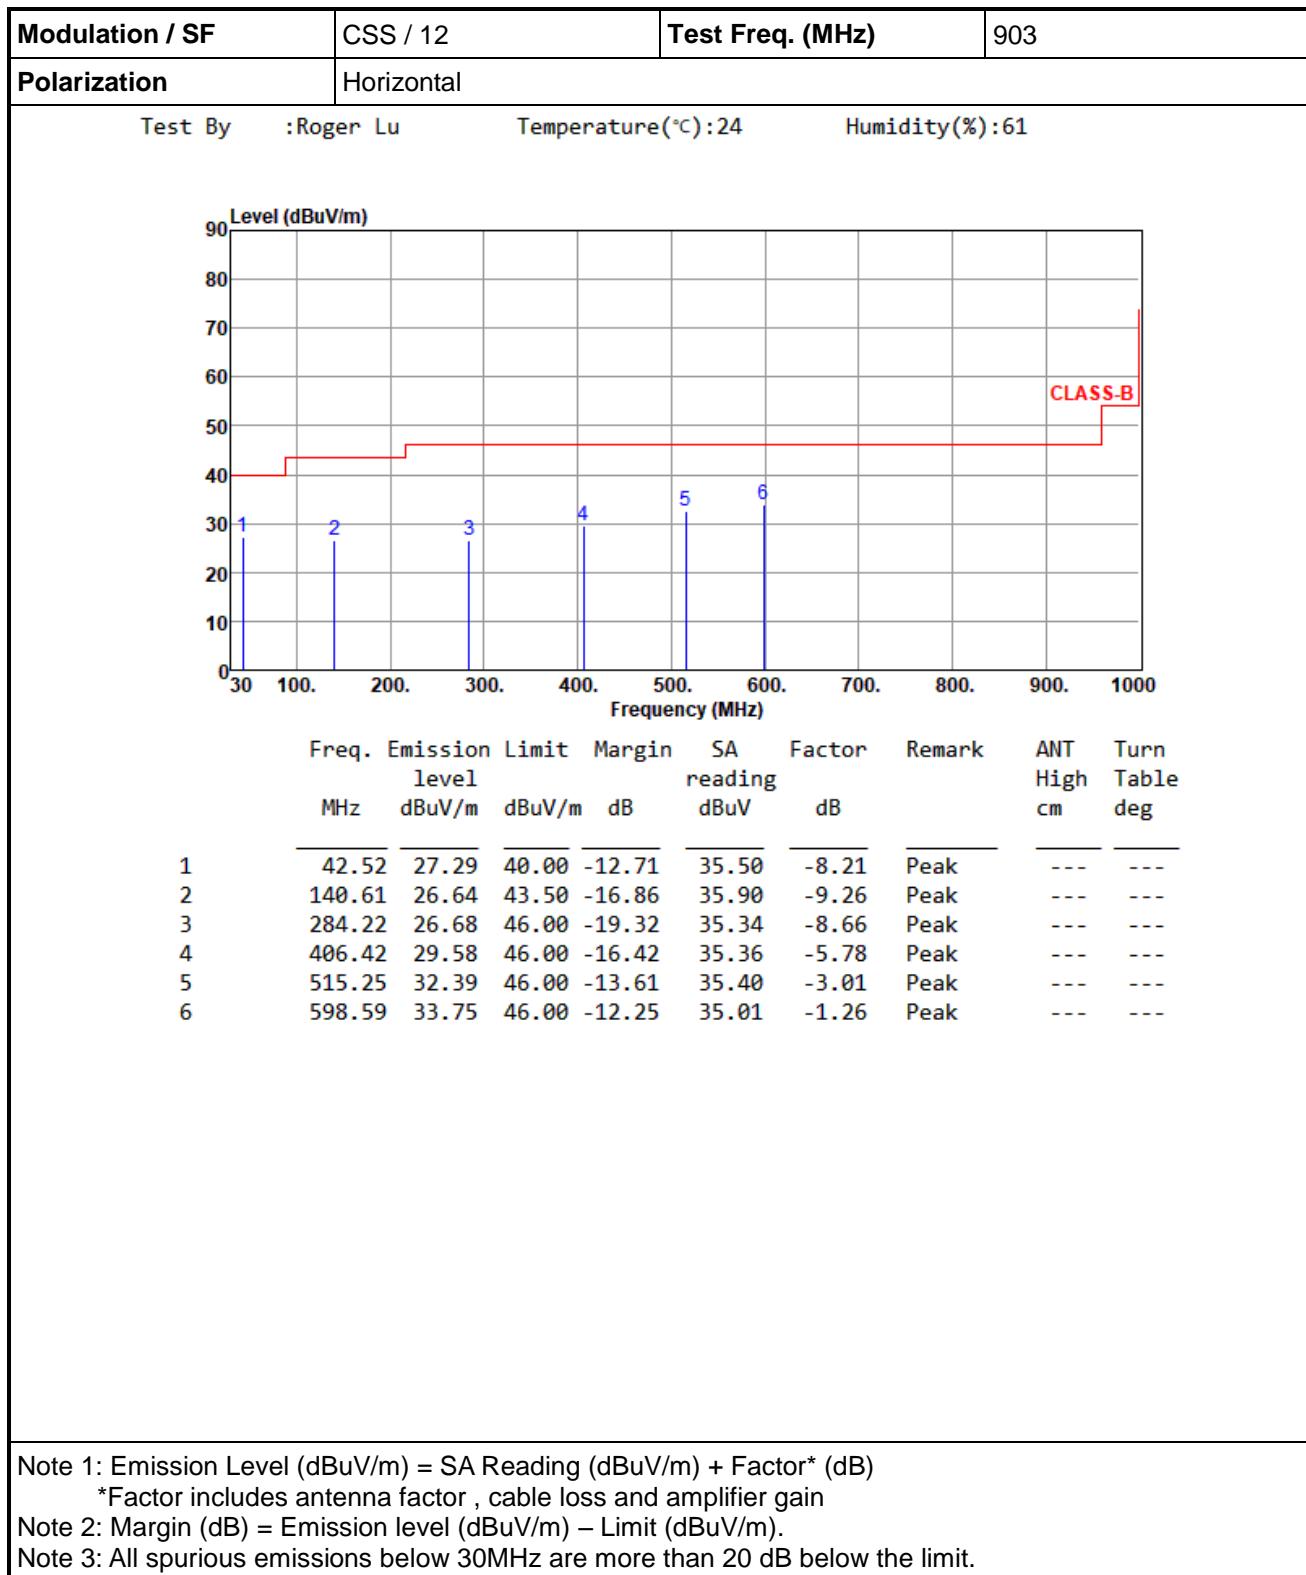


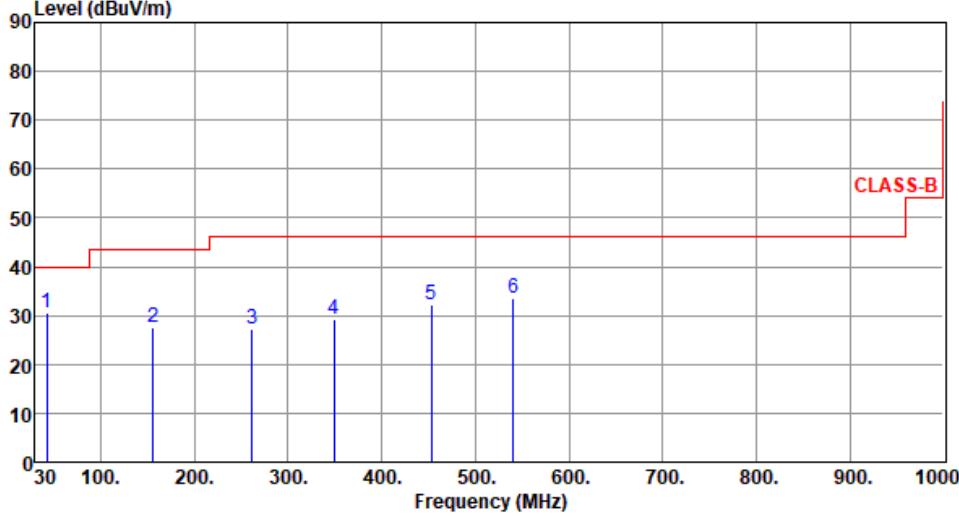
Radiated Emissions above 1 GHz



Test configuration 1: model TBAM100

3.4.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



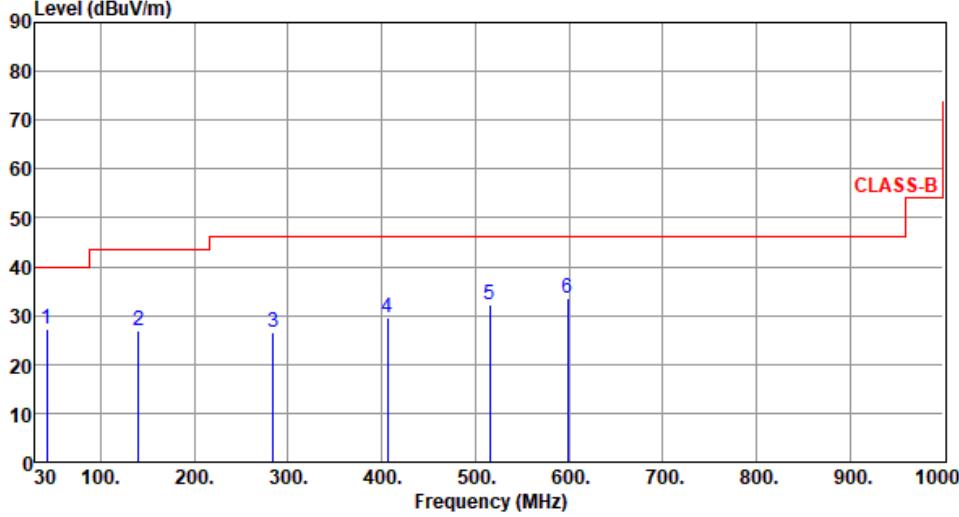
Modulation / SF	CSS / 12	Test Freq. (MHz)	903						
Polarization	Vertical								
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61						
Test By :Roger Lu Temperature(°C):24 Humidity(%):61									
									
Freq. Emission Margin SA Factor Remark ANT Turn level Limit reading reading MHz dBuV/m dBuV/m dB dB									
1	42.55	30.61	40.00	-9.39	38.81	-8.20	Peak	---	---
2	156.21	27.46	43.50	-16.04	36.34	-8.88	Peak	---	---
3	261.69	27.25	46.00	-18.75	37.04	-9.79	Peak	---	---
4	349.26	29.38	46.00	-16.62	36.29	-6.91	Peak	---	---
5	452.88	32.36	46.00	-13.64	36.64	-4.28	Peak	---	---
6	540.33	33.48	46.00	-12.52	36.25	-2.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

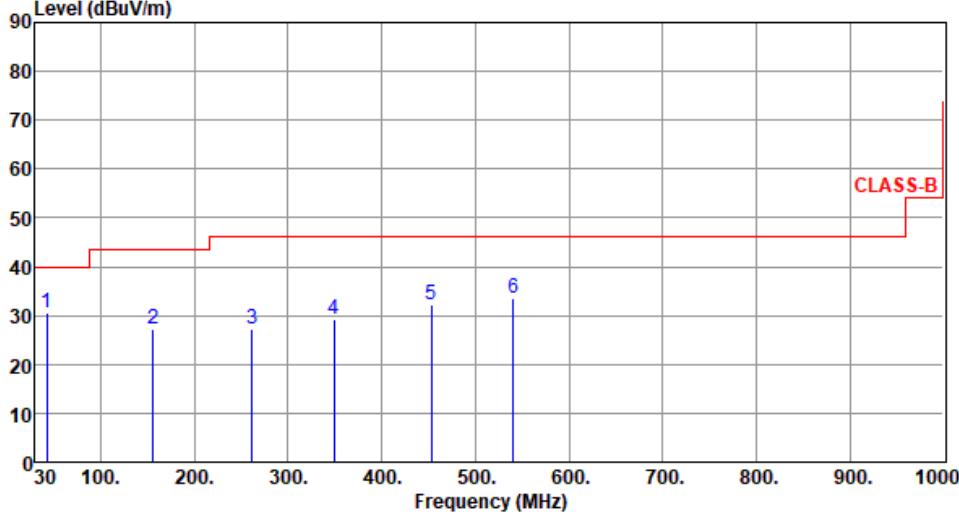
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8																																																															
Polarization	Horizontal																																																																	
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61																																																															
Test By :Roger Lu Temperature(°C):24 Humidity(%):61																																																																		
																																																																		
<table border="1"> <thead> <tr> <th></th> <th>Freq. level MHz</th> <th>Emission Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>42.61</td> <td>27.18</td> <td>40.00</td> <td>-12.82</td> <td>35.38</td> <td>-8.20</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>140.58</td> <td>26.77</td> <td>43.50</td> <td>-16.73</td> <td>36.03</td> <td>-9.26</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>284.14</td> <td>26.71</td> <td>46.00</td> <td>-19.29</td> <td>35.37</td> <td>-8.66</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>406.36</td> <td>29.67</td> <td>46.00</td> <td>-16.33</td> <td>35.45</td> <td>-5.78</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>515.00</td> <td>32.33</td> <td>46.00</td> <td>-13.67</td> <td>35.34</td> <td>-3.01</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>598.42</td> <td>33.62</td> <td>46.00</td> <td>-12.38</td> <td>34.88</td> <td>-1.26</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>					Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	42.61	27.18	40.00	-12.82	35.38	-8.20	Peak	---	2	140.58	26.77	43.50	-16.73	36.03	-9.26	Peak	---	3	284.14	26.71	46.00	-19.29	35.37	-8.66	Peak	---	4	406.36	29.67	46.00	-16.33	35.45	-5.78	Peak	---	5	515.00	32.33	46.00	-13.67	35.34	-3.01	Peak	---	6	598.42	33.62	46.00	-12.38	34.88	-1.26	Peak	---
	Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	42.61	27.18	40.00	-12.82	35.38	-8.20	Peak	---																																																										
2	140.58	26.77	43.50	-16.73	36.03	-9.26	Peak	---																																																										
3	284.14	26.71	46.00	-19.29	35.37	-8.66	Peak	---																																																										
4	406.36	29.67	46.00	-16.33	35.45	-5.78	Peak	---																																																										
5	515.00	32.33	46.00	-13.67	35.34	-3.01	Peak	---																																																										
6	598.42	33.62	46.00	-12.38	34.88	-1.26	Peak	---																																																										

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

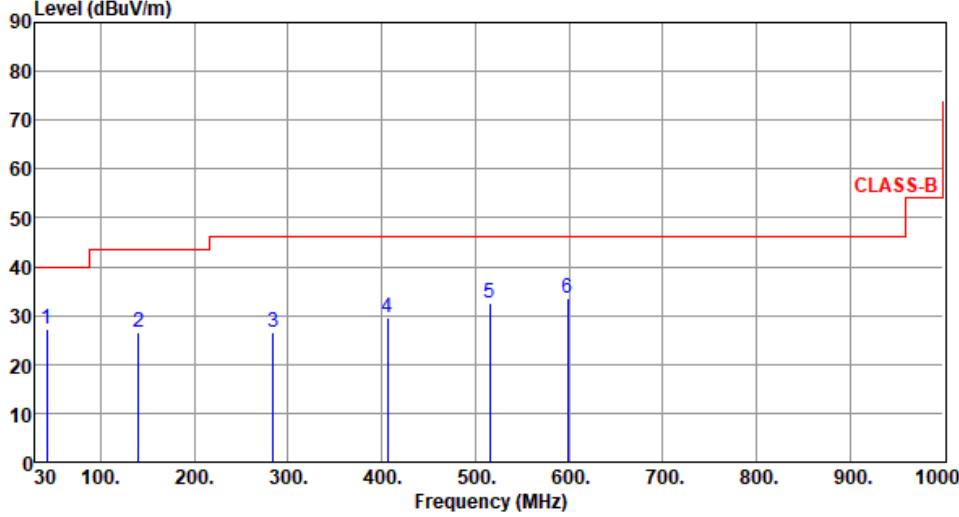
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.61	30.60	40.00	-9.40	38.80	-8.20	Peak	---
2	156.10	27.30	43.50	-16.20	36.18	-8.88	Peak	---
3	261.83	27.09	46.00	-18.91	36.87	-9.78	Peak	---
4	349.13	29.36	46.00	-16.64	36.28	-6.92	Peak	---
5	452.92	32.21	46.00	-13.79	36.49	-4.28	Peak	---
6	540.22	33.40	46.00	-12.60	36.17	-2.77	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

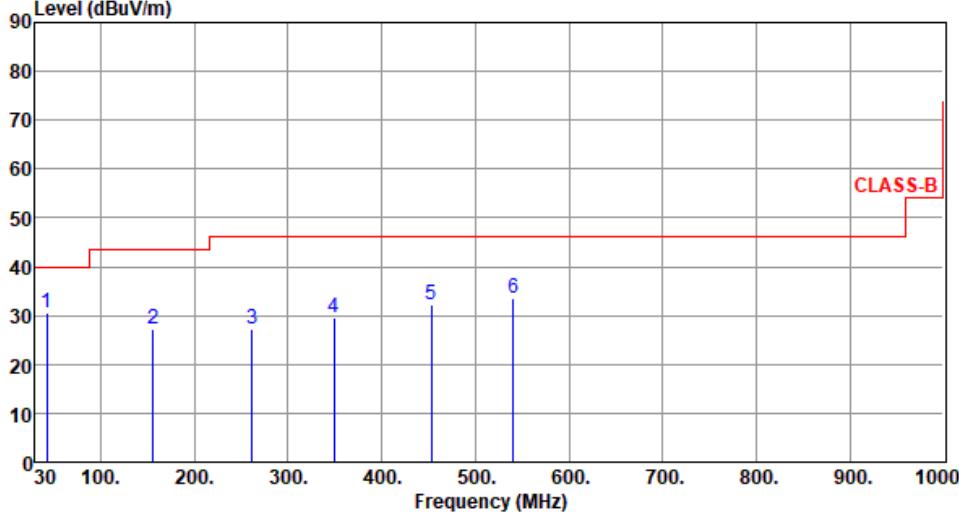
Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Horizontal							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.45	27.22	40.00	-12.78	35.43	-8.21	Peak	---
2	140.49	26.68	43.50	-16.82	35.93	-9.25	Peak	---
3	284.22	26.66	46.00	-19.34	35.32	-8.66	Peak	---
4	406.49	29.58	46.00	-16.42	35.36	-5.78	Peak	---
5	515.16	32.46	46.00	-13.54	35.47	-3.01	Peak	---
6	598.58	33.54	46.00	-12.46	34.80	-1.26	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.58	30.48	40.00	-9.52	38.68	-8.20	Peak	---
2	156.26	27.22	43.50	-16.28	36.10	-8.88	Peak	---
3	261.79	27.25	46.00	-18.75	37.03	-9.78	Peak	---
4	349.22	29.46	46.00	-16.54	36.38	-6.92	Peak	---
5	452.81	32.31	46.00	-13.69	36.59	-4.28	Peak	---
6	540.33	33.45	46.00	-12.55	36.22	-2.77	Peak	---

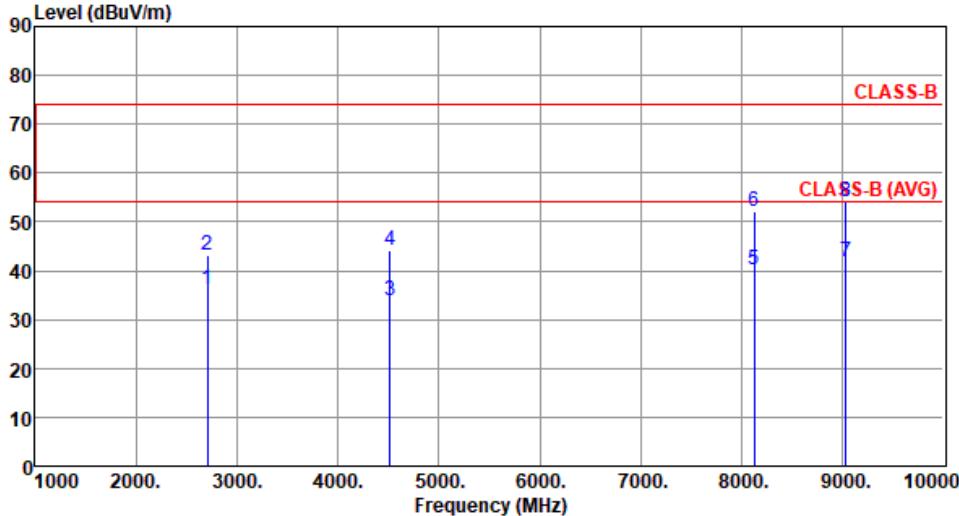
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

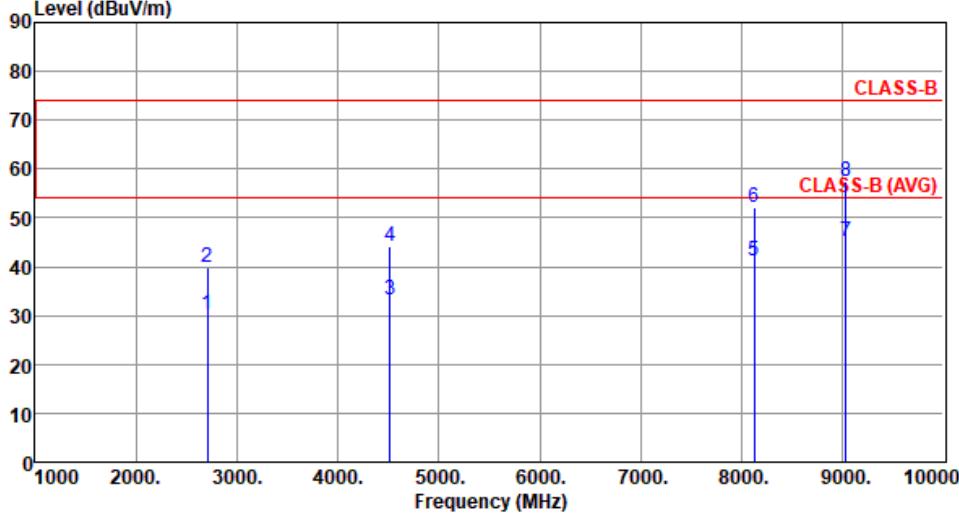
*Factor includes antenna factor , cable loss and amplifier gain

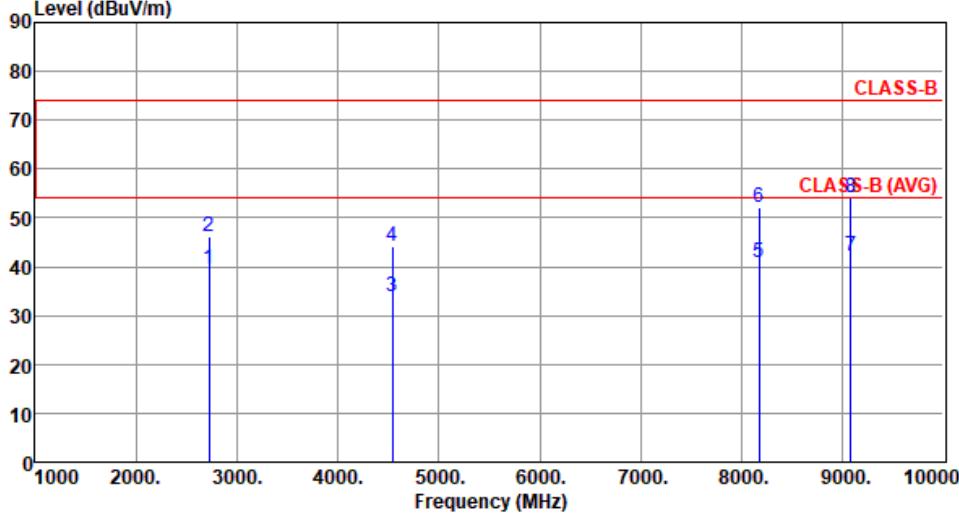
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

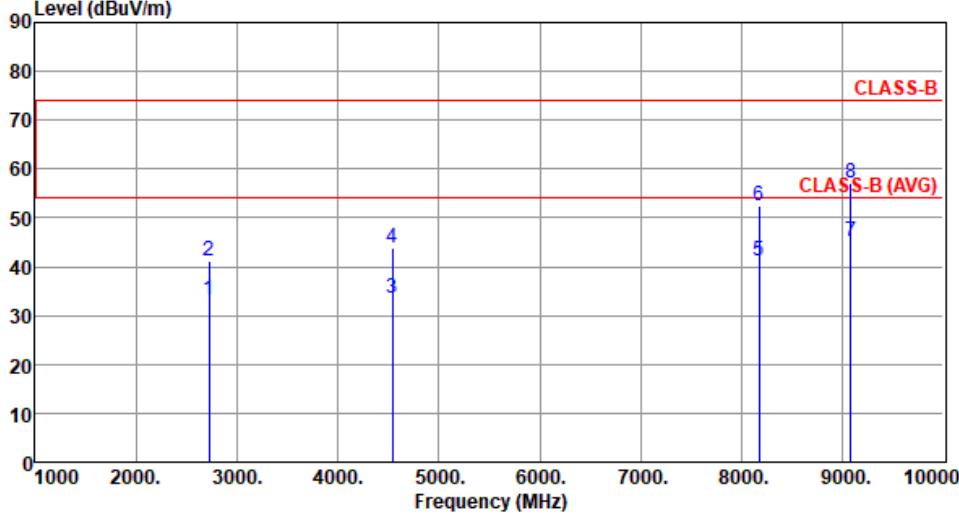
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.4.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

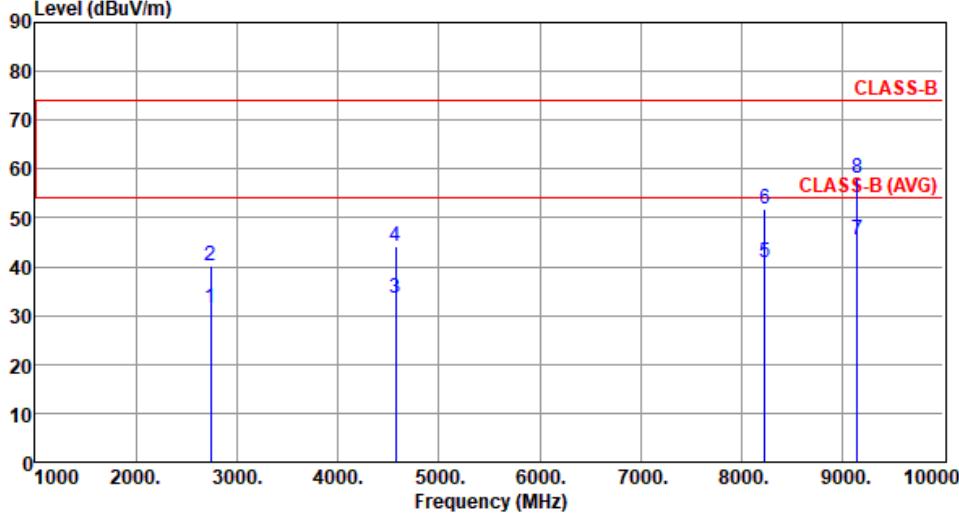
Modulation / SF	CSS / 12	Test Freq. (MHz)	903																																																																																														
Polarization	Horizontal																																																																																																
Test By	: Roger Lu	Temperature(°C):25	Humidity(%):63																																																																																														
																																																																																																	
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>dB</th> <th>reading</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2709.00</td> <td>36.19</td> <td>54.00</td> <td>-17.81</td> <td>38.45</td> <td>-2.26</td> <td>Average</td> <td>100</td> <td>185</td> </tr> <tr> <td>2</td> <td>2709.00</td> <td>43.05</td> <td>74.00</td> <td>-30.95</td> <td>45.31</td> <td>-2.26</td> <td>Peak</td> <td>100</td> <td>185</td> </tr> <tr> <td>3</td> <td>4515.00</td> <td>33.98</td> <td>54.00</td> <td>-20.02</td> <td>31.29</td> <td>2.69</td> <td>Average</td> <td>216</td> <td>177</td> </tr> <tr> <td>4</td> <td>4515.00</td> <td>44.07</td> <td>74.00</td> <td>-29.93</td> <td>41.38</td> <td>2.69</td> <td>Peak</td> <td>216</td> <td>177</td> </tr> <tr> <td>5</td> <td>8127.00</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>30.23</td> <td>10.01</td> <td>Average</td> <td>130</td> <td>276</td> </tr> <tr> <td>6</td> <td>8127.00</td> <td>52.16</td> <td>74.00</td> <td>-21.84</td> <td>42.15</td> <td>10.01</td> <td>Peak</td> <td>130</td> <td>276</td> </tr> <tr> <td>7</td> <td>9030.00</td> <td>41.83</td> <td>54.00</td> <td>-12.17</td> <td>30.25</td> <td>11.58</td> <td>Average</td> <td>100</td> <td>19</td> </tr> <tr> <td>8</td> <td>9030.00</td> <td>54.15</td> <td>74.00</td> <td>-19.85</td> <td>42.57</td> <td>11.58</td> <td>Peak</td> <td>100</td> <td>19</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA Factor	Remark	ANT High	Turn Table	MHz	level	dB	reading		cm	deg	1	2709.00	36.19	54.00	-17.81	38.45	-2.26	Average	100	185	2	2709.00	43.05	74.00	-30.95	45.31	-2.26	Peak	100	185	3	4515.00	33.98	54.00	-20.02	31.29	2.69	Average	216	177	4	4515.00	44.07	74.00	-29.93	41.38	2.69	Peak	216	177	5	8127.00	40.24	54.00	-13.76	30.23	10.01	Average	130	276	6	8127.00	52.16	74.00	-21.84	42.15	10.01	Peak	130	276	7	9030.00	41.83	54.00	-12.17	30.25	11.58	Average	100	19	8	9030.00	54.15	74.00	-19.85	42.57	11.58	Peak	100	19
Freq.	Emission Limit	Margin	SA Factor	Remark	ANT High	Turn Table																																																																																											
MHz	level	dB	reading		cm	deg																																																																																											
1	2709.00	36.19	54.00	-17.81	38.45	-2.26	Average	100	185																																																																																								
2	2709.00	43.05	74.00	-30.95	45.31	-2.26	Peak	100	185																																																																																								
3	4515.00	33.98	54.00	-20.02	31.29	2.69	Average	216	177																																																																																								
4	4515.00	44.07	74.00	-29.93	41.38	2.69	Peak	216	177																																																																																								
5	8127.00	40.24	54.00	-13.76	30.23	10.01	Average	130	276																																																																																								
6	8127.00	52.16	74.00	-21.84	42.15	10.01	Peak	130	276																																																																																								
7	9030.00	41.83	54.00	-12.17	30.25	11.58	Average	100	19																																																																																								
8	9030.00	54.15	74.00	-19.85	42.57	11.58	Peak	100	19																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																	

Modulation / SF	CSS / 12	Test Freq. (MHz)	903																																																																																																		
Polarization	Vertical																																																																																																				
Test By	:Roger Lu	Temperature(°C):25	Humidity(%):63																																																																																																		
																																																																																																					
<table border="1"> <thead> <tr> <th></th> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th></th> <th>level MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2709.00</td> <td>30.30</td> <td>54.00</td> <td>-23.70</td> <td>32.56</td> <td>-2.26</td> <td>Average</td> <td>111</td> <td>227</td> </tr> <tr> <td>2</td> <td>2709.00</td> <td>39.89</td> <td>74.00</td> <td>-34.11</td> <td>42.15</td> <td>-2.26</td> <td>Peak</td> <td>111</td> <td>227</td> </tr> <tr> <td>3</td> <td>4515.00</td> <td>33.14</td> <td>54.00</td> <td>-20.86</td> <td>30.45</td> <td>2.69</td> <td>Average</td> <td>100</td> <td>213</td> </tr> <tr> <td>4</td> <td>4515.00</td> <td>44.05</td> <td>74.00</td> <td>-29.95</td> <td>41.36</td> <td>2.69</td> <td>Peak</td> <td>100</td> <td>213</td> </tr> <tr> <td>5</td> <td>8127.00</td> <td>41.06</td> <td>54.00</td> <td>-12.94</td> <td>31.05</td> <td>10.01</td> <td>Average</td> <td>211</td> <td>226</td> </tr> <tr> <td>6</td> <td>8127.00</td> <td>52.10</td> <td>74.00</td> <td>-21.90</td> <td>42.09</td> <td>10.01</td> <td>Peak</td> <td>211</td> <td>226</td> </tr> <tr> <td>7</td> <td>9030.00</td> <td>45.23</td> <td>54.00</td> <td>-8.77</td> <td>33.65</td> <td>11.58</td> <td>Average</td> <td>188</td> <td>35</td> </tr> <tr> <td>8</td> <td>9030.00</td> <td>57.38</td> <td>74.00</td> <td>-16.62</td> <td>45.80</td> <td>11.58</td> <td>Peak</td> <td>188</td> <td>35</td> </tr> </tbody> </table>					Freq.	Emission Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		level MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg	1	2709.00	30.30	54.00	-23.70	32.56	-2.26	Average	111	227	2	2709.00	39.89	74.00	-34.11	42.15	-2.26	Peak	111	227	3	4515.00	33.14	54.00	-20.86	30.45	2.69	Average	100	213	4	4515.00	44.05	74.00	-29.95	41.36	2.69	Peak	100	213	5	8127.00	41.06	54.00	-12.94	31.05	10.01	Average	211	226	6	8127.00	52.10	74.00	-21.90	42.09	10.01	Peak	211	226	7	9030.00	45.23	54.00	-8.77	33.65	11.58	Average	188	35	8	9030.00	57.38	74.00	-16.62	45.80	11.58	Peak	188	35
	Freq.	Emission Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																													
	level MHz	dBuV/m	dBuV/m	dB	dBuV		cm	deg																																																																																													
1	2709.00	30.30	54.00	-23.70	32.56	-2.26	Average	111	227																																																																																												
2	2709.00	39.89	74.00	-34.11	42.15	-2.26	Peak	111	227																																																																																												
3	4515.00	33.14	54.00	-20.86	30.45	2.69	Average	100	213																																																																																												
4	4515.00	44.05	74.00	-29.95	41.36	2.69	Peak	100	213																																																																																												
5	8127.00	41.06	54.00	-12.94	31.05	10.01	Average	211	226																																																																																												
6	8127.00	52.10	74.00	-21.90	42.09	10.01	Peak	211	226																																																																																												
7	9030.00	45.23	54.00	-8.77	33.65	11.58	Average	188	35																																																																																												
8	9030.00	57.38	74.00	-16.62	45.80	11.58	Peak	188	35																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																					

Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8
Polarization	Horizontal		
Test By	:Roger Lu	Temperature(°C):25	Humidity(%):63
			
Freq. Emission Limit Margin SA Factor Remark ANT Turn level level reading Factor MHz dBuV/m dB dB dB 1 2723.40 39.57 54.00 -14.43 41.78 -2.21 Average 100 189 2 2723.40 46.23 74.00 -27.77 48.44 -2.21 Peak 100 189 3 4539.00 34.02 54.00 -19.98 31.26 2.76 Average 226 173 4 4539.00 44.24 74.00 -29.76 41.48 2.76 Peak 226 173 5 8170.20 40.95 54.00 -13.05 31.05 9.90 Average 140 281 6 8170.20 52.13 74.00 -21.87 42.23 9.90 Peak 140 281 7 9078.00 42.13 54.00 -11.87 30.25 11.88 Average 100 15 8 9078.00 54.23 74.00 -19.77 42.35 11.88 Peak 100 15			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8																																																																																																											
Polarization	Vertical																																																																																																													
Test By	:Roger Lu	Temperature(°C):25	Humidity(%):63																																																																																																											
																																																																																																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th><th style="text-align: left; padding-bottom: 2px;">Emission</th><th style="text-align: left; padding-bottom: 2px;">Limit</th><th style="text-align: left; padding-bottom: 2px;">Margin</th><th style="text-align: left; padding-bottom: 2px;">SA</th><th style="text-align: left; padding-bottom: 2px;">Factor</th><th style="text-align: left; padding-bottom: 2px;">Remark</th><th style="text-align: left; padding-bottom: 2px;">ANT</th><th style="text-align: left; padding-bottom: 2px;">Turn</th></tr> <tr> <th style="text-align: left;">MHz</th><th style="text-align: left;">level</th><th style="text-align: left;">dBuV/m</th><th style="text-align: left;">Margin</th><th style="text-align: left;">reading</th><th style="text-align: left;">Factor</th><th style="text-align: left;">Remark</th><th style="text-align: left;">High</th><th style="text-align: left;">Table</th></tr> <tr> <th></th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2723.40</td><td>33.24</td><td>54.00</td><td>-20.76</td><td>35.45</td><td>-2.21</td><td>Average</td><td>115</td><td>226</td></tr> <tr> <td>2</td><td>2723.40</td><td>41.24</td><td>74.00</td><td>-32.76</td><td>43.45</td><td>-2.21</td><td>Peak</td><td>115</td><td>226</td></tr> <tr> <td>3</td><td>4539.00</td><td>33.50</td><td>54.00</td><td>-20.50</td><td>30.74</td><td>2.76</td><td>Average</td><td>105</td><td>216</td></tr> <tr> <td>4</td><td>4539.00</td><td>43.91</td><td>74.00</td><td>-30.09</td><td>41.15</td><td>2.76</td><td>Peak</td><td>105</td><td>216</td></tr> <tr> <td>5</td><td>8170.20</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>31.26</td><td>9.90</td><td>Average</td><td>225</td><td>224</td></tr> <tr> <td>6</td><td>8170.20</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>42.46</td><td>9.90</td><td>Peak</td><td>225</td><td>224</td></tr> <tr> <td>7</td><td>9078.00</td><td>45.30</td><td>54.00</td><td>-8.70</td><td>33.42</td><td>11.88</td><td>Average</td><td>211</td><td>33</td></tr> <tr> <td>8</td><td>9078.00</td><td>57.24</td><td>74.00</td><td>-16.76</td><td>45.36</td><td>11.88</td><td>Peak</td><td>211</td><td>33</td></tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	Margin	reading	Factor	Remark	High	Table				dB	dBuV	dB		cm	deg	1	2723.40	33.24	54.00	-20.76	35.45	-2.21	Average	115	226	2	2723.40	41.24	74.00	-32.76	43.45	-2.21	Peak	115	226	3	4539.00	33.50	54.00	-20.50	30.74	2.76	Average	105	216	4	4539.00	43.91	74.00	-30.09	41.15	2.76	Peak	105	216	5	8170.20	41.16	54.00	-12.84	31.26	9.90	Average	225	224	6	8170.20	52.36	74.00	-21.64	42.46	9.90	Peak	225	224	7	9078.00	45.30	54.00	-8.70	33.42	11.88	Average	211	33	8	9078.00	57.24	74.00	-16.76	45.36	11.88	Peak	211	33
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																						
MHz	level	dBuV/m	Margin	reading	Factor	Remark	High	Table																																																																																																						
			dB	dBuV	dB		cm	deg																																																																																																						
1	2723.40	33.24	54.00	-20.76	35.45	-2.21	Average	115	226																																																																																																					
2	2723.40	41.24	74.00	-32.76	43.45	-2.21	Peak	115	226																																																																																																					
3	4539.00	33.50	54.00	-20.50	30.74	2.76	Average	105	216																																																																																																					
4	4539.00	43.91	74.00	-30.09	41.15	2.76	Peak	105	216																																																																																																					
5	8170.20	41.16	54.00	-12.84	31.26	9.90	Average	225	224																																																																																																					
6	8170.20	52.36	74.00	-21.64	42.46	9.90	Peak	225	224																																																																																																					
7	9078.00	45.30	54.00	-8.70	33.42	11.88	Average	211	33																																																																																																					
8	9078.00	57.24	74.00	-16.76	45.36	11.88	Peak	211	33																																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																														

Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2																																																																																									
Polarization	Horizontal																																																																																											
Test By	:Roger Lu	Temperature(°C):25	Humidity(%):63																																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. level MHz</th> <th>Emission Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2742.60</td> <td>37.41</td> <td>54.00</td> <td>-16.59</td> <td>39.56</td> <td>-2.15</td> <td>Average</td> <td>100</td> <td>188</td> </tr> <tr> <td>2</td> <td>2742.60</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>46.26</td> <td>-2.15</td> <td>Peak</td> <td>100</td> <td>188</td> </tr> <tr> <td>3</td> <td>4571.00</td> <td>33.93</td> <td>54.00</td> <td>-20.07</td> <td>31.05</td> <td>2.88</td> <td>Average</td> <td>220</td> <td>175</td> </tr> <tr> <td>4</td> <td>4571.00</td> <td>44.14</td> <td>74.00</td> <td>-29.86</td> <td>41.26</td> <td>2.88</td> <td>Peak</td> <td>220</td> <td>175</td> </tr> <tr> <td>5</td> <td>8227.80</td> <td>40.20</td> <td>54.00</td> <td>-13.80</td> <td>30.49</td> <td>9.71</td> <td>Average</td> <td>135</td> <td>279</td> </tr> <tr> <td>6</td> <td>8227.80</td> <td>51.81</td> <td>74.00</td> <td>-22.19</td> <td>42.10</td> <td>9.71</td> <td>Peak</td> <td>135</td> <td>279</td> </tr> <tr> <td>7</td> <td>9142.00</td> <td>42.53</td> <td>54.00</td> <td>-11.47</td> <td>30.24</td> <td>12.29</td> <td>Average</td> <td>100</td> <td>16</td> </tr> <tr> <td>8</td> <td>9142.00</td> <td>54.70</td> <td>74.00</td> <td>-19.30</td> <td>42.41</td> <td>12.29</td> <td>Peak</td> <td>100</td> <td>16</td> </tr> </tbody> </table>					Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2742.60	37.41	54.00	-16.59	39.56	-2.15	Average	100	188	2	2742.60	44.11	74.00	-29.89	46.26	-2.15	Peak	100	188	3	4571.00	33.93	54.00	-20.07	31.05	2.88	Average	220	175	4	4571.00	44.14	74.00	-29.86	41.26	2.88	Peak	220	175	5	8227.80	40.20	54.00	-13.80	30.49	9.71	Average	135	279	6	8227.80	51.81	74.00	-22.19	42.10	9.71	Peak	135	279	7	9142.00	42.53	54.00	-11.47	30.24	12.29	Average	100	16	8	9142.00	54.70	74.00	-19.30	42.41	12.29	Peak	100	16
	Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																																				
1	2742.60	37.41	54.00	-16.59	39.56	-2.15	Average	100	188																																																																																			
2	2742.60	44.11	74.00	-29.89	46.26	-2.15	Peak	100	188																																																																																			
3	4571.00	33.93	54.00	-20.07	31.05	2.88	Average	220	175																																																																																			
4	4571.00	44.14	74.00	-29.86	41.26	2.88	Peak	220	175																																																																																			
5	8227.80	40.20	54.00	-13.80	30.49	9.71	Average	135	279																																																																																			
6	8227.80	51.81	74.00	-22.19	42.10	9.71	Peak	135	279																																																																																			
7	9142.00	42.53	54.00	-11.47	30.24	12.29	Average	100	16																																																																																			
8	9142.00	54.70	74.00	-19.30	42.41	12.29	Peak	100	16																																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																												

Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2																																																																																										
Polarization	Vertical																																																																																												
Test By	:Roger Lu	Temperature(°C):25	Humidity(%):63																																																																																										
																																																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th style="text-align: center;">Freq. MHz</th> <th style="text-align: center;">Emission level dBuV/m</th> <th style="text-align: center;">Limit dBuV/m</th> <th style="text-align: center;">Margin dB</th> <th style="text-align: center;">SA reading dBuV</th> <th style="text-align: center;">Factor dB</th> <th>Remark</th> <th style="text-align: center;">ANT High cm</th> <th style="text-align: center;">Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td style="text-align: center;">2742.60</td> <td style="text-align: center;">31.46</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-22.54</td> <td style="text-align: center;">33.61</td> <td style="text-align: center;">-2.15</td> <td>Average</td> <td style="text-align: center;">116</td> <td style="text-align: center;">228</td> </tr> <tr> <td>2</td> <td style="text-align: center;">2742.60</td> <td style="text-align: center;">40.26</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-33.74</td> <td style="text-align: center;">42.41</td> <td style="text-align: center;">-2.15</td> <td>Peak</td> <td style="text-align: center;">116</td> <td style="text-align: center;">228</td> </tr> <tr> <td>3</td> <td style="text-align: center;">4571.00</td> <td style="text-align: center;">33.49</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-20.51</td> <td style="text-align: center;">30.61</td> <td style="text-align: center;">2.88</td> <td>Average</td> <td style="text-align: center;">100</td> <td style="text-align: center;">212</td> </tr> <tr> <td>4</td> <td style="text-align: center;">4571.00</td> <td style="text-align: center;">44.17</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-29.83</td> <td style="text-align: center;">41.29</td> <td style="text-align: center;">2.88</td> <td>Peak</td> <td style="text-align: center;">100</td> <td style="text-align: center;">212</td> </tr> <tr> <td>5</td> <td style="text-align: center;">8227.80</td> <td style="text-align: center;">40.83</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-13.17</td> <td style="text-align: center;">31.12</td> <td style="text-align: center;">9.71</td> <td>Average</td> <td style="text-align: center;">200</td> <td style="text-align: center;">225</td> </tr> <tr> <td>6</td> <td style="text-align: center;">8227.80</td> <td style="text-align: center;">51.85</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-22.15</td> <td style="text-align: center;">42.14</td> <td style="text-align: center;">9.71</td> <td>Peak</td> <td style="text-align: center;">200</td> <td style="text-align: center;">225</td> </tr> <tr> <td>7</td> <td style="text-align: center;">9142.00</td> <td style="text-align: center;">45.61</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-8.39</td> <td style="text-align: center;">33.32</td> <td style="text-align: center;">12.29</td> <td>Average</td> <td style="text-align: center;">211</td> <td style="text-align: center;">30</td> </tr> <tr> <td>8</td> <td style="text-align: center;">9142.00</td> <td style="text-align: center;">58.21</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-15.79</td> <td style="text-align: center;">45.92</td> <td style="text-align: center;">12.29</td> <td>Peak</td> <td style="text-align: center;">211</td> <td style="text-align: center;">30</td> </tr> </tbody> </table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2742.60	31.46	54.00	-22.54	33.61	-2.15	Average	116	228	2	2742.60	40.26	74.00	-33.74	42.41	-2.15	Peak	116	228	3	4571.00	33.49	54.00	-20.51	30.61	2.88	Average	100	212	4	4571.00	44.17	74.00	-29.83	41.29	2.88	Peak	100	212	5	8227.80	40.83	54.00	-13.17	31.12	9.71	Average	200	225	6	8227.80	51.85	74.00	-22.15	42.14	9.71	Peak	200	225	7	9142.00	45.61	54.00	-8.39	33.32	12.29	Average	211	30	8	9142.00	58.21	74.00	-15.79	45.92	12.29	Peak	211	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																																				
1	2742.60	31.46	54.00	-22.54	33.61	-2.15	Average	116	228																																																																																				
2	2742.60	40.26	74.00	-33.74	42.41	-2.15	Peak	116	228																																																																																				
3	4571.00	33.49	54.00	-20.51	30.61	2.88	Average	100	212																																																																																				
4	4571.00	44.17	74.00	-29.83	41.29	2.88	Peak	100	212																																																																																				
5	8227.80	40.83	54.00	-13.17	31.12	9.71	Average	200	225																																																																																				
6	8227.80	51.85	74.00	-22.15	42.14	9.71	Peak	200	225																																																																																				
7	9142.00	45.61	54.00	-8.39	33.32	12.29	Average	211	30																																																																																				
8	9142.00	58.21	74.00	-15.79	45.92	12.29	Peak	211	30																																																																																				

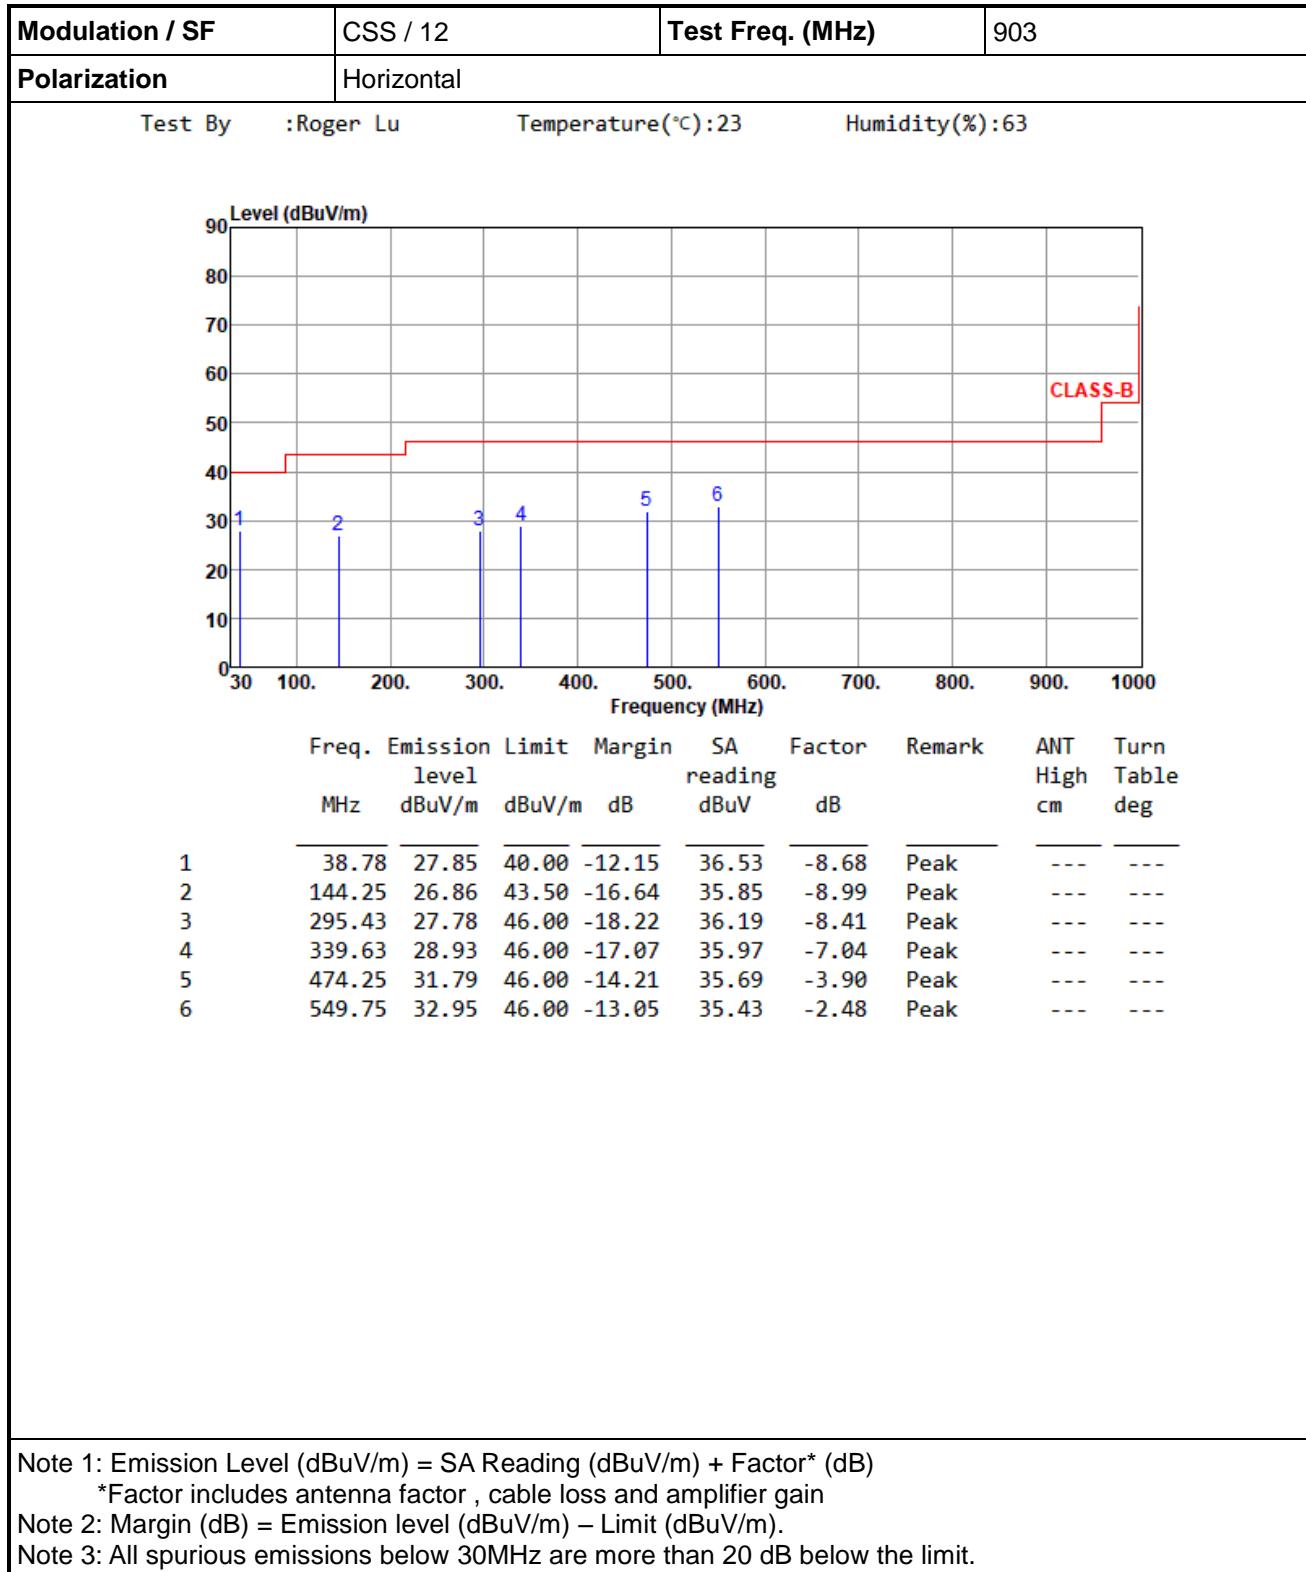
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

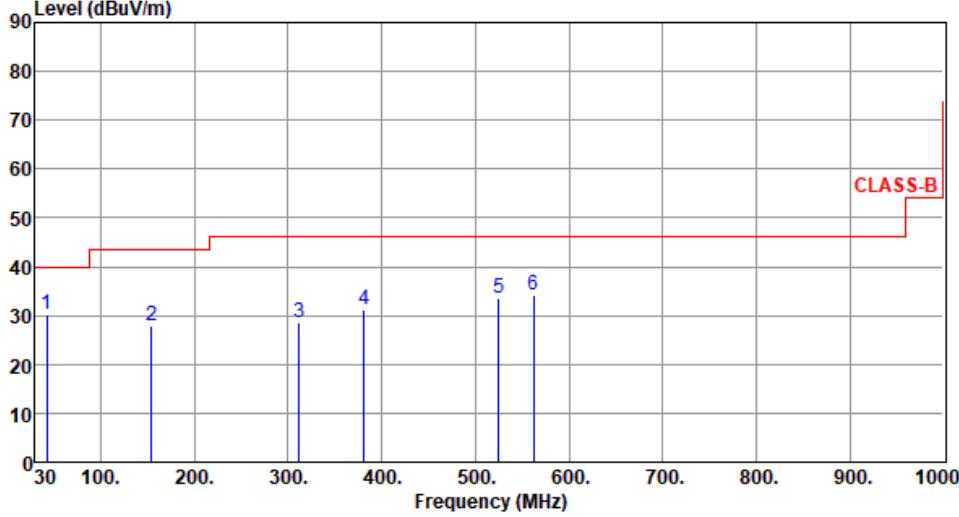
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Test configuration 2: model TBSL100

3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



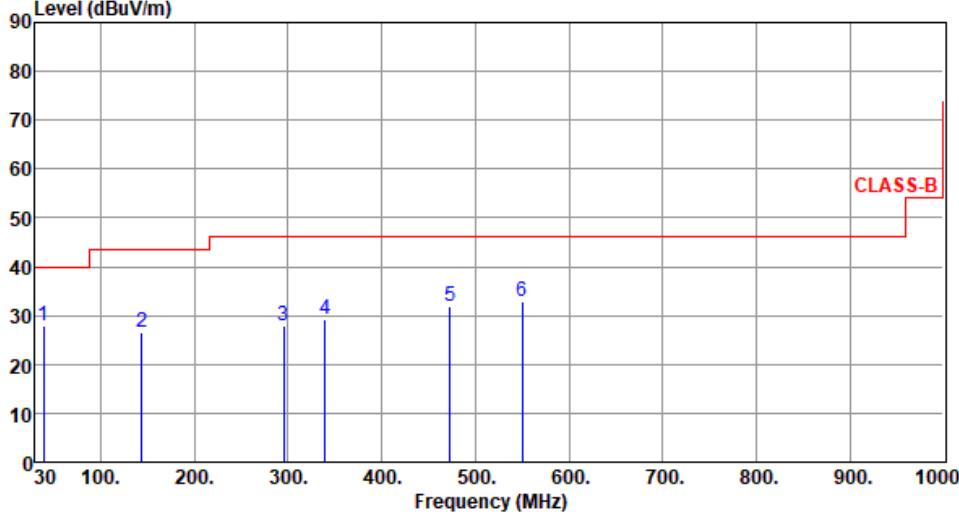
Modulation / SF	CSS / 12	Test Freq. (MHz)	903																																																															
Polarization	Vertical																																																																	
Test By	:Roger Lu	Temperature(°C):23	Humidity(%):63																																																															
																																																																		
<table border="1"> <thead> <tr> <th></th> <th>Freq. level MHz</th> <th>Emission Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>42.48</td> <td>30.23</td> <td>40.00</td> <td>-9.77</td> <td>38.44</td> <td>-8.21</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>154.33</td> <td>27.85</td> <td>43.50</td> <td>-15.65</td> <td>36.76</td> <td>-8.91</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>311.75</td> <td>28.52</td> <td>46.00</td> <td>-17.48</td> <td>36.31</td> <td>-7.79</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>381.36</td> <td>31.27</td> <td>46.00</td> <td>-14.73</td> <td>37.45</td> <td>-6.18</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>524.75</td> <td>33.45</td> <td>46.00</td> <td>-12.55</td> <td>36.45</td> <td>-3.00</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>562.58</td> <td>34.36</td> <td>46.00</td> <td>-11.64</td> <td>36.58</td> <td>-2.22</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>					Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	42.48	30.23	40.00	-9.77	38.44	-8.21	Peak	---	2	154.33	27.85	43.50	-15.65	36.76	-8.91	Peak	---	3	311.75	28.52	46.00	-17.48	36.31	-7.79	Peak	---	4	381.36	31.27	46.00	-14.73	37.45	-6.18	Peak	---	5	524.75	33.45	46.00	-12.55	36.45	-3.00	Peak	---	6	562.58	34.36	46.00	-11.64	36.58	-2.22	Peak	---
	Freq. level MHz	Emission Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	42.48	30.23	40.00	-9.77	38.44	-8.21	Peak	---																																																										
2	154.33	27.85	43.50	-15.65	36.76	-8.91	Peak	---																																																										
3	311.75	28.52	46.00	-17.48	36.31	-7.79	Peak	---																																																										
4	381.36	31.27	46.00	-14.73	37.45	-6.18	Peak	---																																																										
5	524.75	33.45	46.00	-12.55	36.45	-3.00	Peak	---																																																										
6	562.58	34.36	46.00	-11.64	36.58	-2.22	Peak	---																																																										

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

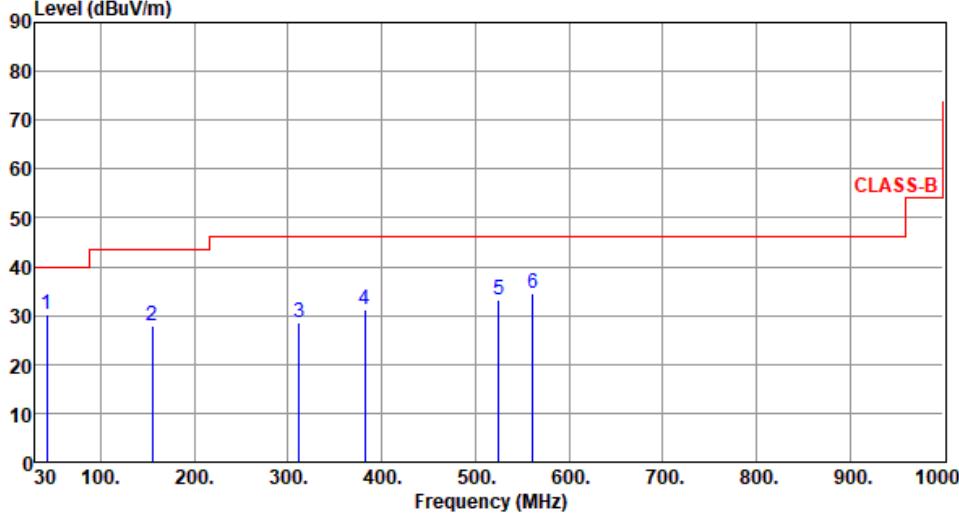
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8																																																																												
Polarization	Horizontal																																																																														
Test By	:Roger Lu	Temperature(°C):23	Humidity(%):63																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):63																																																																															
																																																																															
<table border="1"> <thead> <tr> <th></th> <th>Freq. (MHz)</th> <th>Emission level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>SA reading (dBuV)</th> <th>Factor (dB)</th> <th>Remark</th> <th>ANT High (cm)</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.72</td> <td>38.72</td> <td>27.92</td> <td>40.00</td> <td>-12.08</td> <td>36.61</td> <td>-8.69</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>143.66</td> <td>26.72</td> <td>26.72</td> <td>43.50</td> <td>-16.78</td> <td>35.71</td> <td>-8.99</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>295.52</td> <td>27.91</td> <td>27.91</td> <td>46.00</td> <td>-18.09</td> <td>36.32</td> <td>-8.41</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>339.47</td> <td>29.33</td> <td>29.33</td> <td>46.00</td> <td>-16.67</td> <td>36.39</td> <td>-7.06</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>473.29</td> <td>31.74</td> <td>31.74</td> <td>46.00</td> <td>-14.26</td> <td>35.66</td> <td>-3.92</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>549.95</td> <td>32.96</td> <td>32.96</td> <td>46.00</td> <td>-13.04</td> <td>35.44</td> <td>-2.48</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg	1	30.72	38.72	27.92	40.00	-12.08	36.61	-8.69	Peak	---	---	2	143.66	26.72	26.72	43.50	-16.78	35.71	-8.99	Peak	---	---	3	295.52	27.91	27.91	46.00	-18.09	36.32	-8.41	Peak	---	---	4	339.47	29.33	29.33	46.00	-16.67	36.39	-7.06	Peak	---	---	5	473.29	31.74	31.74	46.00	-14.26	35.66	-3.92	Peak	---	---	6	549.95	32.96	32.96	46.00	-13.04	35.44	-2.48	Peak	---	---
	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg																																																																						
1	30.72	38.72	27.92	40.00	-12.08	36.61	-8.69	Peak	---	---																																																																					
2	143.66	26.72	26.72	43.50	-16.78	35.71	-8.99	Peak	---	---																																																																					
3	295.52	27.91	27.91	46.00	-18.09	36.32	-8.41	Peak	---	---																																																																					
4	339.47	29.33	29.33	46.00	-16.67	36.39	-7.06	Peak	---	---																																																																					
5	473.29	31.74	31.74	46.00	-14.26	35.66	-3.92	Peak	---	---																																																																					
6	549.95	32.96	32.96	46.00	-13.04	35.44	-2.48	Peak	---	---																																																																					

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

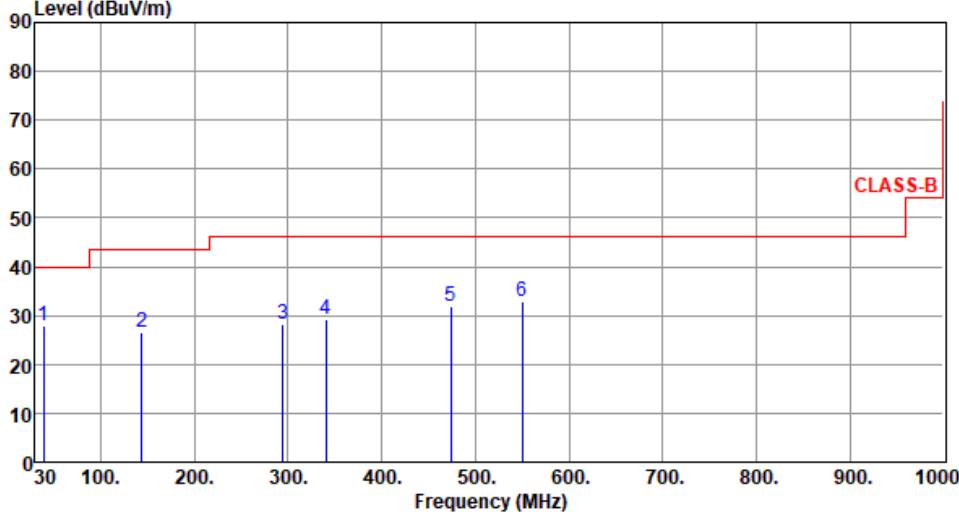
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):23	Humidity(%):63					
Test By :Roger Lu Temperature(°C):23 Humidity(%):63								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.71	30.32	40.00	-9.68	38.51	-8.19	Peak	---
2	155.11	27.74	43.50	-15.76	36.53	-8.79	Peak	---
3	311.52	28.56	46.00	-17.44	36.36	-7.80	Peak	---
4	382.29	31.36	46.00	-14.64	37.53	-6.17	Peak	---
5	524.71	33.28	46.00	-12.72	36.27	-2.99	Peak	---
6	561.71	34.63	46.00	-11.37	36.87	-2.24	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

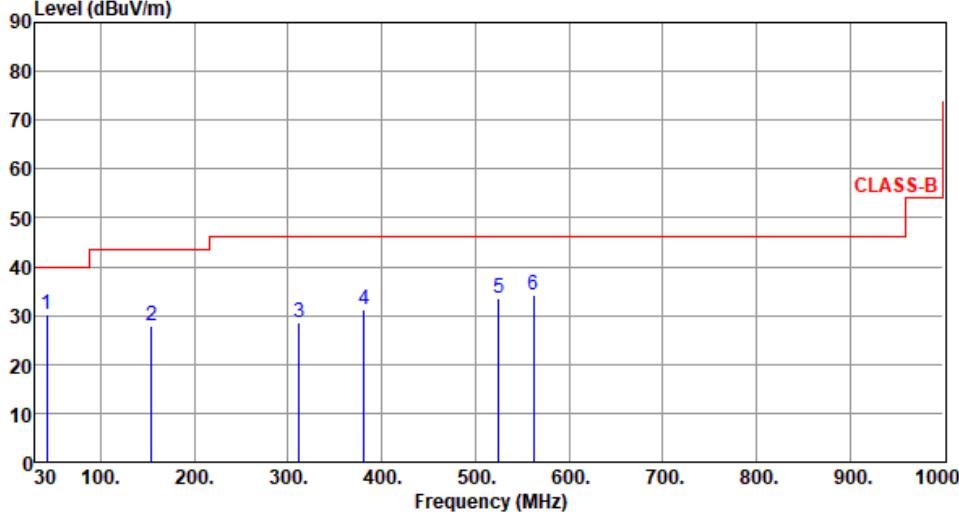
Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Horizontal							
Test By	:Roger Lu	Temperature(°C):23	Humidity(%):63					
Test By :Roger Lu Temperature(°C):23 Humidity(%):63								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.82	27.95	40.00	-12.05	36.63	-8.68	Peak	---
2	144.15	26.63	43.50	-16.87	35.62	-8.99	Peak	---
3	294.85	28.15	46.00	-17.85	36.57	-8.42	Peak	---
4	340.11	29.34	46.00	-16.66	36.37	-7.03	Peak	---
5	474.11	31.87	46.00	-14.13	35.78	-3.91	Peak	---
6	549.90	32.87	46.00	-13.13	35.35	-2.48	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):23	Humidity(%):63					
Test By :Roger Lu Temperature(°C):23 Humidity(%):63								
								
Freq.	Emission level MHz	Margin dBuV/m	SA reading dB	Factor dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.68	30.19	40.00	-9.81	38.38	-8.19	Peak	---
2	154.33	27.95	43.50	-15.55	36.86	-8.91	Peak	---
3	311.52	28.45	46.00	-17.55	36.25	-7.80	Peak	---
4	381.25	31.23	46.00	-14.77	37.41	-6.18	Peak	---
5	524.63	33.39	46.00	-12.61	36.38	-2.99	Peak	---
6	561.88	34.18	46.00	-11.82	36.41	-2.23	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

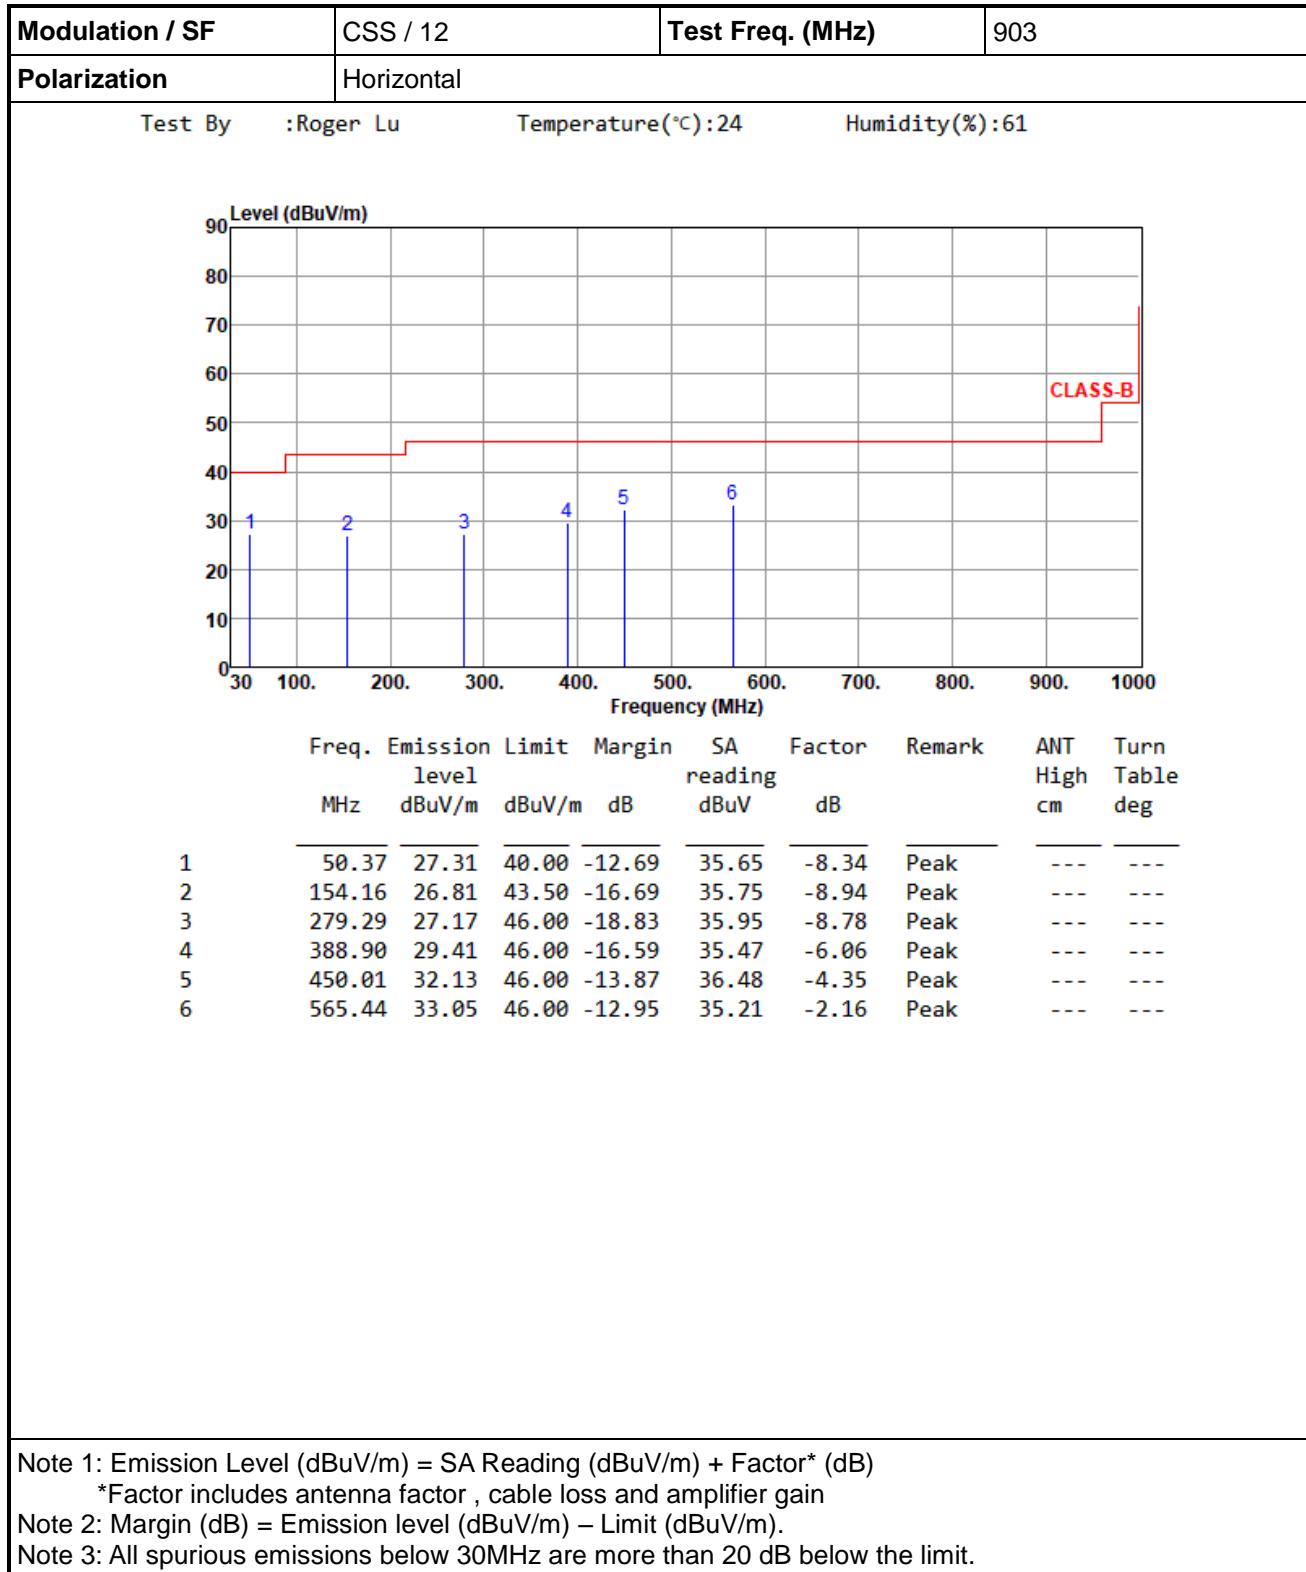
*Factor includes antenna factor , cable loss and amplifier gain

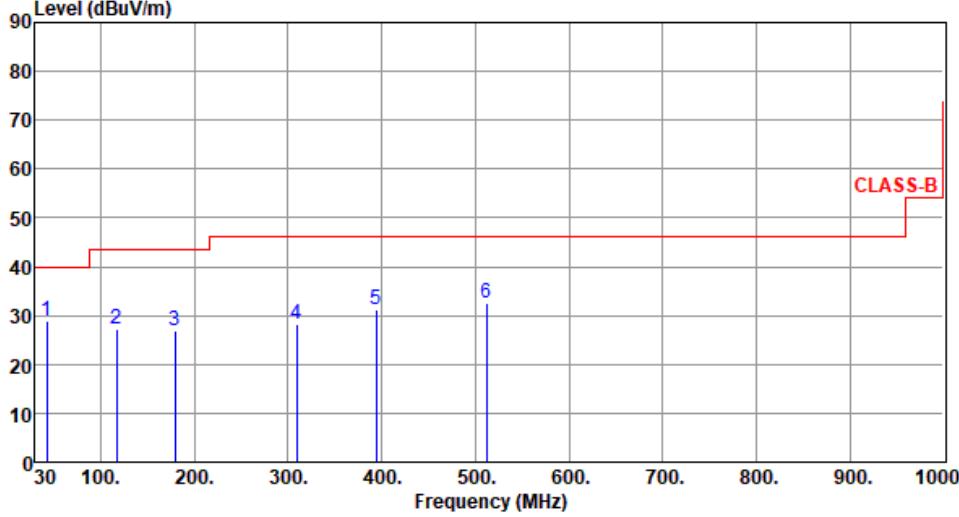
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Test configuration 3: model TBWL100

3.4.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)



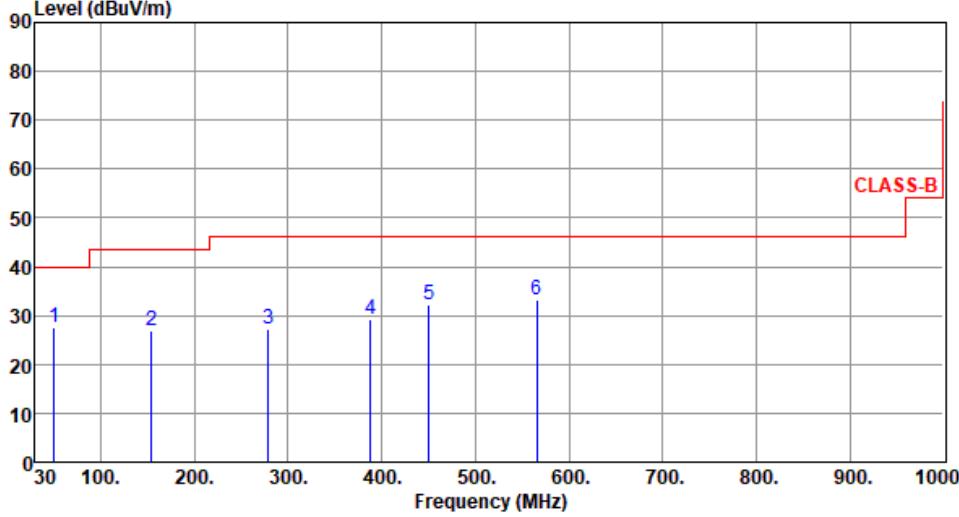
Modulation / SF	CSS / 12	Test Freq. (MHz)	903																																																																						
Polarization	Vertical																																																																								
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61																																																																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):61																																																																									
 CLASS-B																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. (MHz)</th> <th>Emission level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>SA reading (dBuV)</th> <th>Factor (dB)</th> <th>Remark</th> <th>ANT High (cm)</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>42.61</td> <td>28.81</td> <td>40.00</td> <td>-11.19</td> <td>37.01</td> <td>-8.20</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>117.30</td> <td>27.34</td> <td>43.50</td> <td>-16.16</td> <td>38.28</td> <td>-10.94</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>179.38</td> <td>26.83</td> <td>43.50</td> <td>-16.67</td> <td>37.16</td> <td>-10.33</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>309.36</td> <td>28.39</td> <td>46.00</td> <td>-17.61</td> <td>36.29</td> <td>-7.90</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>393.75</td> <td>31.08</td> <td>46.00</td> <td>-14.92</td> <td>37.03</td> <td>-5.95</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>512.09</td> <td>32.55</td> <td>46.00</td> <td>-13.45</td> <td>35.62</td> <td>-3.07</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg	1	42.61	28.81	40.00	-11.19	37.01	-8.20	Peak	---	---	2	117.30	27.34	43.50	-16.16	38.28	-10.94	Peak	---	---	3	179.38	26.83	43.50	-16.67	37.16	-10.33	Peak	---	---	4	309.36	28.39	46.00	-17.61	36.29	-7.90	Peak	---	---	5	393.75	31.08	46.00	-14.92	37.03	-5.95	Peak	---	---	6	512.09	32.55	46.00	-13.45	35.62	-3.07	Peak	---	---
	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	SA reading (dBuV)	Factor (dB)	Remark	ANT High (cm)	Turn Table deg																																																																
1	42.61	28.81	40.00	-11.19	37.01	-8.20	Peak	---	---																																																																
2	117.30	27.34	43.50	-16.16	38.28	-10.94	Peak	---	---																																																																
3	179.38	26.83	43.50	-16.67	37.16	-10.33	Peak	---	---																																																																
4	309.36	28.39	46.00	-17.61	36.29	-7.90	Peak	---	---																																																																
5	393.75	31.08	46.00	-14.92	37.03	-5.95	Peak	---	---																																																																
6	512.09	32.55	46.00	-13.45	35.62	-3.07	Peak	---	---																																																																

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

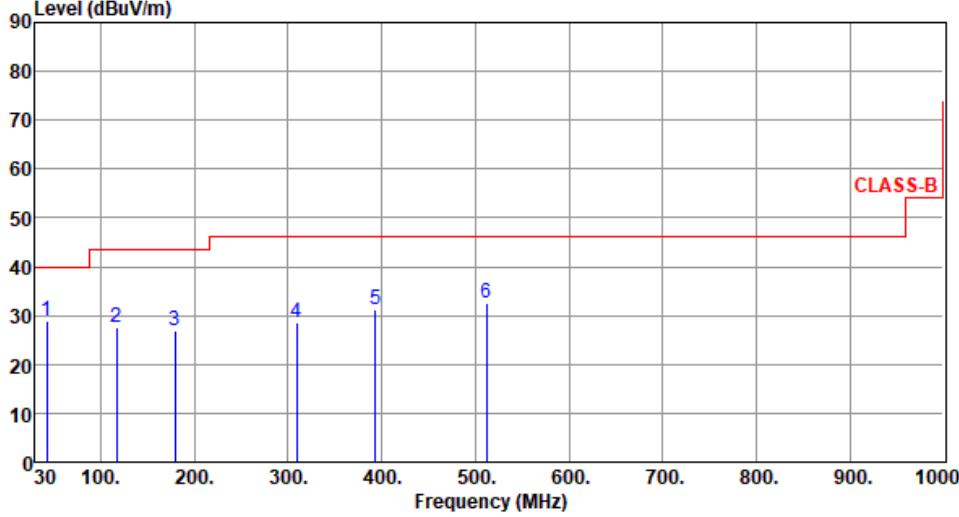
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8					
Polarization	Horizontal							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.46	27.42	40.00	-12.58	35.78	-8.36	Peak	---
2	154.22	26.79	43.50	-16.71	35.73	-8.94	Peak	---
3	279.31	27.25	46.00	-18.75	36.03	-8.78	Peak	---
4	388.46	29.31	46.00	-16.69	35.38	-6.07	Peak	---
5	450.19	32.28	46.00	-13.72	36.63	-4.35	Peak	---
6	565.55	33.21	46.00	-12.79	35.37	-2.16	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

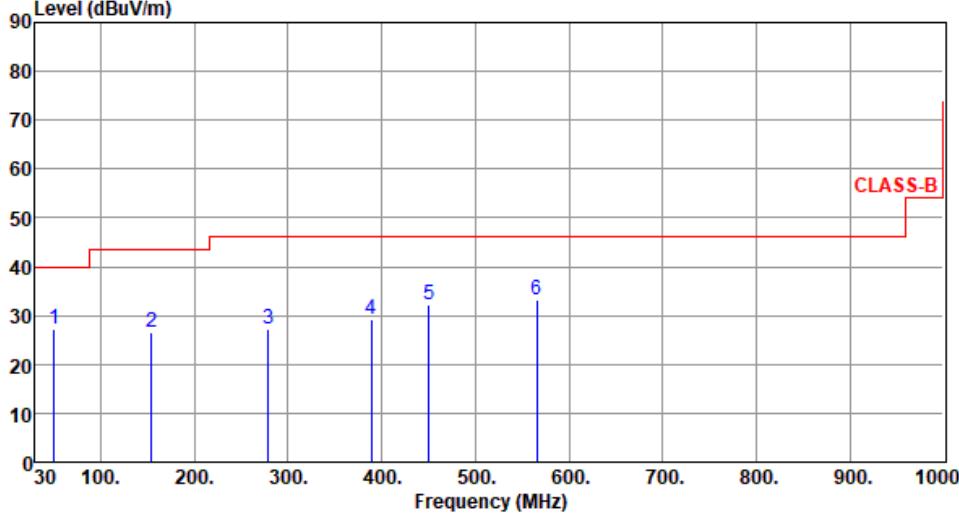
Modulation / SF	CSS / 12	Test Freq. (MHz)	907.8					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.54	28.74	40.00	-11.26	36.95	-8.21	Peak	---
2	117.26	27.46	43.50	-16.04	38.40	-10.94	Peak	---
3	179.49	26.74	43.50	-16.76	37.07	-10.33	Peak	---
4	309.42	28.42	46.00	-17.58	36.31	-7.89	Peak	---
5	393.69	31.25	46.00	-14.75	37.20	-5.95	Peak	---
6	512.19	32.64	46.00	-13.36	35.71	-3.07	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

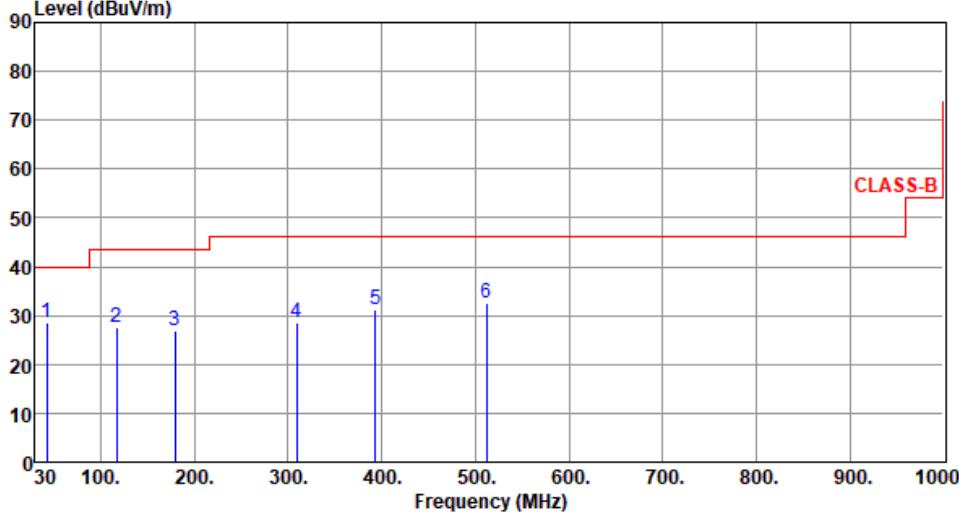
Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Horizontal							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.42	27.26	40.00	-12.74	35.61	-8.35	Peak	---
2	154.26	26.71	43.50	-16.79	35.64	-8.93	Peak	---
3	279.31	27.29	46.00	-18.71	36.07	-8.78	Peak	---
4	388.85	29.34	46.00	-16.66	35.40	-6.06	Peak	---
5	450.19	32.25	46.00	-13.75	36.60	-4.35	Peak	---
6	565.56	33.16	46.00	-12.84	35.32	-2.16	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	914.2					
Polarization	Vertical							
Test By	:Roger Lu	Temperature(°C):24	Humidity(%):61					
Test By :Roger Lu Temperature(°C):24 Humidity(%):61								
								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.53	28.71	40.00	-11.29	36.92	-8.21	Peak	---
2	117.25	27.48	43.50	-16.02	38.42	-10.94	Peak	---
3	179.49	26.75	43.50	-16.75	37.08	-10.33	Peak	---
4	309.48	28.42	46.00	-17.58	36.31	-7.89	Peak	---
5	393.66	31.25	46.00	-14.75	37.20	-5.95	Peak	---
6	512.19	32.64	46.00	-13.36	35.71	-3.07	Peak	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5 Emissions in Non-Restricted Frequency Bands

3.5.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

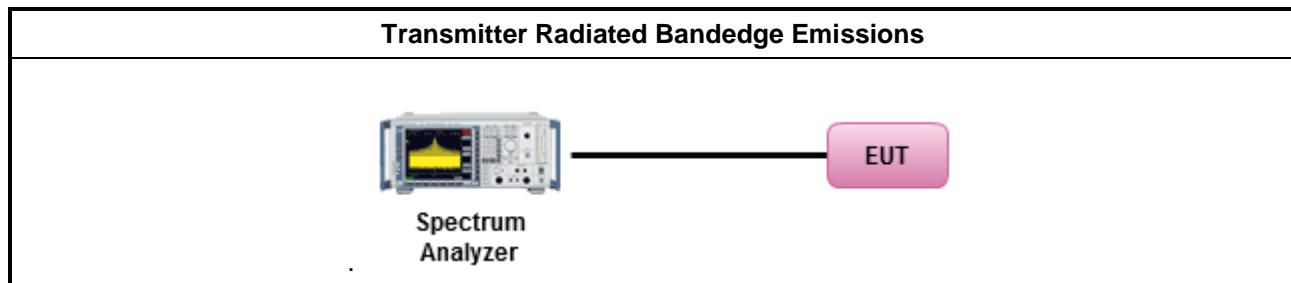
Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

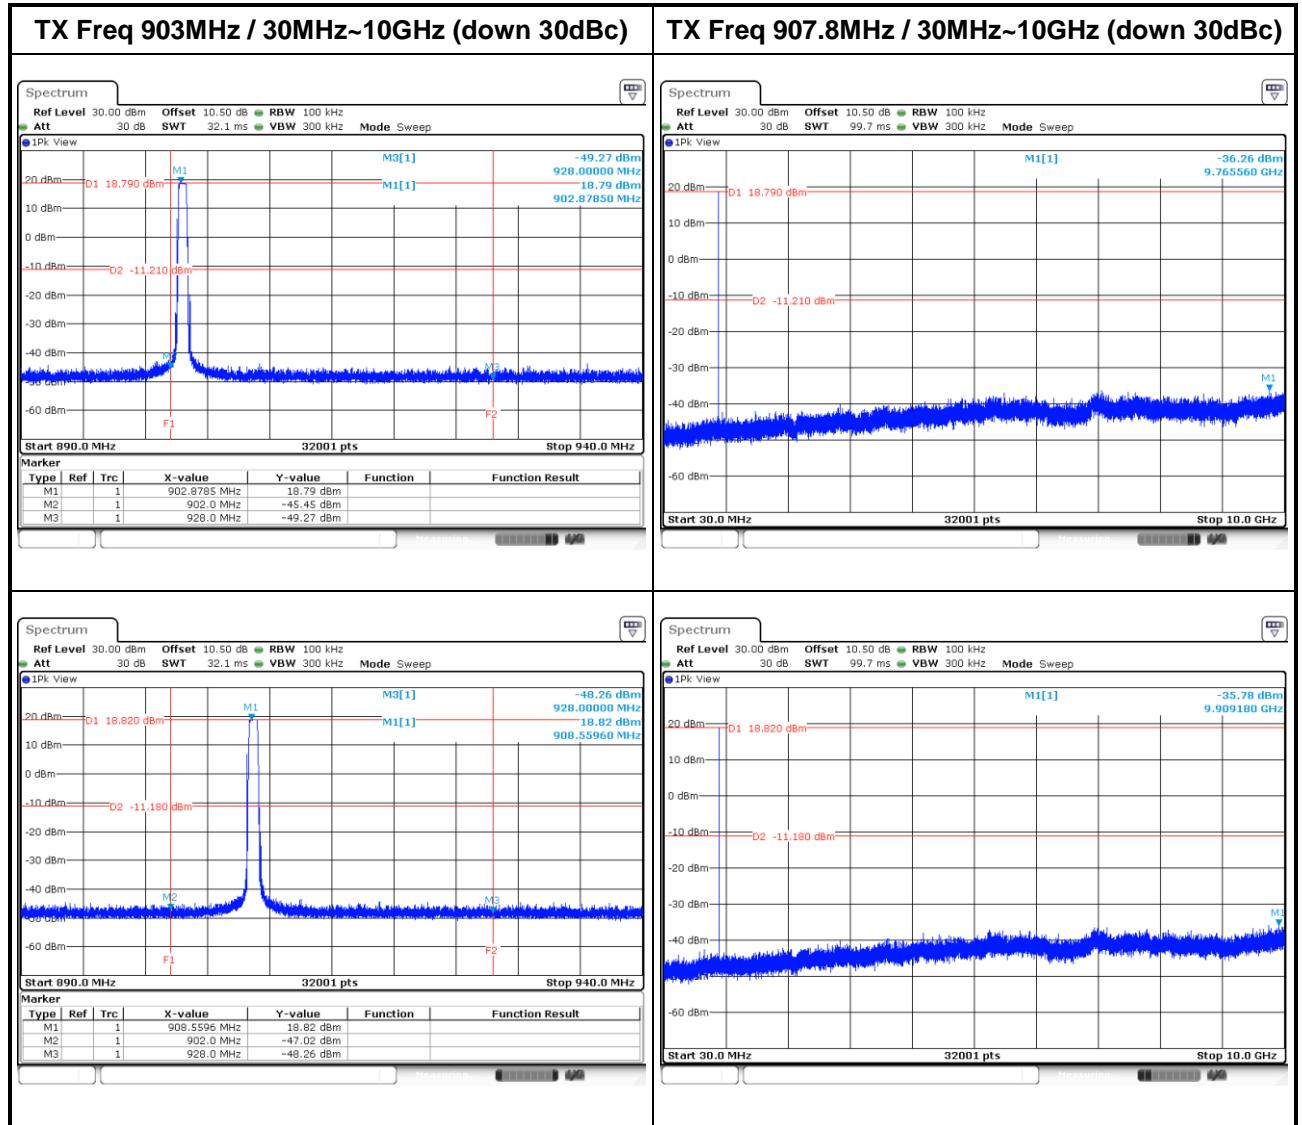
1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 10GHz
4. Use the peak marker function to determine the maximum amplitude level

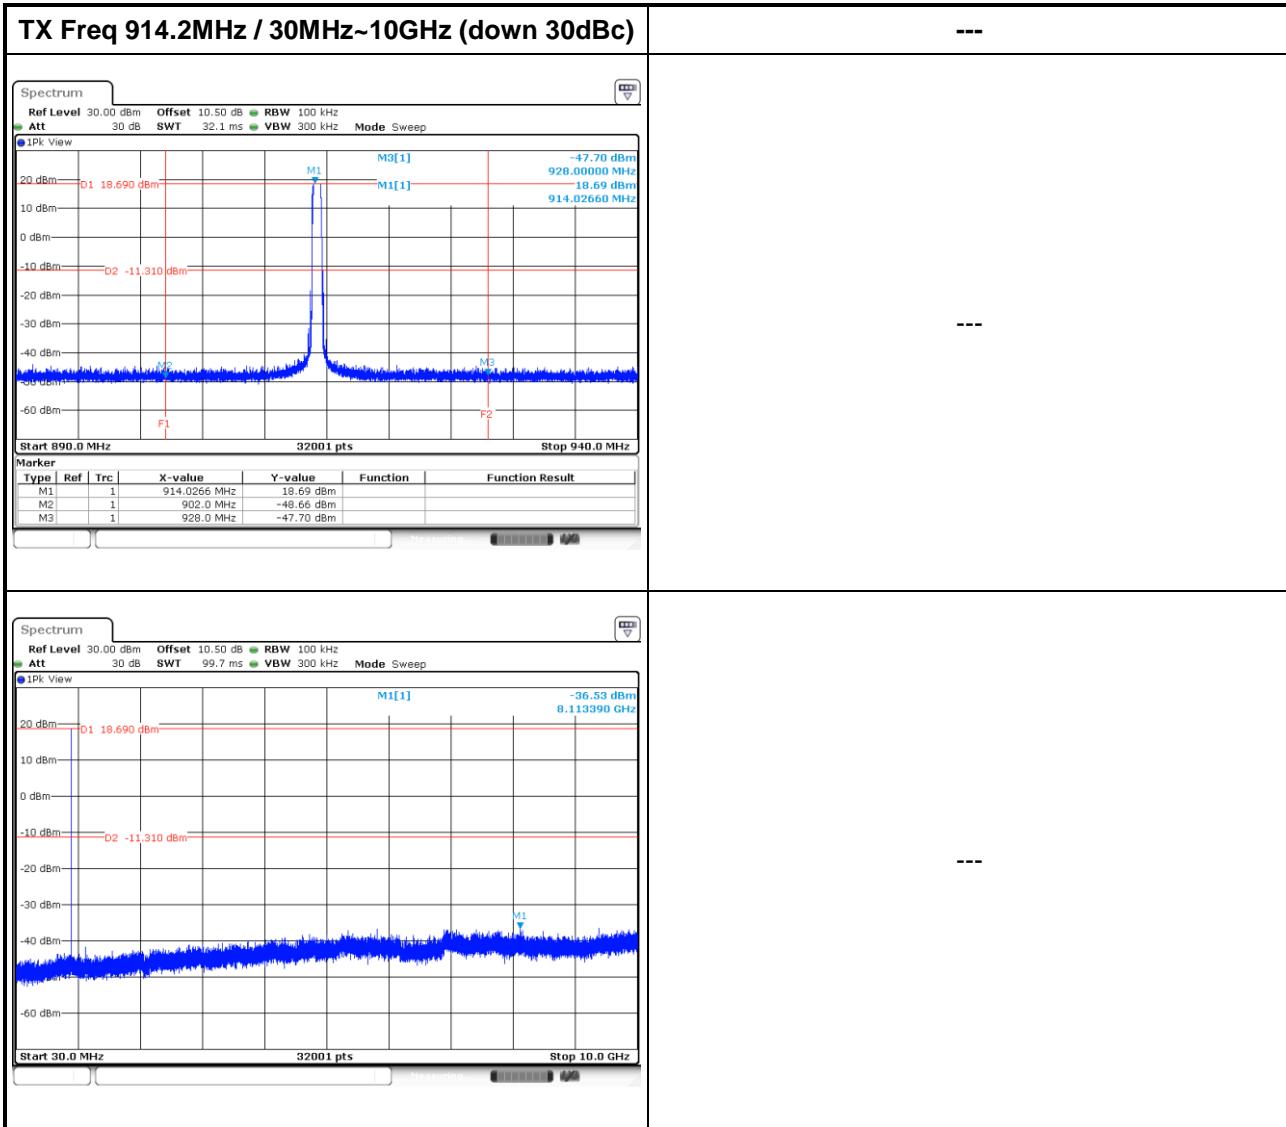
3.5.4 Test Setup



3.5.5 Unwanted Emissions into Non-Restricted Frequency Bands

Ambient Condition	23°C / 63%	Tested By	Brad Wu
-------------------	------------	-----------	---------





4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

—END—