

Report No.: AGC00200140802FE04 Page 1 of 68

FCC Test Report

Report No.: AGC00200140802FE04

FCC ID : 2AASJSMD-4516A

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Mobile Phone

BRAND NAME : DAEWOO

MODEL NAME : SMD-4516A

CLIENT : Daewoo International Corp.

DATE OF ISSUE : Aug.13, 2014

STANDARD(S) TEST PROCEDURE(S)FCC Part 15.247
KDB 558074 v03r02

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report No.: AGC00200140802FE04 Page 2 of 68

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug.13, 2014	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	ε
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	7
2.7. EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	g
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	g
6. TEST FACILITY	10
7. PEAK OUTPUT POWER	11
7.1. MEASUREMENT PROCEDURE	11
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6DB BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3. MEASUREMENT EQUIPMENT USED	24
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY.	
10.1 MEASUREMENT PROCEDURE	
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3 MEASUREMENT EQUIPMENT USED	31
10.4 LIMITS AND MEASUREMENT RESULT	31

11. RADIATED EMISSION	39
11.1. MEASUREMENT PROCEDURE	39
11.2. TEST SETUP	40
11.3. LIMITS AND MEASUREMENT RESULT	41
11.4. TEST RESULT	41
12. BAND EDGE EMISSION	50
12.1. MEASUREMENT PROCEDURE	50
12.2. TEST SET-UP	50
12.3. Radiated Test Result	51
12.4. Conducted Test Result	55
13. FCC LINE CONDUCTED EMISSION TEST	58
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST	58
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	58
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	60
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	62
APPENDIX B: PHOTOGRAPHS OF EUT	63

Page 5 of 68

1. VERIFICATION OF CONFORMITY

Applicant	Daewoo International Corp.			
Address	84-11, Namdaemunno 5-ga, Jung-gu, Seoul 100-753 Korea			
Manufacturer	SGMC Co., Ltd.			
Address	5F Media Tower, 108-9 Sungsan 1-dong, Mapo-gu, Seoul 121-844 Korea			
Product Designation	Mobile Phone			
Brand Name	DAEWOO			
Test Model	SMD-4516A			
Date of test	Aug.05, 2014 to Aug.13, 2014			
Deviation	None			
Condition of Test Sample	Normal			
Report Template	AGCRT-US-BGN/RF (2013-03-01)			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Matt Zhang Aug.13, 2014

Checked By

Kidd Yang Aug.13, 2014

Authorized By

Solger Zhang Aug.13, 2014

Page 6 of 68

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Mobile Phone". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz~2.462GHz			
Output Power	IEEE 802.11b:12.96dBm; IEEE 802.11g:9.76dBm;			
Output Fower	IEEE 802.11n(20):9.45dBm; IEEE 802.11n(40):6.43dBm			
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)			
Number of channels	11			
Hardware Version	97055-1-50			
Software Version	N/A			
Antenna Designation	Integrated Antenna			
Antenna Gain	1.0dBi			
Power Supply	DC3.7V by Built-in Li-ion Battery			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11 For 40MHZ bandwidth system use Channel 3 to Channel 9

Page 7 of 68

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NCBPS NDBPS		Da rate(N 800r	/lbps)
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AASJSMD-4516A** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 DTS Meas Guidance v03r02.

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 8 of 68

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB Radiated measurement: +/- 3.2dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating

Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate

(13.5/27/40.5/54/81/108/121.5/135)

Note:


- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Page 9 of 68

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Mobile Phone	SMD-4516A	FCC ID: 2AASJSMD-4516A	EUT
2	Adapter	SMD-4516A	DC5V / 500mA	Accessory
3	Battery	SMD-4516A	DC3.7V / 1400mAh	Accessory
4	Earphone	SMD-4516A	N/A	Accessory
5	USB Cable	SMD-4516A	N/A	Accessory

Note: All the accessories have been used during the test in conduction emission test.

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

Note: The EUT received power from DC3.7V lithium battery.

Report No.: AGC00200140802FE04 Page 10 of 68

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China		
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.		

ALL TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/25/2014	07/24/2015
Power Meter	Agilent	N1911A	MY45100361	04/20/2014	04/20/2015
RF attenuator	N/A	RFA20db	68	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US41421290	07/25/2014	07/24/2015
Amplifier	EM	EM30180	0607030	02/27/2014	02/26/2015
Horn Antenna	EM	EM-AH-10180	67	04/19/2014	04/18/2015
Horn Antenna	A.H. Systems Inc.	SAS-574		07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/25/2014	07/24/2015
Biological Antenna	A.H. Systems Inc.	SAS-521-4	26	06/06/2014	06/05/2015
Loop Antenna	A.H.	SAS-526B	264	07/13/2014	07/12/2015
LISN	R&S	ESH3-Z5	8389791009	07/25/2014	07/24/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Page 11 of 68

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Use a direct connection between the antenna port of the transmitter and the power meter, through suitable attenuation
- 2. Set the bandwidth of the power meter is 40MHz
- 3. Record the peak value

For average power test:


- 1. Connect EUT RF output port to power probe through an RF attenuator.
- 2. Connect the power probe to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.
- 5. The maximum peak power shall be less 1 Watt (30dBm).

Note: The EUT was tested according to KDB 558074v03r02 for compliance to FCC 47CFR 15.247 requirements.


Page 12 of 68

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP



AVERAGE POWER SETUP



Page 13 of 68

7.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	10.98	12.96	30	Pass
2.437	9.85	11.83	30	Pass
2.462	9.81	11.79	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	7.78	9.76	30	Pass
2.437	7.67	9.65	30	Pass
2.462	7.64	9.62	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	7.47	9.45	30	Pass
2.437	7.43	9.41	30	Pass
2.462	7.3	9.28	30	Pass

Report No.: AGC00200140802FE04 Page 14 of 68

TEST ITEM	PEAK POWER
TEST MODE	802.11n 40 with data rate 13.5

	LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	4.45	6.43	30	Pass
2.437	4.38	6.36	30	Pass
2.452	4.3	6.28	30	Pass

Page 15 of 68


8. 6DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW \geqslant 3 \times RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

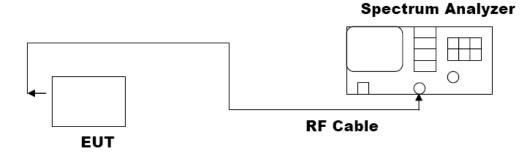

Page 16 of 68

8.3. LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11b with data rate 11

LIMITS AND MEASUREMENT RESULT			
Applicable Limite		Applicable Limits	
Applicable Limits	Test Data (MHz) Criteria		Criteria
	Low Channel	9.132	PASS
>500KHZ	Middle Channel	9.125	PASS
	High Channel	9.149	PASS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11g with data rate 54

LIMITS AND MEASUREMENT RESULT			
Applicable Limite	Applicable Limits		
Applicable Limits	Test Data (MHz)		Criteria
	Low Channel	15.344	PASS
>500KHZ	Middle Channel	15.676	PASS
	High Channel	15.507	PASS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 20 with data rate 65

LIMITS AND MEASUREMENT RESULT			
Appliaghla Limita	Applicable Limits		
Applicable Limits	Test Data (MHz)		Criteria
	Low Channel	15.129	PASS
>500KHZ	Middle Channel	16.767	PASS
	High Channel	16.669	PASS


Page 17 of 68

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 40 with data rate 135


LIMITS AND MEASUREMENT RESULT			
Annliachta Limita	Applicable Limits		
Applicable Limits	Test Data (MHz)		Criteria
>500KHZ	Low Channel	35.245	PASS
	Middle Channel	35.172	PASS
	High Channel	35.178	PASS

Page 18 of 68

802.11b TEST RESULTTEST PLOT OF BANDWIDTH FOR LOW CHANNEL

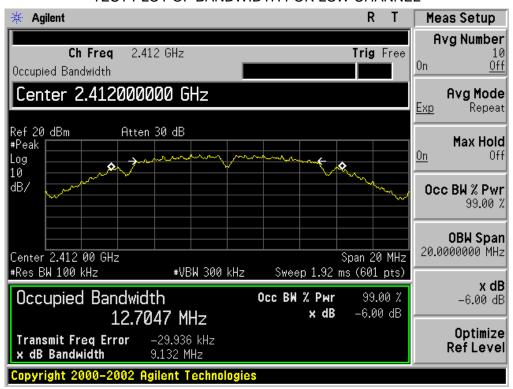


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

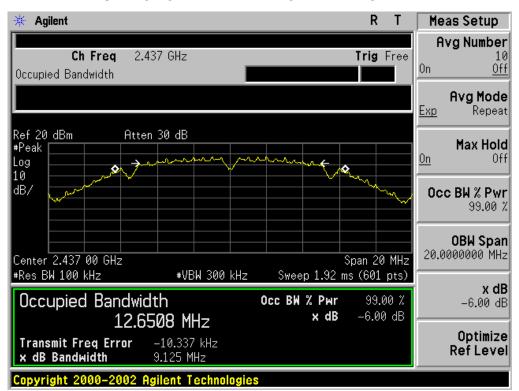


Page 19 of 68

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

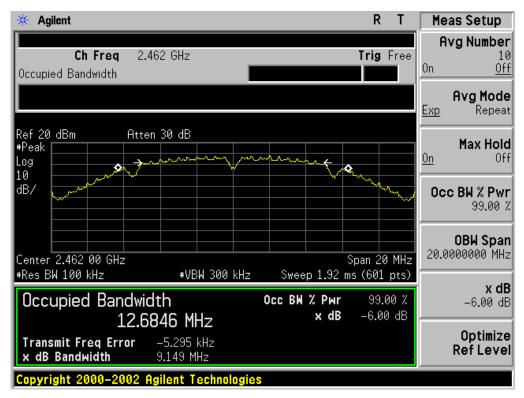


802.11g TEST RESULTTEST PLOT OF BANDWIDTH FOR LOW CHANNEL

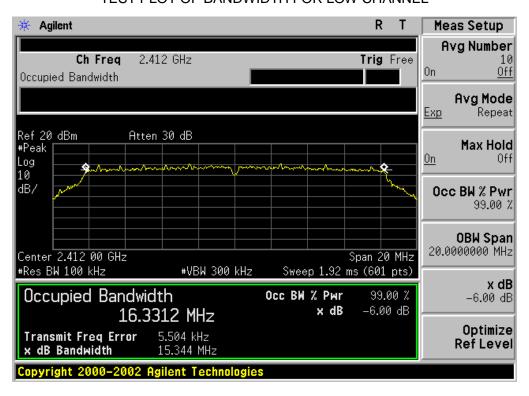


Page 20 of 68

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

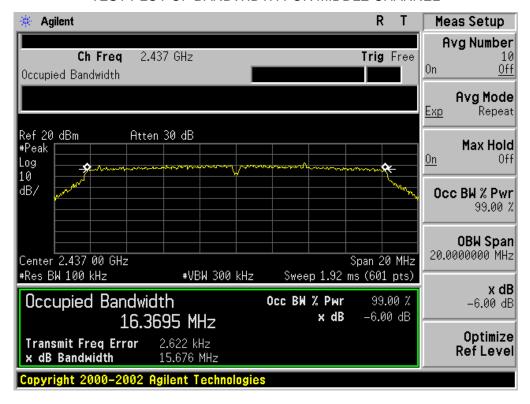


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

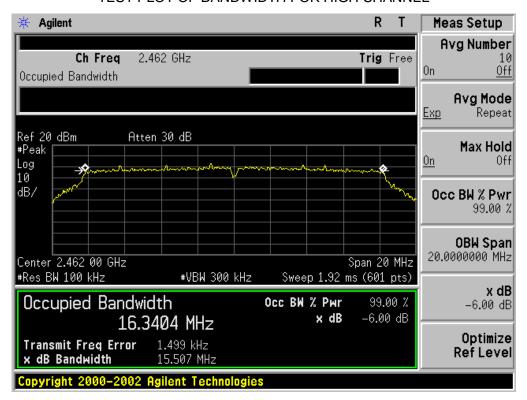


Page 21 of 68

802.11n (20) TEST RESULTTEST PLOT OF BANDWIDTH FOR LOW CHANNEL

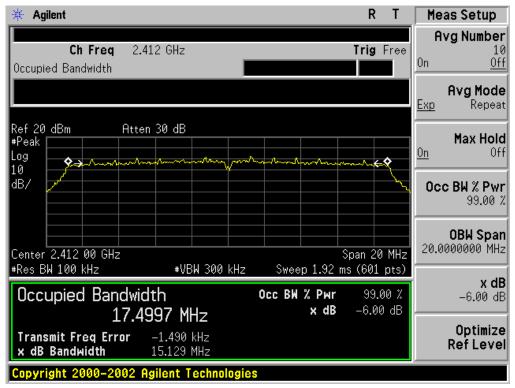


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

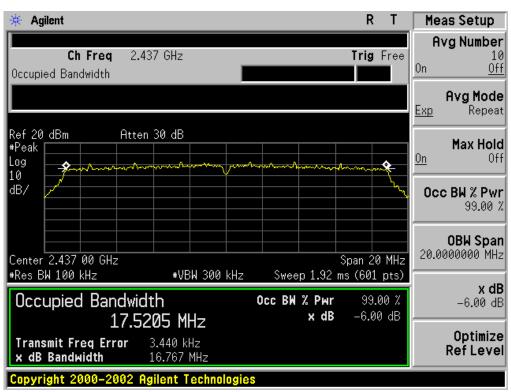


Page 22 of 68

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

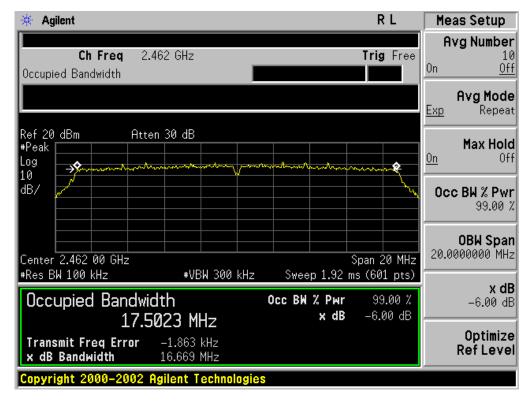


802.11n(40) TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

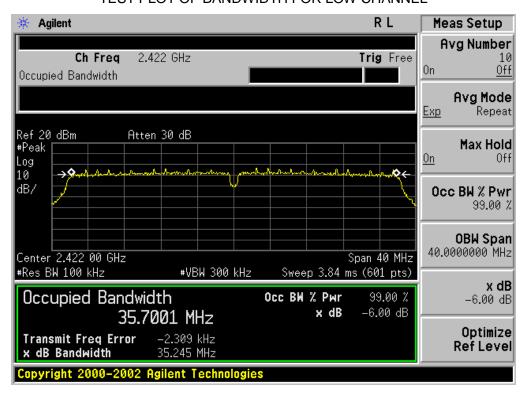


Page 23 of 68

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

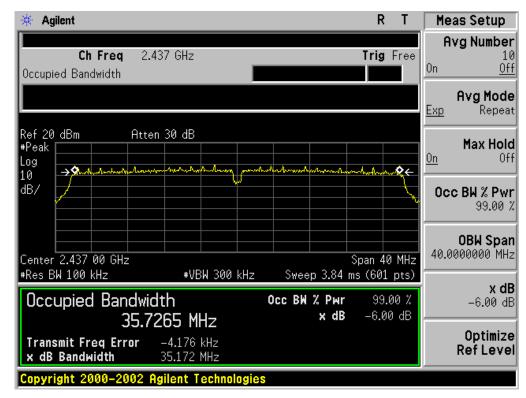

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

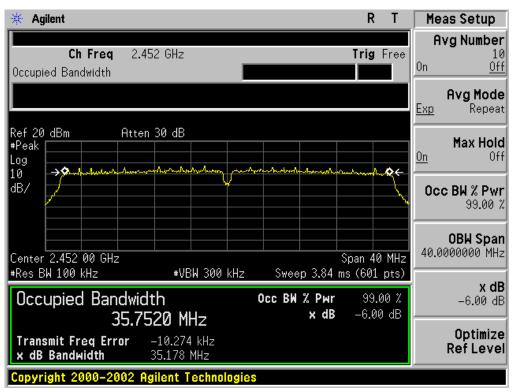

Page 24 of 68

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.


9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Ampliachia Limita	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator				
shall be at least 20 dB below that in 100KHz				
bandwidth within the band that contains the highest				
level of the desired power.	At least -20dBc than the limit	PASS		
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified				
in§15.209(a))				


Page 25 of 68


TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b FOR MODULATION IN LOW CHANNEL

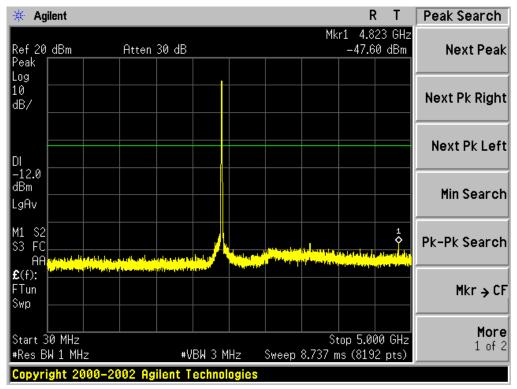

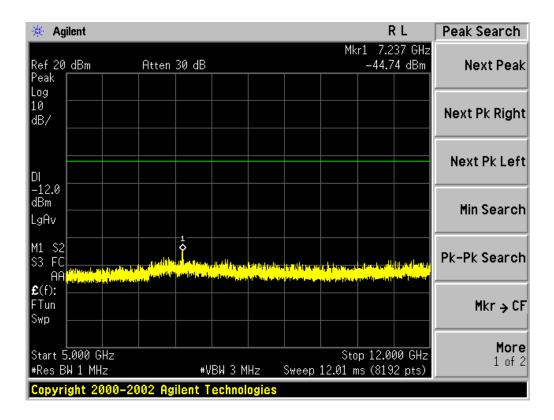


Page 26 of 68

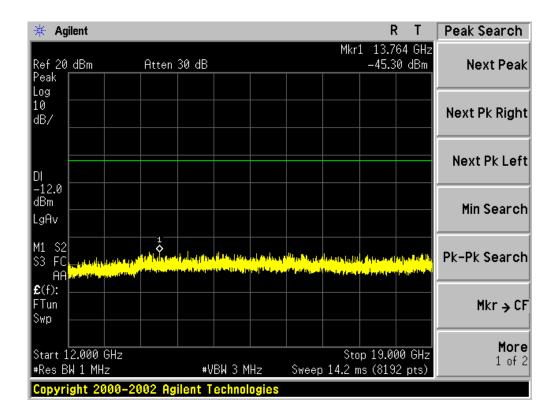


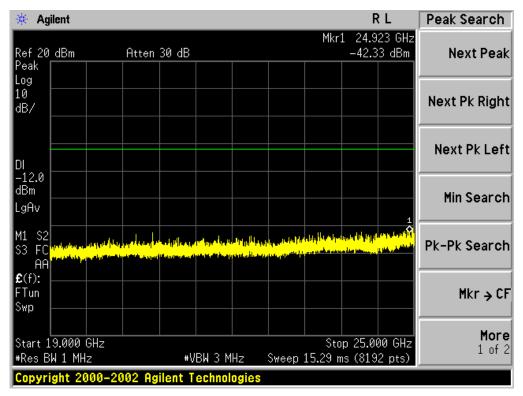


Page 27 of 68


TEST PLOT OF OUT OF BAND EMISSIONS OF 802.11b FOR MODULATION IN MIDDLE CHANNEL

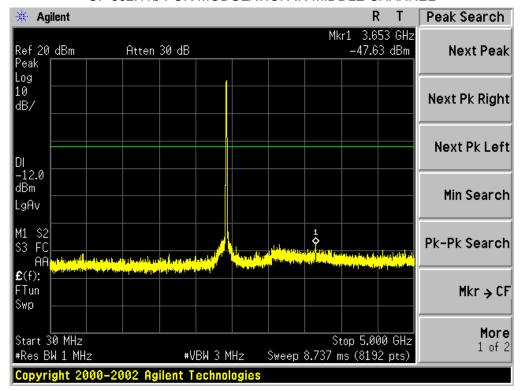

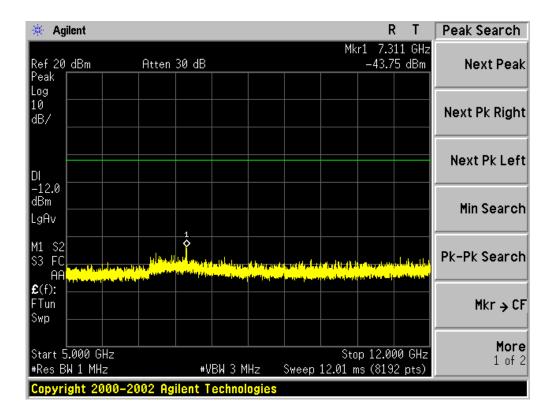


Page 28 of 68

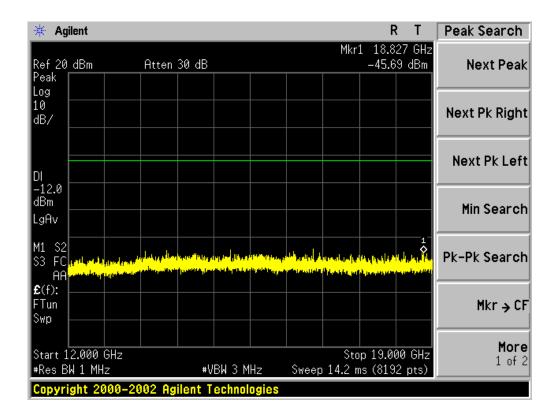


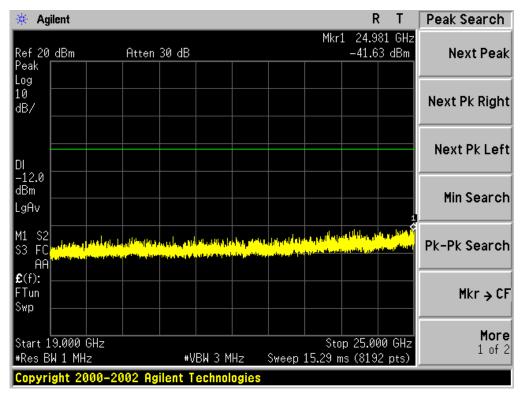


Page 29 of 68


TEST PLOT OF OUT OF BAND EMISSIONS OF 802.11b FOR MODULATION IN HIGH CHANNEL

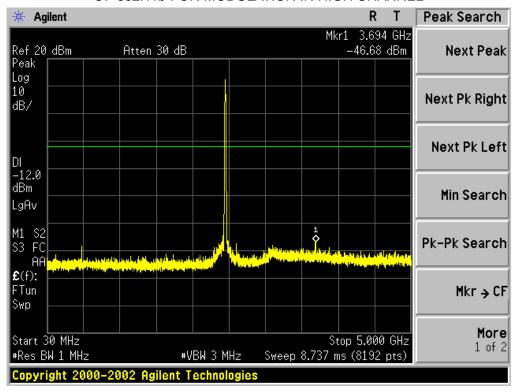

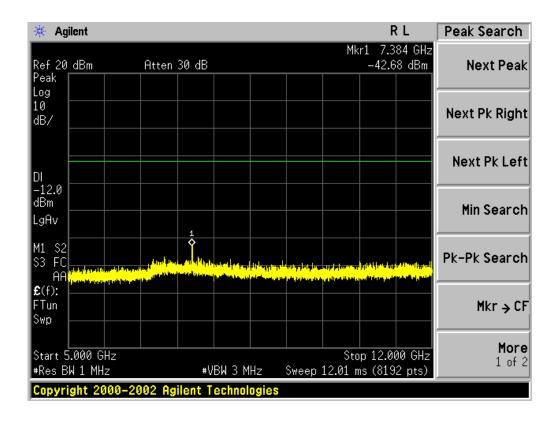

Page 30 of 68

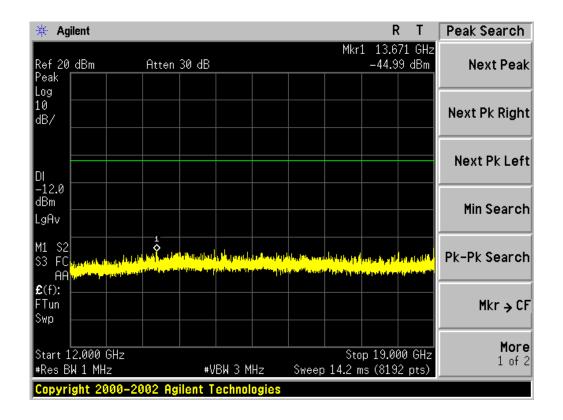

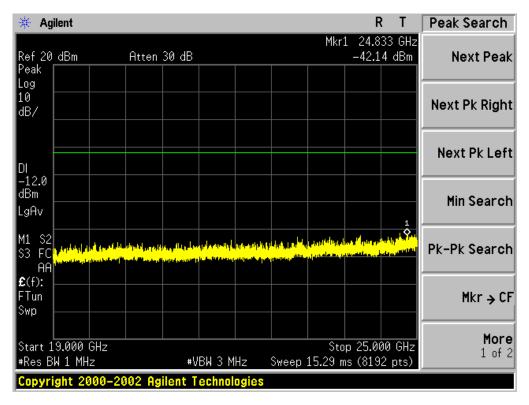

Page 31 of 68

10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11b with data rate 1

Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-6.61	8	Pass
Middle Channel	-7.01	8	Pass
High Channel	-5.07	8	Pass

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11g with data rate 6

Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-13.23	8	Pass
Middle Channel	-11	8	Pass
High Channel	-12.59	8	Pass

Report No.: AGC00200140802FE04 Page 32 of 68

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5


Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-13.17	8	Pass
Middle Channel	-11.26	8	Pass
High Channel	-12.38	8	Pass

TEST ITEM	POWER PECTRAL DENSITY
TEST MODE	802.11n 40 with data rate 13.5


Channel No.	PSD (dBm)	Limit (dBm)	Result
Low Channel	-19.01	8	Pass
Middle Channel	-15.1	8	Pass
High Channel	-18.29	8	Pass

Page 33 of 68

802.11b TEST RESULTTEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

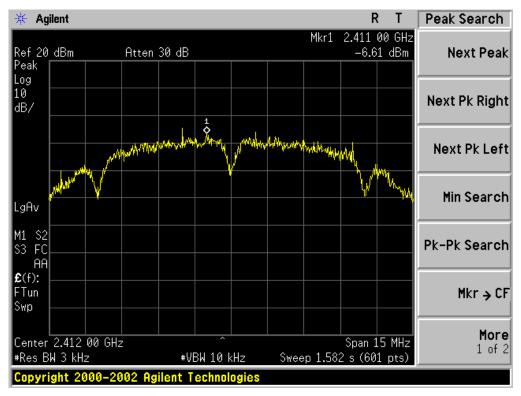


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

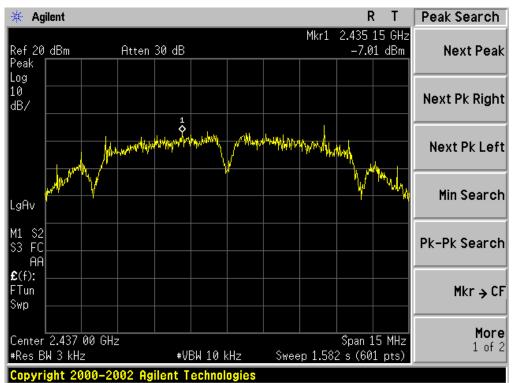


Page 34 of 68

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

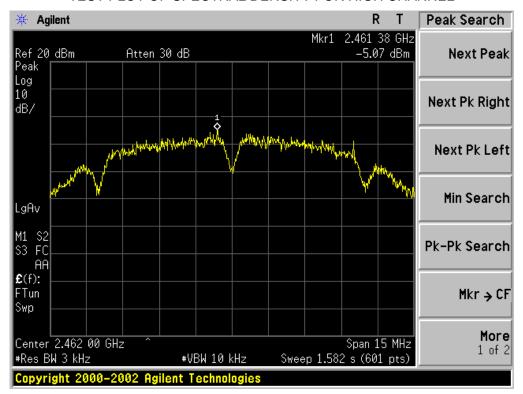


802.11g TEST RESULTTEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

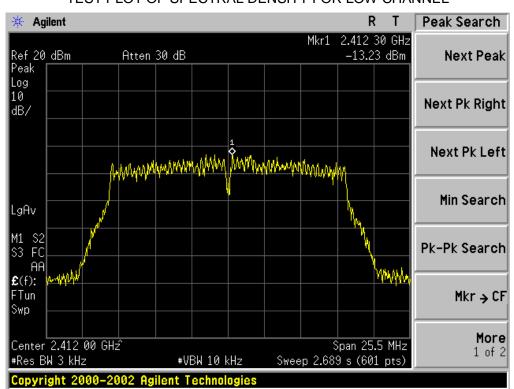


Page 35 of 68

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

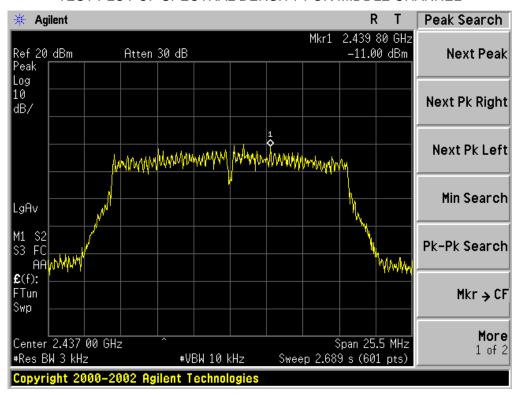


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

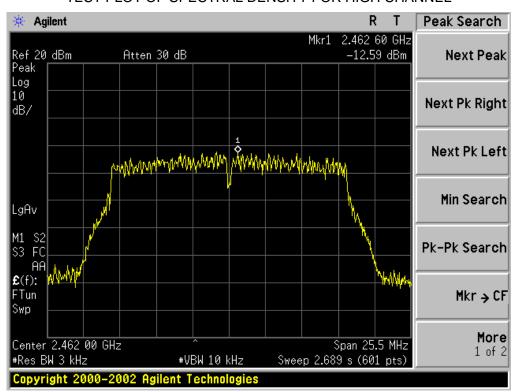


Page 36 of 68

802.11n 20 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

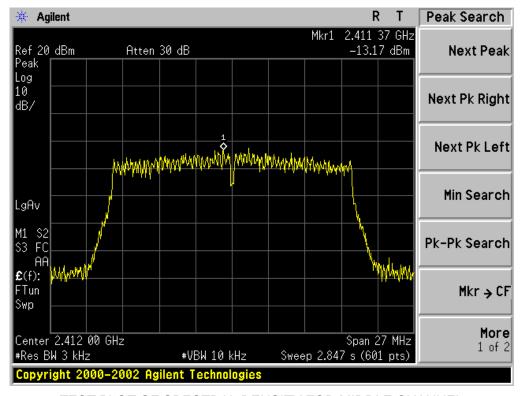


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

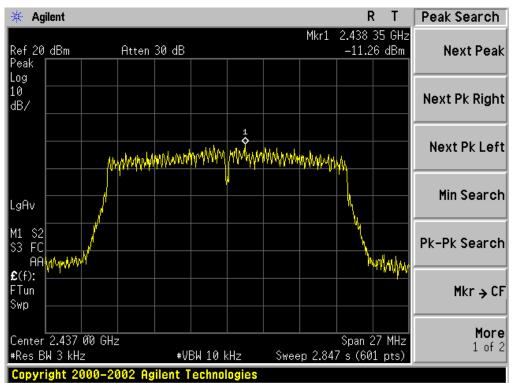


Page 37 of 68

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

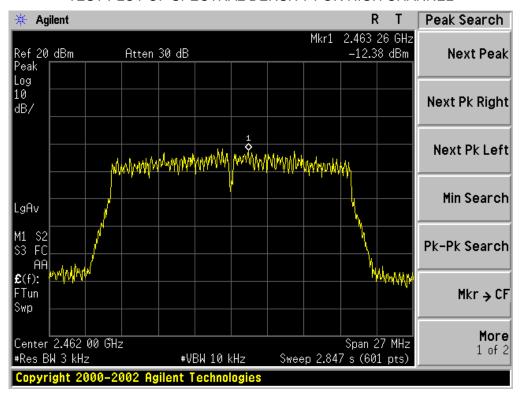


802.11n 40 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

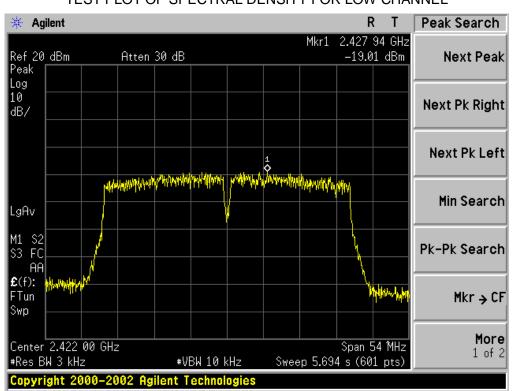


Page 38 of 68

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

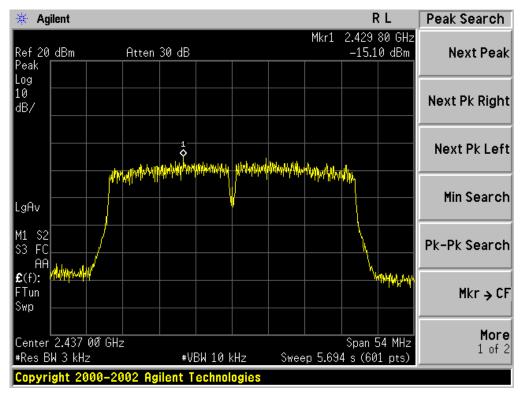

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

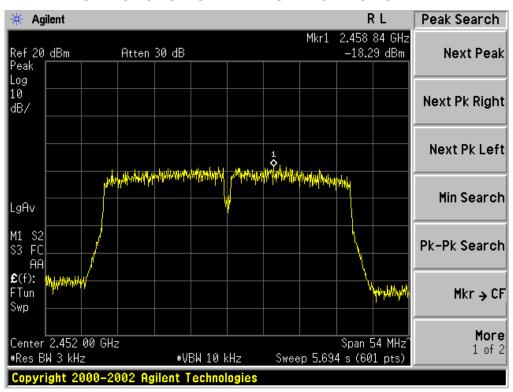

Page 39 of 68

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Page 40 of 68

11.2. TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

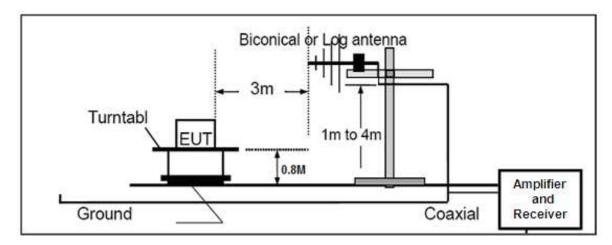

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

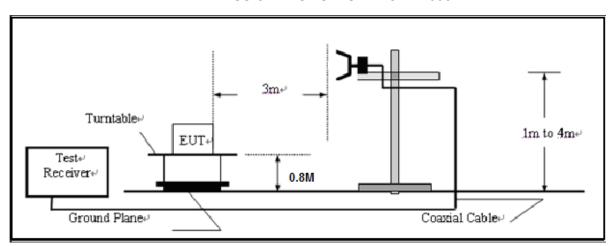

Page 41 of 68

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

Page 42 of 68

RADIATED EMISSION BELOW 1GHZ

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

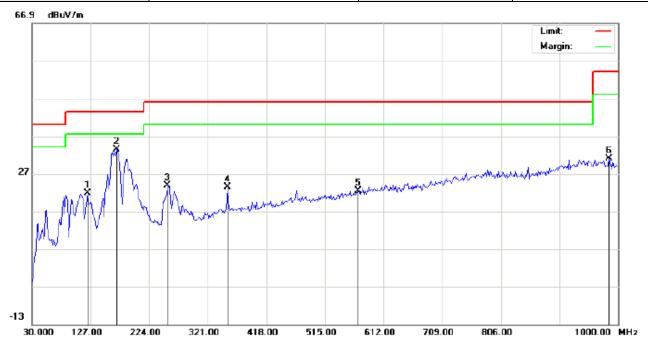

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mobile Phone

M/N: SMD-4516A Mode: Low Channel TX

Note:


Polarization: *Horizontal* Temperature: 26
Power: AC 120V/60Hz Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		122.1500	9.55	12.22	21.77	43.50	-21.73	peak			
2	*	170.6500	20.44	13.06	33.50	43.50	-10.00	peak			
3		254.7167	9.74	14.04	23.78	46.00	-22.22	peak			
4		353.3333	4.62	18.76	23.38	46.00	-22.62	peak			
5		569.9667	-0.57	22.98	22.41	46.00	-23.59	peak			
6		985.4500	1.42	29.66	31.08	54.00	-22.92	peak			

Page 43 of 68

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

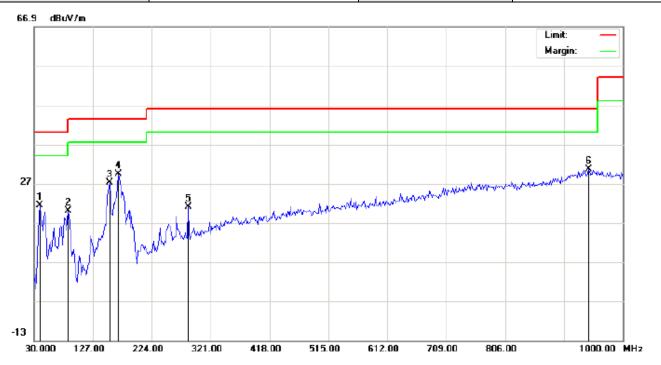

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %


EUT: Mobile Phone M/N: SMD-4516A Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		39.7000	12.82	8.51	21.33	40.00	-18.67	peak			
2		86.5833	15.76	4.16	19.92	40.00	-20.08	peak			
3		154.4832	11.91	15.29	27.20	43.50	-16.30	peak			
4	*	169.0333	14.60	14.76	29.36	43.50	-14.14	peak			
5		283.8167	6.02	14.92	20.94	46.00	-25.06	peak			
6		9/3 //167	0.71	29.82	30.53	46.00	-15.47	neak			

Distance:

EUT	Mobile Phone	Model Name	SMD-4516A	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal	

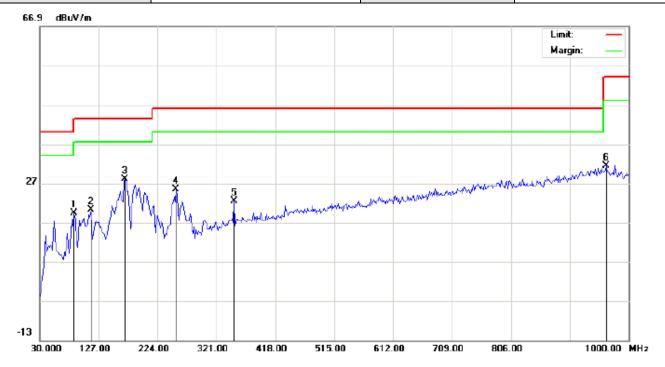

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance:

EUT: Mobile Phone M/N: SMD-4516A


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		86.5833	9.98	9.52	19.50	40.00	-20.50	peak			
2		114.0667	8.71	11.45	20.16	43.50	-23.34	peak			
3	*	170.6500	14.94	13.06	28.00	43.50	-15.50	peak			
4		254.7167	11.38	14.04	25.42	46.00	-20.58	peak			
5		350.1000	3.63	18.74	22.37	46.00	-23.63	peak			
6		962.8167	1.44	29.88	31.32	54.00	-22.68	peak			

Page 45 of 68

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

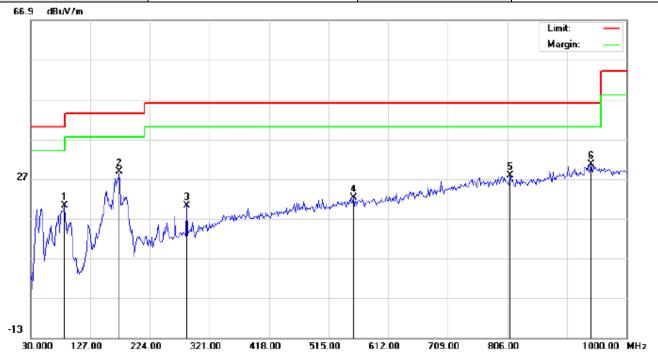

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: Mobile Phone M/N: SMD-4516A

Mode: Middle Channel TX


Note:

Polarization: Vertical Temperature: 26
Power: AC 120V/60Hz Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		84.9666	16.61	3.58	20.19	40.00	-19.81	peak			
2	*	173.8833	14.35	14.46	28.81	43.50	-14.69	peak			
3		283.8167	5.32	14.92	20.24	46.00	-25.76	peak			
4		555.4167	-0.31	22.51	22.20	46.00	-23.80	peak			
5		810.8500	0.50	27.32	27.82	46.00	-18.18	peak			
6		941.8000	0.83	29.77	30.60	46.00	-15.40	peak			

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

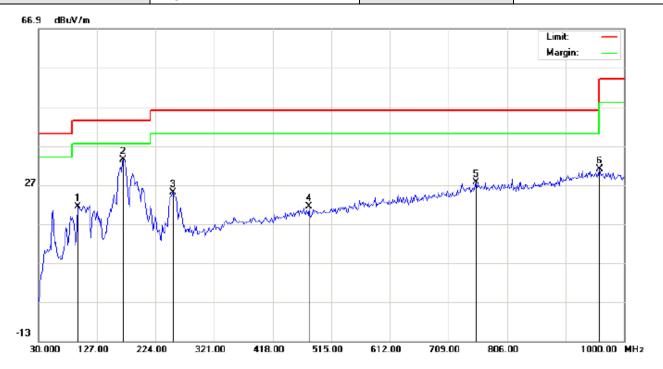

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %

Distance:


EUT: Mobile Phone M/N: SMD-4516A Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		94.6667	11.59	9.89	21.48	43.50	-22.02	peak			
2	*	170.6500	20.33	13.06	33.39	43.50	-10.11	peak			
3		253.1000	10.96	13.99	24.95	46.00	-21.05	peak			
4		477.8167	0.57	20.89	21.46	46.00	-24.54	peak			
5		754.2667	0.86	26.69	27.55	46.00	-18.45	peak			
6		959.5833	1.01	29.91	30.92	46.00	-15.08	peak			

Page 47 of 68

EUT	Mobile Phone	Model Name	SMD-4516A	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical	

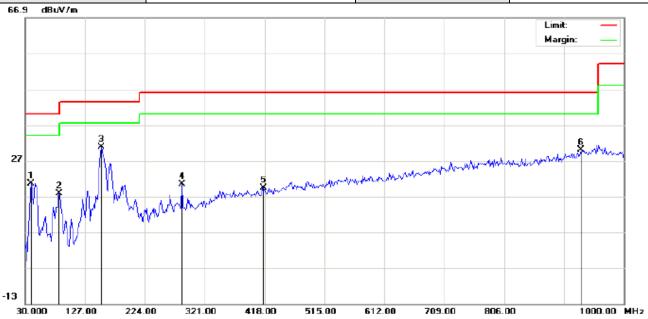

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Mobile Phone M/N: SMD-4516A

Mode: High Channel TX

Note:

Polarizat	ion: <i>Vertical</i>	Temperature: 26
Power:	AC 120V/60Hz	Humidity: 60 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		39.7000	12.01	8.51	20.52	40.00	-19.48	peak			
2		84.9666	14.19	3.58	17.77	40.00	-22.23	peak			
3	*	152.8667	15.45	15.28	30.73	43.50	-12.77	peak			
4		283.8167	5.57	14.92	20.49	46.00	-25.51	peak			
5		416.3833	-0.16	19.57	19.41	46.00	-26.59	peak			
6		930.4833	0.49	29.46	29.95	46.00	-16.05	peak			

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 48 of 68

RADIATED EMISSION ABOVE 1GHZ

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

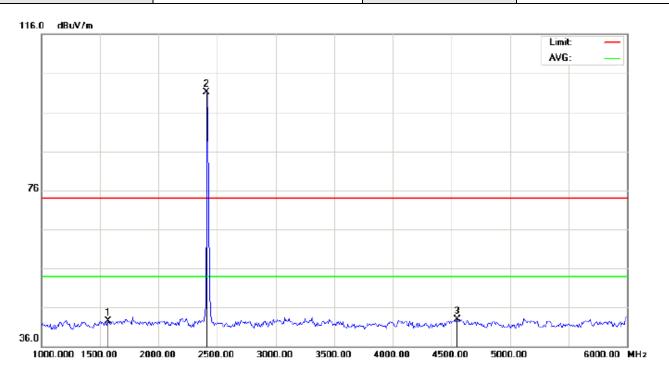

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A


Mode: 802.11b Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1566.667	57.14	-14.68	42.46	74.00	-31.54	peak			
2	*	2412.000	110.78	-9.67	101.11	74.00	27.11	peak			
3		4550.000	45.86	-2.98	42.88	74.00	-31.12	peak			

Page 49 of 68

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

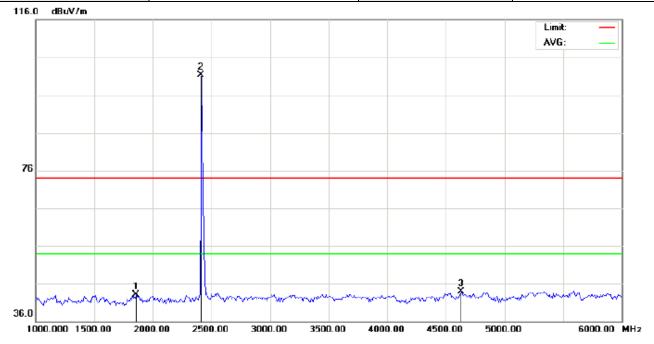

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A

Mode: 802.11b Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1858.333	54.78	-11.61	43.17	74.00	-30.83	peak			
2	*	2412.000	111.07	-9.67	101.40	74.00	27.40	peak			
3		4633.333	46.62	-2.76	43.86	74.00	-30.14	peak			

RESULT: PASS

Note: The other modes radiation emissions have more than 20dB margin.

All modes radiation emission from 6GHz to 25GHz at least have 20dB margin.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Page 50 of 68

12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

1)Radiated restricted band edge measurements


The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

- 2)Conducted Emissions at the bang edge
 - a)The transmitter output was connected to the spectrum analyzer
 - b)Set RBW=100kHz,VBW=300kHz
 - c)Suitable frequency span including 100kHz bandwidth from band edge

12.2. TEST SET-UP

Radiated same as 11.2


Conducted set up



Page 51 of 68

12.3. Radiated Test Result

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

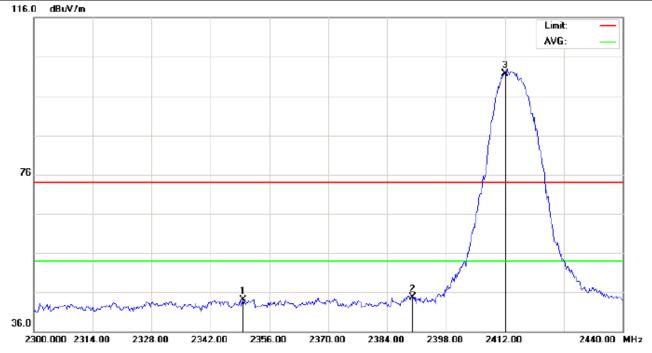

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A


Mode: 802.11b Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2349.700	53.91	-9.74	44.17	74.00	-29.83	peak			
2		2390.000	54.40	-9.69	44.71	74.00	-29.29	peak			
3	*	2412.000	111.36	-9.67	101.69	74.00	27.69	peak			

Page 52 of 68

EUT	Mobile Phone	Model Name	SMD-4516A	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical	

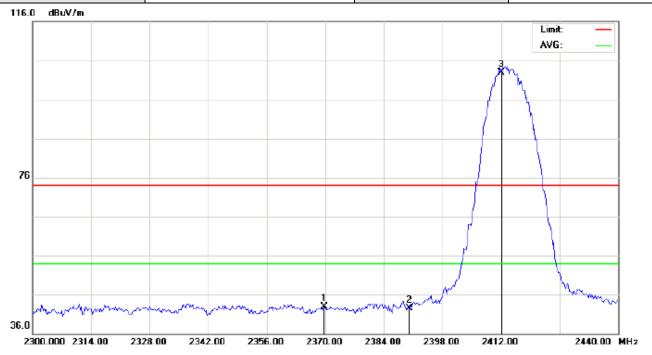

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A


Mode: 802.11b Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2369.767	52.67	-9.71	42.96	74.00	-31.04	peak			
2		2390.000	52.27	-9.69	42.58	74.00	-31.42	peak			
3	*	2412.000	112.58	-9.67	102.91	74.00	28.91	peak			

Page 53 of 68

EUT	Mobile Phone	Model Name	SMD-4516A
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal

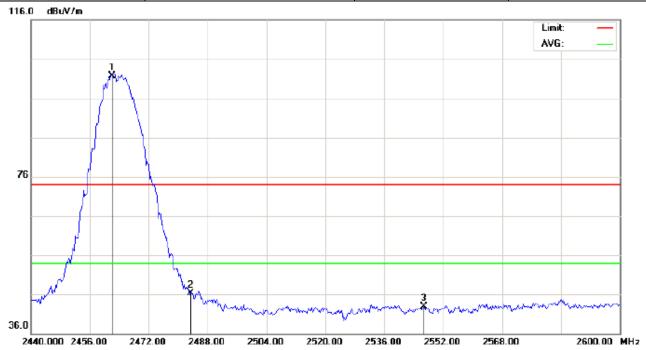

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A


Mode: 802.11b High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2462.000	111.39	-9.61	101.78	74.00	27.78	peak			
2		2483.500	55.81	-9.59	46.22	74.00	-27.78	peak			
3		2546.667	52.39	-9.46	42.93	74.00	-31.07	peak			

Page 54 of 68

EUT	Mobile Phone	Model Name	SMD-4516A		
Temperature	25°C	Relative Humidity	55.4%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical		

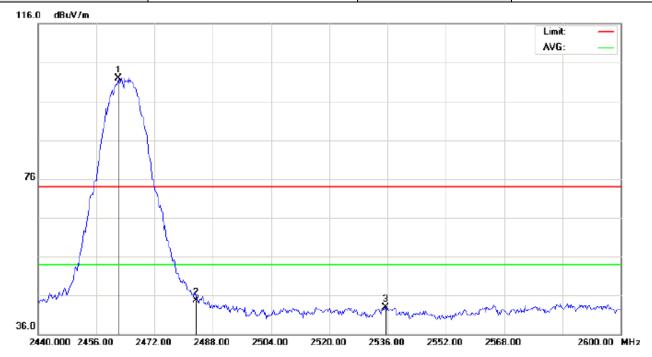

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %

EUT: Mobile Phone Distance: 3m

M/N: SMD-4516A

Mode: 802.11b High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2462.000	111.42	-9.61	101.81	74.00	27.81	peak			
2		2483.500	54.22	-9.59	44.63	74.00	-29.37	peak			
3		2535.467	52.46	-9.48	42.98	74.00	-31.02	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.


Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system


Report No.: AGC00200140802FE04 Page 55 of 68

12.4. Conducted Test Result


802.11b-CH1

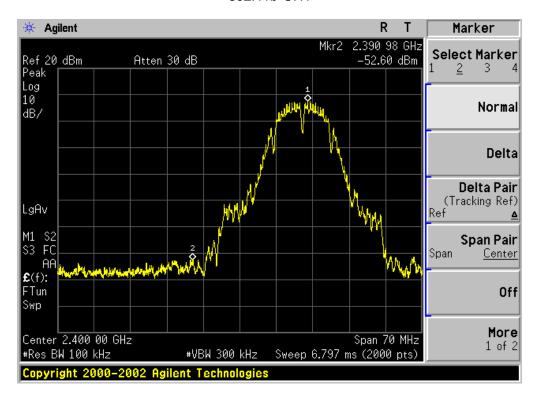


802.11b-CH11

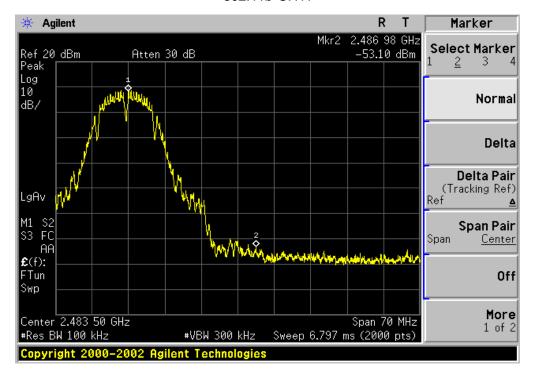

802.11g- CH1

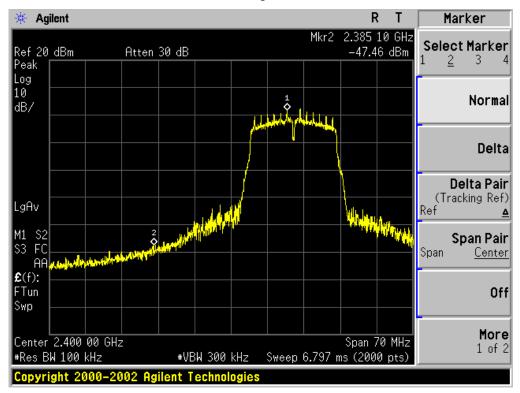


802.11g- CH11

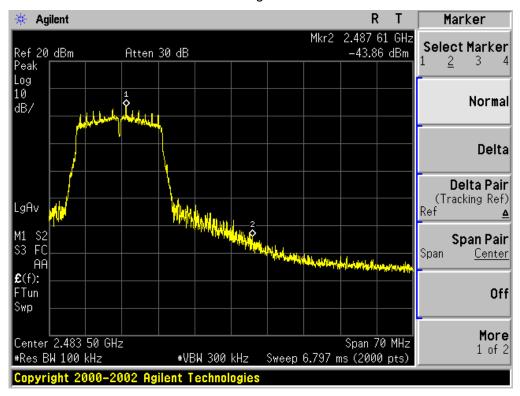


Page 57 of 68

802.11n-CH1

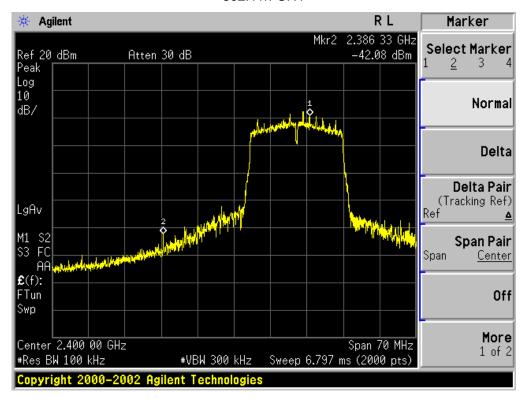

802.11n-CH11

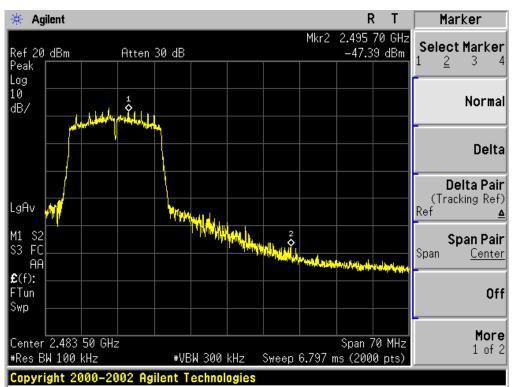

Page 58 of 68

13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage								
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	56	46							
5MHz~30MHz	60	50							

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

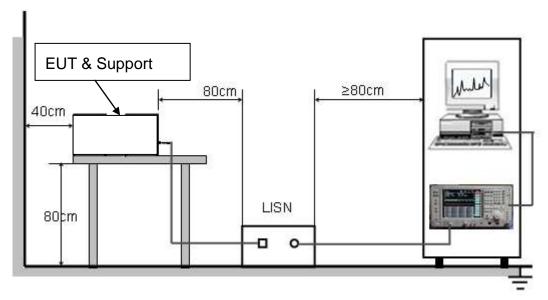

Page 59 of 68

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN..
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Page 60 of 68

13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST LINE 1-L

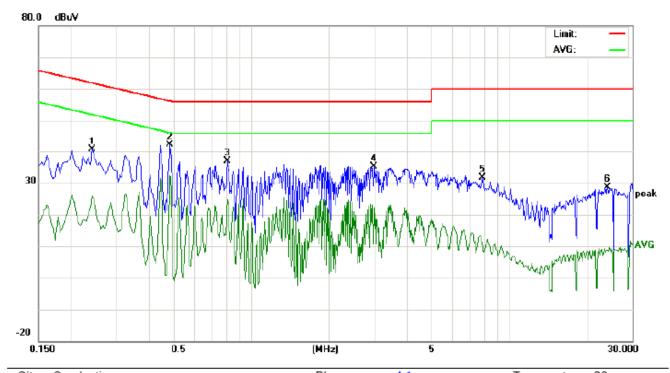

Site: Conduction Phase: L1 Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone M/N: SMD-4516A


Mode: Normal Operating(WIFI)

Note:

No. Freq.	Reading_Level (dBuV)			Correct Factor				Limit (dBuV)		Margin (dB)		P/F	Comment	
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP.	AVG	Q.	AVG		
1	0.2420	40.56		25.76	0.00	40.56		25.76	62.02	52.02	-21.46	-26.26	Р	
2	0.4860	42.15		32.48	0.00	42.15		32.48	56.24	46.24	-14.09	-13.76	Р	
3	0.8100	36.83		24.89	0.00	36.83		24.89	56.00	46.00	-19.17	-21.11	Р	
4	2.9940	35.07		21.77	0.00	35.07		21.77	56.00	46.00	-20.93	-24.23	Р	
5	7.8540	31.51		10.90	0.00	31.51		10.90	60.00	50.00	-28.49	-39.10	Р	
6	24.0500	28.63		8.81	0.00	28.63		8.81	60.00	50.00	-31.37	-41.19	Р	

Page 61 of 68

Line Conducted Emission Test Line 2-N

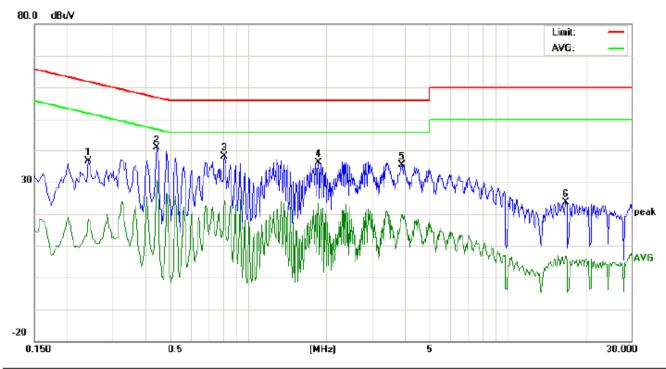

Site: Conduction Phase: N Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: Mobile Phone M/N: SMD-4516A

Mode: Normal Operating(WIFI)

Note:

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2420	36.70		18.41	0.00	36.70		18.41	62.02	52.02	-25.32	-33.61	Р	
2	0.4460	40.95		30.68	0.00	40.95		30.68	56.95	46.95	-16.00	-16.27	Р	
3	0.8100	38.13		24.25	0.00	38.13		24.25	56.00	46.00	-17.87	-21.75	Р	
4	1.8620	36.23		23.50	0.00	36.23		23.50	56.00	46.00	-19.77	-22.50	Р	
5	3.9220	35.47		19.84	0.00	35.47		19.84	56.00	46.00	-20.53	-26.16	Р	
6	16.8180	23.71		6.57	0.00	23.71		6.57	60.00	50.00	-36.29	-43.43	Р	


Page 62 of 68

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

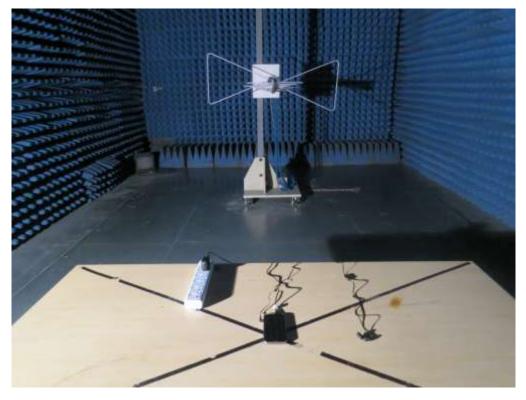

Page 63 of 68

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC00200140802FE04 Page 64 of 68

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Page 65 of 68

BACK VIEW OF EUT



LEFT VIEW OF EUT



Page 66 of 68





OPEN VIEW OF EUT-1



Page 67 of 68


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

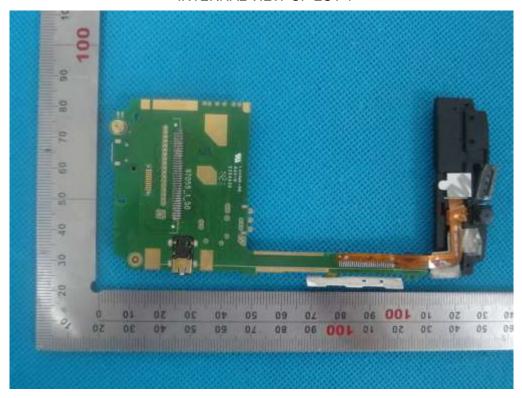

INTERNAL VIEW OF EUT-2

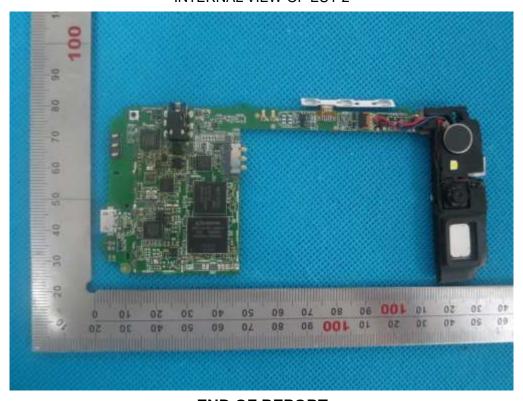

----END OF REPORT----