

#### Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



# **TEST REPORT**

**Report Reference No.....: TRE1512004503** R/C.....: 93833

FCC ID.....: 2AASJSMD-5090A

Applicant's name.....: Daewoo International Corp.

Manufacturer...... SGMC Co., Ltd.

Address...... 5F Media Tower, 108-9 Sungsan 1-dong, Mapo-gu, Seoul 121-844

Korea

Test item description .....: Mobile Phone

Trade Mark ...... DAEWOO

Model/Type reference...... SMD-5090A

Listed Model(s) ..... -

Standard .....: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of receipt of test sample............ Dec. 06, 2015

Date of testing...... Dec. 07, 2015 ~ Dec. 24, 2015

Date of issue...... Dec. 25, 2015

Result...... PASS

Compiled by

( position+printedname+signature)...: File administrators Candy Liu

Supervised by

(position+printedname+signature)....: Project Engineer Cary Luo

Approved by

(position+printedname+signature)....: RF Manager Hans Hu

Testing Laboratory Name .....: Shenzhen Huatongwei International Inspection Co., Ltd

Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Report No: TRE1512004503 Page: 2 of 47 Issued: 2015-12-25

## **Contents**

<u>1.</u>	TEST STANDARDS ANDTEST DESCRIPTION	3
1.1.	Test Standards	3
1.2.	Test Description	3
1.2.	rest bescription	· ·
<u>2.</u>	SUMMARY	4
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Operation state	5
2.4.	EUT configuration	5
2.5.	Modifications	5
<u>3.</u>	TEST ENVIRONMENT	6
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	7
3.5.	Equipments Used during the Test	8
<u>4.</u>	TEST CONDITIONS AND RESULTS	9
4.1.	Antenna requirement	9
4.2.	Conducted Emission (AC Main)	10
4.3.	Conducted Peak Output Power	13
4.4.	20dB Emission Bandwidth	16
4.5.	Carrier Frequencies Separation	19
4.6.	Hopping Channel Number	21
4.7.	Dwell Time	23
4.8.	Pseudorandom Frequency Hopping Sequence	26
4.9.	Restricted band (radiated)	27
4.10.	Bandedge and Spurious Emission (conducted)	30
4.11.	Spurious Emission (radiated)	40
<u>5.</u>	TEST SETUP PHOTOS OF THE EUT	45
<u>6.</u>	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	47
<del></del>		

Report No: TRE1512004503 Page: 3 of 47 Issued: 2015-12-25

## 1. TEST STANDARDS ANDTEST DESCRIPTION

## 1.1. Test Standards

The tests were performed according to following standards:

<u>FCC Rules Part 15.247</u>: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devicese

## 1.2. Test Description

ReportSection	Test Item	Section in CFR 47	Result
4.1	Antenna Requirement	15.203/15.247 (c)	Pass
4.2	AC Power Line Conducted Emission	15.207	Pass
4.3	Conducted Peak Output Power	15.247 (b)(1)	Pass
4.4	20dB Occupied Bandwidth	15.247 (a)(1)	Pass
4.5	Carrier Frequencies Separation	15.247 (a)(1)	Pass
4.6	Hopping Channel Number	15.247 (a)(1)	Pass
4.7	Dwell Time	15.247 (a)(1)	Pass
4.8	Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
4.9	Restricted band	15.247(d)/15.205	Pass
4.10/4.11	Radiated Emission	15.247(d)/15.209	Pass

Remark: The measurement uncertainty is not included in the test result.

Report No: TRE1512004503 Page: 4 of 47 Issued: 2015-12-25

# 2. **SUMMARY**

## 2.1. Client Information

Applicant:	Daewoo International Corp.	
Address:	84-11, Namdaemunno 5-ga, Jung-gu, Seoul 100-753 Korea	
Manufacturer:	SGMC Co., Ltd.	
Address:	5F Media Tower, 108-9 Sungsan 1-dong, Mapo-gu, Seoul 121-844 Korea	

## 2.2. Product Description

<u></u>			
Name of EUT	Mobile Phone		
Trade Mark:	DAEWOO		
Model No.:	SMD-5090A		
Listed Model(s):	-		
IMEI1:	358228054832654		
IMEI2:	358228054834789		
Power supply:	DC 3.8V From internal battery		
Adapter information:	Model: SMD-5090A		
	Input:AC 100-240V 50/60Hz 0.2A		
	Output: 5Vd.c., 1000mA		
Bluetooth			
Version:	Supported BT4.0+EDR		
Modulation:	GFSK, π/4DQPSK, 8DPSK		
Operation frequency:	2402MHz~2480MHz		
Channel number:	79		
Channel separation:	1MHz		
Antenna type:	Internal Antenna		
Antenna gain:	1.0 dBi		

Report No: TRE1512004503 Page: 5 of 47 Issued: 2015-12-25

## 2.3. Operation state

## ◆ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
0	2402
1	2403
i:	::
39	2441
i i	:
77	2479
78	2480

## ♦ Test mode

For RF test items:

the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions:

the EUT was set to connect with the Bluetooth under large package sizes transmission.

## 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- O supplied by the lab

1.1	
Length (m):	1
Shield:	1
Detachable :	1
Manufacturer :	1
Model No. :	1

## 2.5. Modifications

No modifications were implemented to meet testing criteria.

Report No: TRE1512004503 Page: 6 of 47 Issued: 2015-12-25

## 3. TEST ENVIRONMENT

## 3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

## 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Labo ratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

#### A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for tec hnical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

## FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FC C is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

#### IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Aust ralian C-Tick mark as a result of our A2LA accreditation.

#### VCCI

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd.

has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. h as been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

#### DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of D NV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Di rectives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the D NV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

Report No: TRE1512004503 Page: 7 of 47 Issued: 2015-12-25

## 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
lative Humidity:	30~60 %
Air Pressure:	950~1050mba

## 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01"Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1"and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongweilaboratory is reported:

Test Items	MeasurementUncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth		(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No: TRE1512004503 Page: 8 of 47 Issued: 2015-12-25

## 3.5. Equipments Used during the Test

Cond	Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal	
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2015/11/02	
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2015/11/02	
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2015/11/02	
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A	

Radia	Radiated Emission				
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2015/11/02
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2015/11/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2015/11/02
8	Amplifer	Sonoma	310N	E009-13	2015/11/02
9	JS amplifer	Rohde&Schwarz	JS4-00101800- 28-5A	F201504	2015/11/02
10	High pass filter	Compliance Direction systems	BSU-6	34202	2015/11/02
11	HORNANTENNA	ShwarzBeck	9120D	1012	2015/11/02
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2015/11/02
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2015/11/02
14	TURNTABLE	MATURO	TT2.0		N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P		N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2015/11/02
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/02

Maxir	Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF					
Emiss	Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal	
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2015/11/02	

The Cal.Interval was one year

Report No: TRE1512004503 Page: 9 of 47 Issued: 2015-12-25

## 4. TEST CONDITIONS AND RESULTS

## 4.1. Antenna requirement

## Requirement

#### FCC CFR Title 47 Part 15 Subpart C Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of anantenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

## FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

## **Test Result:**

The antenna is integralantenna, the best case gain of the antenna is1.0dBi

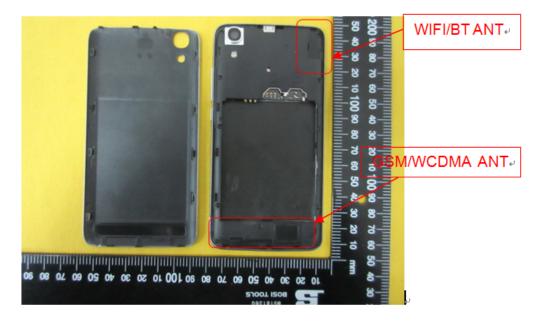

Report No: TRE1512004503 Page: 10 of 47 Issued: 2015-12-25

## 4.2. Conducted Emission (AC Main)


#### **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fragues ou range (MILIF)	Limit (dBuV)		
Frequency range (MHz)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### **TEST CONFIGURATION**

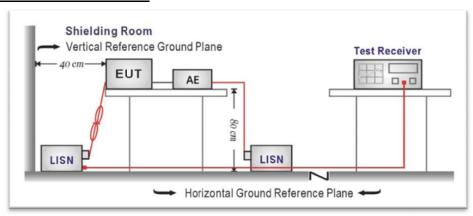


#### **TEST PROCEDURE**

- The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
- 3. The EUT and simulators are connected to the main power through a line impedancestabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for themeasuring equipment.
- 4. The peripheral devices are also connected to the main power through aLISN. (Please refer to the block diagram of the test setup and photographs)
- 5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor,was individually connected through a LISN to the input power source.
- 6. The excess length of the power cord between the EUT and the LISN receptacle were foldedback and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- 7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHzusing a receiver bandwidth of 9 kHz.

#### **TEST RESULTS**

Report No: TRE1512004503 Page: 11 of 47 Issued: 2015-12-25

Test mode:AC 120V BT Polarization L

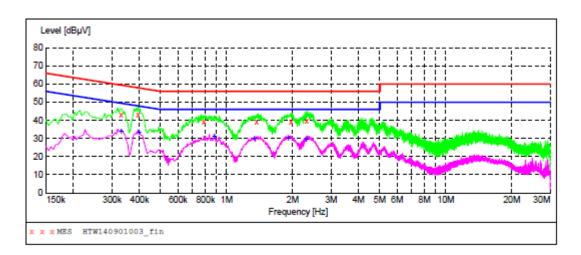

## MEASUREMENT RESULT: "HTW140901003 fin"


	015 11: uency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.3	30000	42.90	11.2	60	16.6	OP	Ll	GND
	94000	43.10	10.6	58	14.9	-	L1	GND
0.7	86000	39.10	9.9	56	16.9	QP	Ll	GND
1.3	70000	39.00	10.1	56	17.0	QP	Ll	GND
1.9	66000	39.10	10.1	56	16.9	QP	Ll	GND
2.3	14000	39.60	10.1	56	16.4	QP	L1	GND

## MEASUREMENT RESULT: "HTW140901003\_fin2"

12/18/2015 Frequency MHz	Level	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.330000	34.00	11.2	50	15.5	AV	Ll	GND
0.398000	33.50	10.5	48	14.4	AV	Ll	GND
0.878000	31.70	10.0	46	14.3	AV	Ll	GND
1.338000	30.30	10.1	46	15.7	AV	Ll	GND
1.914000	30.60	10.1	46	15.4	AV	Ll	GND
2.314000	30.10	10.1	4.6	15.9	AV	L1	GND

Report No: TRE1512004503 Page: 12 of 47 Issued: 2015-12-25

Test mode: AC 120V BT Polarization N

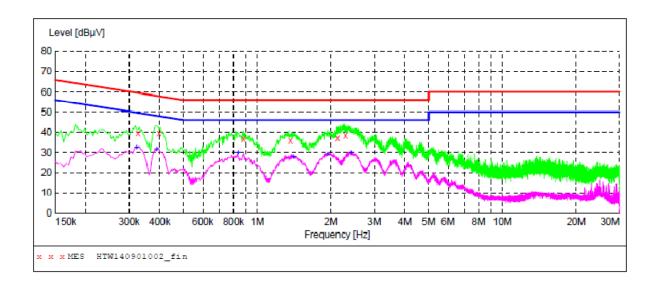

## MEASUREMENT RESULT: "HTW140901002\_fin"

PE	Line	Detector	Margin dB	Limit dBµV	Transd dB		12/18/2015 Frequency MHz
GND	N	QP	20.1	60	11.3	39.50	0.326000
GND	N	QP	18.6	58	10.5	39.30	0.398000
GND	N	QP	19.5	56	10.0	36.50	0.878000
GND	N	QP	20.4	56	10.1	35.60	1.362000
GND	N	QP	19.1	56	10.1	36.90	2.126000
GND	N	QP	17.8	56	10.1	38.20	2.286000

## MEASUREMENT RESULT: "HTW140901002\_fin2"

_		Level		Limit dBµV	Margin dB	Detector	Line	PE
0.3220	00	32.40	11.3	50	17.3	AV	N	GND
0.3900	00	31.80	10.6	48	16.3	AV	N	GND
0.8340	00	29.80	10.0	46	16.2	AV	N	GND
1.4020	00	28.00	10.1	46	18.0	AV	N	GND
1.9380	00	29.30	10.1	46	16.7	AV	N	GND
2.4140	00	29.90	10.1	46	16.1	AV	N	GND


Report No: TRE1512004503 Page: 13 of 47 Issued: 2015-12-25

## 4.3. Conducted Peak Output Power

## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

## **TEST CONFIGURATION**

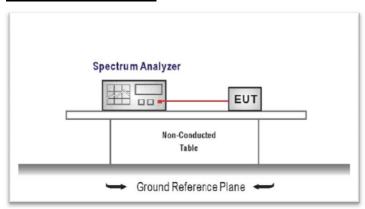


## **TEST PROCEDURE**

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.


## **TEST RESULTS**

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
	00	3.48		
GFSK	39	2.70	30.00	Pass
	78	1.40	1	
π/4DQPSK	00	3.25		
	39	2.52	21.00	Pass
	78	1.19		
8DPSK	00	3.24		
	39	2.52	21.00	Pass
	78	1.19		

Report No: TRE1512004503 Page: 14 of 47 Issued: 2015-12-25

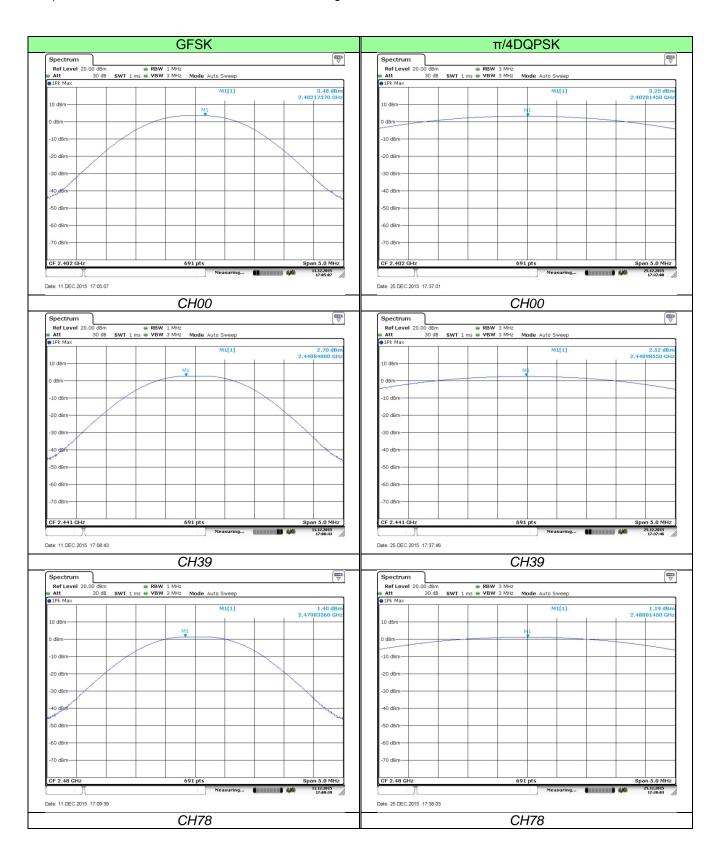

Report No: TRE1512004503 Page: 15 of 47 Issued: 2015-12-25

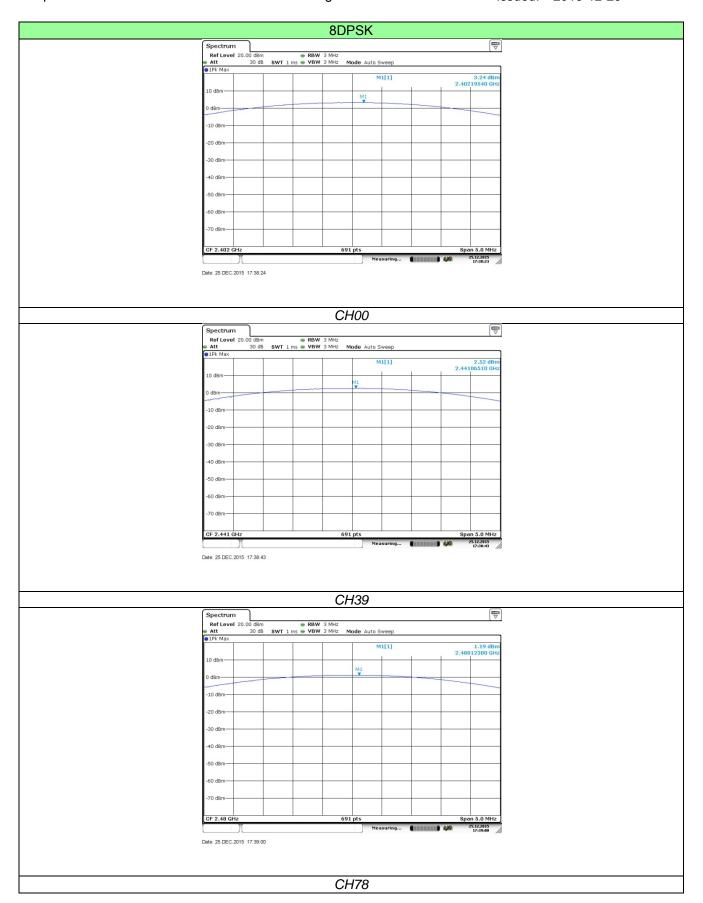


Report No: TRE1512004503 Page: 16 of 47 Issued: 2015-12-25

## 4.4. 20dB Emission Bandwidth

## **LIMIT**

N/A

## **TEST CONFIGURATION**

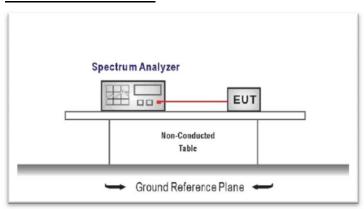


## **TEST PROCEDURE**


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. The bandwidth of the fundamental frequency was measured by spectrum analyzer withRBW≥1% of the 20 dB bandwidthand VBW≥RBW.
- 3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

## **TEST RESULTS**

Modulation type	Channel	20dB Bandwidth (MHz)	Limit (MHz)	Result
	00	0.808		
GFSK	39	0.808	1	Pass
	78	0.808	]	
	00	1.124	1	
π/4DQPSK	39	1.124		Pass
	78	1.124		
	00	1.154		
8DPSK	39	1.154	1	Pass
	78	1.154		

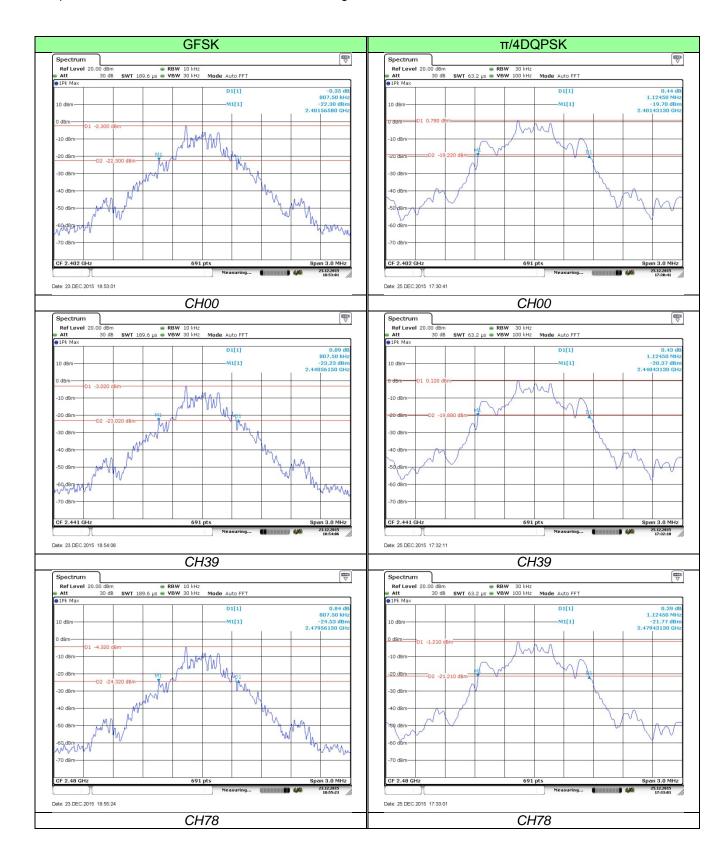

Report No: TRE1512004503 Page: 18 of 47 Issued: 2015-12-25

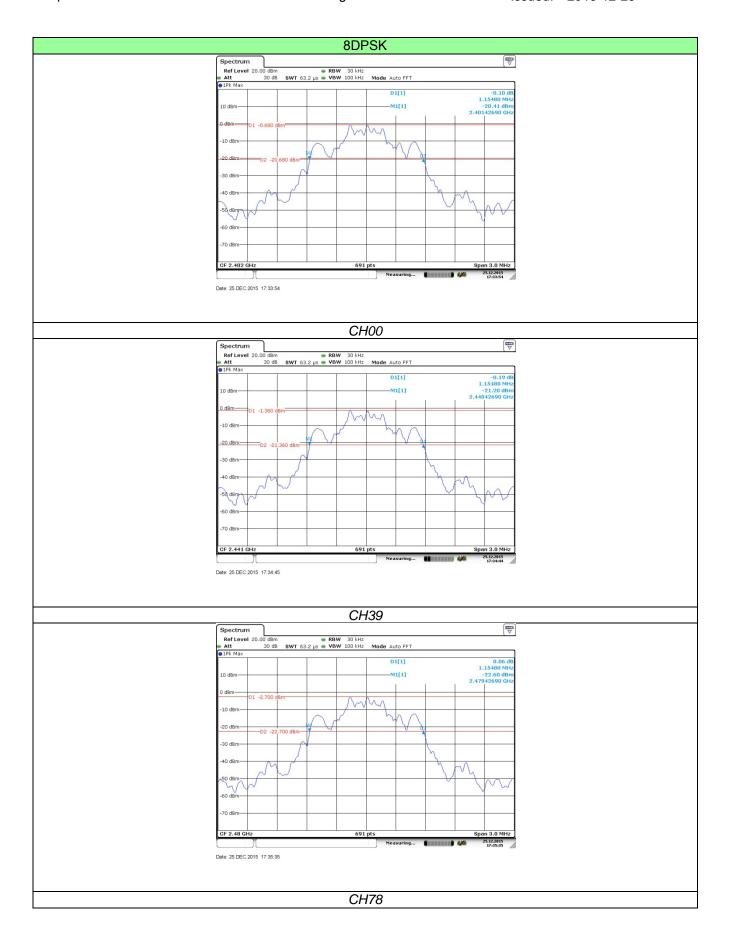

Report No: TRE1512004503 Page: 19 of 47 Issued: 2015-12-25


## 4.5. Carrier Frequencies Separation

## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

## **TEST CONFIGURATION**

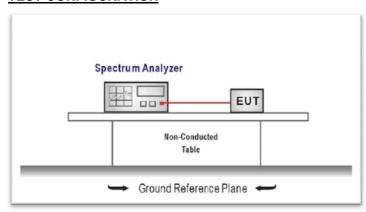


## **TEST PROCEDURE**

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

## **TEST RESULTS**

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	1.001	0.808	Pass
π/4DQPSK	39	1.004	0.749	Pass
8DPSK	39	1.004	0.769	Pass

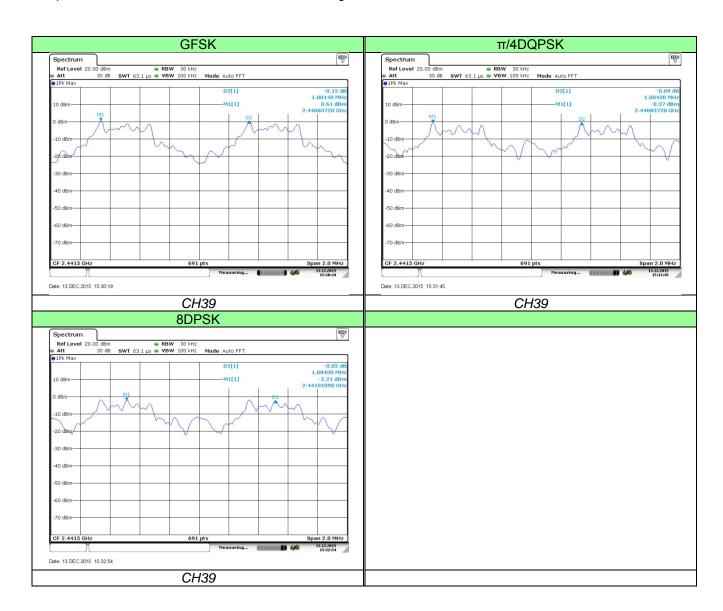

Report No: TRE1512004503 Page: 21 of 47 Issued: 2015-12-25


## 4.6. Hopping Channel Number

## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

## **TEST CONFIGURATION**

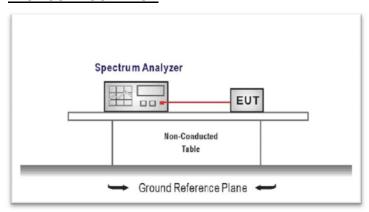


## **TEST PROCEDURE**

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=1MHz and VBW=3MHz.

## **TEST RESULTS**

Modulation type	Channel number	Limit (MHz)	Result
GFSK	79		
π/4DQPSK	79	15	Pass
8DPSK	79		

Report No: TRE1512004503 Page: 22 of 47 Issued: 2015-12-25

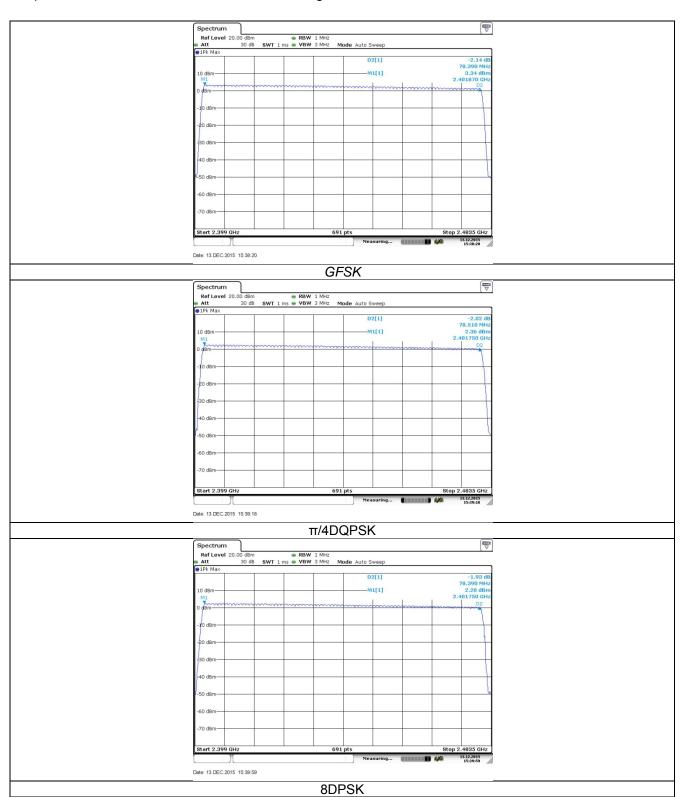

Report No: TRE1512004503 Page: 23 of 47 Issued: 2015-12-25


#### 4.7. Dwell Time

## **LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

## **TEST CONFIGURATION**

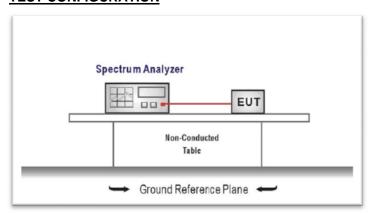

#### **TEST PROCEDURE**

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=1MHz,Span=0Hz.

#### **TEST RESULTS**

Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
	DH1	0.128		
GFSK	DH3	0.263	0.40	Pass
	DH5	0.309		
π/4DQPSK	2-DH1	0.128		
	2-DH3	0.263	0.40	Pass
	2-DH5	0.309		
	3-DH1	0.128		
8DPSK	3-DH3	0.263	0.40	Pass
	3-DH5	0.287		

#### Note:

- 1. We have tested all mode at high, middle and low channel, and recoreded worst case at middle channel.
- 2. Dwell time=Pulse time (ms) ×  $(1600 \div 2 \div 79)$  ×31.6 Second for DH1, 2-DH1, 3-DH1 Dwell time=Pulse time (ms) ×  $(1600 \div 4 \div 79)$  ×31.6 Second for DH3, 2-DH3, 3-DH3 Dwell time=Pulse time (ms) ×  $(1600 \div 6 \div 79)$  ×31.6 Second for DH5, 2-DH5, 3-DH5

Report No: TRE1512004503 Page: 24 of 47 Issued: 2015-12-25

