

# T-Link Industrial Development Co., Ltd.

## Tablet PC

**Main Model: NEXTab10.1 M1036**

**Serial Model: N/A**

**June 09, 2014**

**Report No.: 14020302-FCC-R1**

**(This report supersedes NONE)**



**Modifications made to the product : None**

**This Test Report is Issued Under the Authority of:**

Ray Zhao Compliance Engineer	Alex Liu Technical Manager	

**This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.**

# RF Test Report

To: FCC Part 15.247; 2013, ANSI C63.4; 2009

**SIEMIC, INC.**  
Accessing global markets

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 2 of 67  
www.siemic.com.cn

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 3 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

---

This page has been left blank intentionally.



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 4 of 67  
www.siemic.com.cn

## CONTENTS

<b>1</b>	<b>EXECUTIVE SUMMARY &amp; EUT INFORMATION .....</b>	<b>5</b>
<b>2</b>	<b>TECHNICAL DETAILS .....</b>	<b>6</b>
<b>3</b>	<b>MODIFICATION.....</b>	<b>7</b>
<b>4</b>	<b>TEST SUMMARY.....</b>	<b>8</b>
<b>5</b>	<b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>9</b>
<b>ANNEX A. TEST INSTRUMENT .....</b>		<b>51</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....</b>		<b>52</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>		<b>62</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST .....</b>		<b>66</b>
<b>ANNEX E. DECLARATION OF SIMILARITY .....</b>		<b>67</b>

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 5 of 67  
www.siemic.com.cn

## **1 EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programme was to demonstrate compliance of the T-Link Industrial Development Co., Ltd., Tablet PC and model: NEXTab10.1 M1036 against the current Stipulated Standards. The Tablet PC has demonstrated compliance with the FCC 15.247: 2013, ANSI C63.4: 2009.**

### **EUT Information**

<b>EUT Description</b>	<b>Tablet PC</b>
<b>Main Model</b>	<b>NEXTab10.1 M1036</b>
<b>Serial Model</b>	<b>N/A</b>
<b>Antenna Gain</b>	<b>Bluetooth:2dBi WIFI: 2dBi</b>
<b>Input Power</b>	<b>Li-ion Battery: 3.7V 14.70Wh Power Supply Adapter: Model: JY-05200 Input: 100-240V 50/60Hz 0.3A Max Output: DC 5.0V 2.0A</b>
<b>Classification Per Stipulated Test Standard</b>	<b>FCC 15.247: 2013, ANSI C63.4: 2009</b>

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 6 of 67  
www.siemic.com.cn

## 2 TECHNICAL DETAILS

<b>Purpose</b>	Compliance testing of Tablet PC with stipulated standard
<b>Applicant / Client</b>	T-Link Industrial Development Co., Ltd. 2F A4th Bldg., Hekan Industry Zone WuHe Road S., Longgang District ShenZhen China
<b>Manufacturer</b>	T-Link Industrial Development Co., Ltd. 2F A4th Bldg., Hekan Industry Zone WuHe Road S., Longgang District ShenZhen China
<b>Laboratory performing the tests</b>	SIEMIC (Nanjing-China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone,Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn
<b>Test report reference number</b>	14020302-FCC-R1
<b>Date EUT received</b>	April 03, 2014
<b>Standard applied</b>	FCC 15.247: 2013, ANSI C63.4: 2009
<b>Dates of test (from – to)</b>	May 09 to June 09, 2014
<b>No of Units</b>	#1
<b>Equipment Category</b>	DSS
<b>Trade Name</b>	NEXGeneration Electronics
<b>RF Operating Frequency (ies)</b>	802.11b/g/n: 2412-2462 MHz Bluetooth : 2402-2480 MHz
<b>Number of Channels</b>	Bluetooth: 79CH 802.11b/g/n: 11CH
<b>Modulation</b>	802.11b/g/n: CCK/OFDM Bluetooth: GFSK& π/4-DQPSK &8DPSK
<b>Port</b>	Earphone Port, HDMI Port, USB Port, Power Port
<b>FCC ID</b>	2AATJ-M1036



**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 7 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **3 MODIFICATION**

N/A

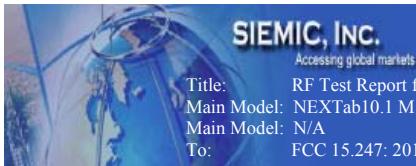

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 8 of 67  
www.siemic.com.cn

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

### Spread Spectrum System/Device

#### Test Results Summary

Test Standard	Description	Product Class	Pass / Fail
§15.247(i), §2.1093	RF Exposure	See Above	Pass
§15.203	Antenna Requirement	See Above	Pass
§15.207(a)	AC Line Conducted Emissions	See Above	Pass
§15.205, §15.209, §15.247(d)	Radiated Emissions	See Above	Pass
§15.247(a)(1)	20 dB Bandwidth	See Above	Pass
§15.247(a)(1)	Channel Separation	See Above	Pass
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	See Above	Pass
§15.247(a)(1)(iii)	Quantity of Hopping Channel	See Above	Pass
§15.247(b)(1)	Peak Output Power	See Above	Pass
§15.247(d)	Band Edge	See Above	Pass



Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 9 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 §15.247 (i) and §2.1093 – RF Exposure**

#### **Test Result: Pass**

The EUT is a portable device, thus requires SAR evaluation;  
please refer to SIEMIC RF Exposure Report: 14020302-FCC-H1



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 10 of 67  
www.siemic.com.cn

## **5.2 §15.203 – Antenna Requirement**

### **Standard Requirement:**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has 2 antennas: . a monopole antenna for Bluetooth, the gain is 2 dBi;  
a monopole antenna for WIFI, the gain is 2 dBi  
which in accordance to section 15.203, please refer to the internal photos.

### **Test Result: Pass**



## **5.3 §15.207 (a) – AC Line Conducted Emissions**

### **Standard Requirement:**

<b>Frequency of emission (MHz)</b>	<b>Conducted limit (dB<math>\mu</math>V)</b>	
	<b>Quasi-peak</b>	<b>Average</b>
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.

### **Procedures:**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 3.5$ dB.
4. Environmental Conditions  
Temperature  $20^{\circ}\text{C}$   
Relative Humidity  $50\%$   
Atmospheric Pressure  $1019\text{mbar}$
5. Test date : May 09, 2014  
Tested By : Ray Zhao


### **Test Result: Pass**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 12 of 67  
www.siemic.com.cn

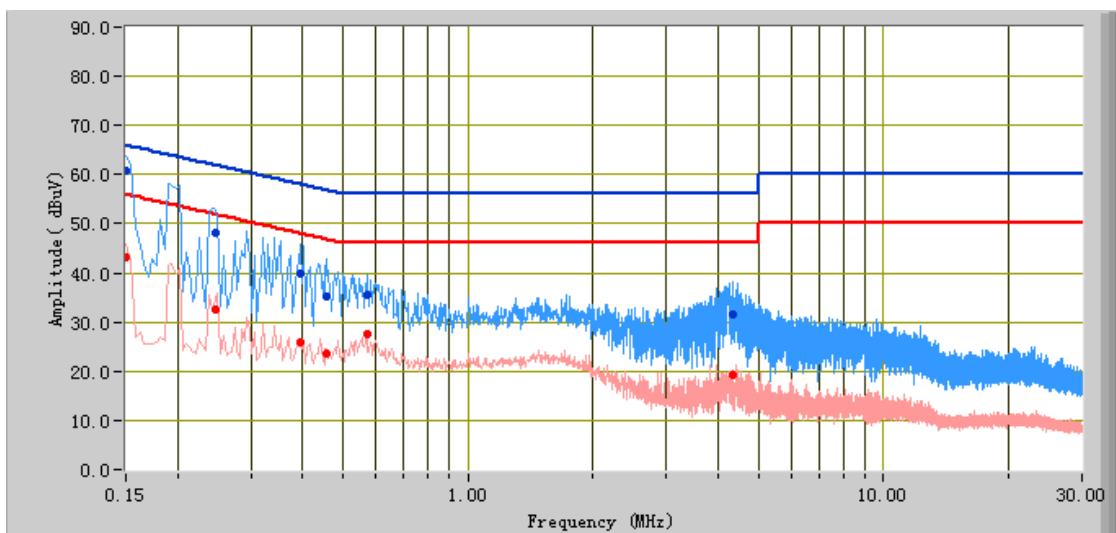**Test Mode:****Charging & GFSK Transmitting (Worse Case)****Peak Detector****Quasi Peak Limit****Average Detector****Average Limit**

## Test Data

### Phase Line Plot at 120V AC, 60Hz

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.15	60.62	66.00	-5.38	43.17	56.00	-12.83	12.22
0.25	48.05	61.89	-13.84	32.51	51.89	-19.38	11.46
0.39	39.96	57.98	-18.02	25.76	47.98	-22.22	11.24
0.46	35.10	56.73	-21.63	23.43	46.73	-23.30	11.15
0.57	35.66	56.00	-20.34	27.60	46.00	-18.40	11.03
4.33	31.39	56.00	-24.61	19.10	46.00	-26.90	10.89

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 13 of 67  
www.siemic.com.cn

**Test Mode: Charging & GFSK Transmitting (Worse Case)**

**Peak Detector** **Quasi Peak Limit**   
**Average Detector** **Average Limit**

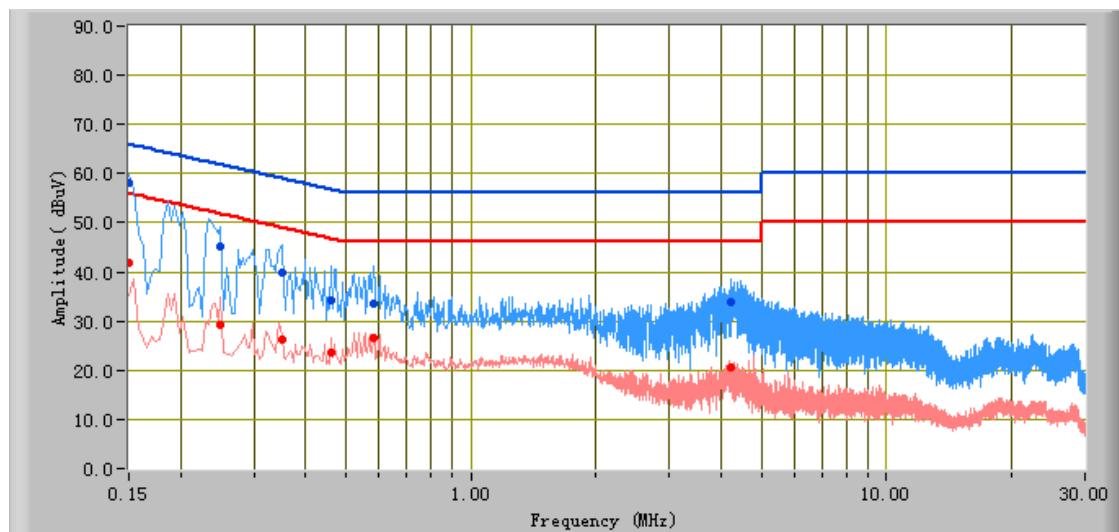

### Test Data

Phase Neutral Plot at 120V AC, 60Hz

Frequency (MHz)	Quasi Peak (dBuV)	Limit (dBuV)	Margin (dB)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Factors (dB)
0.15	58.12	66.00	-7.88	41.70	56.00	-14.30	12.21
0.25	45.27	61.76	-16.48	29.12	51.76	-22.64	11.46
0.35	40.01	58.96	-18.95	26.32	48.96	-22.64	11.30
0.58	33.51	56.00	-22.49	26.47	46.00	-19.53	11.00
0.46	34.10	56.66	-22.55	23.74	46.66	-22.92	11.12
4.22	33.88	56.00	-22.12	20.69	46.00	-25.31	10.94



## **5.4 §15.209, §15.205 & §15.247(d) - Spurious Emissions**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (3m & 10m) & 1GHz above (3m) is +5.6/-4.5dB.
4. Environmental Conditions      Temperature      20°C  
    Relative Humidity      50%  
    Atmospheric Pressure      1019mbar
5. Test date : May 09, 2014  
Tested By : Ray Zhao

### **Standard Requirement:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Procedures:**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. A Quasi-peak measurement was then made for that frequency point for below 1GHz test, PK and AV for above 1GHz emission test.
  - a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.
  - b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  - c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz.

1 kHz (Duty cycle < 98%)

10 Hz (Duty cycle > 98%)

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 15 of 67  
www.siemic.com.cn

4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

## Test Result: Pass

<b>Test Mode:</b>	<b>Charging &amp; GFSK Transmitting (Worse Case)</b>
-------------------	--

### *Below 1GHz*

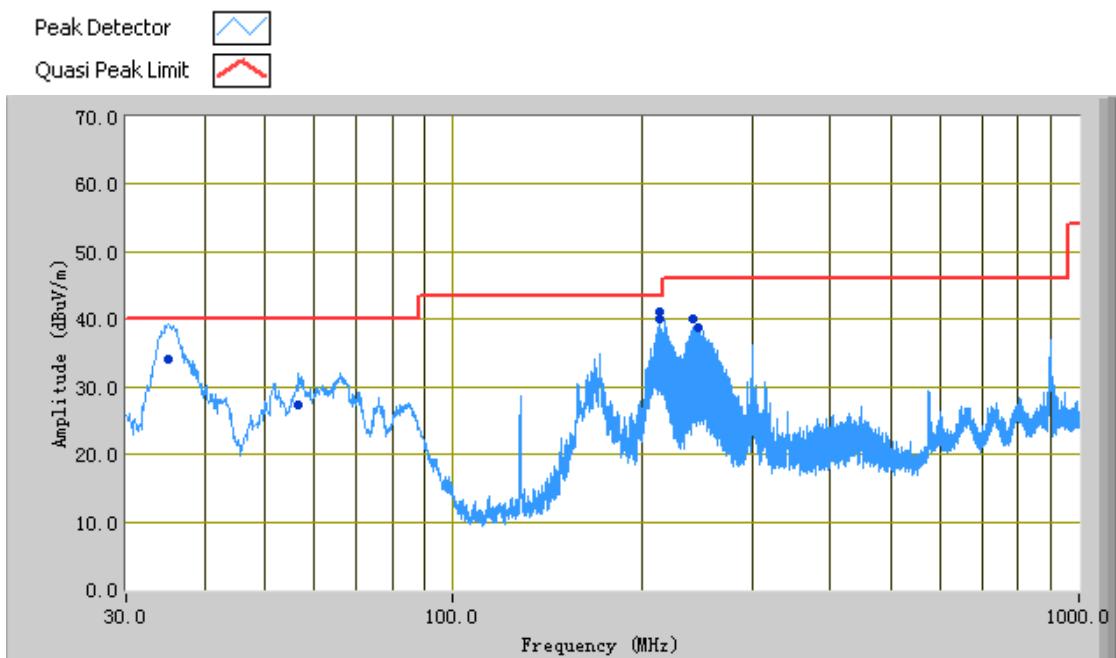

### Test Data

#### Horizontal & Vertical Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBuV/m)	Azimuth	Polarity(H /V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
34.93	34.10	1.00	V	244.00	-26.28	40.00	-5.90
213.02	40.16	226.00	H	154.00	-34.00	43.50	-3.34
214.17	41.04	204.00	H	126.00	-33.96	43.50	-2.46
241.15	40.18	93.00	H	137.00	-33.07	46.00	-5.82
245.92	38.72	95.00	H	118.00	-32.95	46.00	-7.28
56.39	27.33	170.00	V	143.00	-37.84	40.00	-12.67

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
 Main Model: NEXTab10.1 M1036  
 Main Model: N/A  
 To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
 Issue Date: June 09, 2014  
 Page: 16 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

**Test Mode:****GFSK Transmitting(Worse Case)*****Above 1 GHz***

**Note: Other Bluetooth modes were verified; only the result of worst case DH5 mode was presented.**

**Low Channel (2402 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	33.40	AV	284	100	V	33.1	3.3	24	45.80	54	-8.20
4804	37.16	AV	88	150	H	33.2	3.3	24	49.66	54	-4.34
4804	40.78	PK	284	100	V	33.1	3.3	24	53.18	74	-20.82
4804	41.57	PK	88	150	H	33.2	3.3	24	54.07	74	-19.93
5585.4	31.42	AV	218	250	V	35.9	3.8	24	47.12	54	-6.88
5585.4	34.04	AV	237	200	H	36.2	3.8	24	50.04	54	-3.96
5585.4	41.30	PK	218	250	V	35.9	3.8	24	57.00	74	-17.00
5585.4	41.88	PK	237	200	H	36.2	3.8	24	57.88	74	-16.12

**Middle Channel (2441 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4880	34.54	AV	275	150	V	33.1	3.3	24	46.94	54	-7.06
4880	36.71	AV	78	200	H	33.2	3.3	24	49.21	54	-4.79
4880	43.05	PK	275	150	V	33.1	3.3	24	55.45	74	-18.55
4880	44.13	PK	78	200	H	33.2	3.3	24	56.63	74	-17.37
5592.4	32.18	AV	203	150	V	35.9	3.8	24	47.88	54	-6.12
5592.4	33.62	AV	198	150	H	36.2	3.8	24	49.62	54	-4.38
5592.4	40.98	PK	203	150	V	35.9	3.8	24	56.68	74	-17.32
5592.4	41.40	PK	198	150	H	36.2	3.8	24	57.40	74	-16.60

**High Channel (2480 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	36.06	AV	272	100	V	33.1	3.3	24	48.46	54	-5.54
4960	35.96	AV	85	150	H	33.2	3.3	24	48.46	54	-5.54
4960	41.20	PK	272	100	V	33.1	3.3	24	53.60	74	-20.40
4960	43.60	PK	85	150	H	33.2	3.3	24	56.10	74	-17.90
5587.6	32.94	AV	211	200	V	35.9	3.8	24	48.64	54	-5.36
5587.6	32.44	AV	225	200	H	36.2	3.8	24	48.44	54	-5.56
5587.6	43.51	PK	211	200	V	35.9	3.8	24	59.21	74	-14.79
5587.6	42.35	PK	225	200	H	36.2	3.8	24	58.35	74	-15.65

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 17 of 67  
www.siemic.com.cn

## **§15.247(a) (1)-Channel Separation**

### 1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.

### 2. Environmental Conditions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

### 3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .

### 4. Test date : June 03, 2014

Tested By : Ray Zhao

### **Standard Requirement:**

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **Procedures:**

1. Place the EUT on the table and set it in hopping function transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span, Video (or Average) Bandwidth (VBW)  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

### **Test Result: Pass**


Test Mode:	GFSK Transmitting			
------------	-------------------	--	--	--

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.004	0.693	Pass
Adjacency Channel	2403			
Mid Channel	2440	1.004	0.693	Pass
Adjacency Channel	2441			
High Channel	2480	1.004	0.693	Pass
Adjacency Channel	2479			

Please refer to the following plots.




## Low Channel

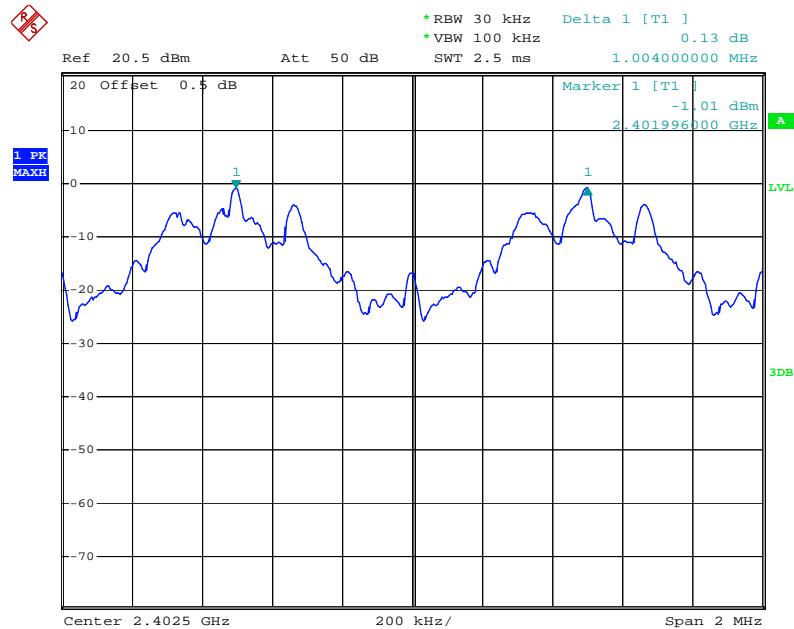

Date: 3.JUN.2014 12:42:42

## Middle Channel

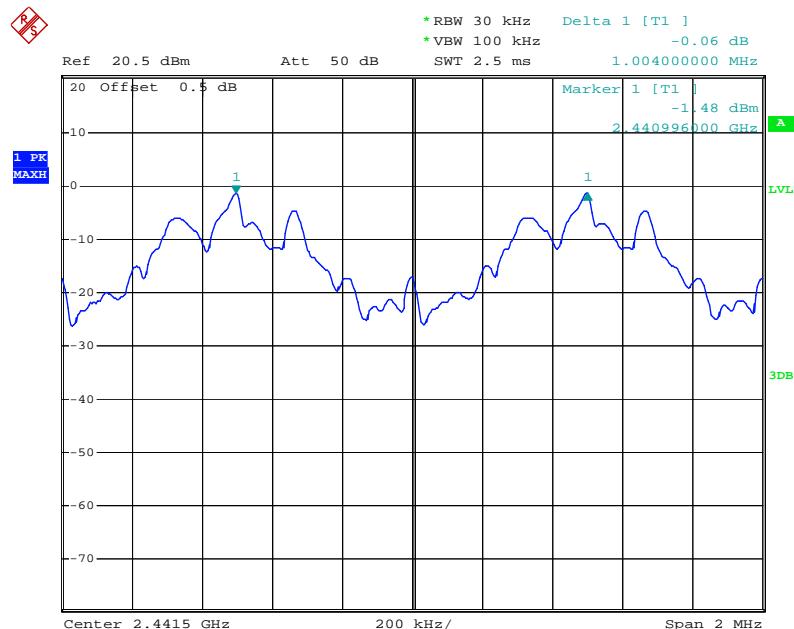

Date: 3.JUN.2014 12:46:50


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 19 of 67  
www.siemic.com.cn

## High Channel

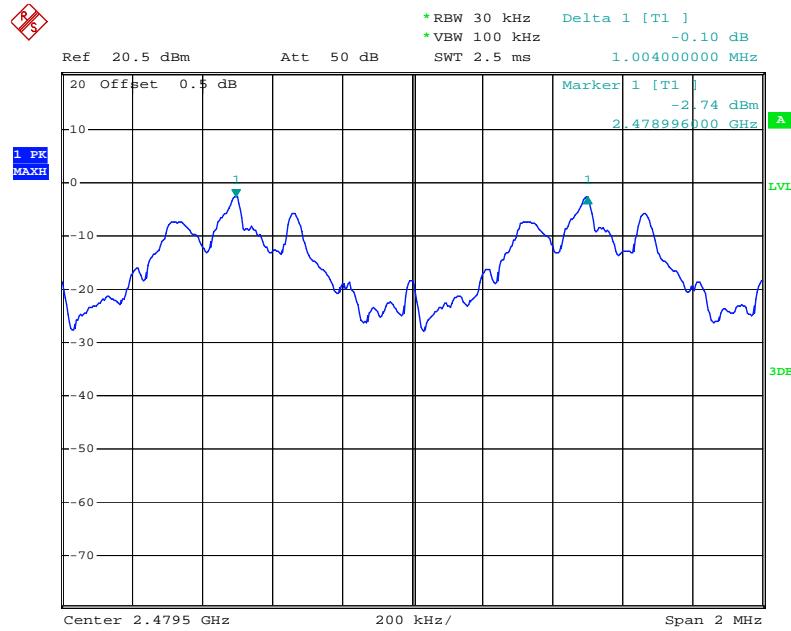

Date: 3.JUN.2014 12:58:29

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 20 of 67  
www.siemic.com.cn

**Test Mode:****π /4-DQPSK Transmitting**

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.002	0.901	Pass
Adjacency Channel	2403			
Mid Channel	2440	1.002	0.901	Pass
Adjacency Channel	2441			
High Channel	2480	1.002	0.901	Pass
Adjacency Channel	2479			

Please refer to the following plots.

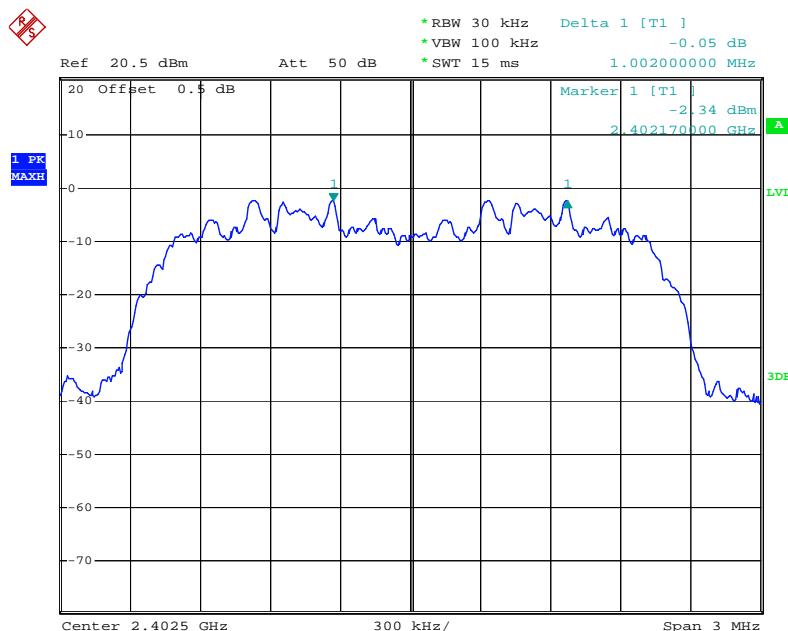**Low Channel**

Date: 3.JUN.2014 14:27:27


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 21 of 67  
www.siemic.com.cn

## Middle Channel

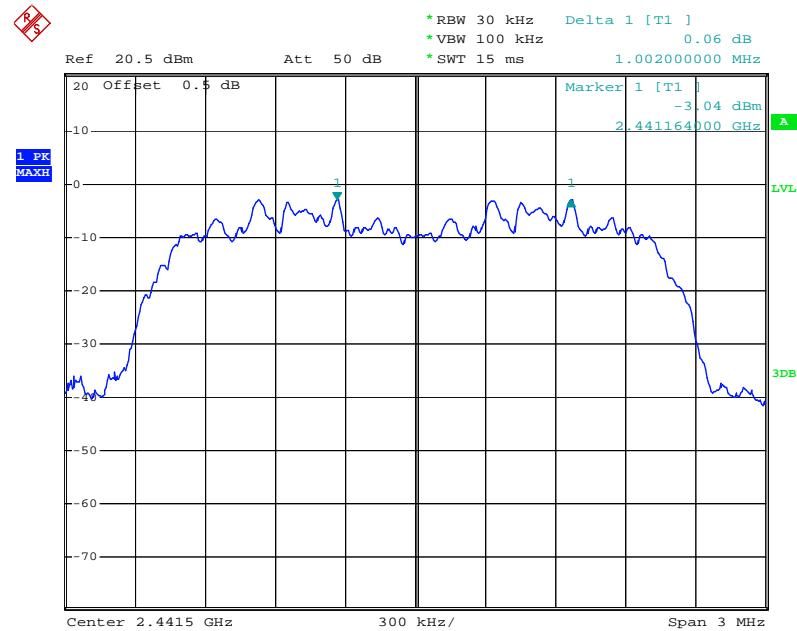

Date: 3.JUN.2014 14:26:09

## High Channel

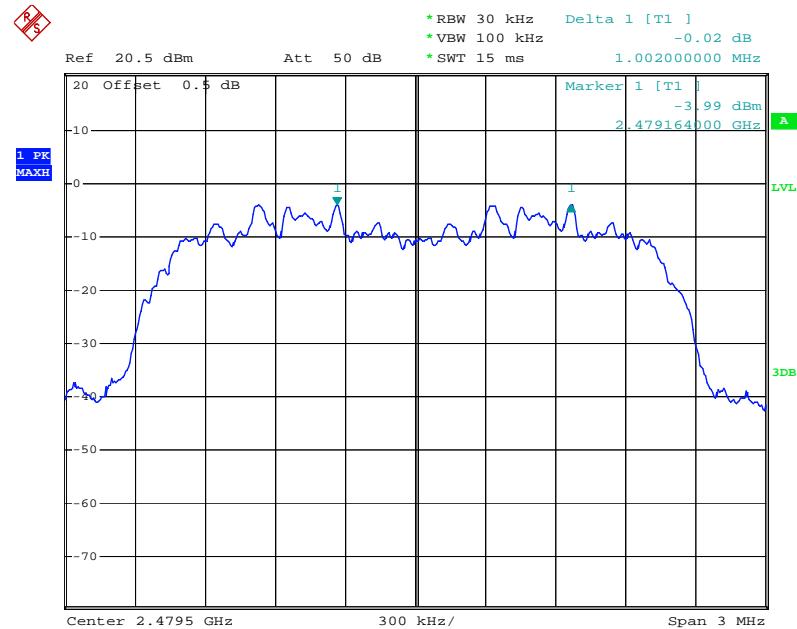

Date: 3.JUN.2014 14:22:36



Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 22 of 67  
www.siemic.com.cn

**Test Mode: 8DPSK Transmitting**

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.002	0.885	Pass
Adjacency Channel	2403			
Mid Channel	2440	1.002	0.885	Pass
Adjacency Channel	2441			
High Channel	2480	1.002	0.885	Pass
Adjacency Channel	2479			

Please refer to the following plots.

### Low Channel

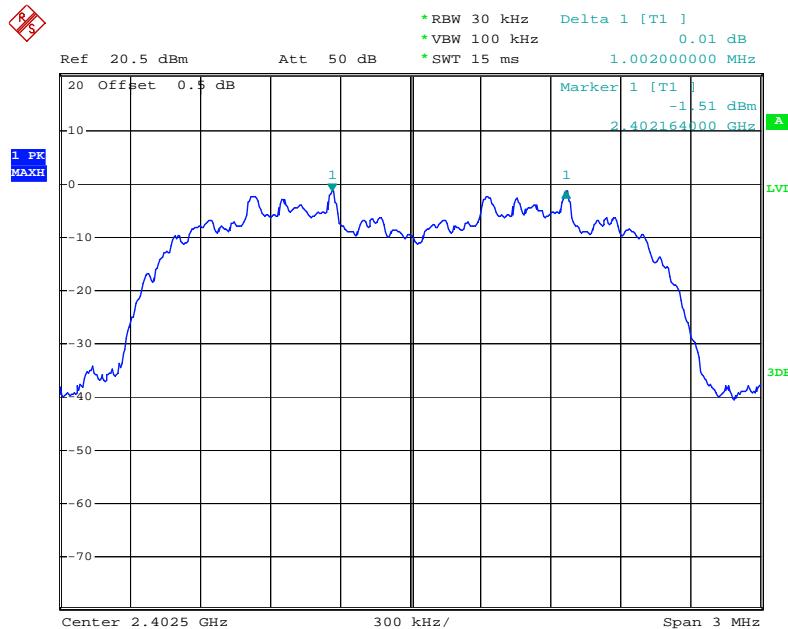

Date: 3.JUN.2014 14:32:34


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 23 of 67  
www.siemic.com.cn

## Middle Channel

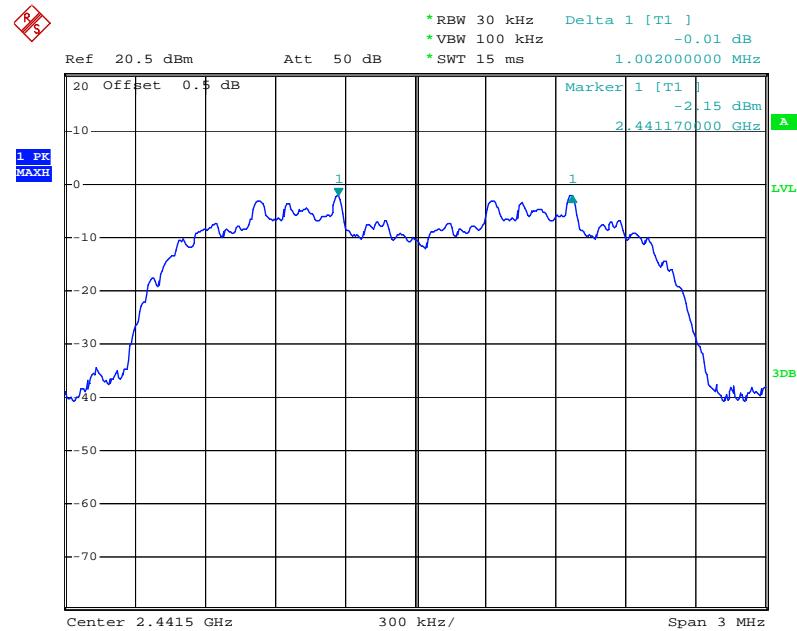

Date: 3.JUN.2014 14:34:14

## High Channel

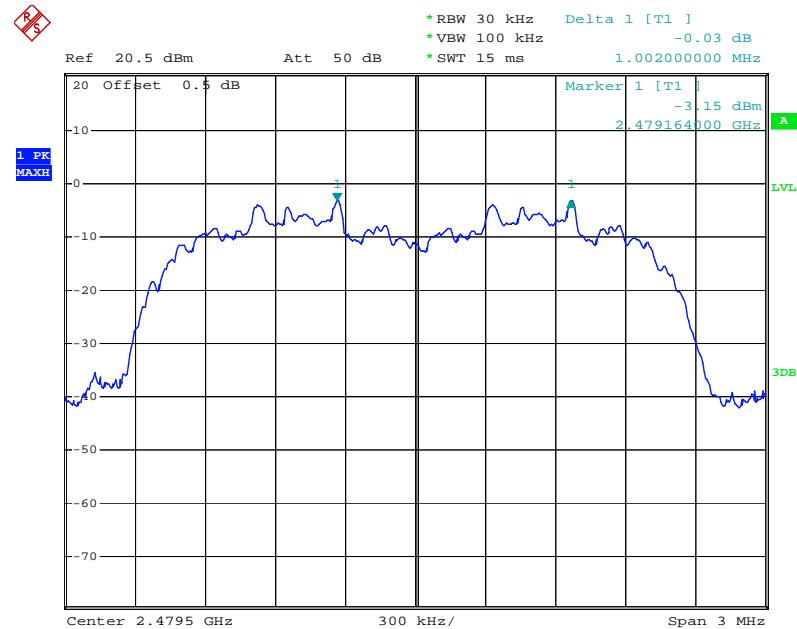

Date: 3.JUN.2014 14:36:50

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 24 of 67  
www.siemic.com.cn

## **§15.247(a) (1) – 20dB Bandwidth**

### 1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

### 2. Environmental Conditions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

### 3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.

### 4. Test date : June 03, 2014

Tested By : Ray Zhao

### **Standard Requirement:**

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### **Procedures:**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel,  $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$ , Sweep = auto, Detector function = peak, Trace = max hold.
4. Set the measured low, middle and high frequency and test 20dB bandwidth with spectrum analyzer.

### **Test Result: Pass**


<b>Test Mode:</b>	<b>GFSK Transmitting</b>
-------------------	--------------------------

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.040
Middle	2441	1.040
High	2480	1.040

Please refer to the following plots.




### Low Channel

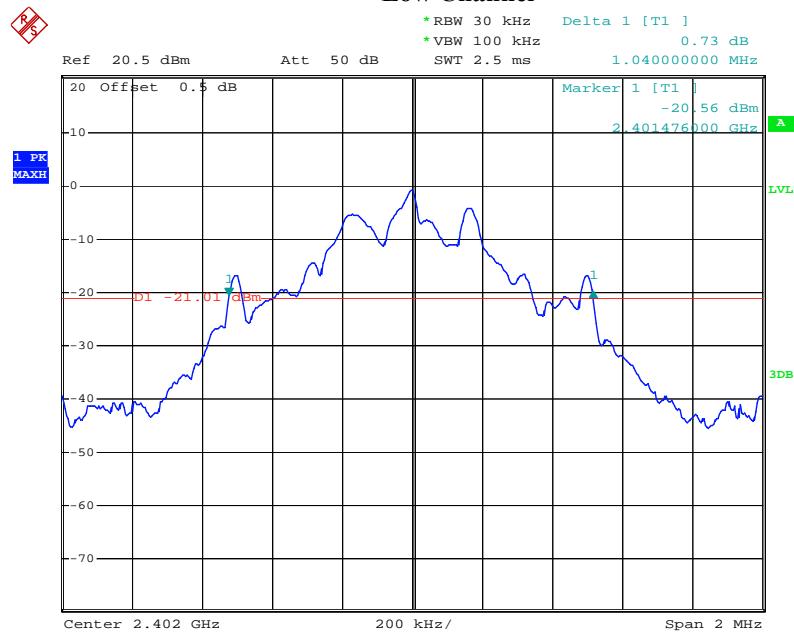

Date: 3.JUN.2014 12:37:41

### Middle Channel

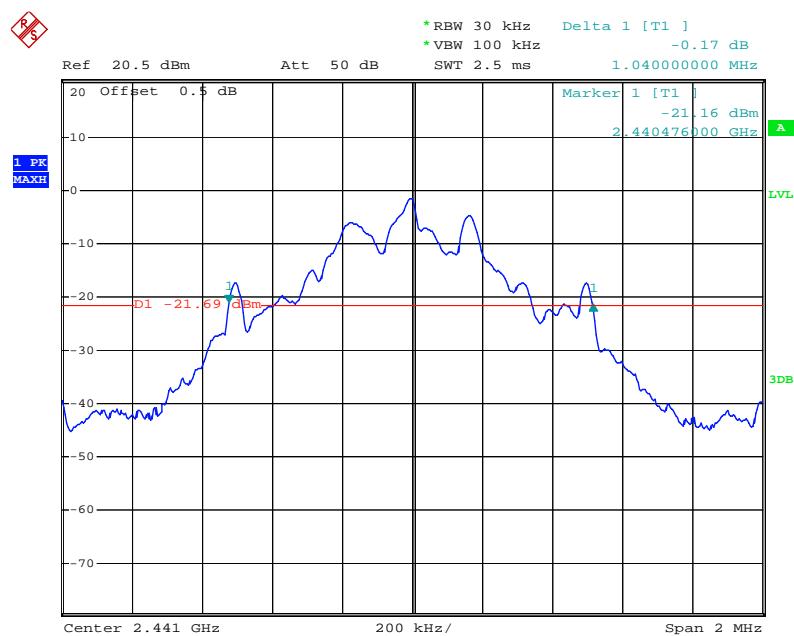

Date: 3.JUN.2014 12:49:08


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 26 of 67  
www.siemic.com.cn

## High Channel

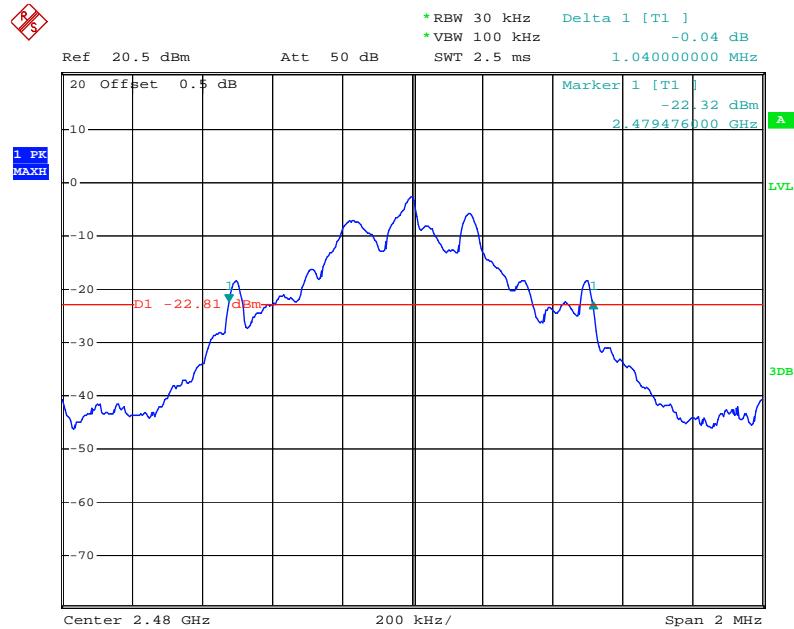

Date: 3.JUN.2014 12:56:01

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 27 of 67  
www.siemic.com.cn

**Test Mode:** **$\pi/4$ -DQPSK Transmitting**

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.352
Middle	2441	1.352
High	2480	1.352

Please refer to the following plots.


### Low Channel

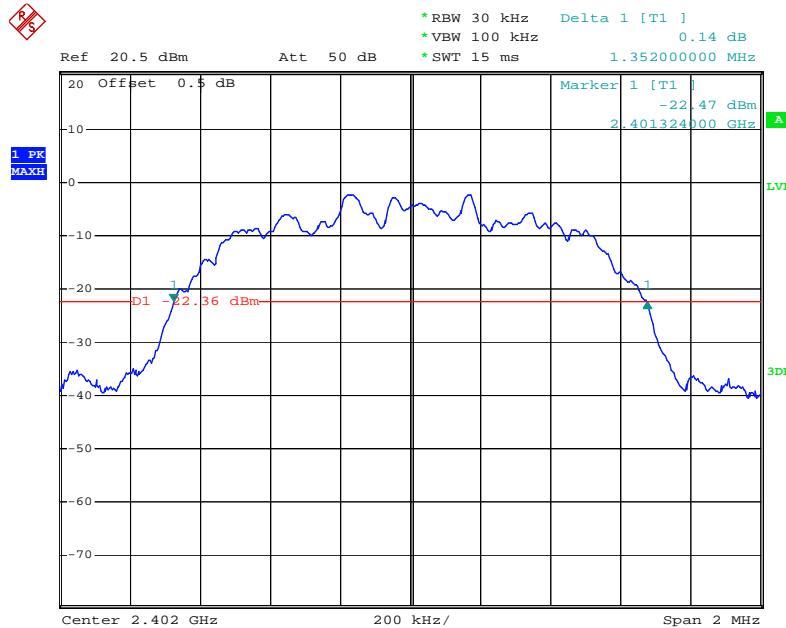

Date: 3.JUN.2014 14:28:17




## Middle Channel

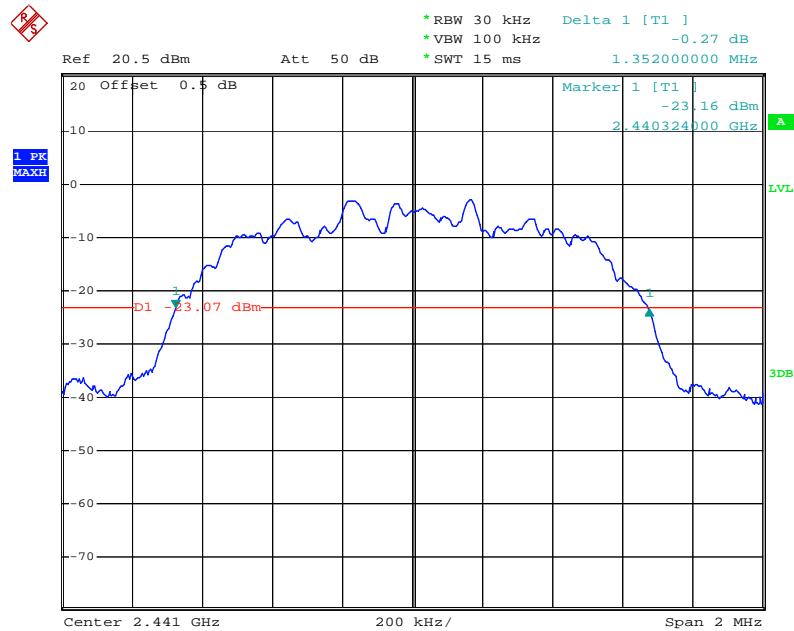

Date: 3.JUN.2014 14:20:39

## High Channel

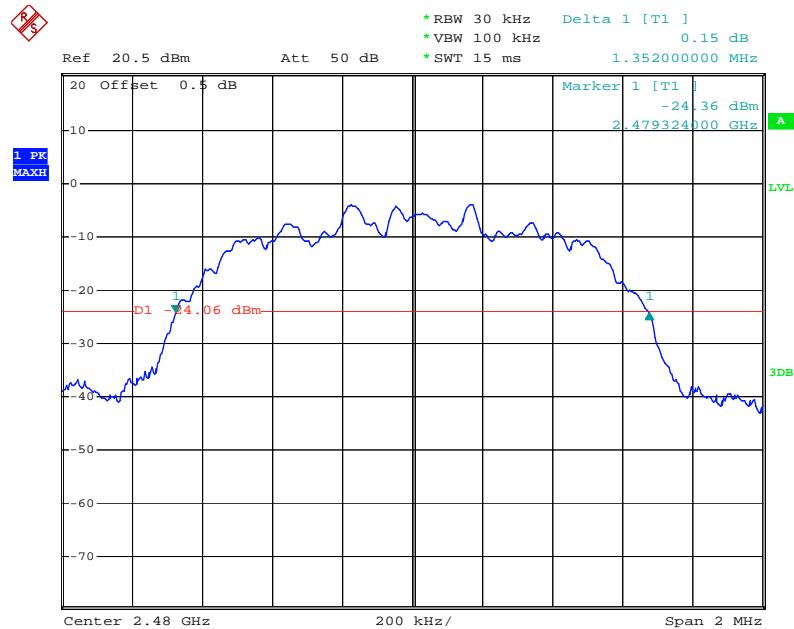

Date: 3.JUN.2014 14:23:27

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 29 of 67  
www.siemic.com.cn

**Test Mode: 8DPSK Transmitting**

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.328
Middle	2441	1.328
High	2480	1.328

Please refer to the following plots.

### Low Channel

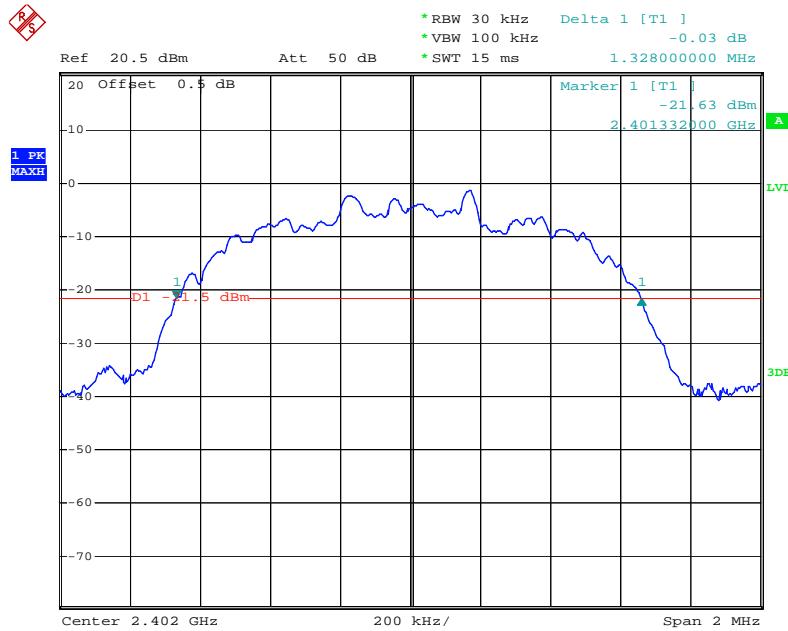

Date: 3.JUN.2014 14:31:32


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 30 of 67  
www.siemic.com.cn

### Middle Channel

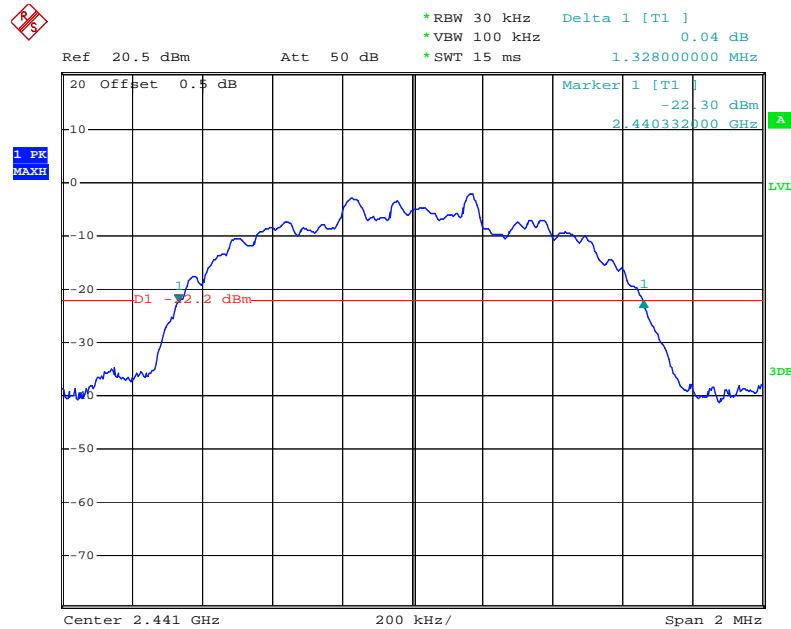

Date: 3.JUN.2014 14:34:48

### High Channel

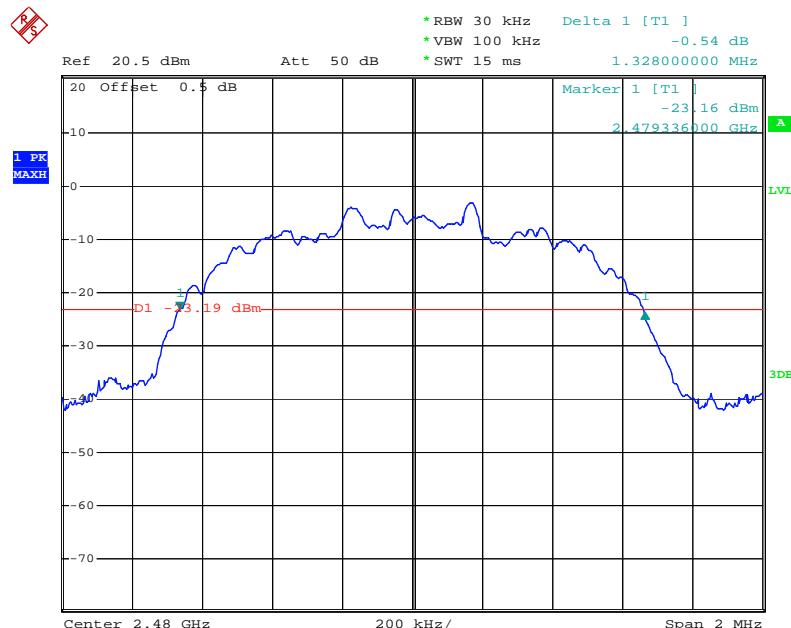

Date: 3.JUN.2014 14:37:31



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 31 of 67  
www.siemic.com.cn

## **5.5 §15.247(a) (1) (iii)-Number of Hopping Channels**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions  

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test date : June 09, 2014  
Tested By : Ray Zhao

### **Standard Requirement:**

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### **Procedures:**

1. Place the EUT on the table and set it in hopping function transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as Start=2400MHz, Stop = 2483.5MHz, Span = the frequency band of operation, RBW  $\geq 1\%$  of the span, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold.
4. Count the quantity of peaks to get the number of hopping channels.

### **Test Result: Pass**

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 32 of 67  
www.siemic.com.cn

**Test Mode:****Hopping Mode With GFSK Modulation**

Frequency Range (MHz)	Number of Hopping Channels	Limit
2400-2483.5	79	$\geq 15$

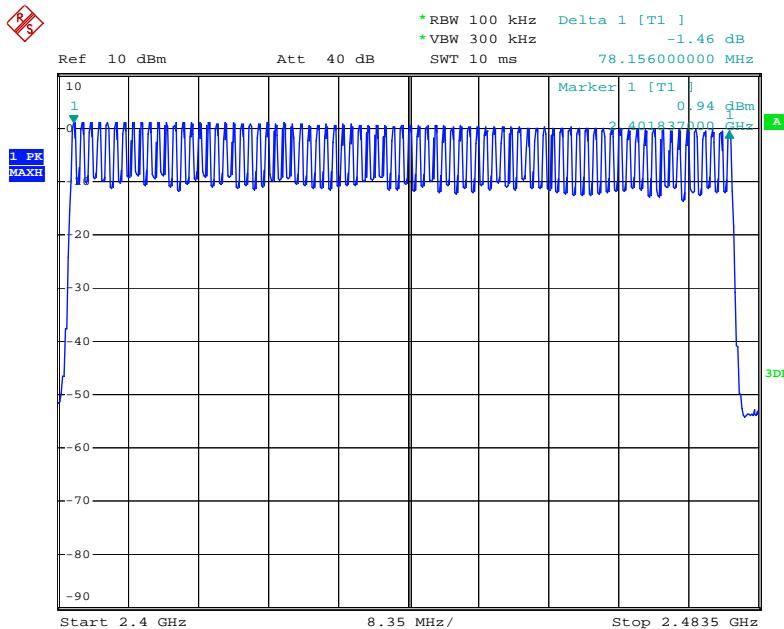**Please refer to following tables and plots****Number of Hopping Channels**

Date: 9.JUN.2014 12:32:02

**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 33 of 67  
www.siemic.com.cn

**Test Mode:****Hopping Mode With  $\pi/4$ -DQPSK Modulation**

Frequency Range (MHz)	Number of Hopping Channels	Limit
2400-2483.5	79	$\geq 15$

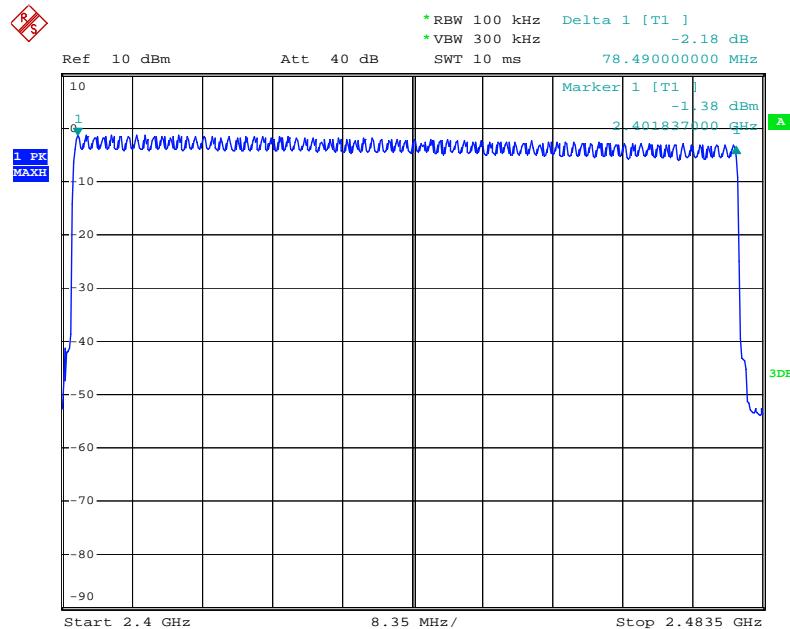**Please refer to following tables and plots****Number of Hopping Channels**

Date: 9.JUN.2014 12:46:28




## Test Mode:

## **Hopping Mode With 8DPSK Modulation**

Frequency Range (MHz)	Number of Hopping Channels	Limit
2400-2483.5	79	$\geq 15$

**Please refer to following tables and plots**

## Number of Hopping Channels

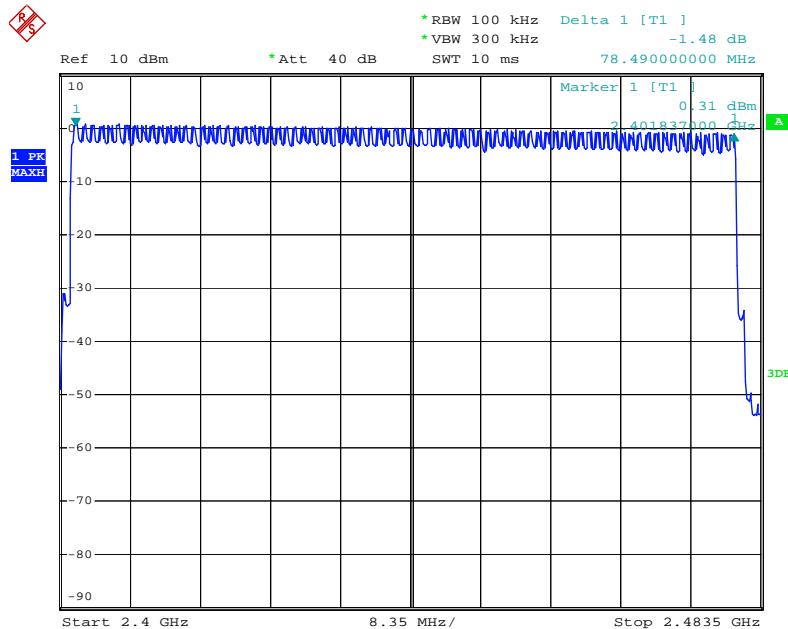

Date: 9.JUN.2014 13:01:30

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 35 of 67  
www.siemic.com.cn

## **5.6 §15.247(a) (1) (iii) -Time of Occupancy (Dwell Time)**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions  

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test date : June 03, 2014  
Tested By : Ray Zhao

### **Standard Requirement:**

According to §15.247(a)(1)(iii), The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Procedures:**

1. Place the EUT on the table and set it in transmitting mode and switch on frequency hopping function.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as Span = zero span, centered on a hopping channel,  
RBW=1MHz, VBW  $\geq$  RBW, Sweep = as necessary to capture the entire dwell time per hopping channel, Detector function = peak, Trace = max hold.
4. Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

### **Test Result: Pass**

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 36 of 67  
www.siemic.com.cn

**Test Mode:****Hopping Mode With GFSK Modulation**

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 5	Low	2.960	0.31573	0.4	Pass
	Middle	2.960	0.31573	0.4	Pass
	High	2.960	0.31573	0.4	Pass
<i>Note:</i> Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second					

Please refer to the following plots.

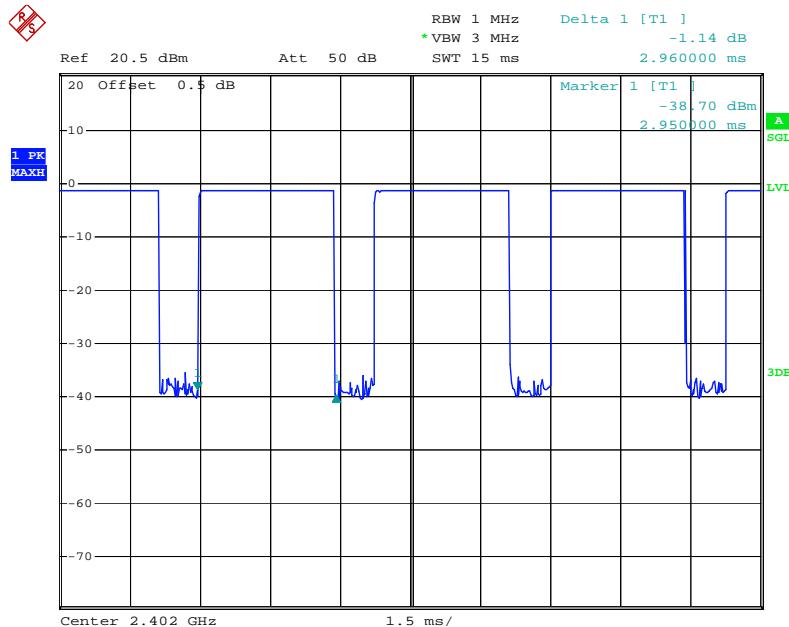**Low Channel for DH5**

Date: 3.JUN.2014 12:40:46


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 37 of 67  
www.siemic.com.cn

### Middle Channel for DH5

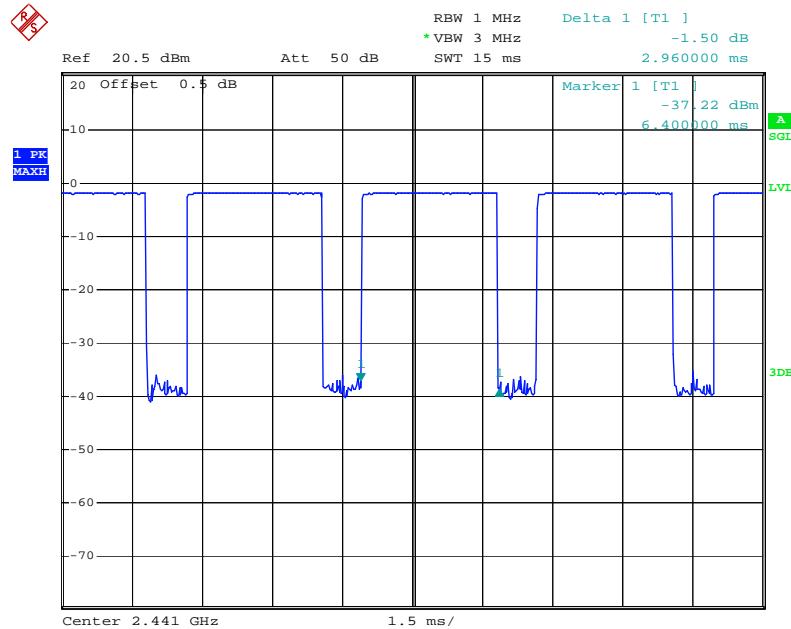

Date: 3.JUN.2014 12:52:37

### High Channel for DH5

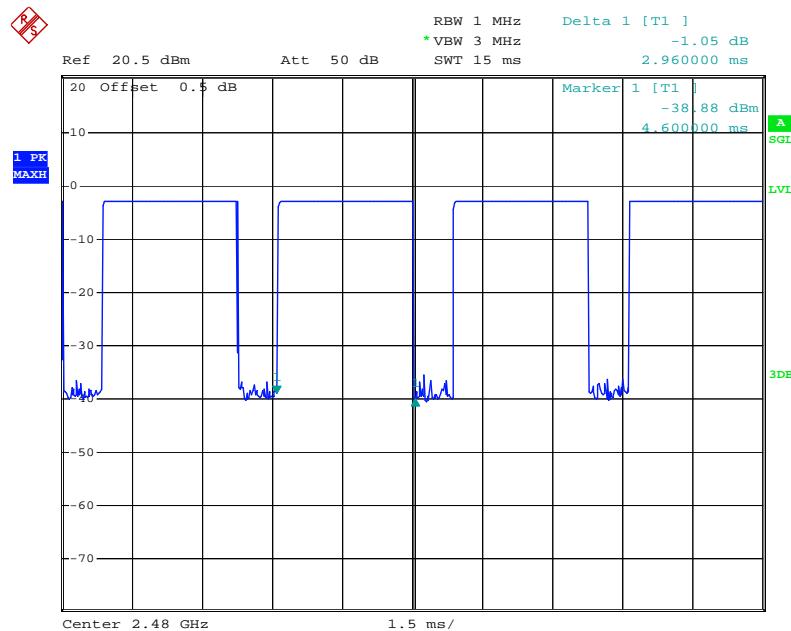


Date: 3.JUN.2014 12:53:42

**Test Mode: Hopping Mode With  $\pi/4$ -DQPSK Modulation**

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 5	Low	3.000	0.32000	0.4	Pass
	Middle	2.970	0.31680	0.4	Pass
	High	3.000	0.32000	0.4	Pass
	<i>Note:</i> Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second				

Please refer to the following plots.

**Low Channel for DH5**

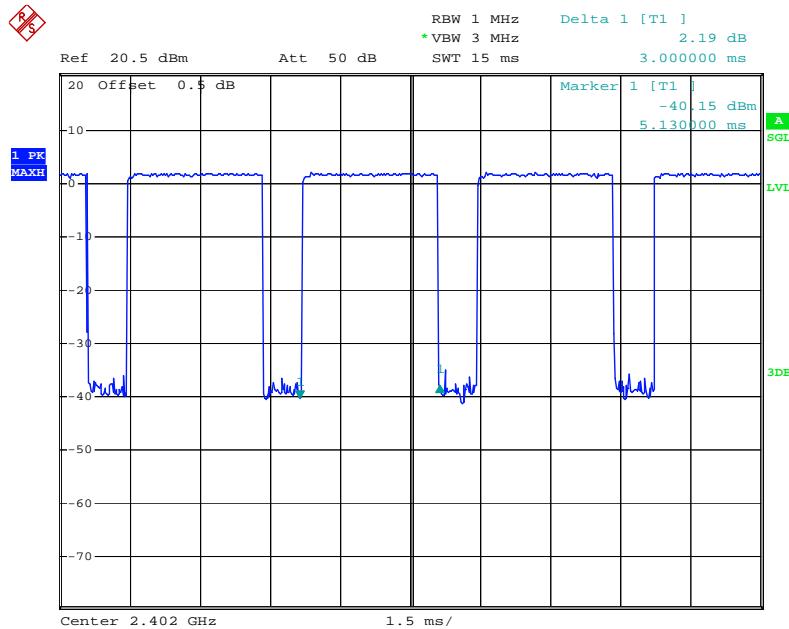

Date: 3.JUN.2014 14:29:09


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 39 of 67  
www.siemic.com.cn

### Middle Channel for DH5

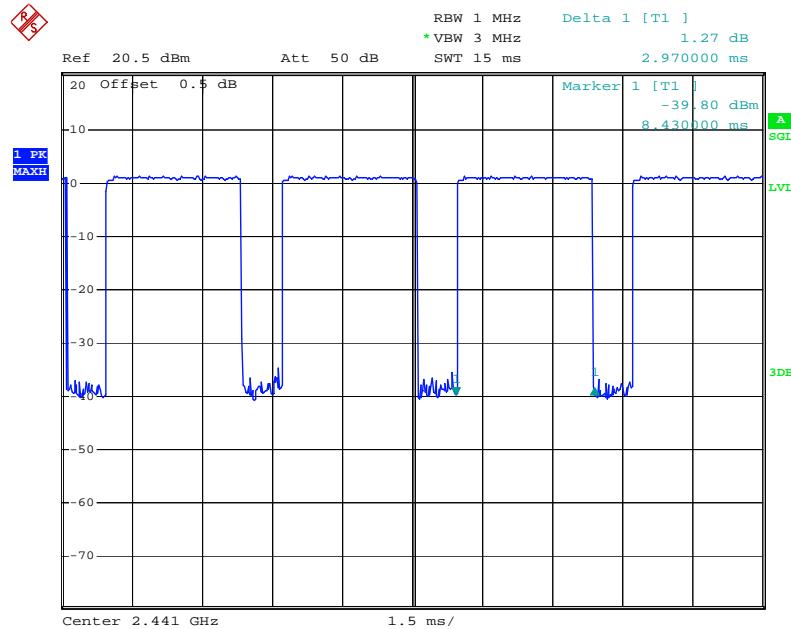

Date: 3.JUN.2014 14:19:16

### High Channel for DH5

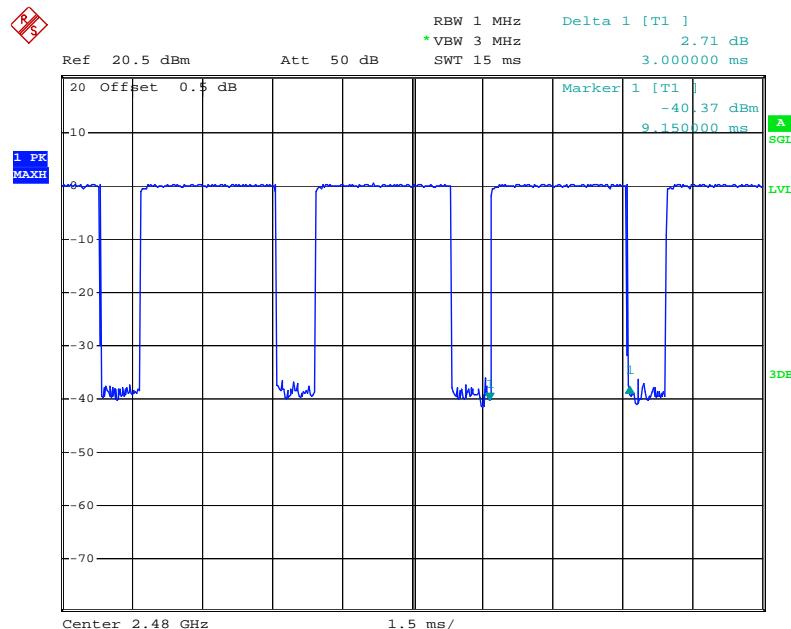

Date: 3.JUN.2014 14:24:39

**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 40 of 67  
www.siemic.com.cn

**Test Mode:****Hopping Mode With 8DPSK Modulation**

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 5	Low	3.000	0.32000	0.4	Pass
	Middle	2.970	0.31680	0.4	Pass
	High	2.970	0.31680	0.4	Pass
	<b>Note:</b> Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6 Second				

Please refer to the following plots.

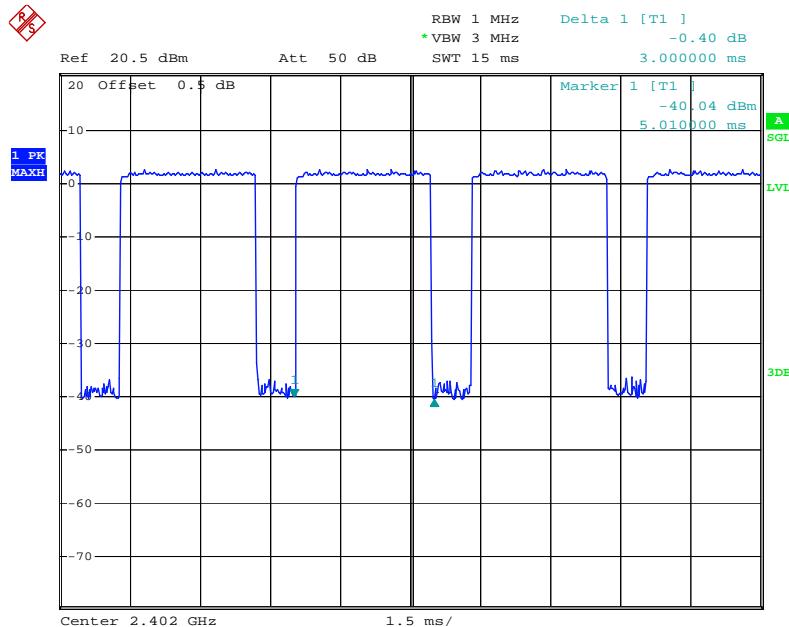**Low Channel for DH5**

Date: 3.JUN.2014 14:30:25


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 41 of 67  
www.siemic.com.cn

### Middle Channel for DH5

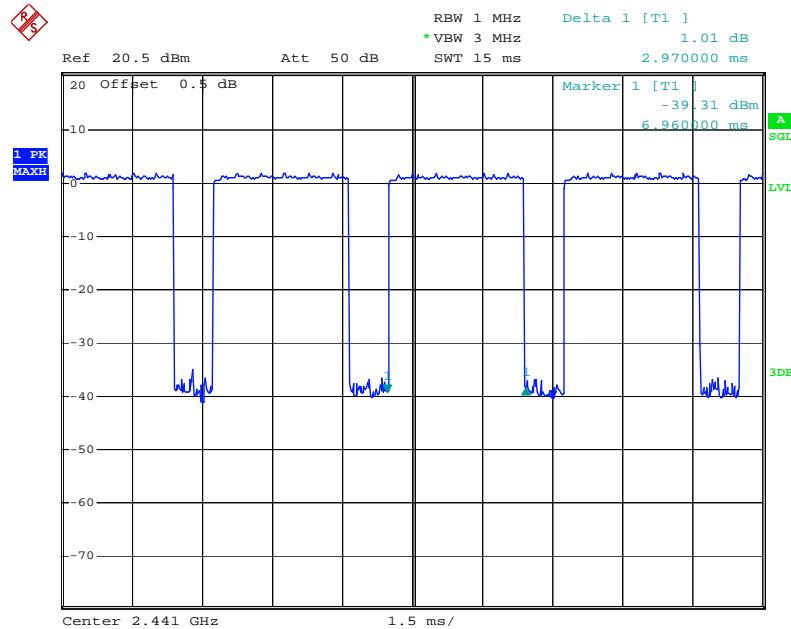

Date: 3.JUN.2014 14:35:37

### High Channel for DH5

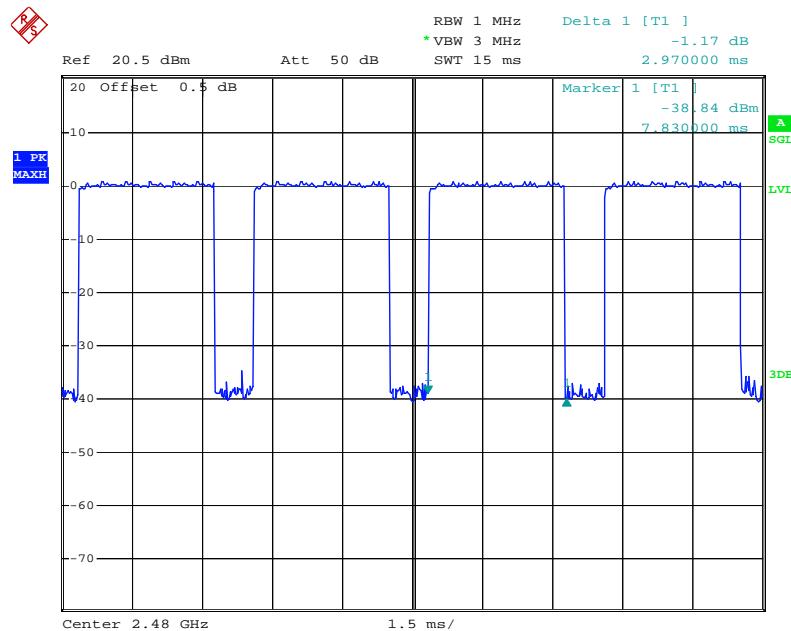

Date: 3.JUN.2014 14:38:21

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 42 of 67  
www.siemic.com.cn

## **5.7 §15.247(b) (1) - Peak Output Power**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions      Temperature       $20^\circ\text{C}$   
    Relative Humidity      50%  
    Atmospheric Pressure      1019mbar
4. Test date : June 03, 2014  
Tested By : Ray Zhao

### **Standard Requirement:**

According to §15.247(b)(2), For frequency hopping systems in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125watts.

### **Procedures:**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel, RBW > the 20 dB bandwidth of the emission being measured,  $\text{VBW} \geq \text{RBW}$ , Sweep=auto, Detector function=peak, Trace = max hold.
4. Then set the EUT to transmit at low, middle and high channel and measure the conducted output power separately.

### **Test Result: Pass**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 43 of 67  
www.siemic.com.cn

**Test Mode: GFSK Transmitting**

Channel	Channel frequency (MHz)	Peak output power (dBm)	Power output (mW)	Limit (mW)
Low channel	2402	-1.01	0.79	125
Middle channel	2441	-1.81	0.66	125
High channel	2480	-2.80	0.52	125

Please refer to the following plots.

**Note:** The data above was tested in conducted mode.

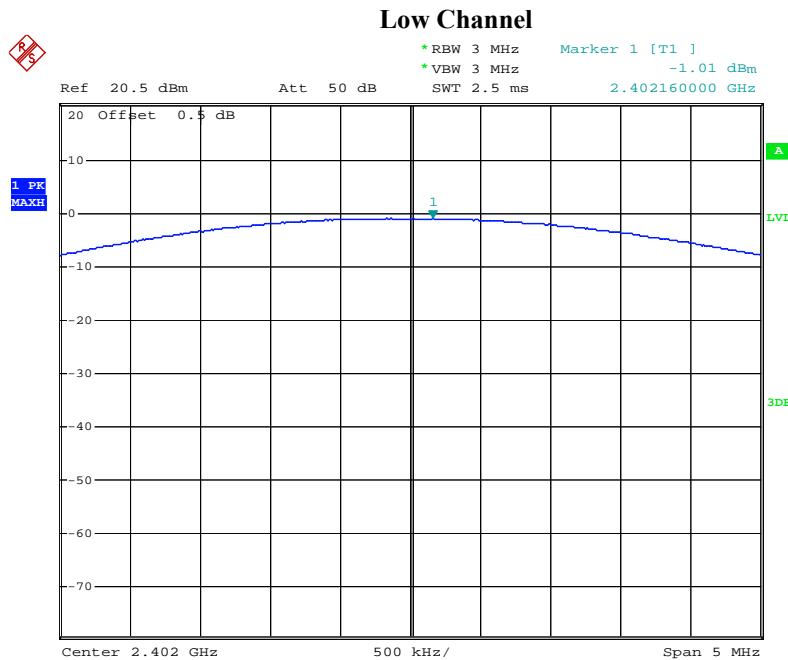

Date: 3.JUN.2014 12:39:26


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 44 of 67  
www.siemic.com.cn

### Middle Channel

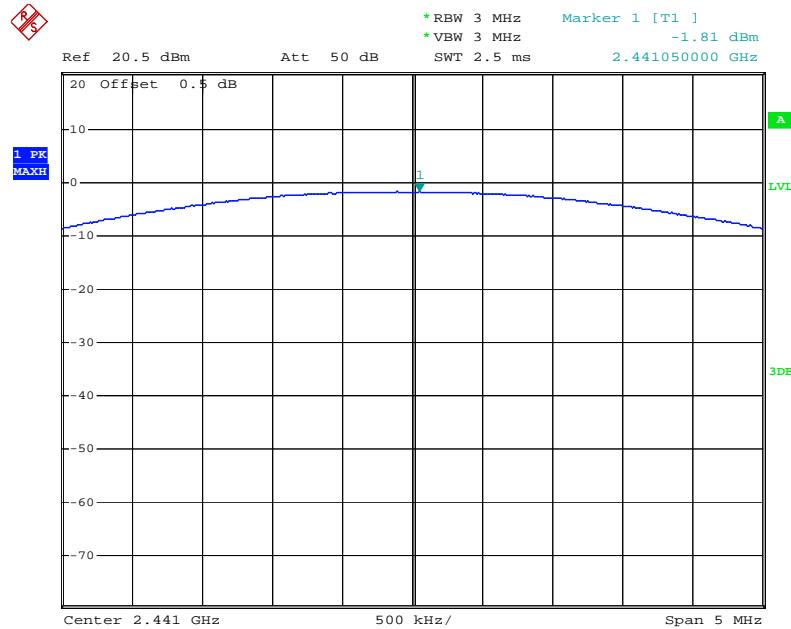

Date: 3.JUN.2014 12:50:31

### High Channel

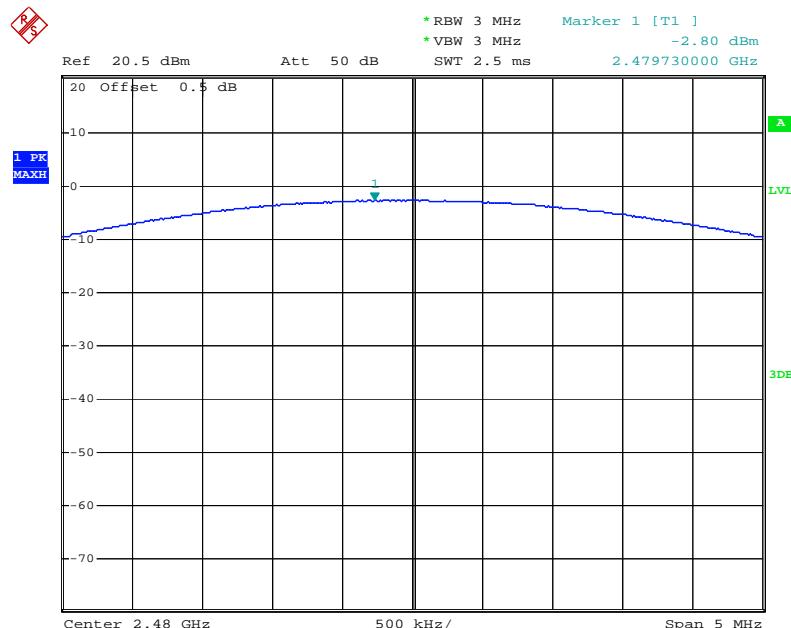

Date: 3.JUN.2014 12:56:50

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 45 of 67  
www.siemic.com.cn

**Test Mode:**  $\pi/4$ -DQPSK Transmitting

Channel	Channel frequency (MHz)	Peak output power (dBm)	Power output (mW)	Limit (mW)
Low channel	2402	2.69	1.86	125
Middle channel	2441	1.96	1.57	125
High channel	2480	1.06	1.28	125

Please refer to the following plots.

**Note:** The data above was tested in conducted mode.

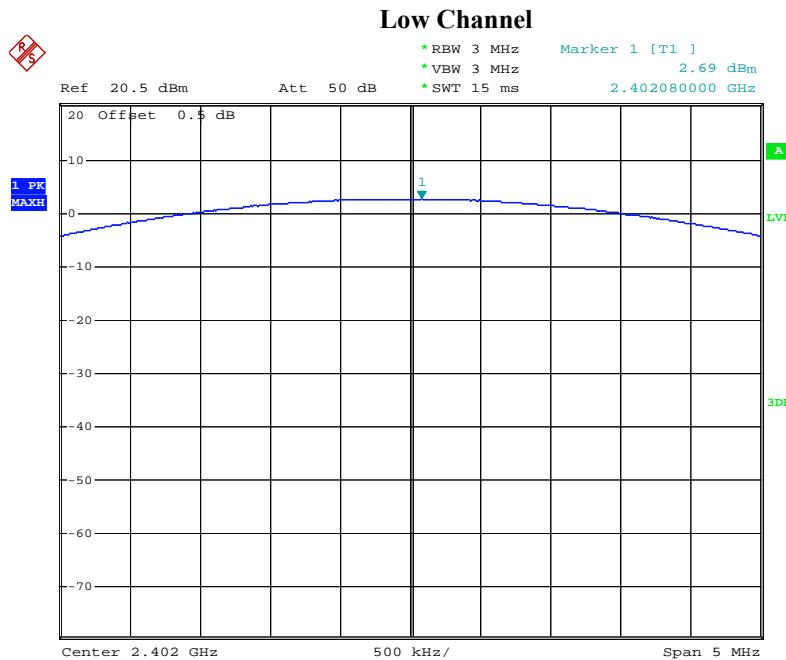

Date: 3.JUN.2014 14:28:35


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 46 of 67  
www.siemic.com.cn

### Middle Channel

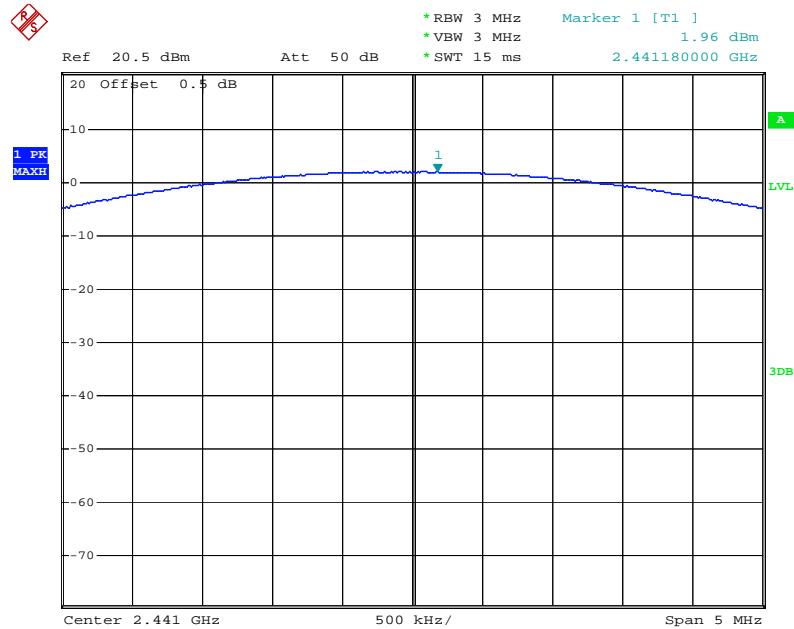

Date: 3.JUN.2014 14:19:52

### High Channel

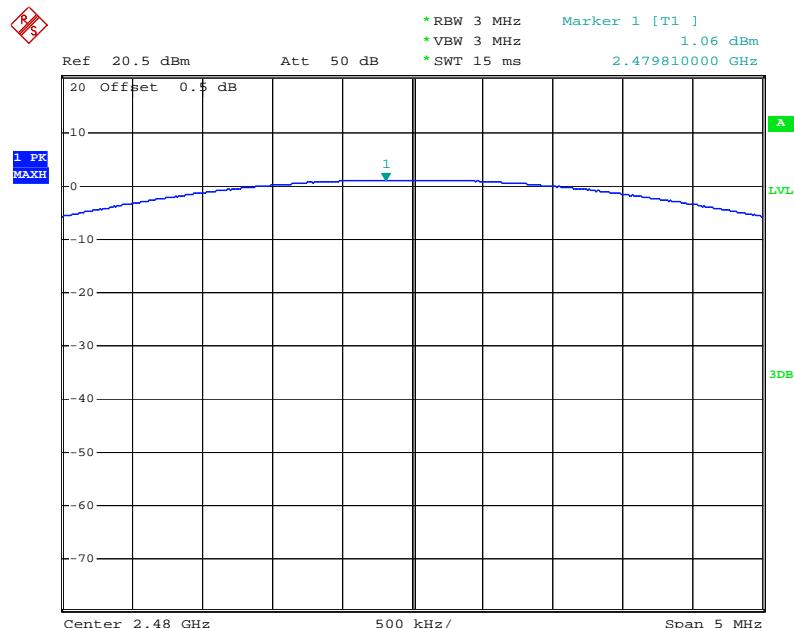

Date: 3.JUN.2014 14:23:51

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 47 of 67  
www.siemic.com.cn

**Test Mode: 8DPSK Transmitting**

Channel	Channel frequency (MHz)	Peak output power (dBm)	Power output (mW)	Limit (mW)
Low channel	2402	3.00	2.00	125
Middle channel	2441	2.35	1.72	125
High channel	2480	1.36	1.37	125

Please refer to the following plots.

**Note:** The data above was tested in conducted mode.

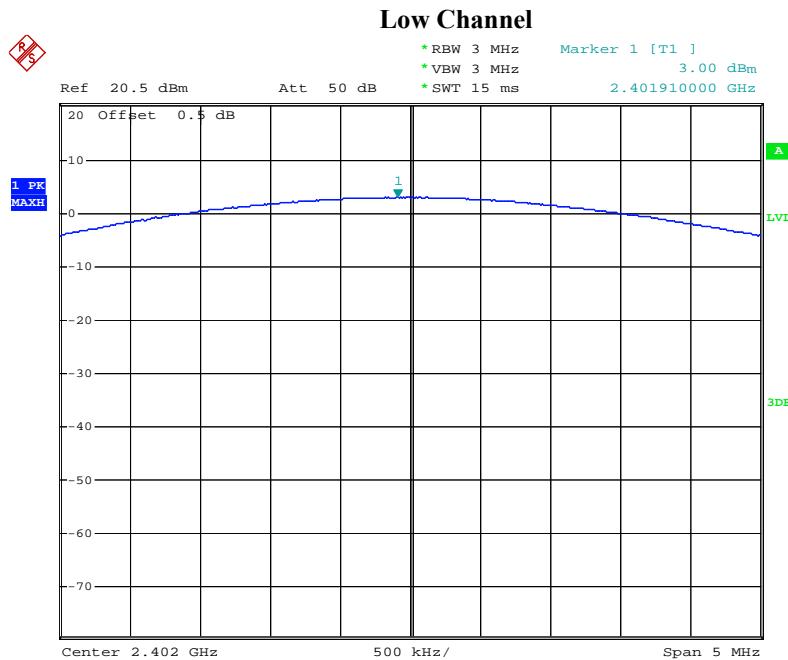

Date: 3.JUN.2014 14:30:45


**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009


Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 48 of 67  
www.siemic.com.cn

### Middle Channel

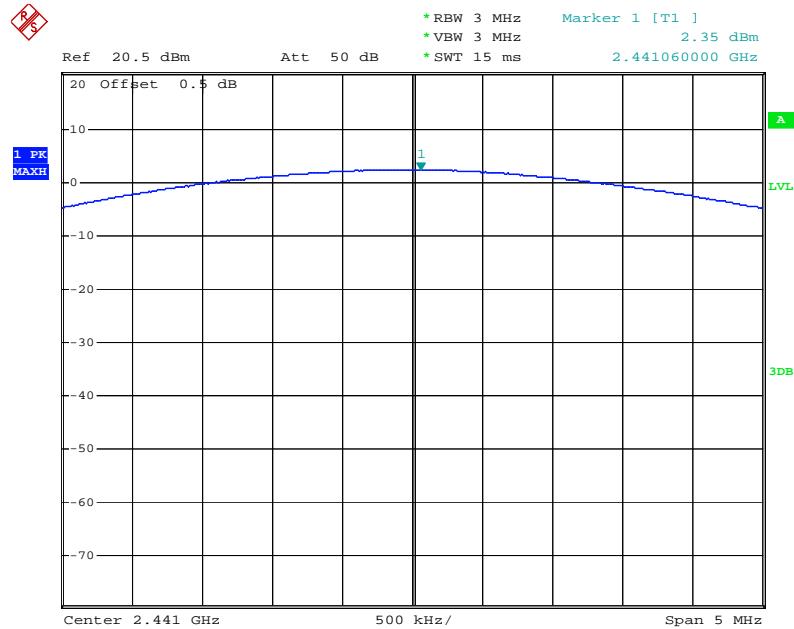

Date: 3.JUN.2014 14:35:08

### High Channel

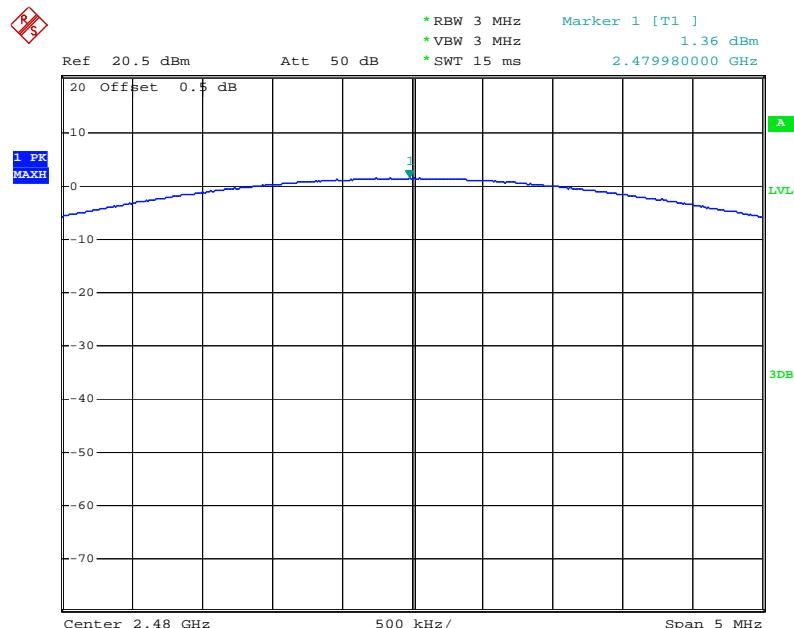

Date: 3.JUN.2014 14:37:50



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 49 of 67  
www.siemic.com.cn

## **5.8 §15.247(d) - Band Edge**

### **Standard Requirement:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Procedures: (Radiated Method Only)**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:
  - a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
  - b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  - c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz.  
 1 kHz (Duty cycle < 98%)       10 Hz (Duty cycle > 98%)
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Note:**

For Hopping device, should test hopping mode and CW Tx mode separately. For hopping mode, find out the worst points outside the frequency band firstly, then set the worst points as the center frequency, use above average 3 (c) spectrum analyzer set, find out the final worst average value separately.

### **Test Result: Pass**

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 50 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

	Frequency (MHz)	Antenna Polarization	Emission (dB $\mu$ V/m)		Band Edge Limit (dB $\mu$ V/m)		Result
			PK	AV	PK	AV	
Hopping	<2400	V	56.77	47.57	74	54	Pass
	<2400	H	53.26	47.88	74	54	Pass
	>2483.5	V	57.39	49.61	74	54	Pass
	>2483.5	H	57.16	49.54	74	54	Pass
Unhopping	<2400	V	55.41	49.22	74	54	Pass
	<2400	H	55.91	47.07	74	54	Pass
	>2483.5	V	57.28	48.88	74	54	Pass
	>2483.5	H	55.94	48.11	74	54	Pass

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 51 of 67  
www.siemic.com.cn

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
<b>AC Line Conducted Emissions</b>				
R&S EMI Test Receiver	ESPI3	101216	09/27/2013	09/26/2014
V-LISN	ESH3-Z5	838979/005	09/27/2013	09/26/2014
Com-Power Transient Limiter	LIT-153	531021	09/27/2013	09/26/2014
Universal Radio Communication Tester	CMU200	104031	09/27/2013	09/26/2014
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120 092	10/09/2013	10/08/2014
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A
<b>Radiated Emissions</b>				
Hp Spectrum Analyzer	8563E	3821A09023	09/27/2013	09/26/2014
R&S EMI Receiver	ESPI3	101216	09/27/2013	09/26/2014
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2013	10/08/2014
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120 092	10/09/2013	10/08/2014
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/30/2014	05/29/2015
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2013	10/26/2014
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451709	10/27/2013	10/26/2014
Universal Radio Communication Tester	CMU200	104031	09/27/2013	09/26/2014
Chamber	3m	N/A	04/13/2014	04/12/2015
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 52 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Annex B. EUT AND TEST SETUP PHOTOGRAPHS

### Annex B.i. Photograph 1: EUT External Photo



Whole Package - Top View



EUT-Adapter



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 53 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)



EUT - Front View



EUT - Rear View




**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 54 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

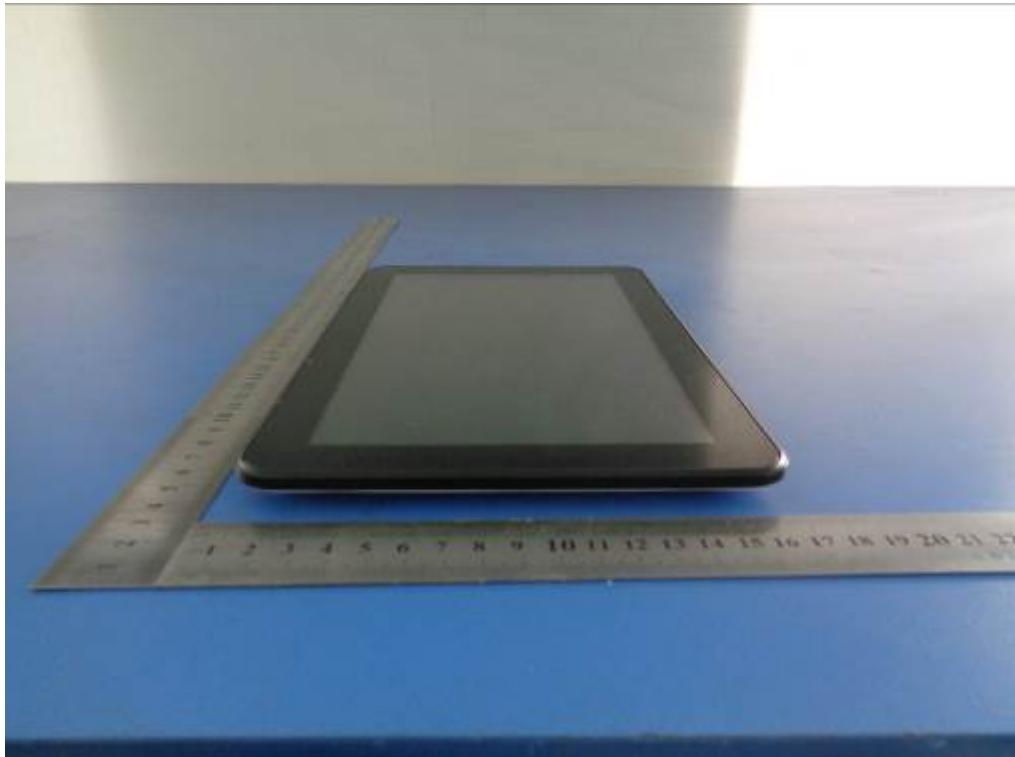

EUT - Top View



EUT - Bottom View




**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 55 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

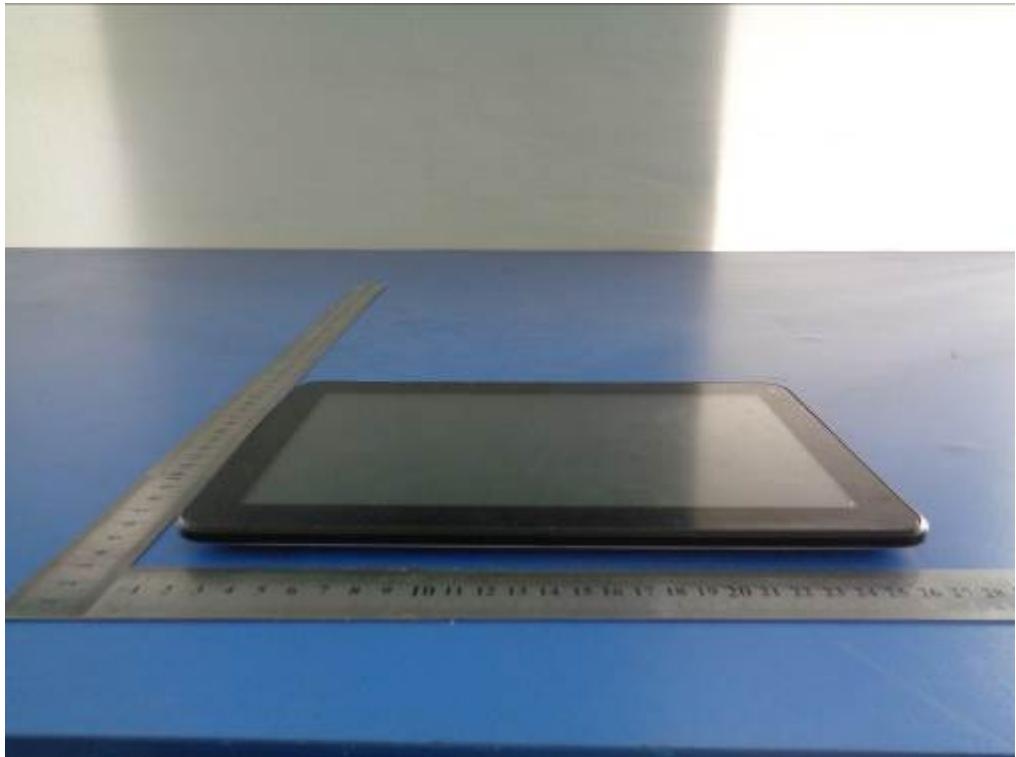

EUT - Left View



EUT - Right View



**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 56 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex B.ii. Photograph 2: EUT Internal Photo**



Cover Off - Top View 1

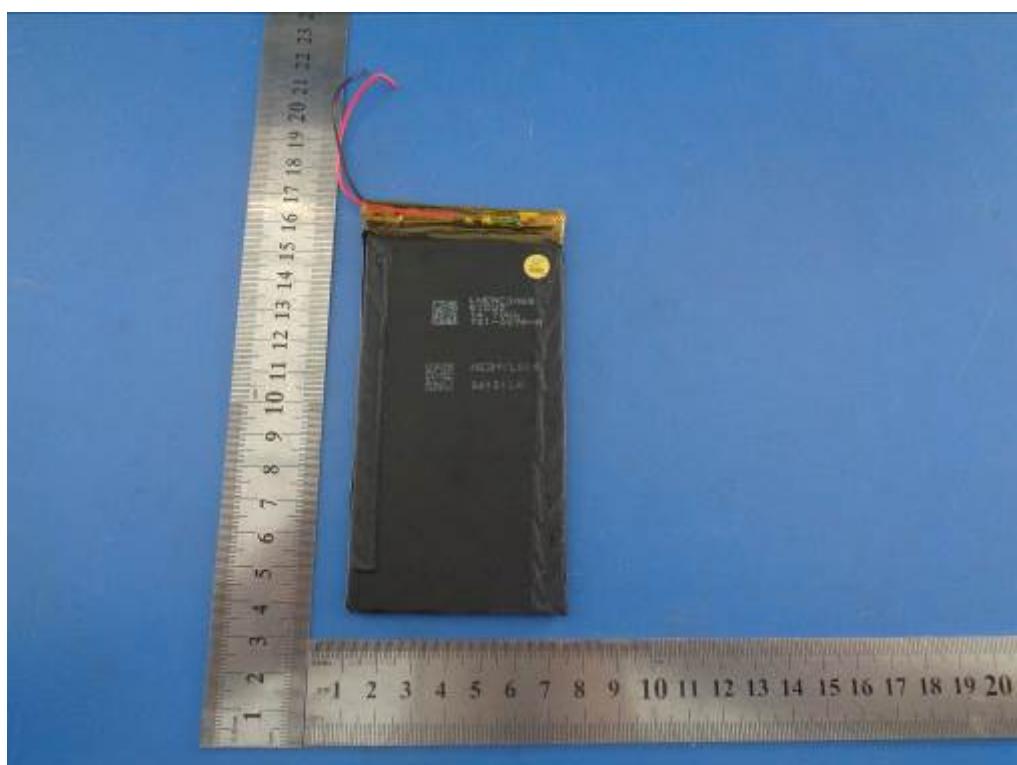

Battery - Top View




**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 57 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

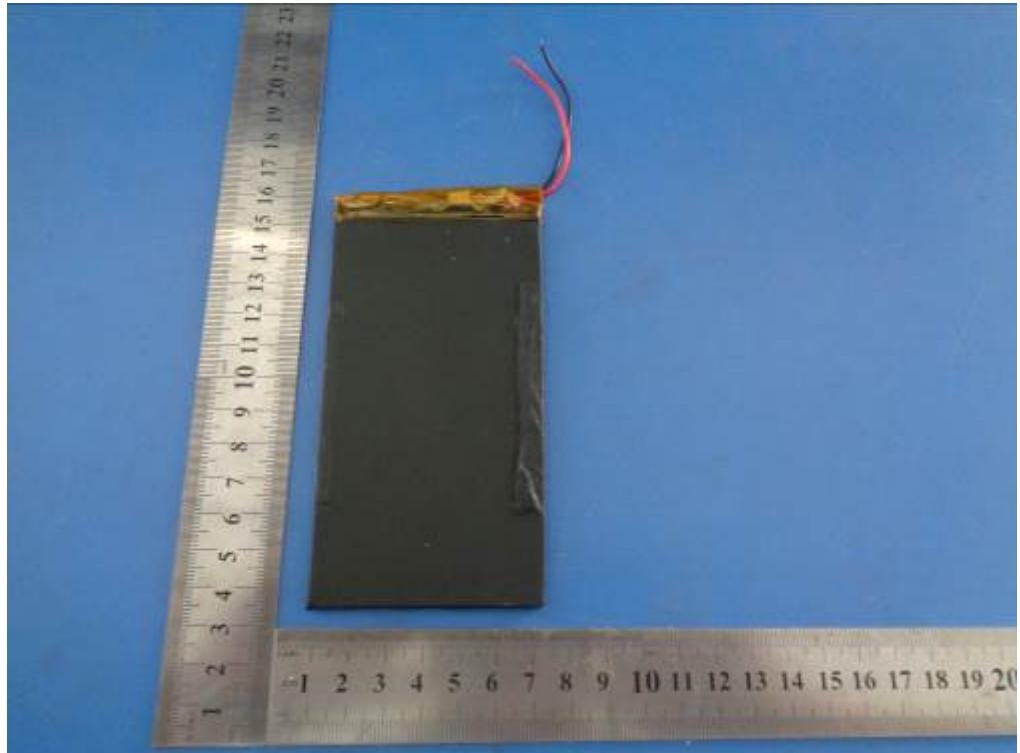

Battery - Bottom View

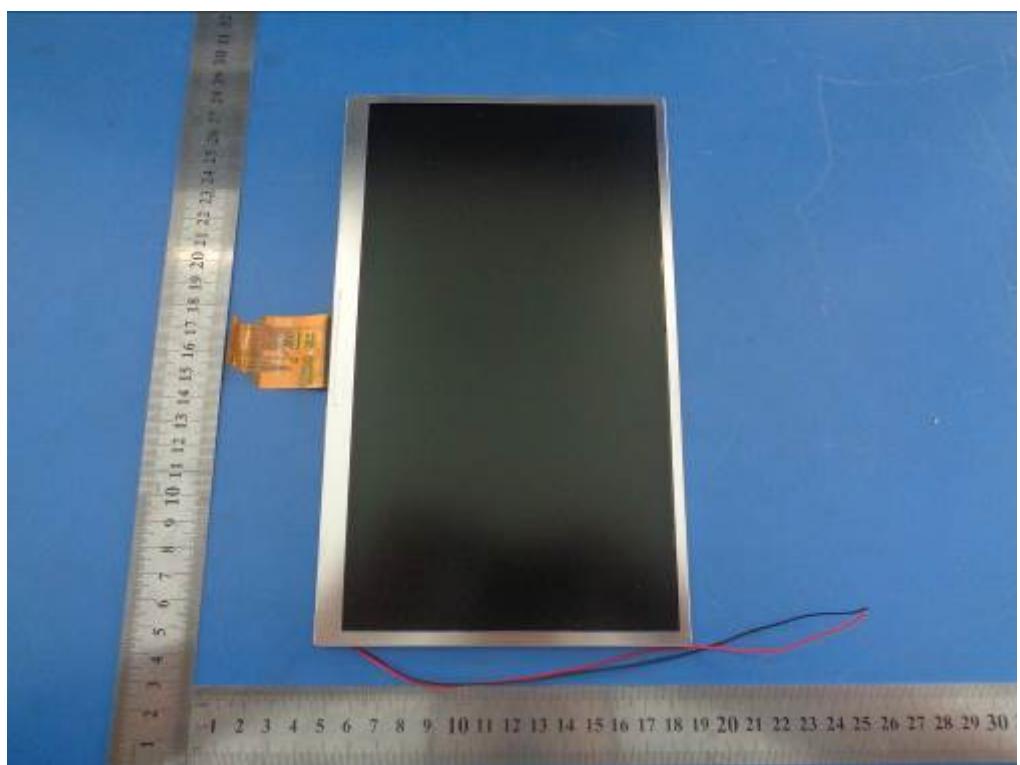

LCD - Top View




**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 58 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

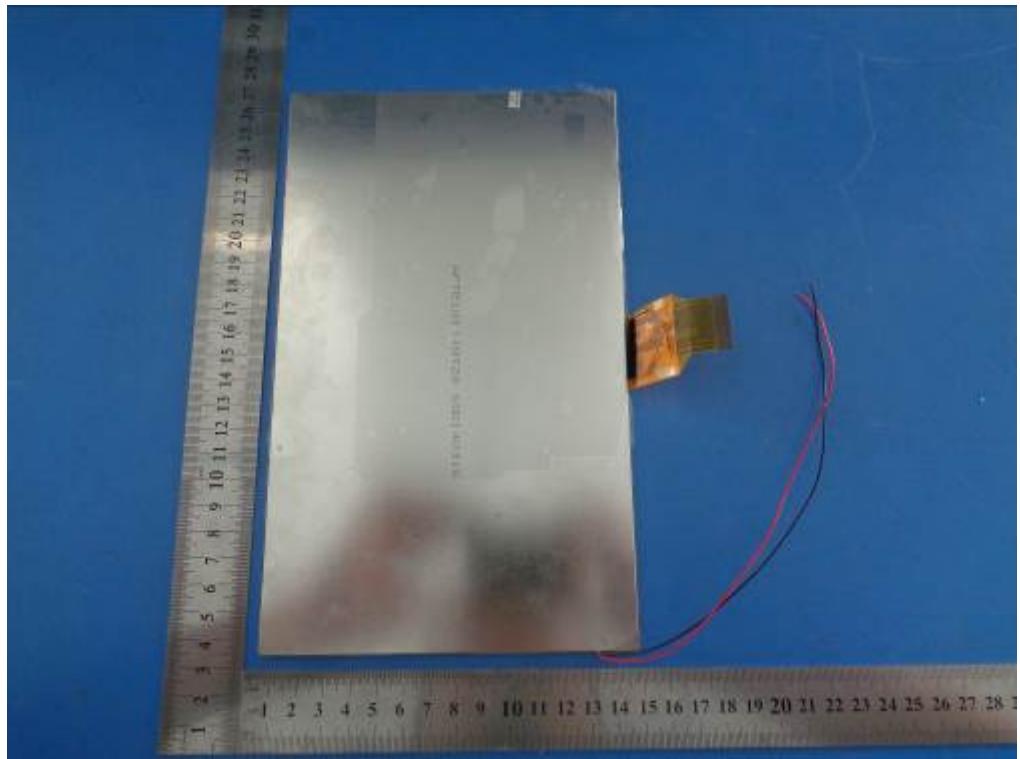

LCD - Bottom View

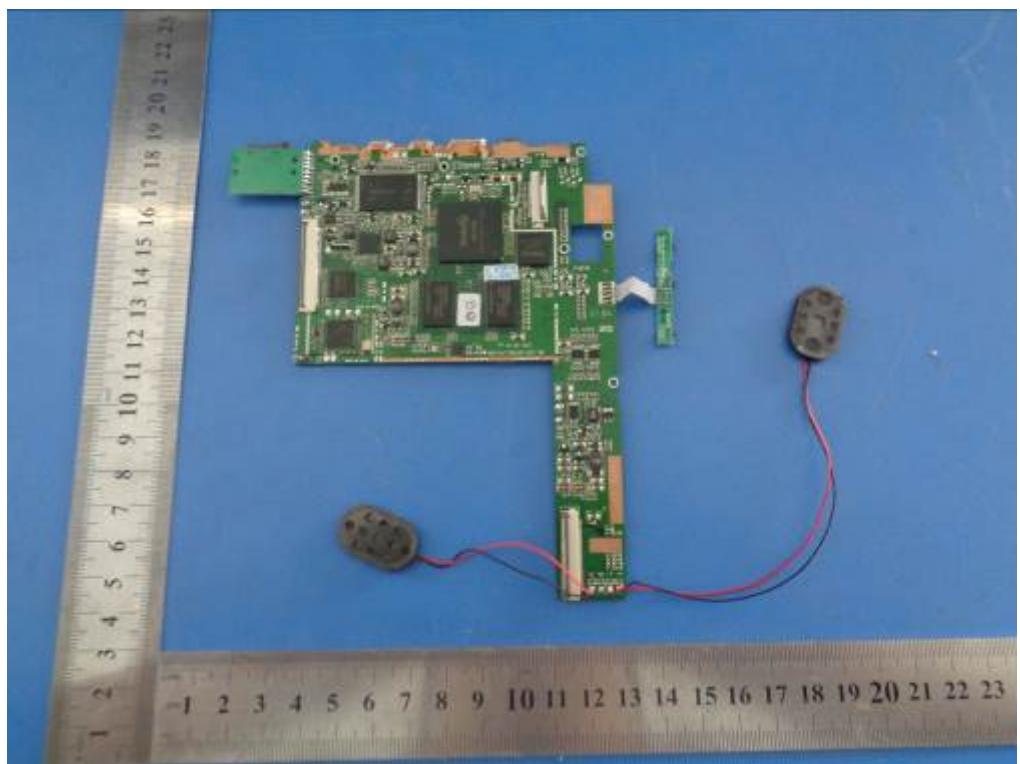

EUT PCB - Top View




**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 59 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

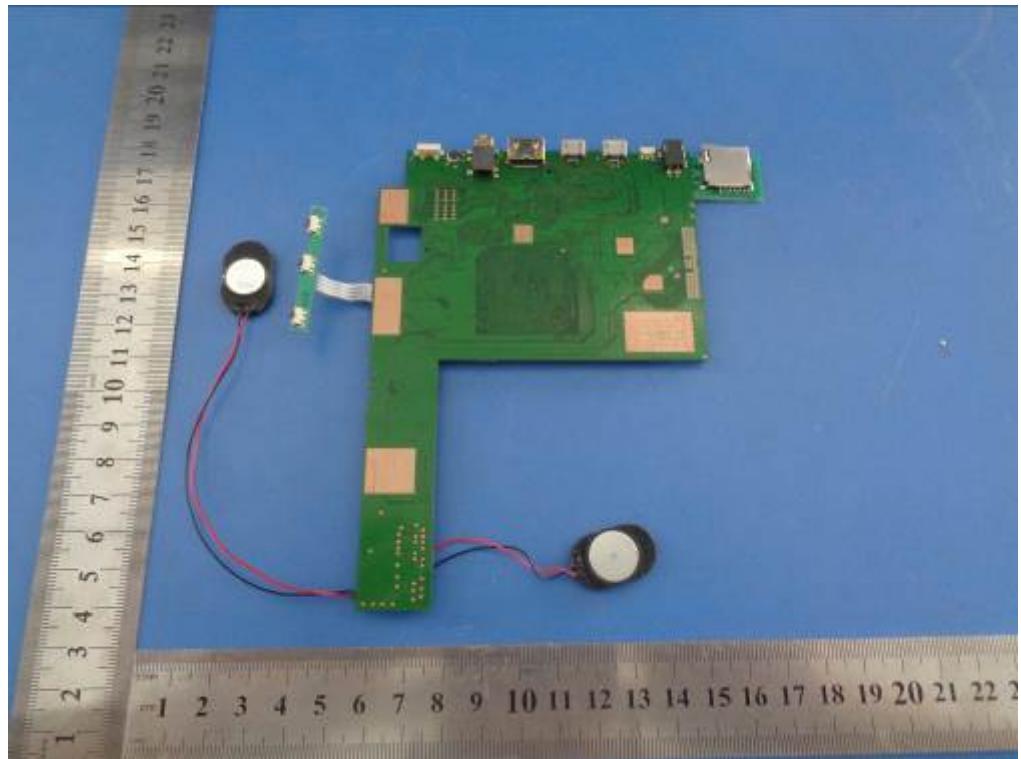

EUT PCB - Bottom View



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 60 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **Annex B.iii. Photograph 3: Test Setup Photo**



Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View




**SIEMIC, INC.**


Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 61 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

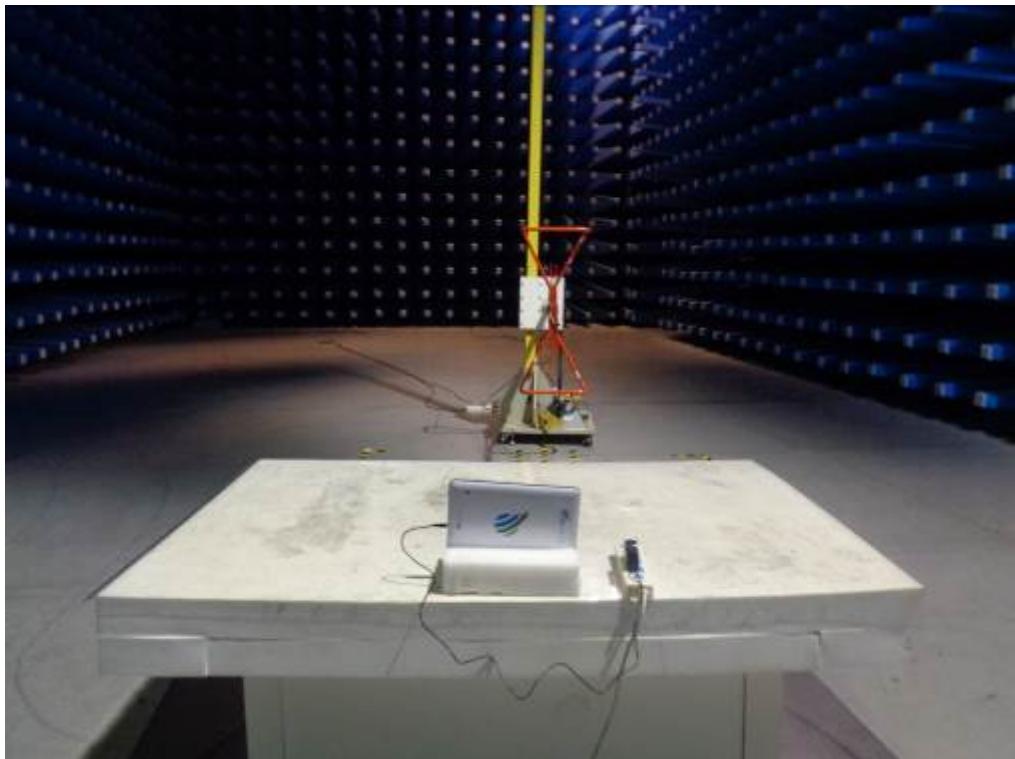

Radiated Spurious Emissions Test Setup Below 1GHz - Front View

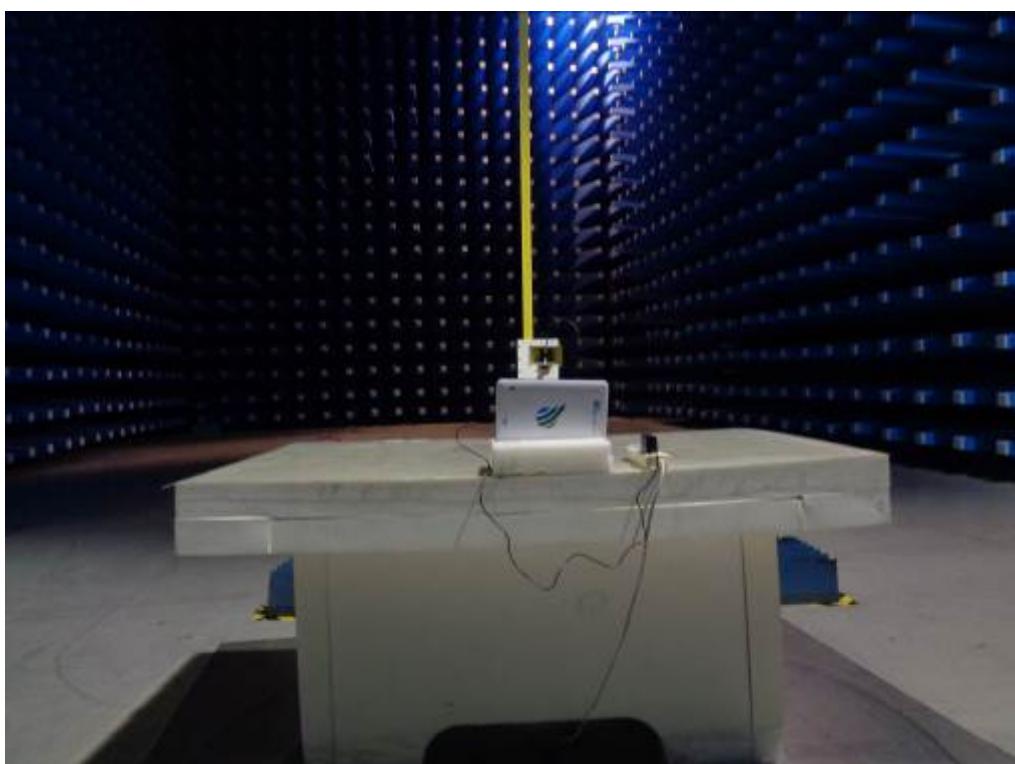

Radiated Spurious Emissions Test Setup Above 1GHz –Front View

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 62 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**

### **EUT TEST CONDITIONS**

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

<b>Equipment Description (Including Brand Name)</b>	<b>Model &amp; Serial Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
N/A	N/A	N/A




**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 63 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Block Configuration Diagram for AC Line Conducted Emissions

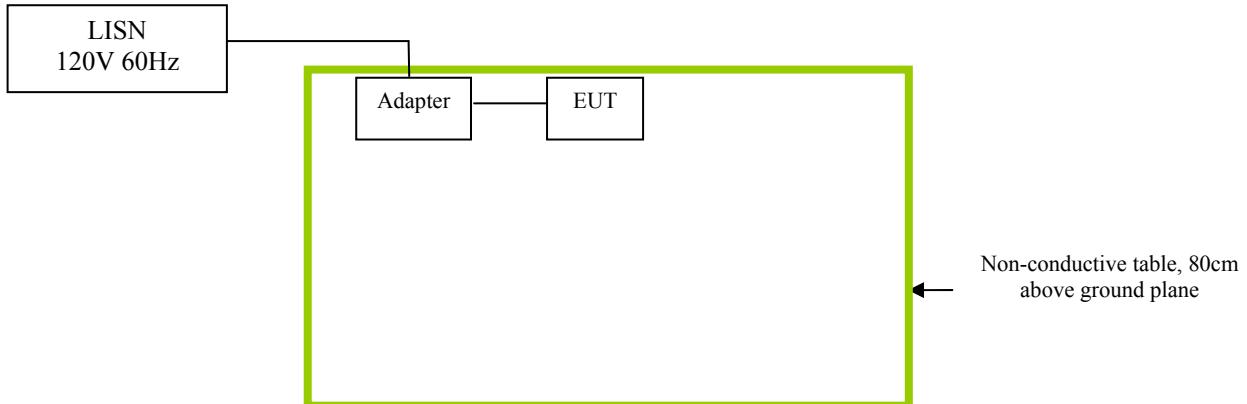




**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 64 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Block Configuration Diagram for Radiated Emissions

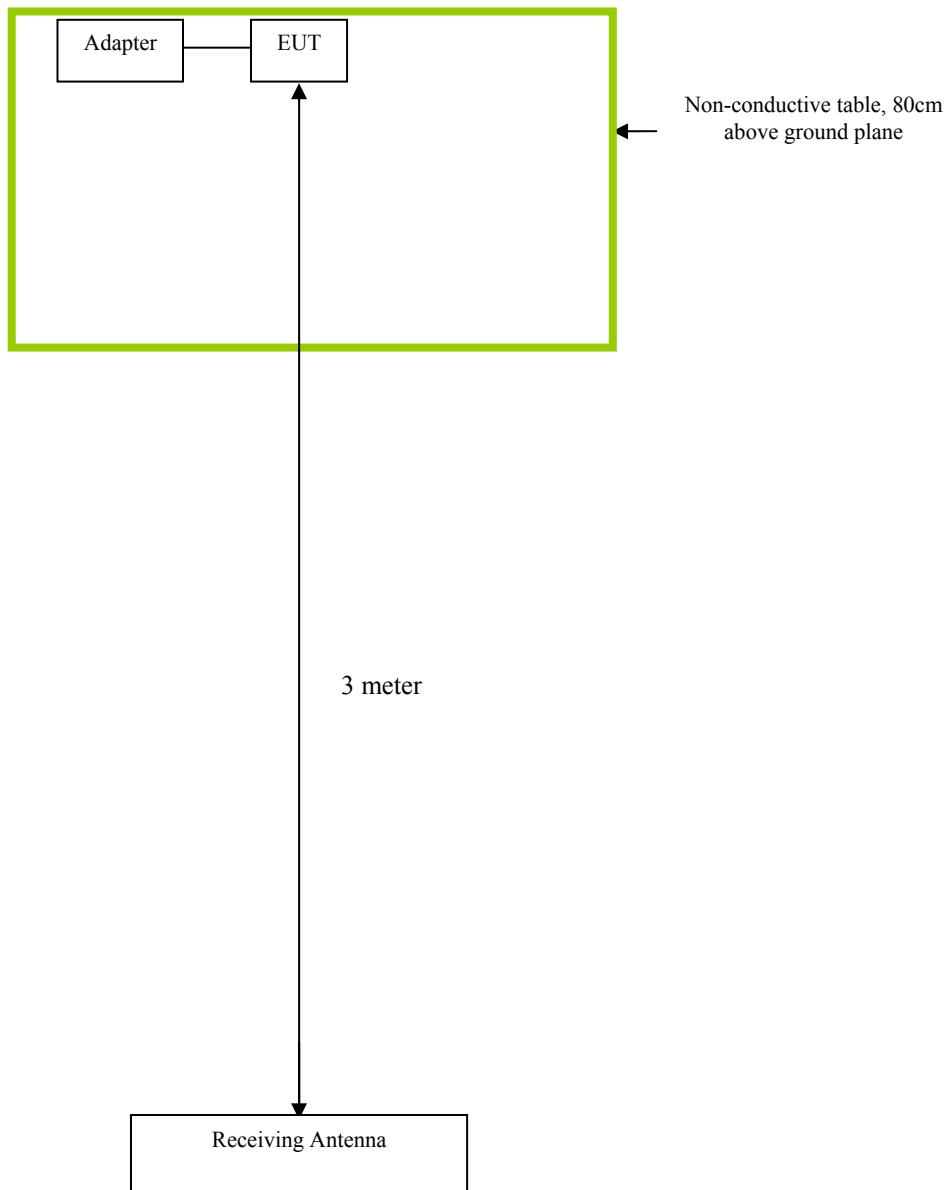

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 65 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was continuously transmitting to stimulate the worst case.



Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 66 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Tablet PC  
Main Model: NEXTab10.1 M1036  
Main Model: N/A  
To: FCC 15.247: 2013, ANSI C63.4: 2009

Report No: 14020302-FCC-R1  
Issue Date: June 09, 2014  
Page: 67 of 67  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex E. DECLARATION OF SIMILARITY**

**N/A**