

Appendix for Bluetooth BLE mode

Product Name: Combo Module

Model No: 6221E-UUC

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.680	2401.664	2402.344	0.5	PASS
BLE_1M	Ant1	2440	0.712	2439.652	2440.364	0.5	PASS
BLE_1M	Ant1	2480	0.724	2479.640	2480.364	0.5	PASS

Test Graphs




Appendix B: Maximum conducted output power

Test Result Peak

TestMode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	6.32	≤30	PASS
BLE_1M	Ant1	2440	6.12	≤30	PASS
BLE_1M	Ant1	2480	4.98	≤30	PASS

Test Graphs Peak

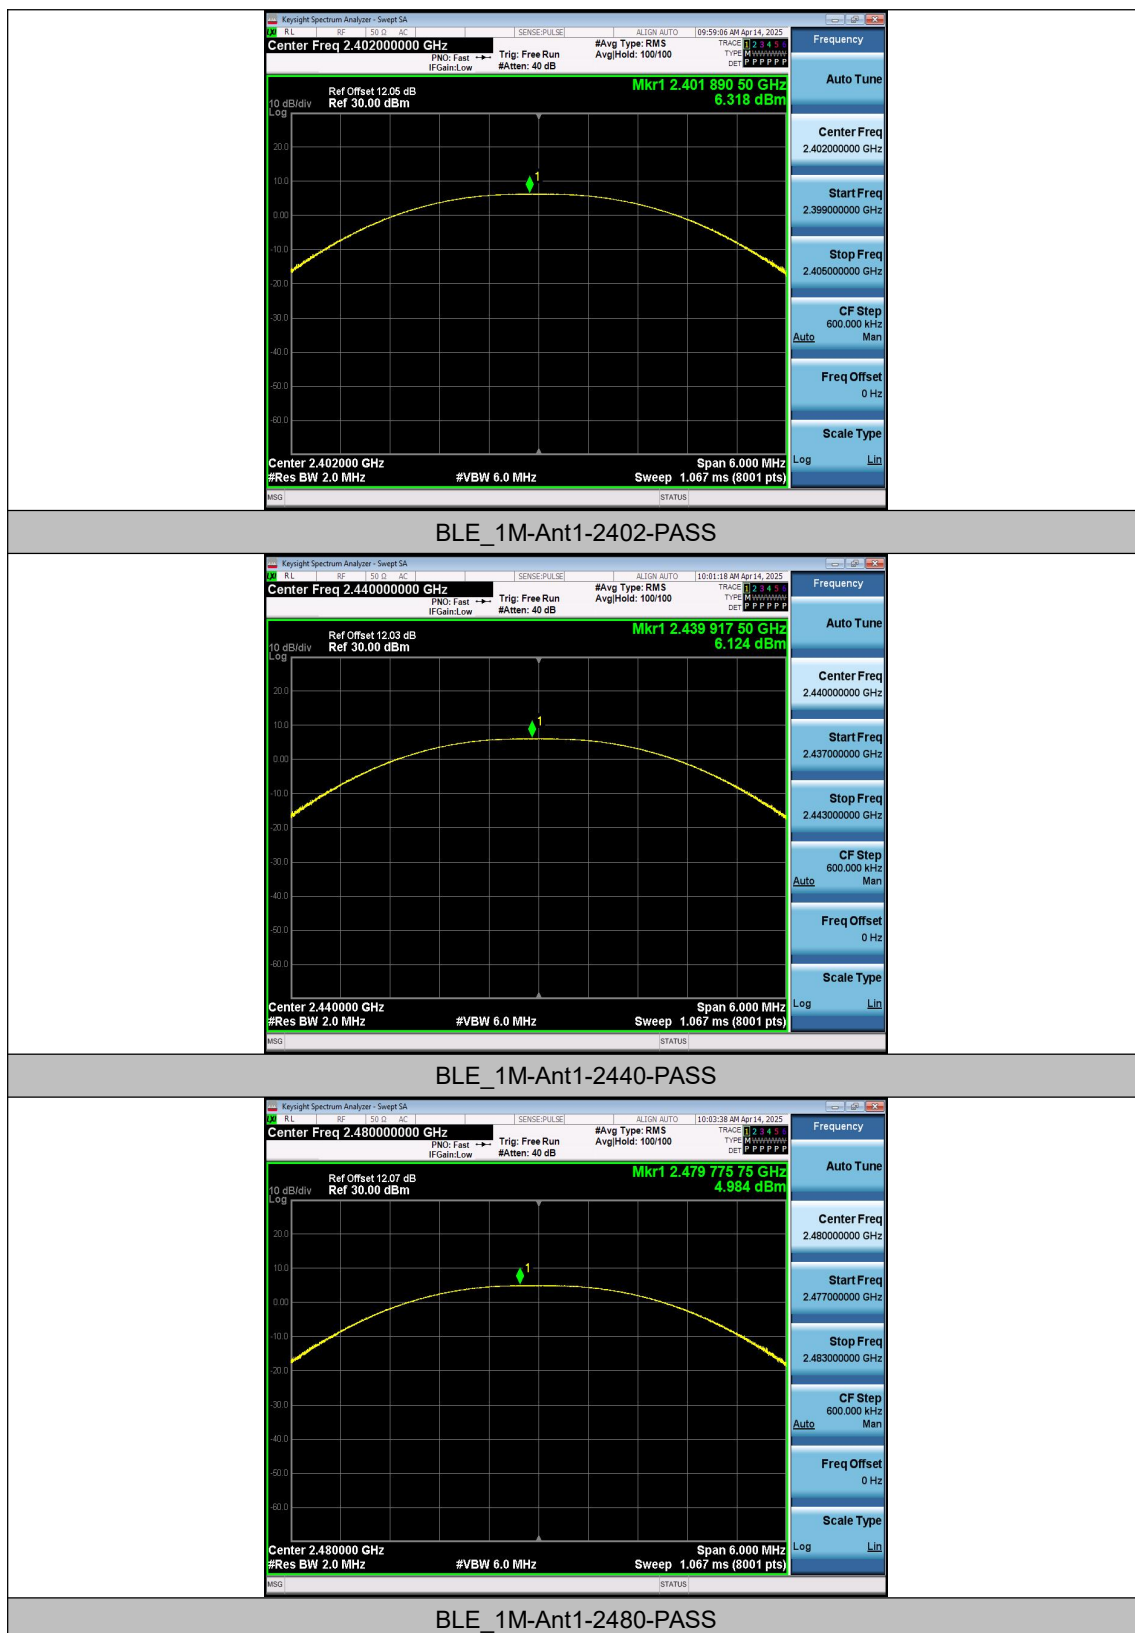


Appendix C: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.58	≤8.00	PASS
BLE_1M	Ant1	2440	-9.12	≤8.00	PASS
BLE_1M	Ant1	2480	-11.11	≤8.00	PASS

Test Graphs

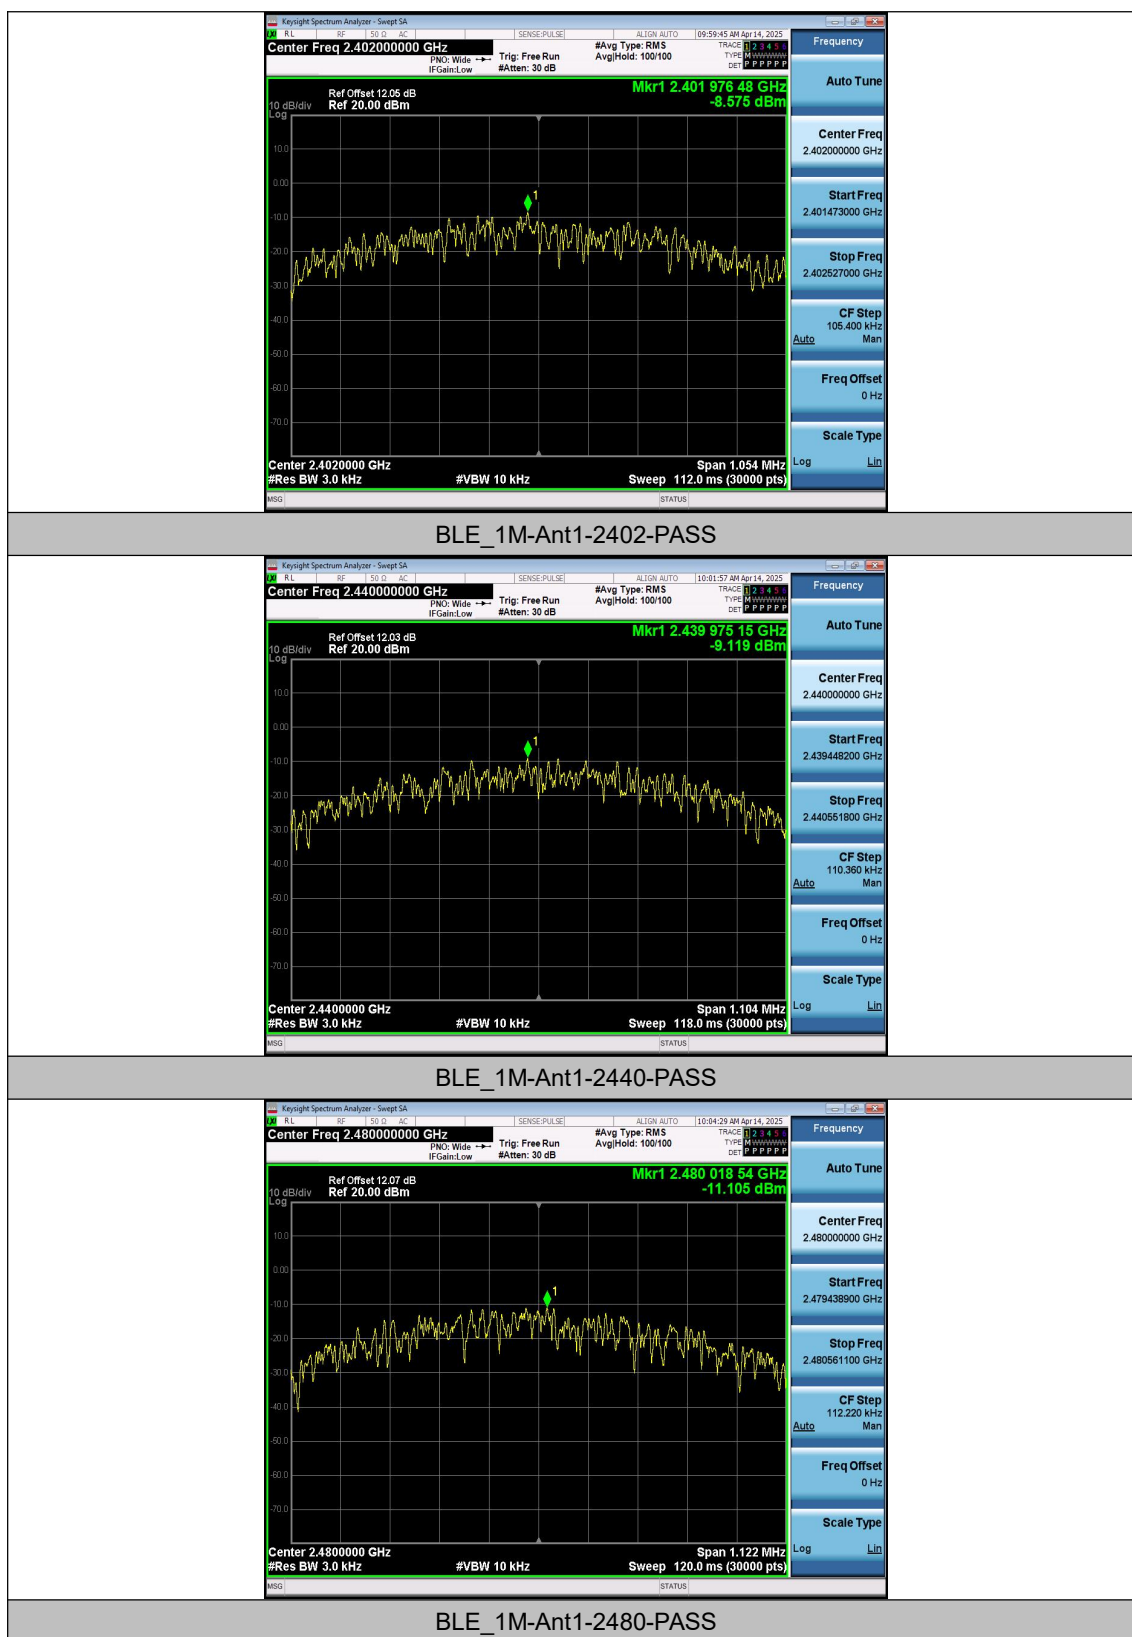


Appendix D: Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2402.01	5.37
BLE_1M	Ant1	2440	2440.00	5.22
BLE_1M	Ant1	2480	2480.00	4.05

Test Graphs

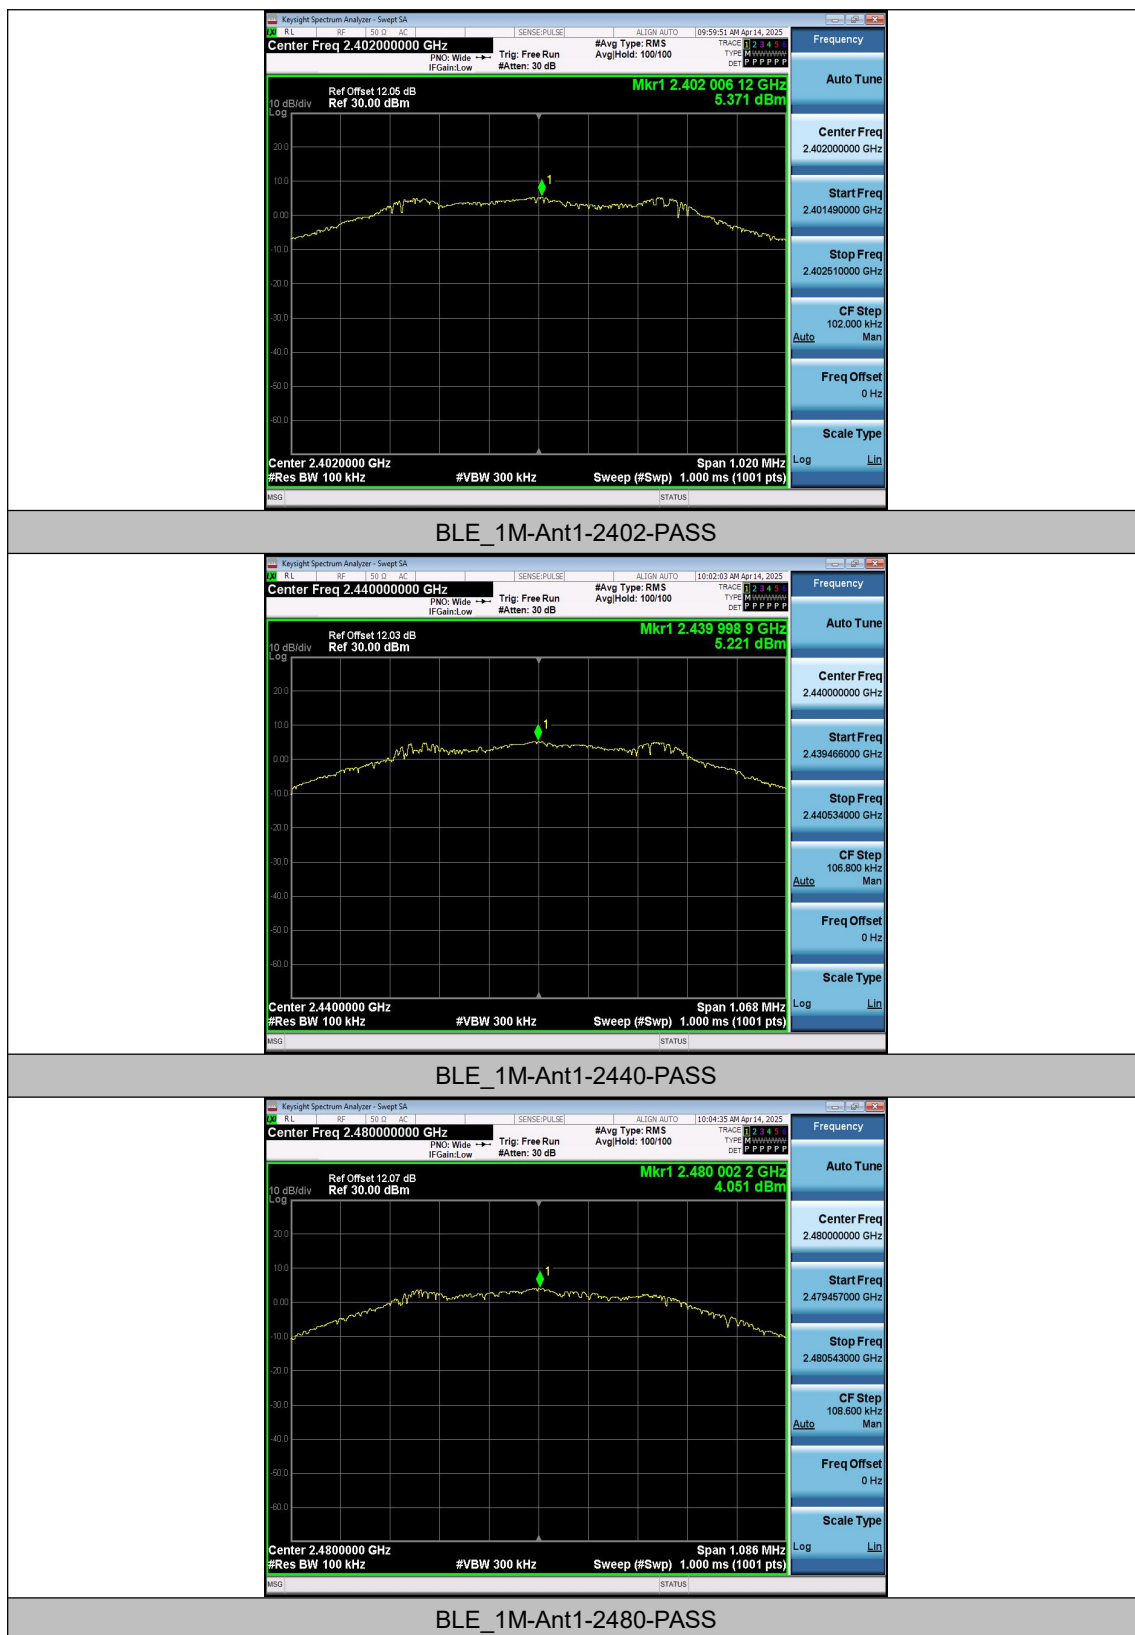


Appendix E: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.37	-46.75	≤-14.63	PASS
BLE_1M	Ant1	High	2480	4.05	-46.46	≤-15.95	PASS

Test Graphs

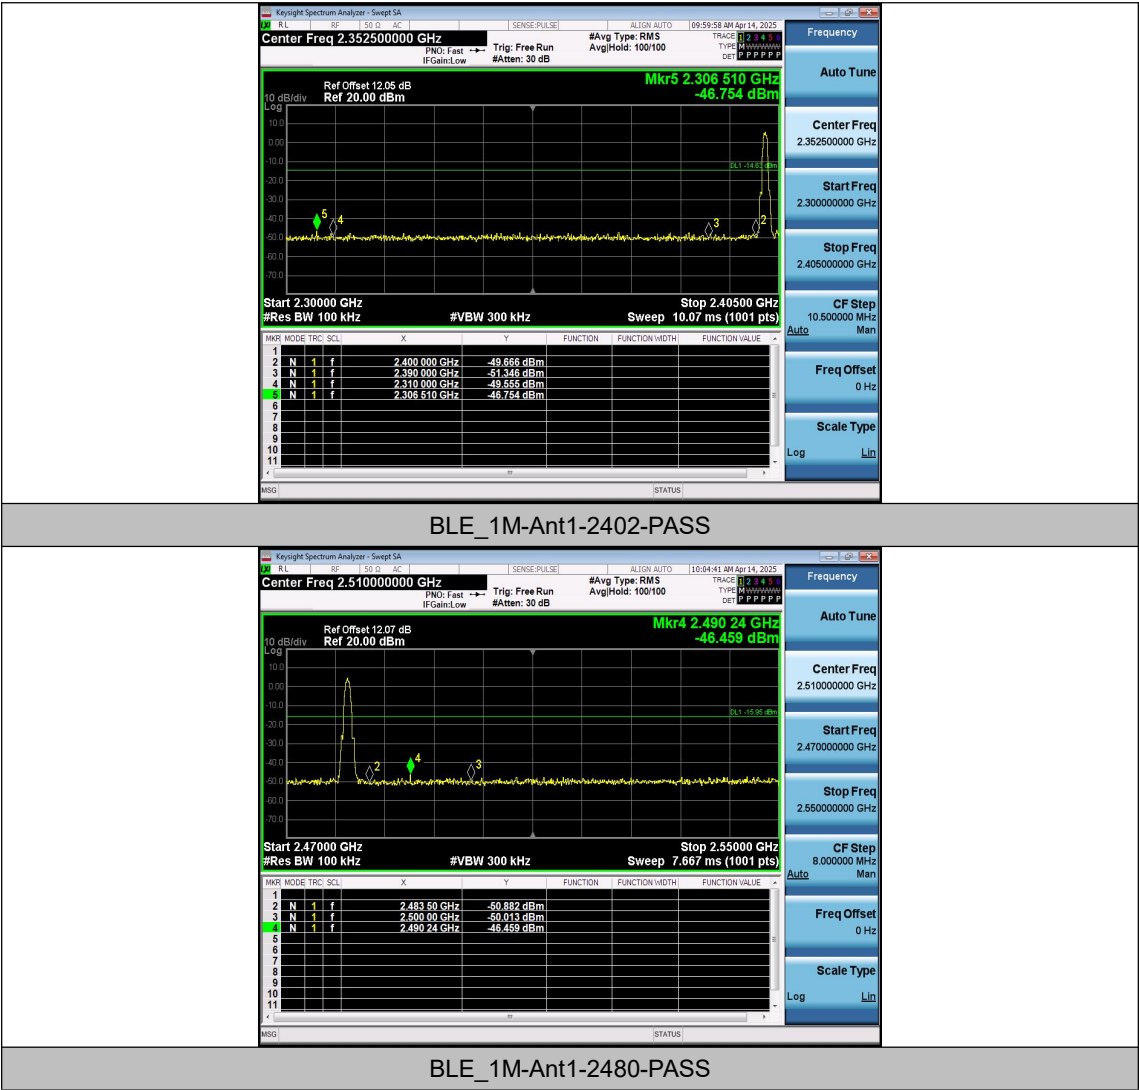

Appendix F: Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	5.37	-59.3	≤-14.63	PASS
BLE_1M	Ant1	2402	1000~26500	5.37	-44.31	≤-14.63	PASS
BLE_1M	Ant1	2440	30~1000	5.22	-59.18	≤-14.78	PASS
BLE_1M	Ant1	2440	1000~26500	5.22	-43.66	≤-14.78	PASS
BLE_1M	Ant1	2480	30~1000	4.05	-59.57	≤-15.95	PASS
BLE_1M	Ant1	2480	1000~26500	4.05	-44.36	≤-15.95	PASS

Test Graphs

