


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan China
Manufacturer /Factory : FN-LINK TECHNOLOGY LIMITED
Address : No.8, Litong Road, Liuyang Economic & Technical Development Zone,
Changsha, Hunan China
E.U.T. : WIFI+BT combo Module
Brand Name : FN-LINK
Model No. : 6223A-SRD
FCC ID : 2AATL-6223A-SRD
Measurement Standard : FCC PART 15.247
Date of Receiver : November 06, 2017, October 26, 2022
Date of Test : November 06, 2017 to November 24, 2017
October 26, 2022 to November 14, 2022
Date of Report : November 18 2022

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Laboratory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	8
1.4 EQUIPMENT MODIFICATIONS	8
1.5 SUPPORT DEVICE	8
1.6 TEST FACILITY AND LOCATION	9
1.7 SUMMARY OF TEST RESULTS	9
2. SYSTEM TEST CONFIGURATION	11
2.1 EUT CONFIGURATION	11
2.2 SPECIAL ACCESSORIES	11
2.3 DESCRIPTION OF TEST MODES	11
2.4 EUT EXERCISE	11
3. CONDUCTED EMISSIONS TEST	12
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
3.2 TEST CONDITION	12
3.3 MEASUREMENT RESULTS	12
4. RADIATED EMISSION TEST	15
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
4.2 MEASUREMENT PROCEDURE	16
4.3 LIMIT	16
4.4 MEASUREMENT RESULTS	17
5. CHANNEL SEPARATION TEST	24
5.1 MEASUREMENT PROCEDURE	24
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
5.3 MEASUREMENT RESULTS	24
6. 20DB BANDWIDTH	30
6.1 MEASUREMENT PROCEDURE	30
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
6.3 MEASUREMENT RESULTS	30
7. HOPPING CHANNEL NUMBER	36
7.1 MEASUREMENT PROCEDURE	36
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
7.3 MEASUREMENT RESULTS	36

8. TIME OF OCCUPANCY (DWELL TIME)	38
8.1 MEASUREMENT PROCEDURE	38
8.2 MEASUREMENT RESULTS	38
9. MAXIMUM PEAK OUTPUT POWER	38
9.1 MEASUREMENT PROCEDURE	44
9.2 MEASUREMENT RESULTS	44
10. BAND EDGE	44
10.1 MEASUREMENT PROCEDURE	50
10.2 LIMIT	50
10.3 MEASUREMENT RESULTS	50
11. ANTENNA APPLICATION	50
11.1 ANTENNA REQUIREMENT	58
11.2 MEASUREMENT RESULTS	58
12. CONDUCTED SPURIOUS EMISSIONS	59
12.1 MEASUREMENT PROCEDURE	59
12.2. MEASUREMENT RESULTS	59
13. TEST EQUIPMENT LIST	62

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1706434FV00	Initial Issue	2017-11-25
NTC1706434FV01	Add an optional antenna and change address of Applicant, Manufacturer, Factory	2022-11-18

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product Name	:	WIFI+BT combo Module
Model Name	:	6223A-SRD
Model difference	:	None
Brand Name	:	FN-LINK
Power Supply	:	DC 3.3V
Adapter	:	None
Test voltage	:	AC 120V 60Hz (PC input)
Hardware version	:	V1.0
Software version	:	V1.0
Serial number	:	N/A
Note	:	This report only applies to modulation technology DSS(BDR+EDR).
Remark	:	1. This report was an additional report based on original report NTC1706434FV00. 2. Compared with the original report, this report has added an optional antenna and change address of Applicant, Manufacturer, Factory, antenna information detail see page 6. 3. According to the change, We retested the Radiated Spurious Emissions item, the other test result will not be affected, thus, the original test data were continued to be referenced, details refer to the report.

Technical parameters

Bluetooth Version : V4.2
 Frequency Range : 2402-2480MHz
 Modulation : GFSK, π 4/-DQPSK, 8DPSK
 Number of Channel : 79
 Channel space : 1MHz
 Data Rate : 1Mbps for GFSK
 2Mbps for π 4/-DQPSK
 3Mbps for 8DPSK
 Antenna Type : Please refer to below antenna information.
 Antenna Gain : Please refer to below antenna information.

Antenna Information

Ant.	Brand	Model name	Antenna Type	Connector	Gain (dBi)
1	ZHONGTIAN XUN	2.00001213	PIFA	I-PEX	2.99
2	XK	XKFPC-2D4-5D8-150	PIFA	I-PEX	0.0
3	XK	XK-QX2400-PCB-140	PIFA	I-PEX	2.0
4	ZHONGTIAN XUN	2.00001050	PIFA	I-PEX	0.38
5	Abracon	PRO-OB-440	Stamped Metal Antenna	I-PEX	4.9

Note: The EUT has two types of antenna, all tests were based on the maximum Gain of PIFA type antenna. And the for Stamped Metal Antenna we have tests items Radiated Spurious Emissions.

BDR+EDR Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

Channel	Frequency MHz
1	2402
40	2441
79	2480

Test SW version	RTLBTAPP
-----------------	----------

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AATL-6223A-SRD** filing to comply with Section 15.247 of the FCC Part 15 (2016), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

PC	: M/N: G7060cx S/N: 4CV110D8FK Power Cord: 1.8m Unshielded, with core CE, FCC: DOC
Monitor	: Manufacturer: LENOVO M/N: L2061WD S/N: 3M04769B1102083 CE, FCC: DOC
Mouse	: Manufacturer: Logitech M/N: M-U0026 P/N: 810-002182 CE, FCC: DOC
Keyboard	: Manufacturer: Logitech M/N: Y-U0009 S/N: 1345MG025YK8 CE, FCC: DOC

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 14, 2015
The certificate is valid until August 13, 2018
The Laboratory has been assessed and proved to
be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2019
The Laboratory has been assessed and proved to
be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743
Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan
City, Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.247(a)(1)	Channel Separation test	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)	20dB Bandwidth	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	$\pm 5\%$	Compliant
§15.247(b)	Max Peak output Power test	$\pm 1.06\text{dB}$	Compliant
§15.247(d)	Band edge test	$\pm 1.70\text{dB}$	Compliant
§15.207 (a)	AC Power Conducted Emission	$\pm 1.06\text{dB}$	Compliant
§15.247(d), §15.209, §15.205	Radiated Emission	$\pm 3.70\text{dB}$	Compliant
§15.203	Antenna Requirement	---	Compliant
§15.247(d)	Conducted Spurious Emission	$\pm 2.51\text{dB}$	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK, 8DPSK were tested.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

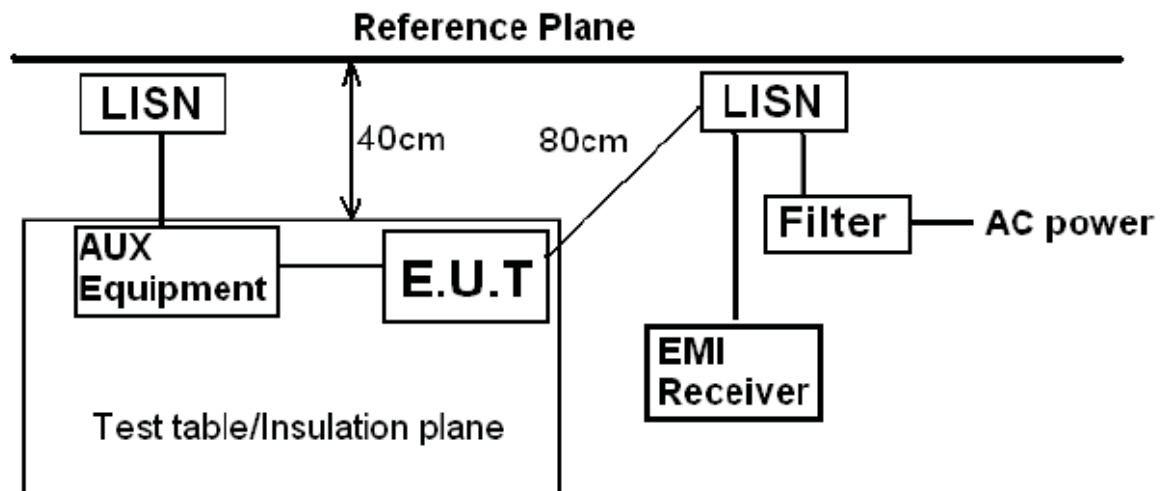

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX Mode

3.3 Measurement Results


Please refer to following plots of the worst case (8DPSK Low Channel).



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Conduction

Test Time: 2017-11-22 17:49:26

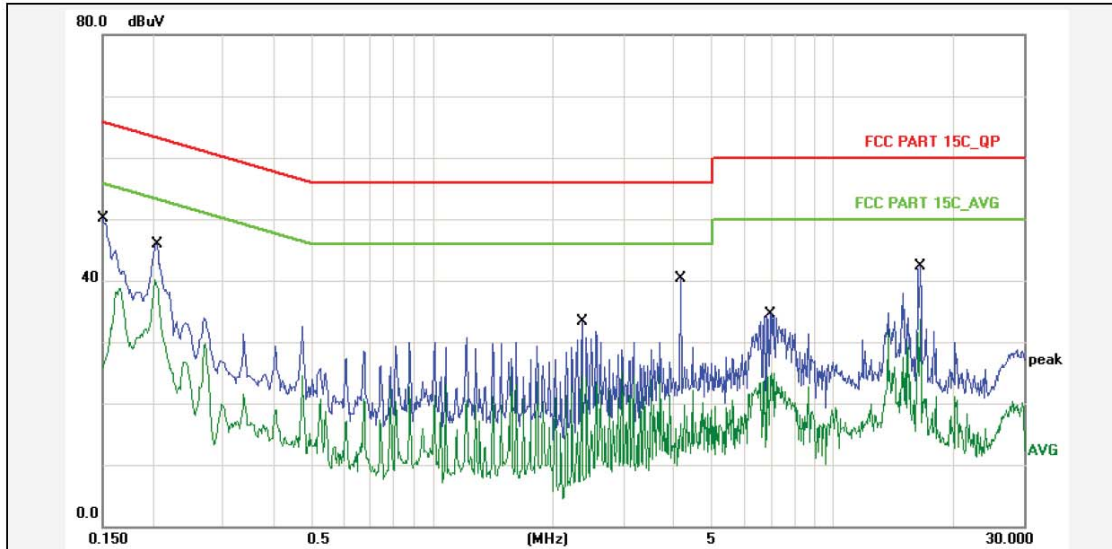

Report No.: 6223A-SRD

Test Standard: FCC PART 15C_QP

Test Item: Conducted Emission

Applicant: FN-LINK

Product: WIFI+BT combo Module

Model No.: 6223A-SRD

Phase: L1

Temp.()/Hum.(%): 26(C) / 52 %

Power Rating: AC 120V/60Hz

Test Engineer: Lay

Test Mode: TX(BDR+EDR)

Remark: 8DPSK Low channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	37.20	48.00	65.99	-17.99	QP	P	
2	0.1500	10.80	19.60	30.40	55.99	-25.59	AVG	P	
3	0.2050	10.80	-1.80	9.00	63.40	-54.40	QP	P	
4	0.2050	10.80	27.40	38.20	53.40	-15.20	AVG	P	
5	2.3584	10.80	20.50	31.30	56.00	-24.70	QP	P	
6	2.3584	10.80	11.60	22.40	46.00	-23.60	AVG	P	
7	4.1574	10.80	27.40	38.20	56.00	-17.80	QP	P	
8	4.1574	10.80	9.30	20.10	46.00	-25.90	AVG	P	
9	6.9508	10.80	21.70	32.50	60.00	-27.50	QP	P	
10	6.9508	10.80	12.10	22.90	50.00	-27.10	AVG	P	
11	16.4856	10.80	29.50	40.30	60.00	-19.70	QP	P	
12	16.4856	10.80	20.90	31.70	50.00	-18.30	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-11-22 17:56:06

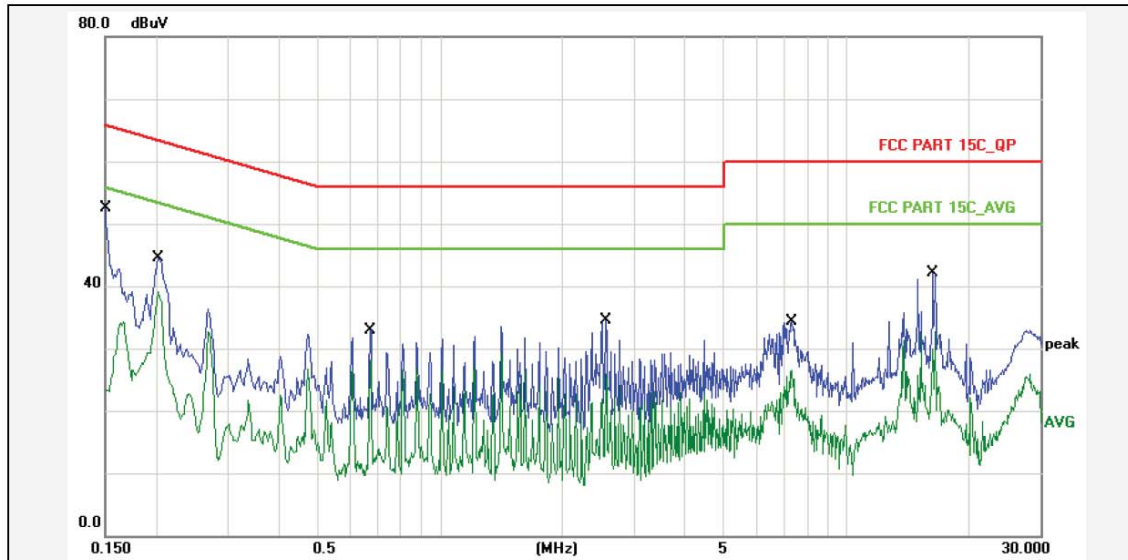

Report No.: 6223A-SRD

Test Standard: FCC PART 15C_QP

Test item: Conducted Emission

Phase: N

Applicant: FN-LINK

Temp.()/Hum.(%): 26(C) / 52 %

Product: WIFI+BT combo Module

Power Rating: AC 120V/60Hz

Model No.: 6223A-SRD

Test Engineer: Lay

Test Mode: TX(BDR+EDR)

Remark: 8DPSK Low channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	39.70	50.50	65.99	-15.49	QP	P	
2	0.1500	10.80	26.10	36.90	55.99	-19.09	AVG	P	
3	0.2017	10.80	31.60	42.40	63.54	-21.14	QP	P	
4	0.2017	10.80	26.30	37.10	53.54	-16.44	AVG	P	
5	0.6718	10.80	20.10	30.90	56.00	-25.10	QP	P	
6	0.6718	10.80	15.30	26.10	46.00	-19.90	AVG	P	
7	2.5535	10.80	21.60	32.40	56.00	-23.60	QP	P	
8	2.5535	10.80	13.10	23.90	46.00	-22.10	AVG	P	
9	7.3290	10.80	21.60	32.40	60.00	-27.60	QP	P	
10	7.3290	10.80	13.70	24.50	50.00	-25.50	AVG	P	
11	16.4856	10.80	29.20	40.00	60.00	-20.00	QP	P	
12	16.4856	10.80	19.90	30.70	50.00	-19.30	AVG	P	



Note: Level=Reading+Factor.

Margin=Limit-Level.


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

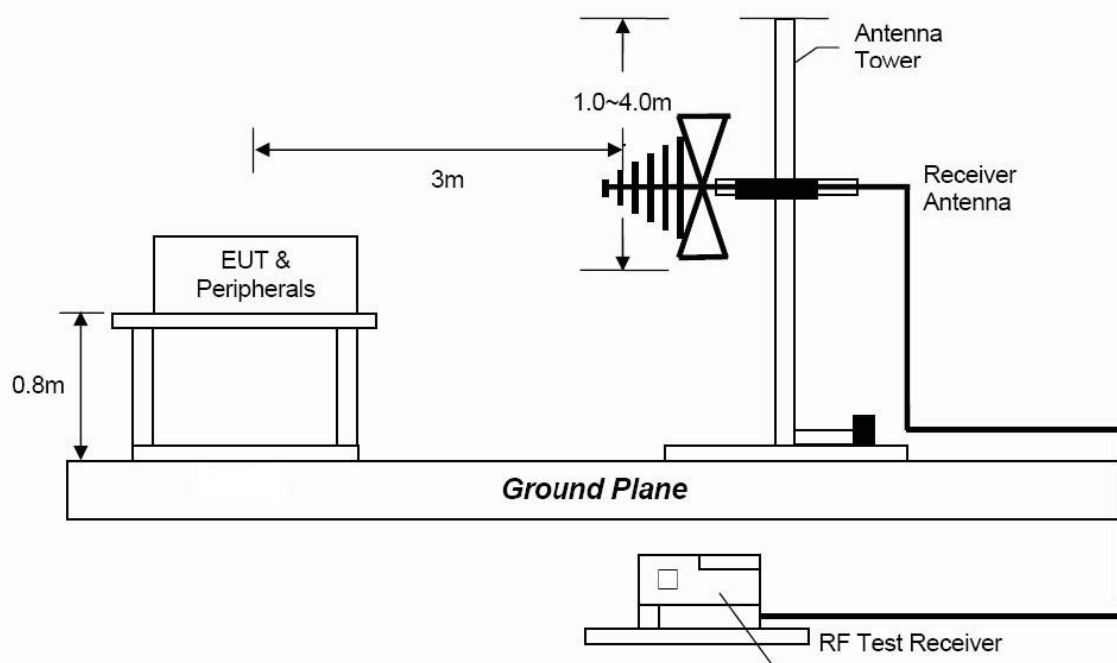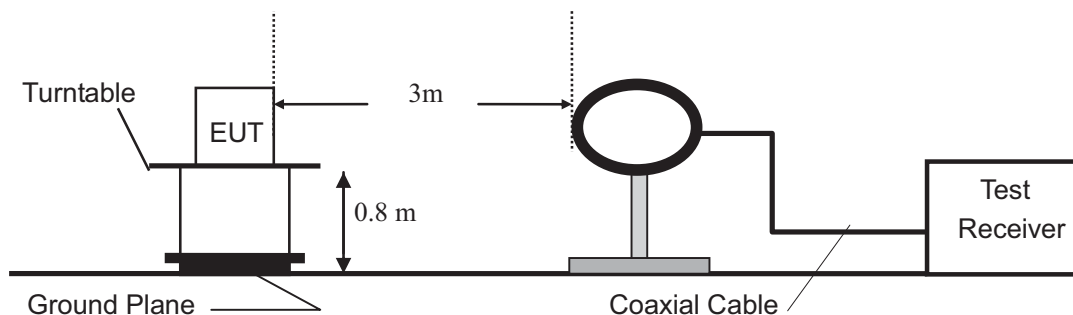

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

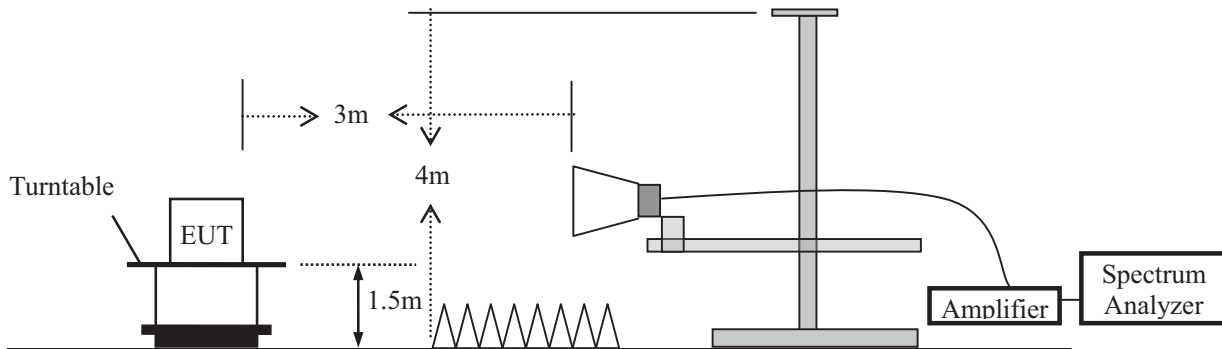

4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})_{\mu\text{V}} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

4.4 Measurement Results

Please refer to following plots of the worst case (8DPSK Low Channel).


Original antenna test results



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-11-22 13:45:59

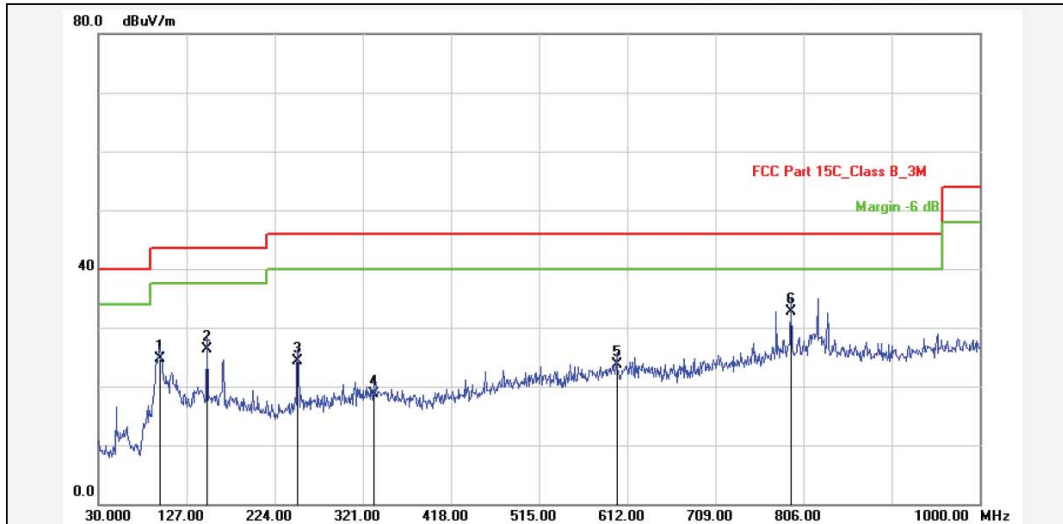

Report No.:	6223A-SRD	Test Distance:	3m
Test Standard:	FCC Part 15C_Class B_3M	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Temp.(C)/Hum.(%)	25(C) / 51 %
Applicant:	FN-LINK	Power Rating:	AC 120V/60Hz
Product:	WIFI+BT combo Module	Test Engineer:	Ivan
Model No.:	6223A-SRD		
Test Mode:	TX(BDR+EDR)		
Remark:	8DPSK Low Channel		

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	97.9000	-10.10	34.90	24.80	43.50	-18.70	QP			P	
2	149.3100	-13.28	39.58	26.30	43.50	-17.20	QP			P	
3	249.2200	-9.44	33.74	24.30	46.00	-21.70	QP			P	
4	333.6099	-7.52	26.32	18.80	46.00	-27.20	QP			P	
5	600.3600	-2.60	26.30	23.70	46.00	-22.30	QP			P	
6	792.4200	0.15	32.65	32.80	46.00	-13.20	QP			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-11-22 13:51:58

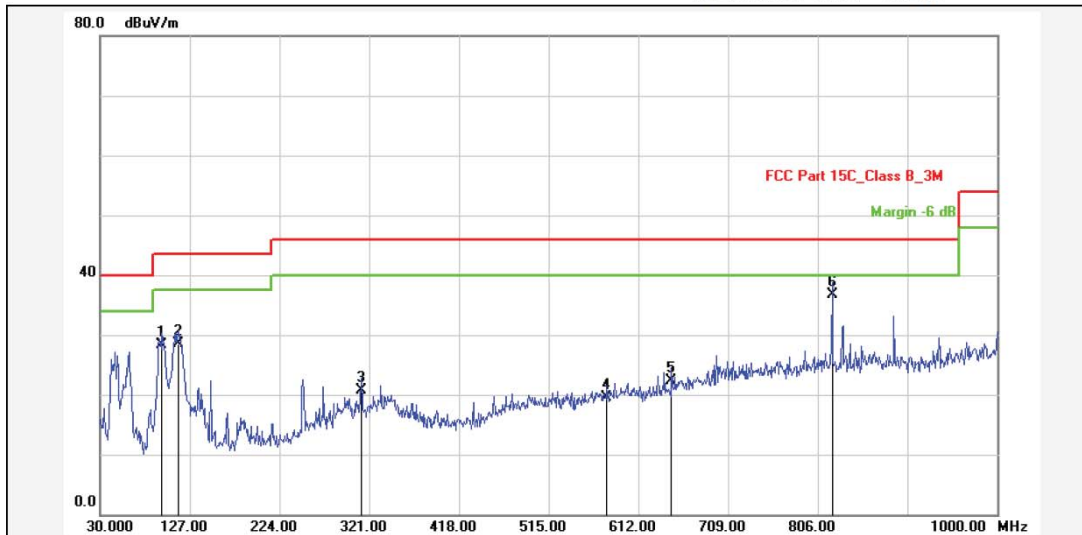

Report No.: 6223A-SRD

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: FN-LINK

Product: WIFI+BT combo Module

Model No.: 6223A-SRD

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 25(C) / 51 %

Power Rating: AC 120V/60Hz

Test Engineer: Ivan

Test Mode: TX(BDR+EDR)

Remark: 8DPSK Low Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	96.9300	-13.61	41.91	28.30	43.50	-15.20	QP			P	
2	114.3900	-13.70	42.30	28.60	43.50	-14.90	QP			P	
3	312.2700	-9.97	30.77	20.80	46.00	-25.20	QP			P	
4	578.0500	-5.24	24.84	19.60	46.00	-26.40	QP			P	
5	647.8900	-3.41	25.81	22.40	46.00	-23.60	QP			P	
6	821.5200	0.49	36.21	36.70	46.00	-9.30	QP			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

New antenna test results



Dongguan NTC Co., Ltd.
Tel: +86-769-2202 2444
Web: www.ntc-c.com

Fax: +86-769-2202 2799

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC_Part 15C_3m

Power: DC 5V

Humidity: 47 %

EUT: WIFI+BT combo Module

Distance: 3m

M/N: 6223A-SRD


Mode: 2.4G (BT)

Note:

Radiated Emission Measurement

Date: 2022/11/10

Time: 20:09:14

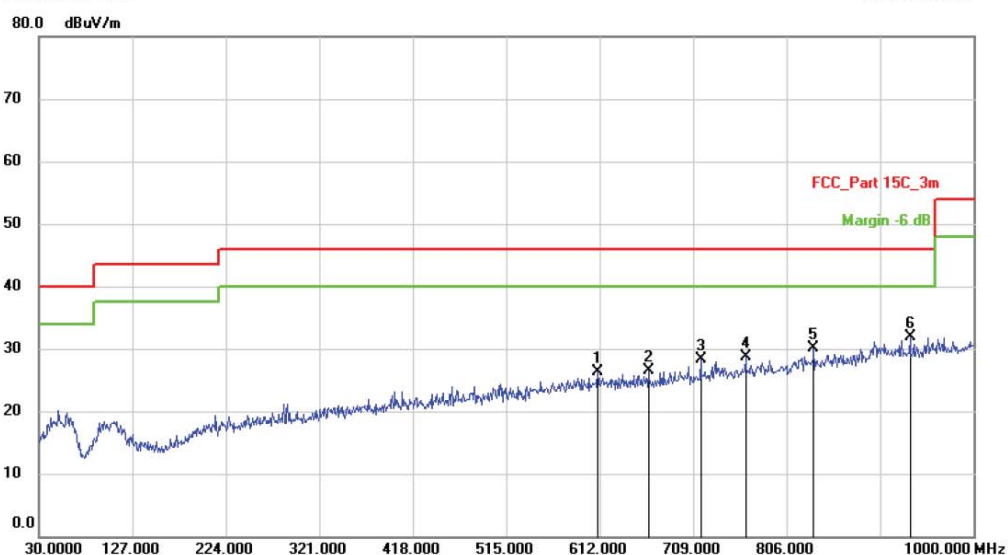

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	610.0600	25.52	0.80	26.32	46.00	-19.68	QP	
2	662.4400	24.91	1.51	26.42	46.00	-19.58	QP	
3	716.7600	25.84	2.49	28.33	46.00	-17.67	QP	
4	763.3200	25.45	3.28	28.73	46.00	-17.27	QP	
5	834.1300	25.59	4.54	30.13	46.00	-15.87	QP	
6 *	934.0400	25.66	6.25	31.91	46.00	-14.09	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-2202 2444
Web: www.ntc-c.com

Fax: +86-769-2202 2799

Site: 3m Chamber

Limit: FCC_Part 15C_3m

EUT: WIFI+BT combo Module

M/N: 6223A-SRD

Mode: 2.4G (BT)

Note:

Polarization: **Vertical**

Power: DC 5V

Distance: 3m


Temperature: 26

Humidity: 47 %

Radiated Emission Measurement

Date: 2022/11/10

Time: 20:15:37

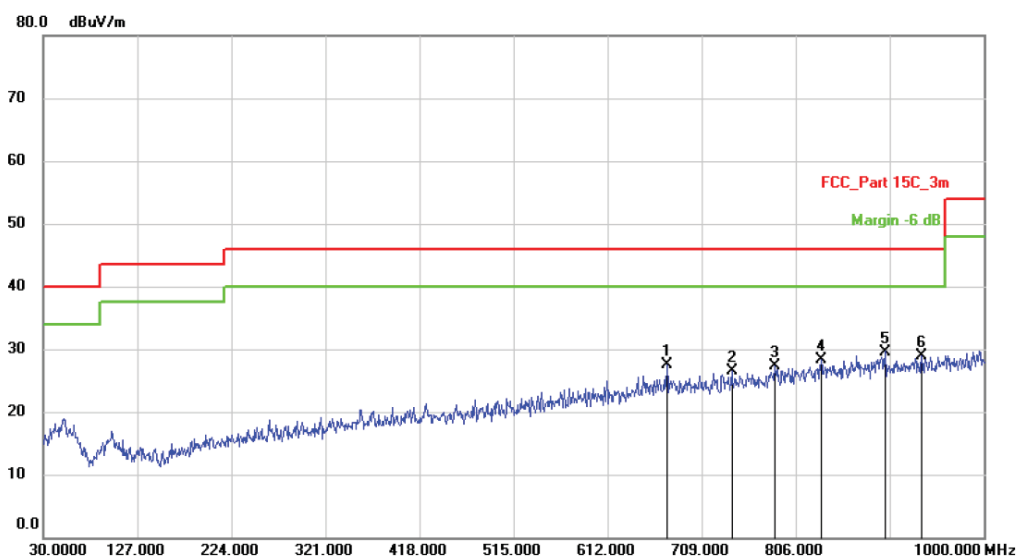

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		673.1100	25.73	1.71	27.44	46.00	-18.56	QP	
2		740.0400	23.70	2.87	26.57	46.00	-19.43	QP	
3		784.6599	23.63	3.69	27.32	46.00	-18.68	QP	
4		832.1900	23.74	4.51	28.25	46.00	-17.75	QP	
5	*	898.1500	24.64	4.96	29.60	46.00	-16.40	QP	
6		935.9800	23.98	5.02	29.00	46.00	-17.00	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Original antenna test results:

Modulation: 8DPSK(the worst case)
Frequency Range: 1-25GHz Test Date : November 22, 2017
Test Result: PASS Temperature : 25 °C
Measured Distance: 3m Humidity : 51 %
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	43.99	31.97	6.30	50.29	38.27	74.00	54.00	-23.71	-15.73
7206	V	40.64	29.09	10.44	51.08	39.53	74.00	54.00	-22.92	-14.47

4804	H	55.49	42.35	6.30	61.79	48.65	74.00	54.00	-12.21	-5.35
7206	H	43.99	31.41	10.44	54.43	41.85	74.00	54.00	-19.57	-12.15

Operation Mode: TX Mode (Mid)										
4882	V	44.31	32.06	6.60	50.91	38.66	74.00	54.00	-23.09	-15.34
7323	V	40.27	27.55	10.55	50.82	38.10	74.00	54.00	-23.18	-15.90

4882	H	55.47	42.58	6.60	62.07	49.18	74.00	54.00	-11.93	-4.82
7323	H	43.15	30.88	10.55	53.70	41.43	74.00	54.00	-20.30	-12.57

Operation Mode: TX Mode (High)										
4960	V	43.13	31.05	6.89	50.02	37.94	74.00	54.00	-23.98	-16.06
7440	V	40.68	28.71	10.60	51.28	39.31	74.00	54.00	-22.72	-14.68

4960	H	56.08	43.27	6.89	62.97	50.16	74.00	54.00	-11.03	-3.84
7440	H	43.91	31.57	10.60	54.51	42.17	74.00	54.00	-19.49	-11.83

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.

New antenna test results:

Modulation: 8DPSK(the worst case)
Frequency Range: 1-25GHz Test Date : November 10, 2022
Test Result: PASS Temperature : 25 °C
Measured Distance: 3m Humidity : 51 %
Test By: Hancock

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	49.32	31.24	6.30	55.62	37.54	74.00	54.00	-18.38	-16.46
7206	V	45.64	31.00	10.44	56.08	41.44	74.00	54.00	-17.92	-12.56

4804	H	45.10	30.97	6.30	51.40	37.27	74.00	54.00	-22.60	-16.73
7206	H	46.07	31.10	10.44	56.51	41.54	74.00	54.00	-17.49	-12.46

Operation Mode: TX Mode (Mid)										
4882	V	48.73	31.66	6.60	55.33	38.26	74.00	54.00	-18.67	-15.74
7323	V	45.83	30.78	10.55	56.38	41.33	74.00	54.00	-17.62	-12.67

4882	H	47.76	30.75	6.60	54.36	37.35	74.00	54.00	-19.64	-16.65
7323	H	44.59	29.78	10.55	55.14	40.33	74.00	54.00	-18.86	-13.67

Operation Mode: TX Mode (High)										
4960	V	47.48	29.22	6.89	54.37	36.11	74.00	54.00	-19.63	-17.89
7440	V	44.59	29.52	10.60	55.19	40.12	74.00	54.00	-18.81	-13.88

4960	H	46.85	28.38	6.89	53.74	35.27	74.00	54.00	-20.26	-18.73
7440	H	43.74	29.28	10.60	54.34	39.88	74.00	54.00	-19.66	-14.12

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.

5. Channel Separation test

5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results


Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	November 21, 2017
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		

Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit 2/3 20dB Bandwidth (KHz)
GFSK			
Lowest	2402	1000	>708.7
Middle	2441	1000	>708.7
Highest	2480	1000	>705.3
$\pi/4$ -DQPSK			
Lowest	2402	1000	>894.0
Middle	2441	1000	>894.0
Highest	2480	995	>894.0
8DPSK			
Lowest	2402	1010	>920.0
Middle	2441	1005	>920.0
Highest	2480	1000	>910.0


GFSK Lowest Channel

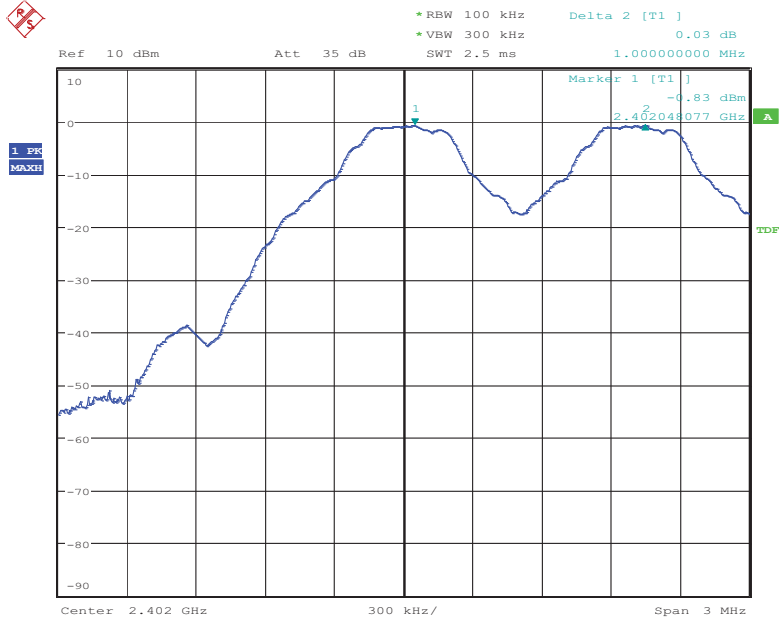


GFSK Middle Channel

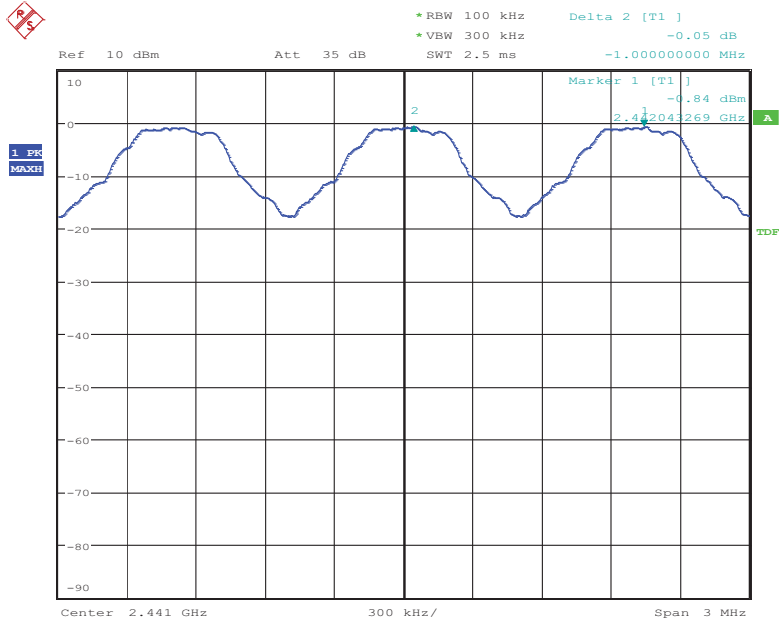


GFSK Highest Channel

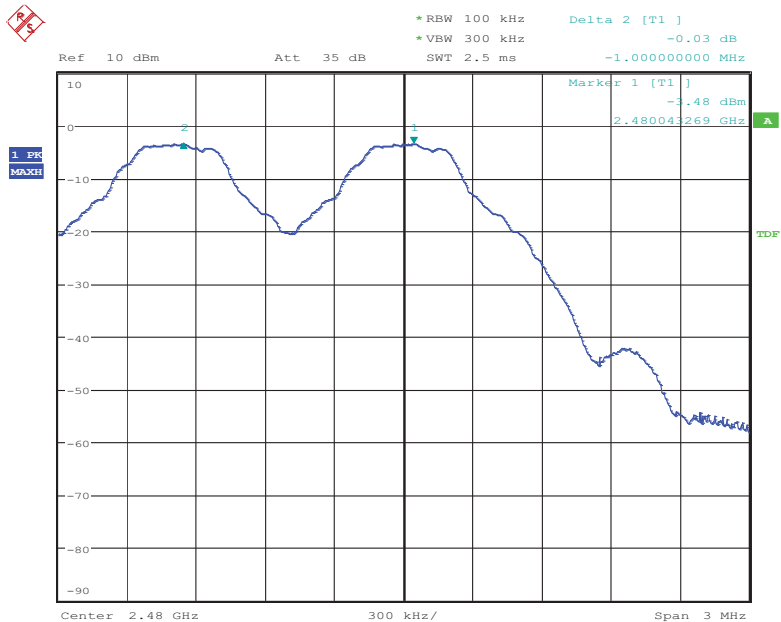


$\pi/4$ -DQPSK Lowest Channel

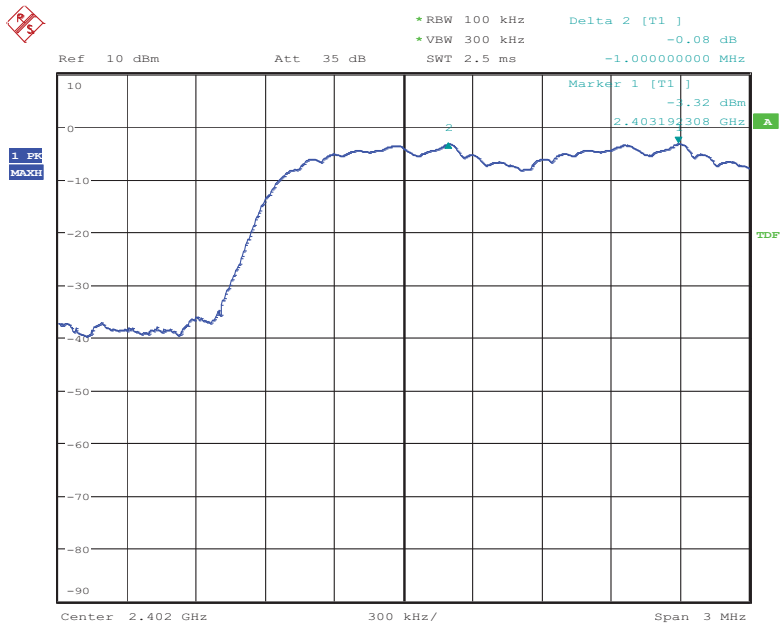


$\pi/4$ -DQPSK Middle Channel

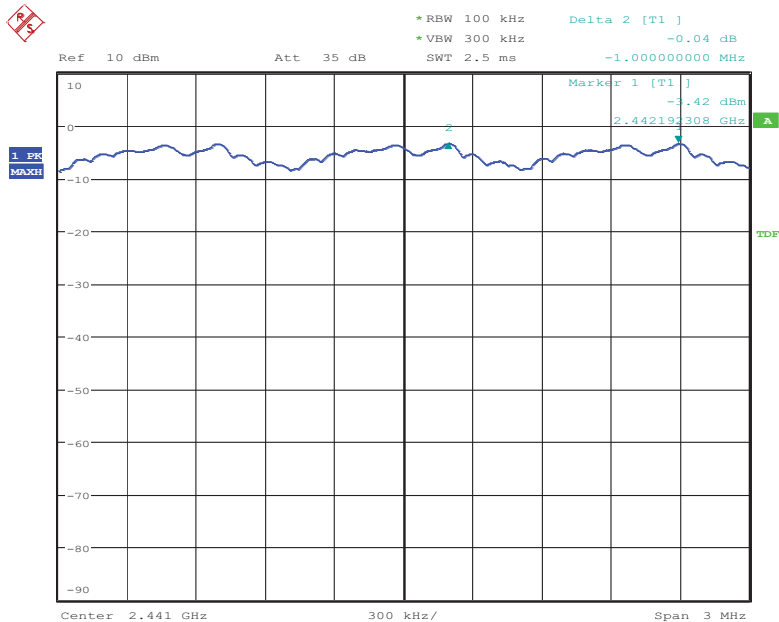


$\pi/4$ -DQPSK Highest Channel

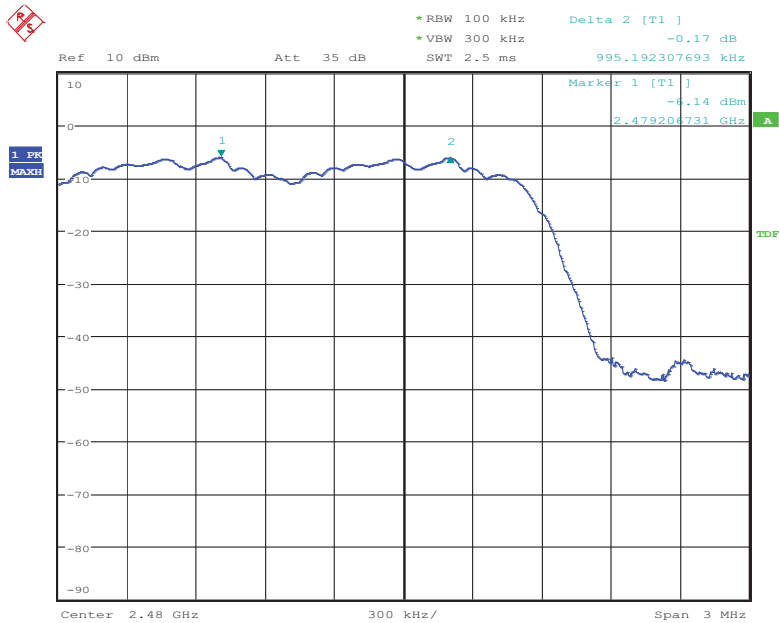


8DPSK Lowest Channel

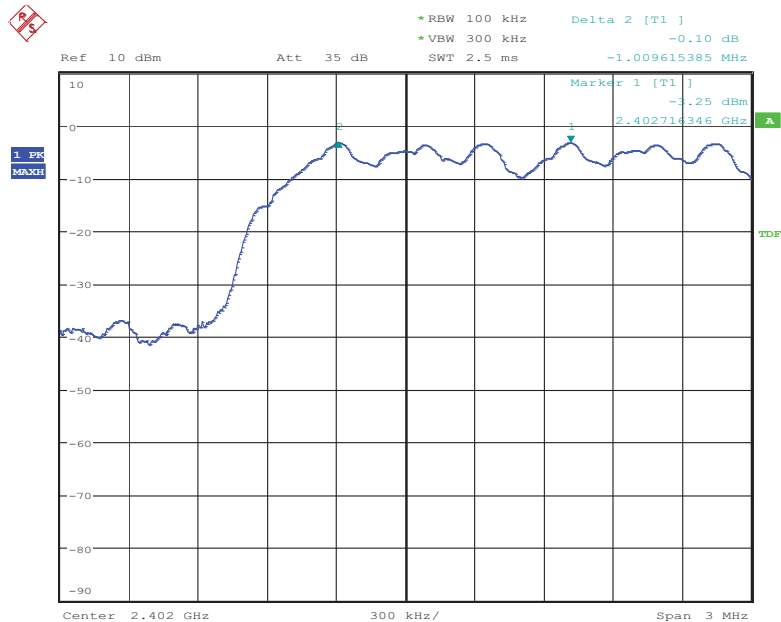

8DPSK Middle Channel

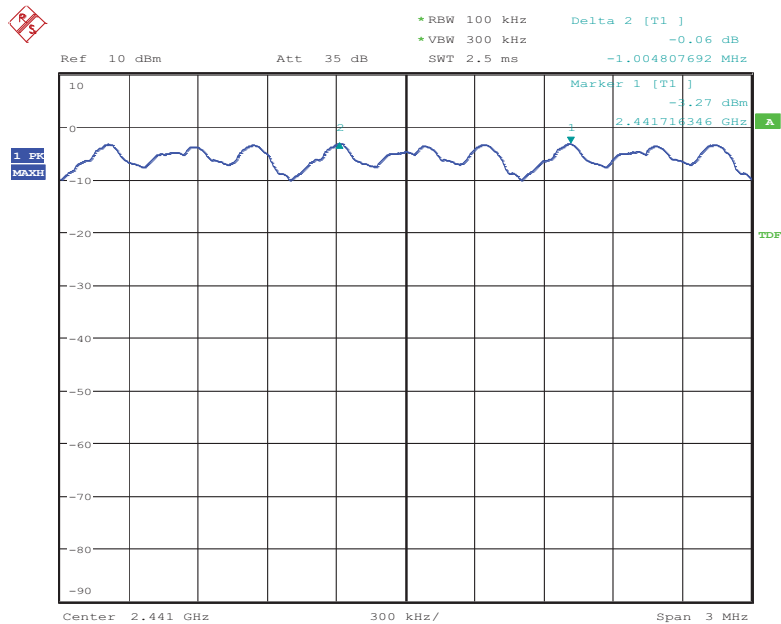

8DPSK Highest Channel

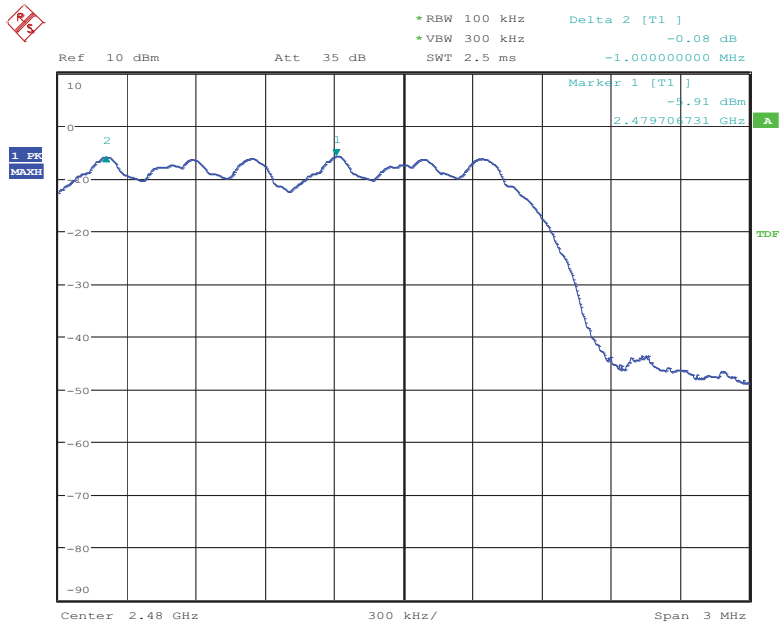


6. 20dB Bandwidth

6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Refer to attached data chart.


Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	30KHz	VBW:	100KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	November 21, 2017
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		

Channel frequency (MHz)	20dB Down BW(kHz)
GFSK	
2402	1063
2441	1063
2480	1058
$\pi/4$ -DQPSK	
2402	1341
2441	1341
2480	1341
8DPSK	
2402	1380
2441	1380
2480	1365


GFSK Lowest Channel

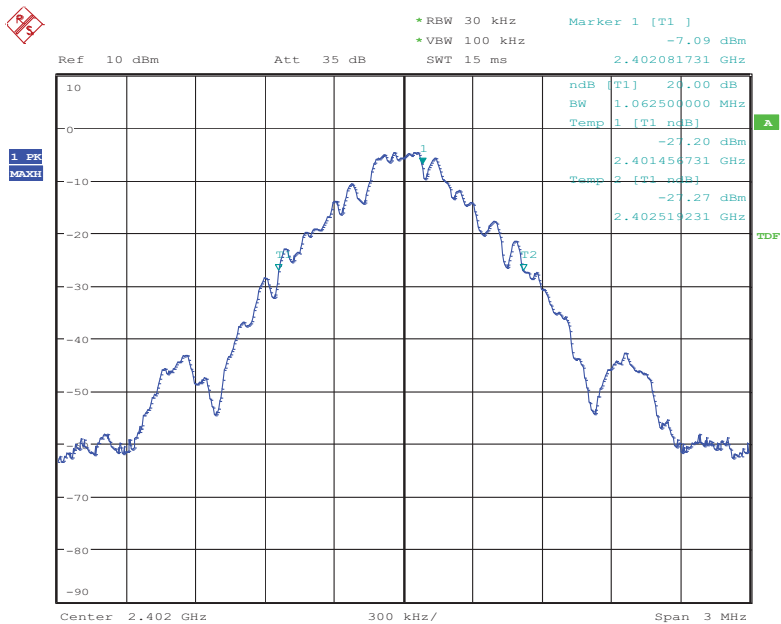


GFSK Middle Channel

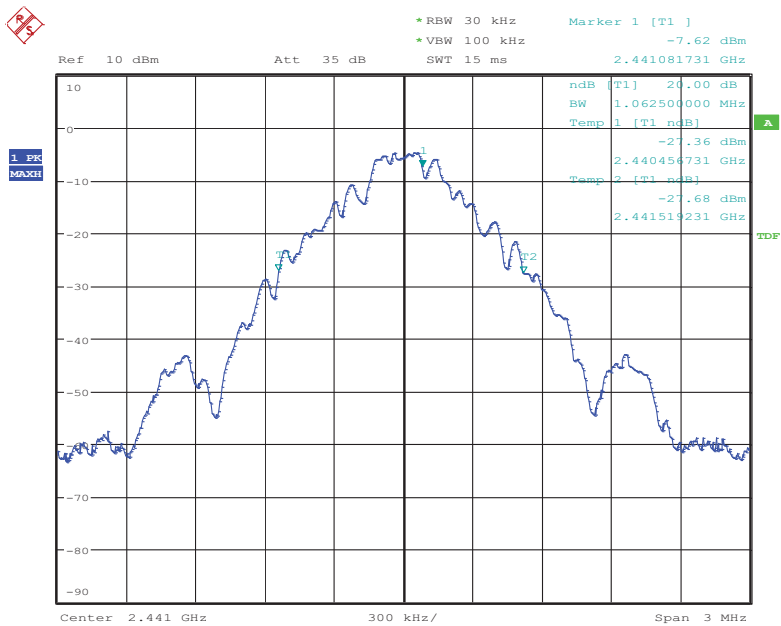


GFSK Highest Channel

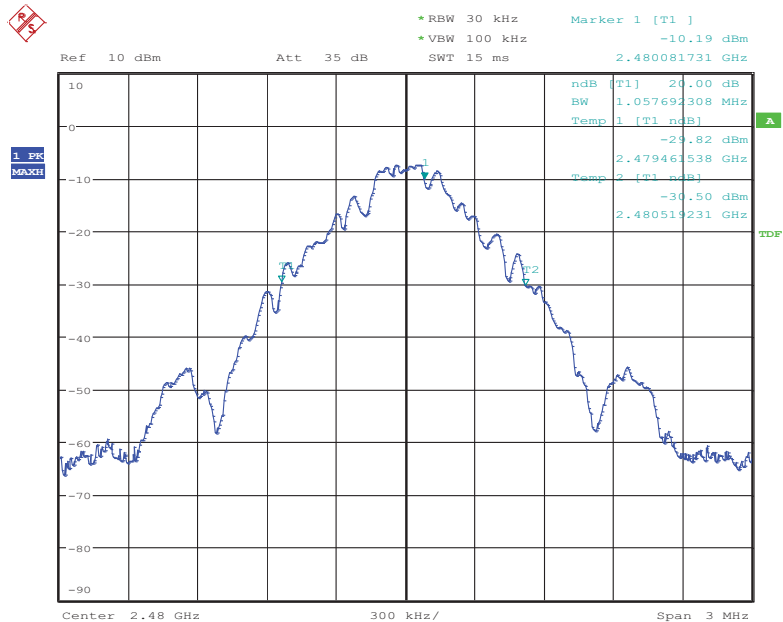


$\pi/4$ -DQPSK Lowest Channel

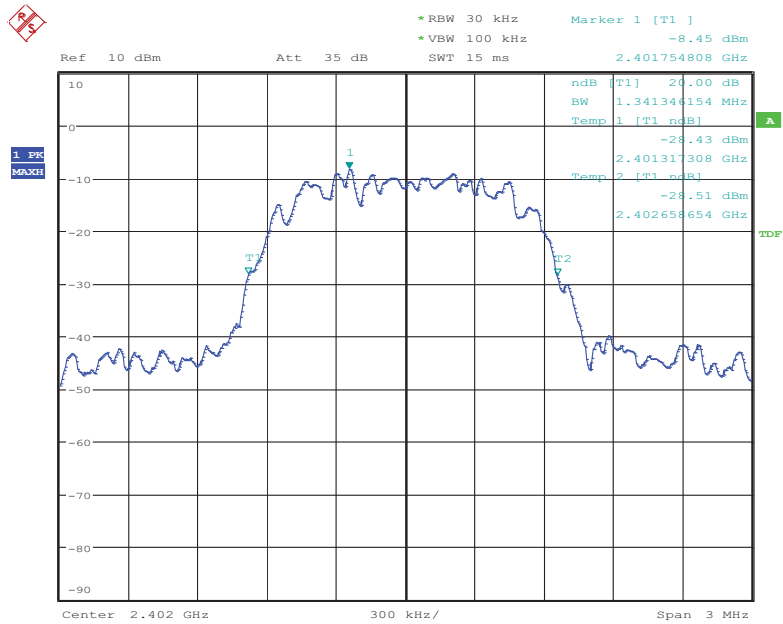


$\pi/4$ -DQPSK Middle Channel

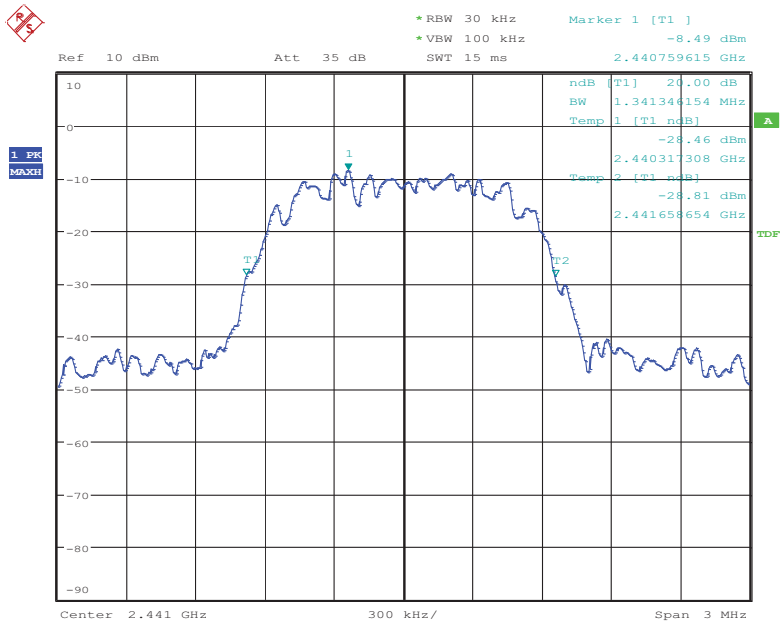


$\pi/4$ -DQPSK Highest Channel

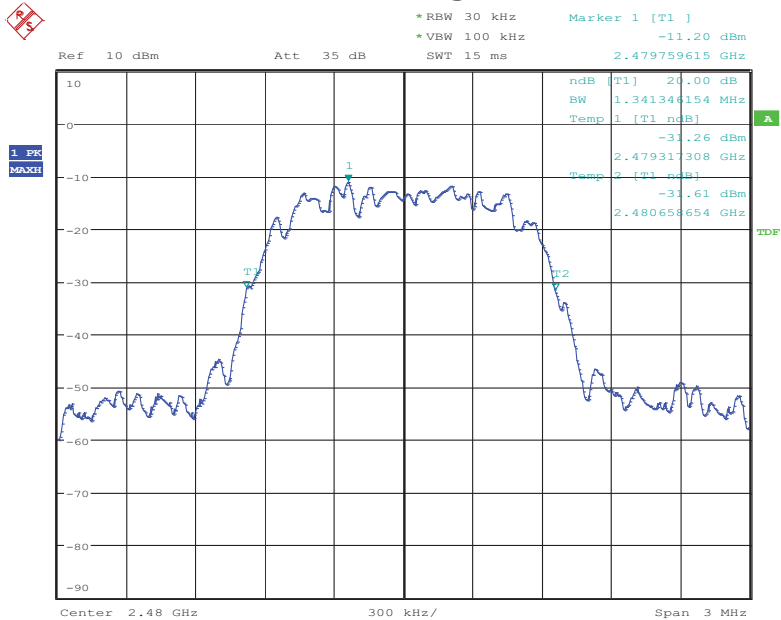


8DPSK Lowest Channel

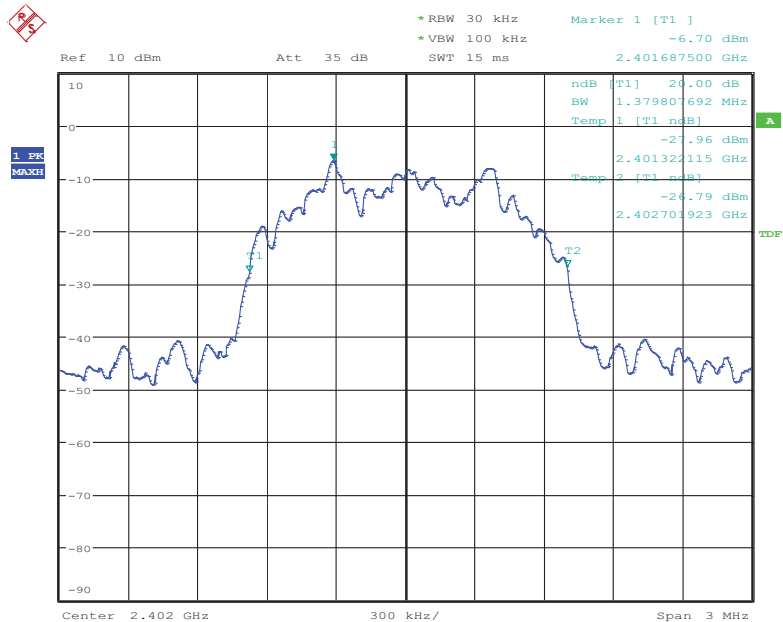

8DPSK Middle Channel

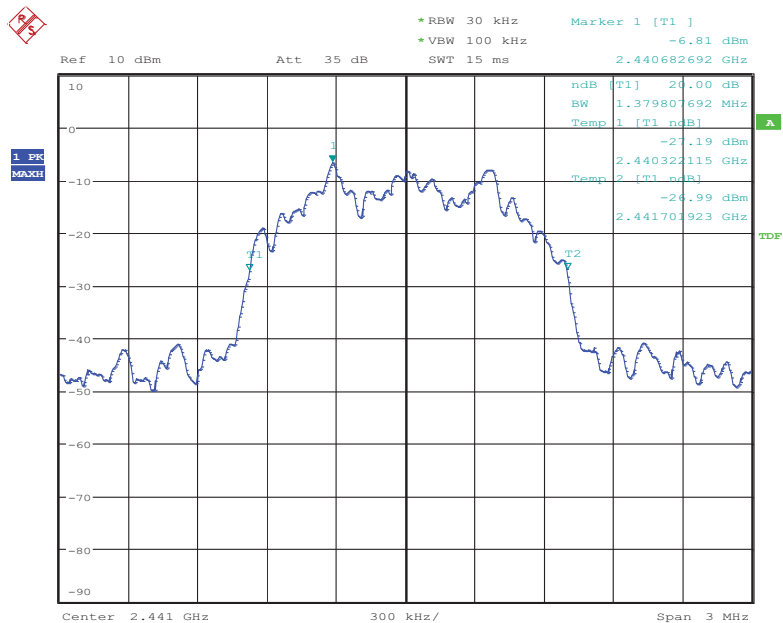

8DPSK Highest Channel

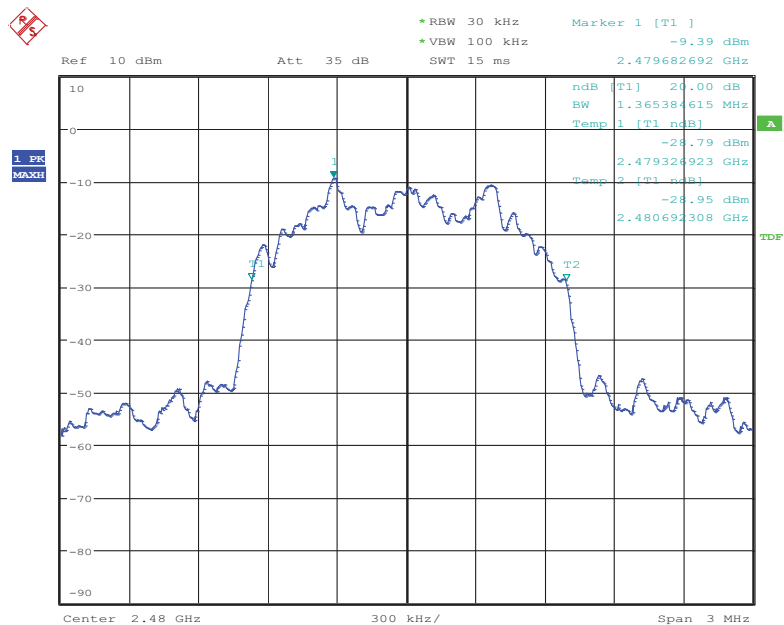

7. Hopping Channel Number

7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	November 21, 2017
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥ 15

The worst case: 8DPSK

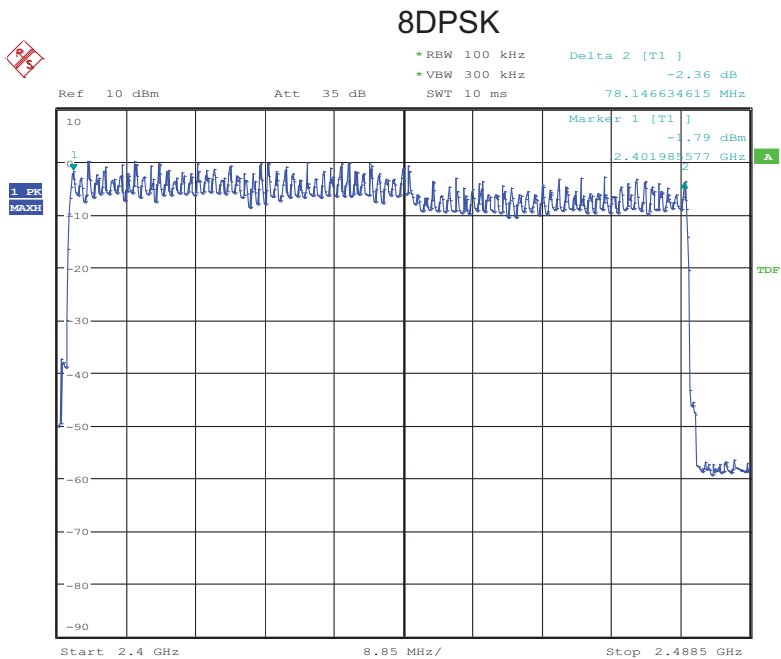

8. Time of Occupancy (Dwell Time)

8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.


Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	November 21, 2017	Temperature :	24°C
Test Result:	PASS	Humidity :	50 %

Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2441	0.353 (ms)*(1600/(2*79))*31.6= 113.0	400
DH3	2441	1.611 (ms)*(1600/(4*79))*31.6= 257.8	400
DH5	2441	2.873 (ms)*(1600/(6*79))*31.6= 306.5	400
$\pi/4$ -DQPSK			
2-DH1	2441	0.377 (ms)*(1600/(2*79))*31.6= 120.6	400
2-DH3	2441	1.635 (ms)*(1600/(4*79))*31.6= 261.6	400
2-DH5	2441	2.873 (ms)*(1600/(6*79))*31.6= 306.5	400
8DPSK			
3-DH1	2441	0.377 (ms)*(1600/(2*79))*31.6= 120.6	400
3-DH3	2441	1.635 (ms)*(1600/(4*79))*31.6= 261.6	400
3-DH5	2441	2.885 (ms)*(1600/(6*79))*31.6= 307.7	400


GFSK DH1

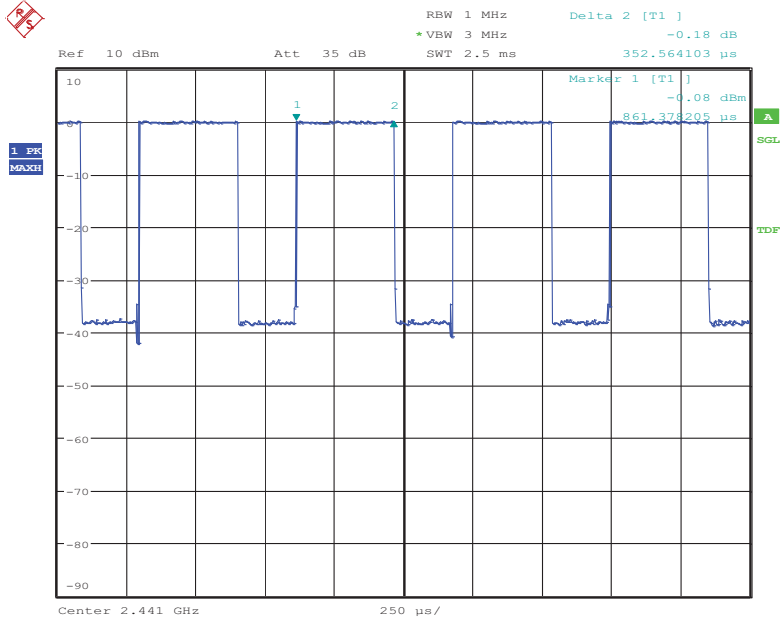


GFSK DH3

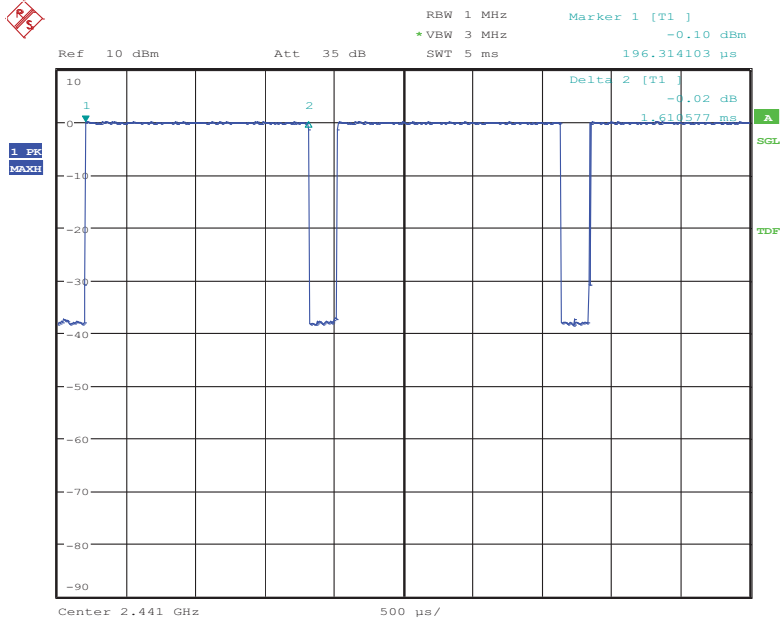


GFSK DH5

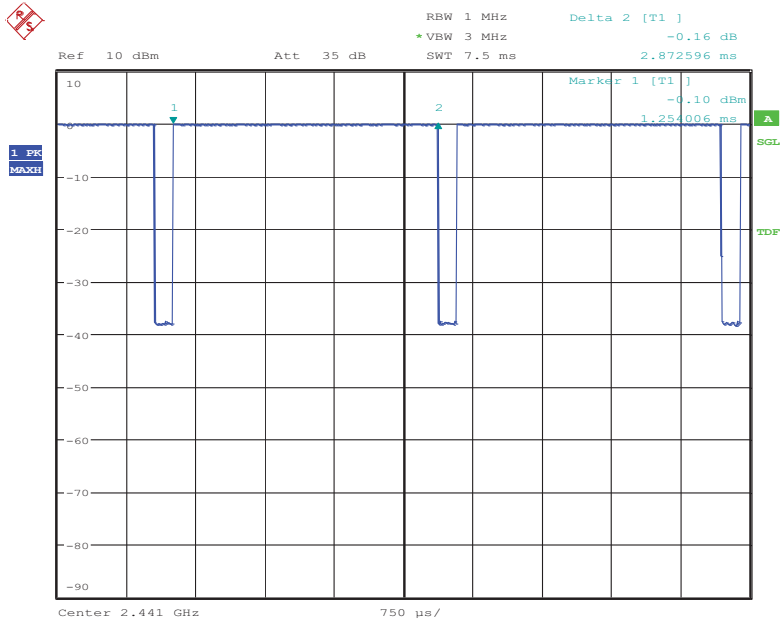


$\pi/4$ -DQPSK 2-DH1

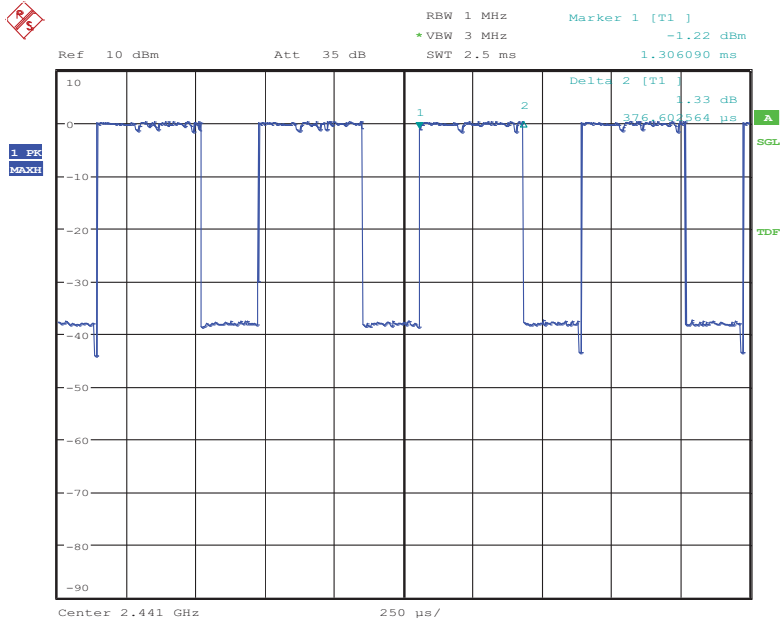


$\pi/4$ -DQPSK 2-DH3

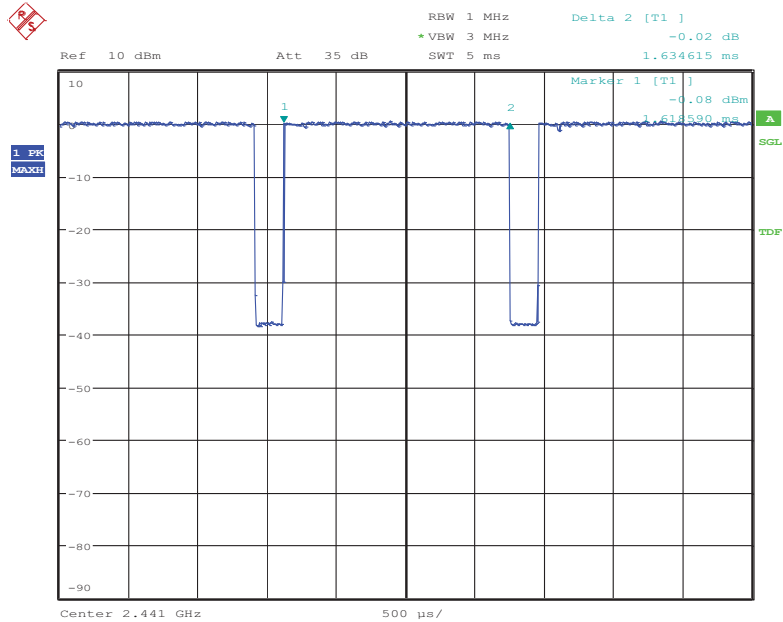


$\pi/4$ -DQPSK 2-DH5

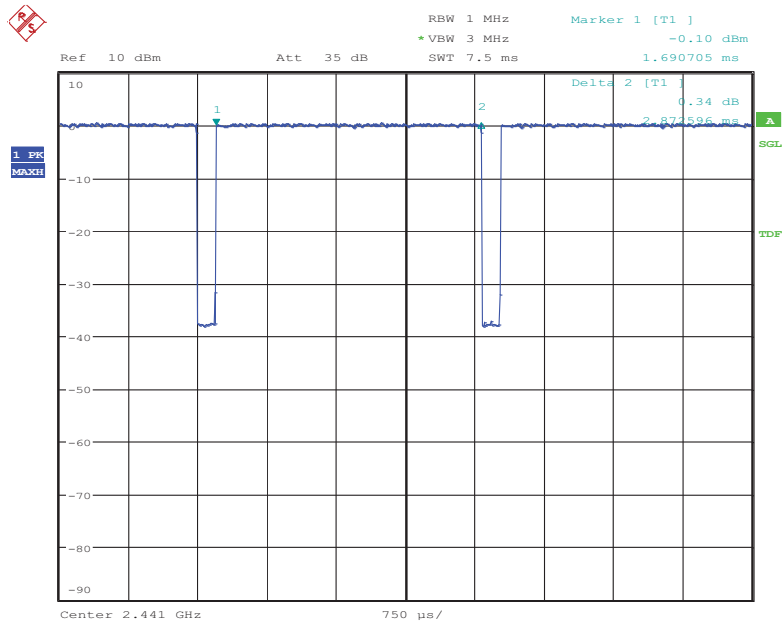

8DPSK 3-DH1

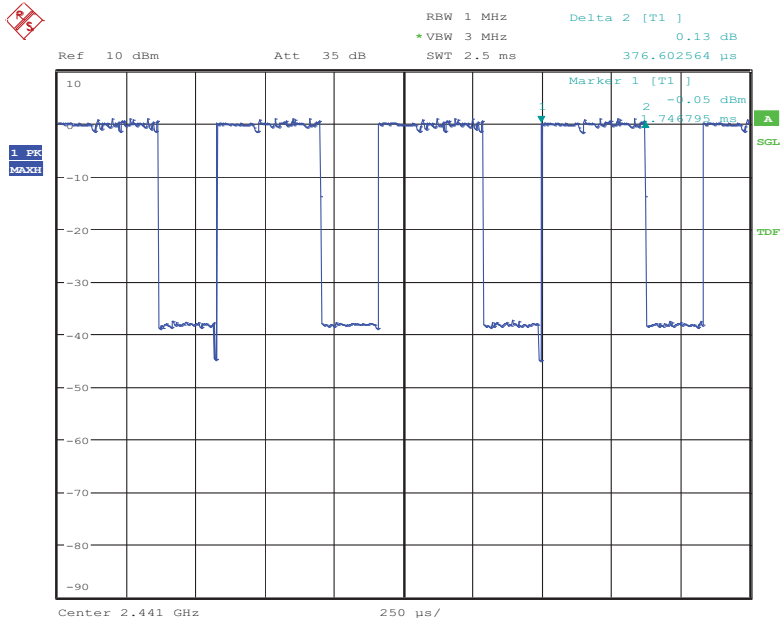


8DPSK 3-DH3

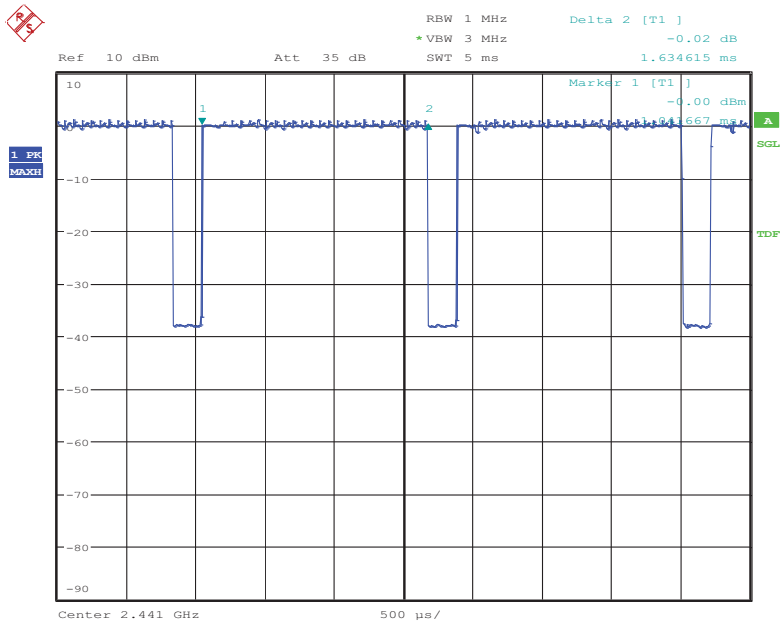



8DPSK 3-DH5

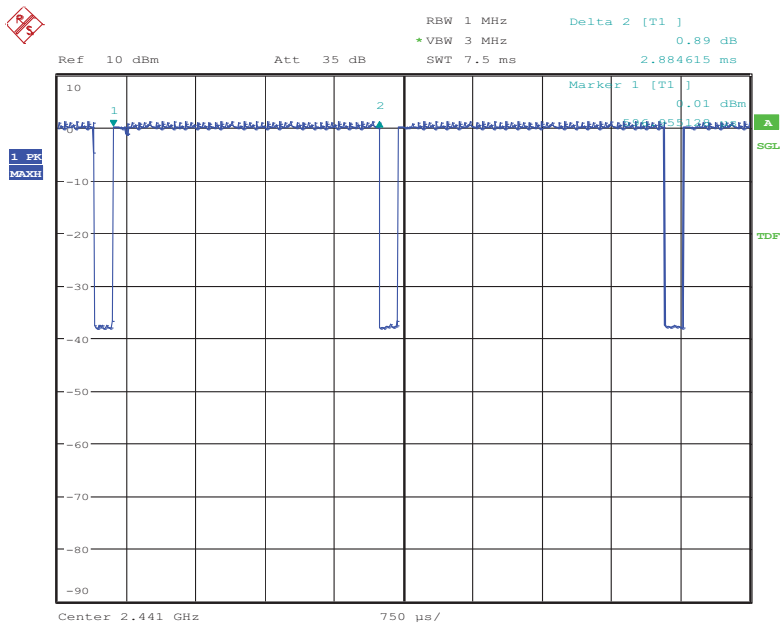

9. MAXIMUM PEAK OUTPUT POWER

9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


9.2 Measurement Results

Refer to attached data chart.


Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK				
RBW :	3MHz	VBW :	3MHz		
Spectrum Detector:	PK	Test Date :	November 21, 2017		
Test By:	Sance	Temperature :	24 °C		
Test Result:	PASS	Humidity :	50 %		

Channel Frequency (MHz)	Cable Loss dB	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(dBm)	Pass/Fail
GFSK					
2402.00	1.5	0.23	1.05	30	PASS
2441.00	1.5	0.13	1.03	30	PASS
2480.00	1.5	-2.58	0.55	30	PASS
$\pi/4$ -DQPSK					
2402.00	1.5	1.14	1.30	21	PASS
2441.00	1.5	1.10	1.29	21	PASS
2480.00	1.5	-1.35	0.73	21	PASS
8DPSK					
2402.00	1.5	1.57	1.44	21	PASS
2441.00	1.5	1.48	1.41	21	PASS
2480.00	1.5	-1.12	0.77	21	PASS


GFSK Lowest Channel

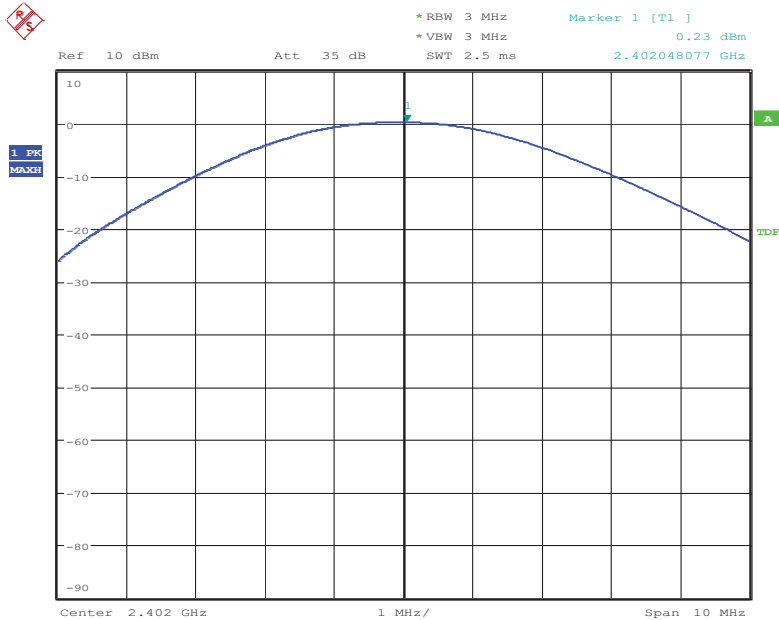


GFSK Middle Channel

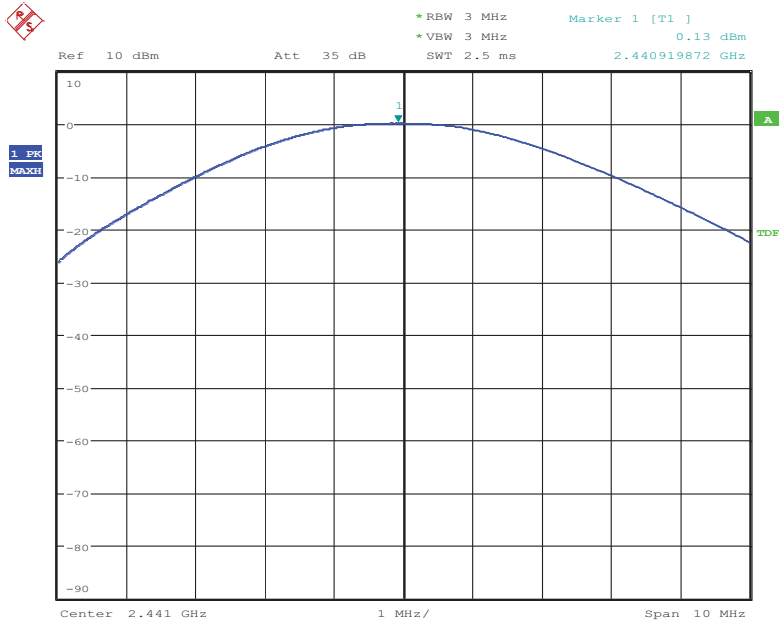


GFSK Highest Channel

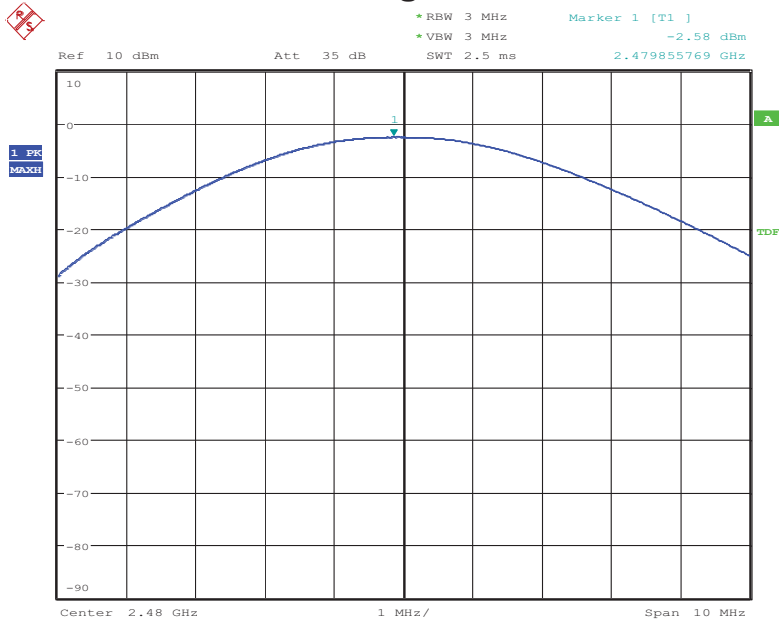


$\pi/4$ -DQPSK Lowest Channel

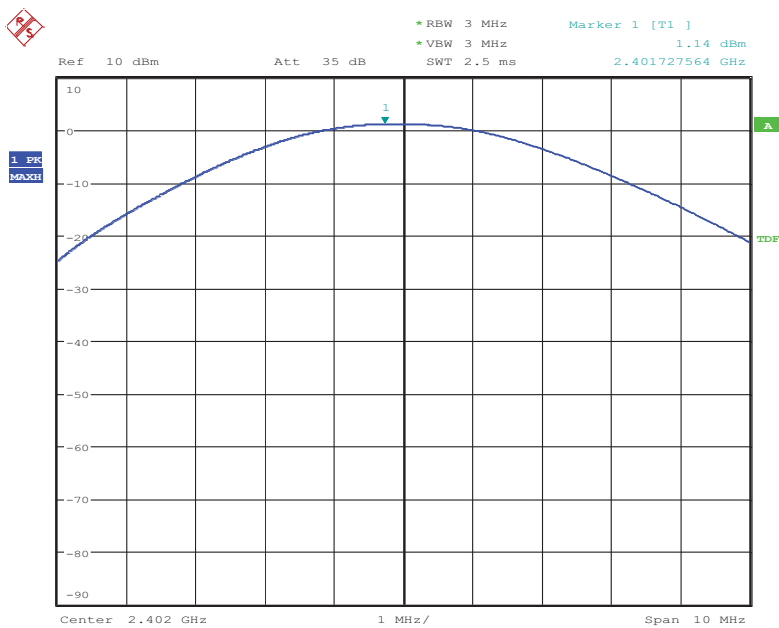


$\pi/4$ -DQPSK Middle Channel

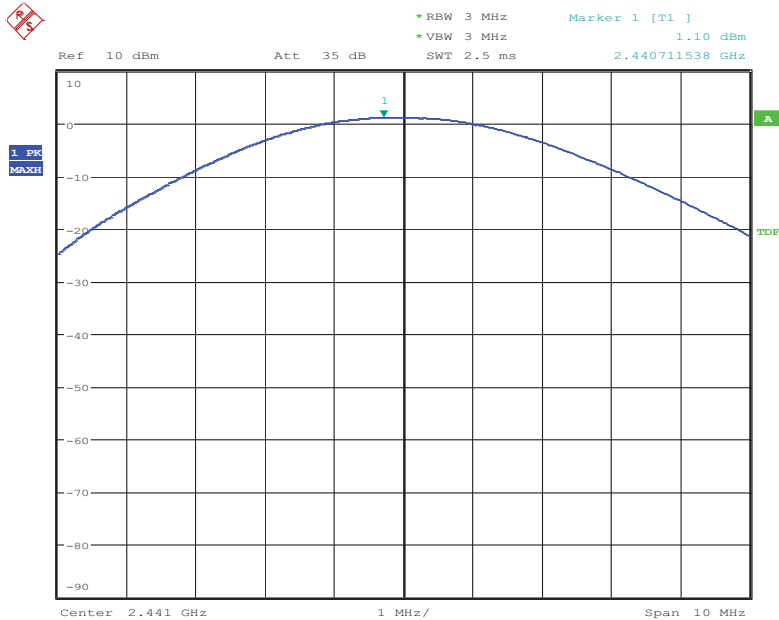


$\pi/4$ -DQPSK Highest Channel

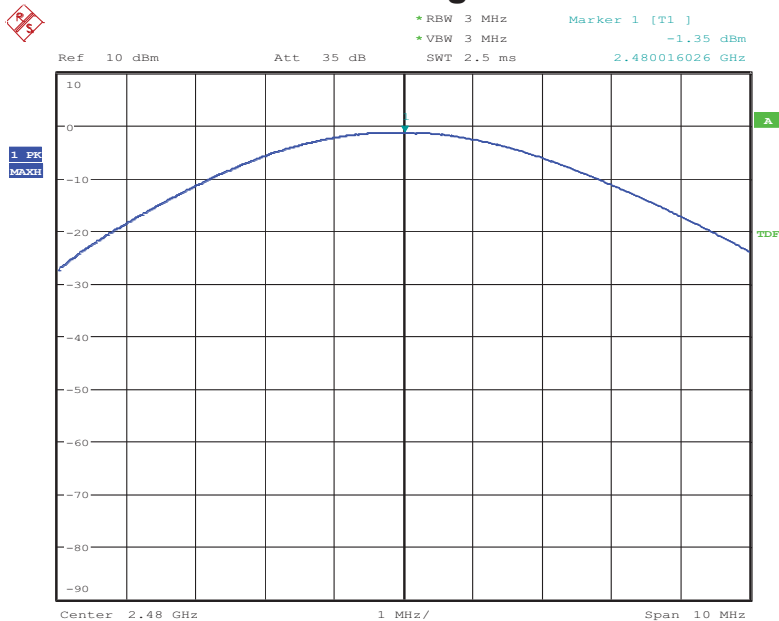


8DPSK Lowest Channel

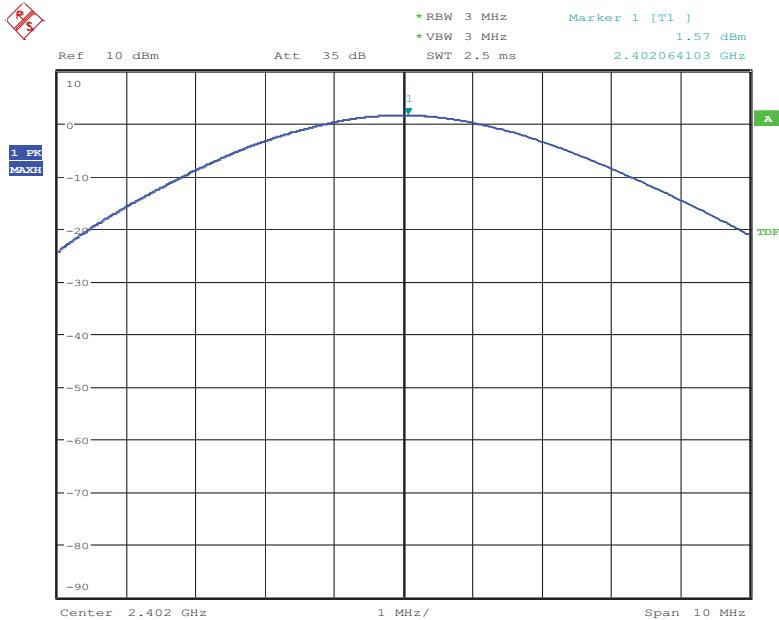

8DPSK Middle Channel

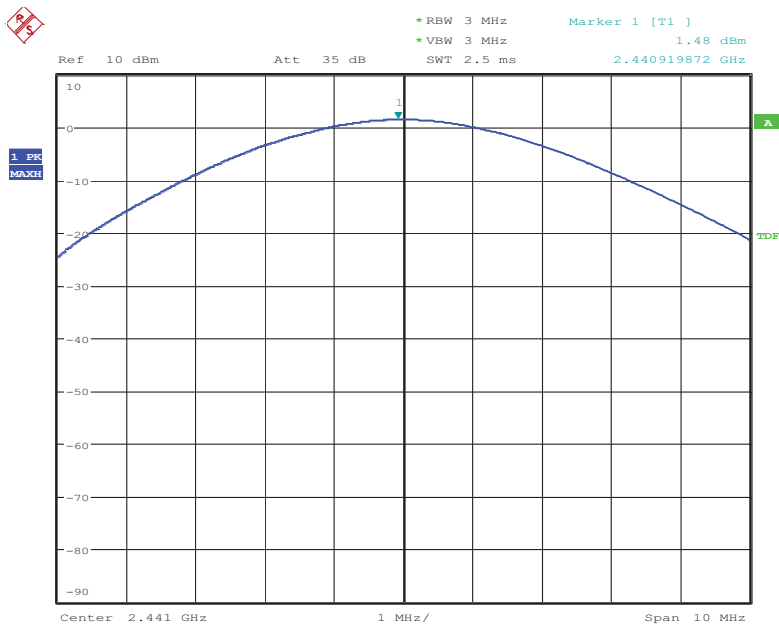

8DPSK Highest Channel

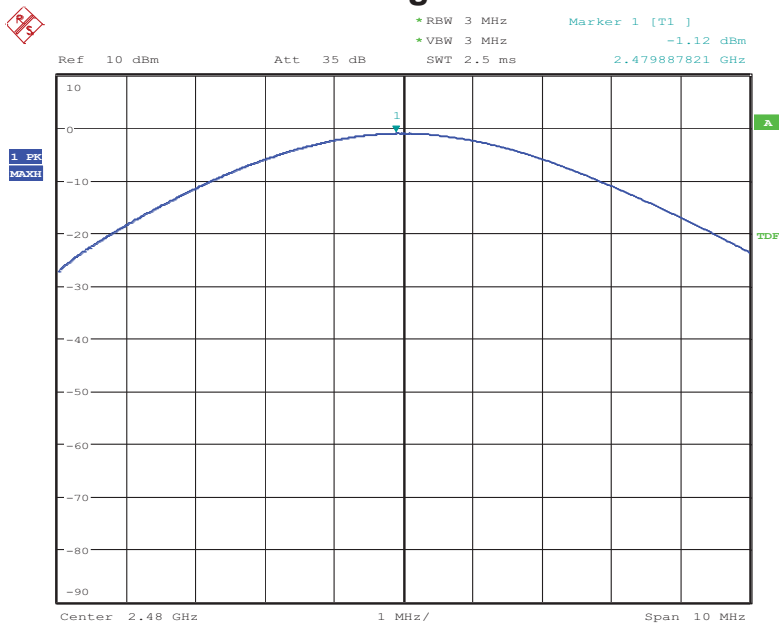

10. Band Edge

10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.3 Measurement Results

Please see below test table and plots.
For Radiated Emission
The worst case: 8DPSK

Original antenna test results:
Hopping-on mode

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	50.74	36.15	0.13	50.87	36.28	74.00	54.00	-23.13	-17.72
2390.000	V	49.03	35.22	0.13	49.16	35.35	74.00	54.00	-24.84	-18.65
2483.500	H	61.42	48.97	0.35	61.77	49.32	74.00	54.00	-12.23	-4.68
2483.500	V	56.26	42.43	0.35	56.61	42.78	74.00	54.00	-17.39	-11.22

Note: (1) Emission Level= Reading Level + Factor
(2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
(3) Horn antenna used for the emission over 1000MHz.

New antenna test results:

Hopping-on mode

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	46.27	31.79	0.13	46.36	31.88	74.00	54.00	-27.64	-22.12
2390.000	V	46.35	31.27	0.13	46.44	31.36	74.00	54.00	-27.56	-22.64
2483.500	H	44.84	29.77	0.35	45.18	30.11	74.00	54.00	-28.82	-23.89
2483.500	V	45.97	29.91	0.35	46.31	30.25	74.00	54.00	-27.69	-23.75



Note: (1) Emission Level= Reading Level + Factor

(2) Factor= Antenna Gain + Cable Loss – Amplifier Gain



(3) Horn antenna used for the emission over 1000MHz.

For RF Conducted



GFSK Lowest Channel

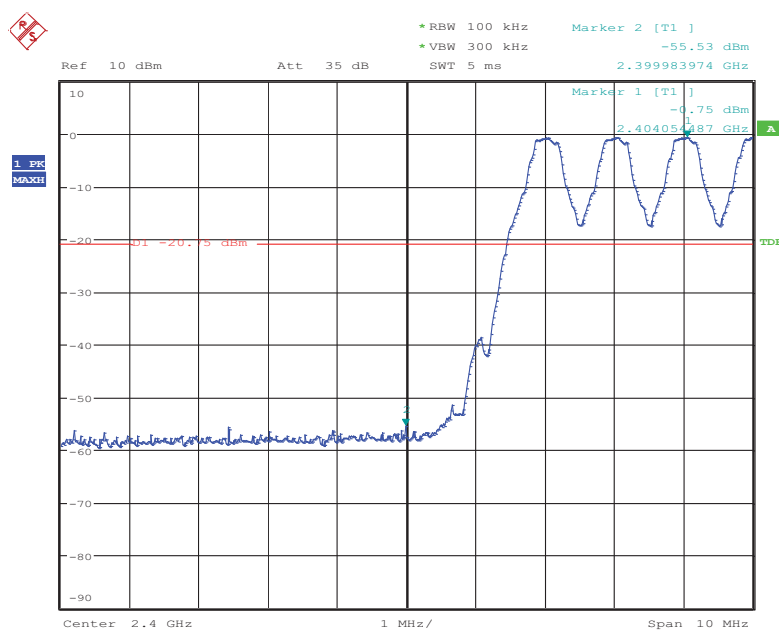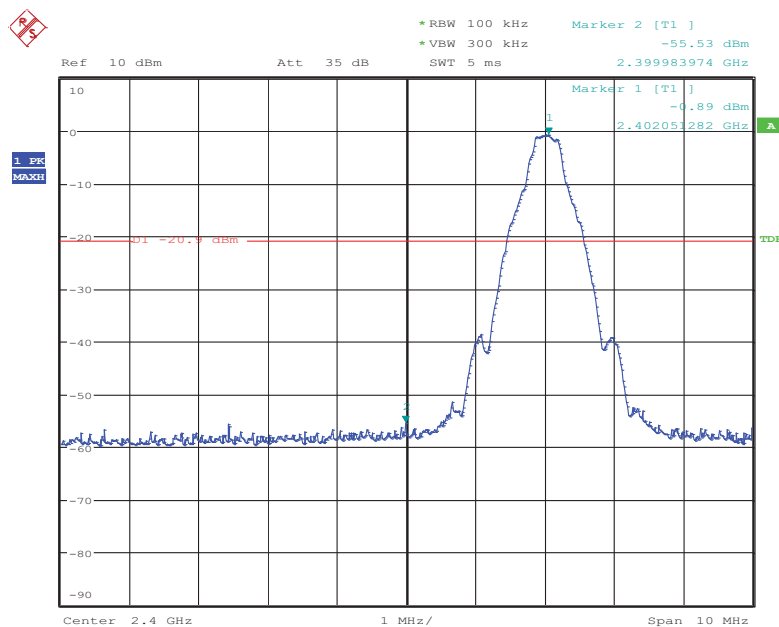



GFSK Highest Channel

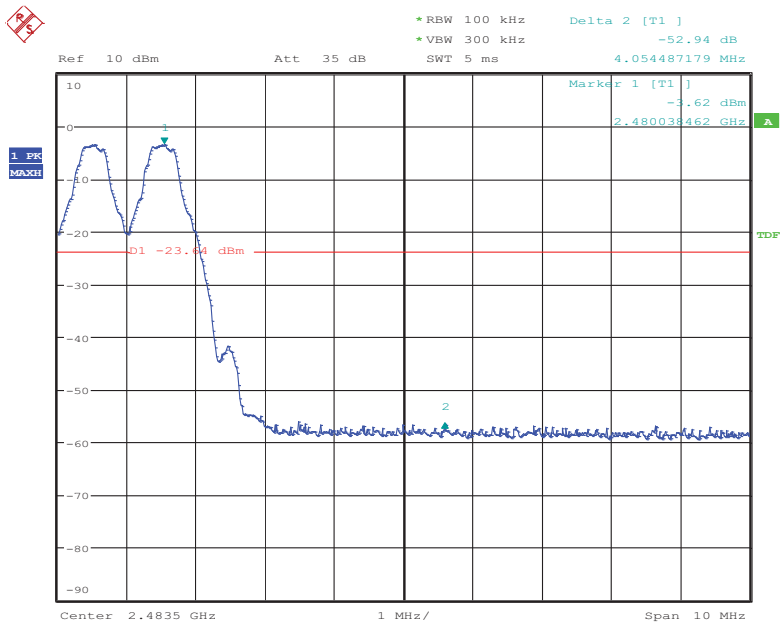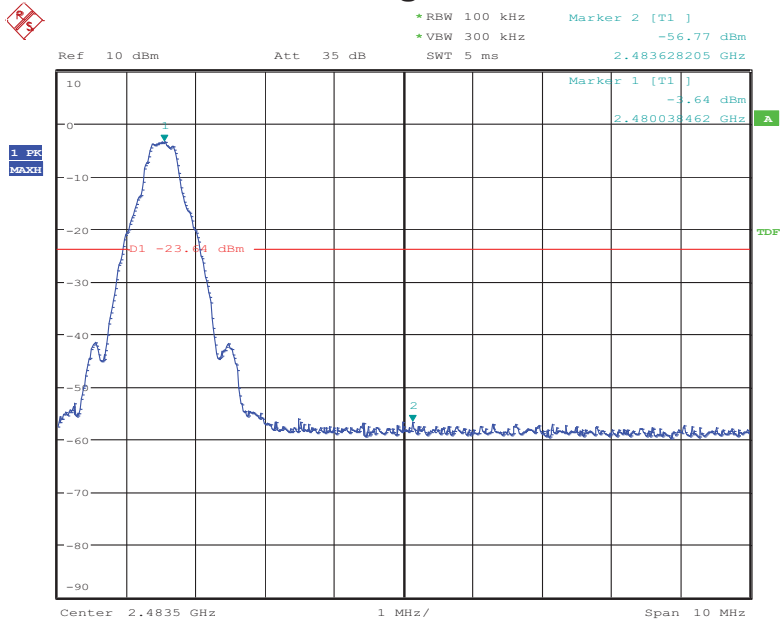



$\pi/4$ -DQPSK Lowest Channel

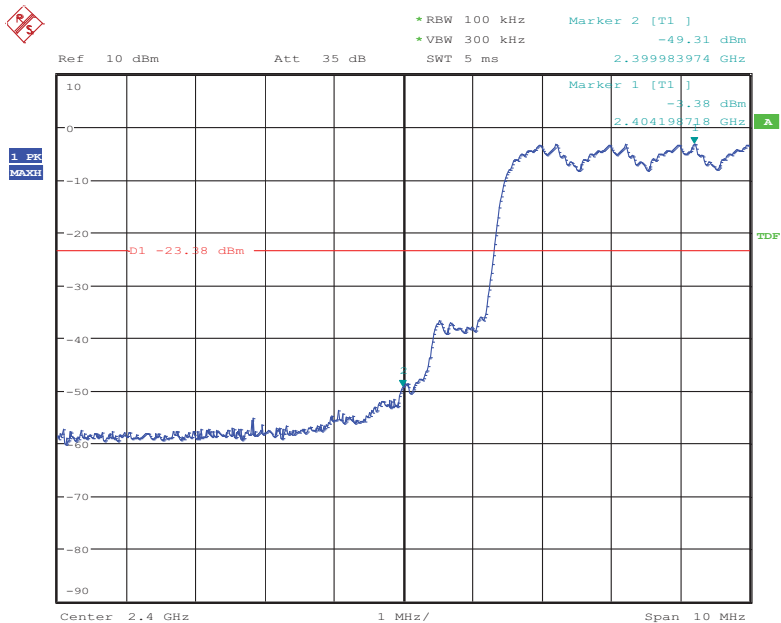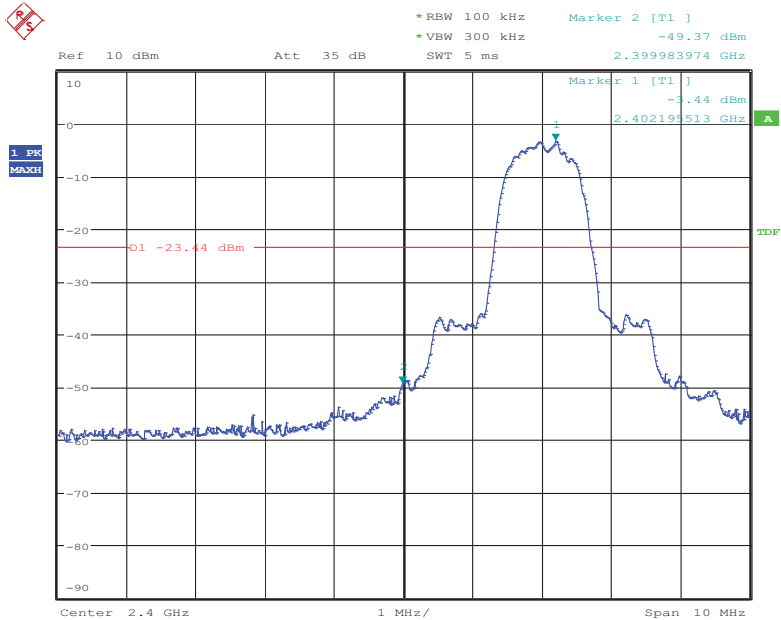



$\pi/4$ -DQPSK Highest Channel

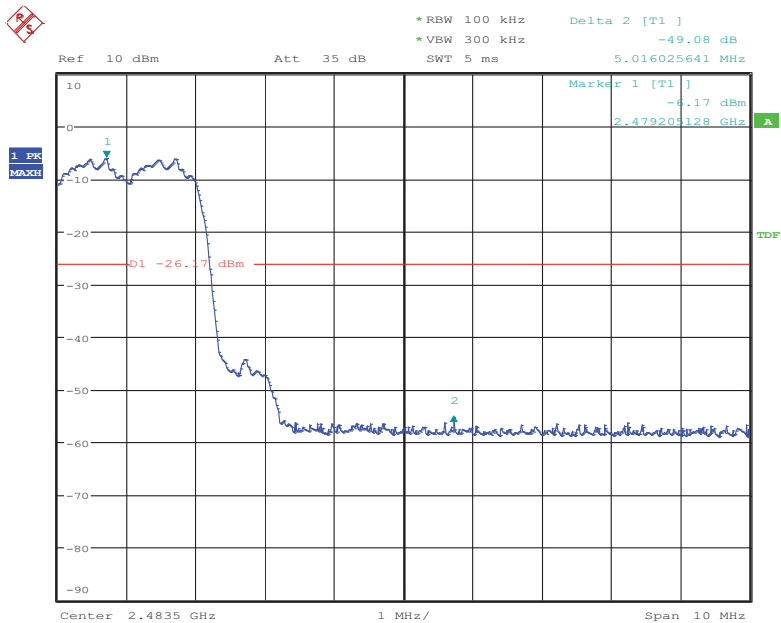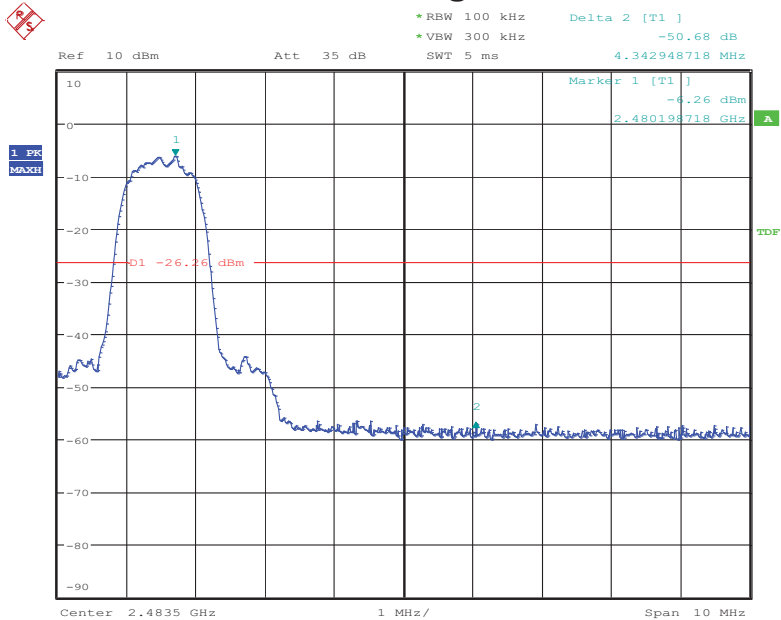

8DPSK Lowest Channel

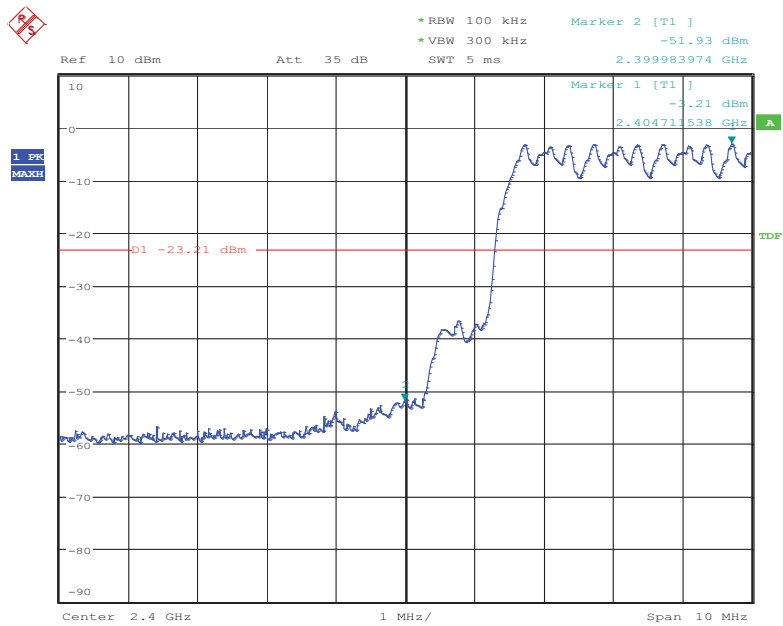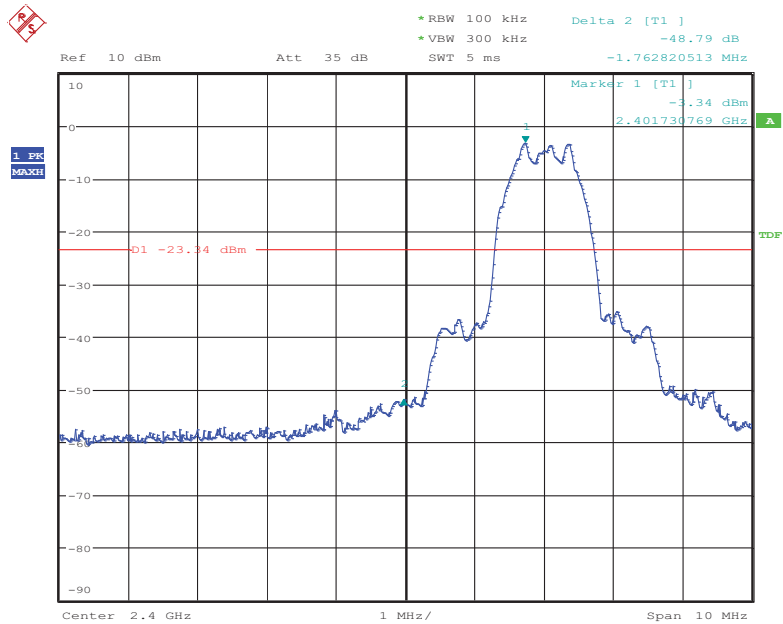

8DPSK Highest Channel

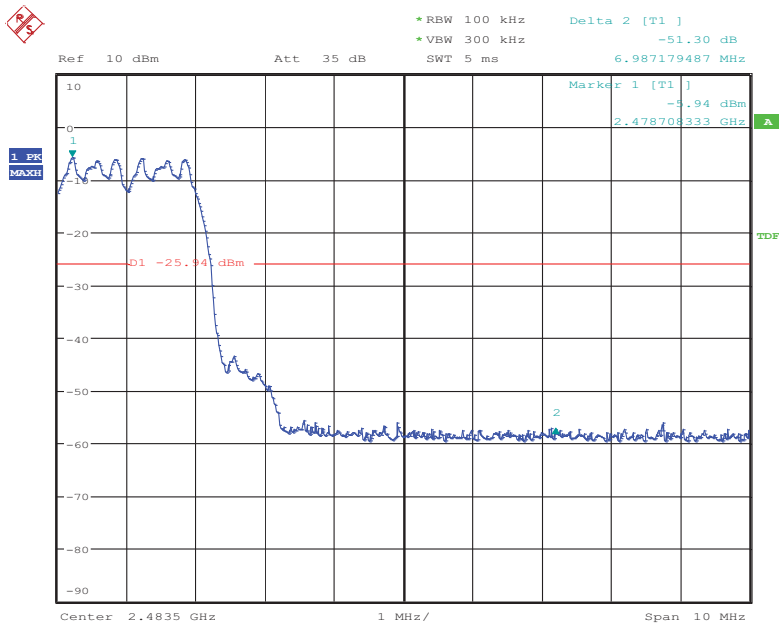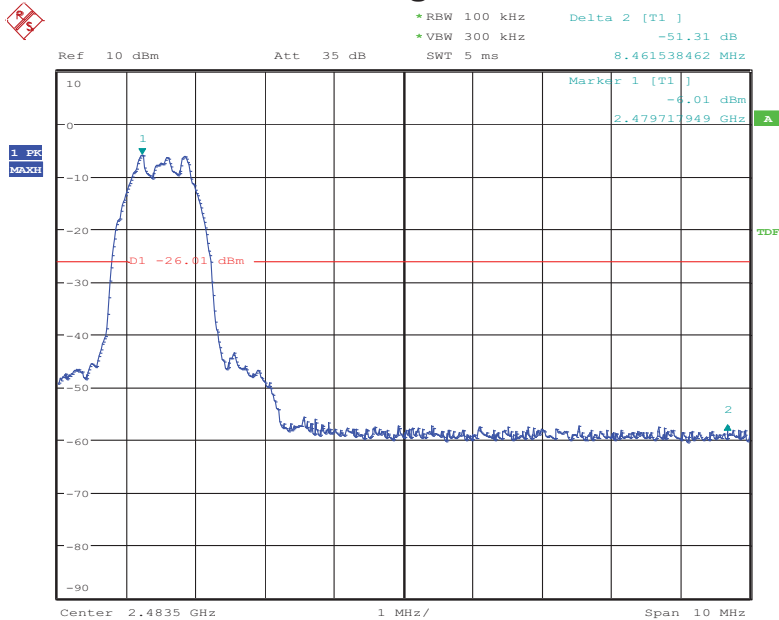

11. Antenna Application

11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Measurement Results

For antenna is PIFA antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.99dBi, For antenna is stamped metal antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 4.9dBi, So, these antenna is consider meet the requirement.

12. Conducted Spurious Emissions

12.1 Measurement Procedure


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.


12.2. Measurement Results

Please refer to following plots, the worst case (8DPSK) was shown.


Lowest Channel

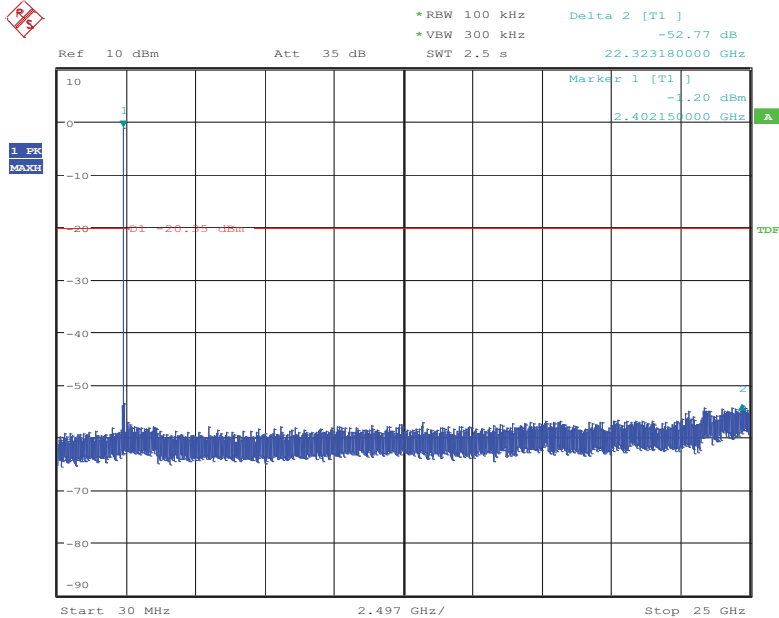

Middle Channel

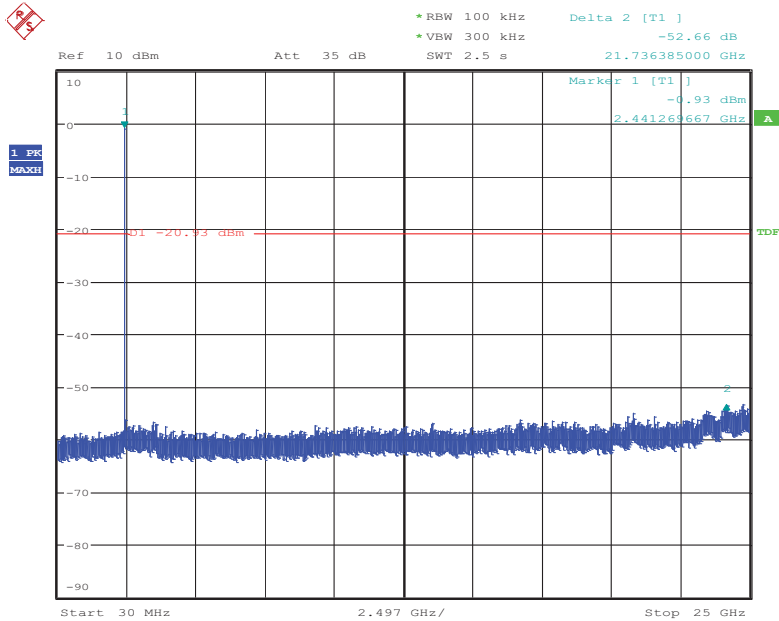

Highest Channel

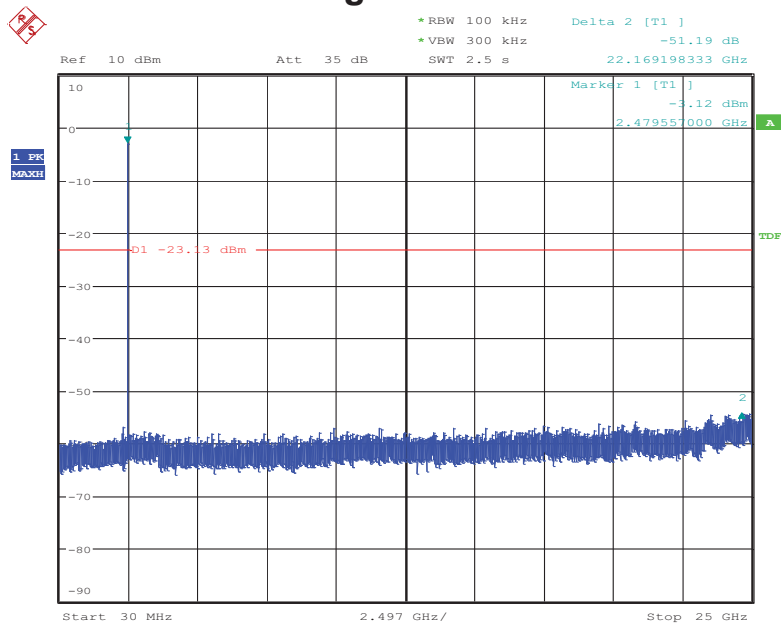

Note: Sweep points=30001pts

13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2017	Mar. 14, 2018
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2017	Apr. 25, 2018
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2017	Mar. 14, 2018
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2017	Apr. 24, 2018
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2017	Apr. 24, 2018
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	April. 06, 2017	April. 05, 2018
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2017	Nov. 02, 2018
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2017	Mar. 13, 2018
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 03, 2017	Nov. 02, 2018
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 03, 2017	Nov. 02, 2018

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	2 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Communication Tester	Rohde & Schwarz	CMW500	149004	Mar. 13, 2022	1 Year
9.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	2 Year
10.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
11.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
12.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	2 Year
13.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
14.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
15.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 13, 2022	1 Year
16.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar. 13, 2022	1 Year
17.	Temperature & Humidity Chamber	REMAFEE	SYHR225L	N/A	Mar. 13, 2022	1 Year
18.	DC Source	Maynuo	MY8811	N/A	Mar. 13, 2022	1 Year
19.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
20.	Chamber	SAEMC	9*7*7m	N/A	Apr. 21, 2021	2 Year
21.	Test Software	EZ	EZ_EMC	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---