

RF Test Report

Applicant : FN-LINK TECHNOLOGY LIMITED

Product Name : WiFi/bt module

Trade Name : FN-LINK

Model Number : 6233E-UUB

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Nov. 07, 2022

Test Period : Mar. 21 ~ Apr. 18, 2023

Issued Date : May 12, 2023

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm MRA designation number: TW0010 (Bade test site)
Test Firm MRA designation number: TW0034 (Wugu test site)

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issued Date	Revisions	Revised By
00	May 12, 2023	Initial Issue	Rowan Hsieh

Verification of Compliance

Applicant : FN-LINK TECHNOLOGY LIMITED

Product Name : WiFi/bt module

Trade Name : FN-LINK

Model Number : 6233E-UUB

FCC ID : 2AATL-6233E-UUB

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology	10
3.1.	Mode of Operation	10
3.2.	EUT Test Step	11
3.3.	Configuration of Test System Details	11
3.4.	Test Instruments.....	12
3.5.	Test Site Environment	13
4	Measurement Procedure	14
4.1.	AC Power Conducted Emission Measurement	14
4.2.	Transmitter Radiated Emissions Measurement.....	16
4.3.	Maximum Conducted Output Power Measurement	21
4.4.	26 dB RF Bandwidth Measurement	22
4.5.	6 dB RF Bandwidth Measurement	23
4.6.	Maximum Power Spectral Density Measurement.....	24
4.7.	Automatically discontinue transmission.....	26
4.8.	Antenna Requirement	27
5	Test Results	28
5.1.	Conducted Emission	28
5.2.	Radiated Emission Measurement	34
5.3.	Conducted Test Results	404

Appendix A. Test Data

Appendix B. Test Plots

Appendix C. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(b)(9) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26 dB RF Bandwidth	Reference	---
15.407(e)	6 dB RF Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(c)	Automatically discontinue transmission	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☒ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ☐ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	1.9 dB
	30 MHz ~ 1000 MHz	4.9 dB
	1000 MHz ~ 18000 MHz	5.0 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.4 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		1.3×10^{-7}
Duty Cycle		1.1 %
Time Occupancy		1.5 %

2 EUT Description

Applicant	FN-LINK TECHNOLOGY LIMITED No.8,Litong Road,Liuyang Economic & Technical Development Zone,Changsha,Hunan,China			
Product Name	WiFi/bt module			
Trade Name	FN-LINK			
Model Number	6233E-UUB			
FCC ID	2AATL-6233E-UUB			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	IEEE 802.11a	U-NII Band 1	5180 – 5240	4
		U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5700	6
		U-NII Band 3	5745 – 5825	5
	IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	5180 – 5240	4
		U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5700	6
		U-NII Band 3	5745 – 5825	5
	IEEE 802.11n 5 GHz 40 MHz	U-NII Band 1	5190 – 5230	2
		U-NII Band 2-A	5270 – 5310	2
		U-NII Band 2-C	5510 – 5670	4
		U-NII Band 3	5755 – 5795	2
Modulation Type	OFDM			

Antenna information	Brand	Model	Type	Max. Gain (dBi)	
	ABRACON	AFB4714A	FPC Antenna	U-NII Band 1	3.16
				U-NII Band 2-A	3.07
				U-NII Band 2-C	2.30
				U-NII Band 3	2.30
	PSA	RFPCA381425IMLB301	PCB Antenna	U-NII Band 1	3.94
				U-NII Band 2-A	3.94
				U-NII Band 2-C	3.94
				U-NII Band 3	3.94
	Laird	EMN2449A2S-25UFL	PCB Antenna	U-NII Band 1	5.75
				U-NII Band 2-A	6.26
				U-NII Band 2-C	6.34
				U-NII Band 3	5.18
	iRobot	4802062	PCB Antenna	U-NII Band 1	3.71
				U-NII Band 2-A	4.12
				U-NII Band 2-C	3.36
				U-NII Band 3	2.49
Antenna Delivery	Reference section 3.1				
Operate Temp. Range	-20 ~ +70 °C				
EUT Power Rating	DC 3.3 V				

Frequency Band		RF Output Power (W)
802.11a	U-NII Band 1	0.033
	U-NII Band 2-A	0.035
	U-NII Band 2-C	0.035
	U-NII Band 3	0.035
802.11n HT20	U-NII Band 1	0.028
	U-NII Band 2-A	0.027
	U-NII Band 2-C	0.028
	U-NII Band 3	0.027
802.11n HT40	U-NII Band 1	0.027
	U-NII Band 2-A	0.028
	U-NII Band 2-C	0.027
	U-NII Band 3	0.028

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		---
Fixed point-to-point access points		---
Client devices		V

3 Test Methodology

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	Final-Test Mode
Transmit Mode	V
802.11a	V
802.11n HT20	V
802.11n HT40	V

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0
802.11a	V
802.11n HT20	V
802.11n HT40	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
802.11a	1TX	6	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
802.11n HT20	1TX	6.5	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
802.11n HT40	1TX	13.5	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134
			U-NII Band 3	151, 159

3.2. EUT Test Step


The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

Note : This module is placed on the control PCB board for tested.

3.3. Configuration of Test System Details

Conduction Emission / Radiated Emission

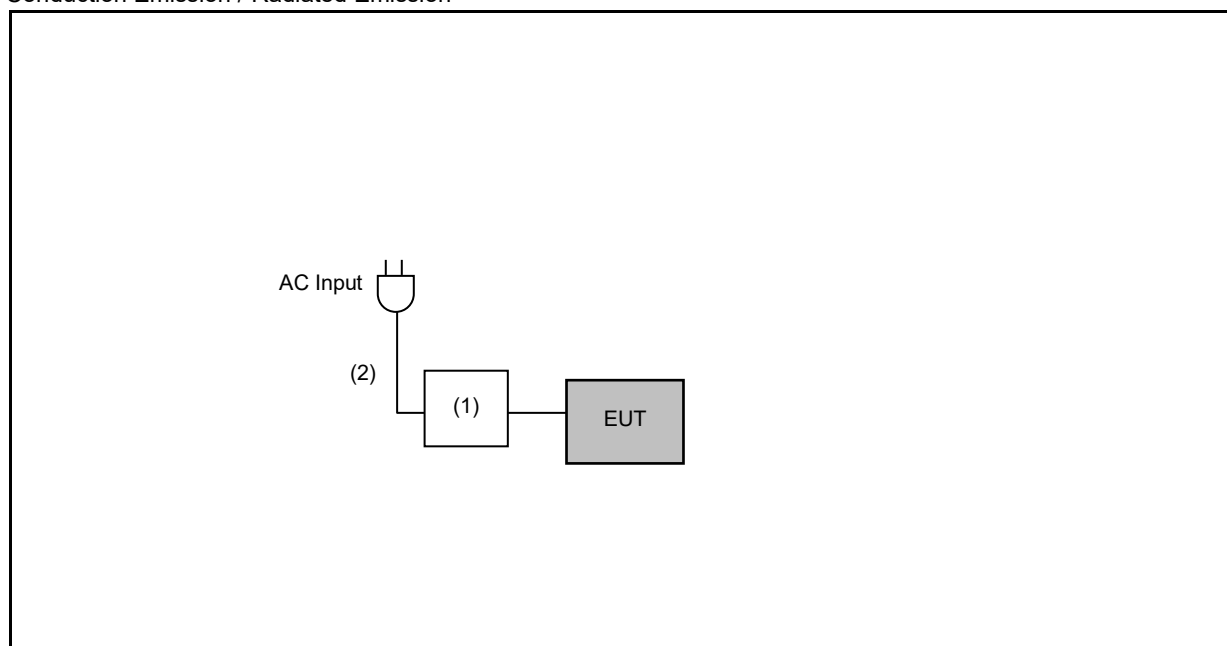

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Remark
(1)	Notebook	lenovo	T430	---	---
(2)	Adapter	lenovo	92P1160	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: Apr. 11 ~ Apr. 14, 2023

Testing Engineer: Jayson Hsieh

Test Site		Conduction01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 19, 2022	1 year
☒	LISN	R&S	ENV216	101040	Mar. 21, 2023	1 year
☒	LISN	R&S	ENV216	101140	Jan. 12, 2023	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	May 27, 2022	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

For Conducted

Test Period: Mar. 21 ~ Mar. 31, 2023

Testing Engineer: Luke Yang, Peter Shui

Test Site		RF01-BD				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Agilent	N1921A	MY45241957	Nov. 30, 2022	1 year
☒	Power Meter	Agilent	N1911A	MY45101619	Nov. 30, 2022	1 year
☒	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 01, 2022	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Mar. 23 ~ Apr. 18, 2023

Testing Engineer: Hung Chou, Kerry Xu, Marc Yeh

Test Site		96603-BD				
Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9020B	MY60112363	Jan. 13, 2023	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 07, 2023	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 21, 2022	1 year
☒	Trilog Broadband Antenna (30 MHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 22, 2022	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 13, 2022	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 25, 2022	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 04, 2022	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 04, 2022	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 04, 2022	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

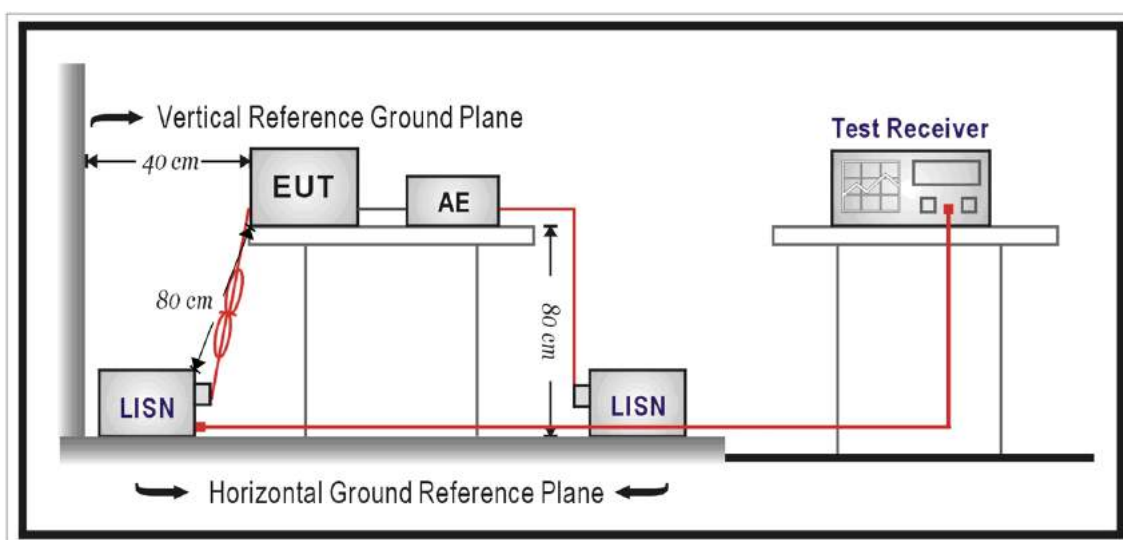

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

4.2. Transmitter Radiated Emissions Measurement

■ Limit

(1) Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

EIRP (dBm)	Field Strength at 3 m (dBuV/m)
-27	68.3

(2) Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Note: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

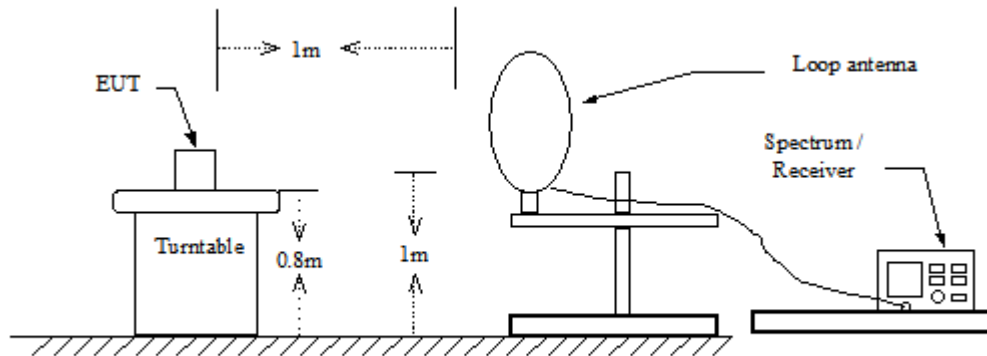

30 MHz ~ 1 GHz

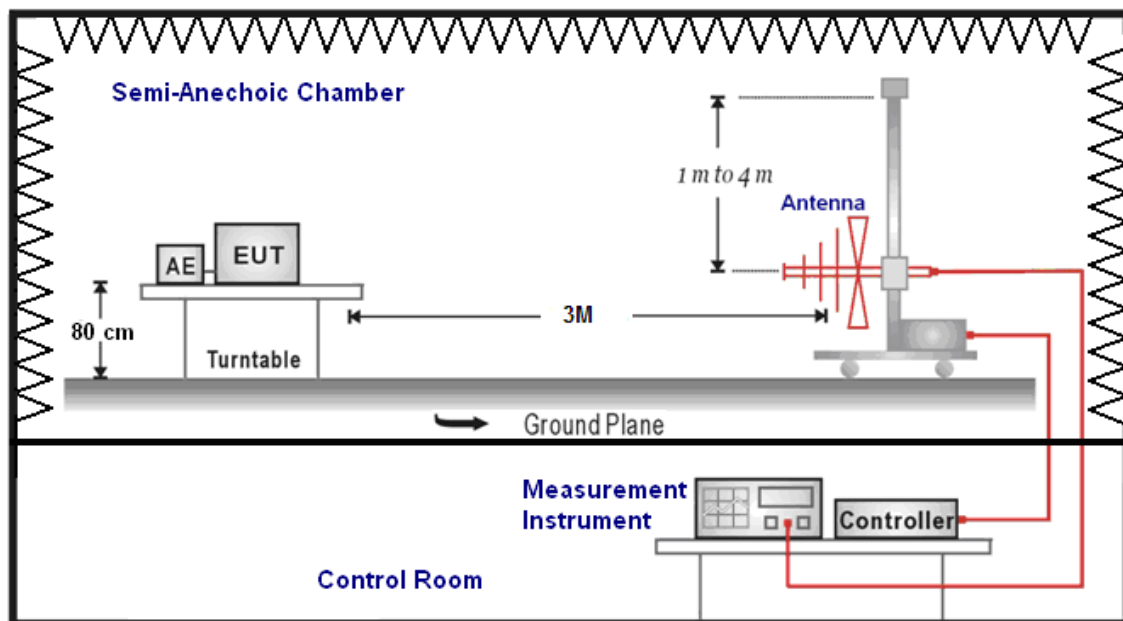

Above 1 GHz

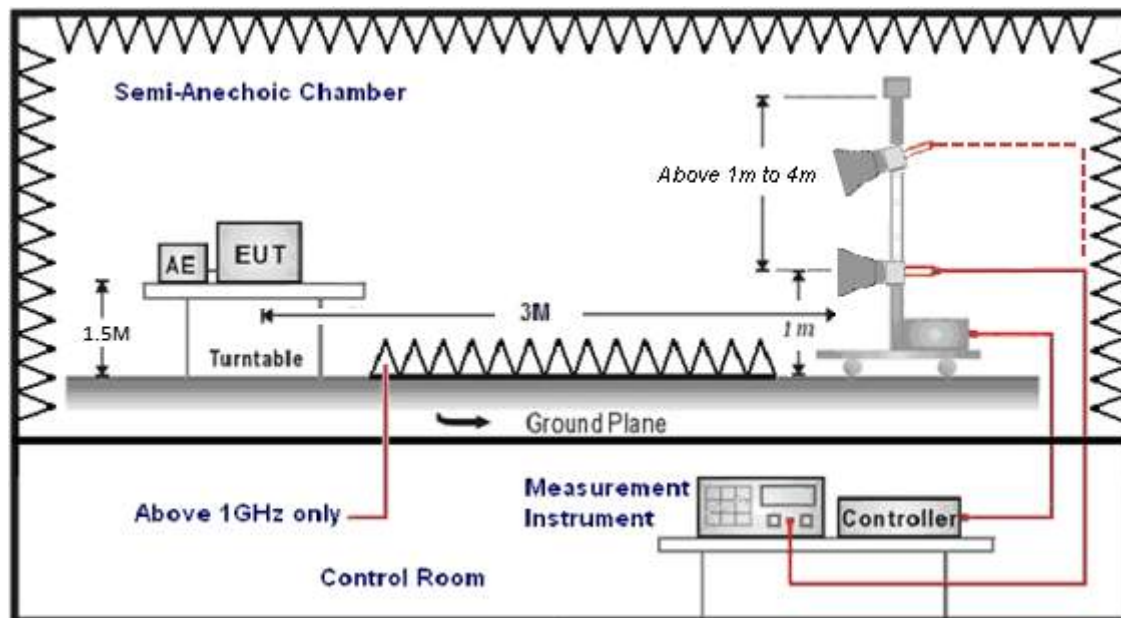

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization. SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak


4.3. Maximum Conducted Output Power Measurement

■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Client
5.150 ~ 5.250 GHz	The lesser of 250 mW (24 dBm)
5.250 ~ 5.350 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.470 ~ 5.725 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)
5.725 ~ 5.850 GHz	The lesser of 1 W (30 dBm)

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ Test Setup

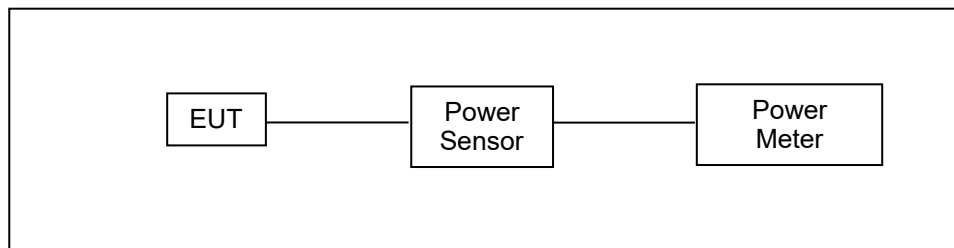

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)


b) Method PM-G (Measurement using a gated RF average power meter)

4.4. 26 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

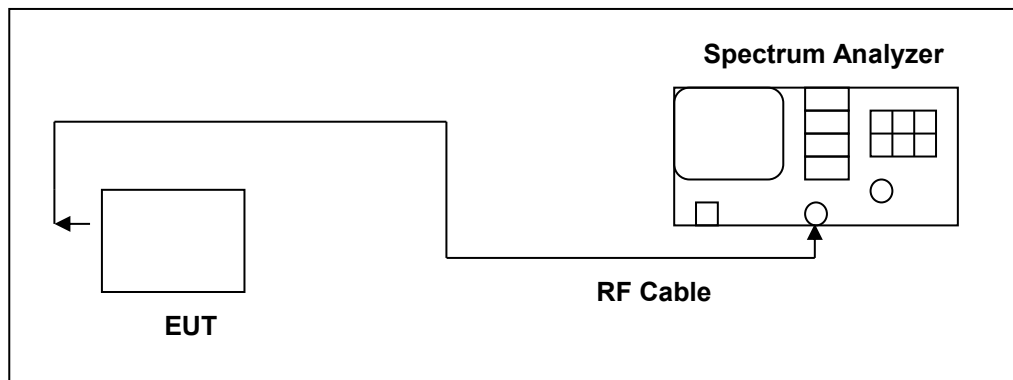

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


4.5. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5825 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

■ Test Setup

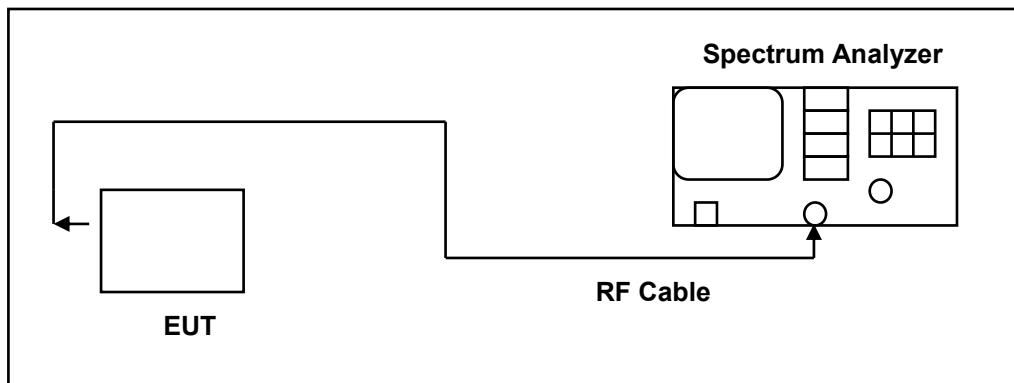

■ Test Procedure

6 dB RF Bandwidth

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.


4.6. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (MHz)	FCC Limit
	Client
5.150 ~ 5.250 GHz	11 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz

According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

■ Test Setup

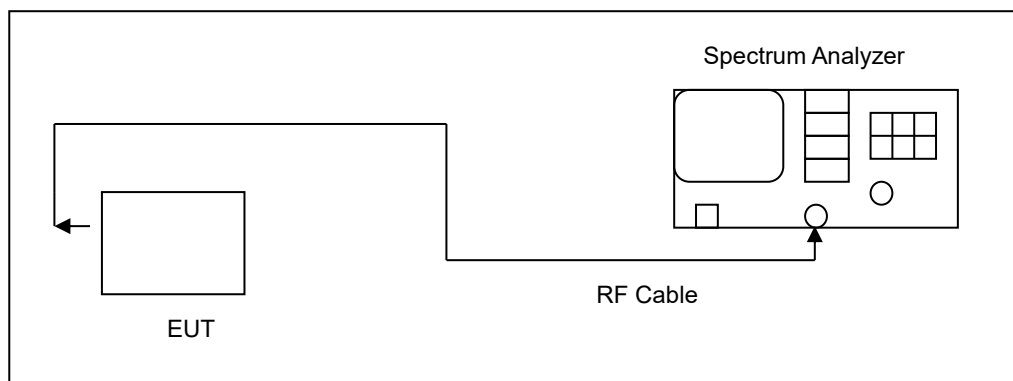

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/100 \text{ kHz})$ to the measured result.	

4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

■ **Declare**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

4.8. Antenna Requirement

■ Requirement

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.

■ Directional Gain Calculated

Test mode	Band	Transmission Type	Antenna				Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
			Ant-0 (dBi)	Ant-1 (dBi)	Ant-2 (dBi)	Ant-3 (dBi)				
802.11a	Band 1	Ant-0	5.75	-	-	-	5.75	5.75	0.00	0.00
	Band 2-A		6.26	-	-	-	6.26	6.26	0.26	0.26
	Band 2-C		6.34	-	-	-	6.34	6.34	0.34	0.34
	Band 3		5.18	-	-	-	5.18	5.18	0.00	0.00
802.11n HT20 802.11n HT40	Band 1	Ant-0	5.75	-	-	-	5.75	5.75	0.00	0.00
	Band 2-A		6.26	-	-	-	6.26	6.26	0.26	0.26
	Band 2-C		6.34	-	-	-	6.34	6.34	0.34	0.34
	Band 3		5.18	-	-	-	5.18	5.18	0.00	0.00


"If transmit signals are correlated, then Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ "

If all transmit signals are completely uncorrelated, then Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$

5 Test Results

5.1. Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: iRobot		

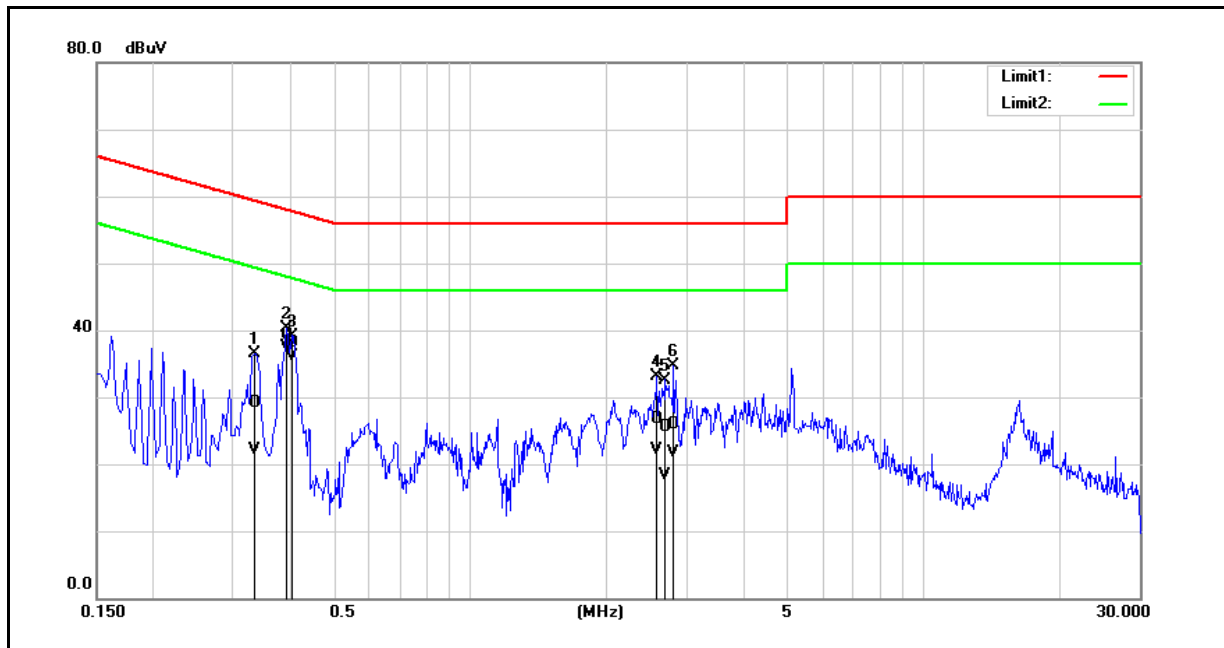


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.3340	19.59	12.49	9.59	29.18	22.08	59.35	49.35	-30.17	-27.27	Pass
2	0.3940	29.79	27.91	9.60	39.39	37.51	57.98	47.98	-18.59	-10.47	Pass
3	0.4060	28.52	26.57	9.60	38.12	36.17	57.73	47.73	-19.61	-11.56	Pass
4	2.5900	17.00	12.45	9.68	26.68	22.13	56.00	46.00	-29.32	-23.87	Pass
5	2.7060	15.82	8.57	9.68	25.50	18.25	56.00	46.00	-30.50	-27.75	Pass
6	2.8100	16.14	12.11	9.69	25.83	21.80	56.00	46.00	-30.17	-24.20	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: iRobot		

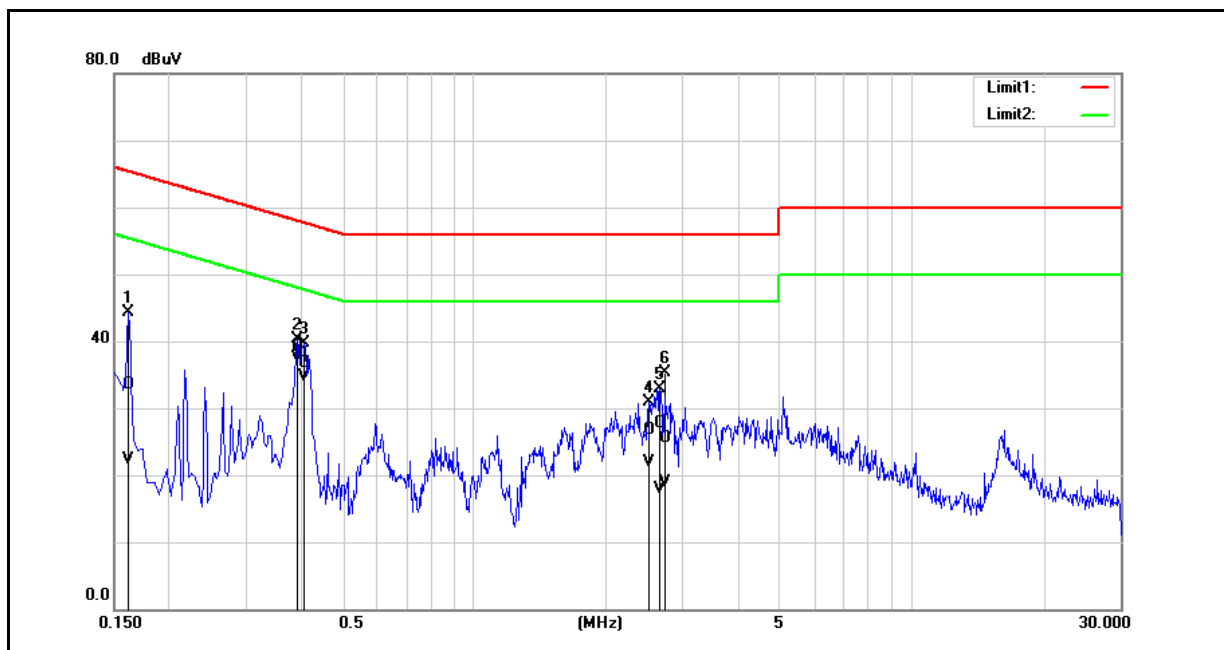


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	23.98	12.66	9.58	33.56	22.24	65.36	55.36	-31.80	-33.12	Pass
2	0.3940	29.47	27.85	9.59	39.06	37.44	57.98	47.98	-18.92	-10.54	Pass
3	0.4100	27.10	25.12	9.59	36.69	34.71	57.65	47.65	-20.96	-12.94	Pass
4	2.5060	17.01	12.16	9.68	26.69	21.84	56.00	46.00	-29.31	-24.16	Pass
5	2.6540	18.06	8.22	9.68	27.74	17.90	56.00	46.00	-28.26	-28.10	Pass
6	2.7220	15.81	9.23	9.68	25.49	18.91	56.00	46.00	-30.51	-27.09	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: Laird		

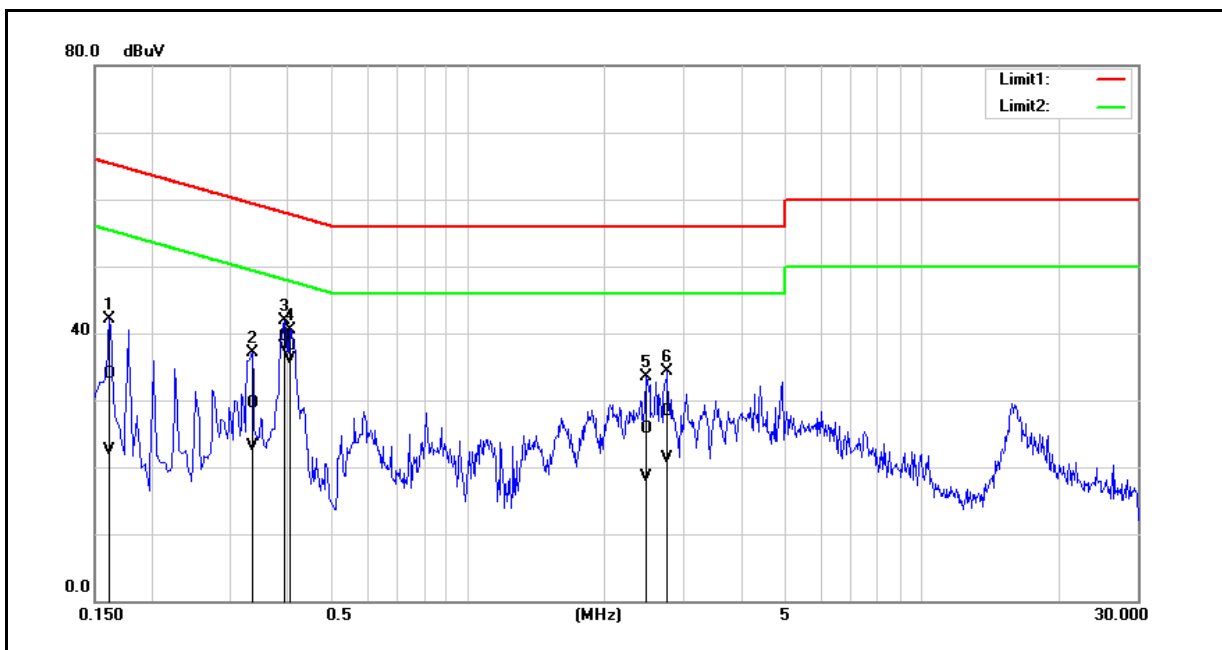


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	24.25	12.97	9.59	33.84	22.56	65.36	55.36	-31.52	-32.80	Pass
2	0.3340	19.83	13.52	9.59	29.42	23.11	59.35	49.35	-29.93	-26.24	Pass
3	0.3940	29.94	28.24	9.60	39.54	37.84	57.98	47.98	-18.44	-10.14	Pass
4	0.4060	28.56	26.55	9.60	38.16	36.15	57.73	47.73	-19.57	-11.58	Pass
5	2.4660	16.06	8.76	9.67	25.73	18.43	56.00	46.00	-30.27	-27.57	Pass
6	2.7580	18.59	11.61	9.69	28.28	21.30	56.00	46.00	-27.72	-24.70	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: Laird		

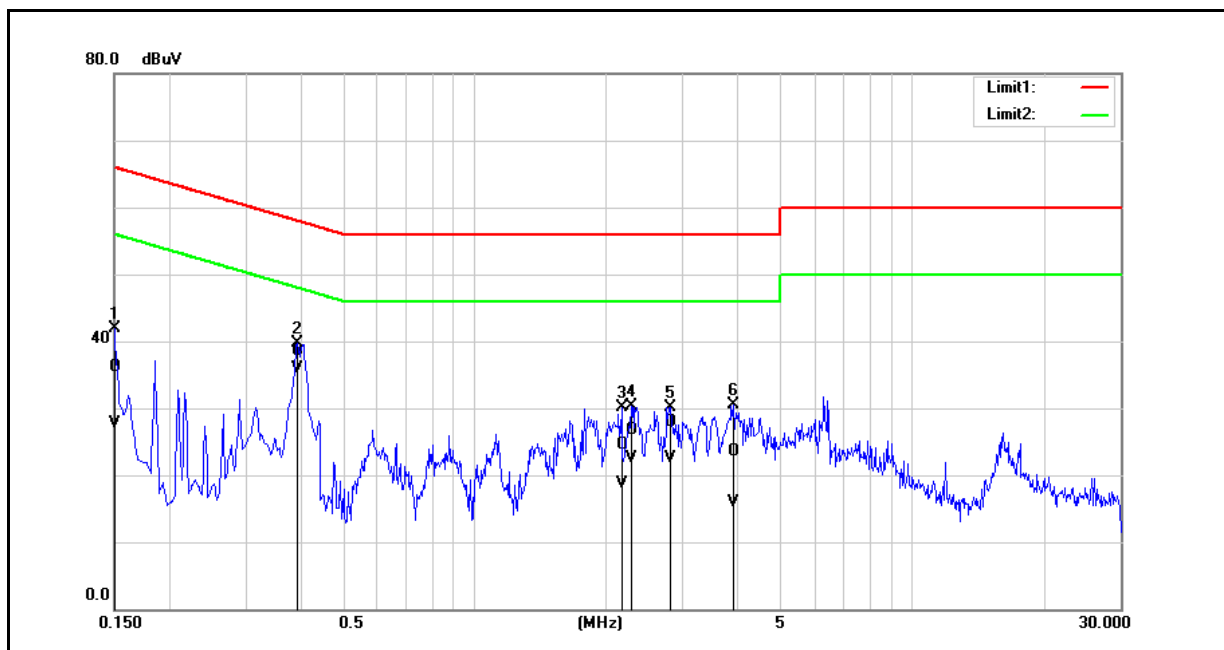


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	26.60	18.07	9.58	36.18	27.65	66.00	56.00	-29.82	-28.35	Pass
2	0.3940	28.86	26.28	9.59	38.45	35.87	57.98	47.98	-19.53	-12.11	Pass
3	2.1700	14.79	9.10	9.66	24.45	18.76	56.00	46.00	-31.55	-27.24	Pass
4	2.2860	17.13	12.74	9.67	26.80	22.41	56.00	46.00	-29.20	-23.59	Pass
5	2.8140	18.31	12.79	9.69	28.00	22.48	56.00	46.00	-28.00	-23.52	Pass
6	3.9140	13.83	6.16	9.72	23.55	15.88	56.00	46.00	-32.45	-30.12	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: ABRACON		

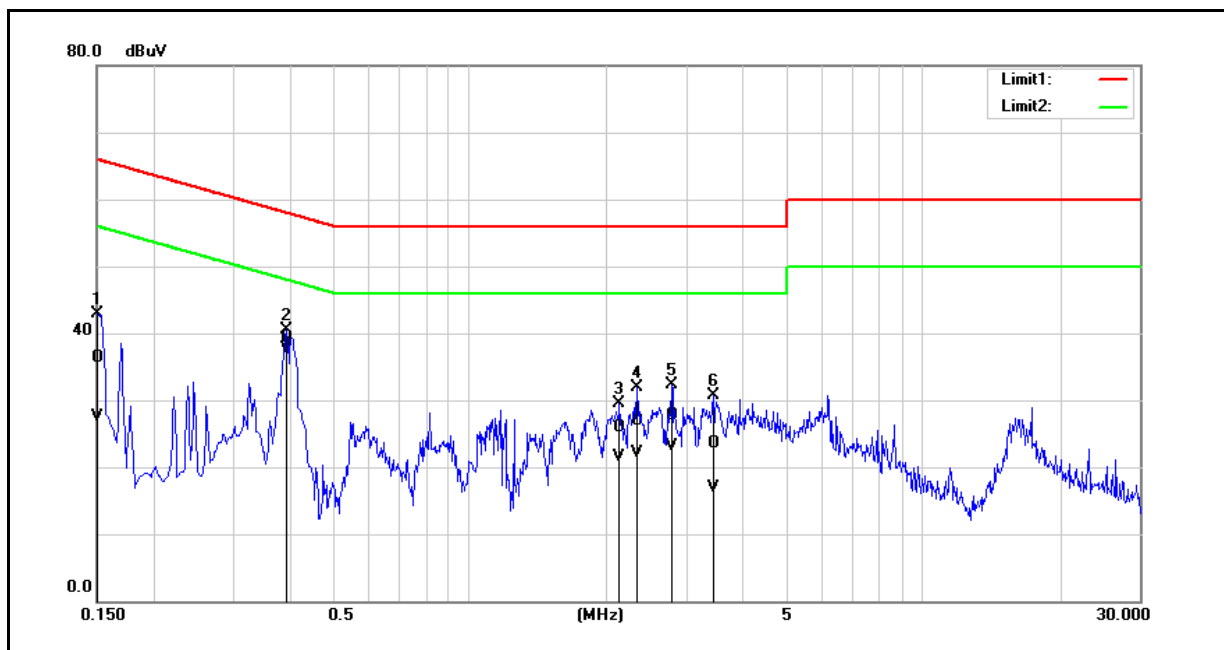


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	26.63	18.00	9.59	36.22	27.59	66.00	56.00	-29.78	-28.41	Pass
2	0.3940	29.77	28.06	9.60	39.37	37.66	57.98	47.98	-18.61	-10.32	Pass
3	2.1380	16.19	11.84	9.66	25.85	21.50	56.00	46.00	-30.15	-24.50	Pass
4	2.3380	17.26	12.34	9.67	26.93	22.01	56.00	46.00	-29.07	-23.99	Pass
5	2.7940	18.00	13.44	9.69	27.69	23.13	56.00	46.00	-28.31	-22.87	Pass
6	3.4500	13.76	7.29	9.70	23.46	16.99	56.00	46.00	-32.54	-29.01	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Transmit mode		
Description:	Antenna brand: ABRACON		

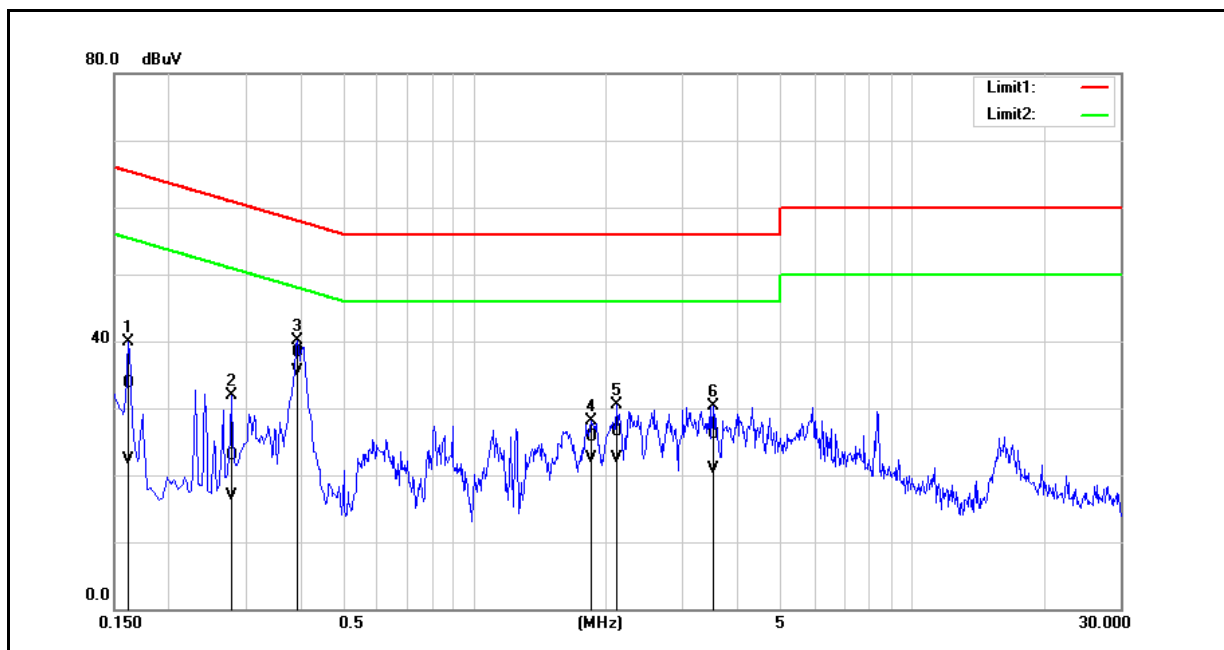

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	24.20	12.76	9.58	33.78	22.34	65.36	55.36	-31.58	-33.02	Pass
2	0.2780	13.35	7.26	9.58	22.93	16.84	60.88	50.88	-37.95	-34.04	Pass
3	0.3940	28.71	25.93	9.59	38.30	35.52	57.98	47.98	-19.68	-12.46	Pass
4	1.8540	16.01	12.88	9.66	25.67	22.54	56.00	46.00	-30.33	-23.46	Pass
5	2.1140	16.89	12.85	9.66	26.55	22.51	56.00	46.00	-29.45	-23.49	Pass
6	3.5220	16.38	11.25	9.71	26.09	20.96	56.00	46.00	-29.91	-25.04	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).


2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5.2. Radiated Emission Measurement

Antenna brand: iRobot


Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

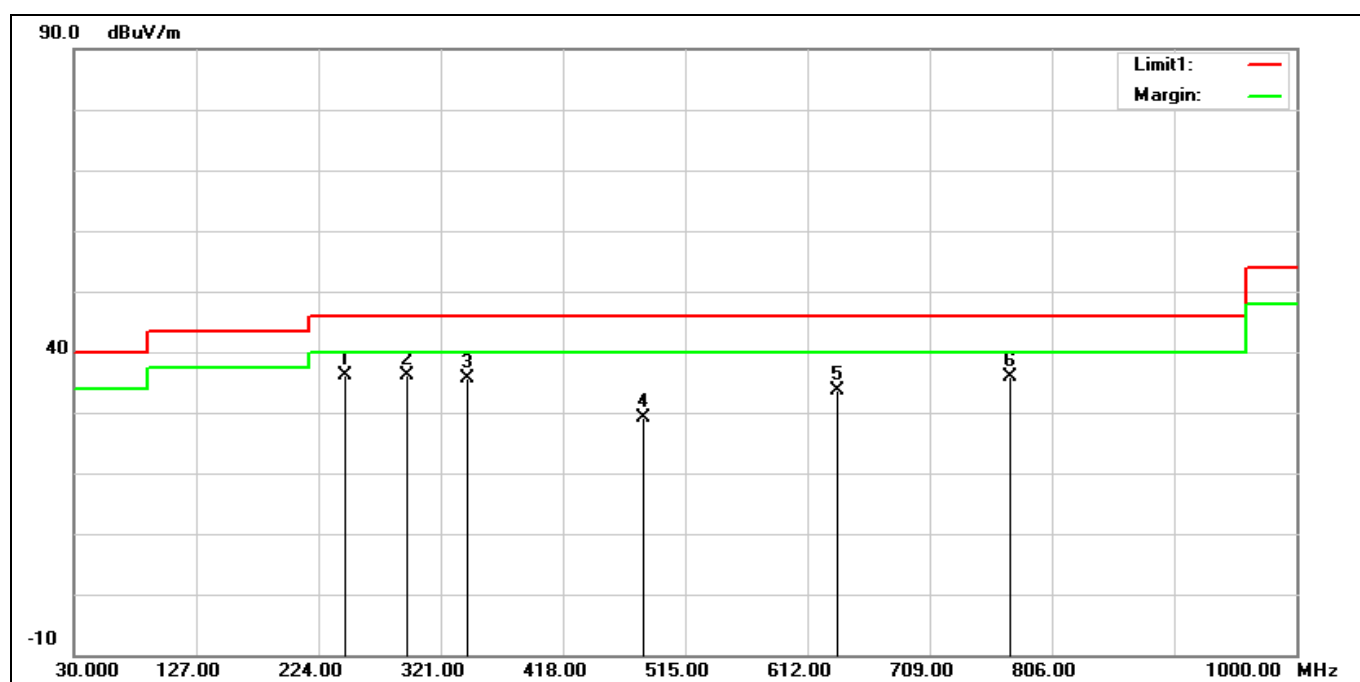

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	245.3400	43.68	-7.49	36.19	46.00	-9.81	QP
2	294.8100	42.01	-5.83	36.18	46.00	-9.82	QP
3	342.3400	40.48	-4.90	35.58	46.00	-10.42	QP
4	482.0200	31.35	-2.17	29.18	46.00	-16.82	QP
5	635.2800	33.23	0.36	33.59	46.00	-12.41	QP
6	773.0200	32.58	3.24	35.82	46.00	-10.18	QP

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

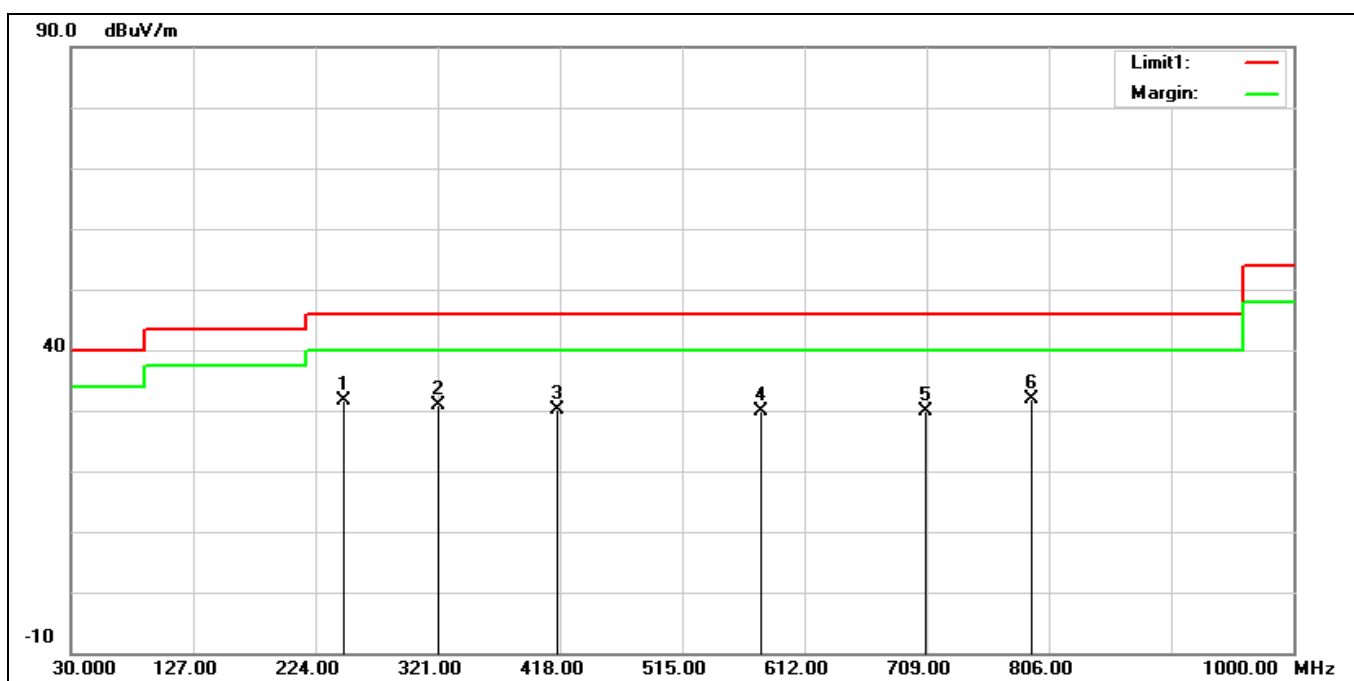


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	246.3100	39.04	-7.45	31.59	46.00	-14.41	QP
2	321.9700	36.30	-5.34	30.96	46.00	-15.04	QP
3	416.0600	33.51	-3.31	30.20	46.00	-15.80	QP
4	578.0500	30.12	-0.33	29.79	46.00	-16.21	QP
5	708.0300	27.96	1.80	29.76	46.00	-16.24	QP
6*	792.4200	28.20	3.60	31.80	46.00	-14.20	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

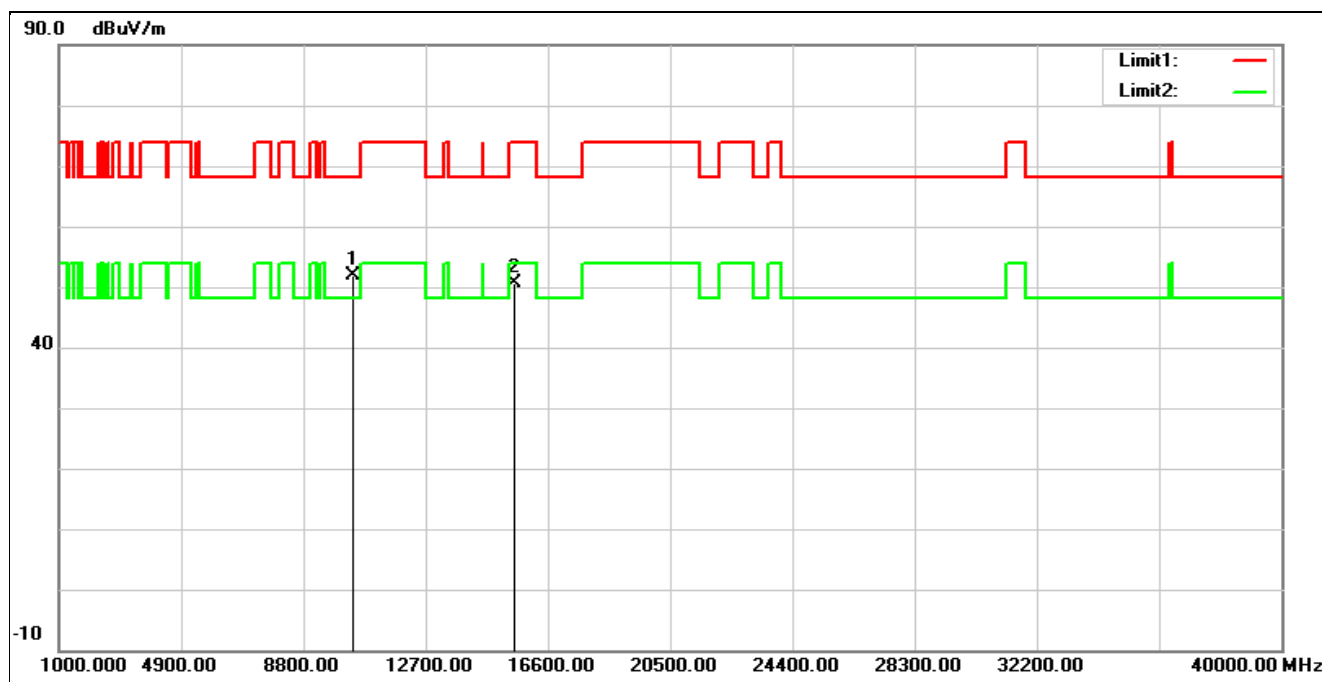


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	37.78	13.99	51.77	68.20	-16.43	peak
2	15540.000	33.37	17.31	50.68	74.00	-23.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

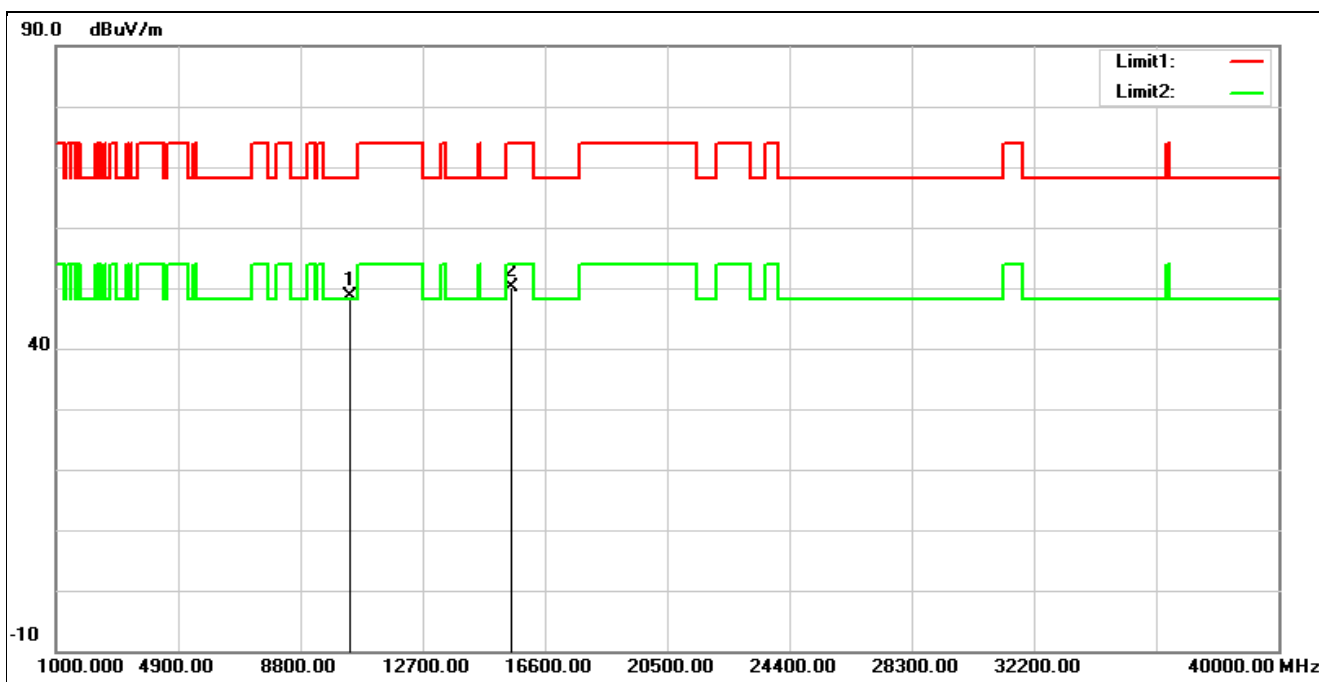


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	34.74	13.99	48.73	68.20	-19.47	peak
2	15540.000	32.74	17.31	50.05	74.00	-23.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

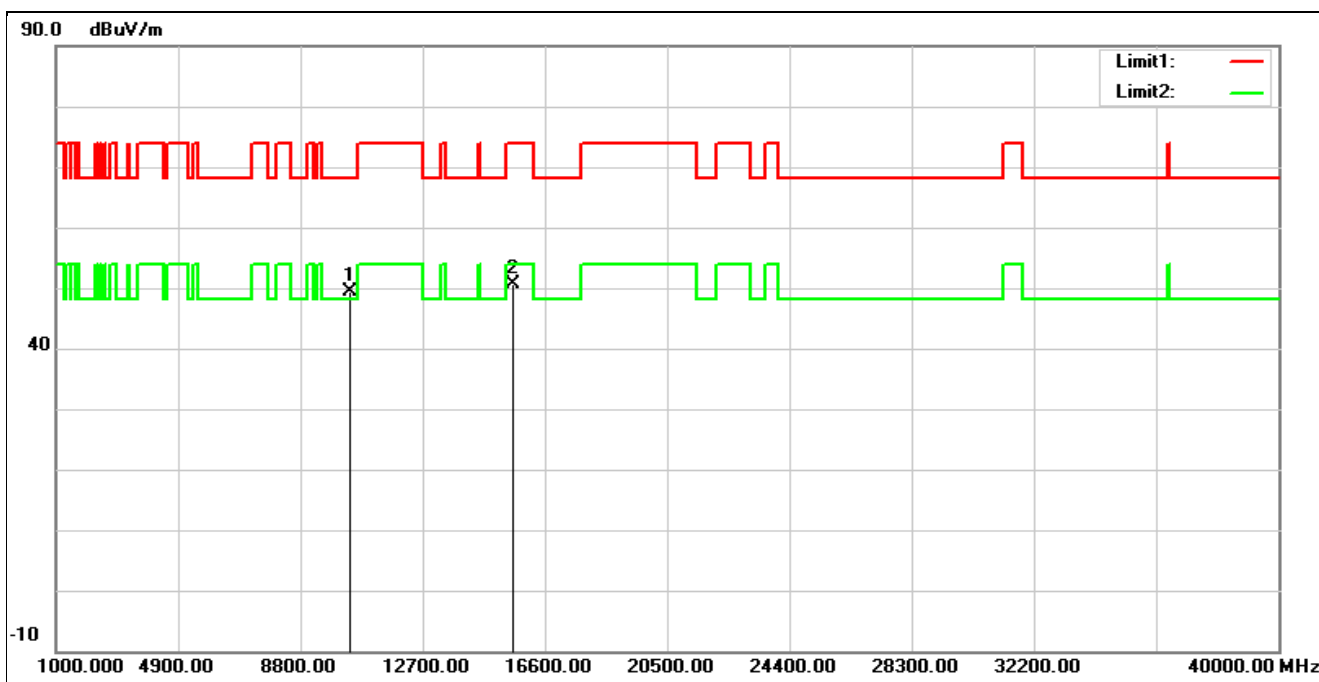


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.35	14.10	49.45	68.20	-18.75	peak
2	15600.000	33.66	17.01	50.67	74.00	-23.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

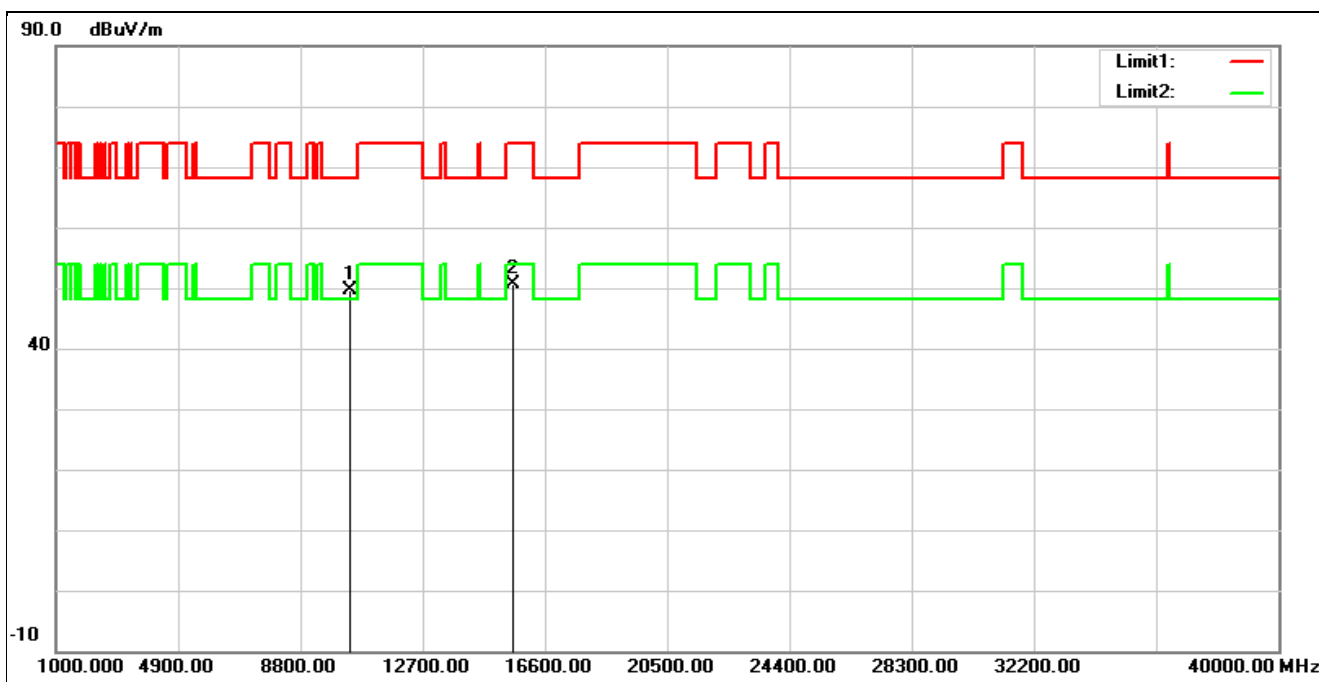


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.49	14.10	49.59	68.20	-18.61	peak
2	15600.000	33.71	17.01	50.72	74.00	-23.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

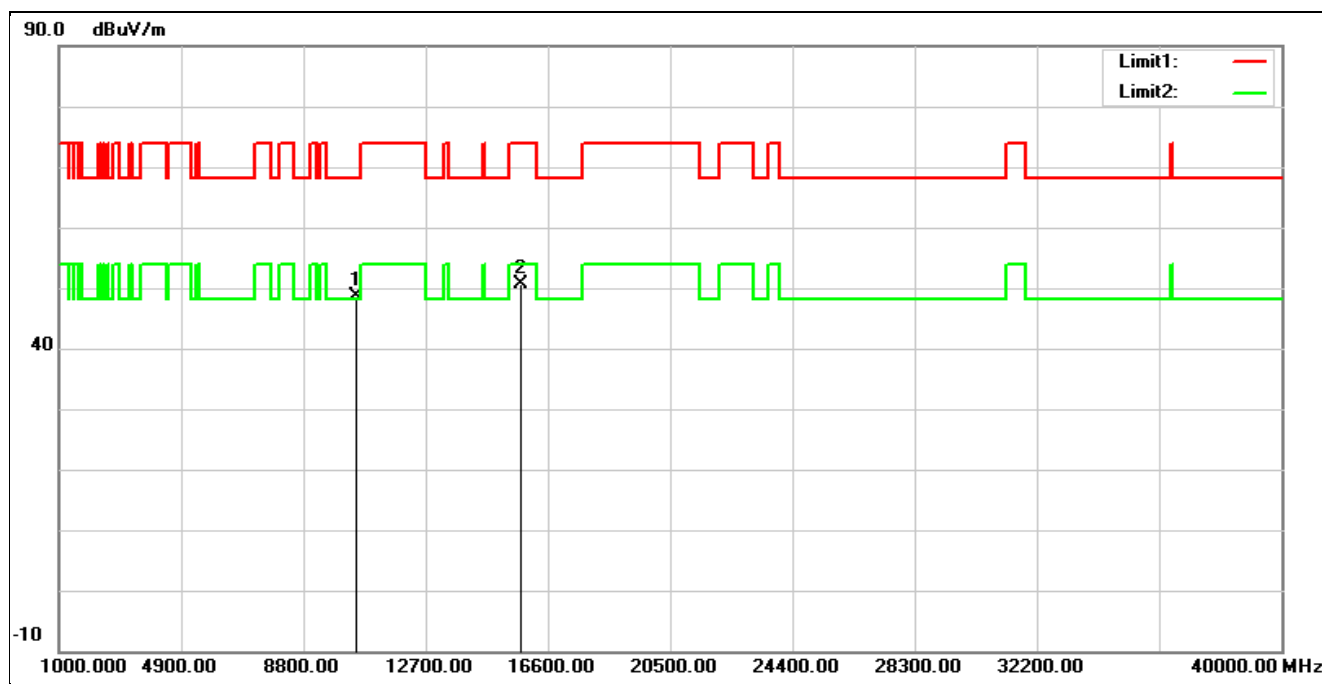


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.11	14.54	48.65	68.20	-19.55	peak
2	15720.000	33.33	17.34	50.67	74.00	-23.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

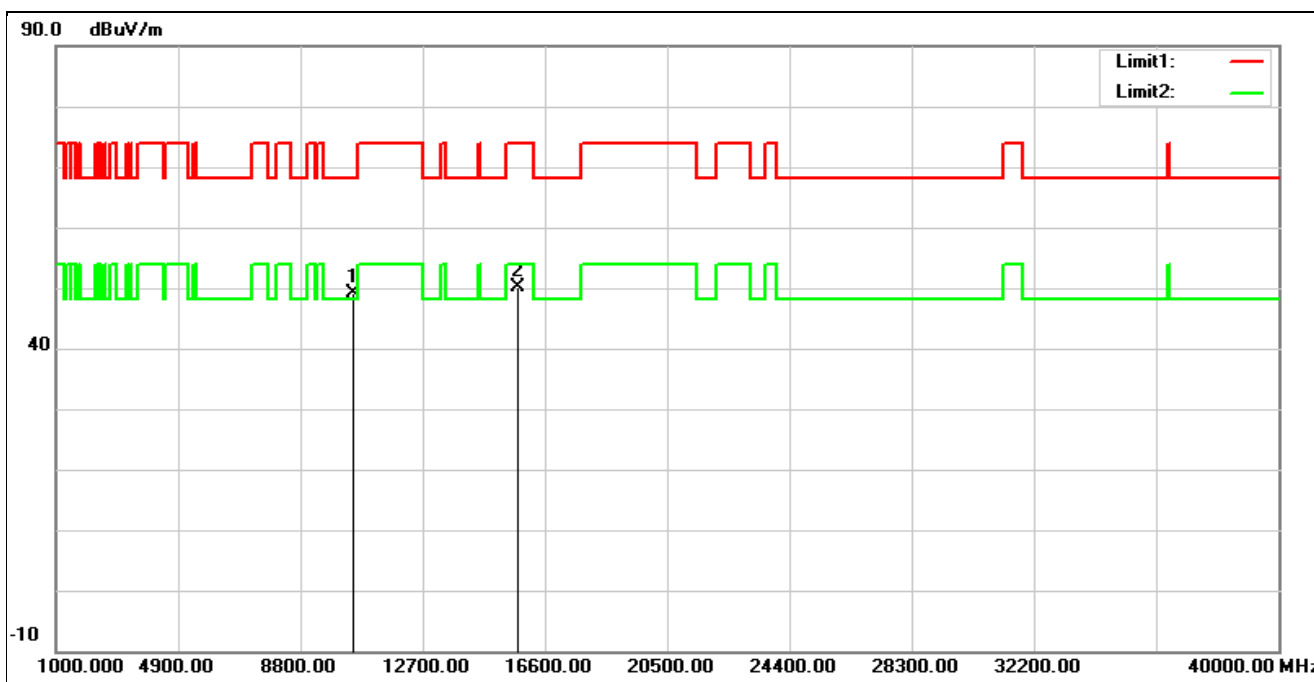


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	34.59	14.54	49.13	68.20	-19.07	peak
2	15720.000	32.68	17.34	50.02	74.00	-23.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

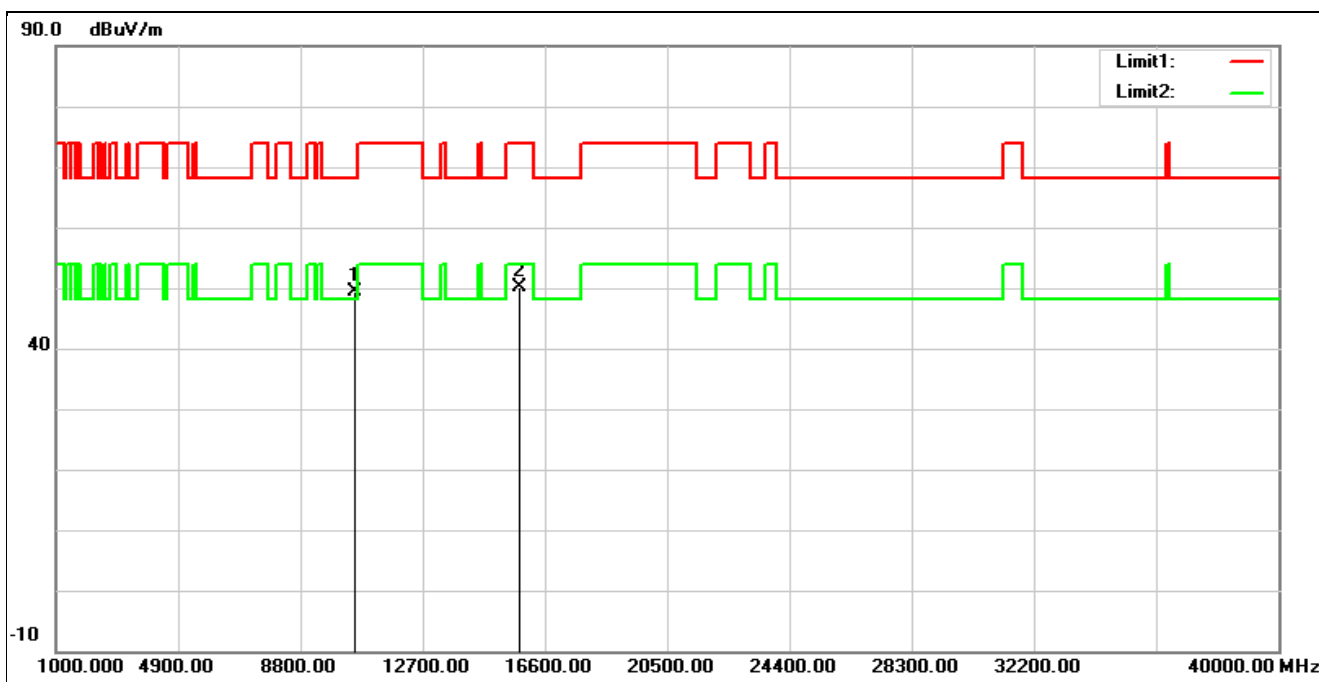


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.69	14.60	49.29	68.20	-18.91	peak
2	15780.000	32.91	17.10	50.01	74.00	-23.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

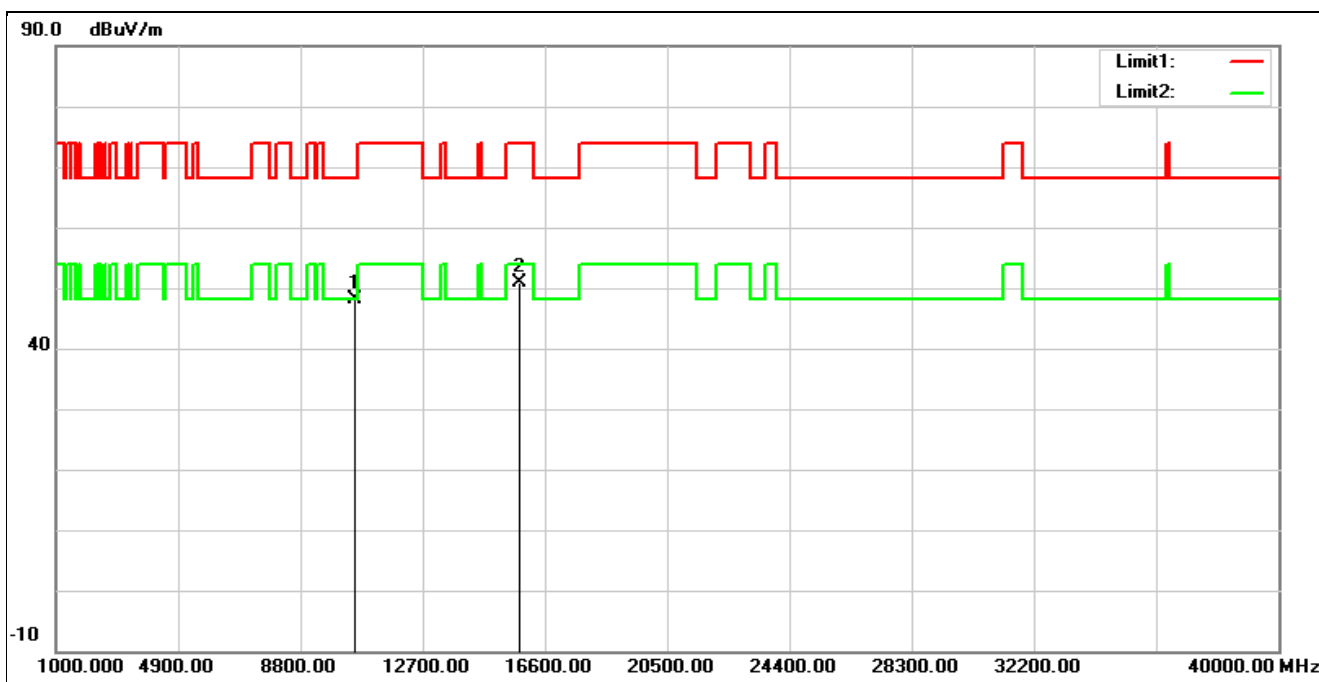


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	33.42	14.60	48.02	68.20	-20.18	peak
2	15780.000	33.66	17.10	50.76	74.00	-23.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

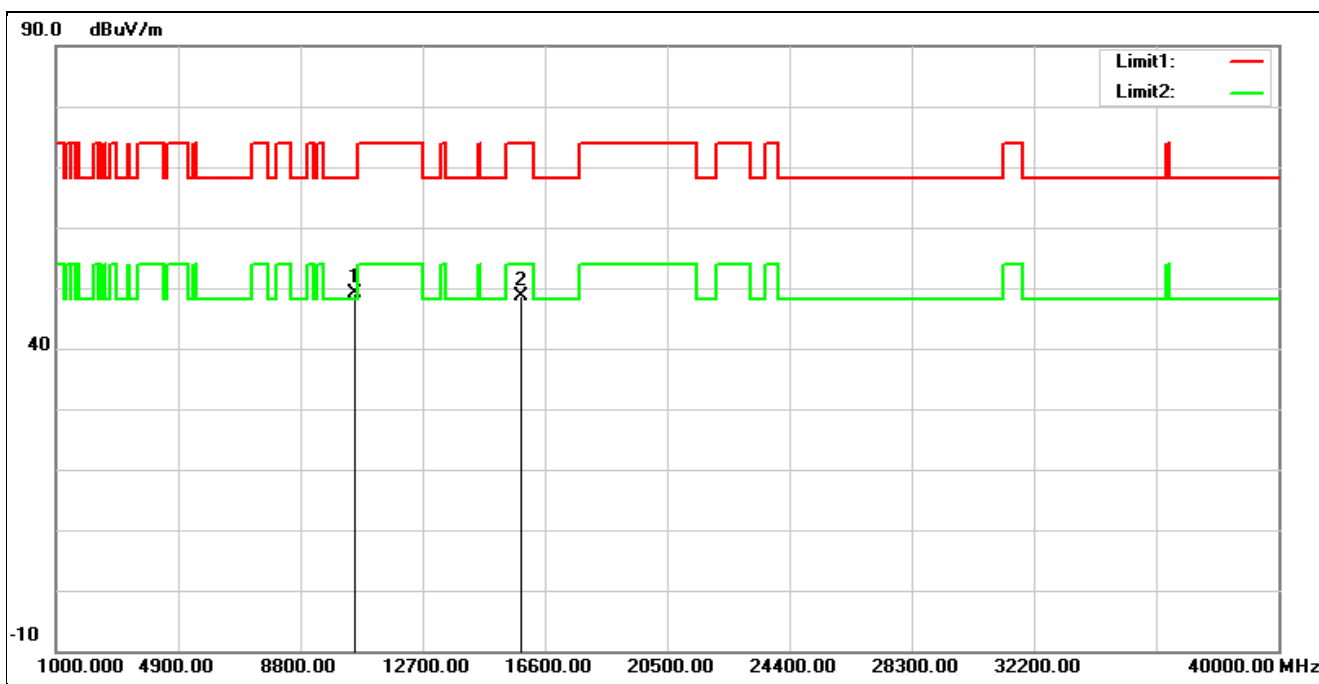


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.72	14.48	49.20	68.20	-19.00	peak
2	15840.000	31.83	16.90	48.73	74.00	-25.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

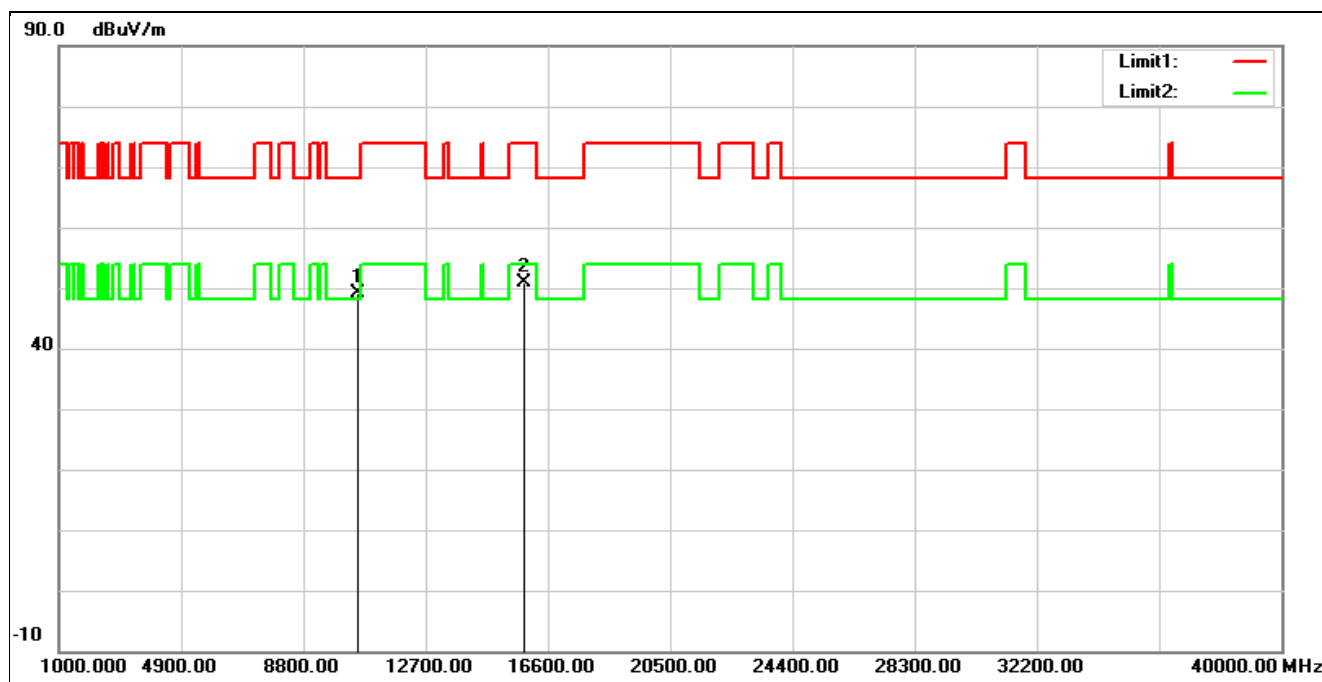


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.59	14.48	49.07	68.20	-19.13	peak
2	15840.000	33.88	16.90	50.78	74.00	-23.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

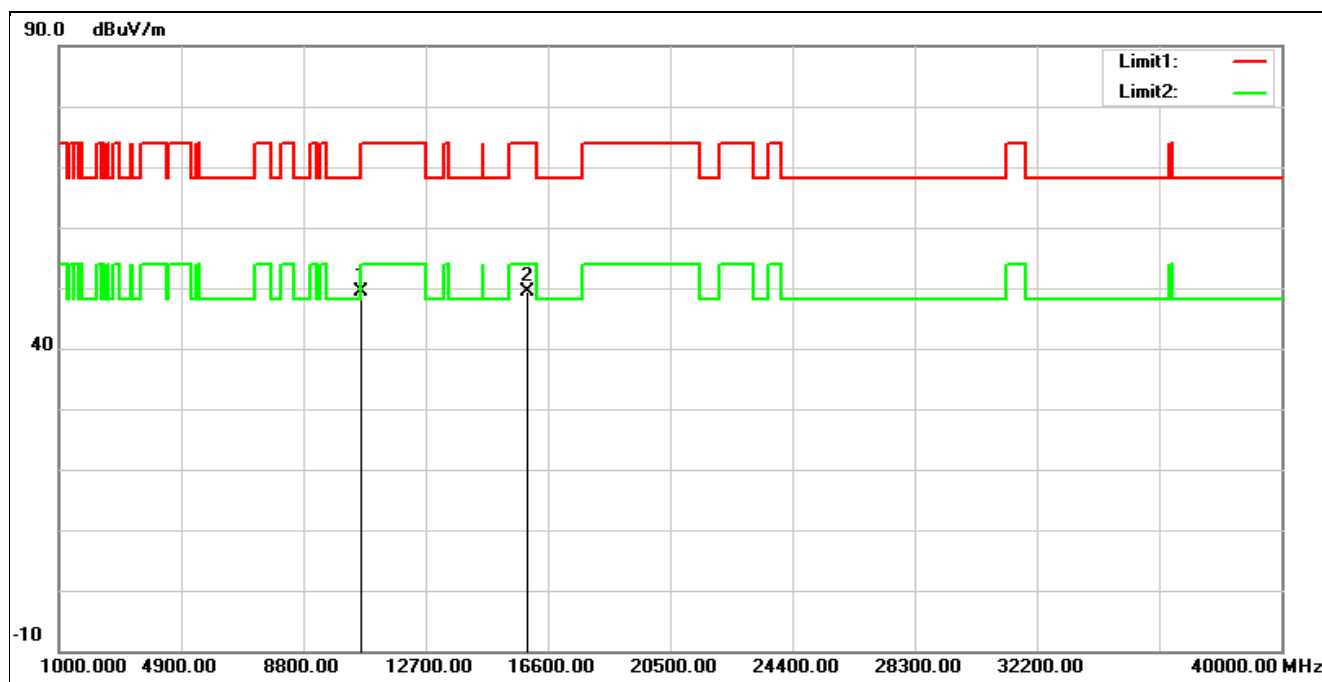


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.87	14.41	49.28	74.00	-24.72	peak
2*	15960.000	32.80	16.55	49.35	74.00	-24.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

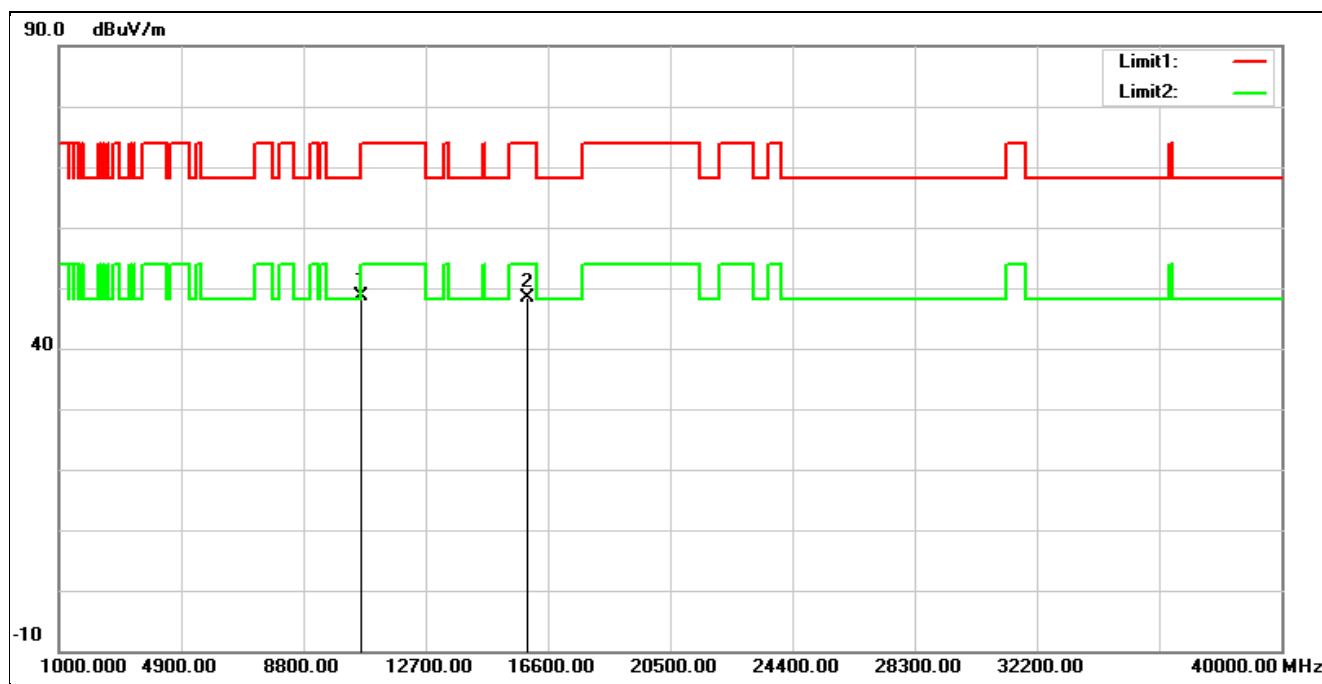


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10640.000	34.18	14.41	48.59	74.00	-25.41	peak
2	15960.000	31.83	16.55	48.38	74.00	-25.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

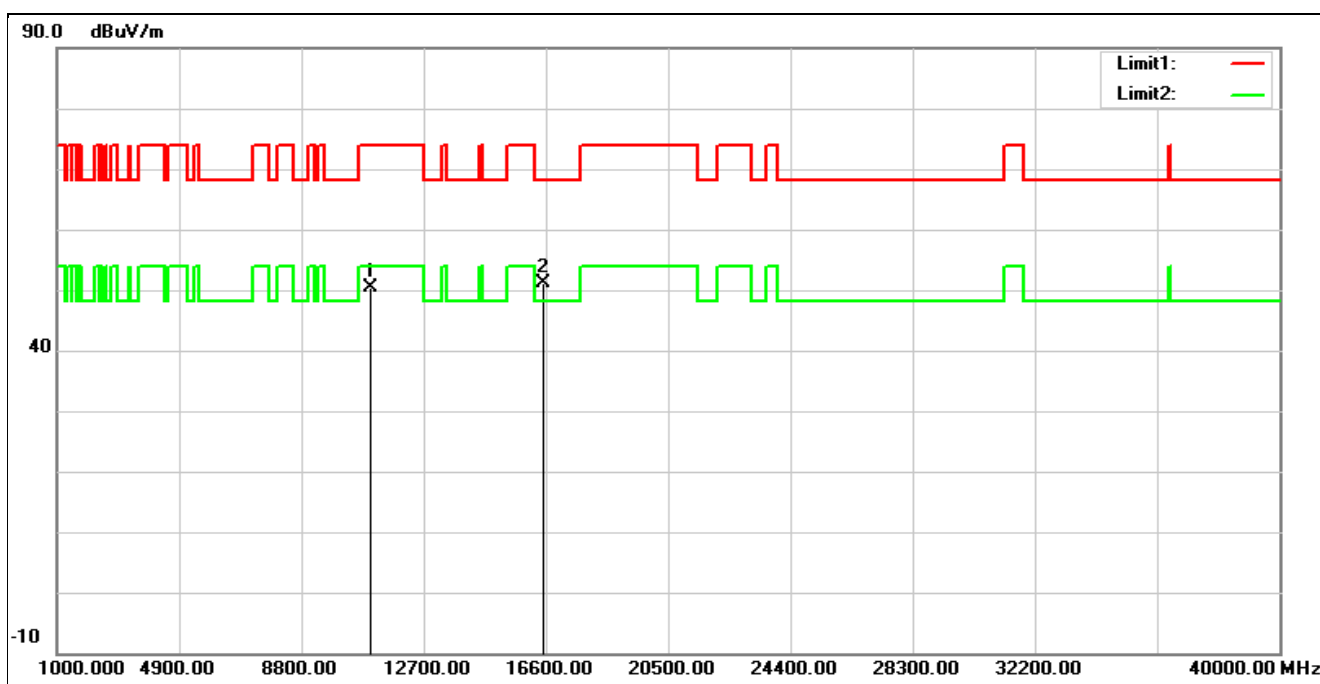


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.56	14.73	50.29	74.00	-23.71	peak
2*	16500.000	33.25	17.77	51.02	68.20	-17.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

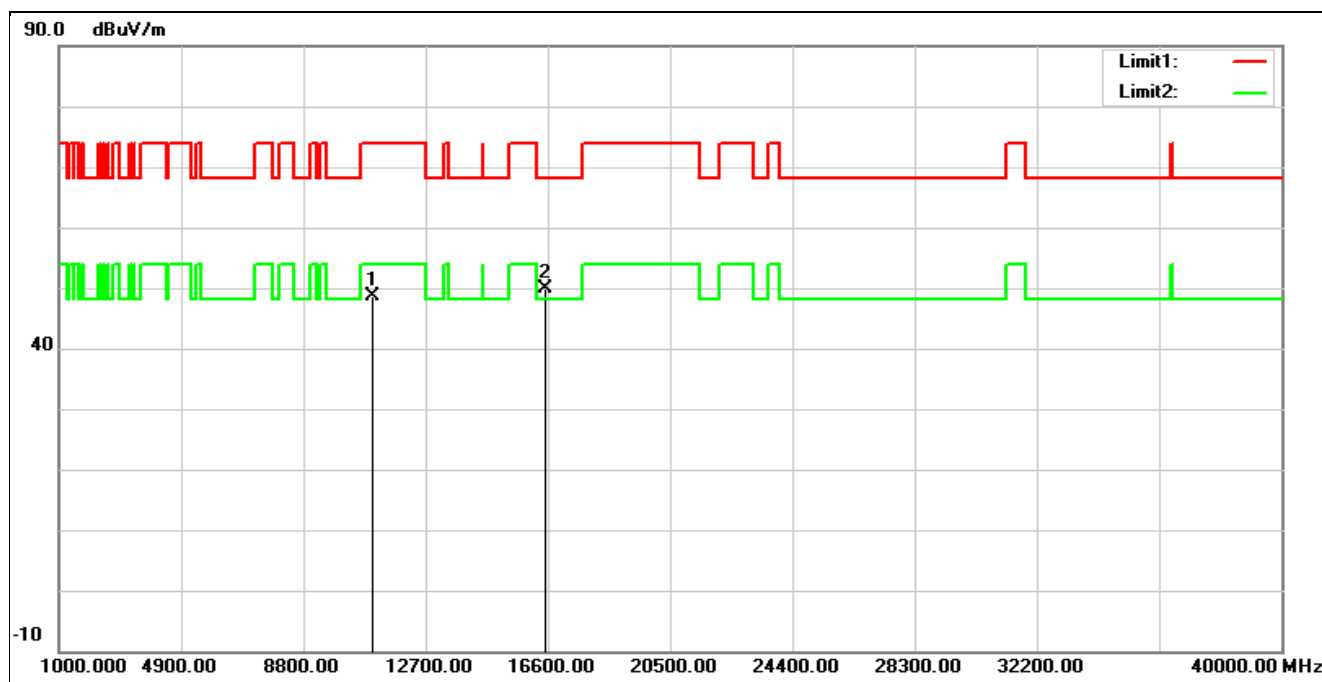


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.80	14.73	48.53	74.00	-25.47	peak
2*	16500.000	32.13	17.77	49.90	68.20	-18.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

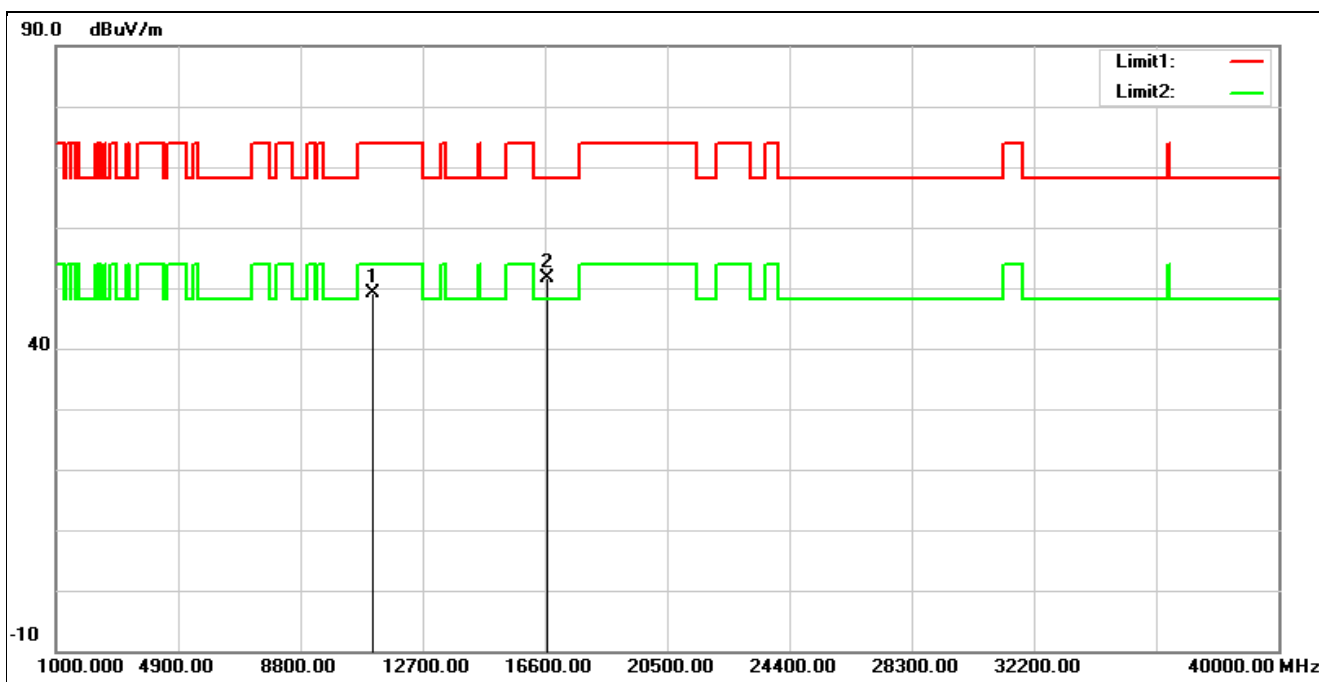


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.33	14.79	49.12	74.00	-24.88	peak
2*	16680.000	33.04	18.61	51.65	68.20	-16.55	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5560 MHz		
Remark:			

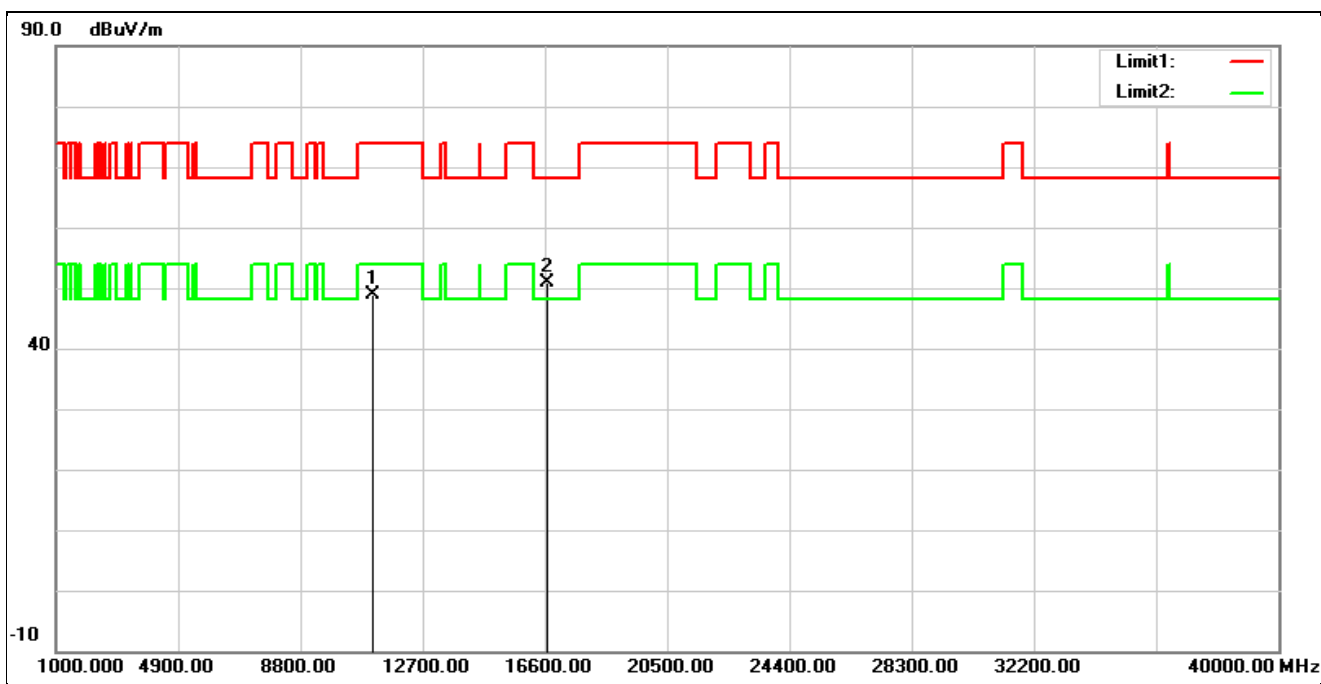


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.20	14.79	48.99	74.00	-25.01	peak
2*	16680.000	32.29	18.61	50.90	68.20	-17.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

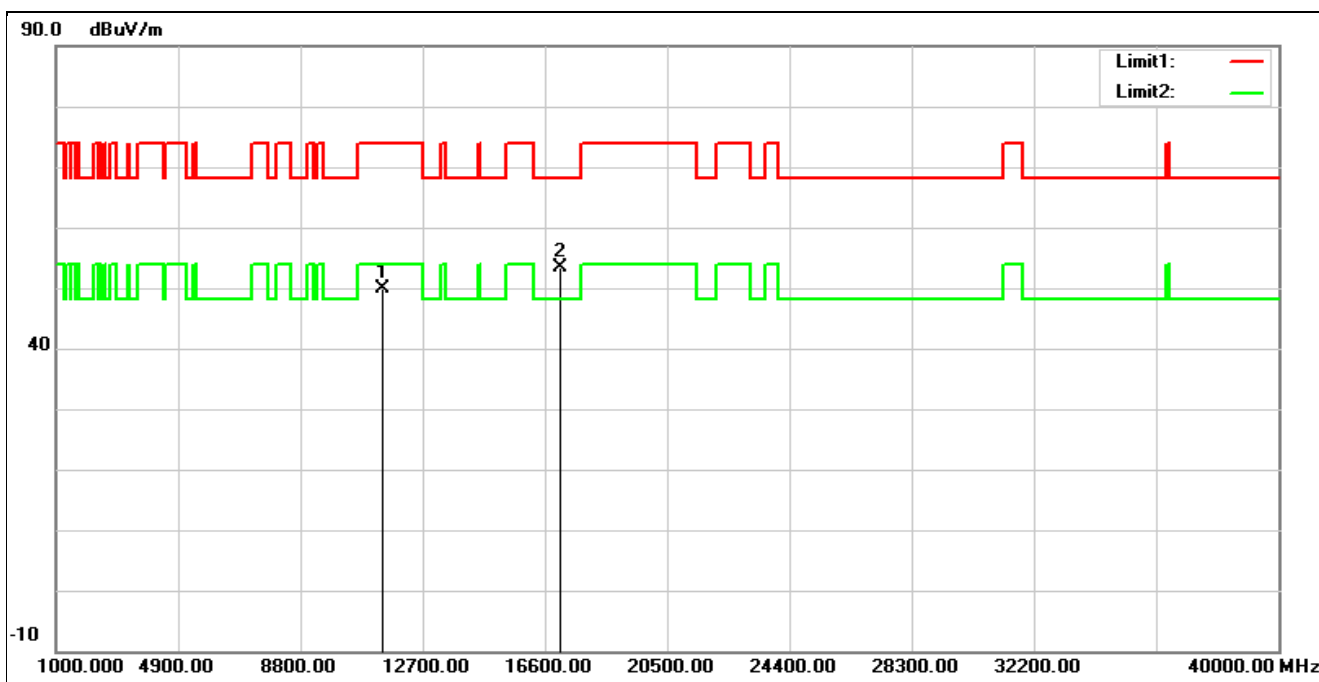


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.83	15.07	49.90	74.00	-24.10	peak
2*	17100.000	32.79	20.64	53.43	68.20	-14.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

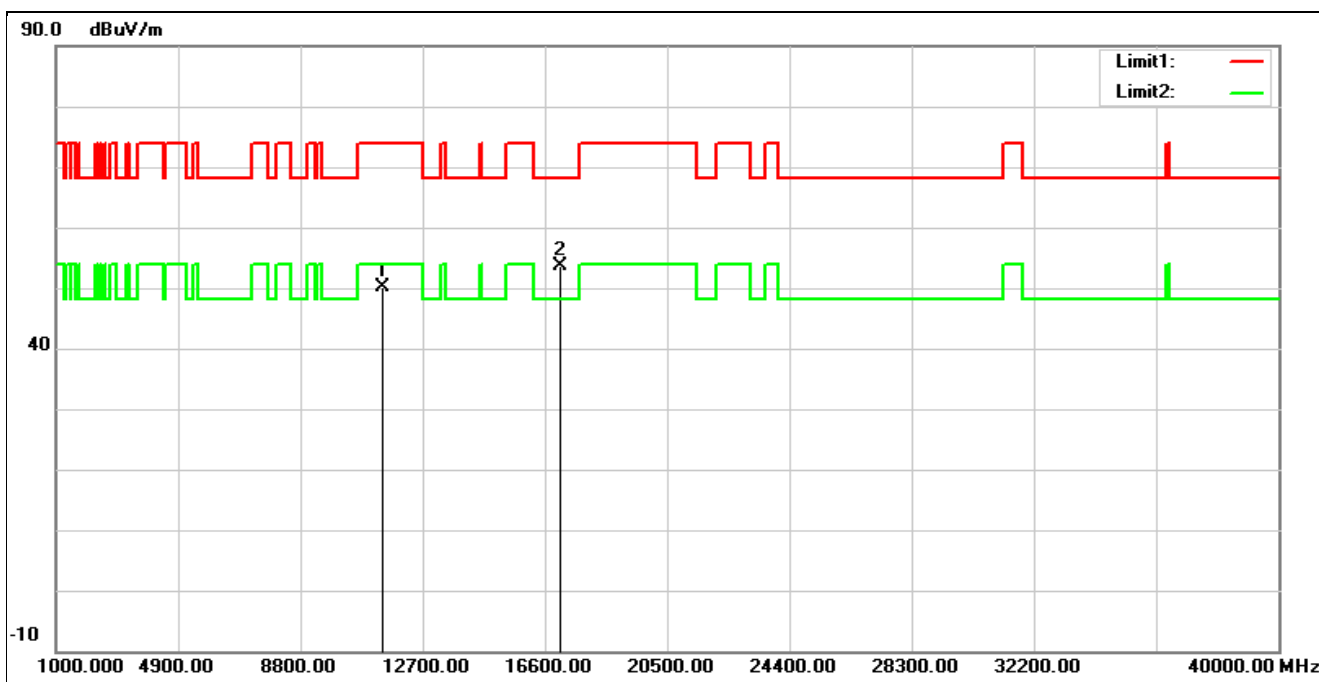


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.96	15.07	50.03	74.00	-23.97	peak
2*	17100.000	33.00	20.64	53.64	68.20	-14.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

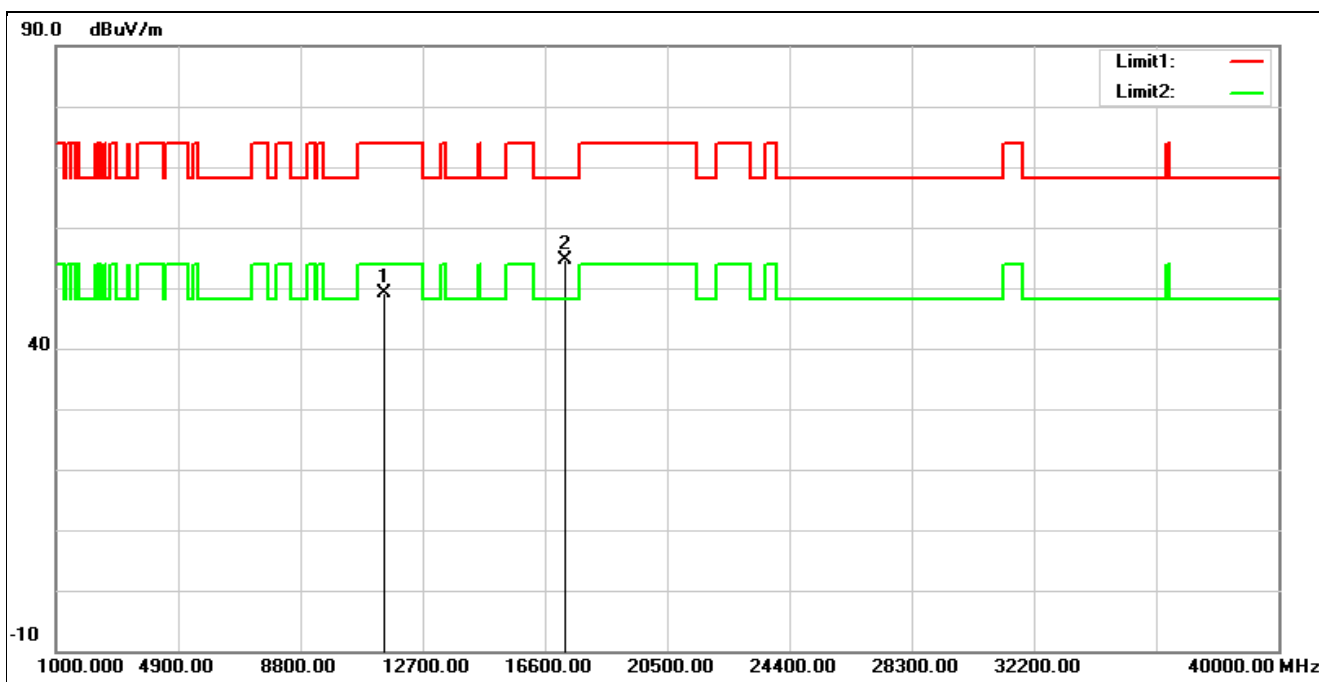


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.83	15.42	49.25	74.00	-24.75	peak
2*	17235.000	32.72	22.01	54.73	68.20	-13.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

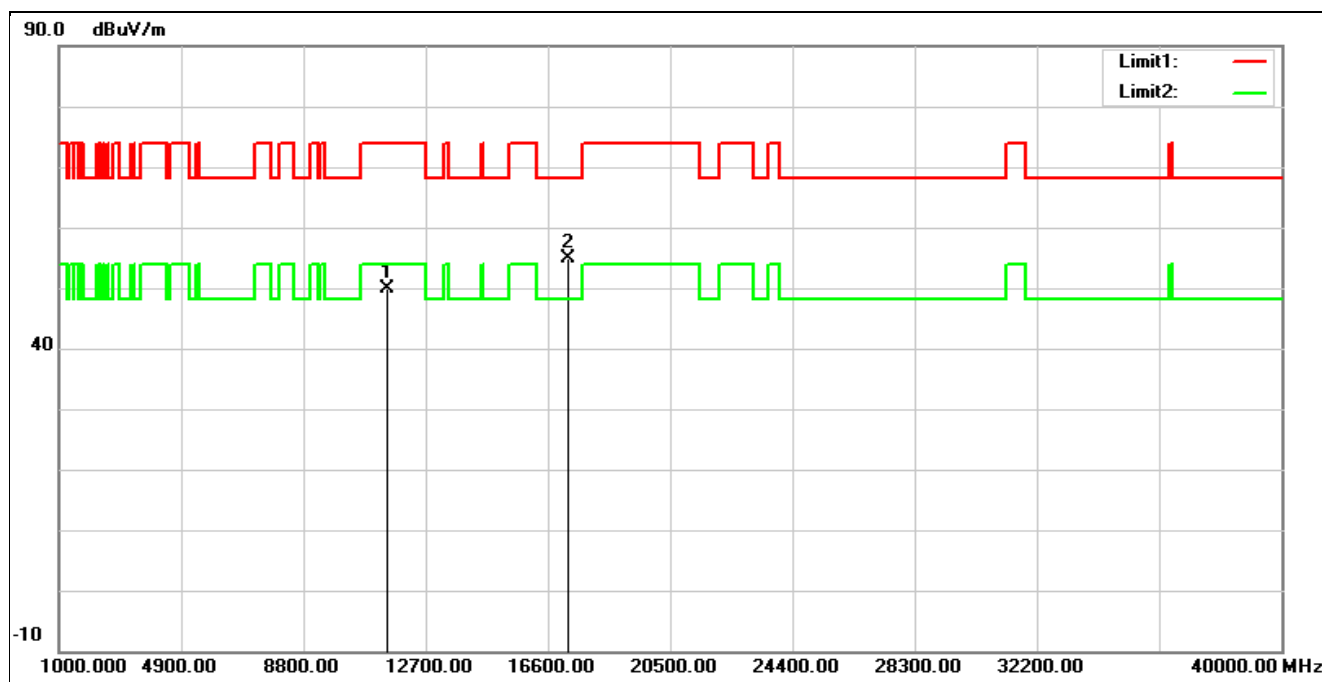


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.54	15.42	49.96	74.00	-24.04	peak
2*	17235.000	32.84	22.01	54.85	68.20	-13.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

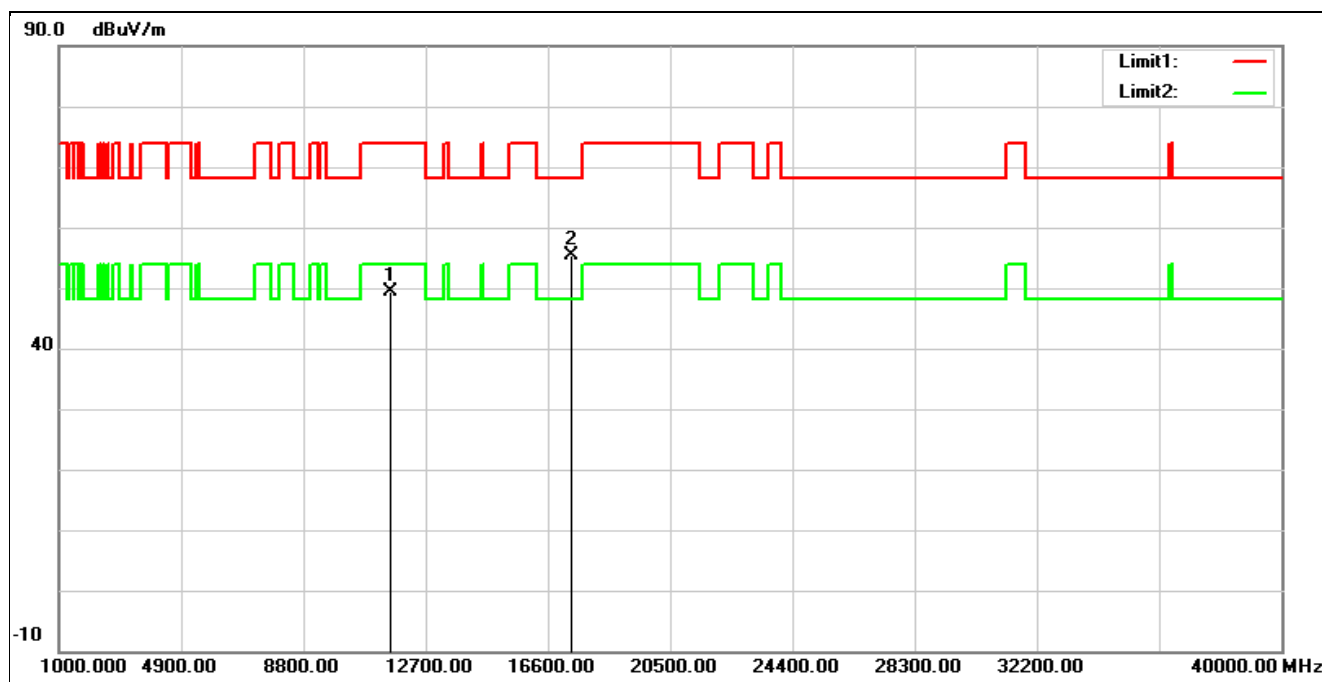


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.28	15.21	49.49	74.00	-24.51	peak
2*	17355.000	32.47	22.96	55.43	68.20	-12.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

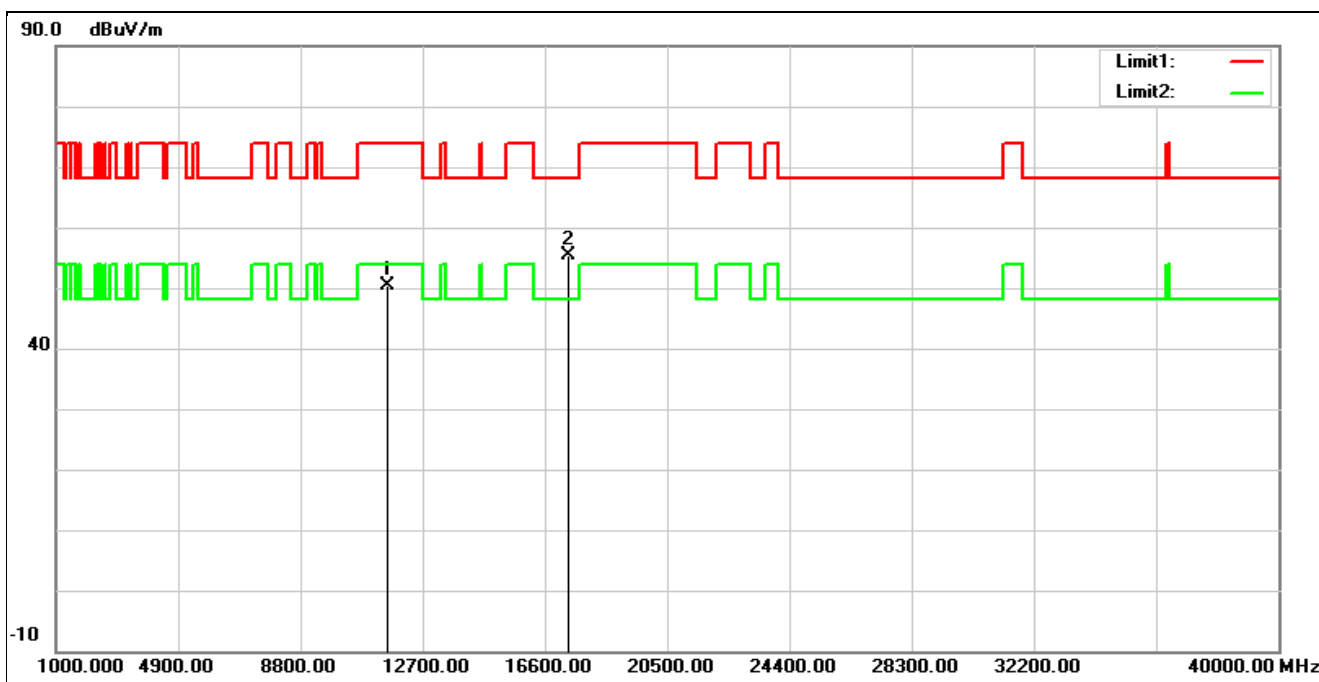


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.09	15.21	50.30	74.00	-23.70	peak
2*	17355.000	32.32	22.96	55.28	68.20	-12.92	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

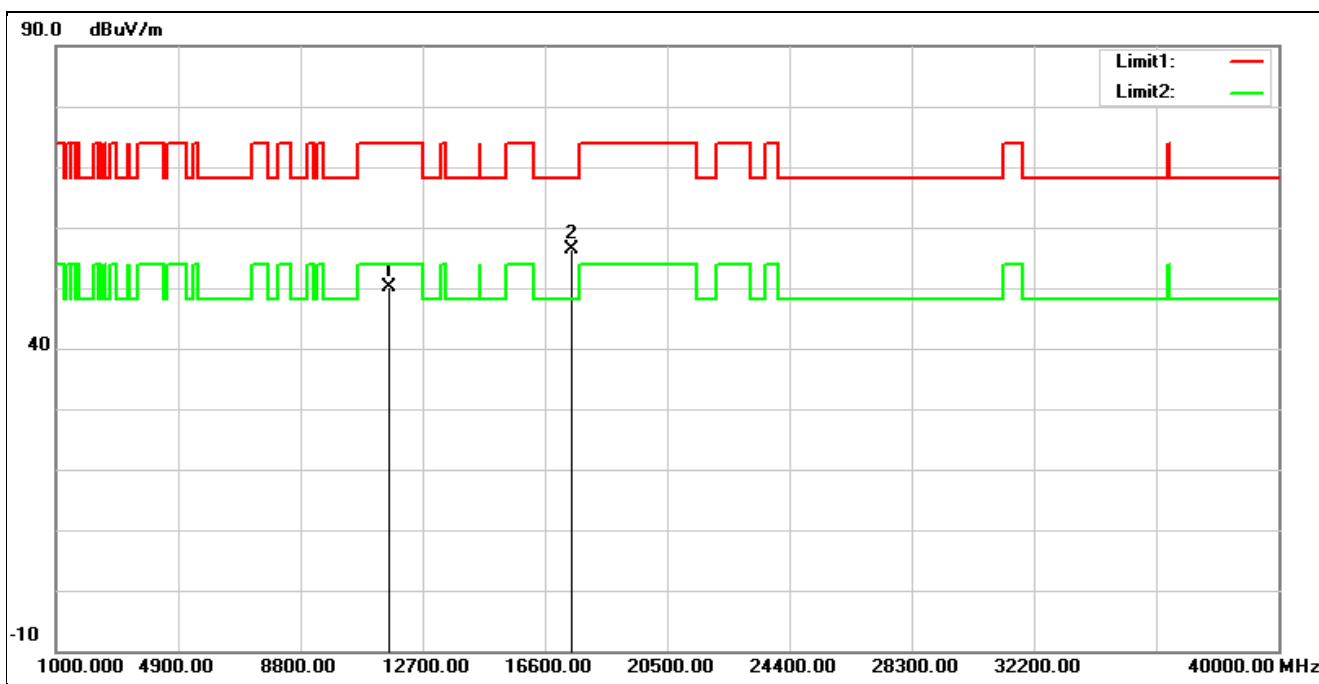


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.16	15.04	50.20	74.00	-23.80	peak
2*	17475.000	32.35	23.95	56.30	68.20	-11.90	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

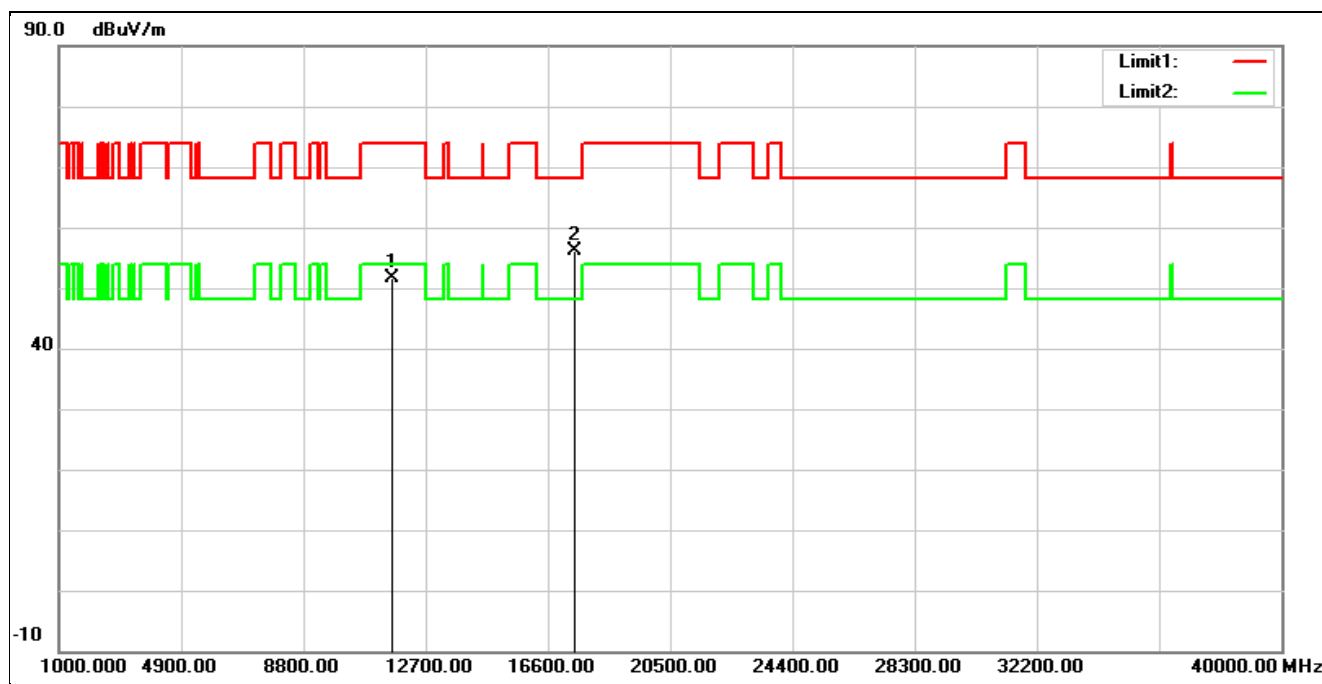


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.71	15.04	51.75	74.00	-22.25	peak
2*	17475.000	32.24	23.95	56.19	68.20	-12.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

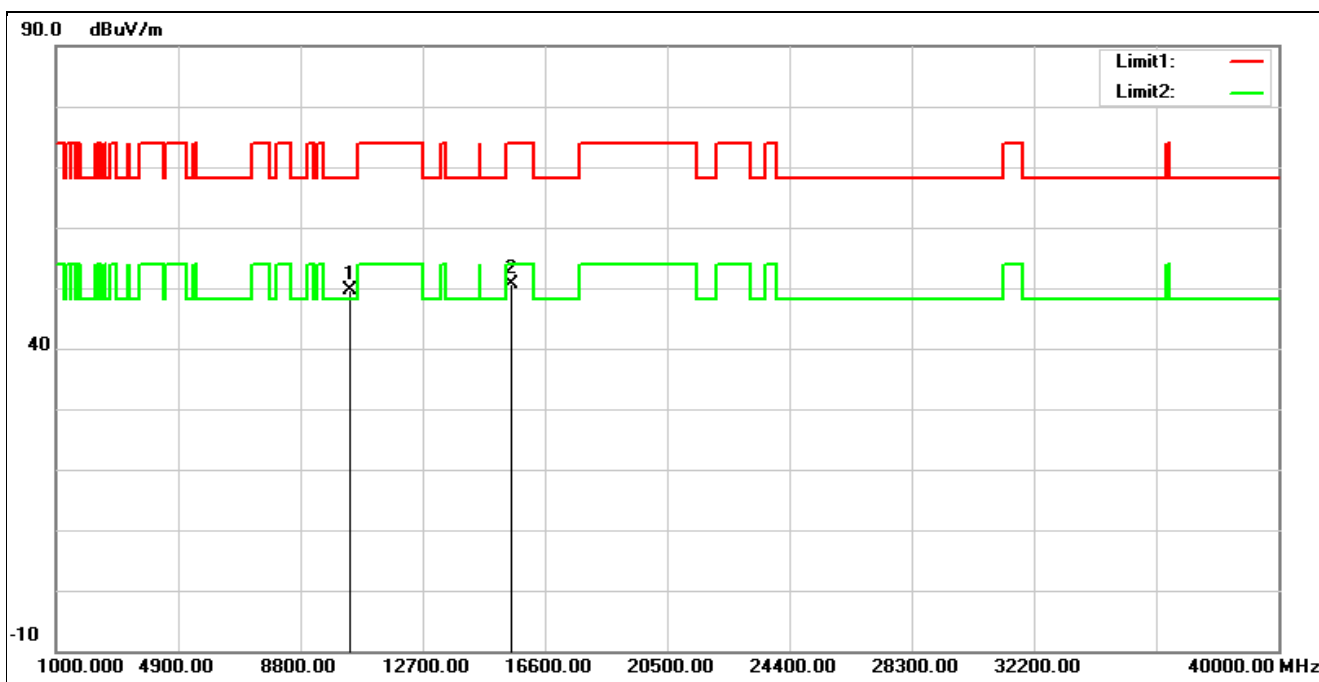


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	35.55	13.99	49.54	68.20	-18.66	peak
2	15540.000	33.27	17.31	50.58	74.00	-23.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

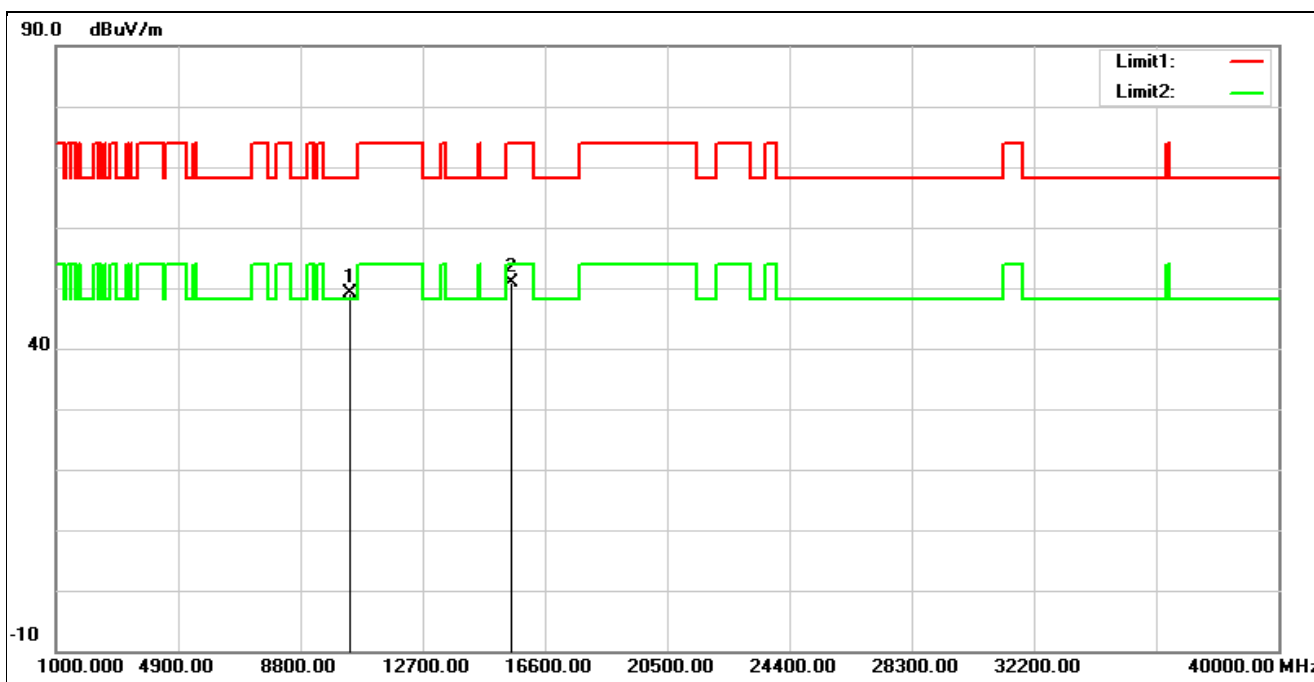


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	35.07	13.99	49.06	68.20	-19.14	peak
2	15540.000	33.60	17.31	50.91	74.00	-23.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

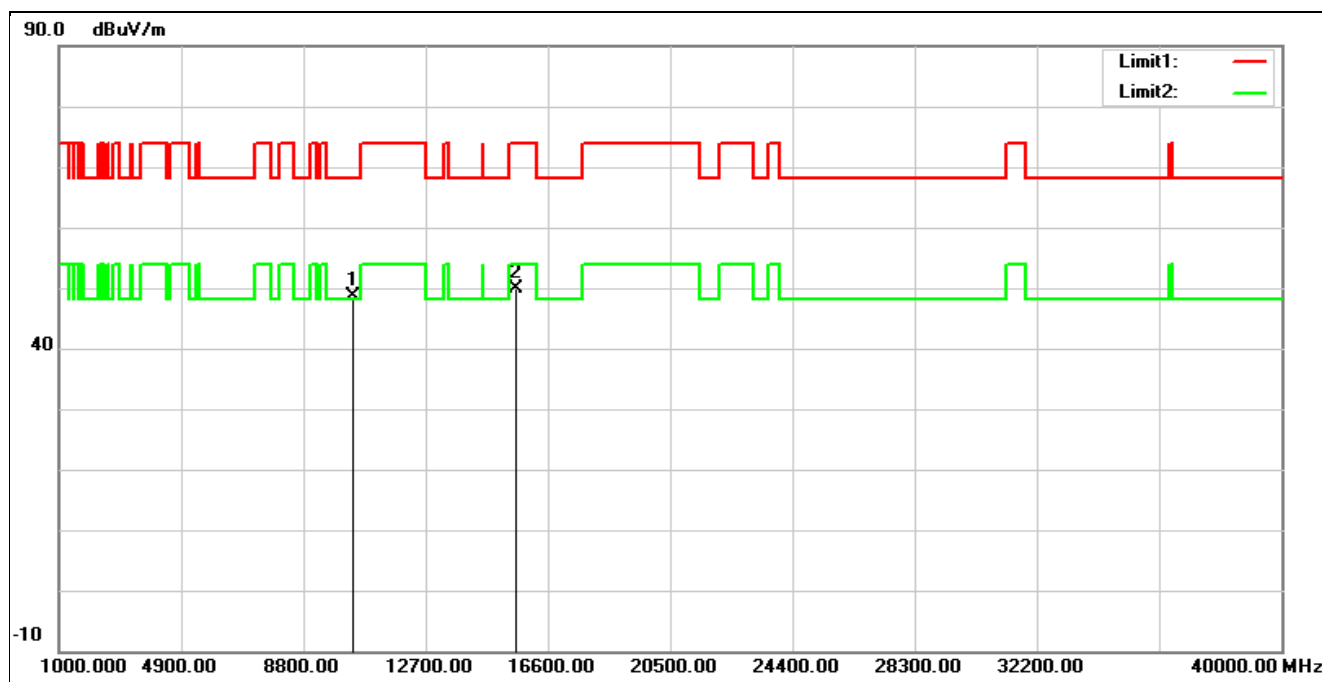


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.45	14.10	48.55	68.20	-19.65	peak
2	15600.000	32.84	17.01	49.85	74.00	-24.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

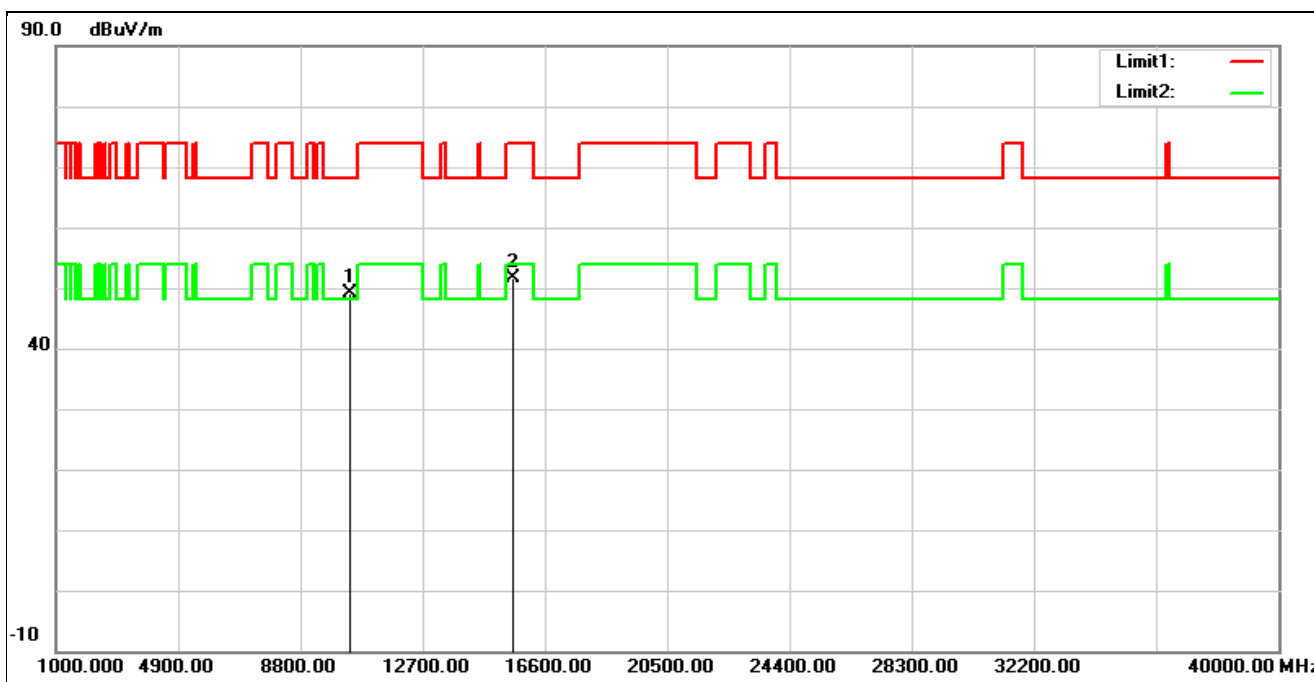


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	34.91	14.10	49.01	68.20	-19.19	peak
2	15600.000	34.69	17.01	51.70	74.00	-22.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

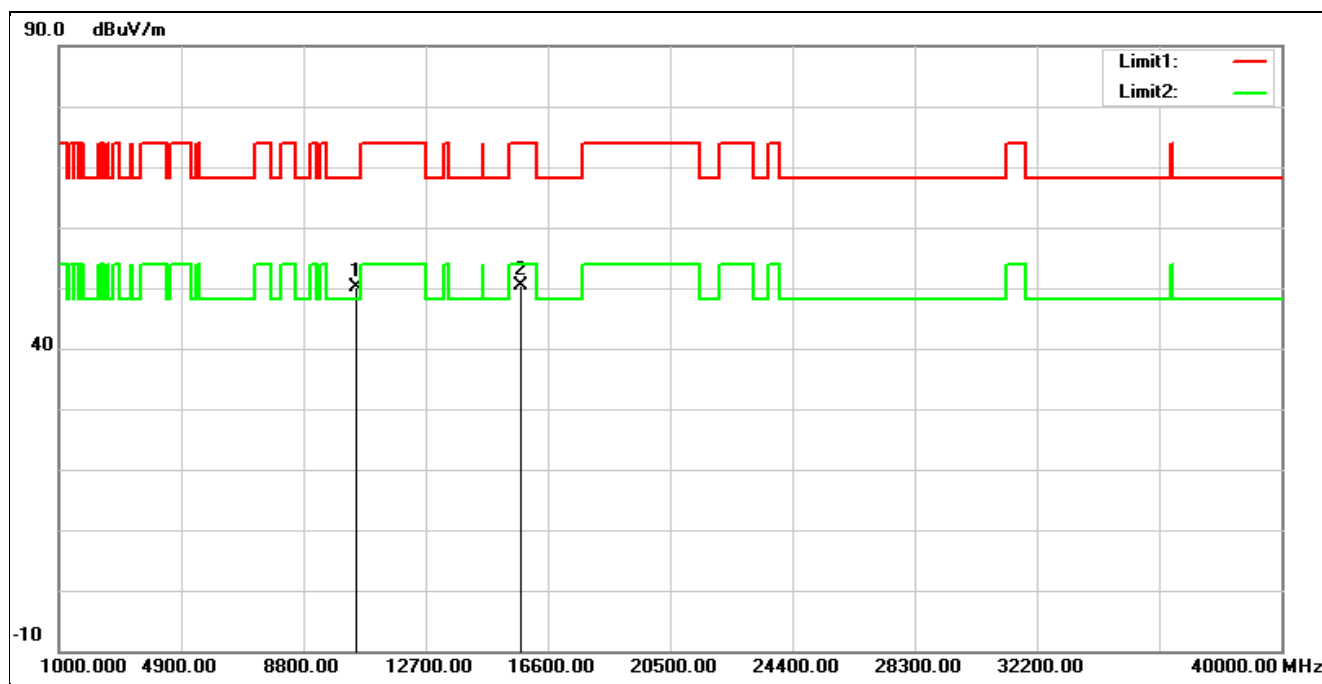


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.61	14.54	50.15	68.20	-18.05	peak
2	15720.000	33.10	17.34	50.44	74.00	-23.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

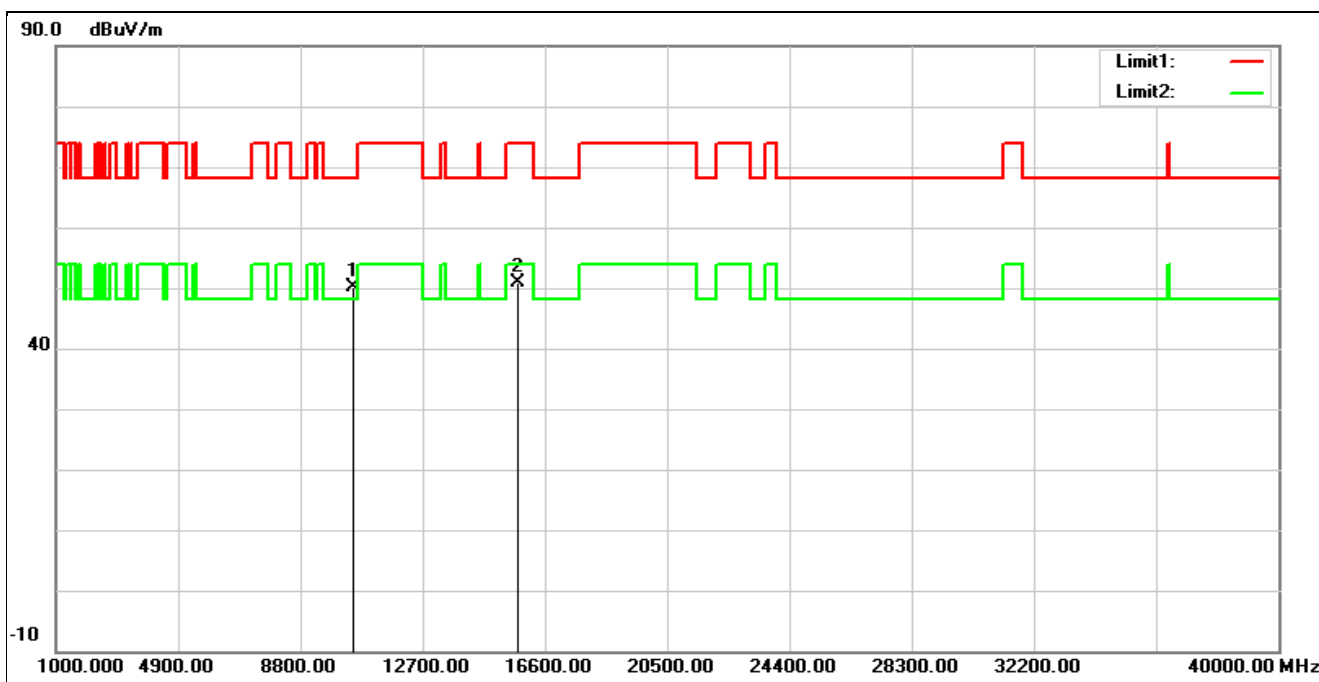


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.57	14.54	50.11	68.20	-18.09	peak
2	15720.000	33.47	17.34	50.81	74.00	-23.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

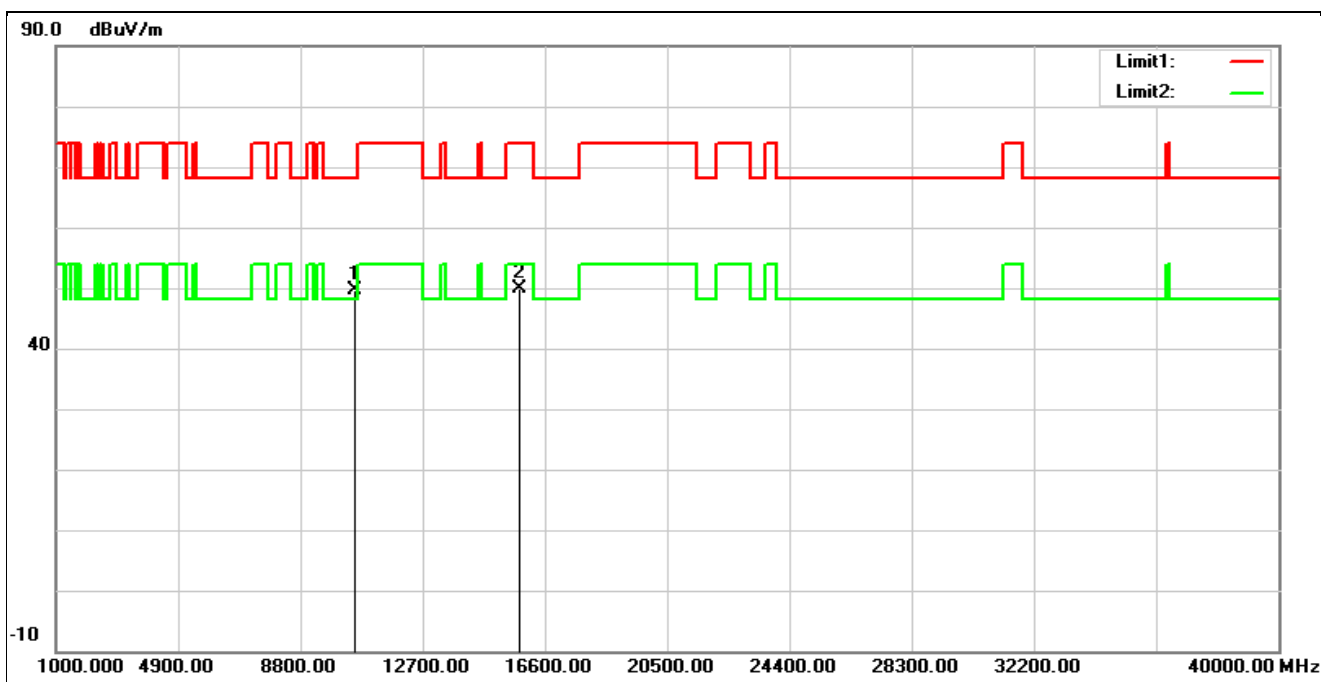


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	35.05	14.60	49.65	68.20	-18.55	peak
2	15780.000	32.86	17.10	49.96	74.00	-24.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

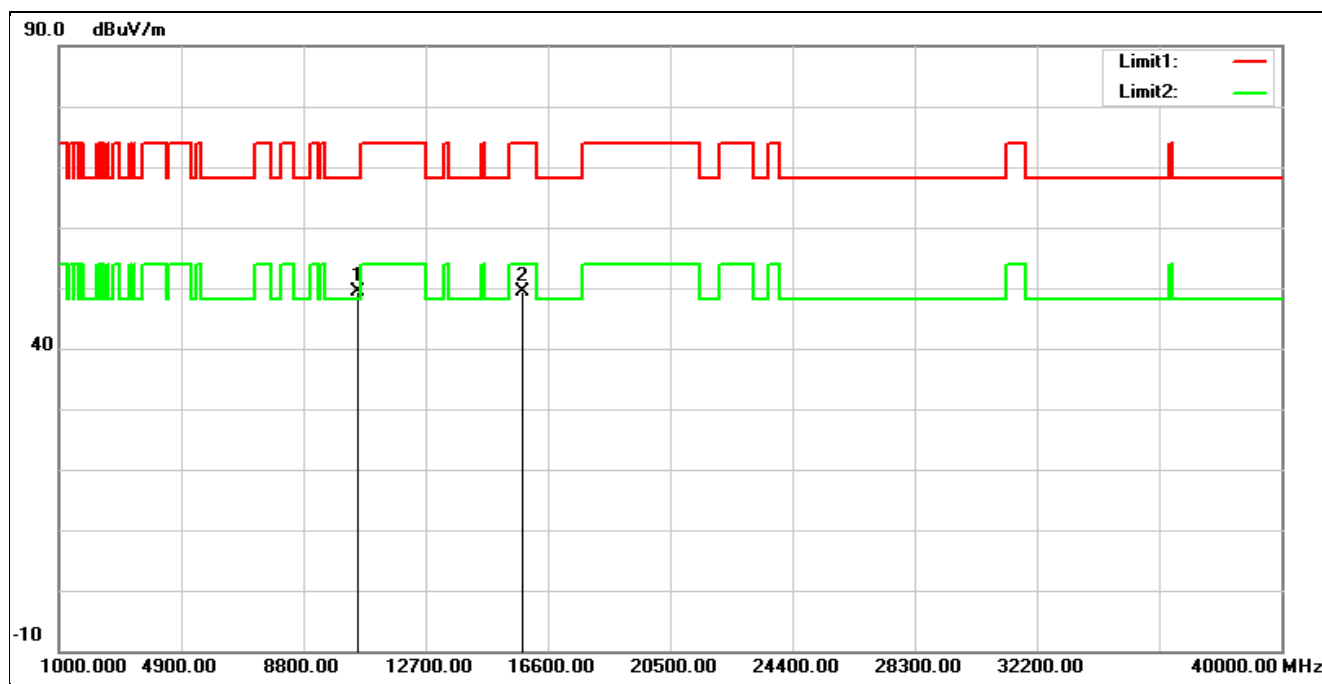


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.78	14.60	49.38	68.20	-18.82	peak
2	15780.000	32.39	17.10	49.49	74.00	-24.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

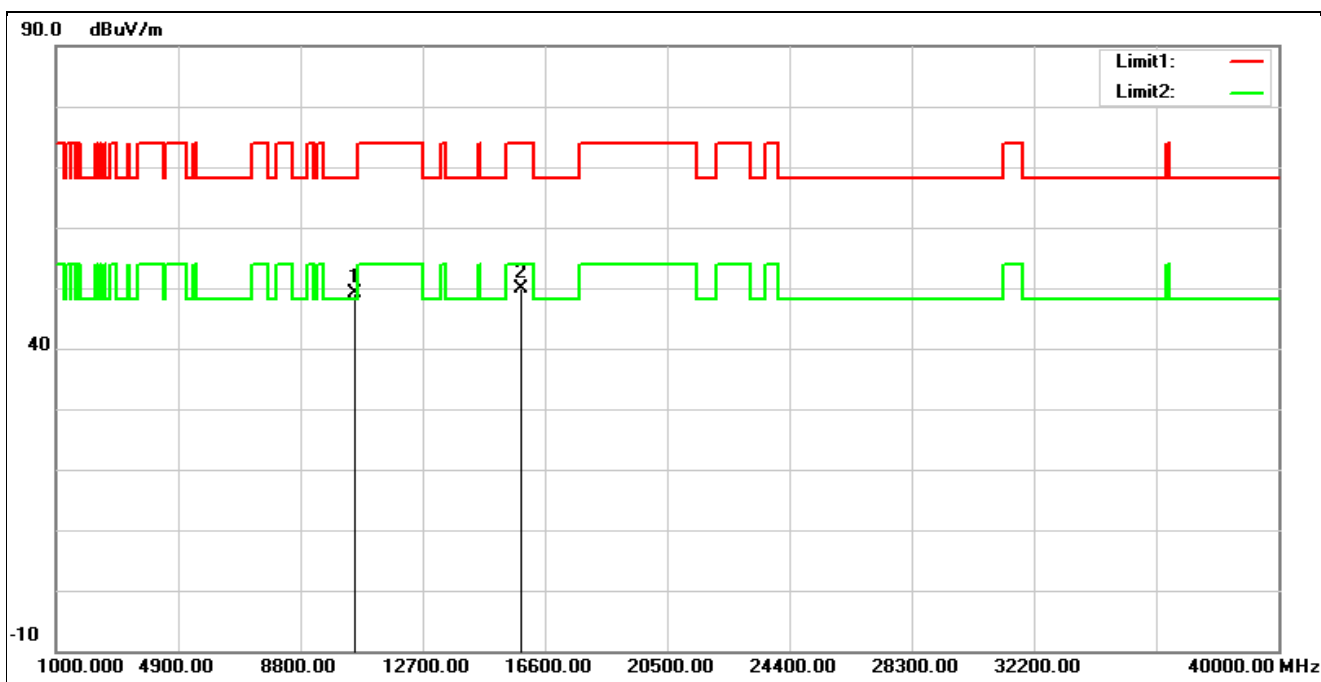


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.56	14.48	49.04	68.20	-19.16	peak
2	15840.000	32.93	16.90	49.83	74.00	-24.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

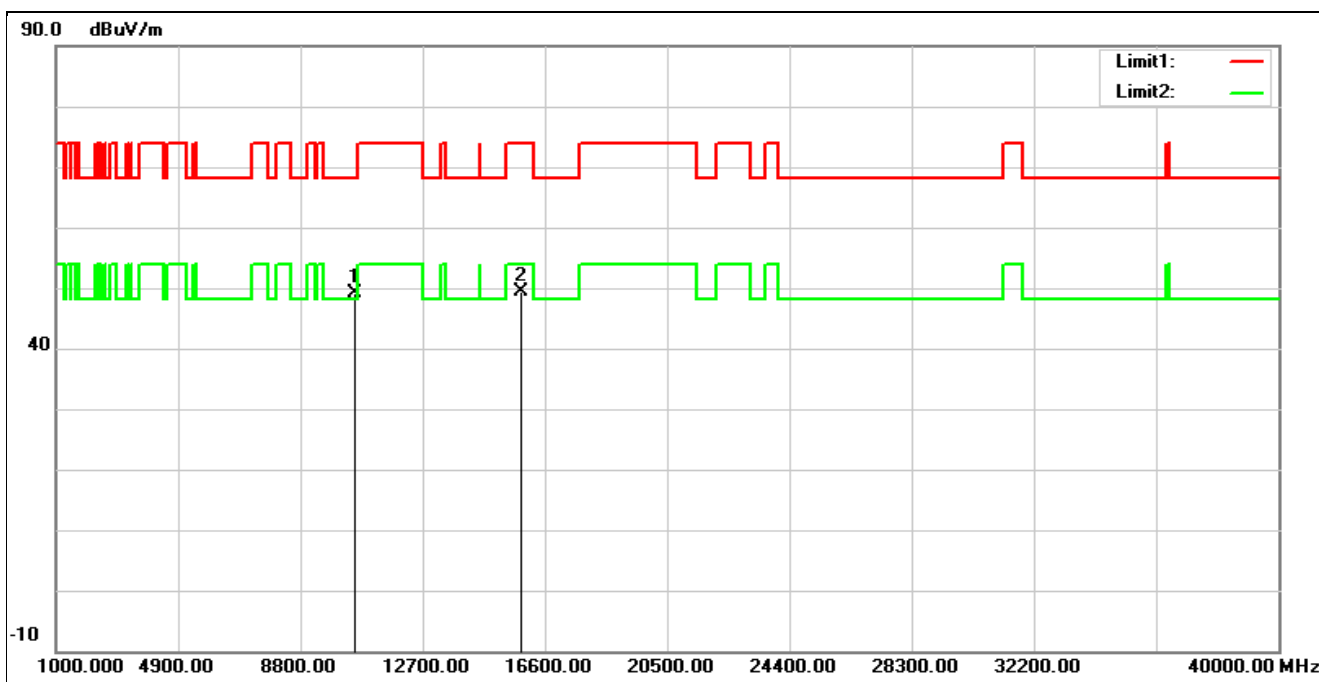


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.61	14.48	49.09	68.20	-19.11	peak
2	15840.000	32.38	16.90	49.28	74.00	-24.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

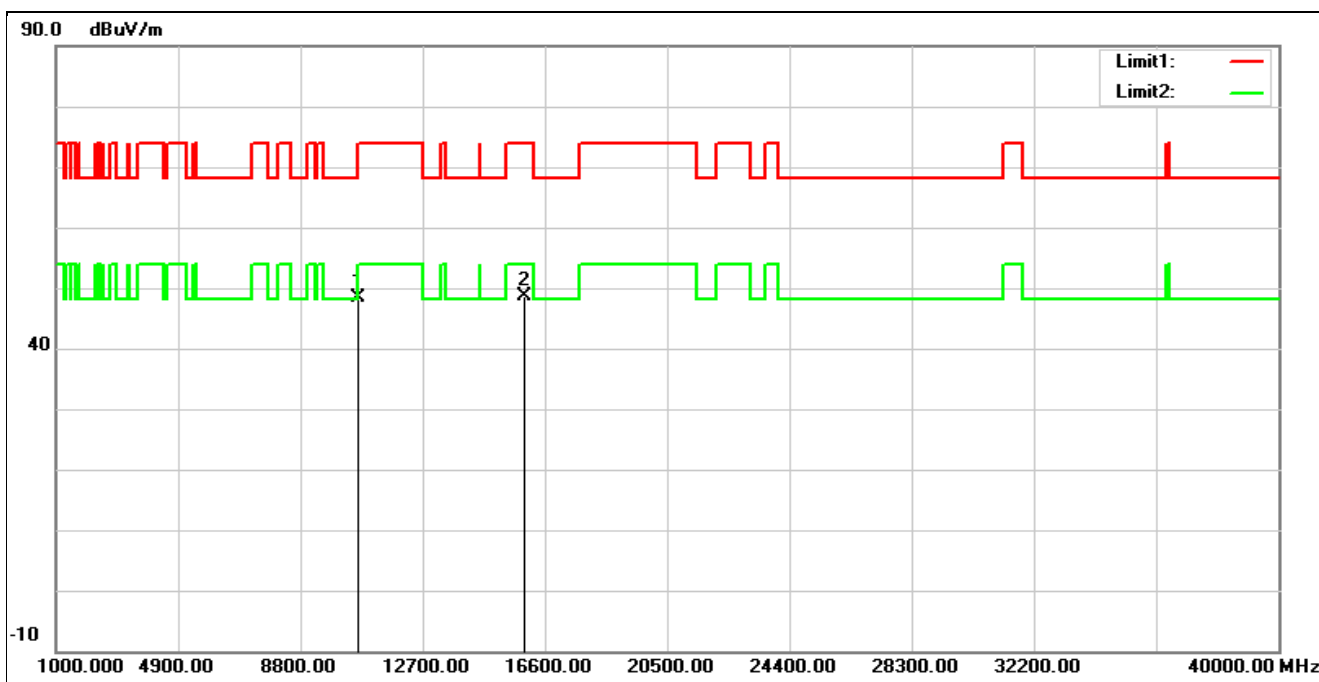


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.98	14.41	48.39	74.00	-25.61	peak
2*	15960.000	32.16	16.55	48.71	74.00	-25.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

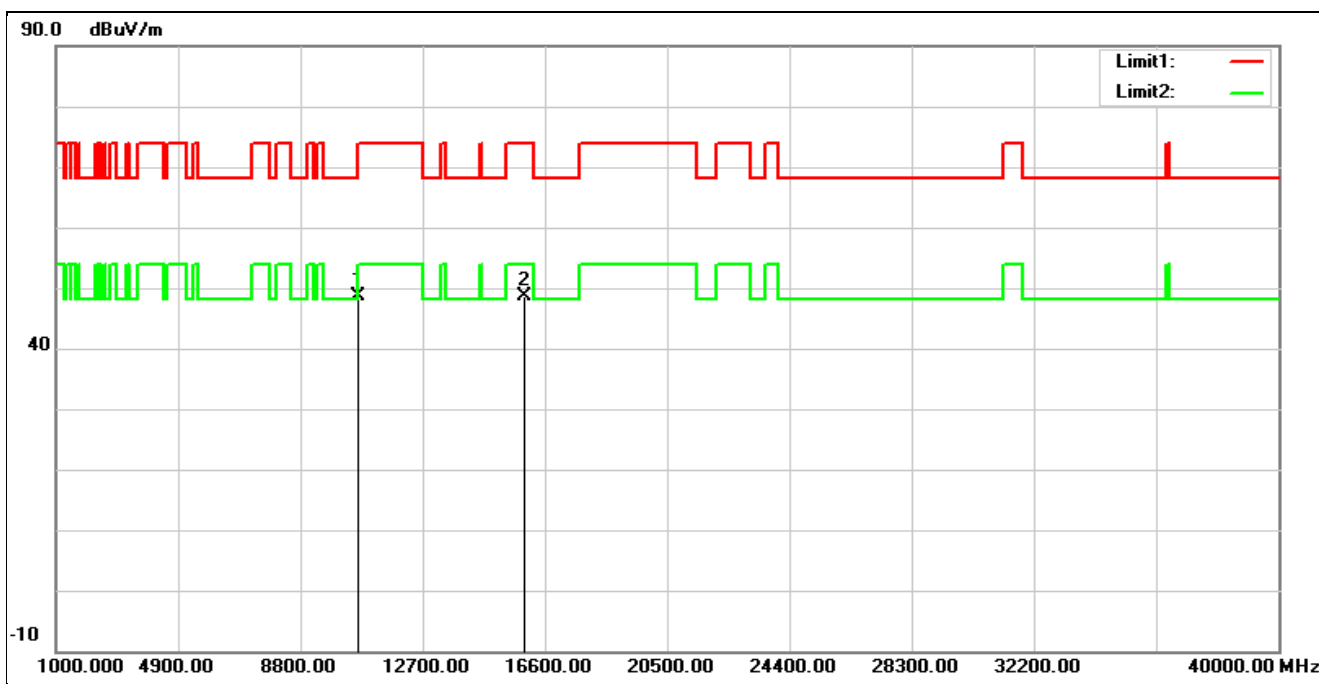


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.31	14.41	48.72	74.00	-25.28	peak
2*	15960.000	32.20	16.55	48.75	74.00	-25.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

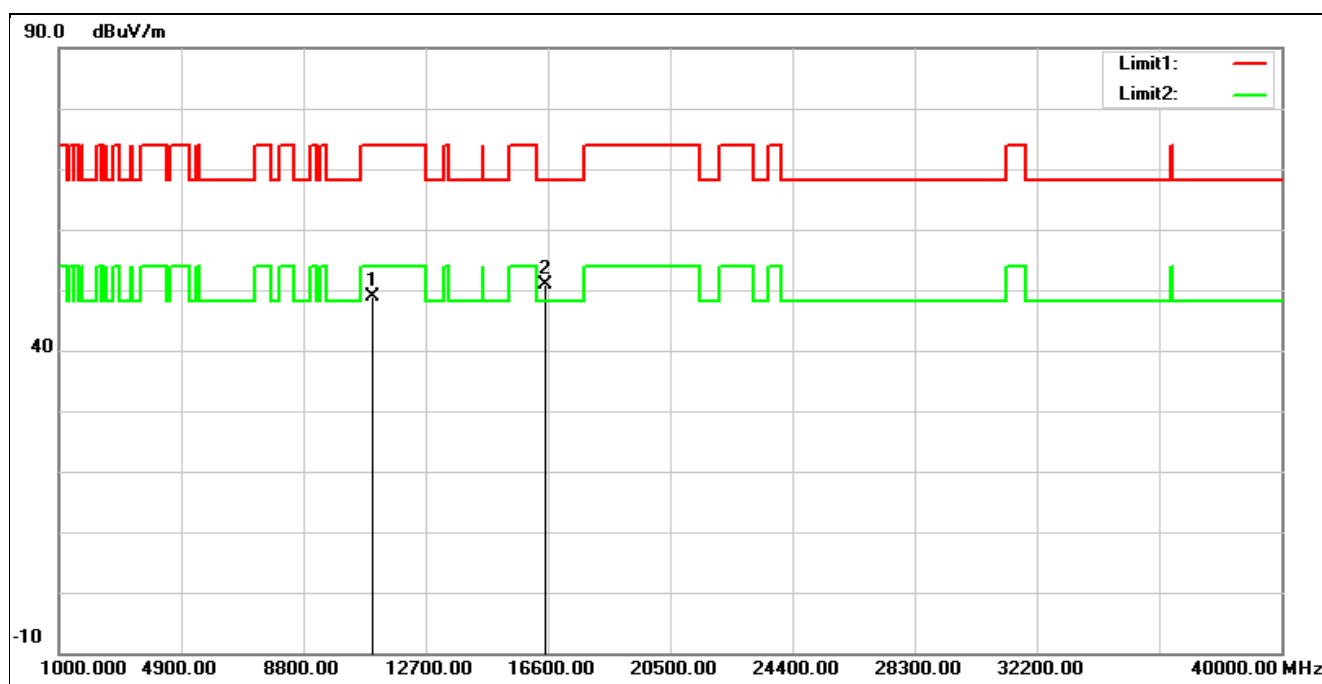


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.13	14.73	48.86	74.00	-25.14	peak
2*	16500.000	33.20	17.77	50.97	68.20	-17.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

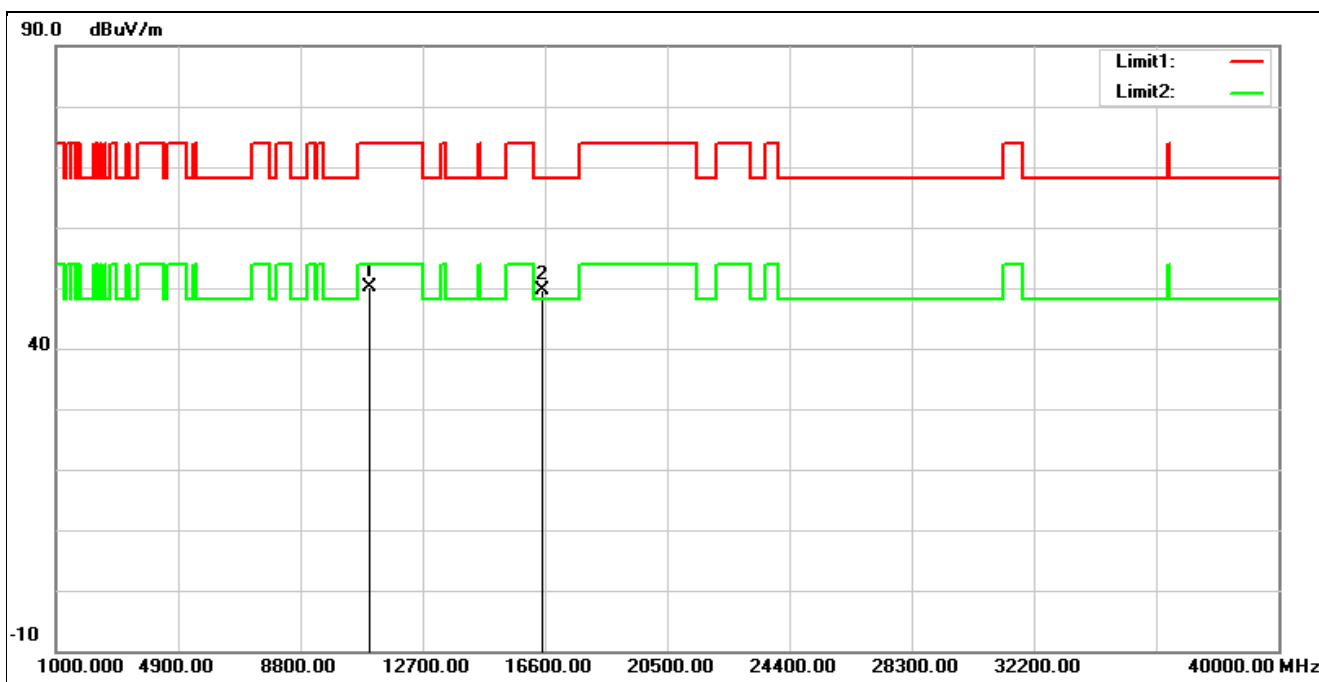


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.47	14.73	50.20	74.00	-23.80	peak
2*	16500.000	31.96	17.77	49.73	68.20	-18.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

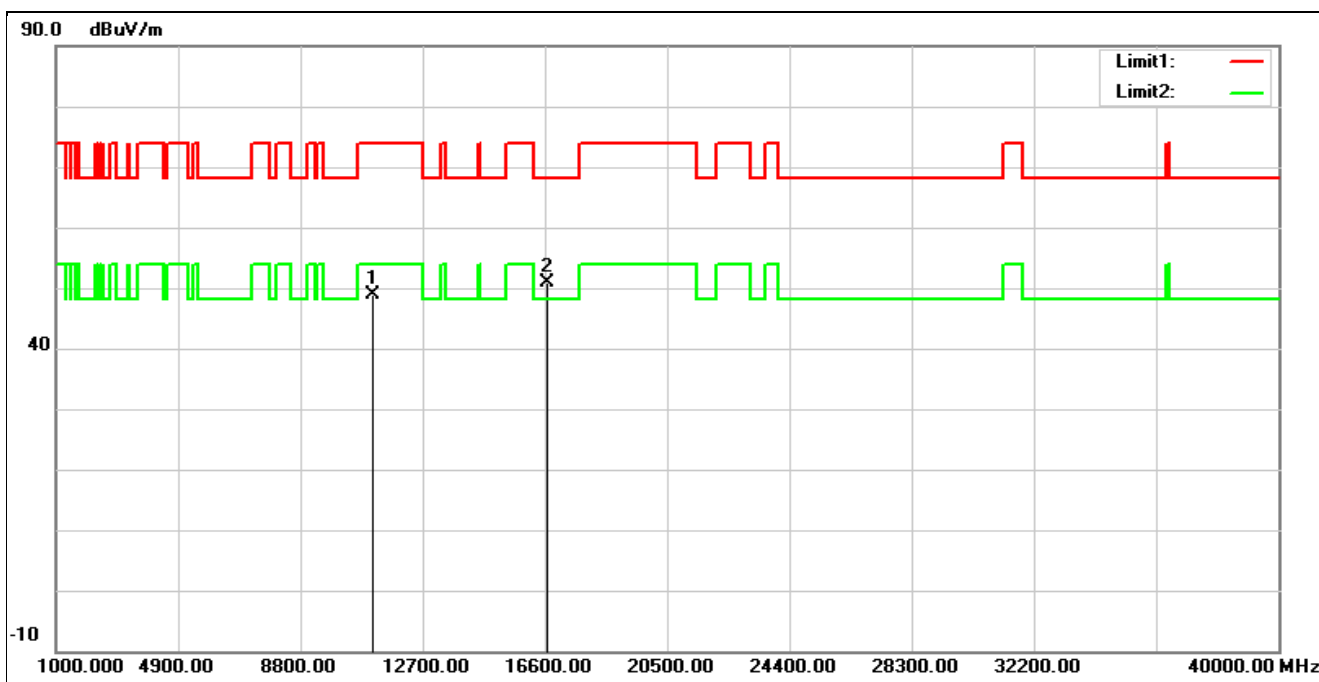


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.02	14.79	48.81	74.00	-25.19	peak
2*	16680.000	32.24	18.61	50.85	68.20	-17.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

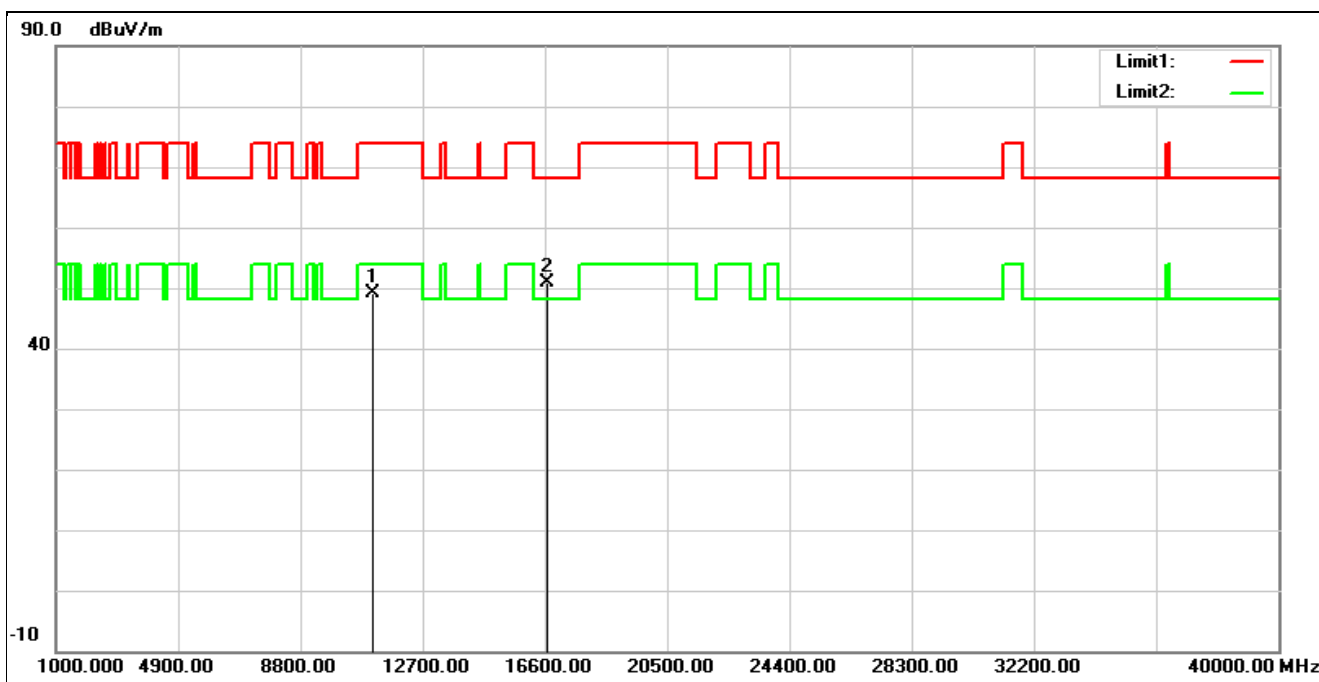


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.35	14.79	49.14	74.00	-24.86	peak
2*	16680.000	32.21	18.61	50.82	68.20	-17.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

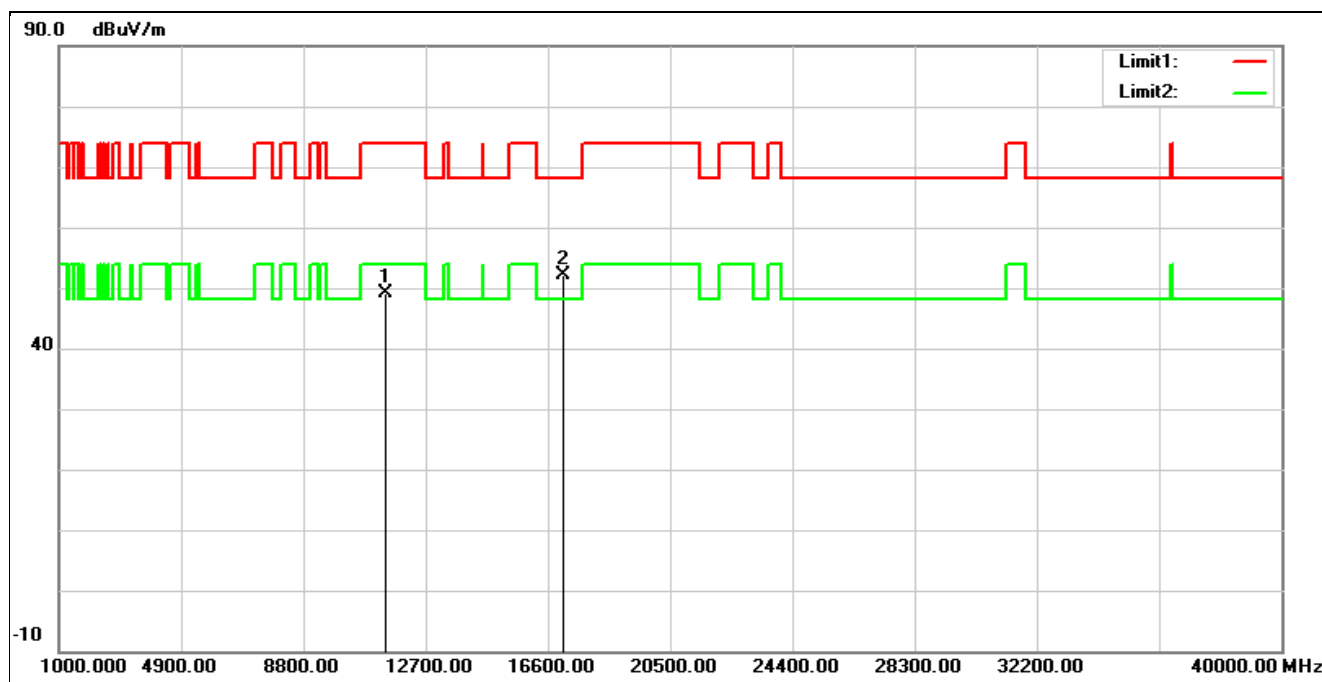


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.16	15.07	49.23	74.00	-24.77	peak
2*	17100.000	31.61	20.64	52.25	68.20	-15.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

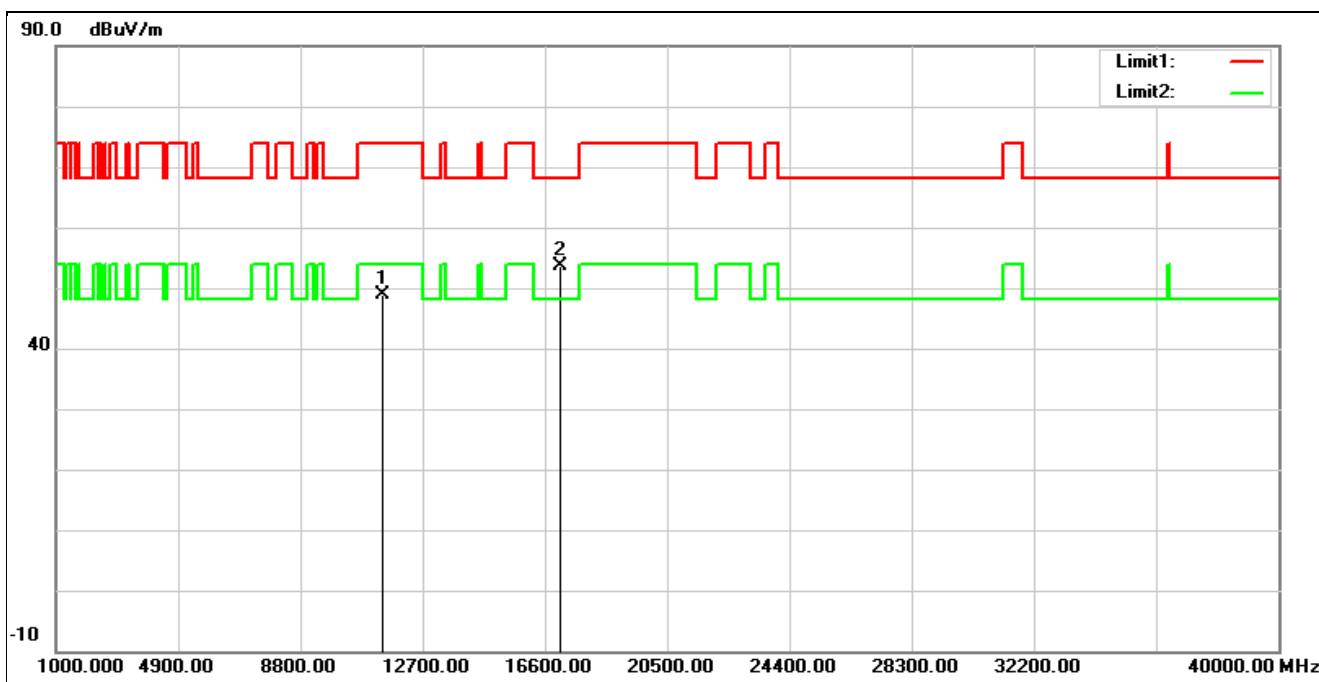


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.91	15.07	48.98	74.00	-25.02	peak
2*	17100.000	33.05	20.64	53.69	68.20	-14.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

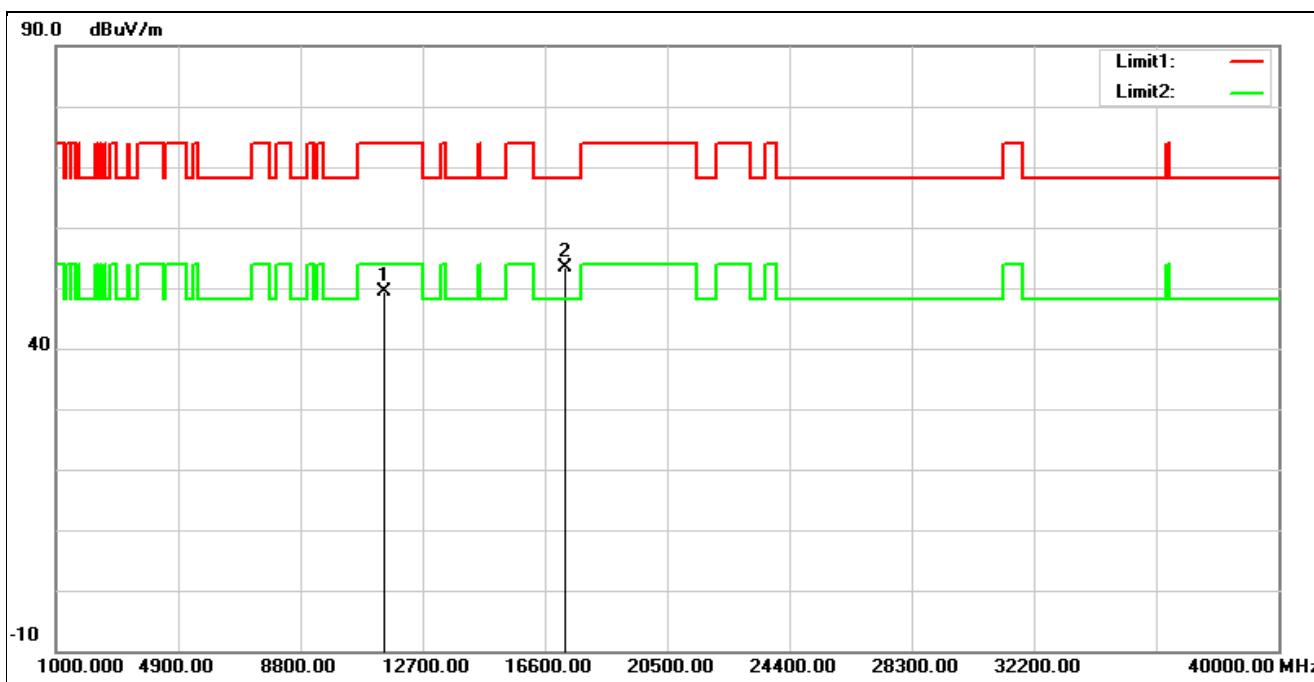


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.97	15.42	49.39	74.00	-24.61	peak
2*	17235.000	31.28	22.01	53.29	68.20	-14.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

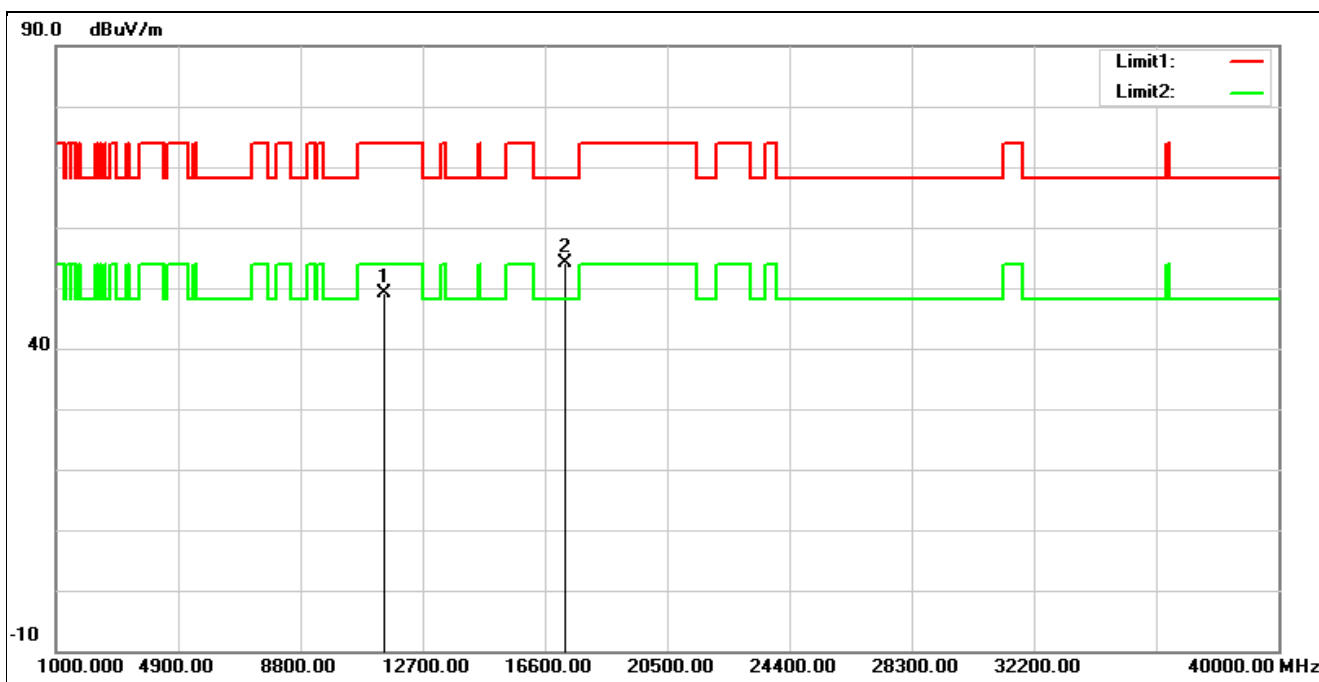


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.66	15.42	49.08	74.00	-24.92	peak
2*	17235.000	32.18	22.01	54.19	68.20	-14.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

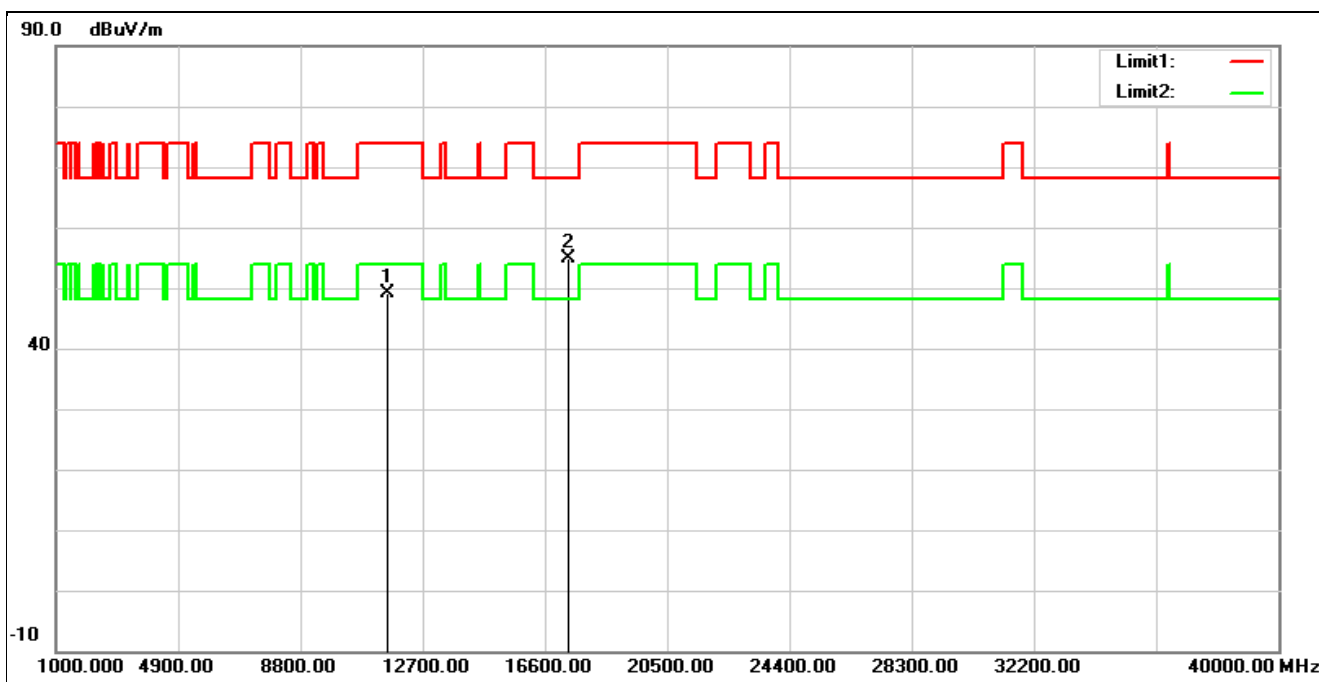


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.89	15.21	49.10	74.00	-24.90	peak
2*	17355.000	31.84	22.96	54.80	68.20	-13.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

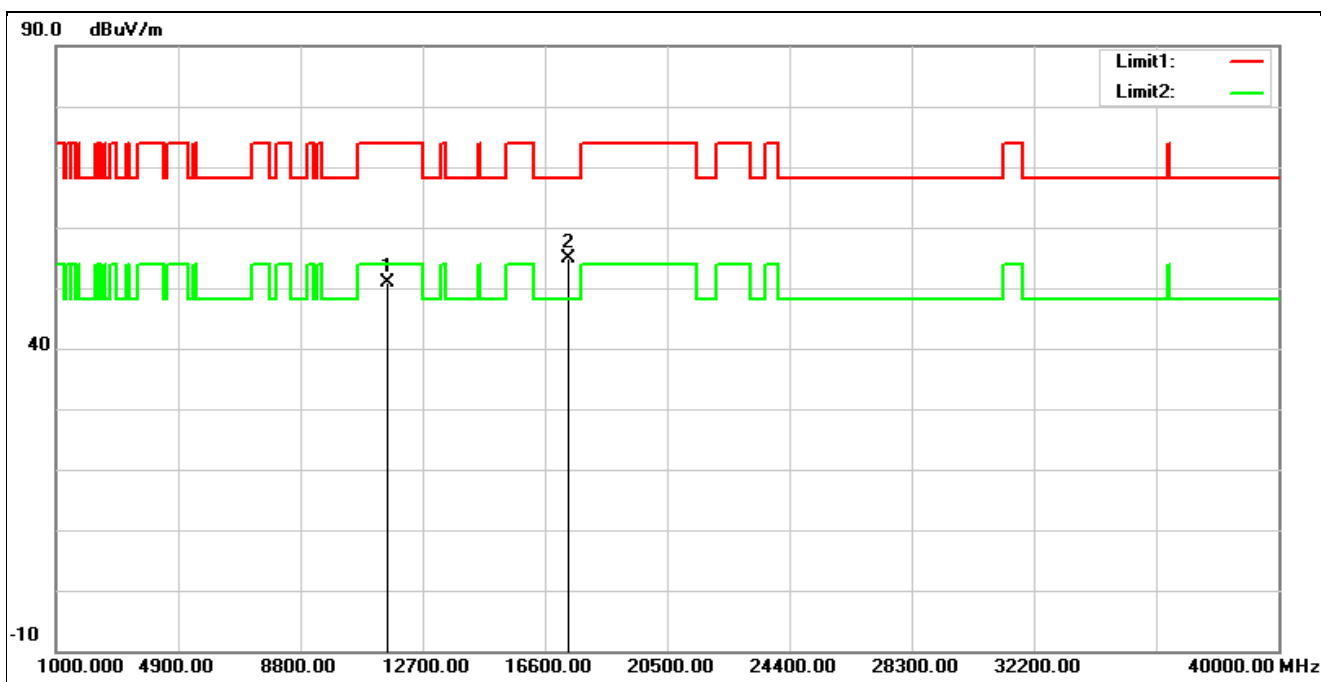


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.57	15.21	50.78	74.00	-23.22	peak
2*	17355.000	31.97	22.96	54.93	68.20	-13.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

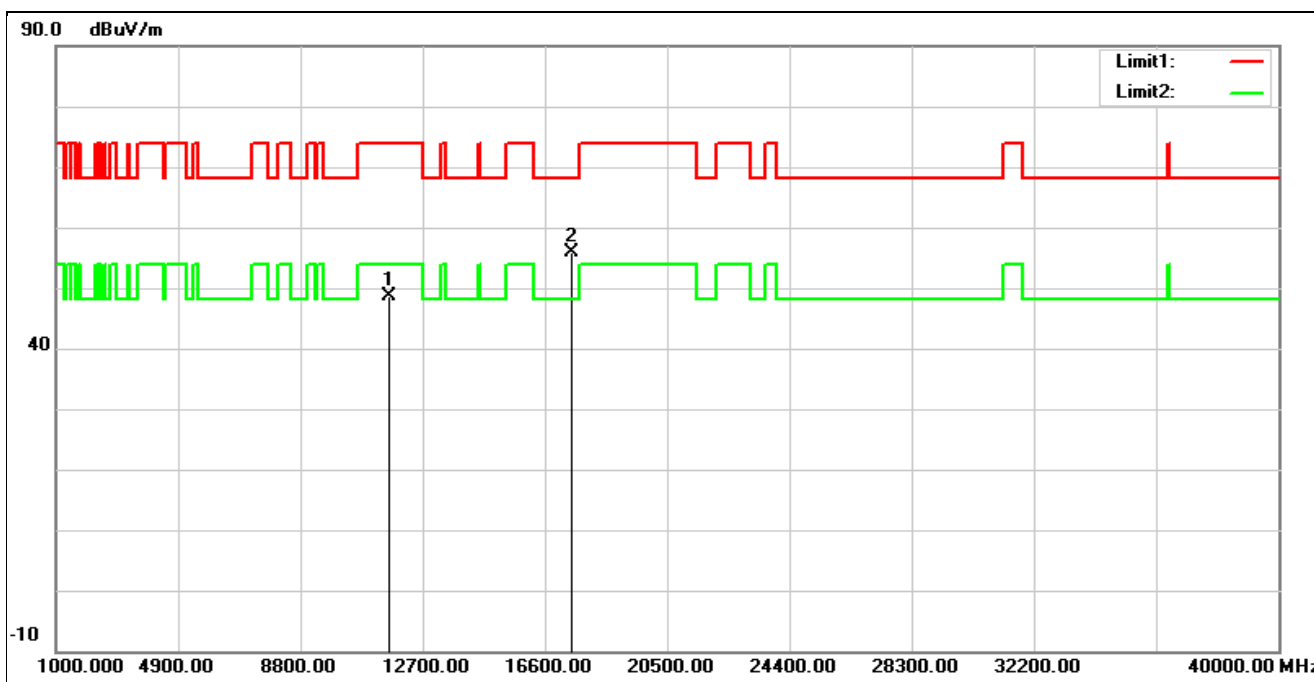


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.65	15.04	48.69	74.00	-25.31	peak
2*	17475.000	31.82	23.95	55.77	68.20	-12.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

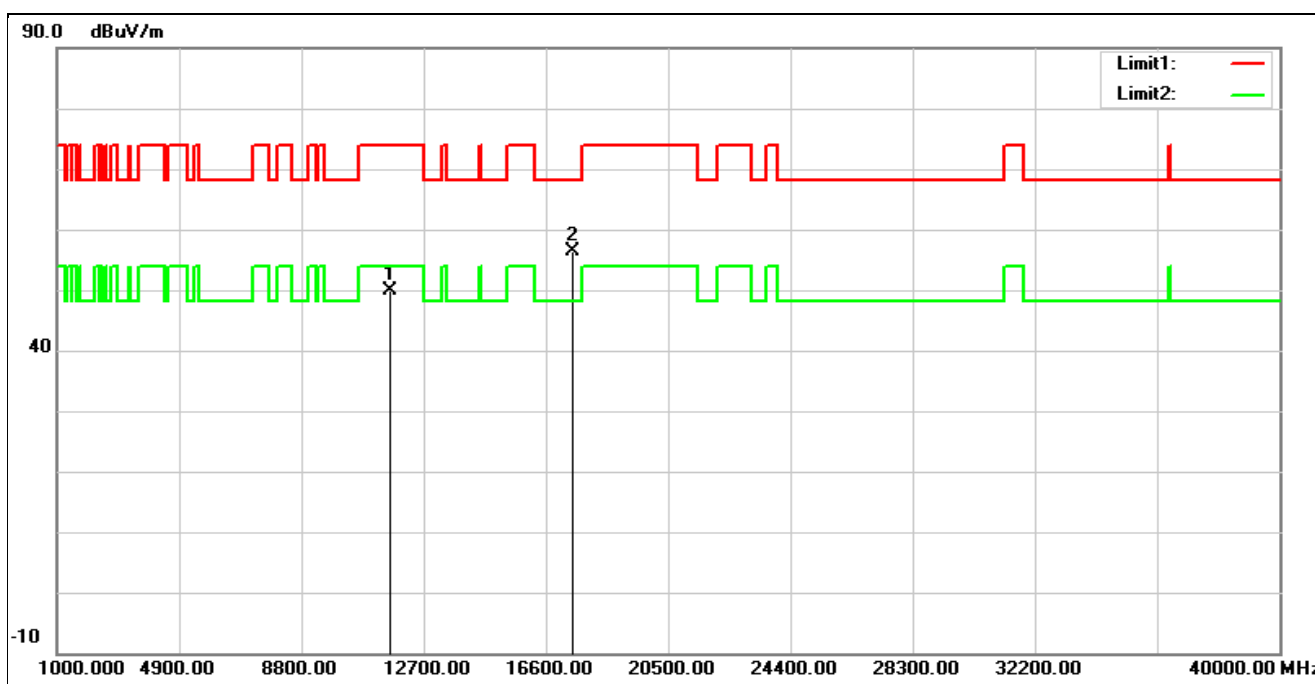


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.78	15.04	49.82	74.00	-24.18	peak
2*	17475.000	32.47	23.95	56.42	68.20	-11.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

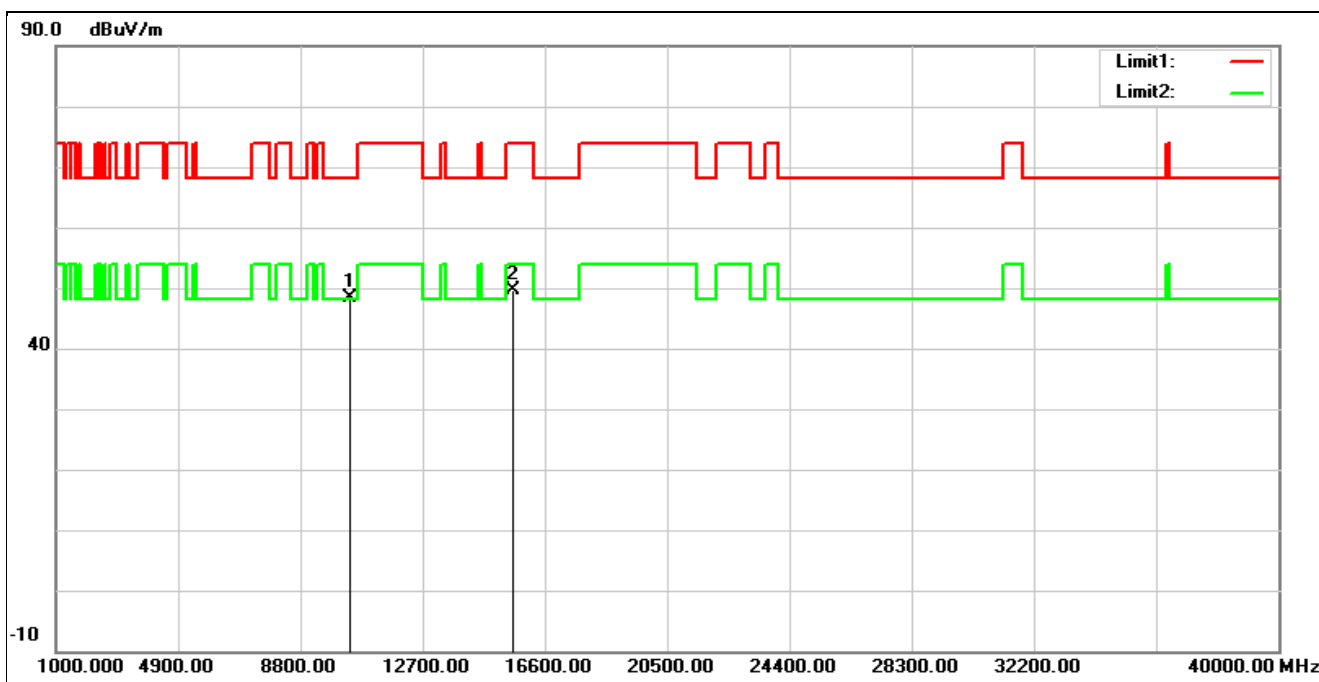


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	34.31	14.04	48.35	68.20	-19.85	peak
2	15570.000	32.48	17.16	49.64	74.00	-24.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

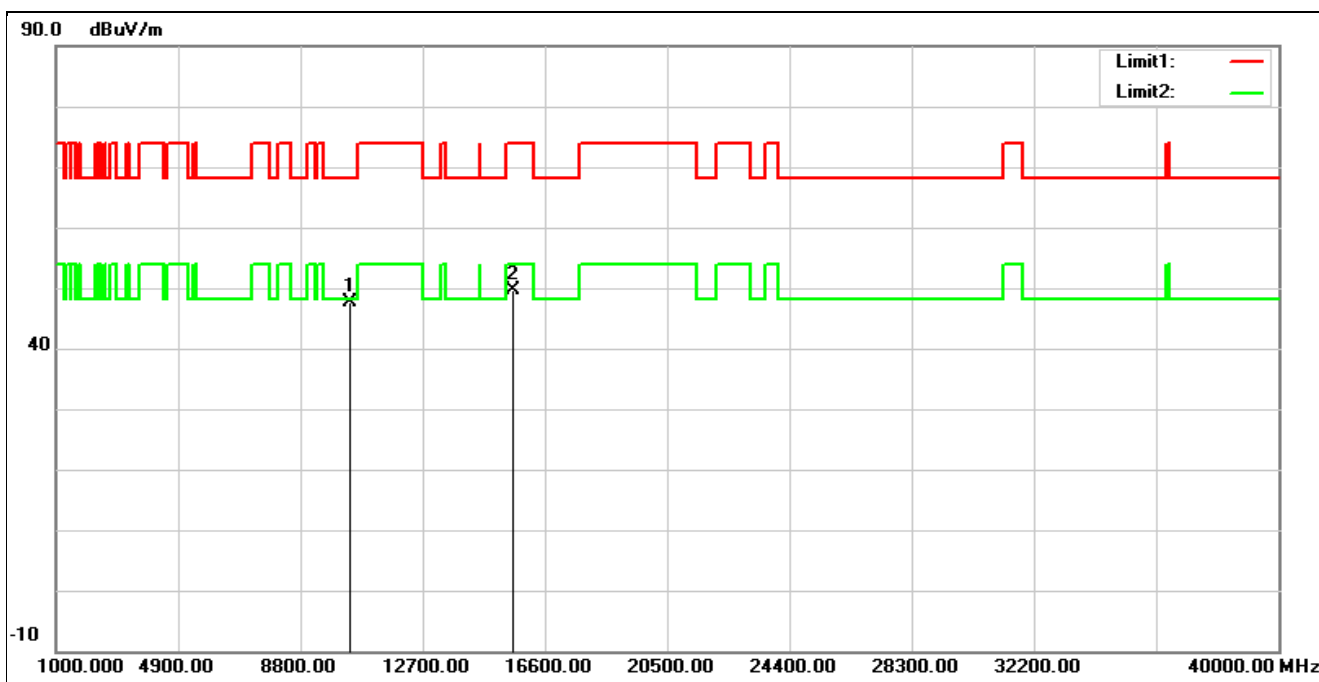


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	33.69	14.04	47.73	68.20	-20.47	peak
2	15570.000	32.56	17.16	49.72	74.00	-24.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

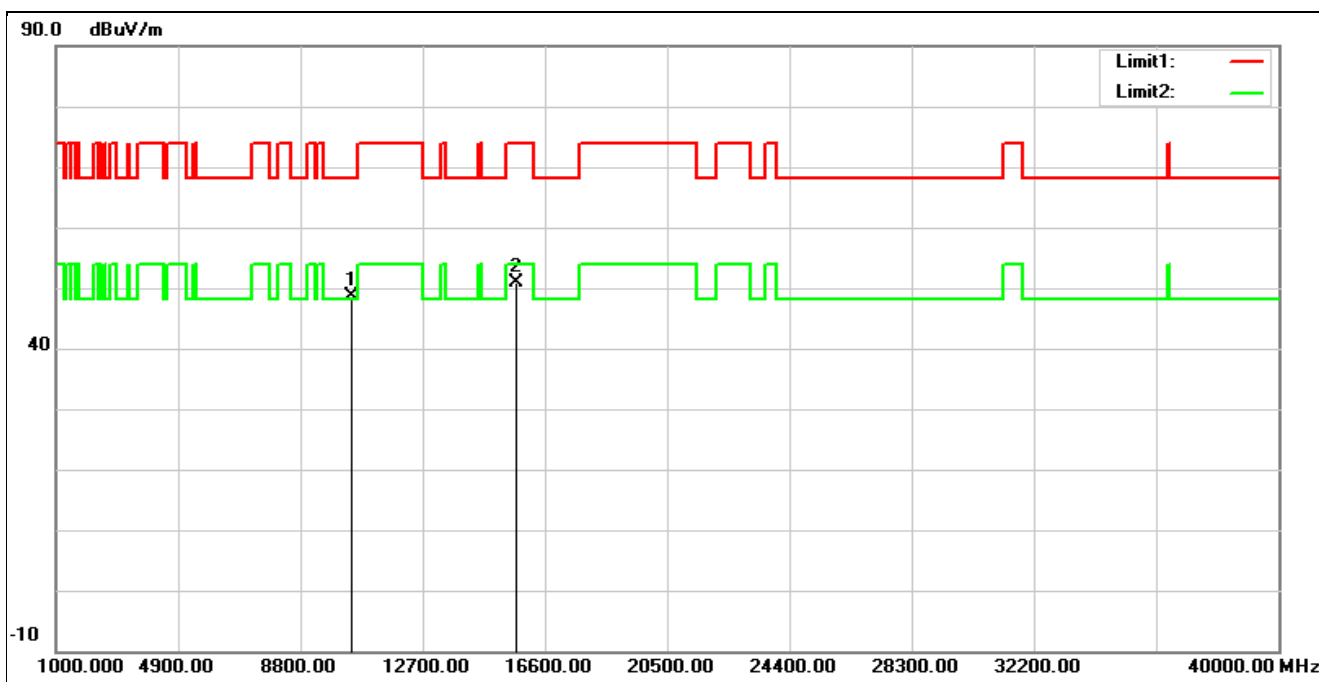


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.29	14.43	48.72	68.20	-19.48	peak
2	15690.000	33.60	17.37	50.97	74.00	-23.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

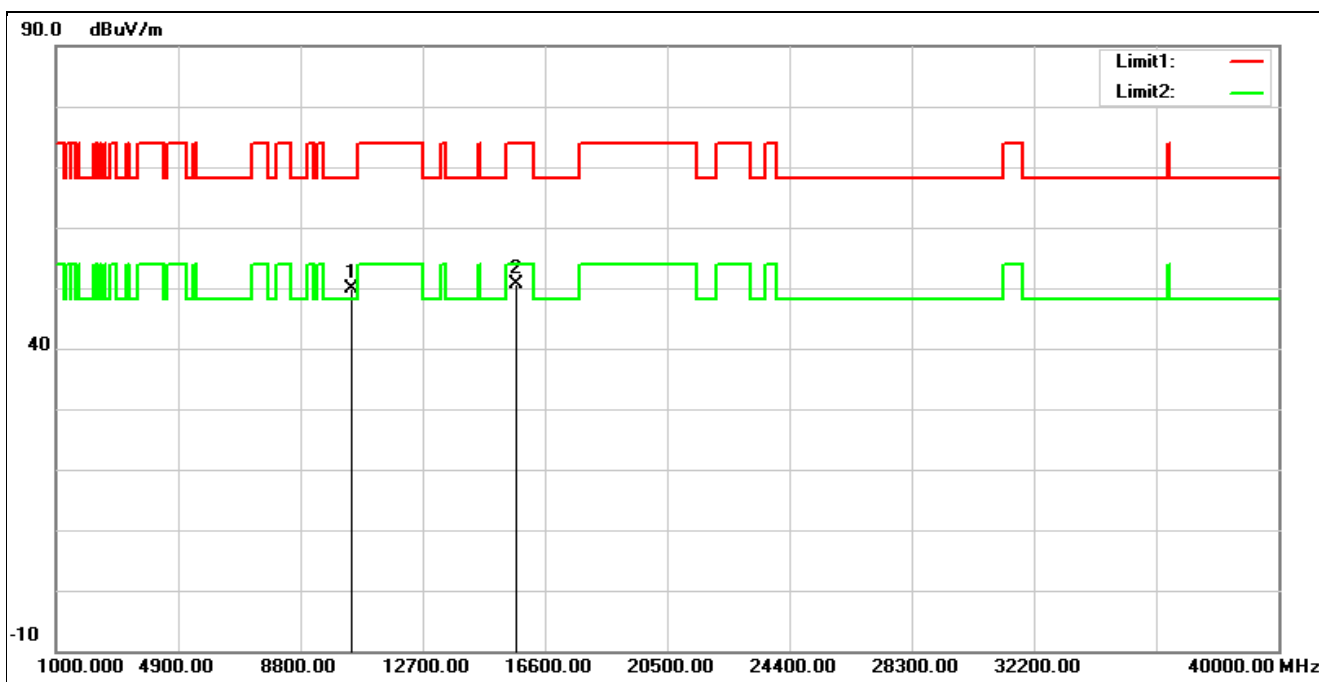


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	35.44	14.43	49.87	68.20	-18.33	peak
2	15690.000	33.23	17.37	50.60	74.00	-23.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

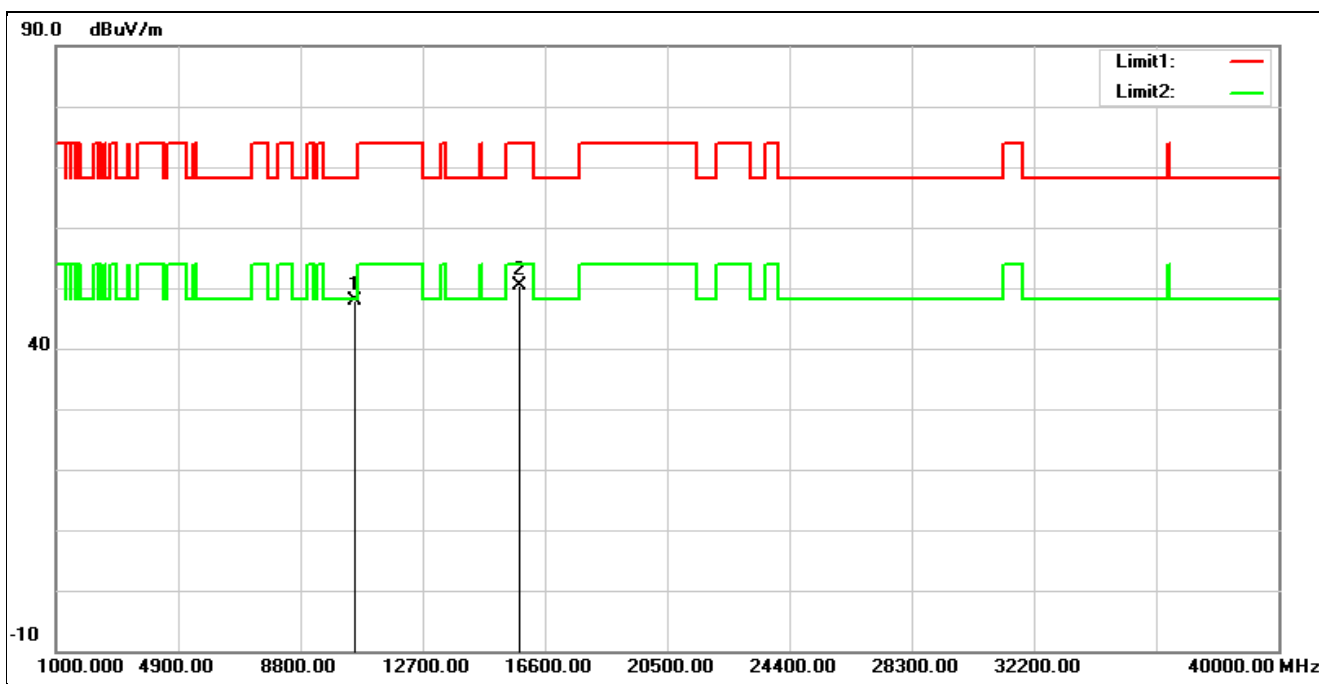


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.27	14.55	47.82	68.20	-20.38	peak
2	15810.000	33.27	17.00	50.27	74.00	-23.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

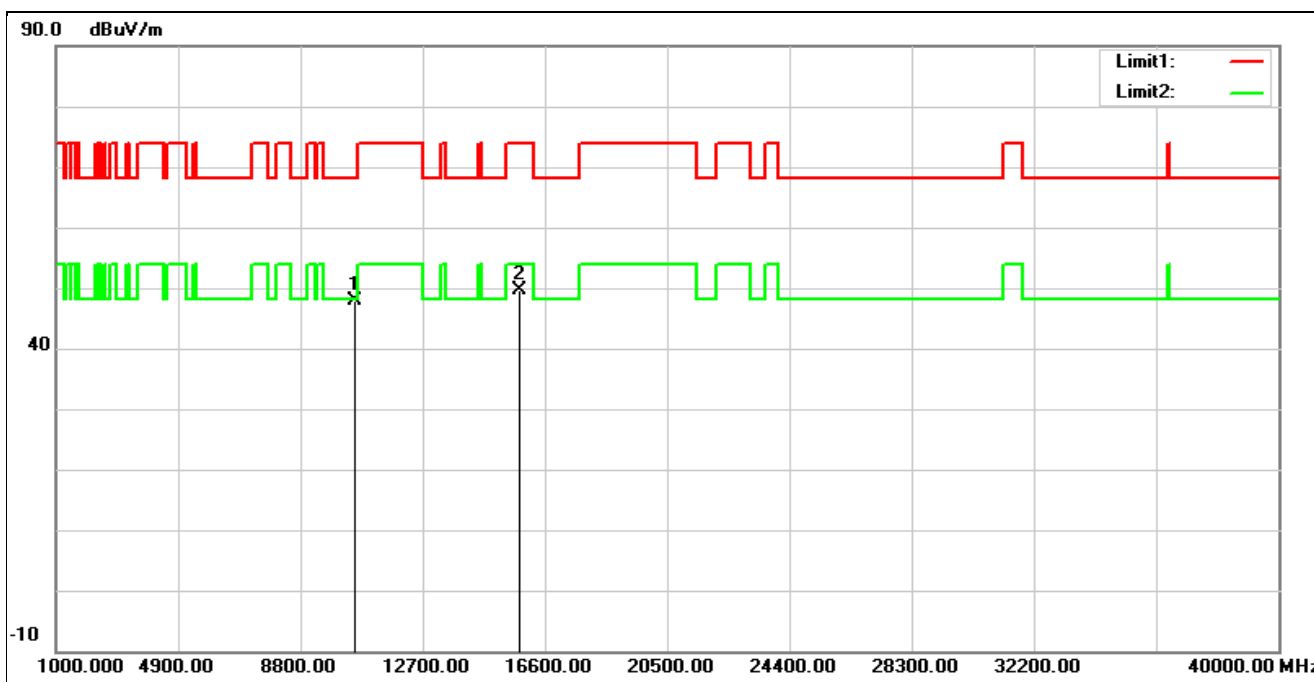


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	33.40	14.55	47.95	68.20	-20.25	peak
2	15810.000	32.61	17.00	49.61	74.00	-24.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

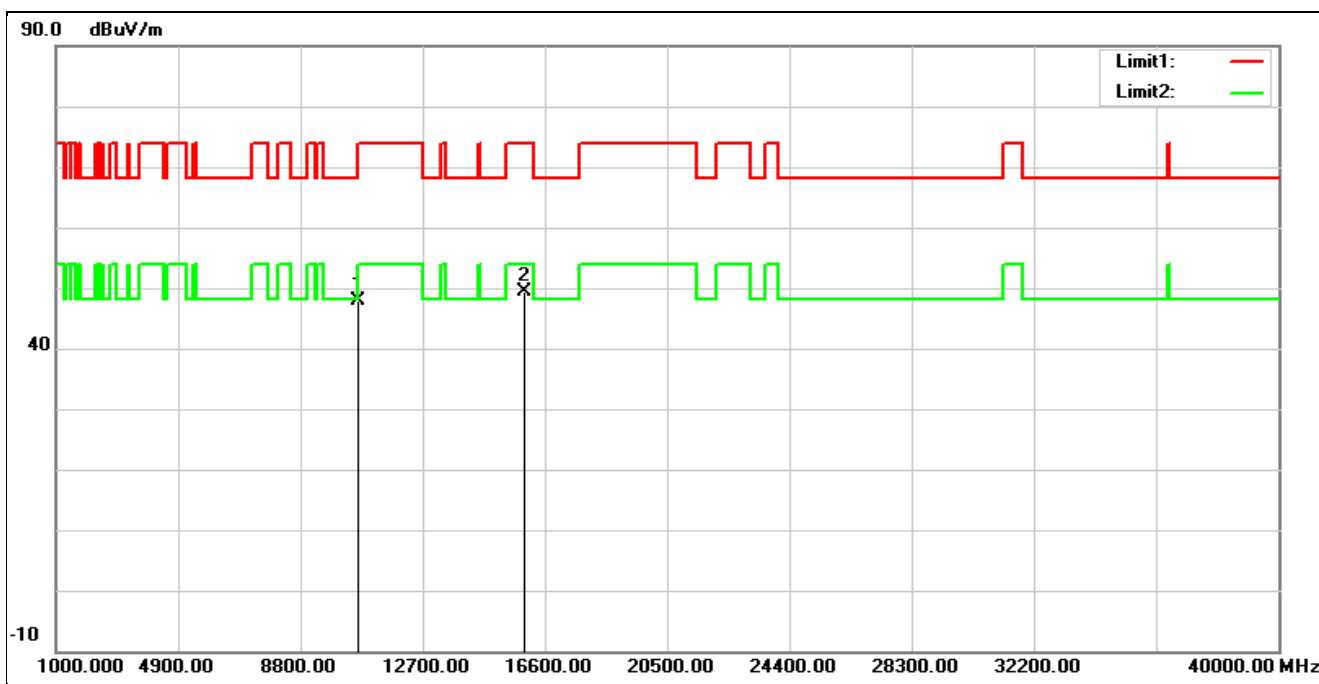


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.58	14.40	47.98	74.00	-26.02	peak
2*	15930.000	32.80	16.64	49.44	74.00	-24.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

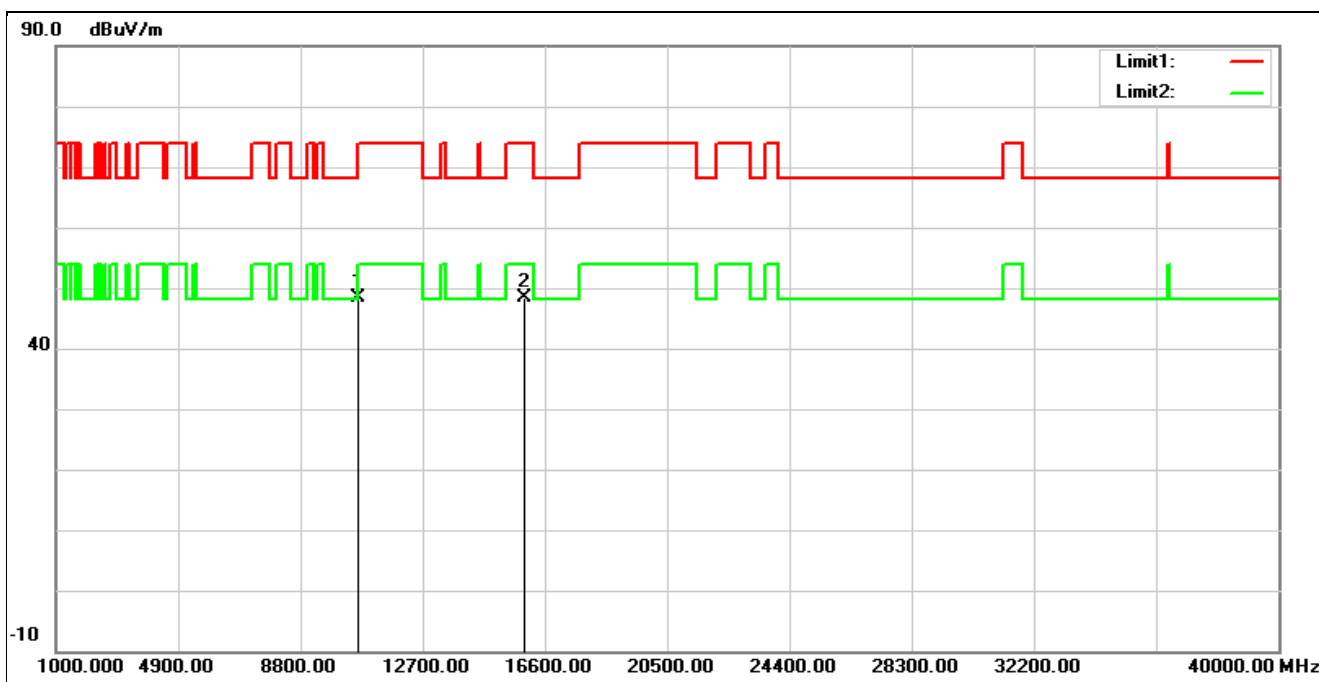


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	33.94	14.40	48.34	74.00	-25.66	peak
2	15930.000	31.64	16.64	48.28	74.00	-25.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

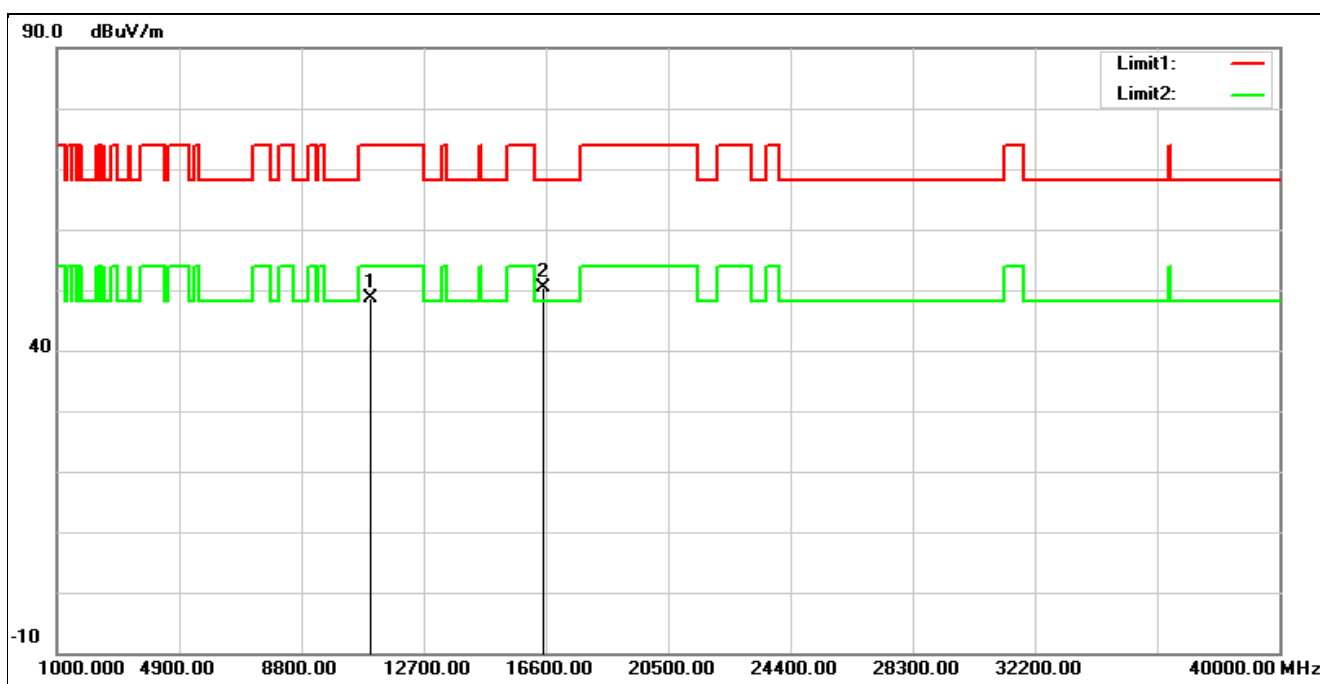


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.80	14.75	48.55	74.00	-25.45	peak
2*	16530.000	32.55	17.92	50.47	68.20	-17.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

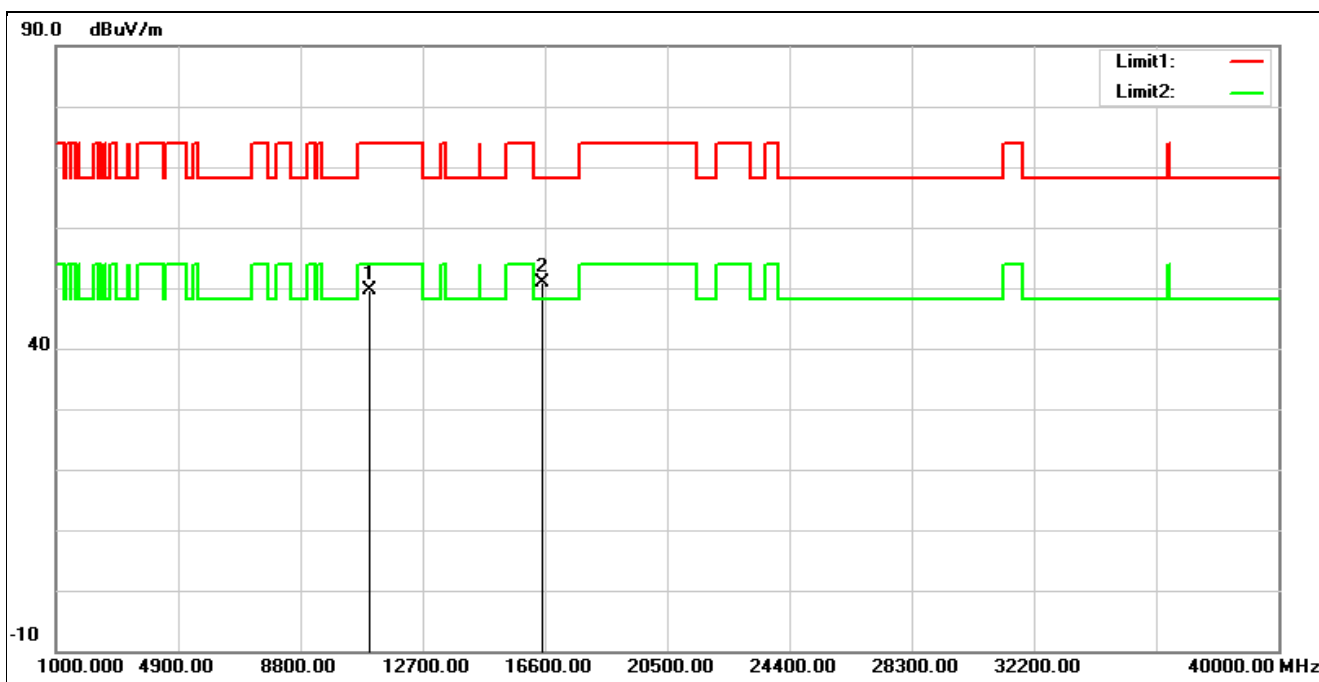


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.98	14.75	49.73	74.00	-24.27	peak
2*	16530.000	32.89	17.92	50.81	68.20	-17.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

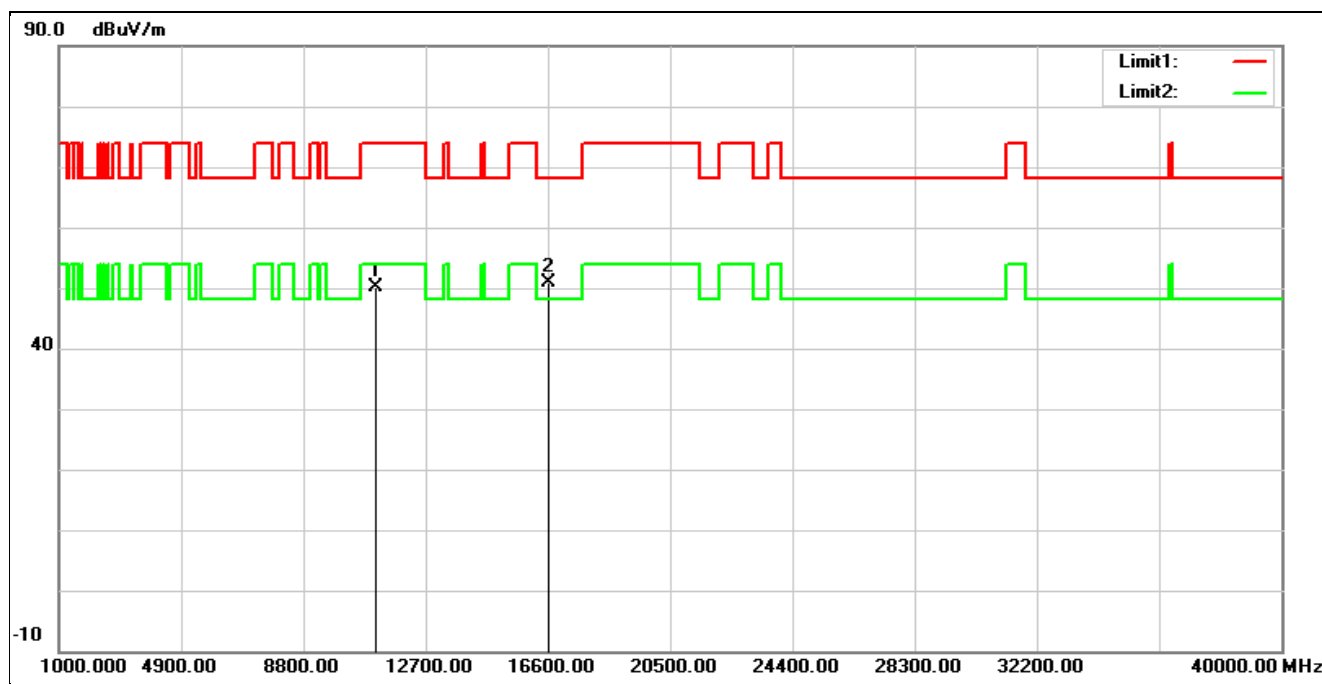


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.21	14.82	50.03	74.00	-23.97	peak
2*	16650.000	32.41	18.49	50.90	68.20	-17.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

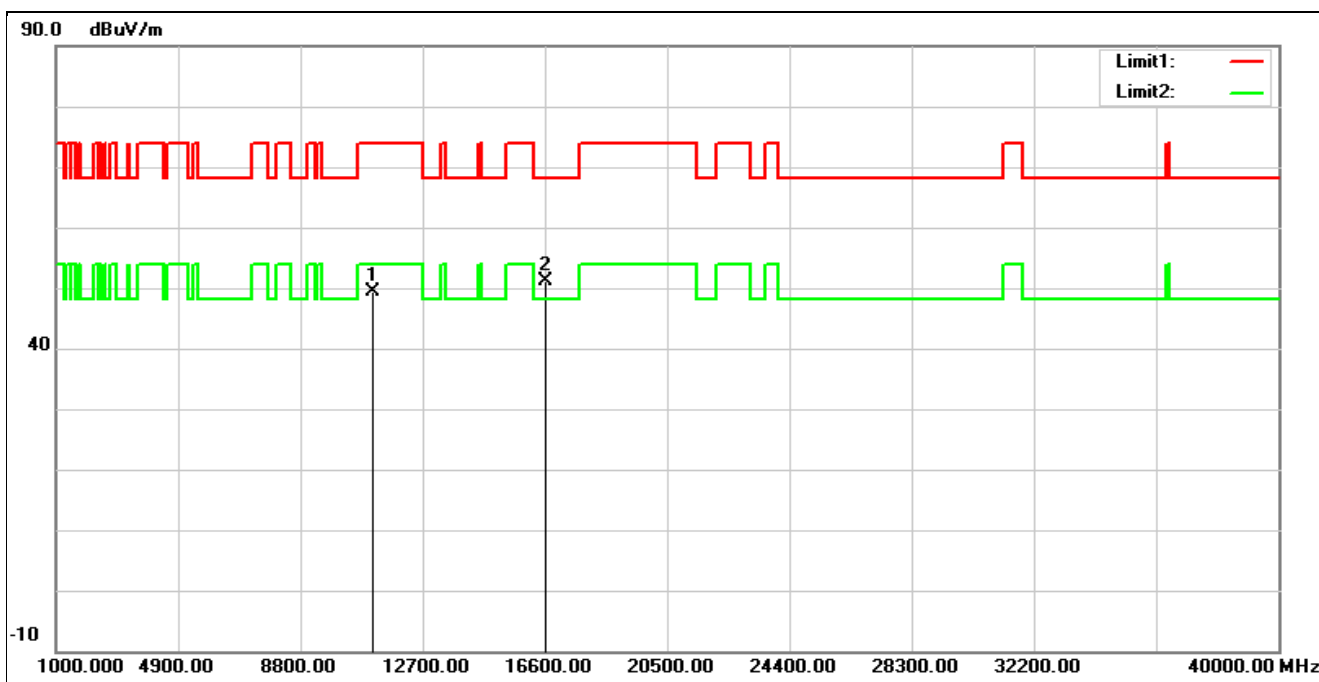


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.58	14.82	49.40	74.00	-24.60	peak
2*	16650.000	32.66	18.49	51.15	68.20	-17.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

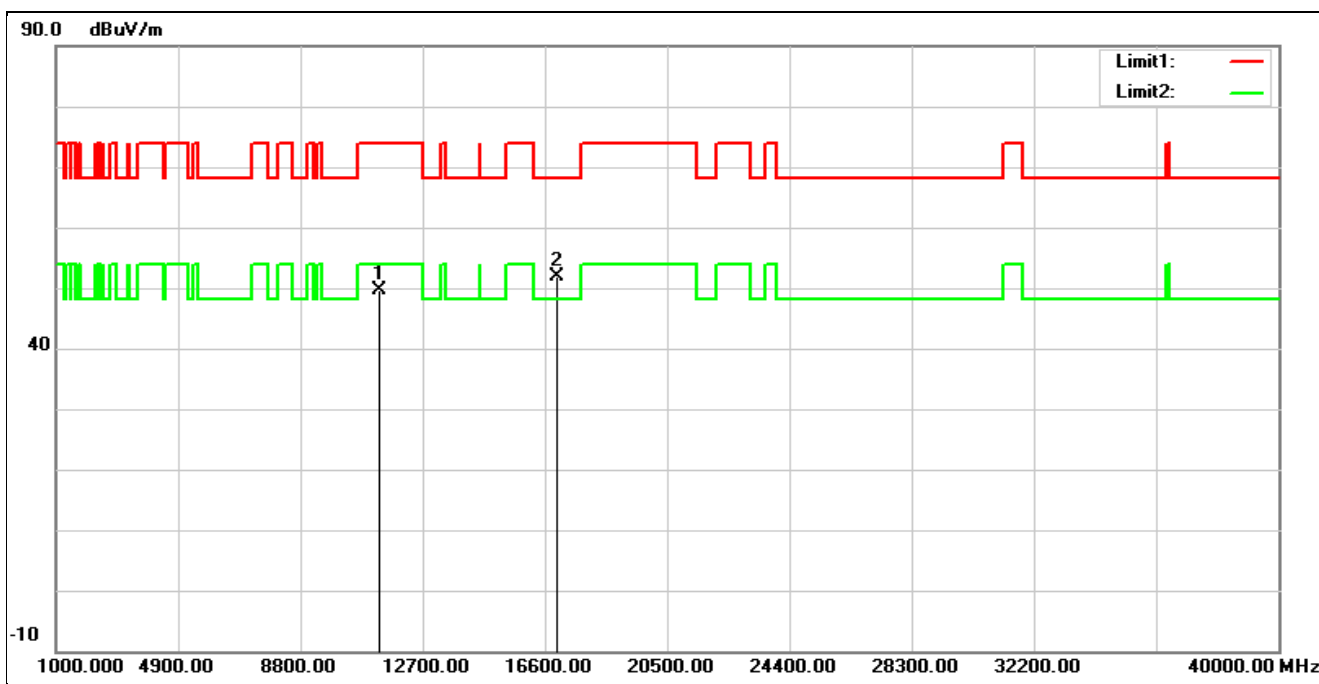


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.79	14.84	49.63	74.00	-24.37	peak
2*	17010.000	31.77	20.09	51.86	68.20	-16.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

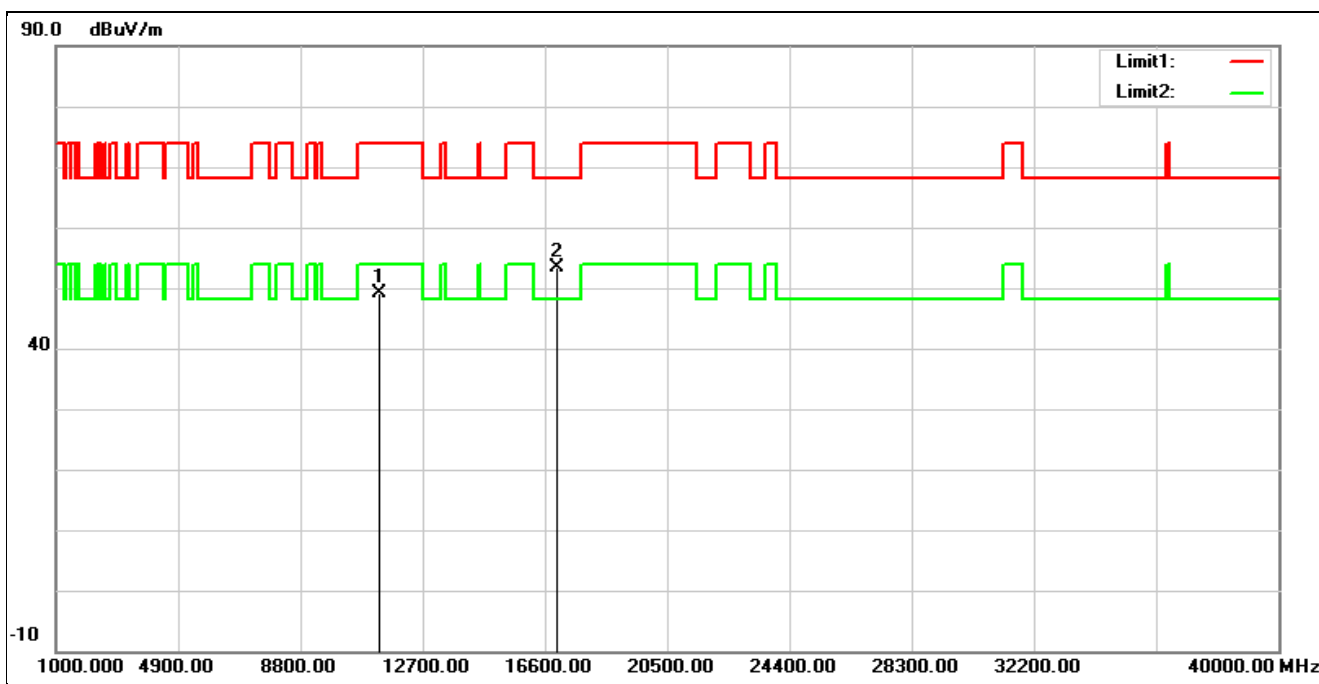


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.37	14.84	49.21	74.00	-24.79	peak
2*	17010.000	33.31	20.09	53.40	68.20	-14.80	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

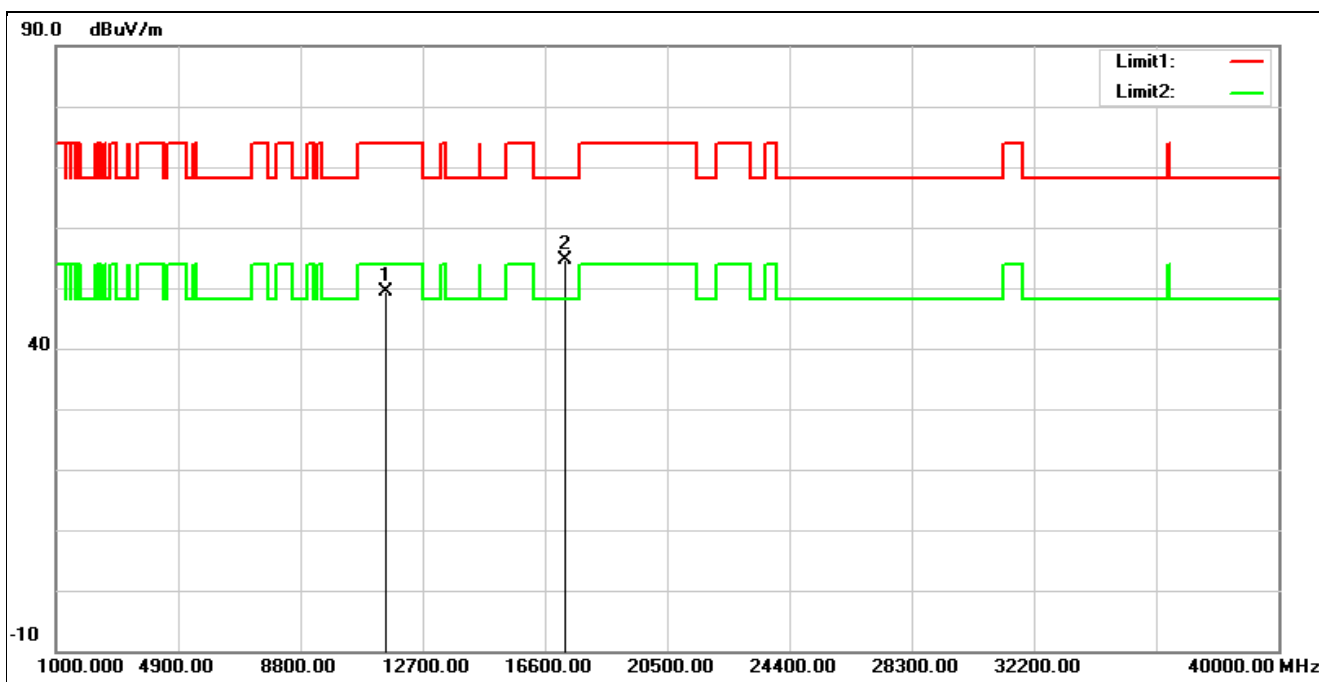


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.07	15.42	49.49	74.00	-24.51	peak
2*	17265.000	32.25	22.32	54.57	68.20	-13.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

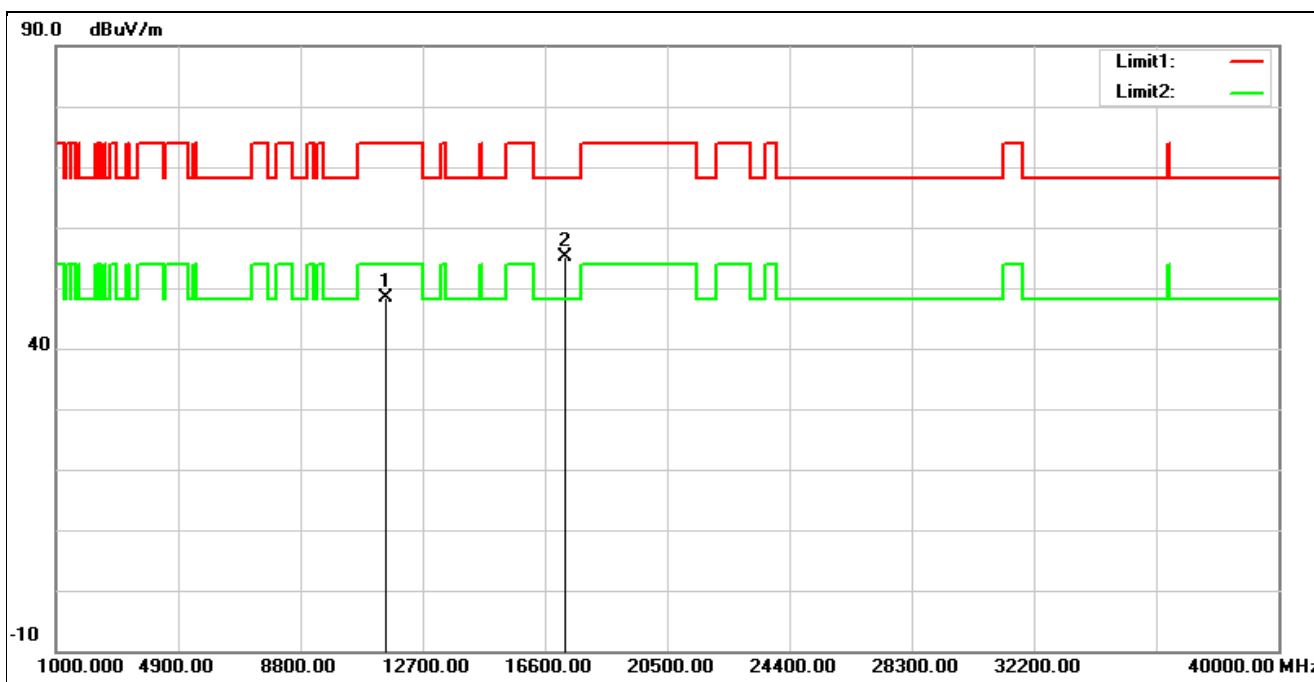


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	32.90	15.42	48.32	74.00	-25.68	peak
2*	17265.000	32.72	22.32	55.04	68.20	-13.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

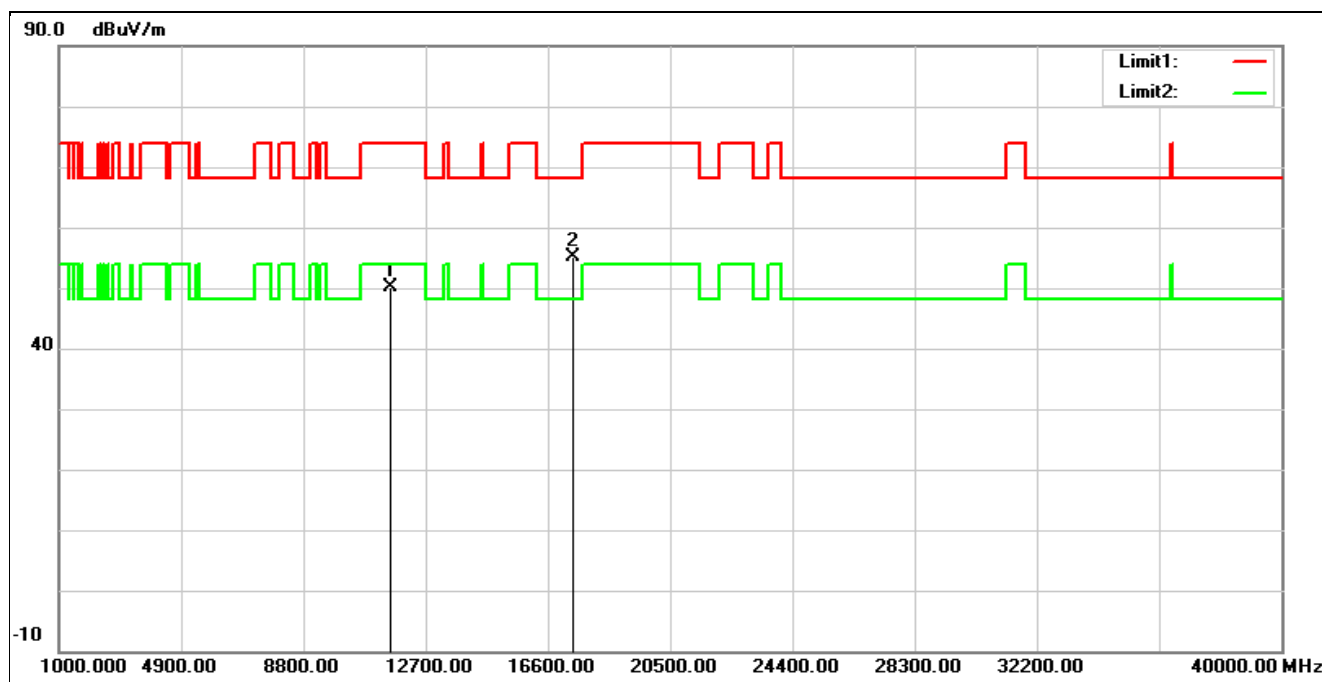

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.91	15.14	50.05	74.00	-23.95	peak
2*	17385.000	31.91	23.11	55.02	68.20	-13.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

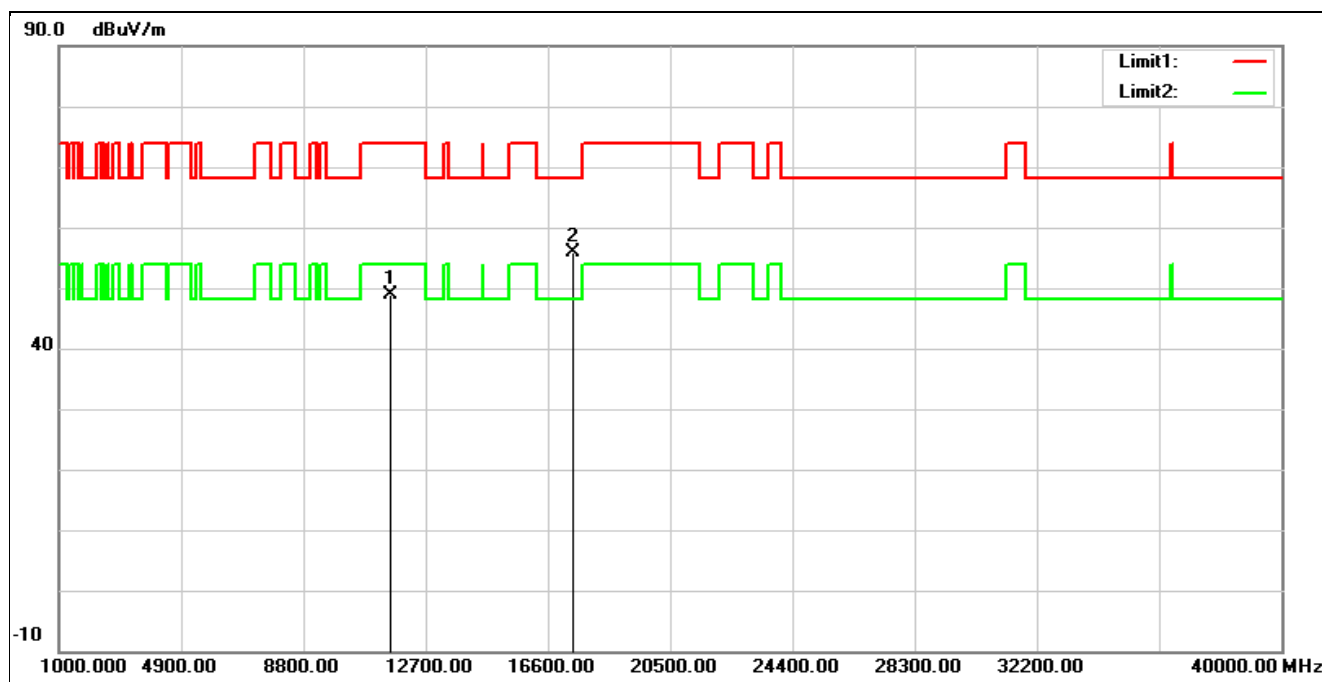


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.80	15.14	48.94	74.00	-25.06	peak
2*	17385.000	32.89	23.11	56.00	68.20	-12.20	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

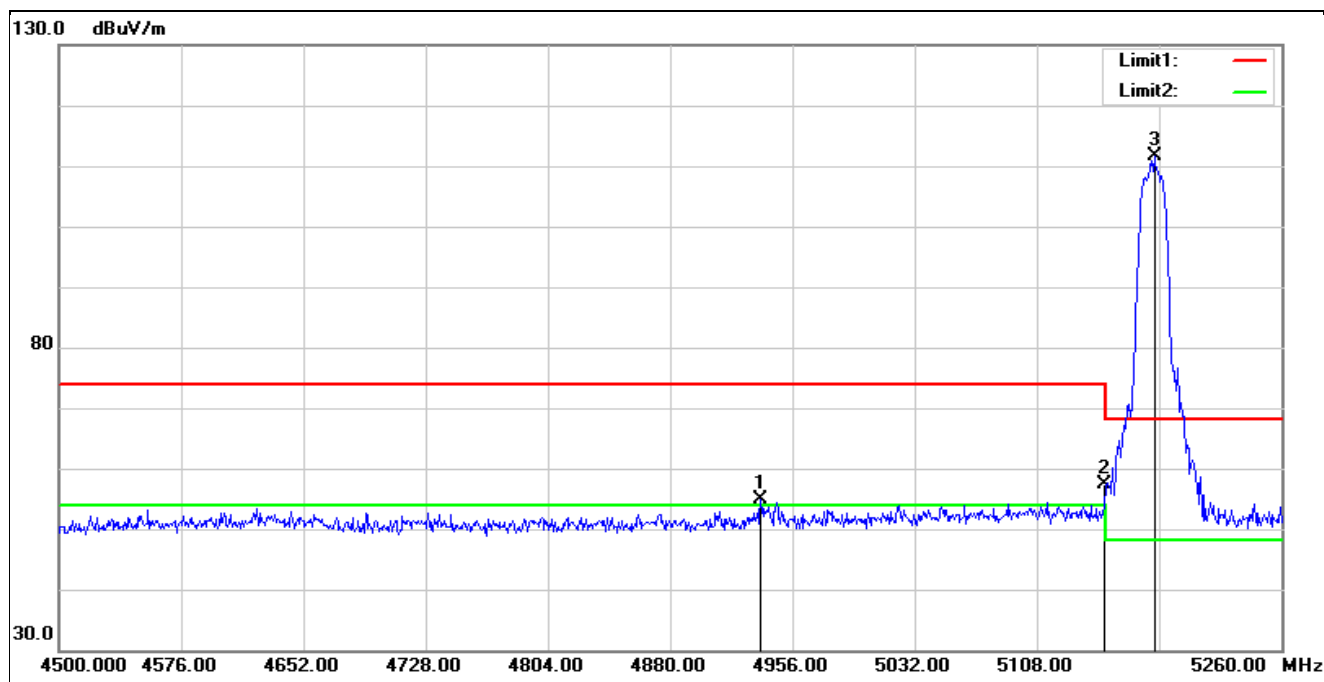


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4936.240	54.37	0.51	54.88	74.00	-19.12	peak
2	5150.000	55.98	1.42	57.40	74.00	-16.60	peak
3*	5180.960	110.33	1.34	111.67	68.20	43.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

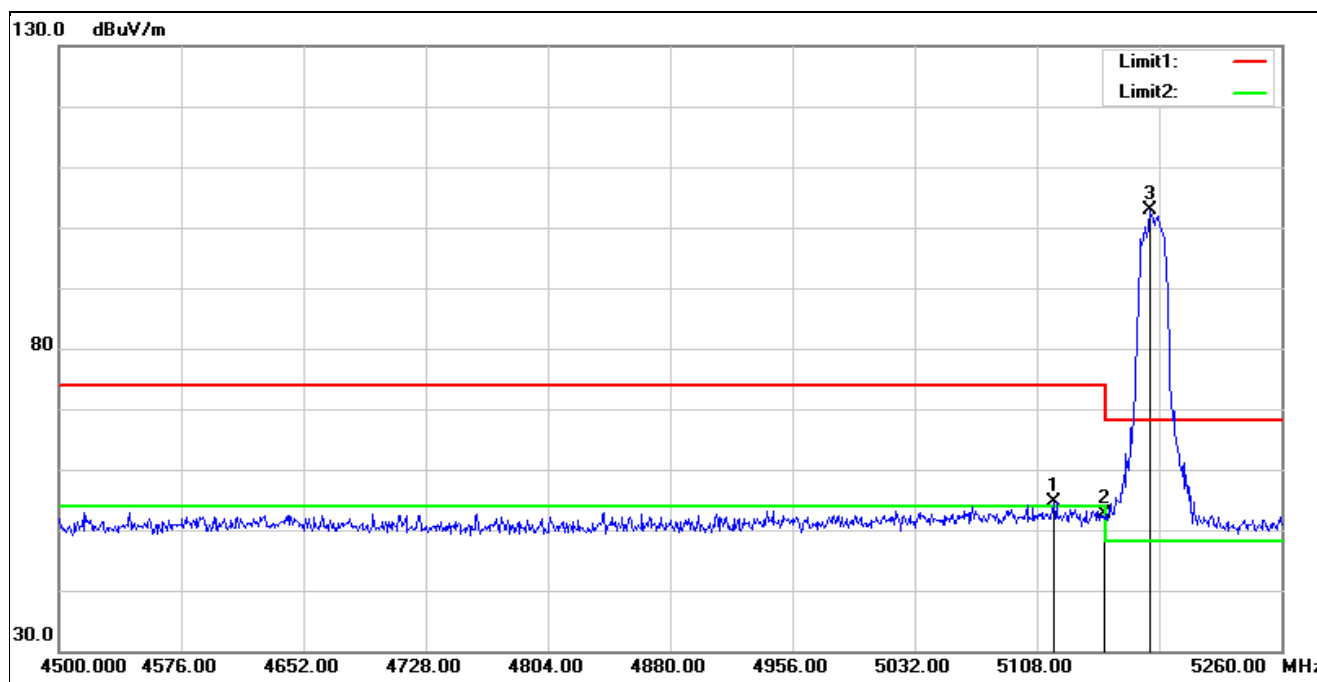


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.640	53.21	1.38	54.59	74.00	-19.41	peak
2	5150.000	51.09	1.42	52.51	74.00	-21.49	peak
3*	5177.920	101.45	1.35	102.80	68.20	34.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

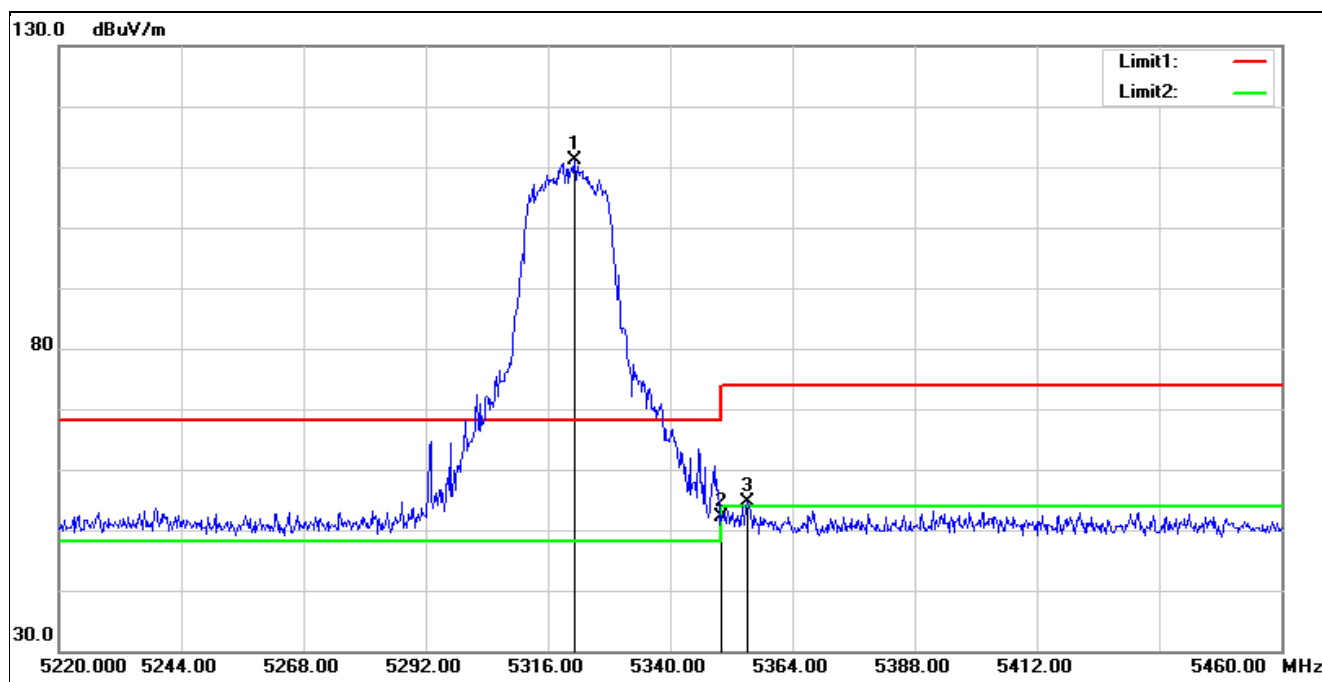


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5321.280	110.17	0.98	111.15	68.20	42.95	peak
2	5350.000	51.00	1.08	52.08	74.00	-21.92	peak
3	5355.120	53.46	1.13	54.59	74.00	-19.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

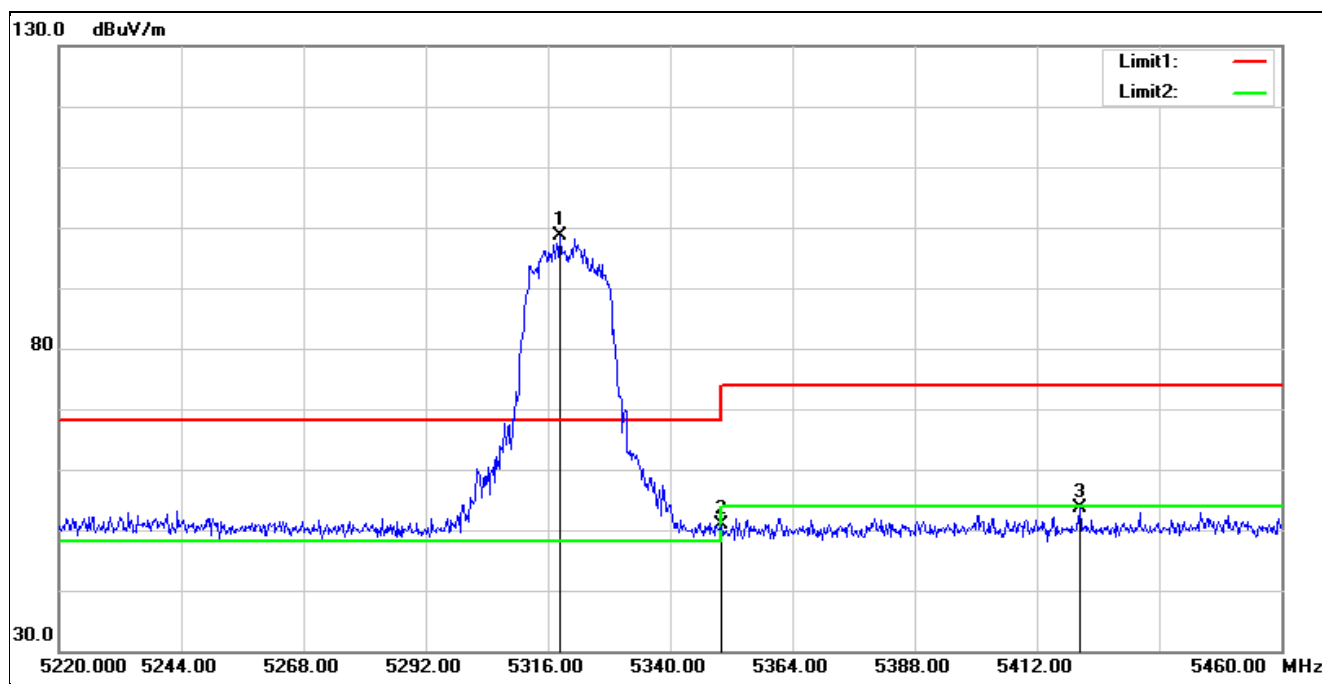


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.400	97.75	0.98	98.73	68.20	30.53	peak
2	5350.000	49.80	1.08	50.88	74.00	-23.12	peak
3	5420.400	51.93	1.61	53.54	74.00	-20.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

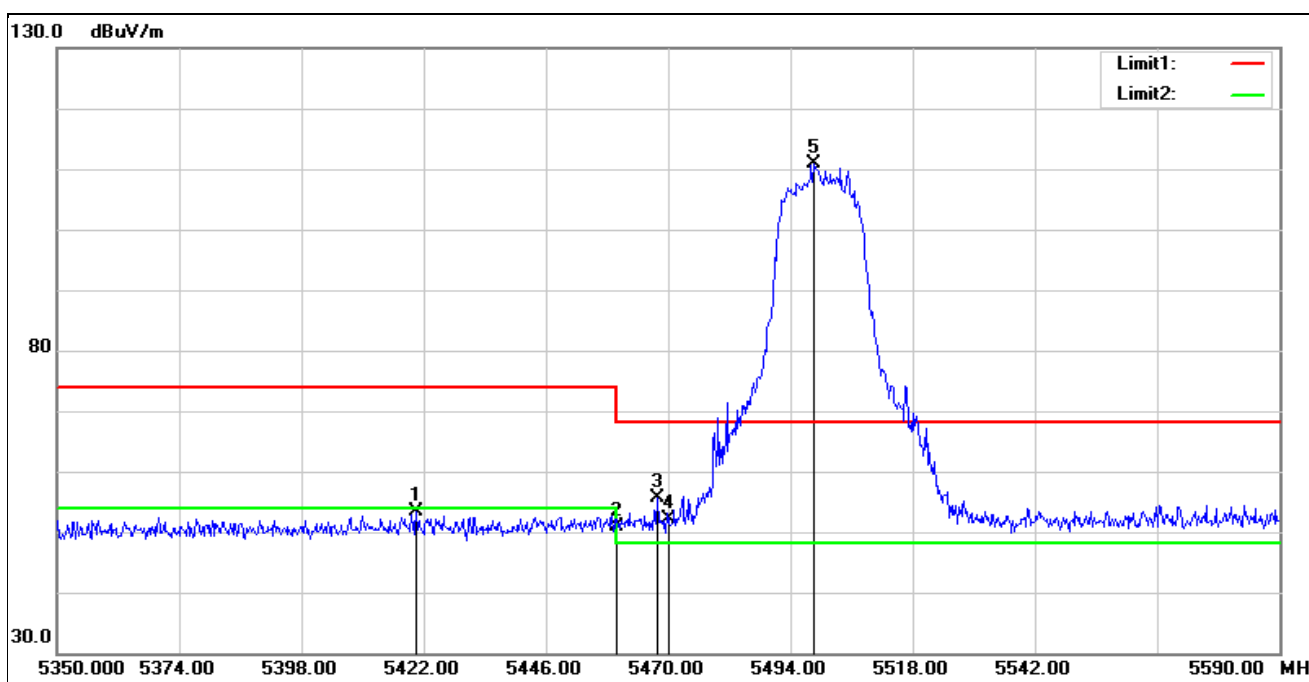


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.560	51.81	1.61	53.42	74.00	-20.58	peak
2	5460.000	49.26	1.73	50.99	74.00	-23.01	peak
3	5467.840	53.85	1.74	55.59	68.20	-12.61	peak
4	5470.000	50.32	1.74	52.06	68.20	-16.14	peak
5*	5498.560	109.17	1.78	110.95	68.20	42.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

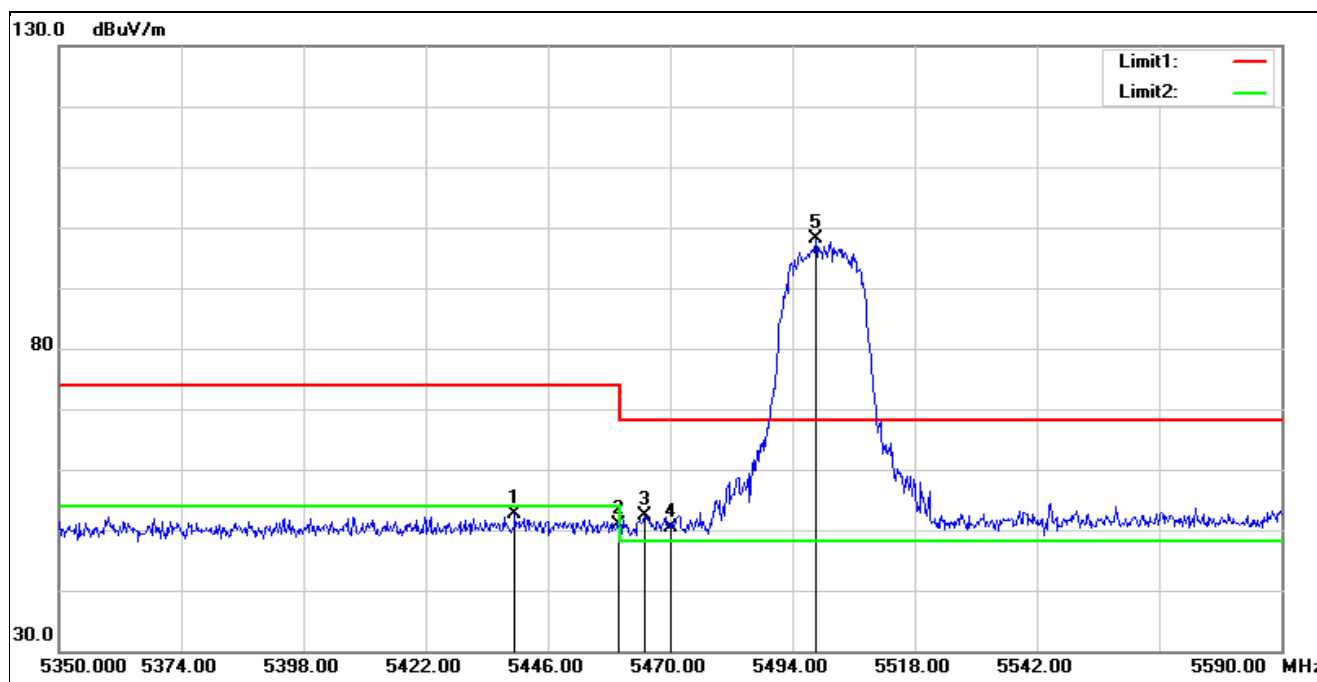


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.520	50.92	1.68	52.60	74.00	-21.40	peak
2	5460.000	49.13	1.73	50.86	74.00	-23.14	peak
3	5464.960	50.77	1.73	52.50	68.20	-15.70	peak
4	5470.000	48.63	1.74	50.37	68.20	-17.83	peak
5*	5498.560	96.38	1.78	98.16	68.20	29.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

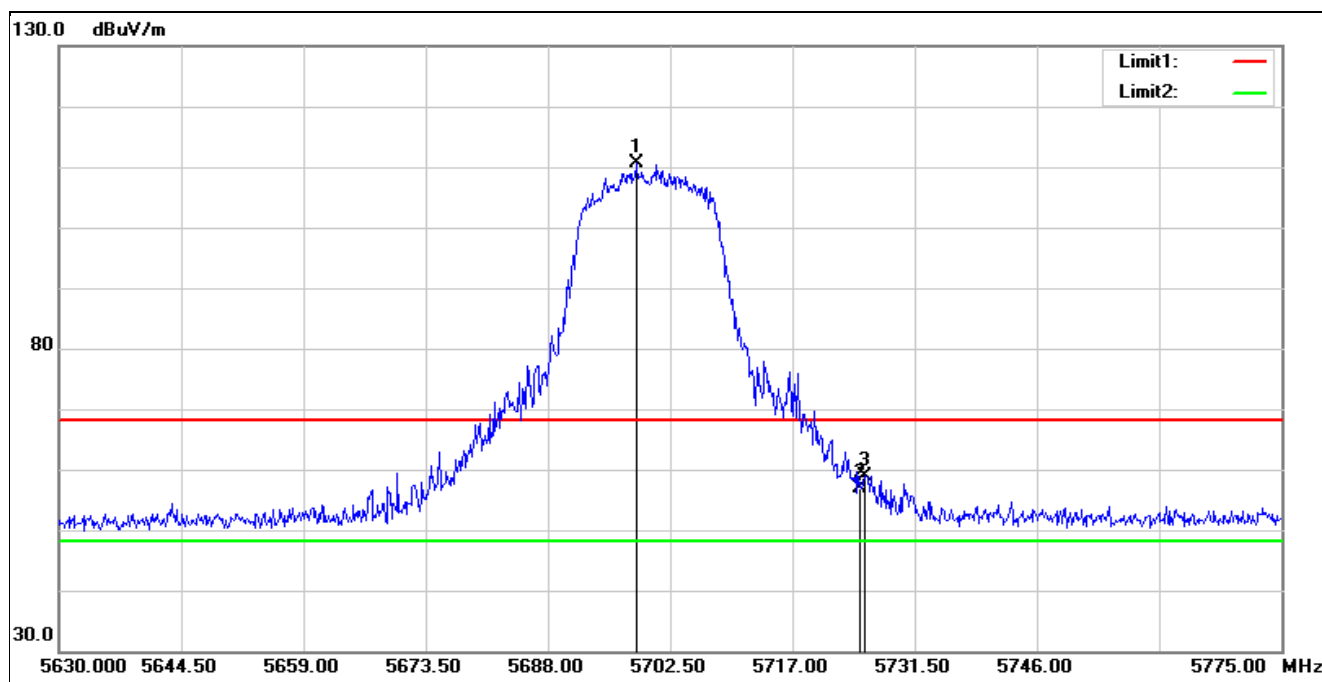


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5698.440	108.45	2.06	110.51	68.20	42.31	peak
2	5725.000	54.49	2.30	56.79	68.20	-11.41	peak
3	5725.555	56.65	2.30	58.95	68.20	-9.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

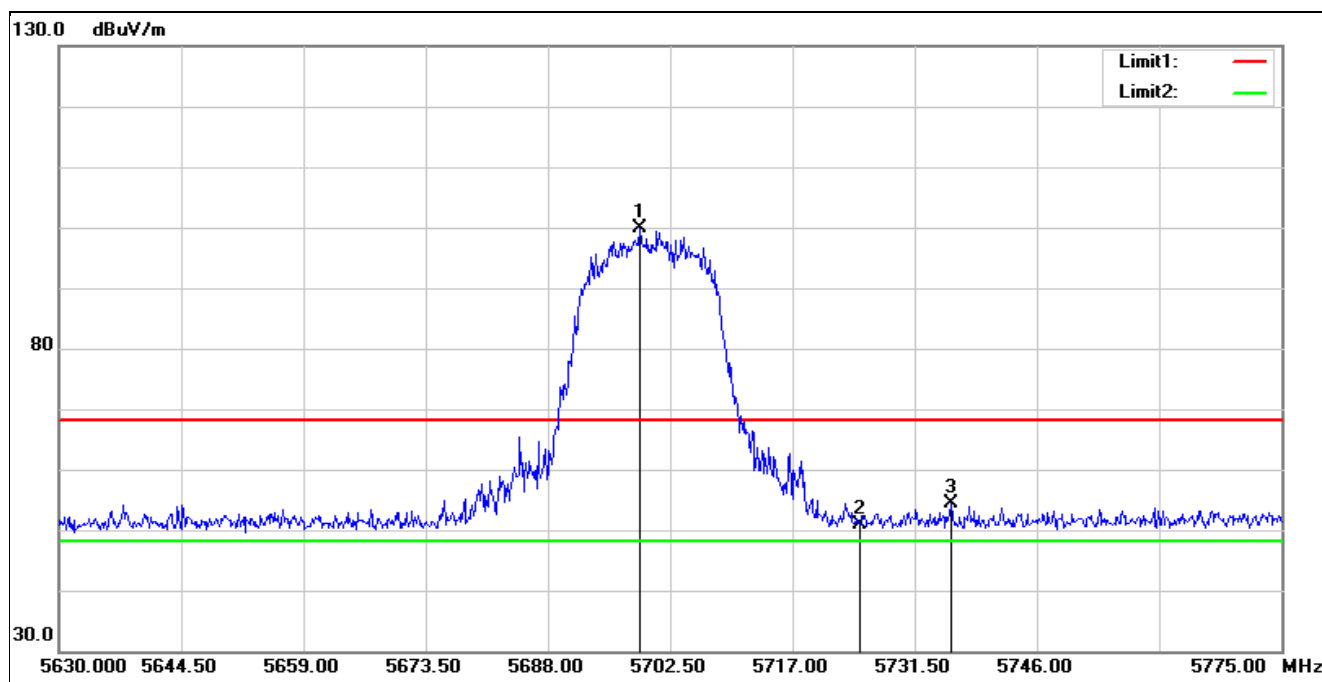


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5698.875	97.91	2.06	99.97	68.20	31.77	peak
2	5725.000	48.67	2.30	50.97	68.20	-17.23	peak
3	5735.850	52.01	2.41	54.42	68.20	-13.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

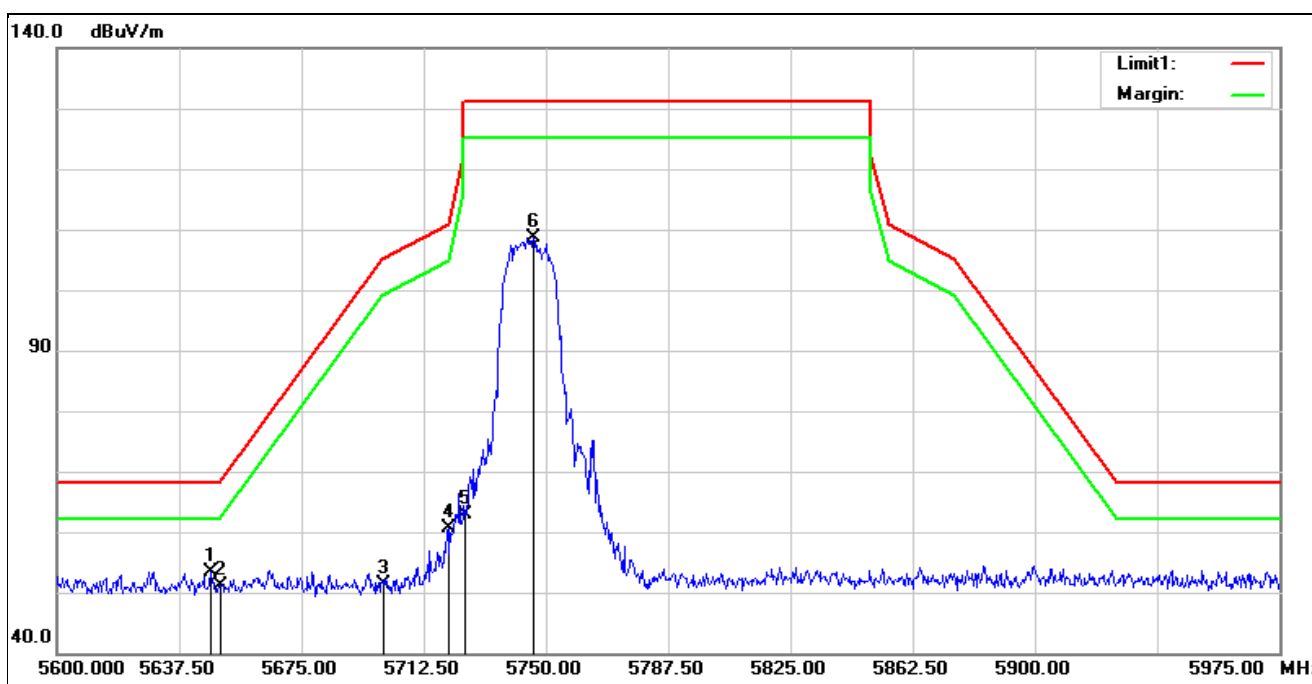


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5647.250	51.53	1.91	53.44	68.20	-14.76	peak
2	5650.000	49.17	1.90	51.07	68.20	-17.13	peak
3	5700.000	49.21	2.06	51.27	105.20	-53.93	peak
4	5720.000	58.38	2.26	60.64	110.80	-50.16	peak
5	5725.000	60.65	2.30	62.95	122.20	-59.25	peak
6	5746.250	106.19	2.51	108.70	131.20	-22.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

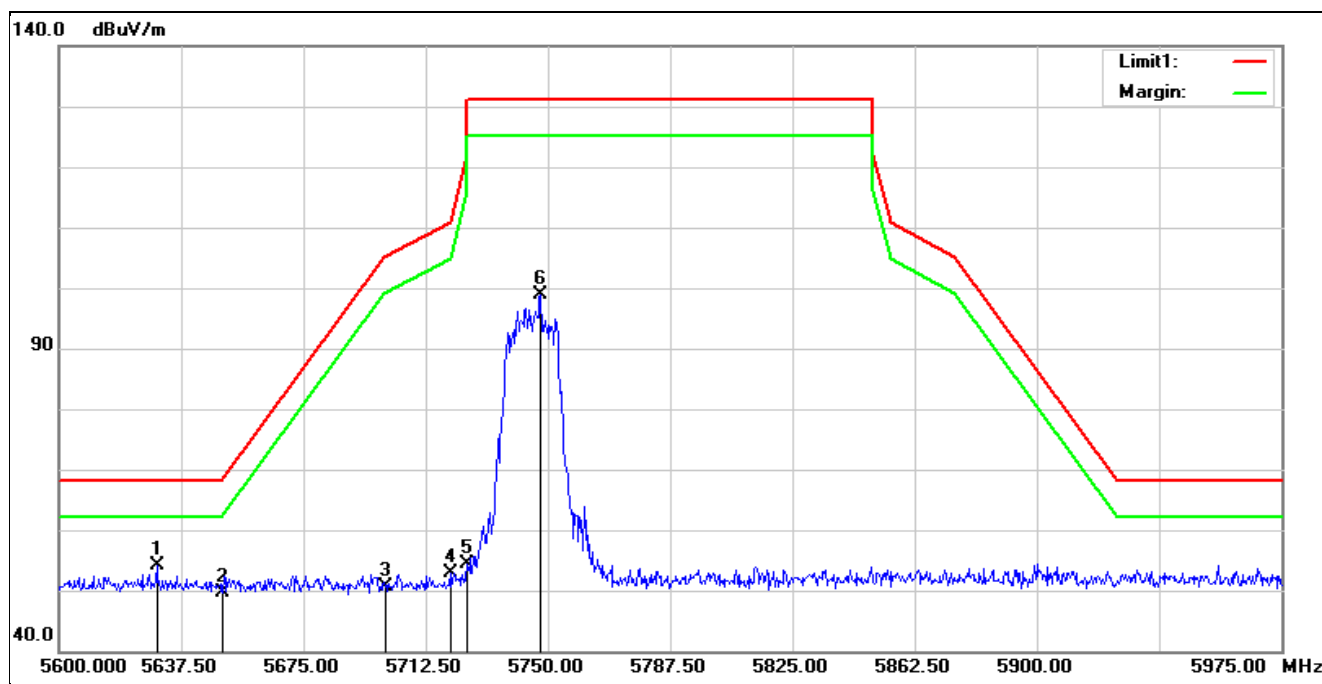


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5630.000	52.18	1.94	54.12	68.20	-14.08	peak
2	5650.000	47.68	1.90	49.58	68.20	-18.62	peak
3	5700.000	48.59	2.06	50.65	105.20	-54.55	peak
4	5720.000	50.50	2.26	52.76	110.80	-58.04	peak
5	5725.000	52.17	2.30	54.47	122.20	-67.73	peak
6	5747.750	96.27	2.52	98.79	131.20	-32.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

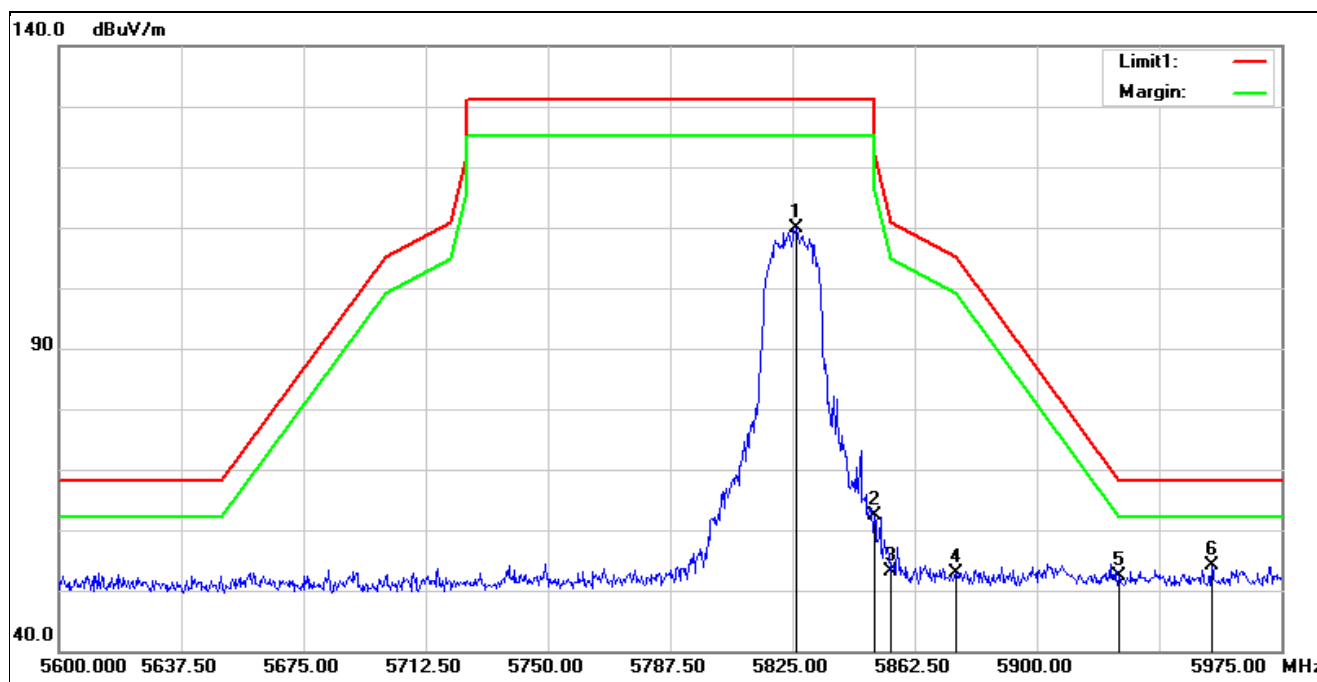


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.125	107.06	2.89	109.95	131.20	-21.25	peak
2	5850.000	59.48	2.98	62.46	122.20	-59.74	peak
3	5855.000	50.14	3.01	53.15	110.80	-57.65	peak
4	5875.000	49.74	3.07	52.81	105.20	-52.39	peak
5	5925.000	49.38	3.10	52.48	68.20	-15.72	peak
6*	5953.625	51.08	3.05	54.13	68.20	-14.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

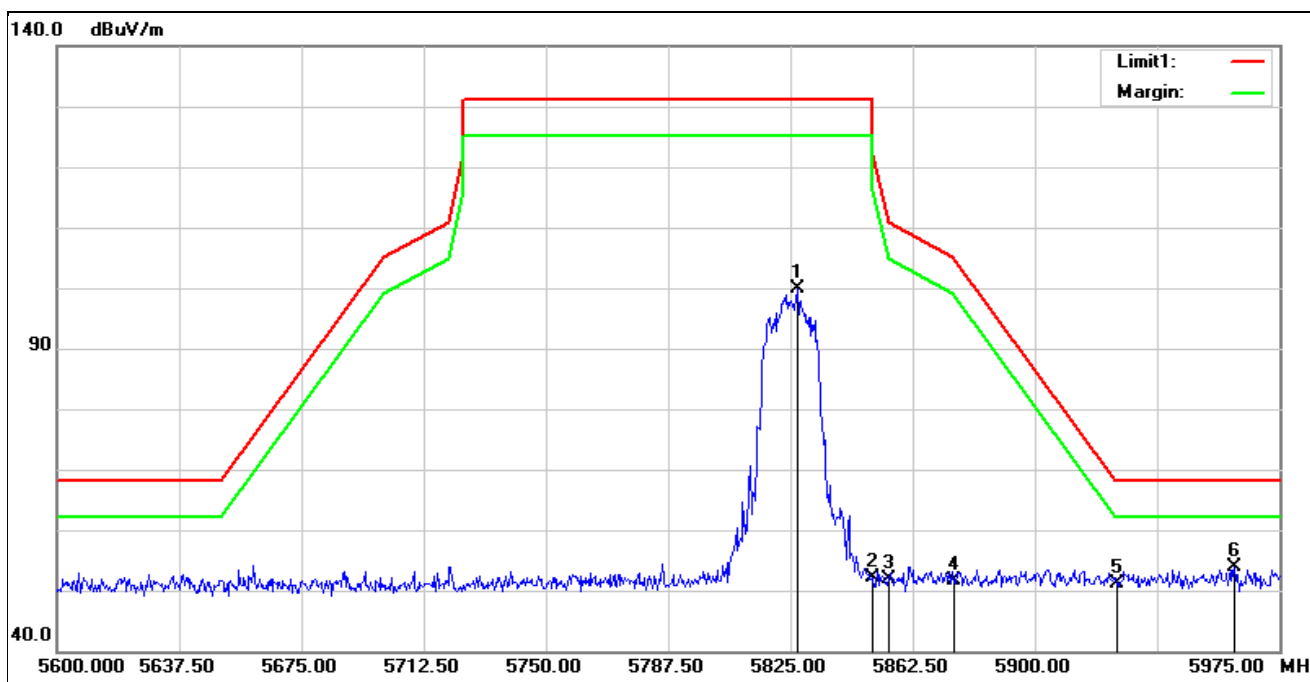


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5827.250	96.86	2.91	99.77	131.20	-31.43	peak
2	5850.000	49.12	2.98	52.10	122.20	-70.10	peak
3	5855.000	48.86	3.01	51.87	110.80	-58.93	peak
4	5875.000	48.65	3.07	51.72	105.20	-53.48	peak
5	5925.000	48.09	3.10	51.19	68.20	-17.01	peak
6*	5961.125	50.78	3.08	53.86	68.20	-14.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

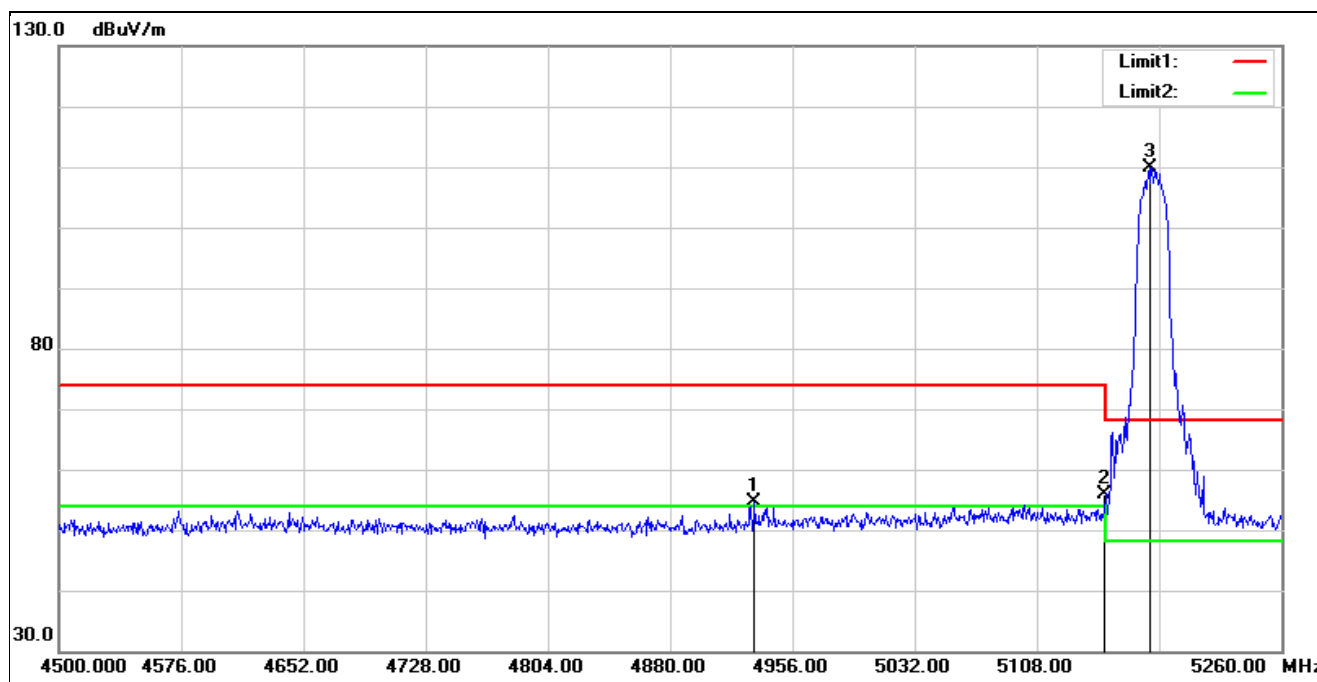


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4932.440	54.24	0.51	54.75	74.00	-19.25	peak
2	5150.000	54.58	1.42	56.00	74.00	-18.00	peak
3*	5178.680	108.46	1.35	109.81	68.20	41.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

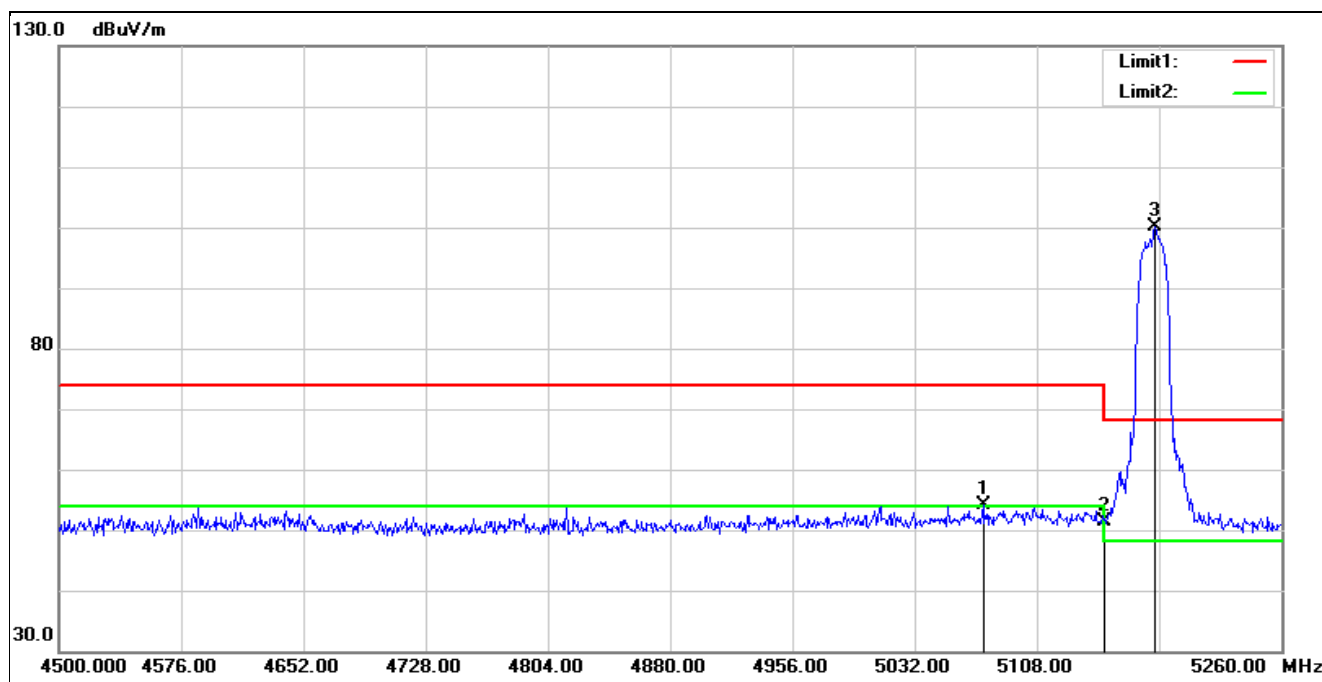


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5074.560	52.91	1.21	54.12	74.00	-19.88	peak
2	5150.000	49.95	1.42	51.37	74.00	-22.63	peak
3*	5181.720	98.85	1.33	100.18	68.20	31.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

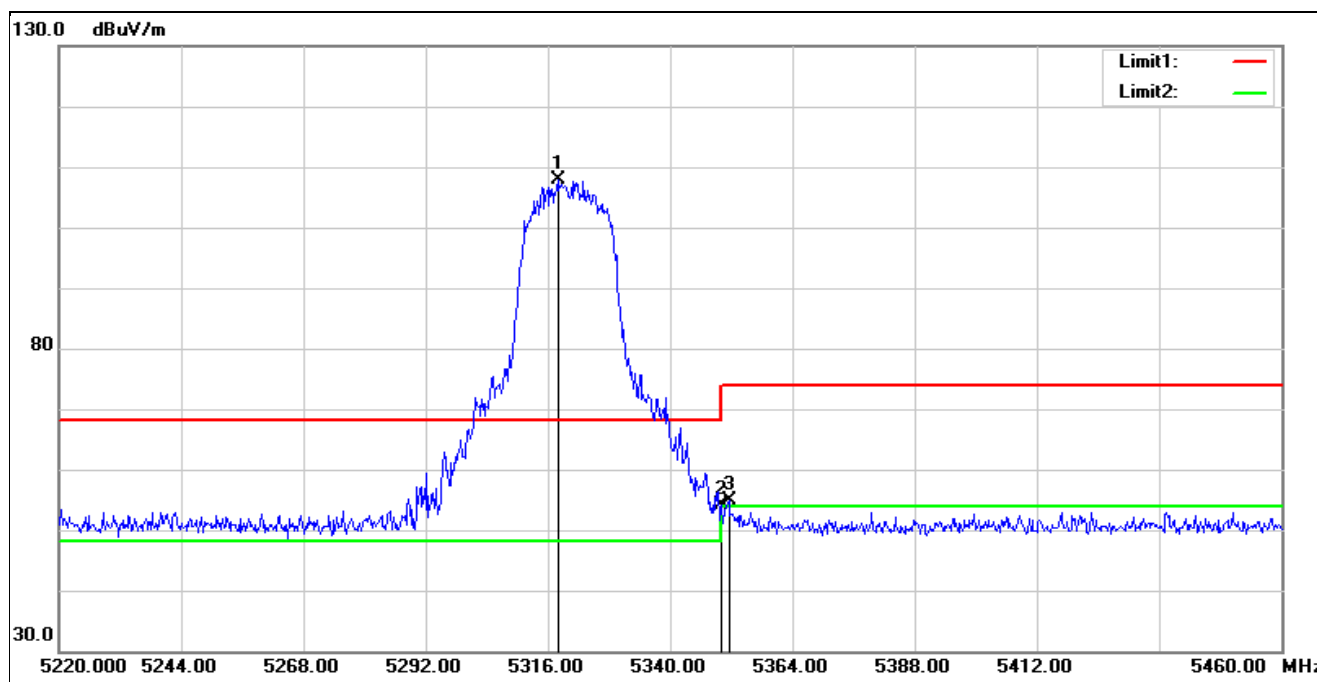


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.920	106.81	0.98	107.79	68.20	39.59	peak
2	5350.000	53.15	1.08	54.23	74.00	-19.77	peak
3	5351.520	53.67	1.09	54.76	74.00	-19.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

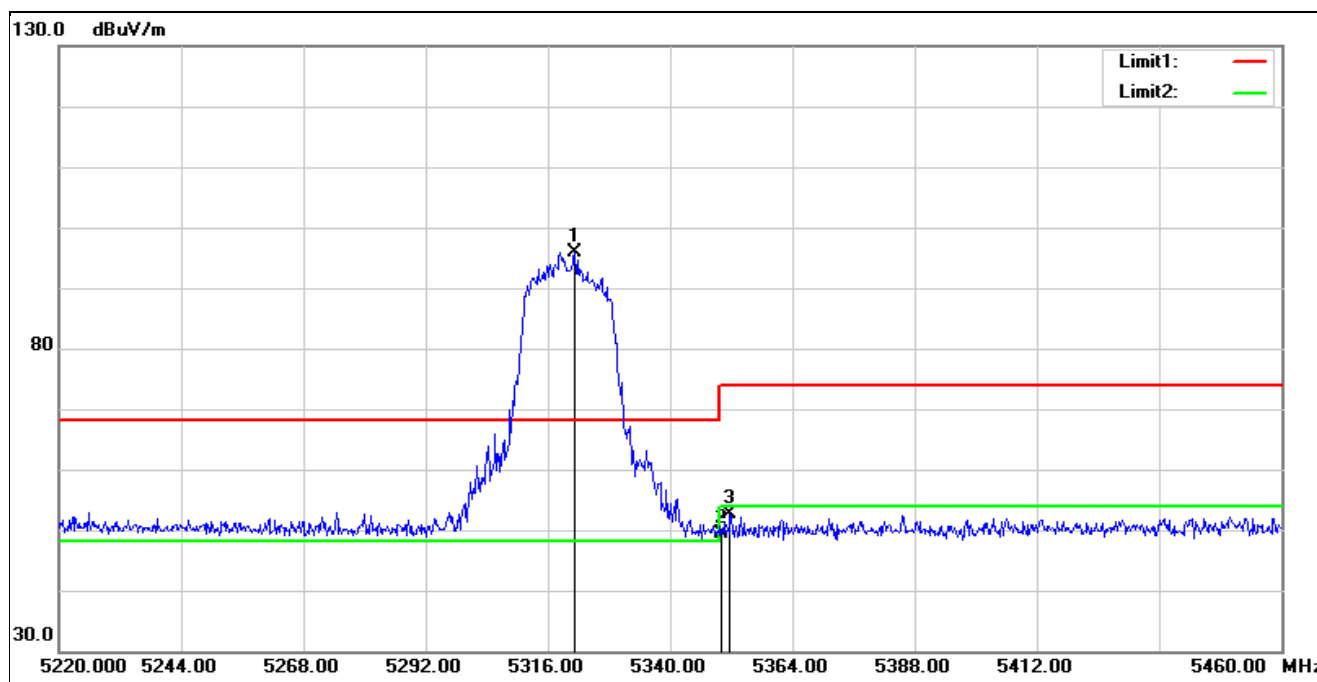


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5321.280	94.95	0.98	95.93	68.20	27.73	peak
2	5350.000	48.19	1.08	49.27	74.00	-24.73	peak
3	5351.760	51.65	1.09	52.74	74.00	-21.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

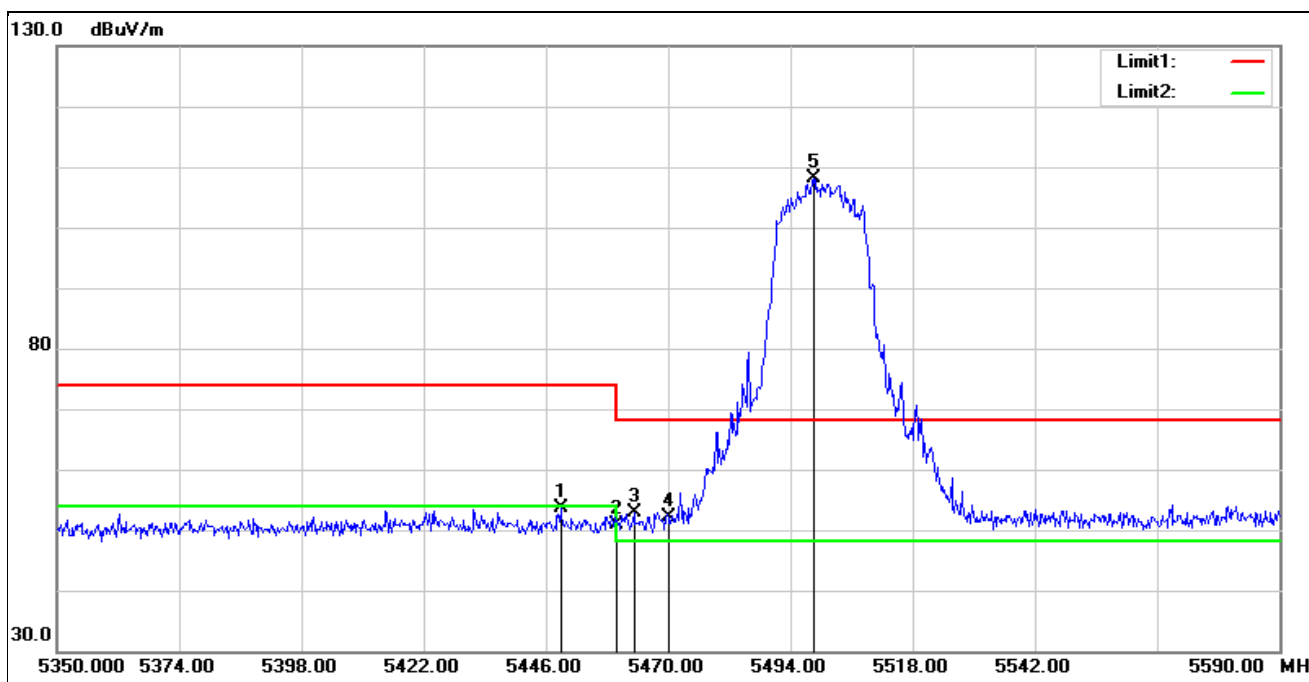


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.880	51.95	1.71	53.66	74.00	-20.34	peak
2	5460.000	49.27	1.73	51.00	74.00	-23.00	peak
3	5463.280	51.19	1.73	52.92	68.20	-15.28	peak
4	5470.000	50.45	1.74	52.19	68.20	-16.01	peak
5*	5498.560	106.43	1.78	108.21	68.20	40.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

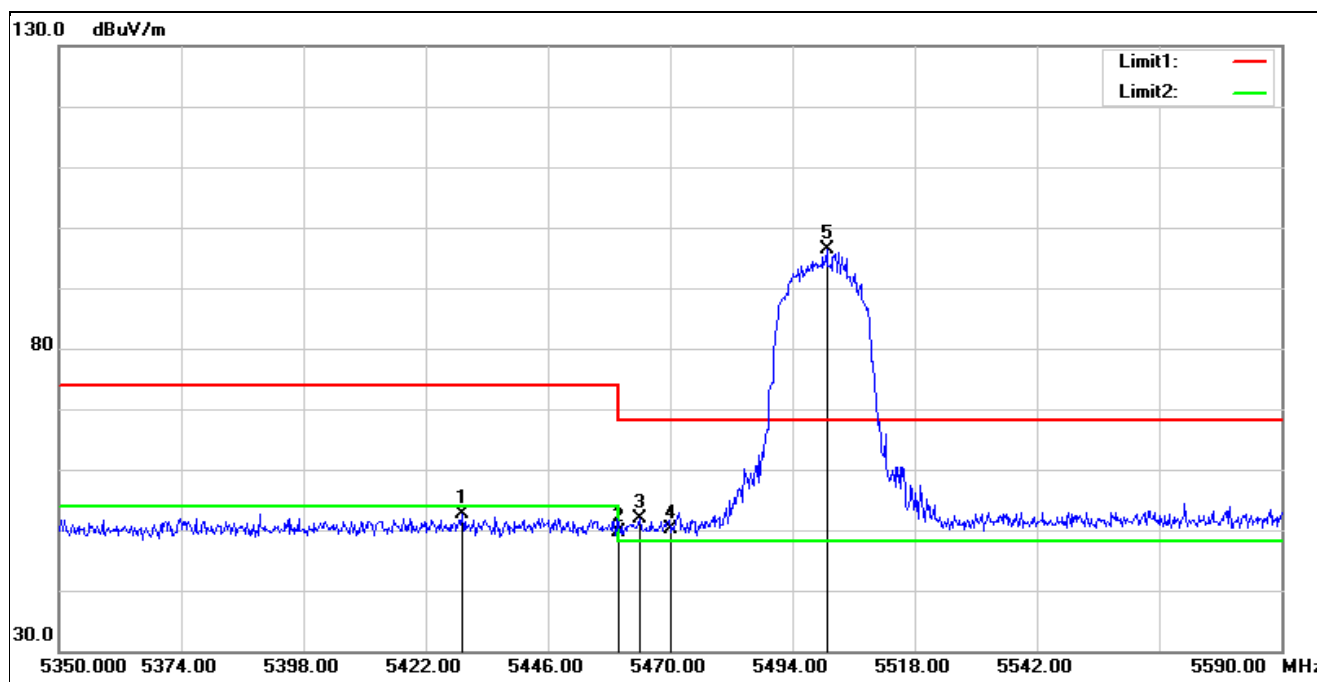


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.200	51.09	1.65	52.74	74.00	-21.26	peak
2	5460.000	47.94	1.73	49.67	74.00	-24.33	peak
3	5464.000	50.14	1.73	51.87	68.20	-16.33	peak
4	5470.000	48.43	1.74	50.17	68.20	-18.03	peak
5*	5500.720	94.50	1.78	96.28	68.20	28.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

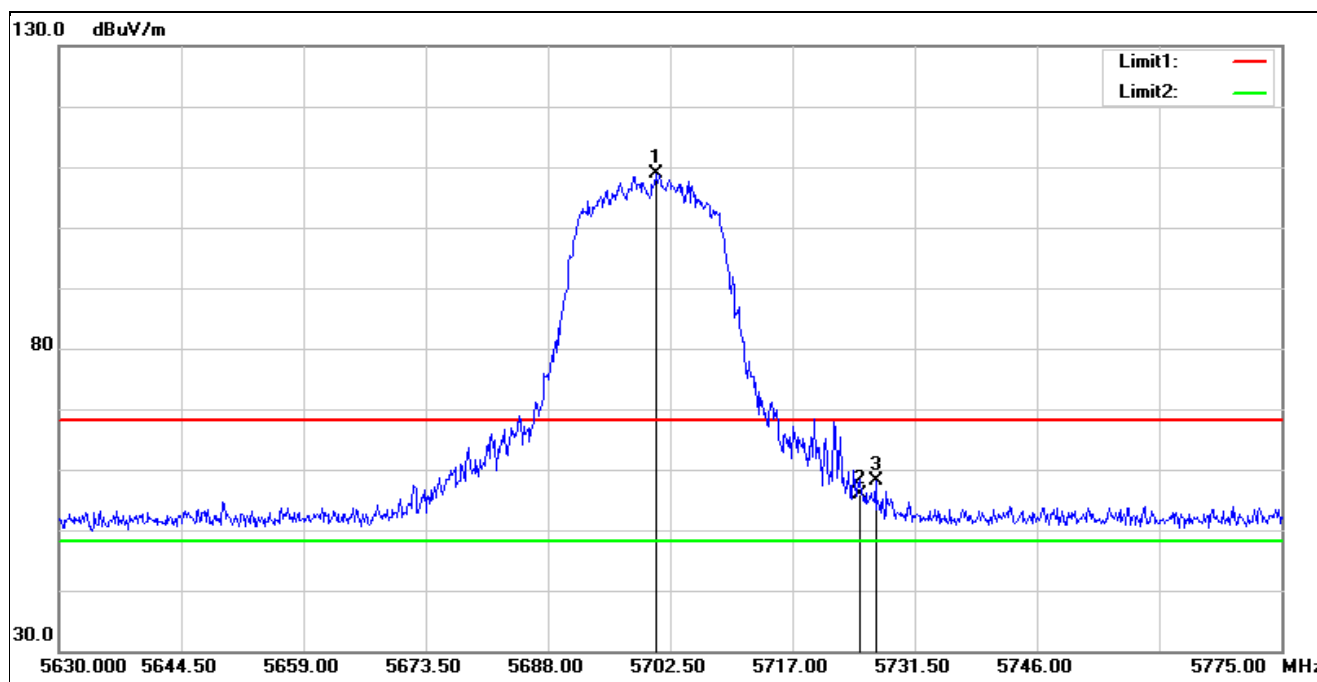


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5700.760	106.80	2.07	108.87	68.20	40.67	peak
2	5725.000	53.55	2.30	55.85	68.20	-12.35	peak
3	5726.860	55.75	2.31	58.06	68.20	-10.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

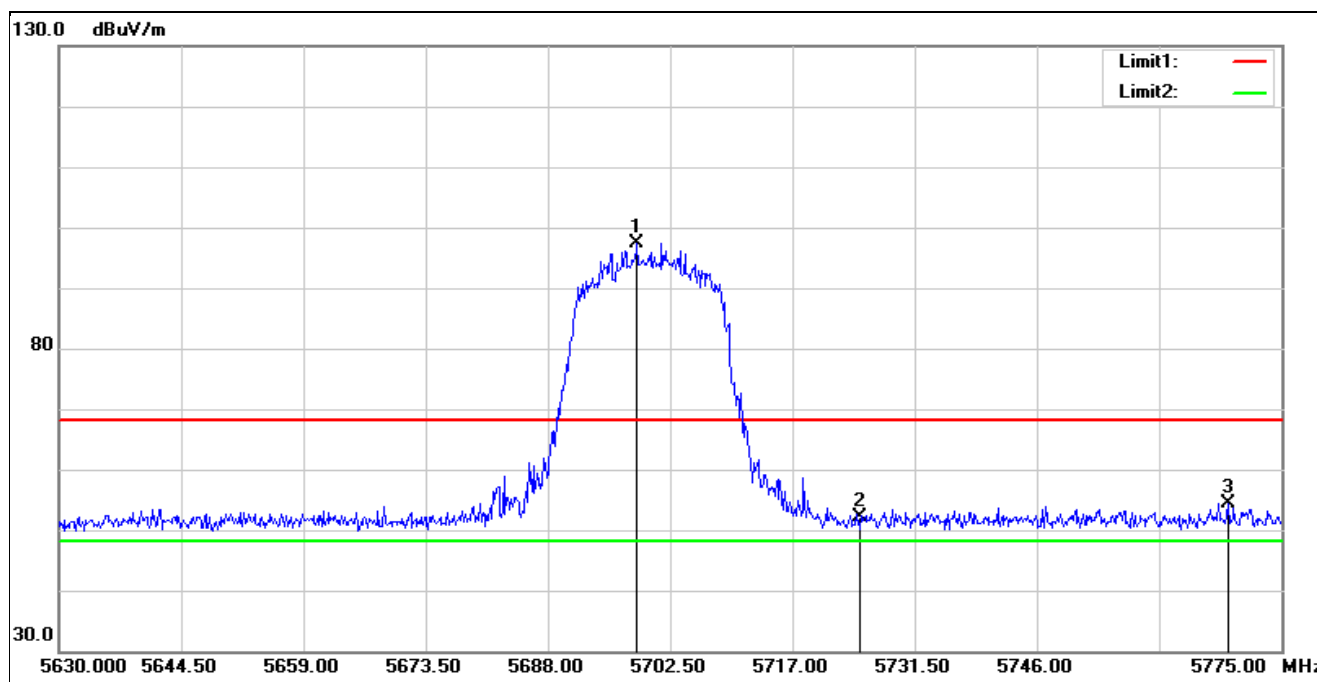


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5698.585	95.34	2.06	97.40	68.20	29.20	peak
2	5725.000	49.76	2.30	52.06	68.20	-16.14	peak
3	5768.620	51.69	2.63	54.32	68.20	-13.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

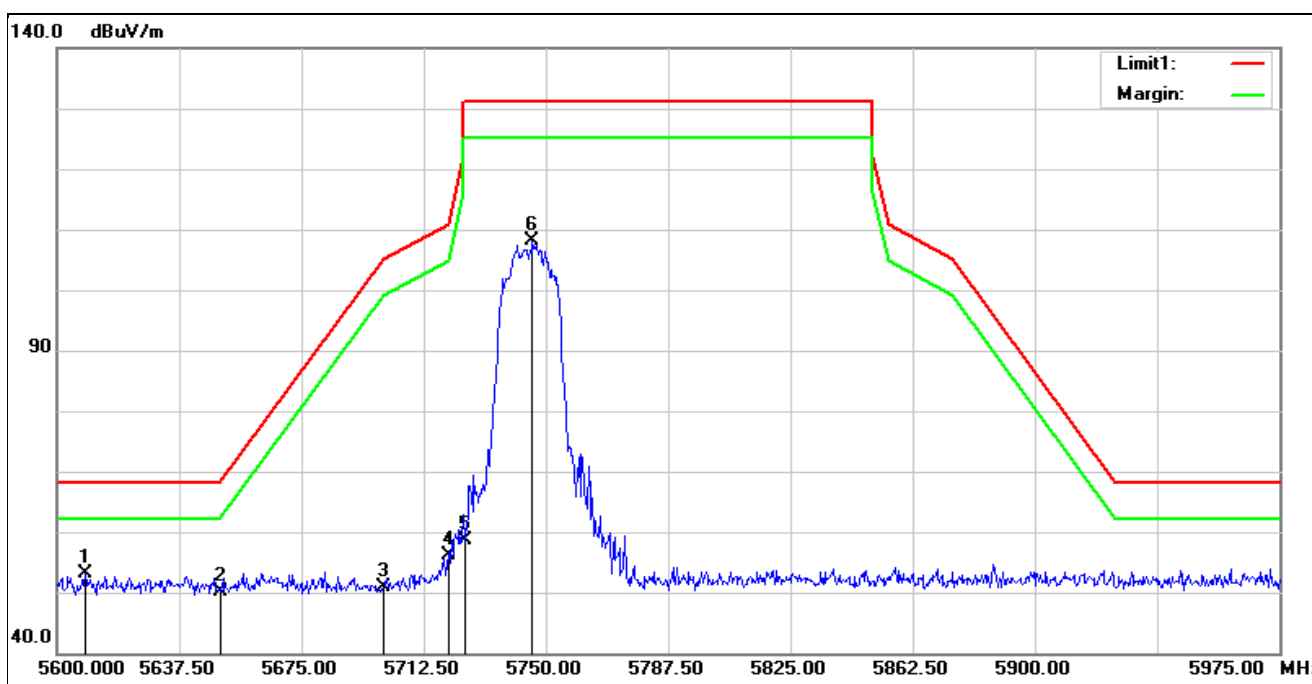


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5608.625	51.16	2.01	53.17	68.20	-15.03	peak
2	5650.000	48.23	1.90	50.13	68.20	-18.07	peak
3	5700.000	48.73	2.06	50.79	105.20	-54.41	peak
4	5720.000	53.93	2.26	56.19	110.80	-54.61	peak
5	5725.000	56.37	2.30	58.67	122.20	-63.53	peak
6	5745.875	105.62	2.51	108.13	131.20	-23.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

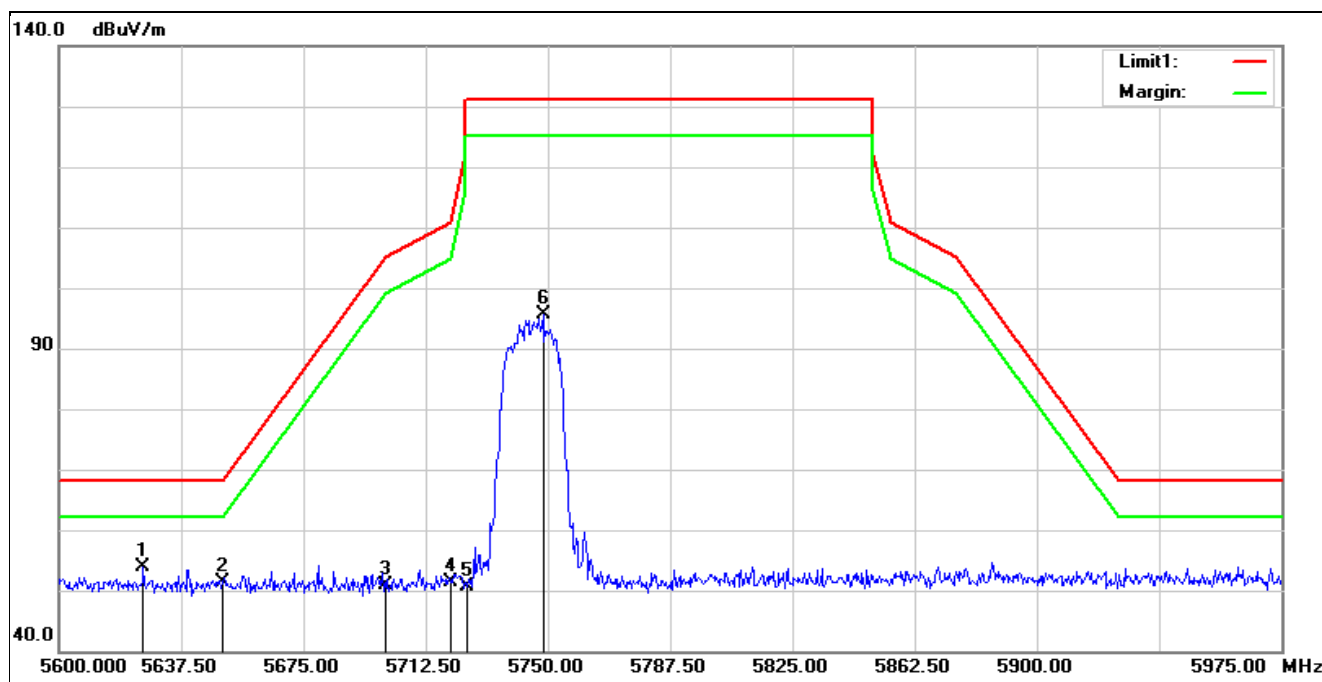


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5625.875	51.85	1.96	53.81	68.20	-14.39	peak
2	5650.000	49.52	1.90	51.42	68.20	-16.78	peak
3	5700.000	48.71	2.06	50.77	105.20	-54.43	peak
4	5720.000	49.01	2.26	51.27	110.80	-59.53	peak
5	5725.000	48.43	2.30	50.73	122.20	-71.47	peak
6	5748.500	93.22	2.53	95.75	131.20	-35.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

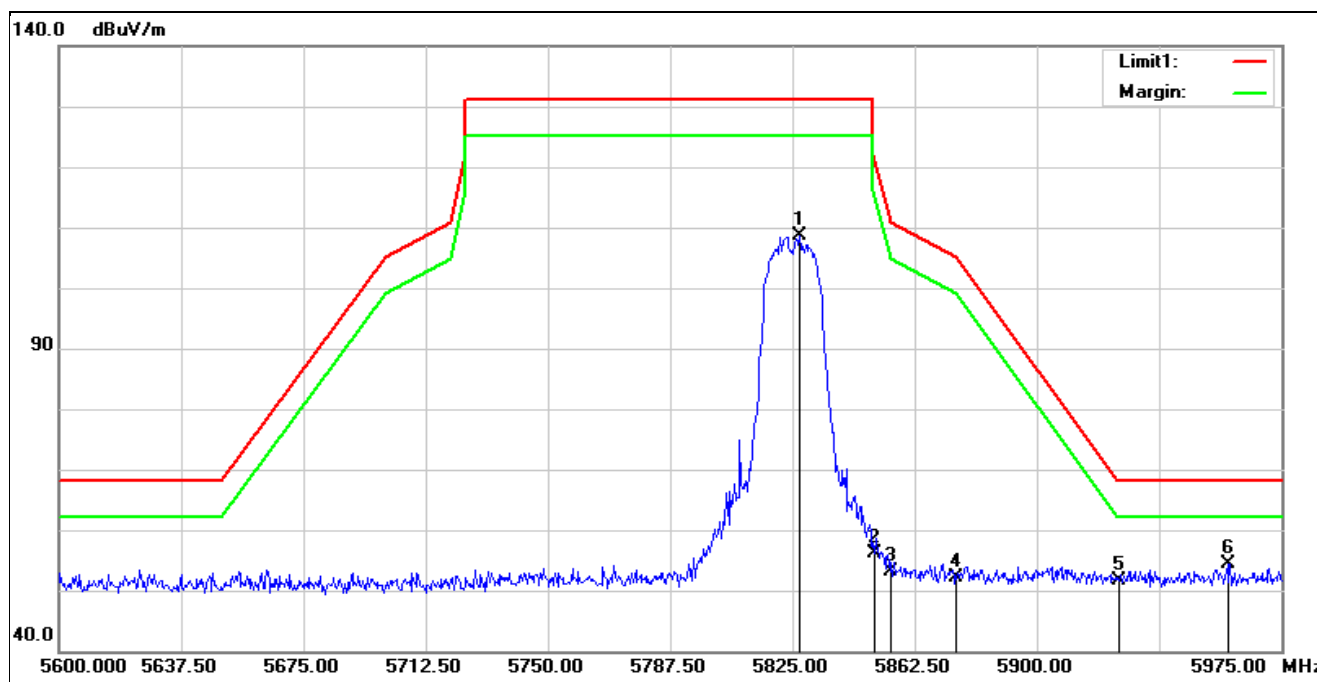


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5827.250	105.62	2.91	108.53	131.20	-22.67	peak
2	5850.000	53.23	2.98	56.21	122.20	-65.99	peak
3	5855.000	50.21	3.01	53.22	110.80	-57.58	peak
4	5875.000	49.04	3.07	52.11	105.20	-53.09	peak
5	5925.000	48.61	3.10	51.71	68.20	-16.49	peak
6*	5958.500	51.38	3.07	54.45	68.20	-13.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

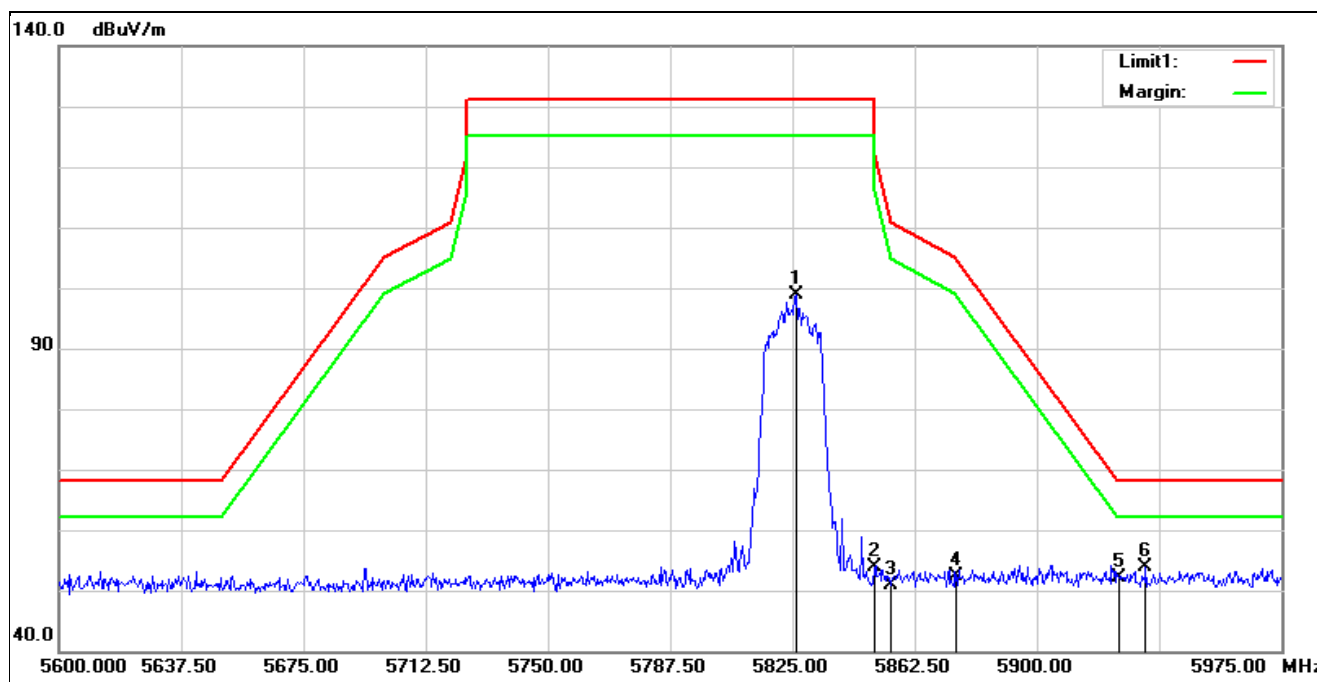


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.125	95.88	2.89	98.77	131.20	-32.43	peak
2	5850.000	51.00	2.98	53.98	122.20	-68.22	peak
3	5855.000	47.99	3.01	51.00	110.80	-59.80	peak
4	5875.000	49.38	3.07	52.45	105.20	-52.75	peak
5	5925.000	49.03	3.10	52.13	68.20	-16.07	peak
6*	5933.375	50.92	3.07	53.99	68.20	-14.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

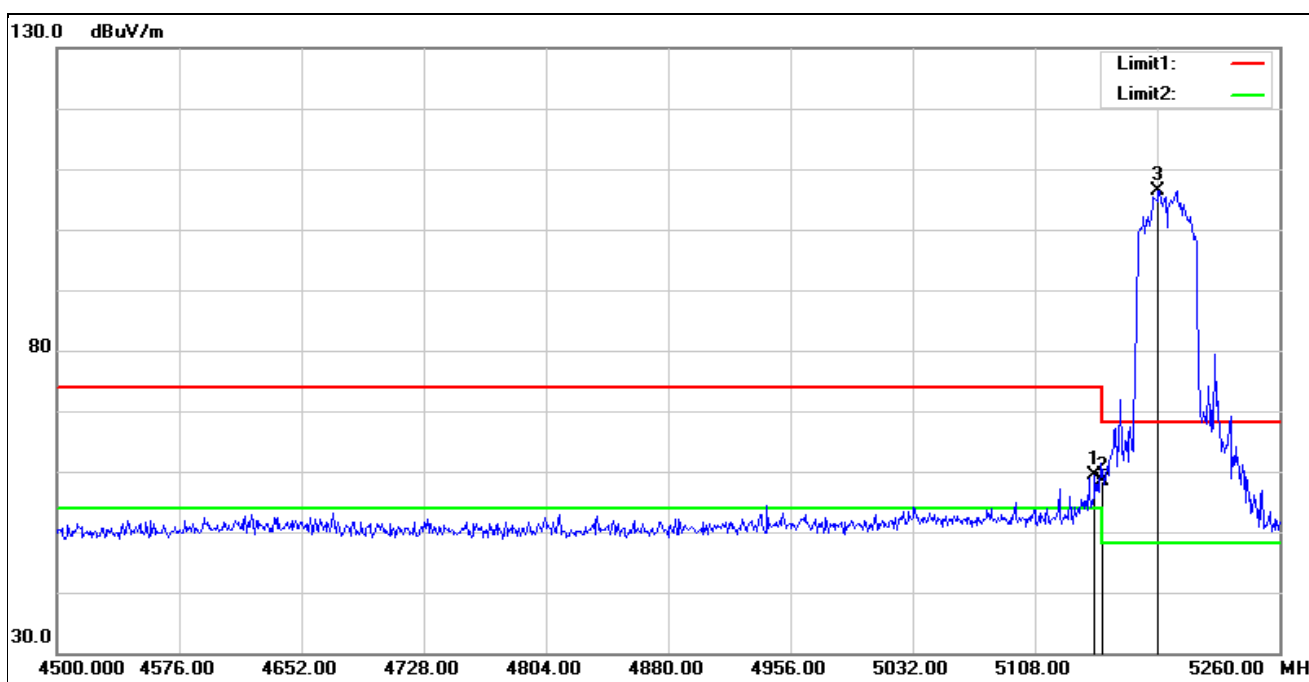


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	58.04	1.41	59.45	74.00	-14.55	peak
2	5150.000	56.92	1.42	58.34	74.00	-15.66	peak
3*	5184.760	105.17	1.32	106.49	68.20	38.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

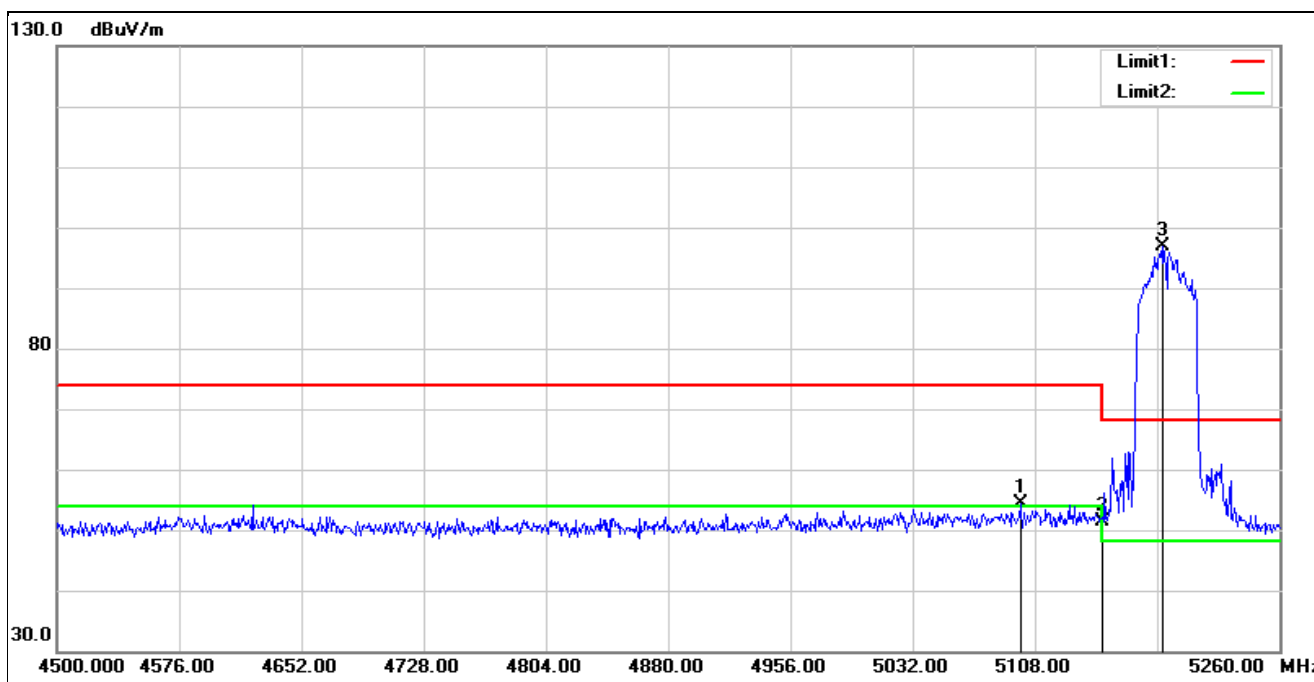


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5098.880	53.02	1.35	54.37	74.00	-19.63	peak
2	5150.000	49.88	1.42	51.30	74.00	-22.70	peak
3*	5187.800	95.66	1.32	96.98	68.20	28.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

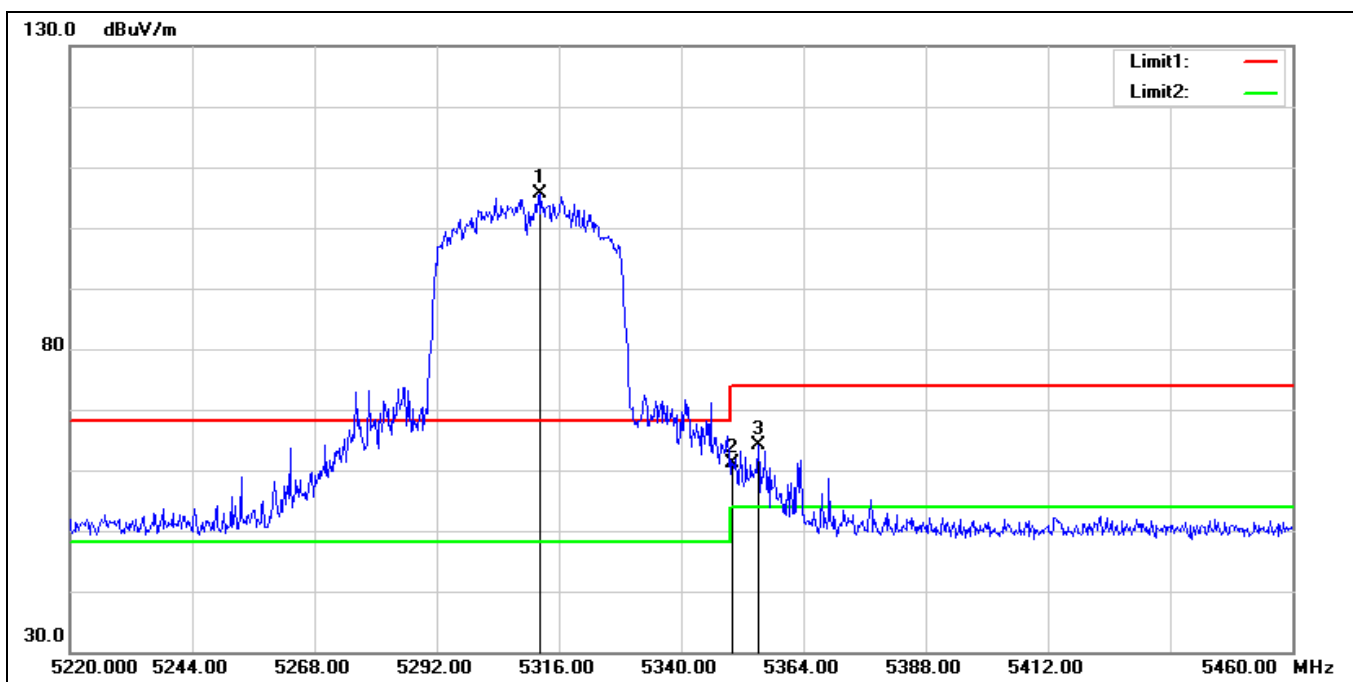


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5312.400	104.66	0.95	105.61	68.20	37.41	peak
2	5350.000	60.17	1.08	61.25	74.00	-12.75	peak
3	5355.120	63.05	1.13	64.18	74.00	-9.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

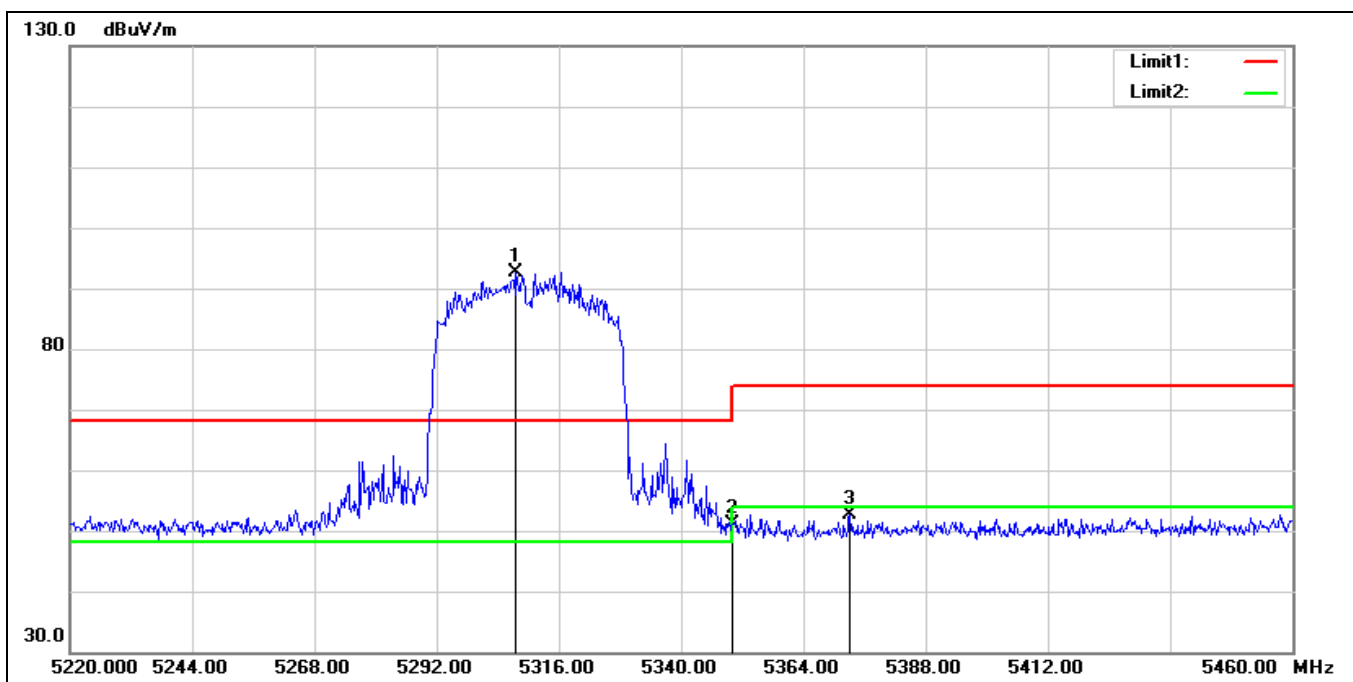


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5307.600	91.71	0.94	92.65	68.20	24.45	peak
2	5350.000	50.09	1.08	51.17	74.00	-22.83	peak
3	5373.120	51.45	1.29	52.74	74.00	-21.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

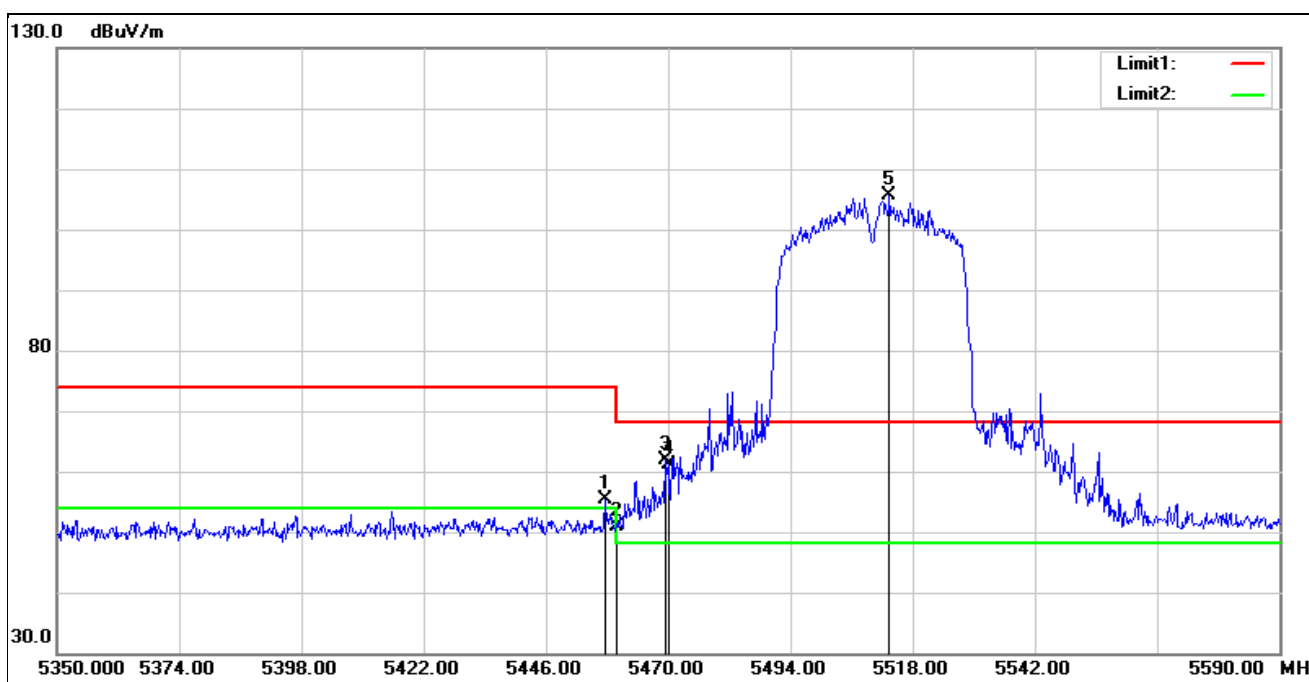


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.520	53.65	1.72	55.37	74.00	-18.63	peak
2	5460.000	49.13	1.73	50.86	74.00	-23.14	peak
3	5469.520	60.21	1.74	61.95	68.20	-6.25	peak
4	5470.000	59.35	1.74	61.09	68.20	-7.11	peak
5*	5513.440	103.85	1.85	105.70	68.20	37.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

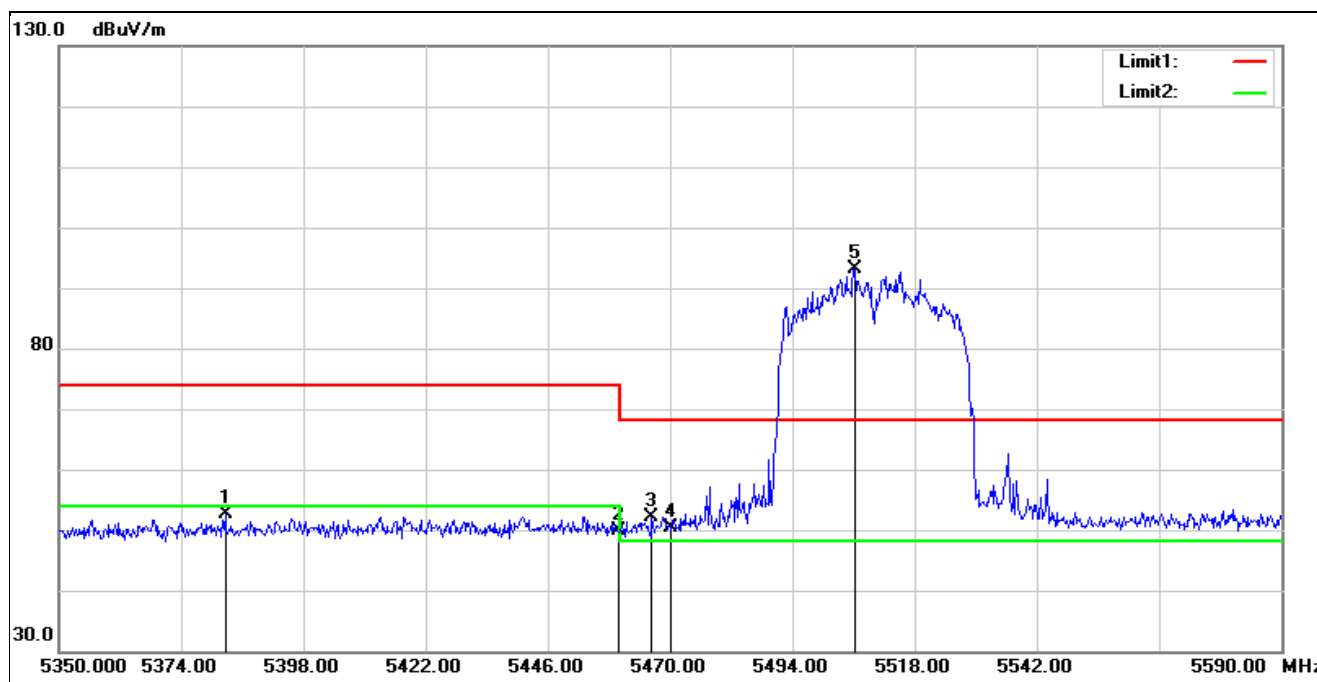


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.640	51.14	1.39	52.53	74.00	-21.47	peak
2	5460.000	48.09	1.73	49.82	74.00	-24.18	peak
3	5466.400	50.37	1.74	52.11	68.20	-16.09	peak
4	5470.000	48.74	1.74	50.48	68.20	-17.72	peak
5*	5506.240	91.28	1.80	93.08	68.20	24.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

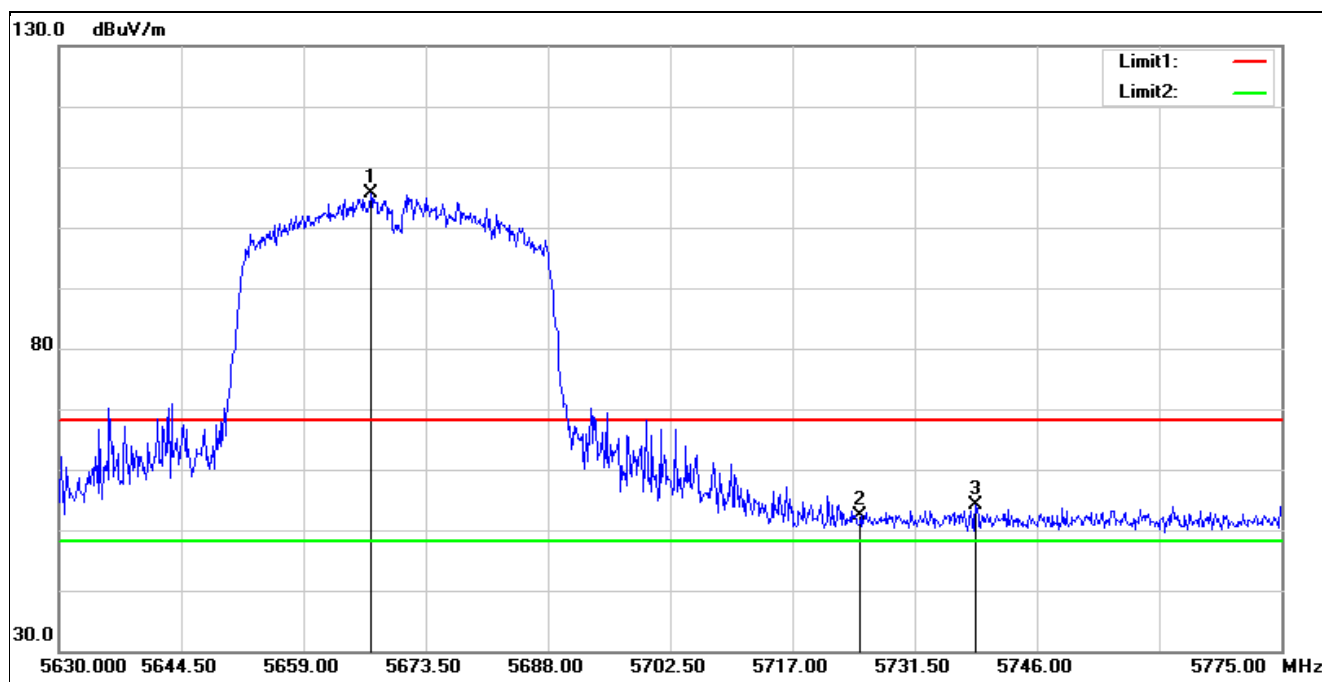


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5666.975	103.56	1.95	105.51	68.20	37.31	peak
2	5725.000	50.11	2.30	52.41	68.20	-15.79	peak
3	5738.750	51.80	2.43	54.23	68.20	-13.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

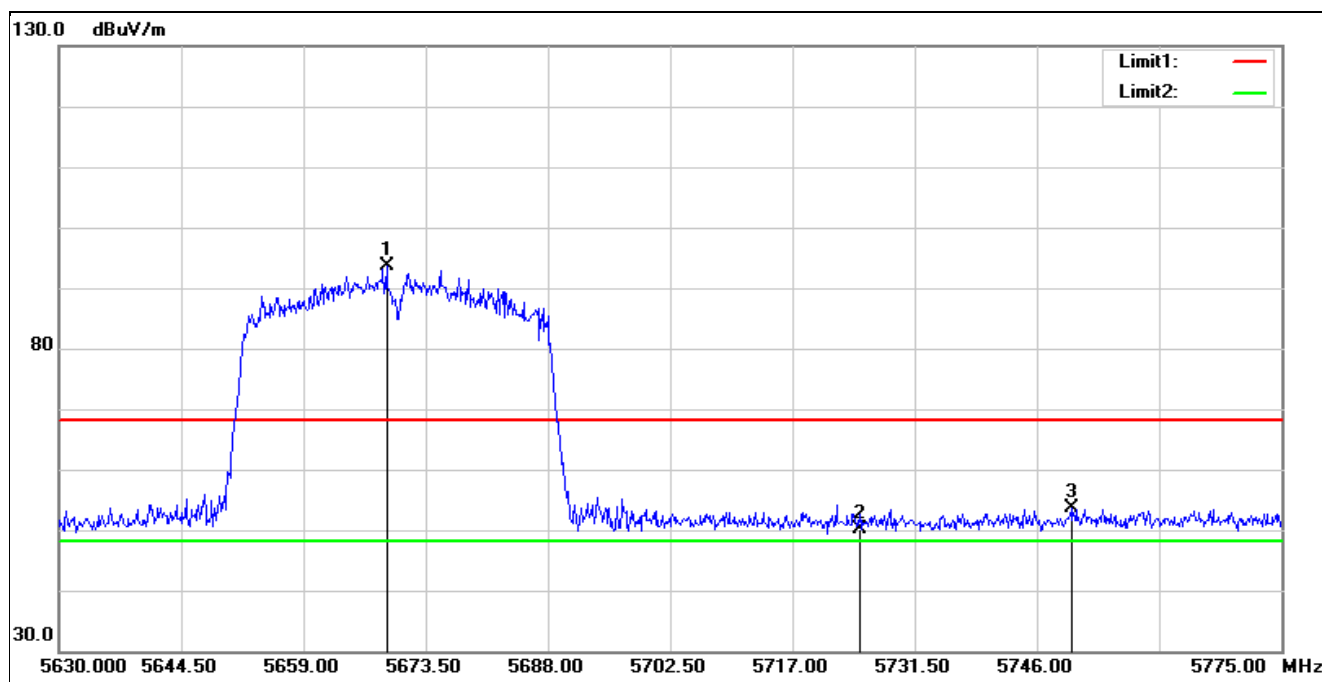


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5668.860	91.66	1.96	93.62	68.20	25.42	peak
2	5725.000	47.83	2.30	50.13	68.20	-18.07	peak
3	5750.060	51.01	2.54	53.55	68.20	-14.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

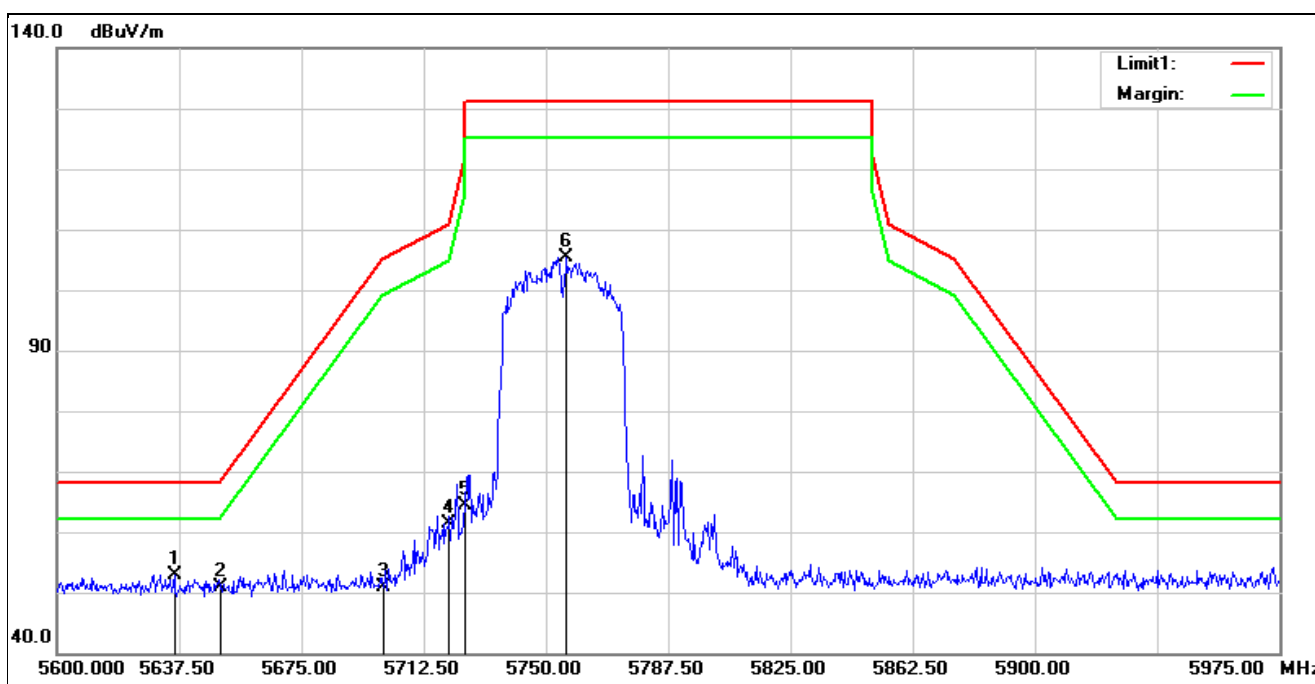


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5636.000	51.00	1.94	52.94	68.20	-15.26	peak
2	5650.000	48.86	1.90	50.76	68.20	-17.44	peak
3	5700.000	48.76	2.06	50.82	105.20	-54.38	peak
4	5720.000	59.01	2.26	61.27	110.80	-49.53	peak
5	5725.000	62.06	2.30	64.36	122.20	-57.84	peak
6	5756.375	102.75	2.57	105.32	131.20	-25.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

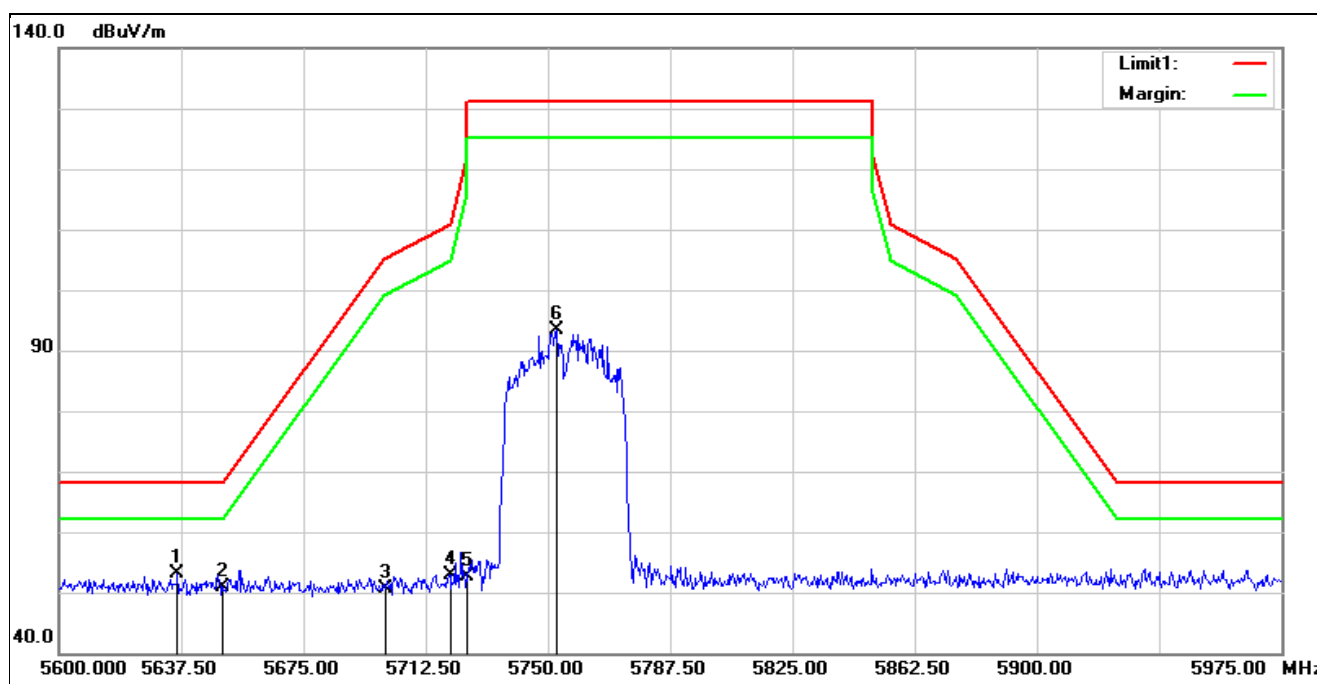


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5636.375	51.16	1.93	53.09	68.20	-15.11	peak
2	5650.000	49.03	1.90	50.93	68.20	-17.27	peak
3	5700.000	48.60	2.06	50.66	105.20	-54.54	peak
4	5720.000	50.52	2.26	52.78	110.80	-58.02	peak
5	5725.000	50.45	2.30	52.75	122.20	-69.45	peak
6	5752.625	90.84	2.55	93.39	131.20	-37.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

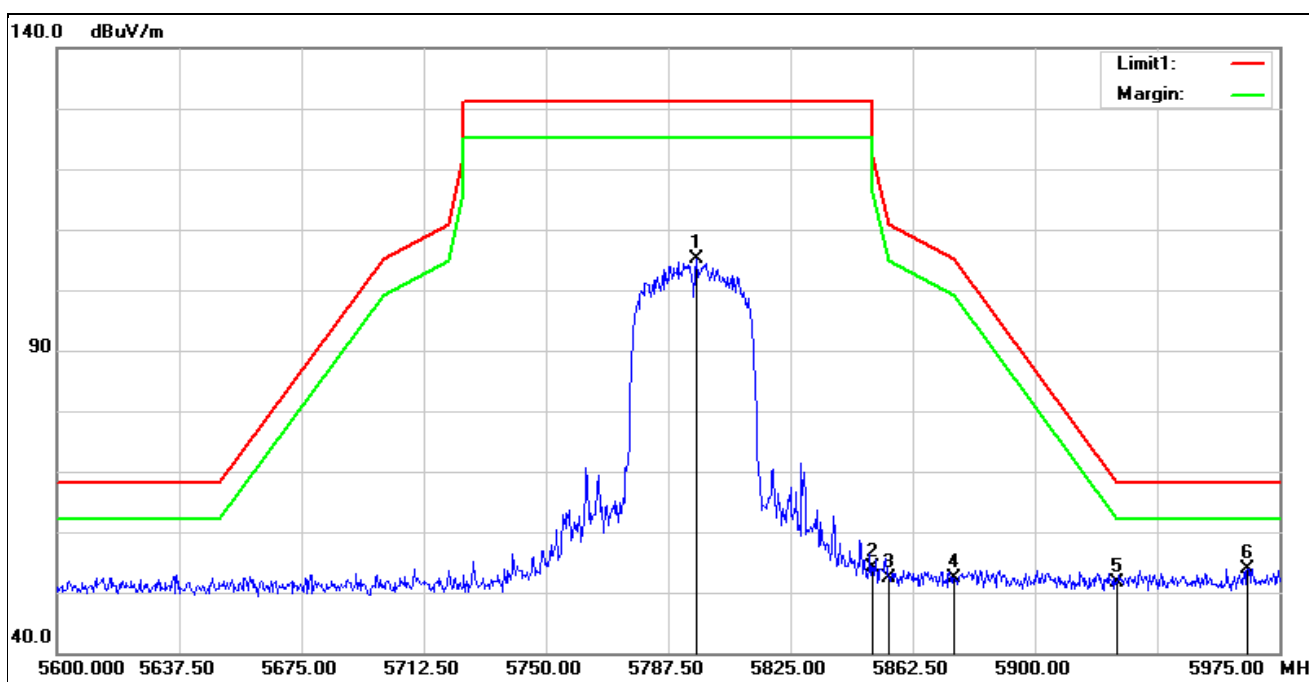

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5796.125	102.38	2.78	105.16	131.20	-26.04	peak
2	5850.000	51.19	2.98	54.17	122.20	-68.03	peak
3	5855.000	49.48	3.01	52.49	110.80	-58.31	peak
4	5875.000	49.33	3.07	52.40	105.20	-52.80	peak
5	5925.000	48.65	3.10	51.75	68.20	-16.45	peak
6*	5965.250	50.82	3.10	53.92	68.20	-14.28	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

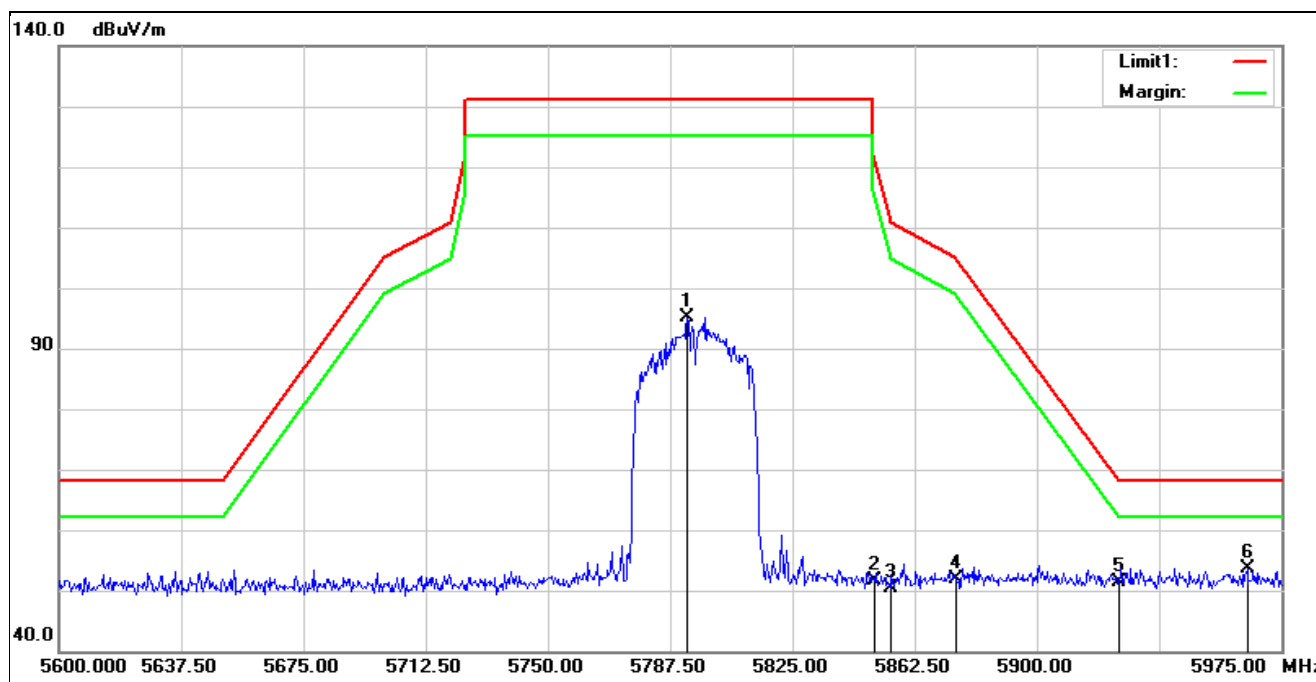

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5792.750	92.42	2.77	95.19	131.20	-36.01	peak
2	5850.000	48.62	2.98	51.60	122.20	-70.60	peak
3	5855.000	47.45	3.01	50.46	110.80	-60.34	peak
4	5875.000	48.86	3.07	51.93	105.20	-53.27	peak
5	5925.000	48.34	3.10	51.44	68.20	-16.76	peak
6*	5964.500	50.58	3.10	53.68	68.20	-14.52	peak


Average

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

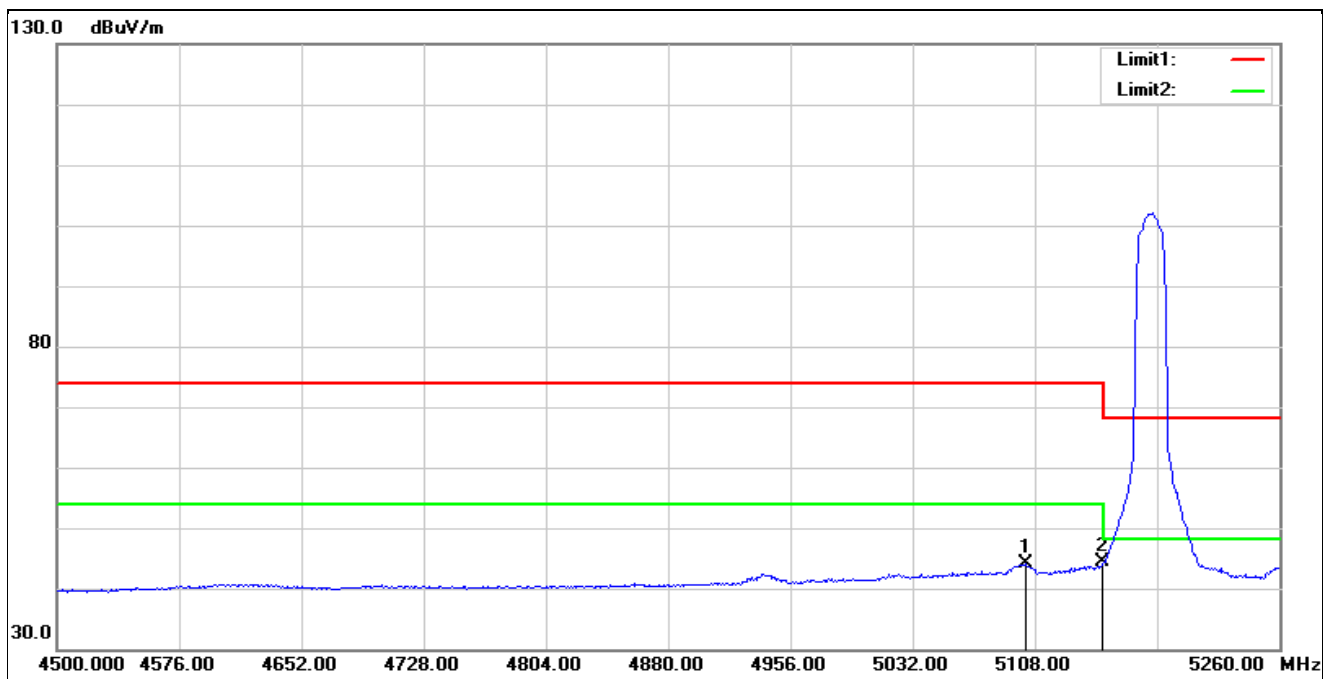


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.680	42.71	1.35	44.06	54.00	-9.94	AVG
2*	5150.000	42.89	1.42	44.31	54.00	-9.69	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

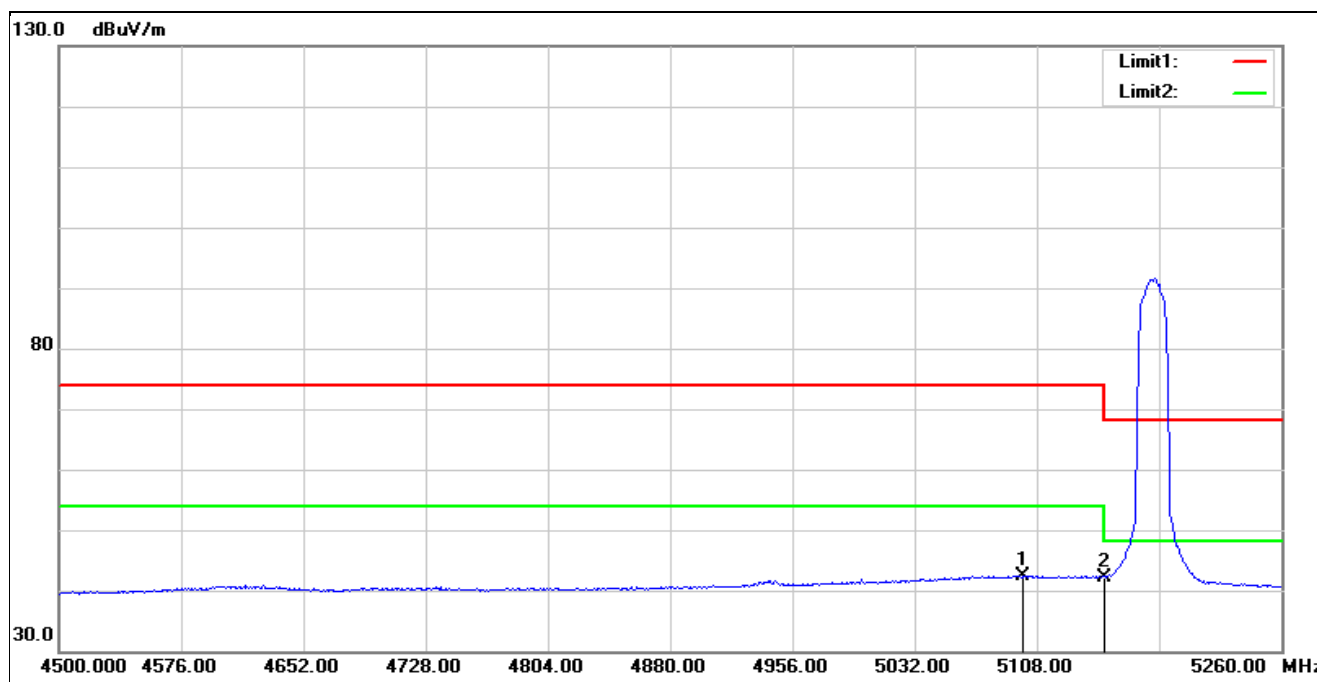


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5098.880	41.12	1.35	42.47	54.00	-11.53	AVG
2	5150.000	40.81	1.42	42.23	54.00	-11.77	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

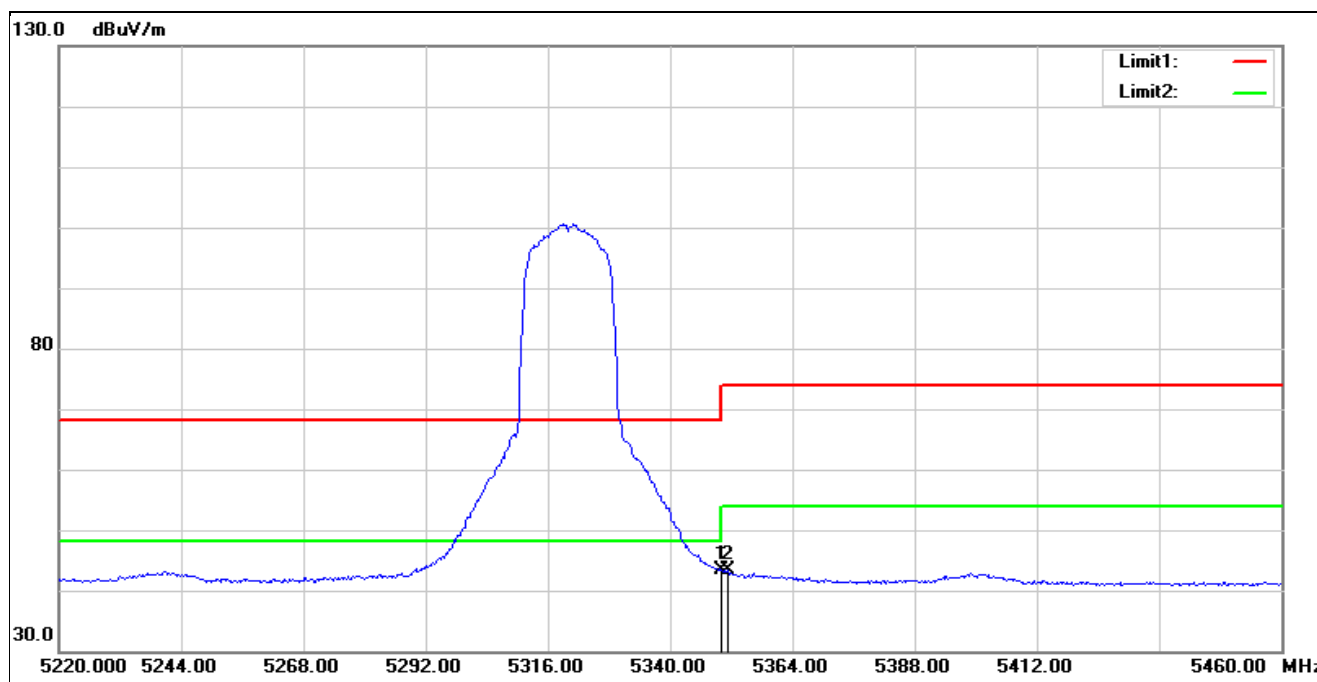


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	42.36	1.08	43.44	54.00	-10.56	AVG
2	5351.280	42.26	1.09	43.35	54.00	-10.65	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

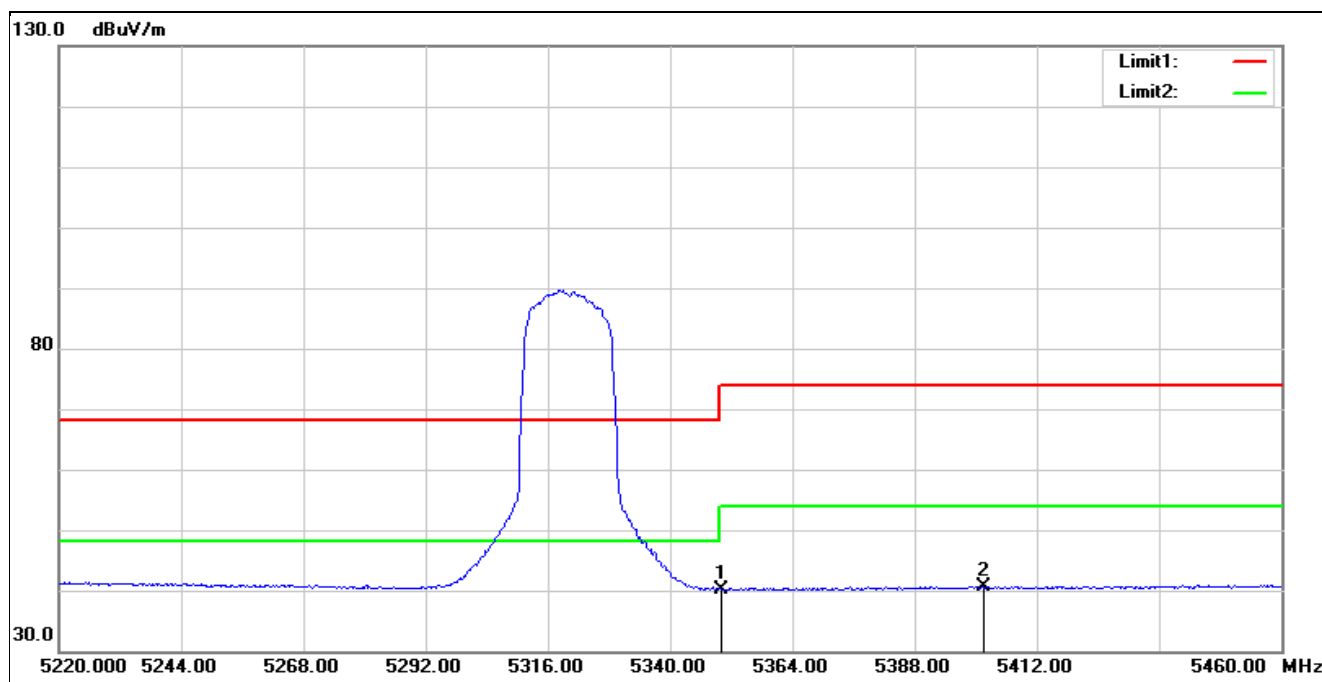


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.06	1.08	40.14	54.00	-13.86	AVG
2*	5401.440	39.18	1.55	40.73	54.00	-13.27	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

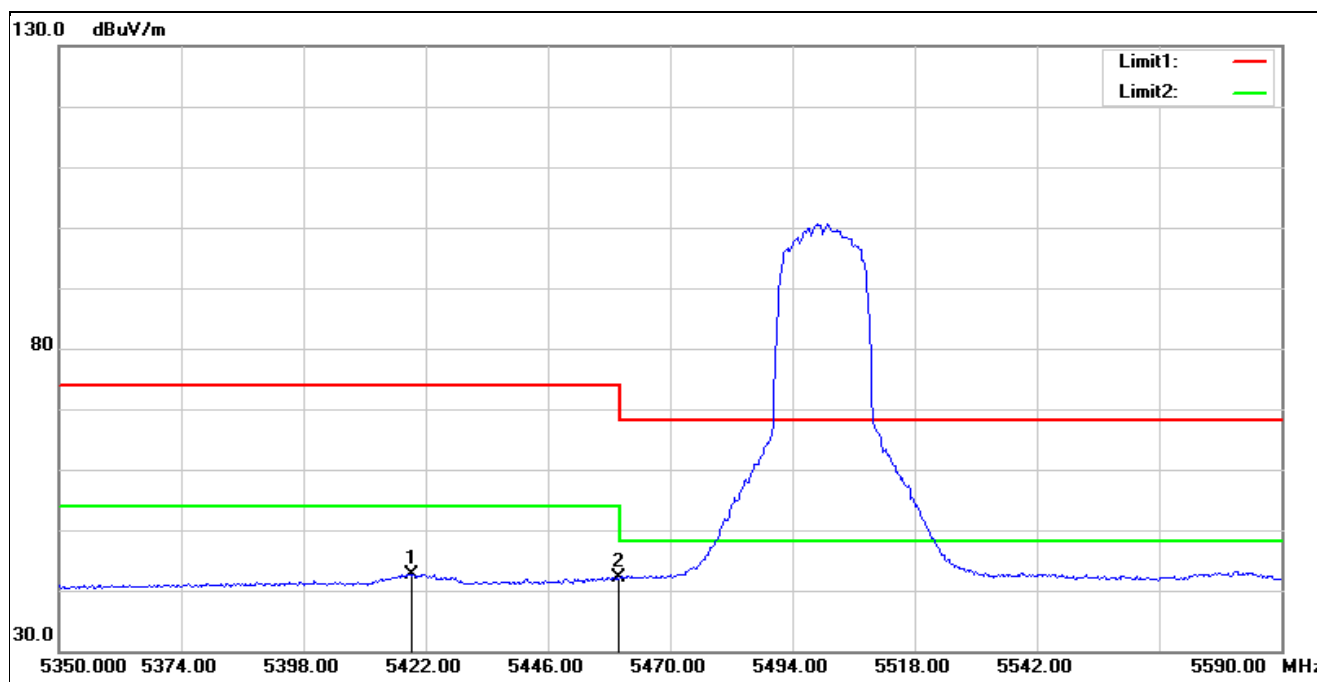


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5419.360	41.10	1.61	42.71	54.00	-11.29	AVG
2	5460.000	40.33	1.73	42.06	54.00	-11.94	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

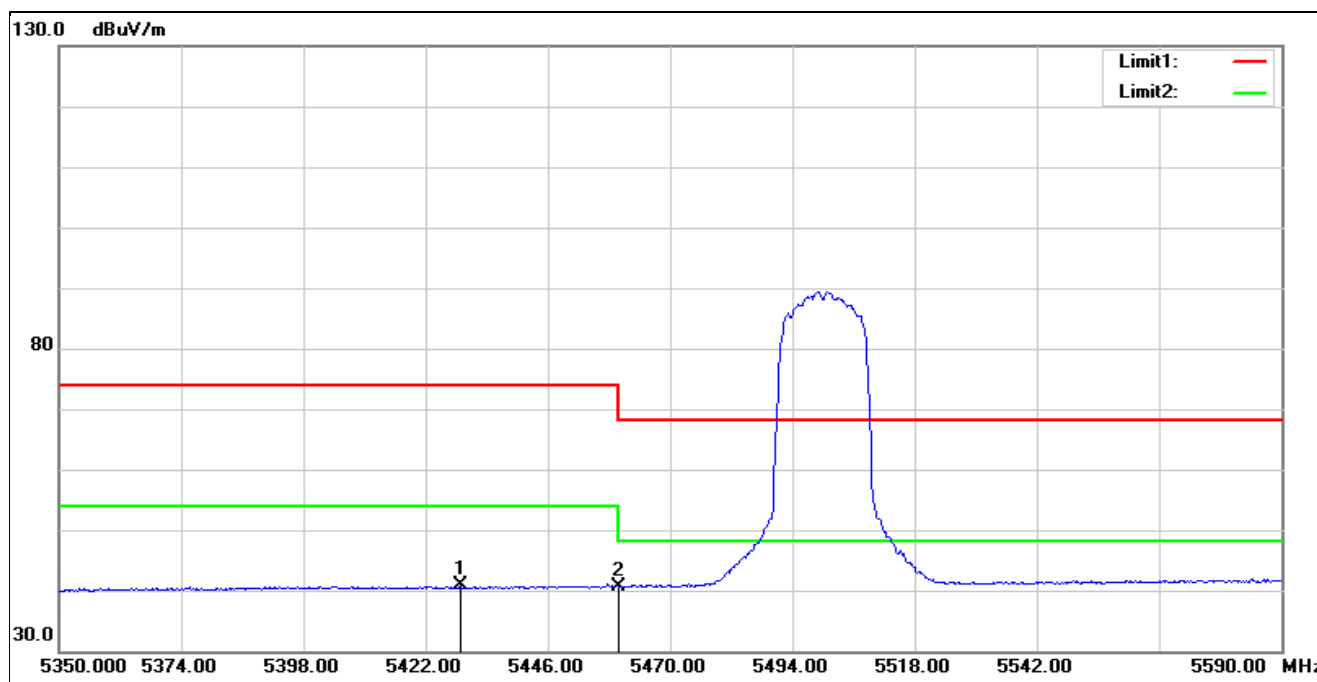


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5428.720	39.22	1.65	40.87	54.00	-13.13	AVG
2	5460.000	38.92	1.73	40.65	54.00	-13.35	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

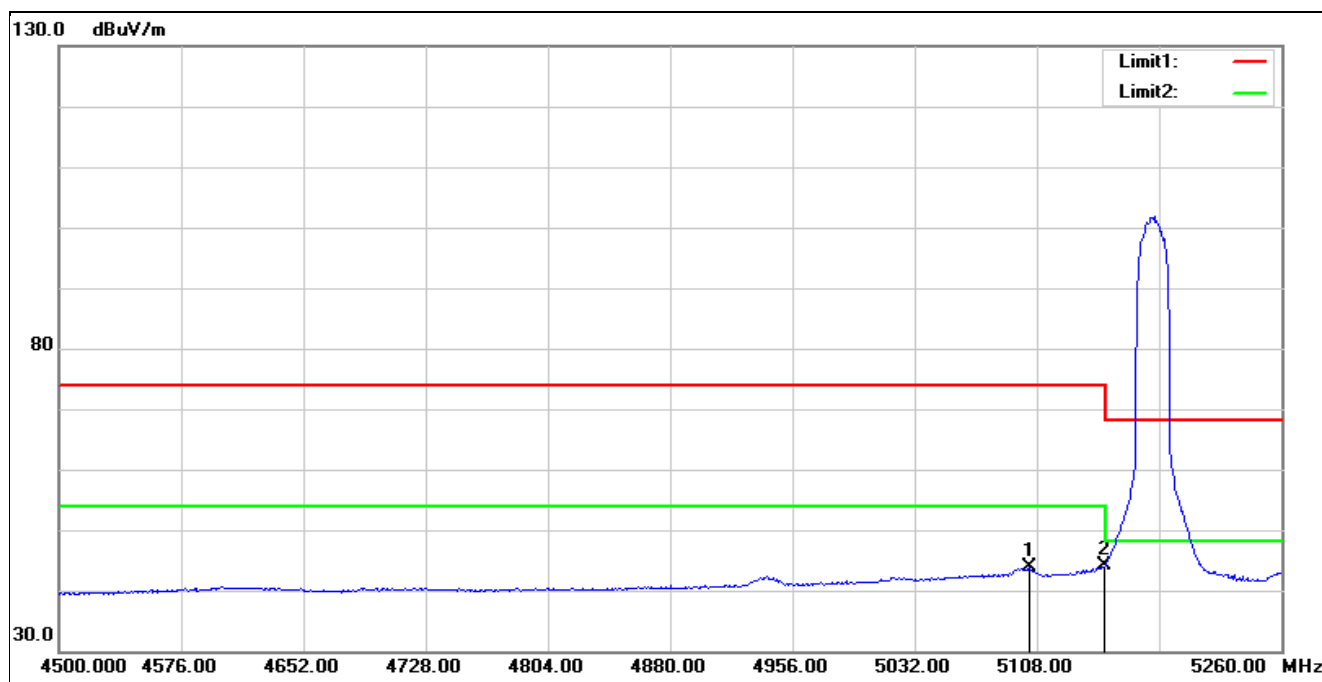


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5103.440	42.43	1.35	43.78	54.00	-10.22	AVG
2*	5150.000	42.74	1.42	44.16	54.00	-9.84	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

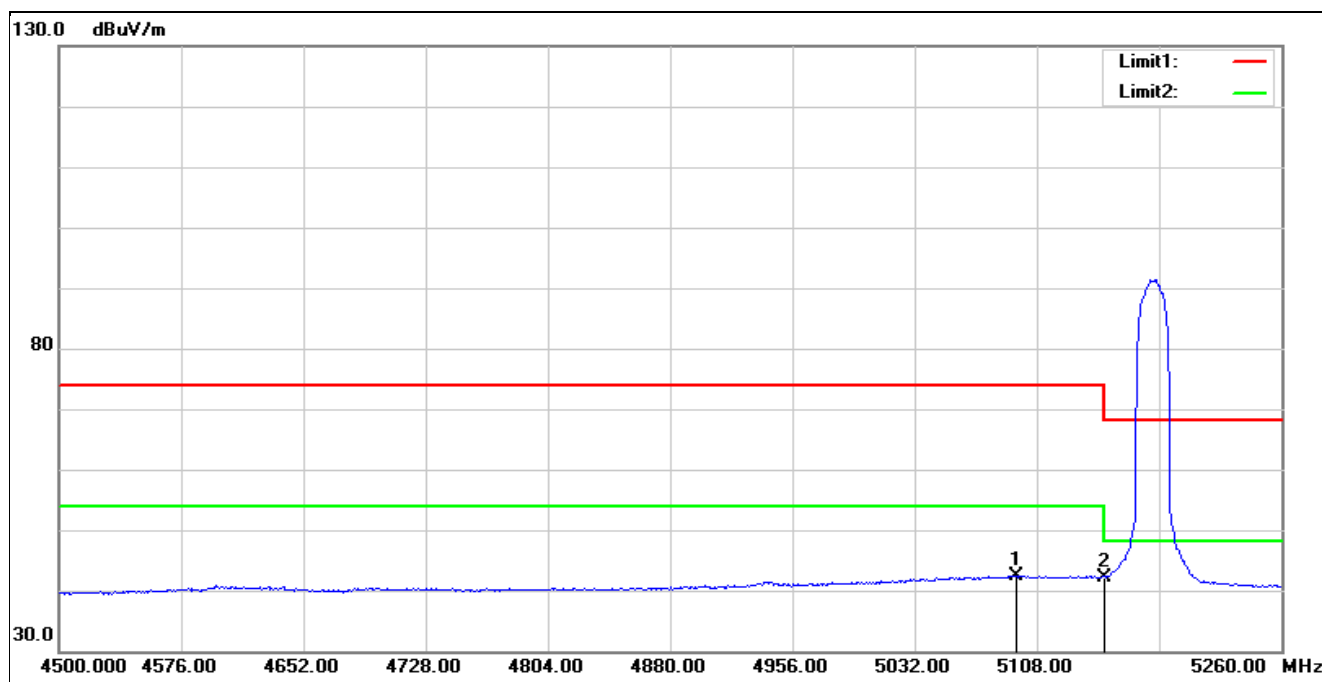


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5095.080	41.10	1.33	42.43	54.00	-11.57	AVG
2	5150.000	40.73	1.42	42.15	54.00	-11.85	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

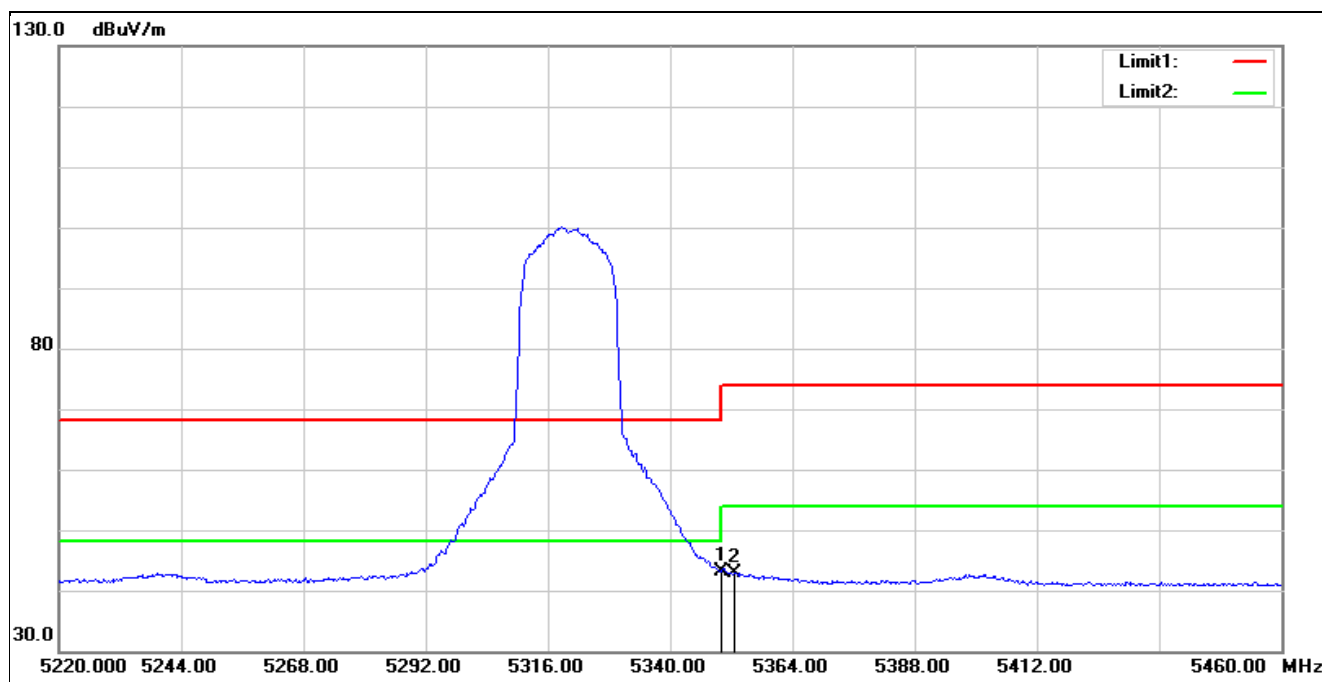


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	42.14	1.08	43.22	54.00	-10.78	AVG
2	5352.720	41.75	1.10	42.85	54.00	-11.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

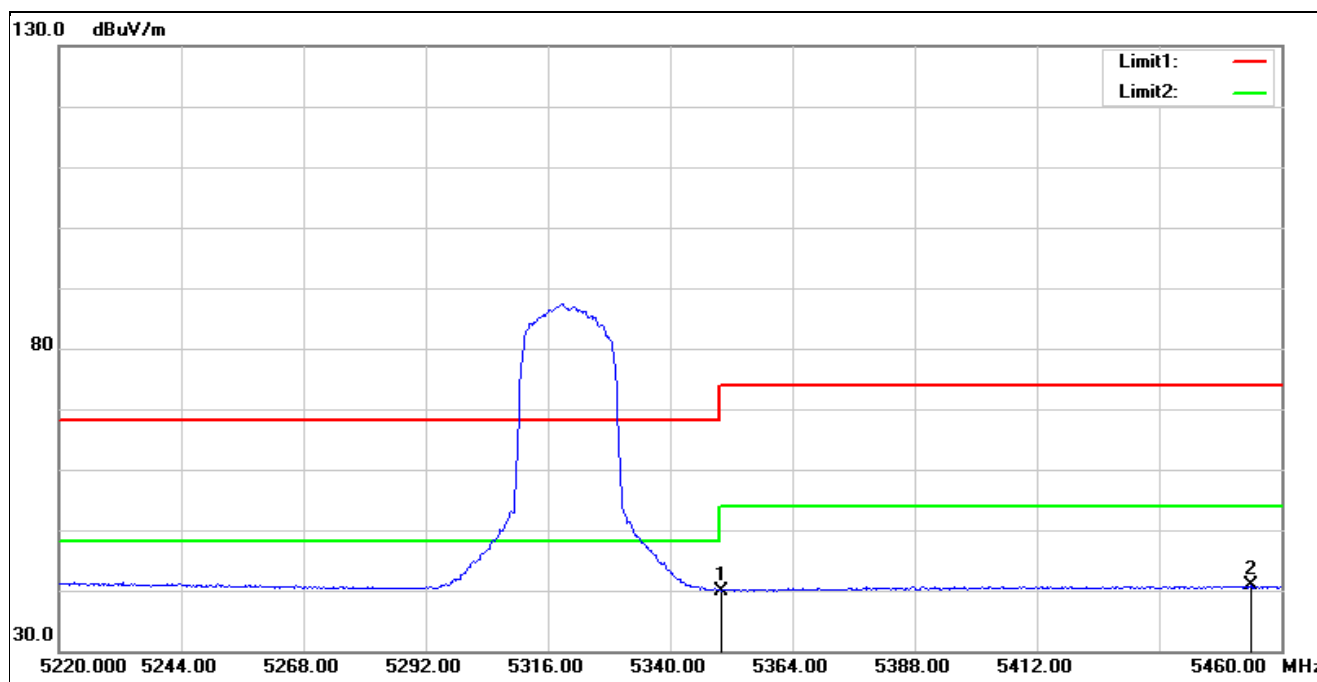


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	38.90	1.08	39.98	54.00	-14.02	AVG
2*	5454.000	39.14	1.72	40.86	54.00	-13.14	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

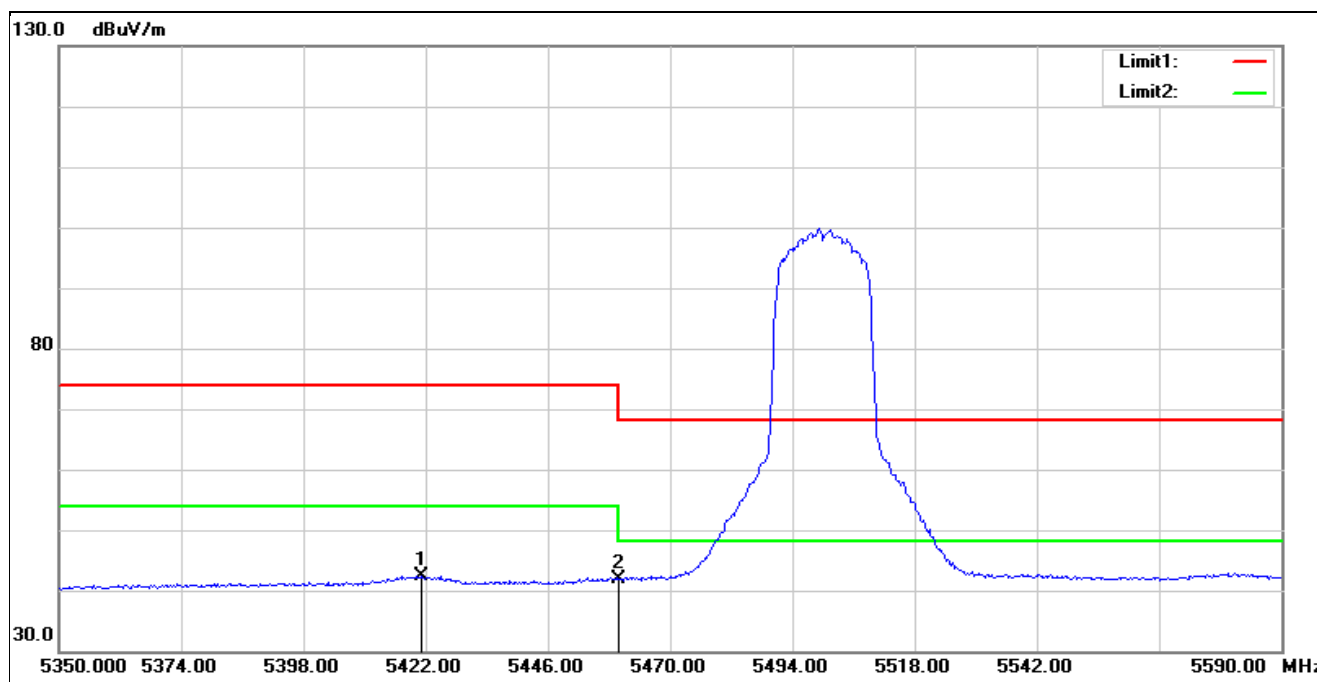


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5421.040	40.77	1.61	42.38	54.00	-11.62	AVG
2	5460.000	40.11	1.73	41.84	54.00	-12.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

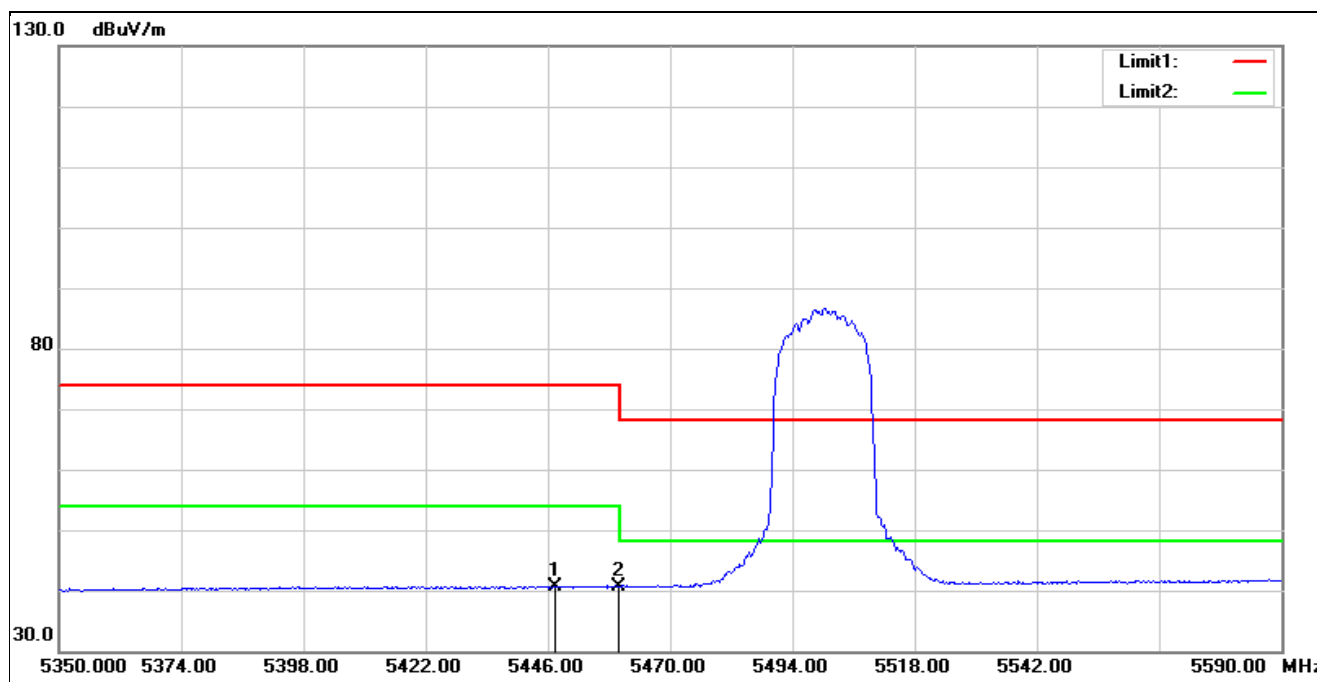


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5447.440	39.05	1.70	40.75	54.00	-13.25	AVG
2	5460.000	38.97	1.73	40.70	54.00	-13.30	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

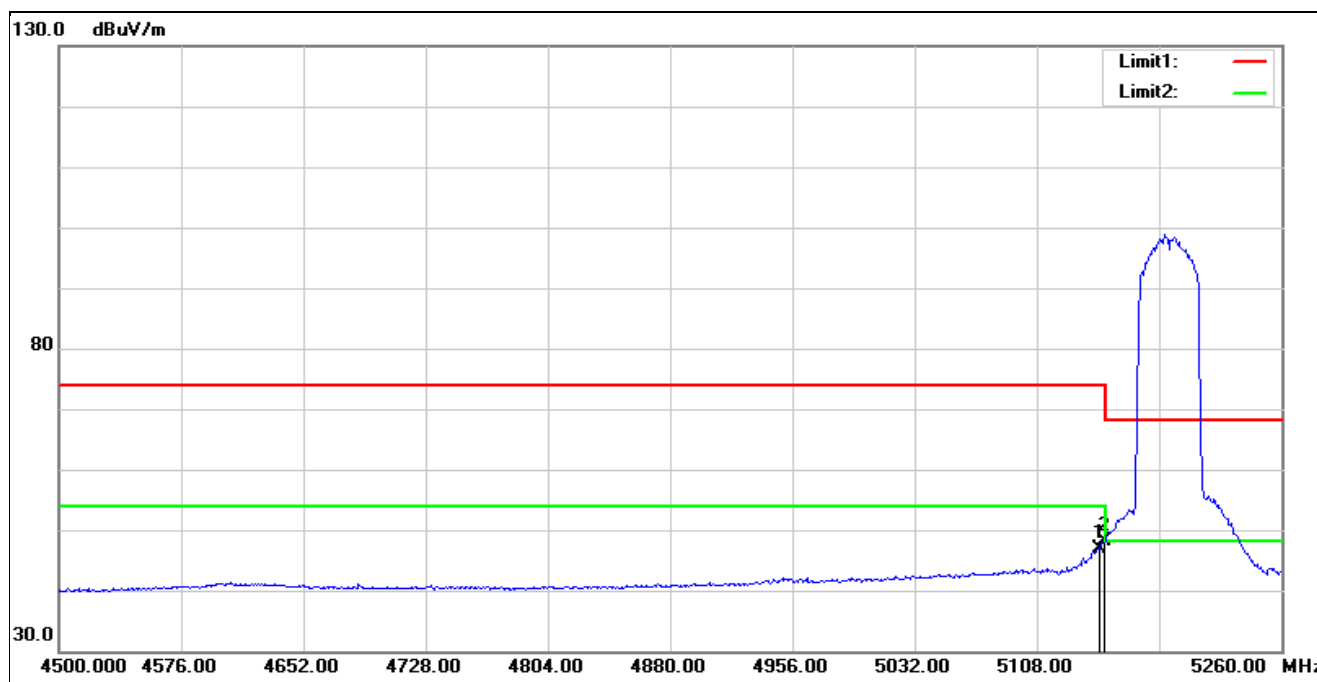


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	45.42	1.42	46.84	54.00	-7.16	AVG
2*	5150.000	46.81	1.42	48.23	54.00	-5.77	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

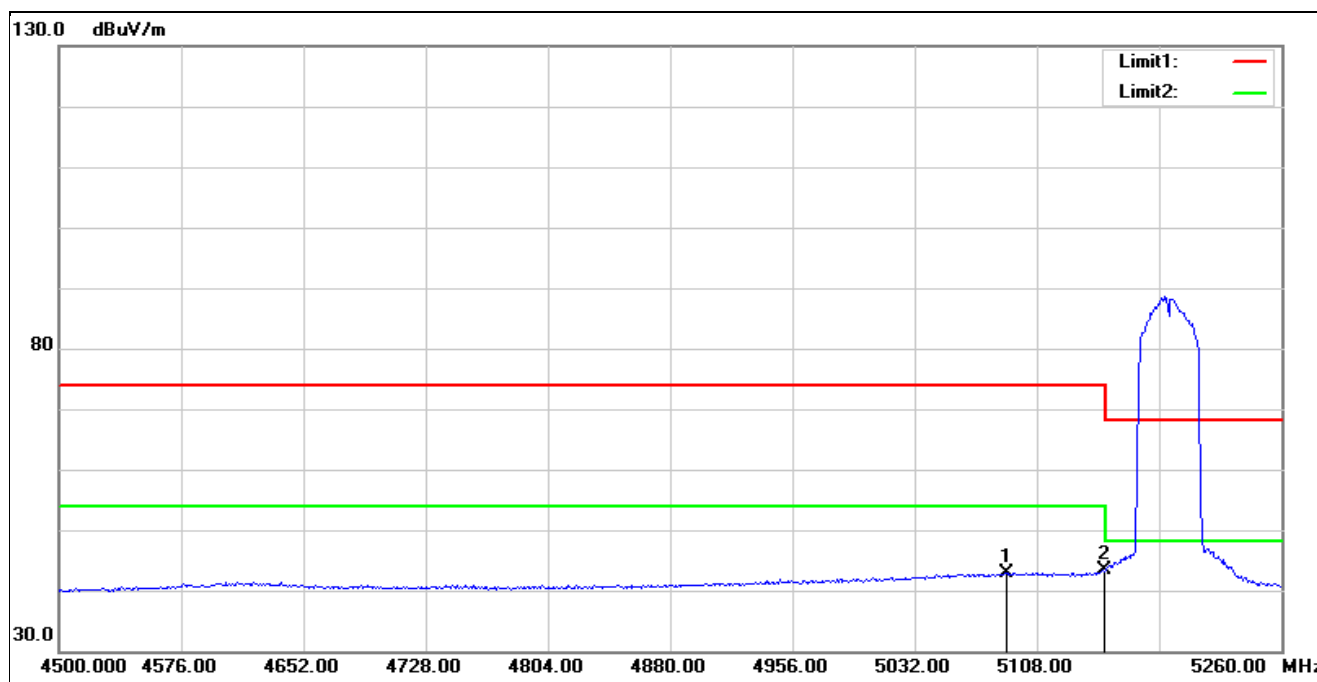


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5089.000	41.67	1.29	42.96	54.00	-11.04	AVG
2*	5150.000	42.00	1.42	43.42	54.00	-10.58	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

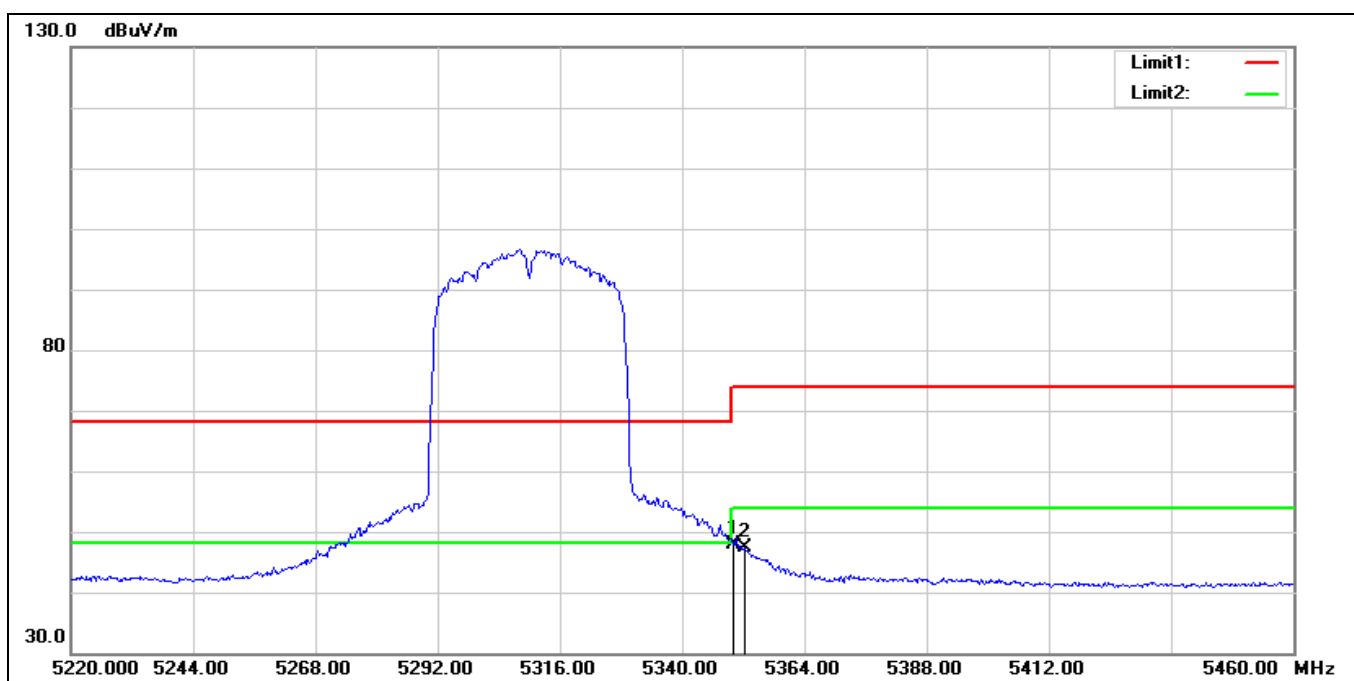


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	46.69	1.08	47.77	54.00	-6.23	AVG
2	5352.240	46.23	1.10	47.33	54.00	-6.67	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

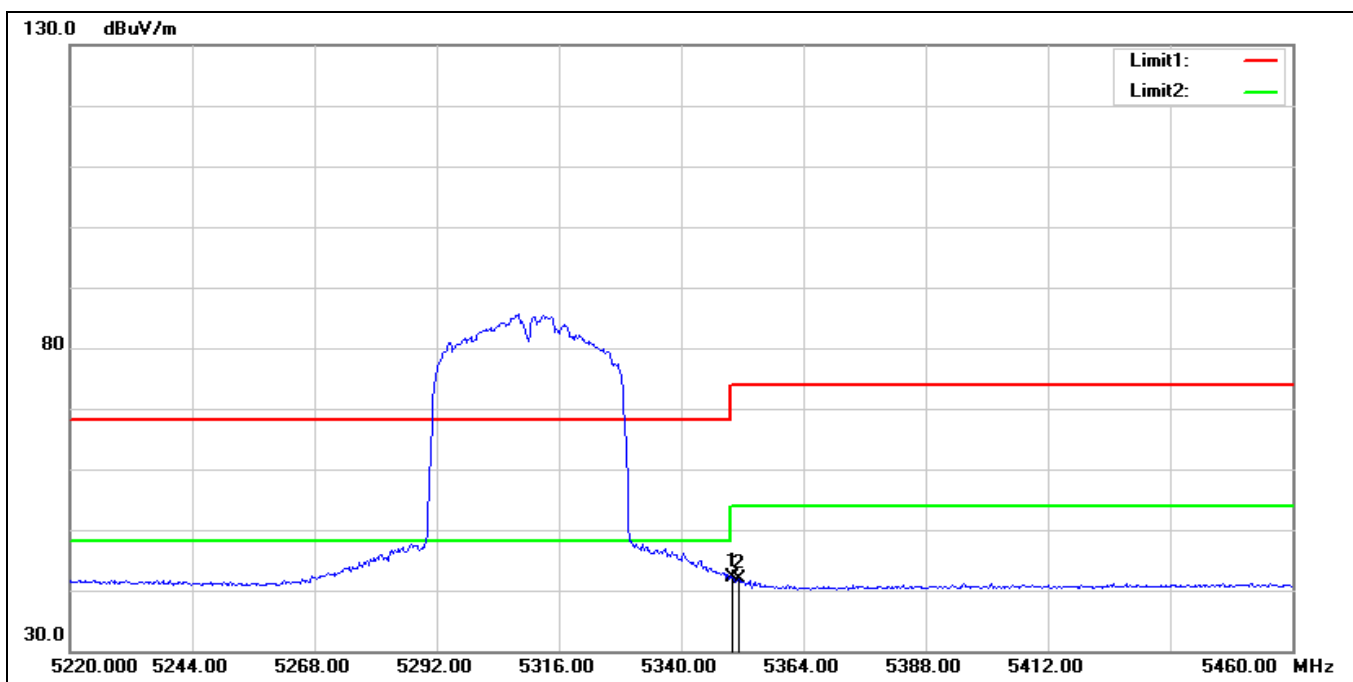


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.02	1.08	42.10	54.00	-11.90	AVG
2	5351.280	40.77	1.09	41.86	54.00	-12.14	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

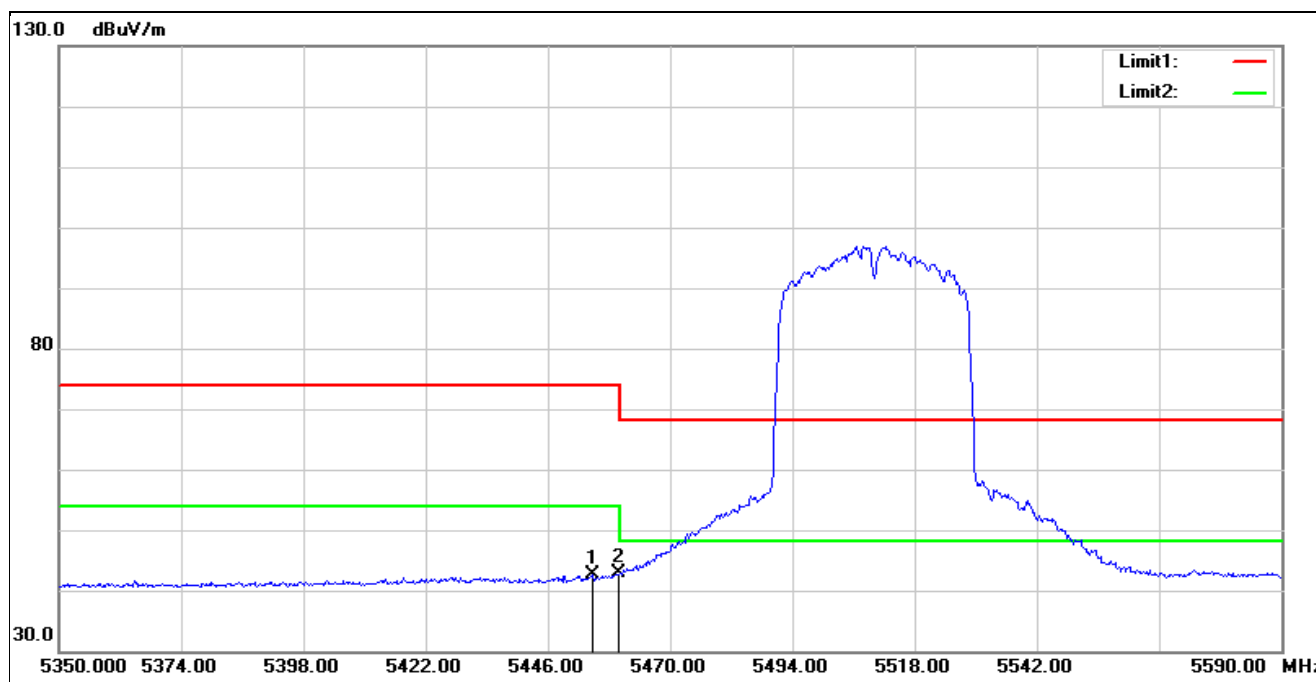

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.640	40.93	1.72	42.65	54.00	-11.35	AVG
2*	5460.000	41.18	1.73	42.91	54.00	-11.09	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

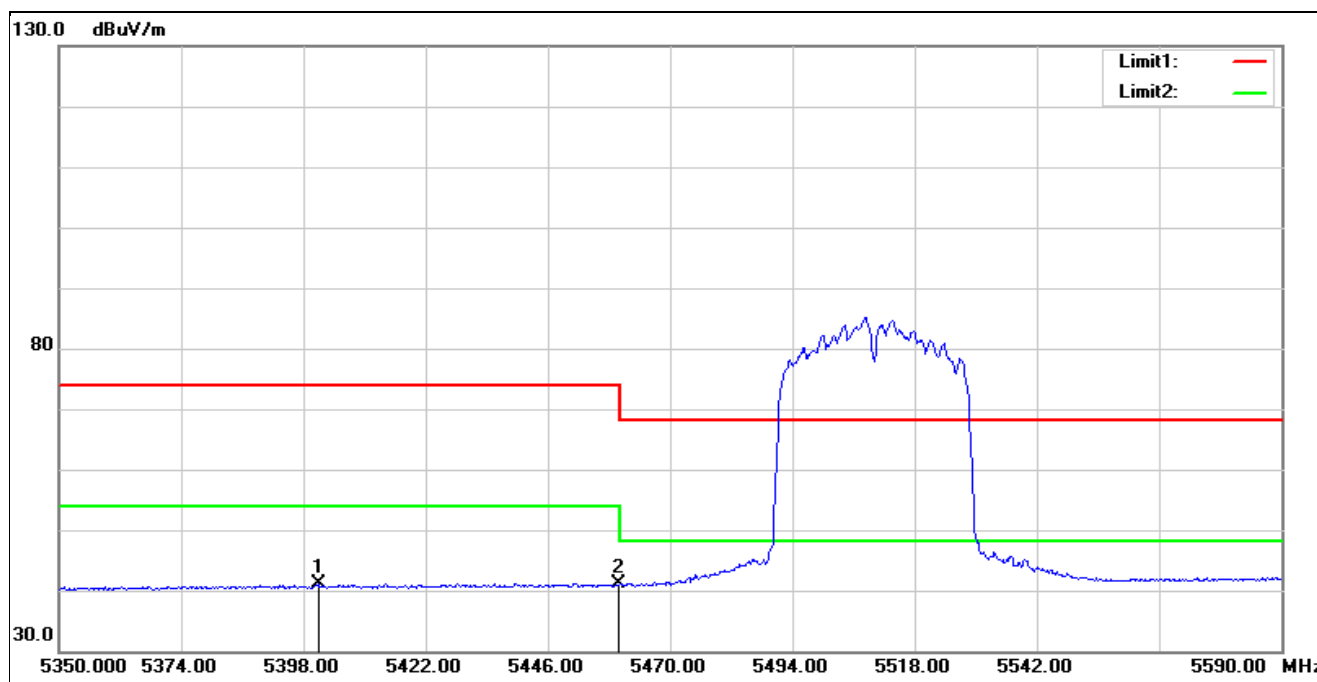


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5400.880	39.61	1.55	41.16	54.00	-12.84	AVG
2	5460.000	39.31	1.73	41.04	54.00	-12.96	AVG

Antenna brand: Laird


Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

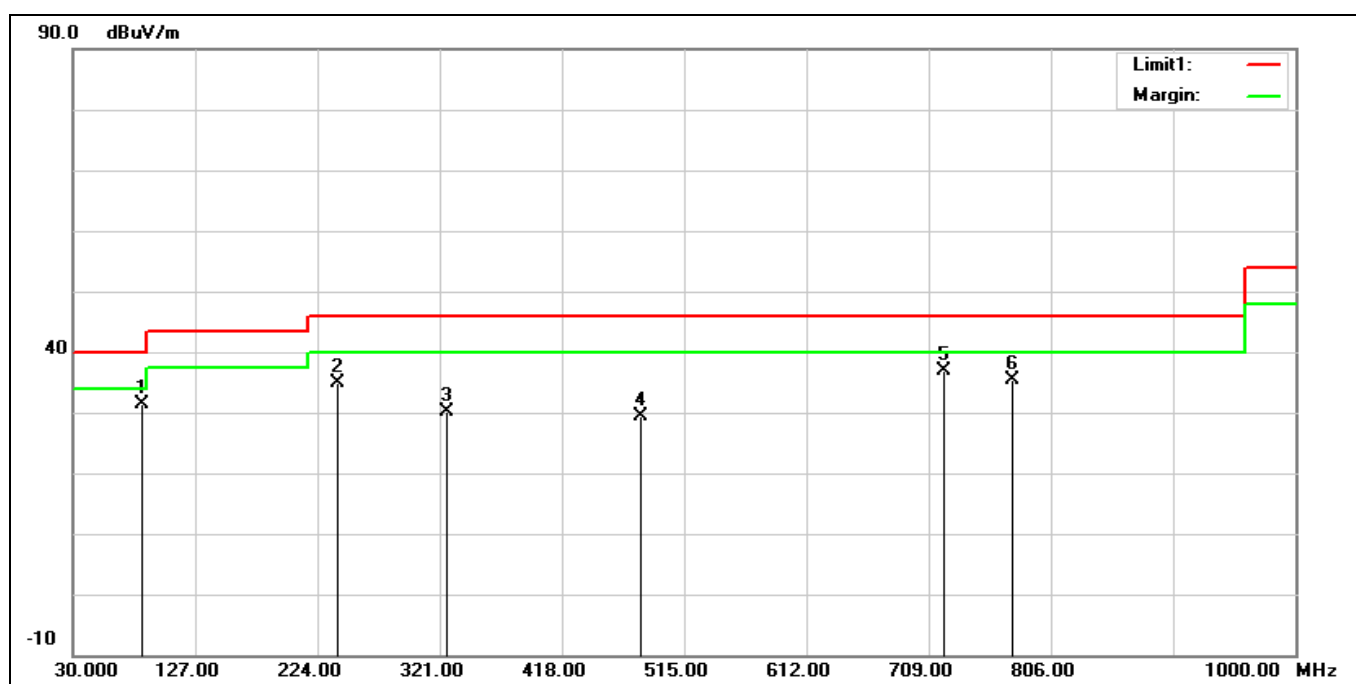

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	84.3200	44.08	-12.79	31.29	40.00	-8.71	QP
2	240.4900	42.57	-7.65	34.92	46.00	-11.08	QP
3	326.8200	35.43	-5.24	30.19	46.00	-15.81	QP
4	480.0800	31.61	-2.20	29.41	46.00	-16.59	QP
5	720.6400	34.74	2.11	36.85	46.00	-9.15	QP
6	775.9300	32.18	3.30	35.48	46.00	-10.52	QP

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

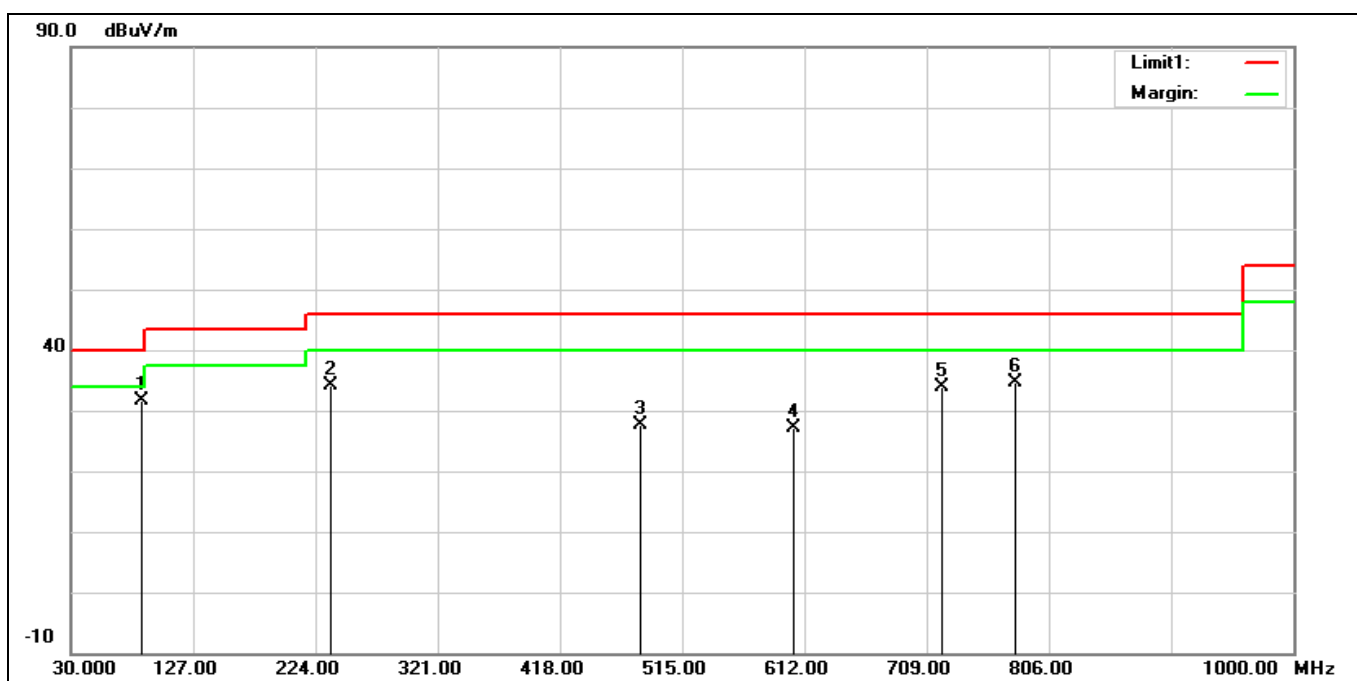


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	86.2600	44.76	-13.01	31.75	40.00	-8.25	QP
2	236.6100	41.94	-7.92	34.02	46.00	-11.98	QP
3	482.0200	29.77	-2.17	27.60	46.00	-18.40	QP
4	603.2700	27.02	0.23	27.25	46.00	-18.75	QP
5	721.6100	31.64	2.13	33.77	46.00	-12.23	QP
6	779.8100	31.20	3.37	34.57	46.00	-11.43	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

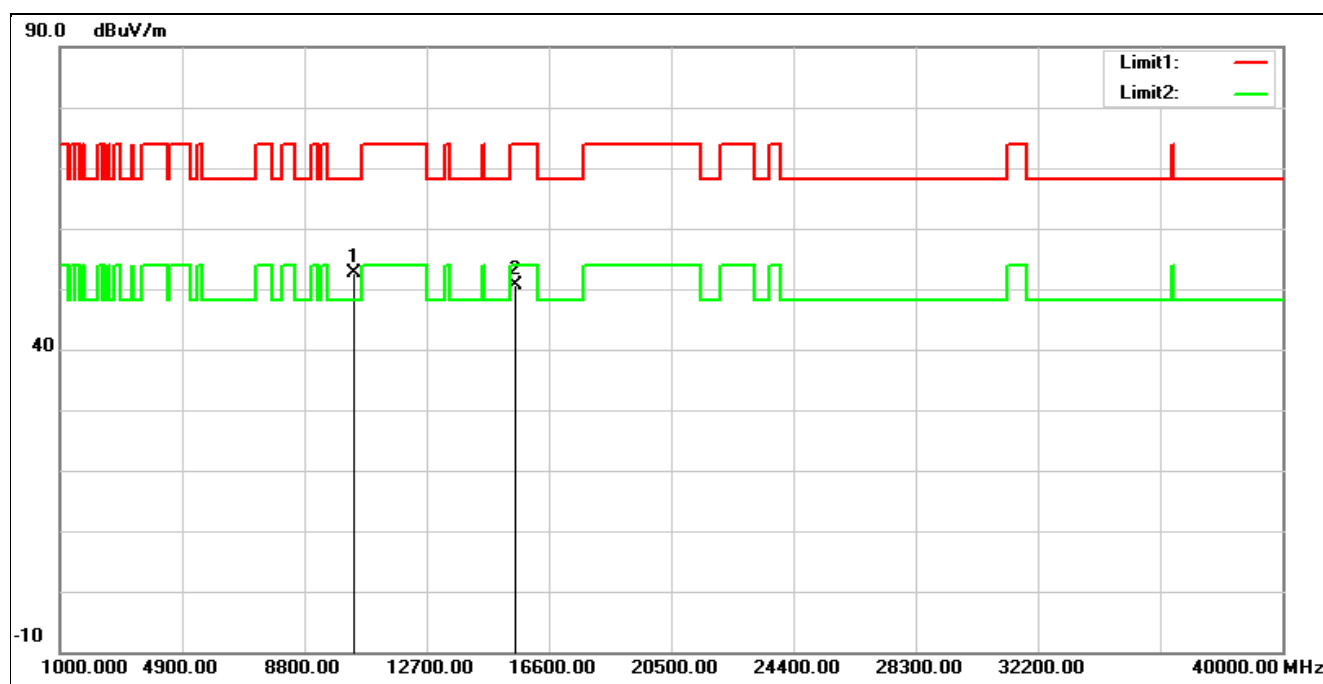


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	38.76	13.99	52.75	68.20	-15.45	peak
2	15540.000	33.31	17.31	50.62	74.00	-23.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

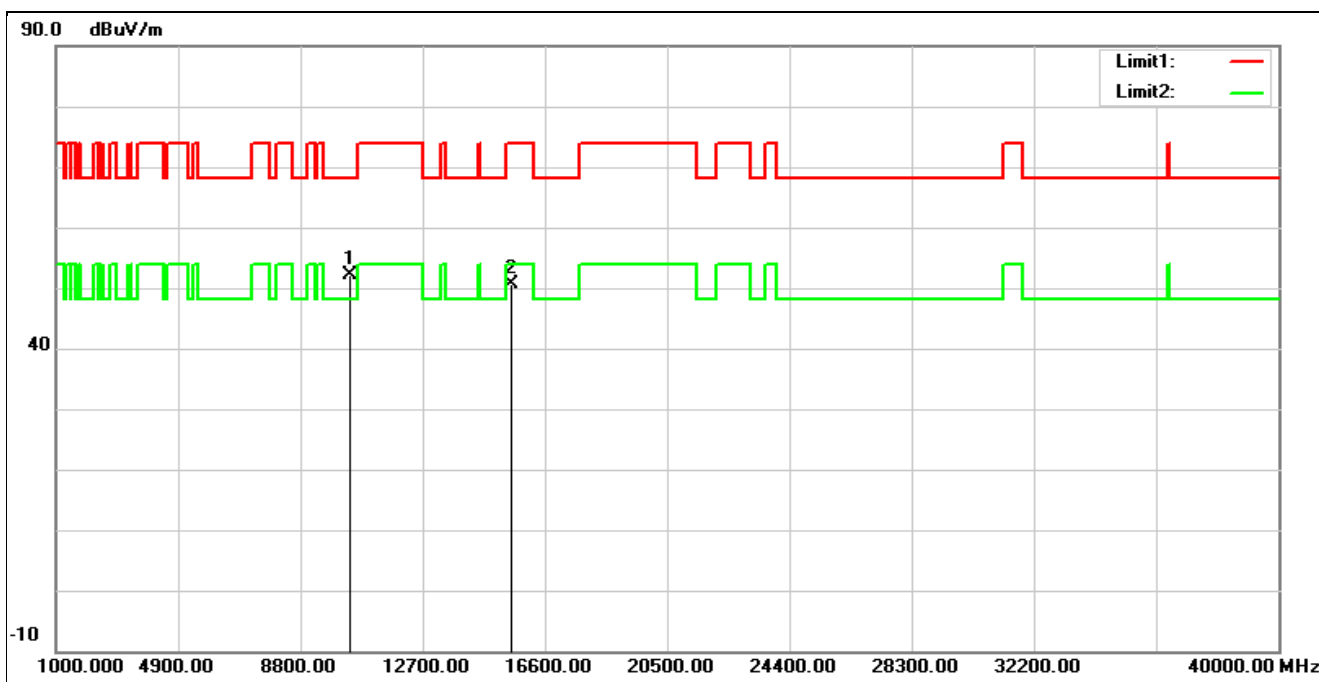


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	38.17	13.99	52.16	68.20	-16.04	peak
2	15540.000	33.24	17.31	50.55	74.00	-23.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

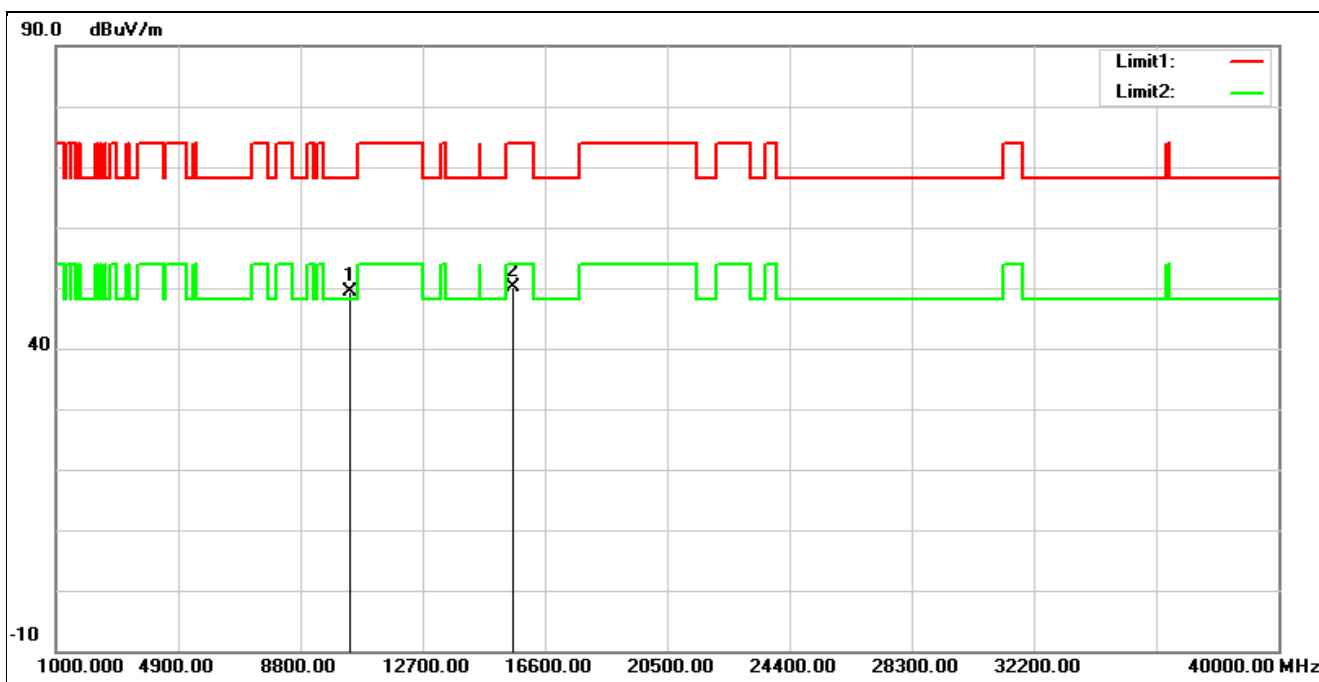


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.19	14.10	49.29	68.20	-18.91	peak
2	15600.000	33.16	17.01	50.17	74.00	-23.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

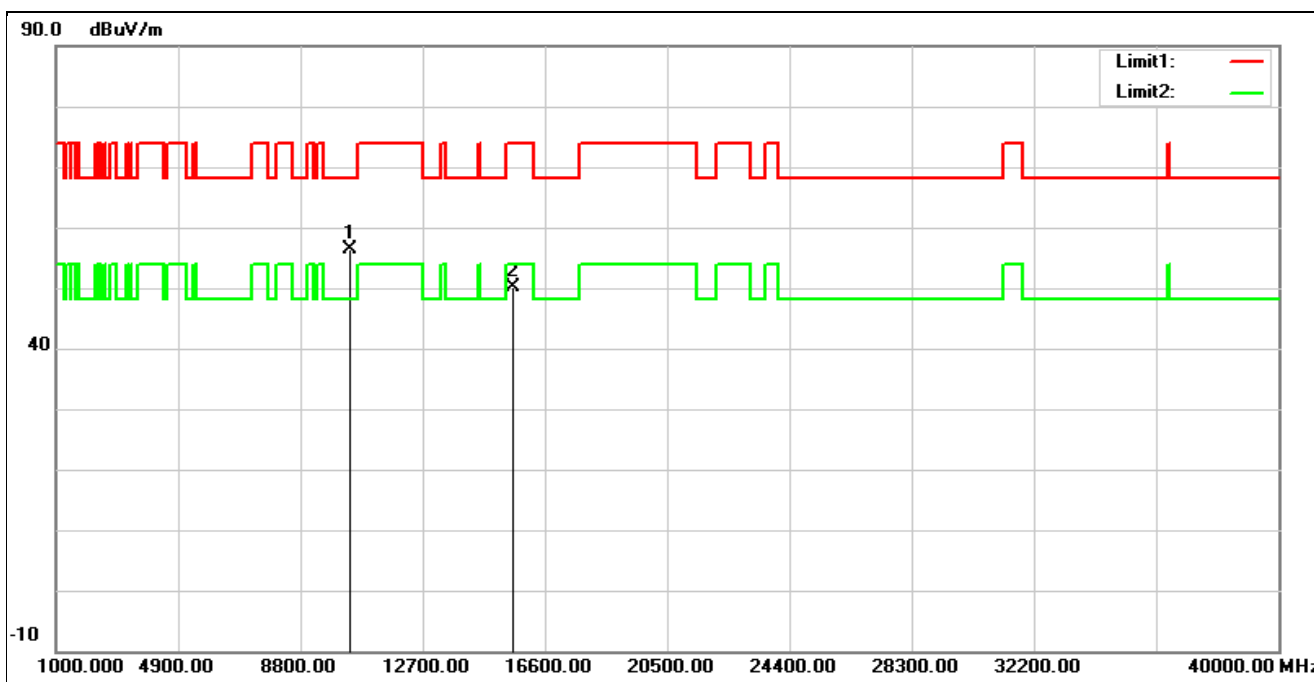


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	42.25	14.10	56.35	68.20	-11.85	peak
2	15600.000	33.11	17.01	50.12	74.00	-23.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

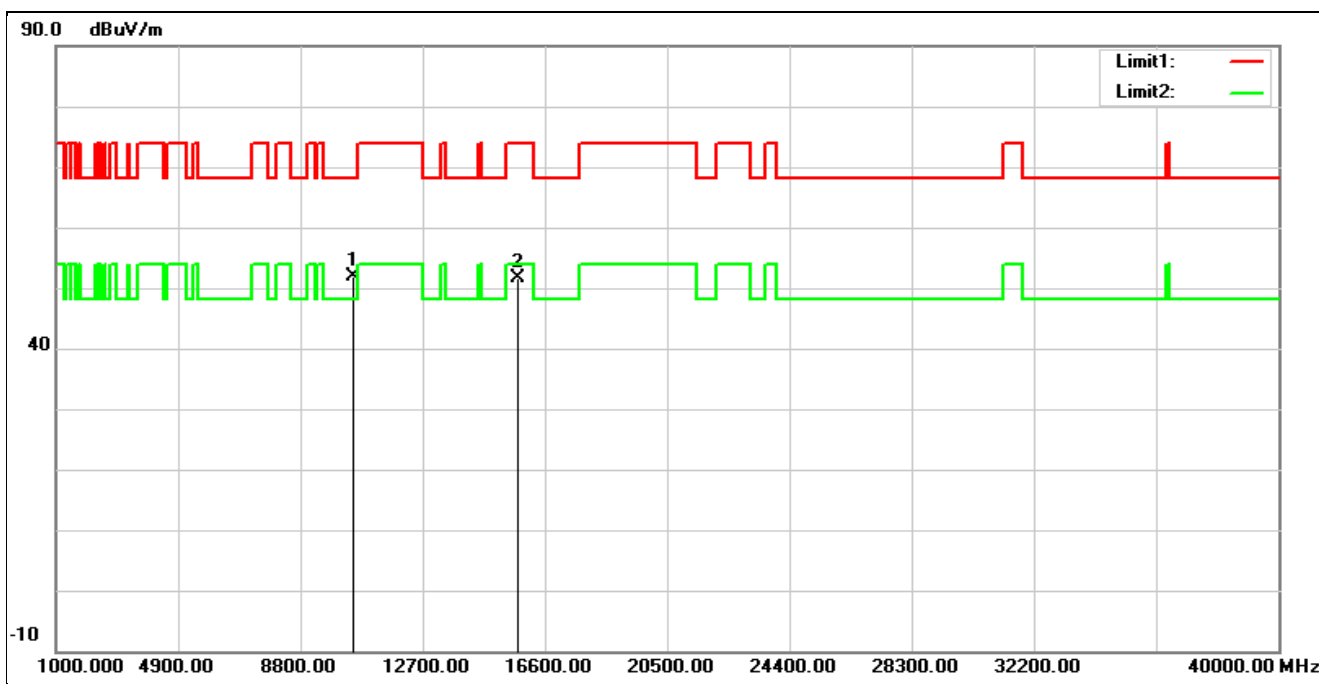


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	37.29	14.54	51.83	68.20	-16.37	peak
2	15720.000	34.41	17.34	51.75	74.00	-22.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

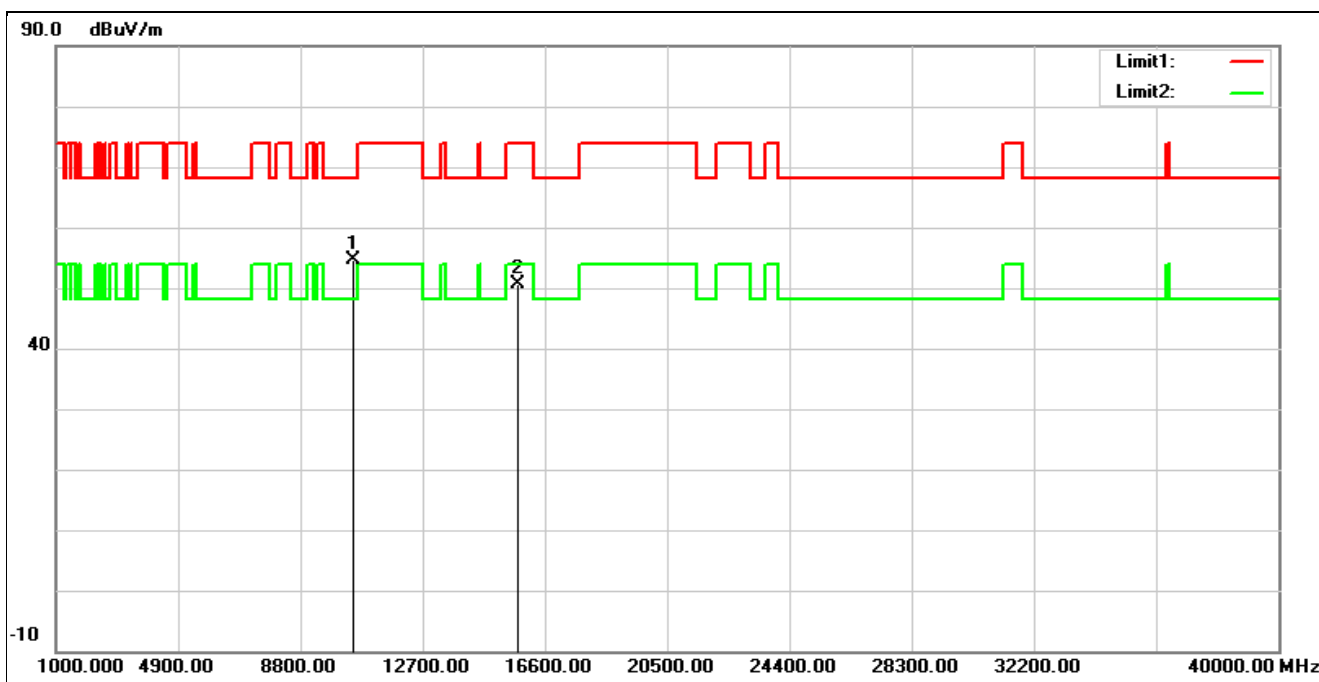


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	40.00	14.54	54.54	68.20	-13.66	peak
2	15720.000	33.39	17.34	50.73	74.00	-23.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

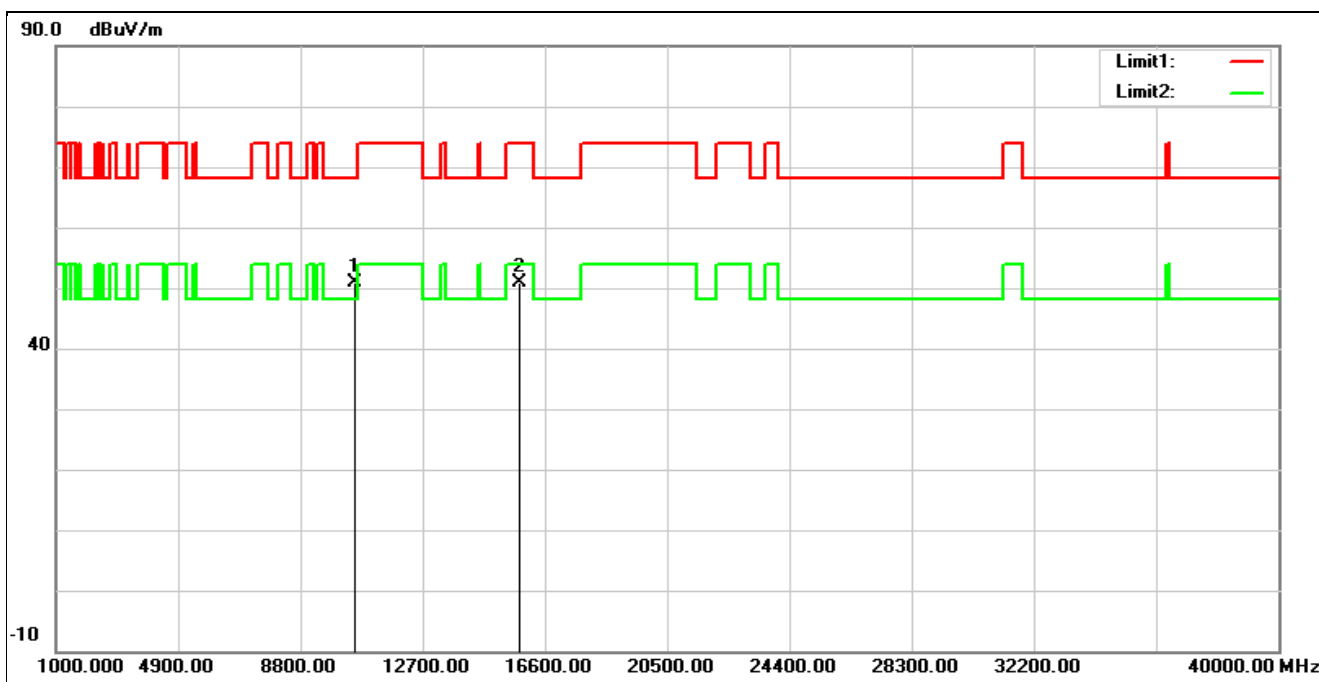


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	36.26	14.60	50.86	68.20	-17.34	peak
2	15780.000	33.82	17.10	50.92	74.00	-23.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

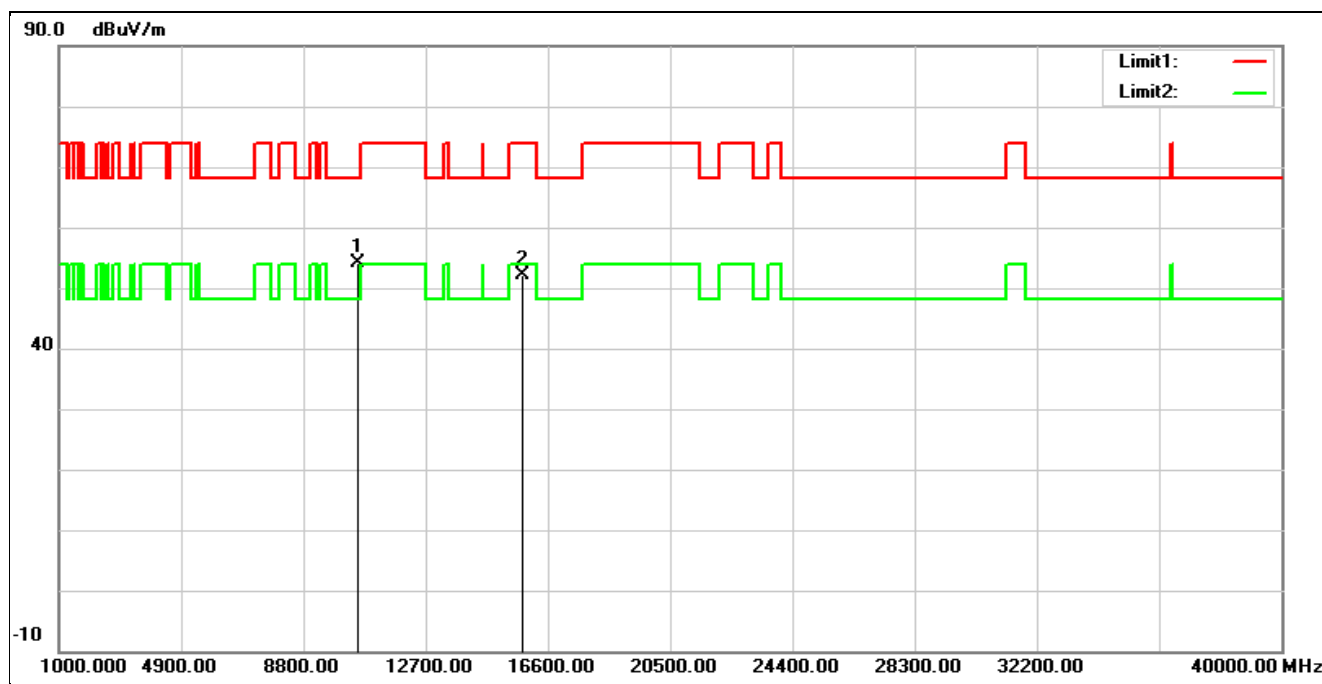


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	39.45	14.60	54.05	68.20	-14.15	peak
2	15780.000	35.10	17.10	52.20	74.00	-21.80	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

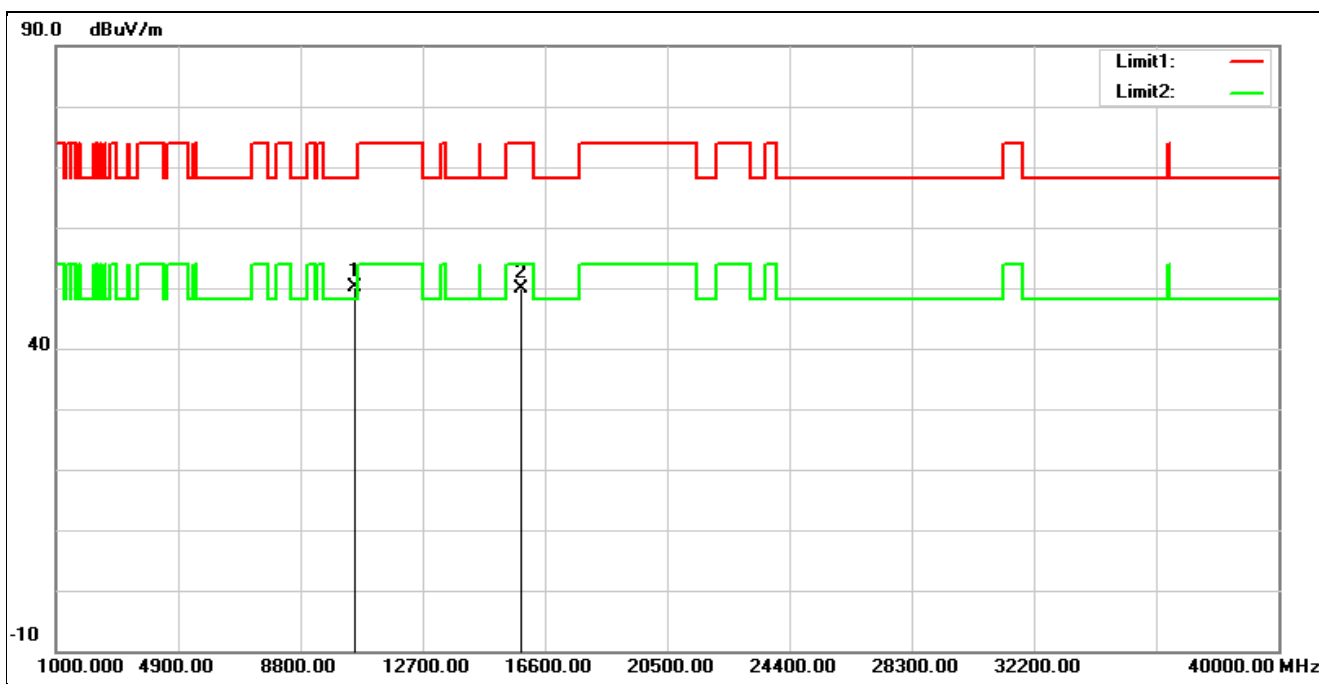


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.57	14.48	50.05	68.20	-18.15	peak
2	15840.000	33.01	16.90	49.91	74.00	-24.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

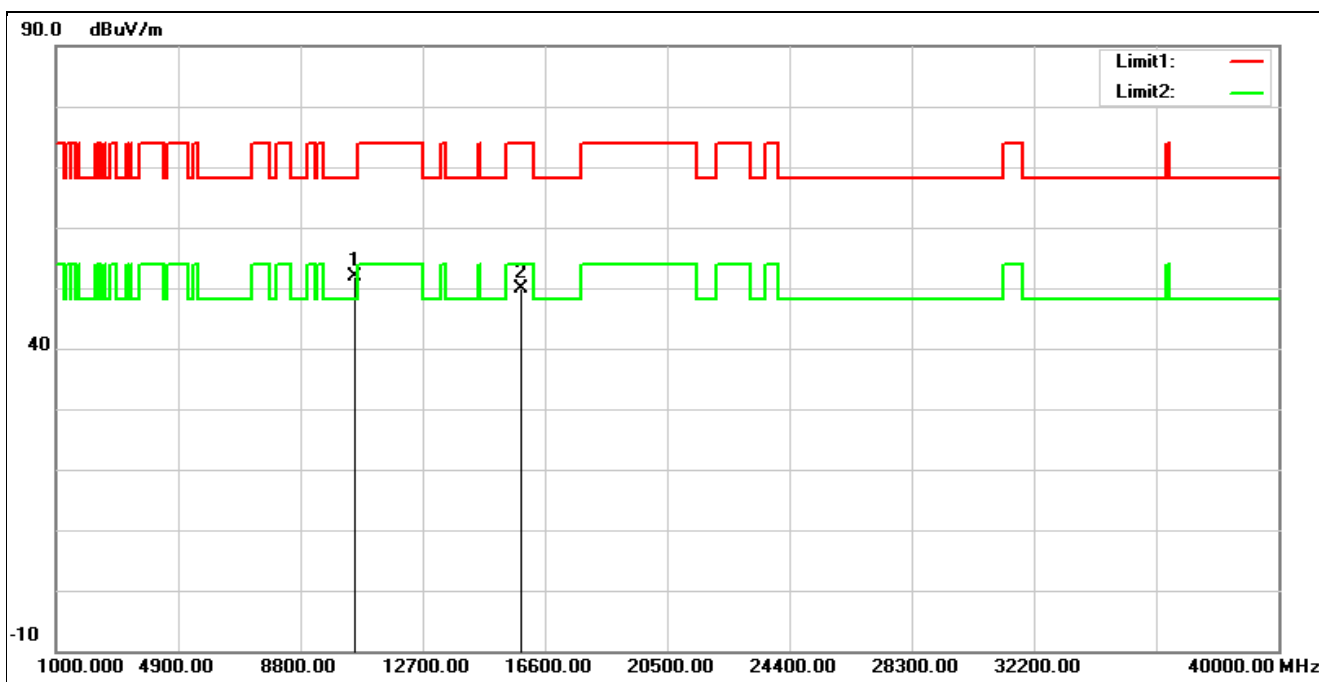


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	37.49	14.48	51.97	68.20	-16.23	peak
2	15840.000	33.08	16.90	49.98	74.00	-24.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

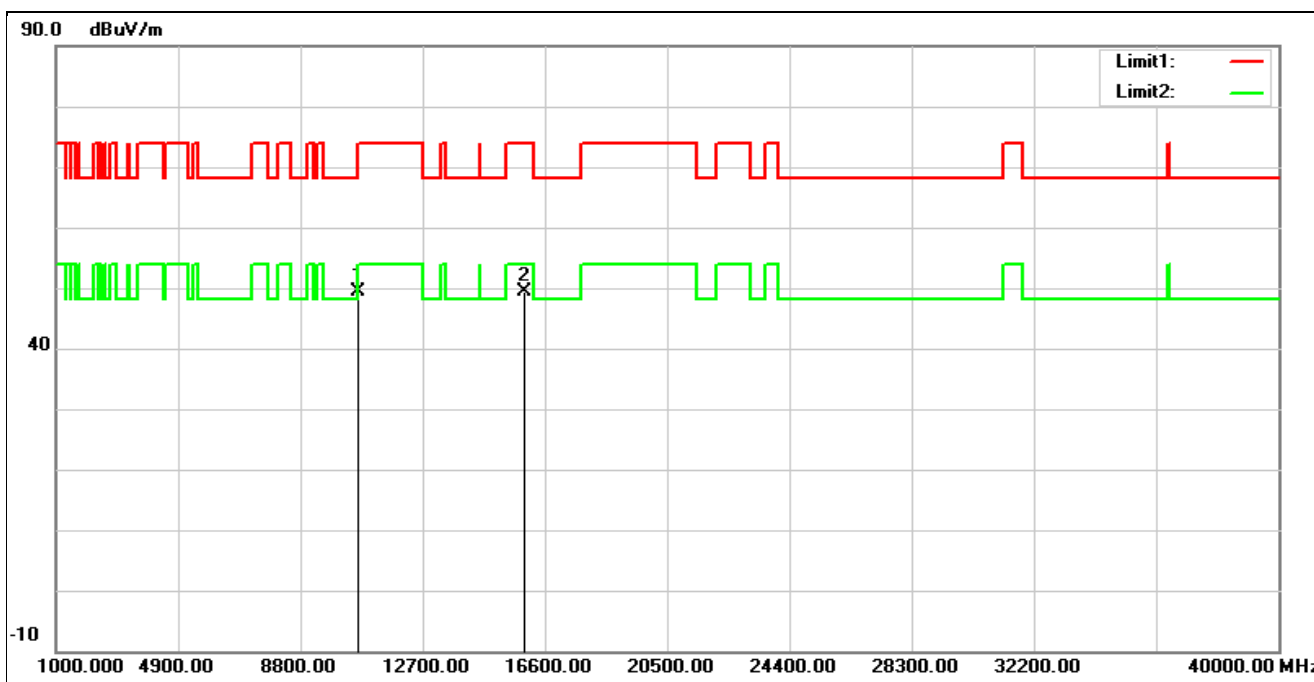


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.93	14.41	49.34	74.00	-24.66	peak
2*	15960.000	32.80	16.55	49.35	74.00	-24.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

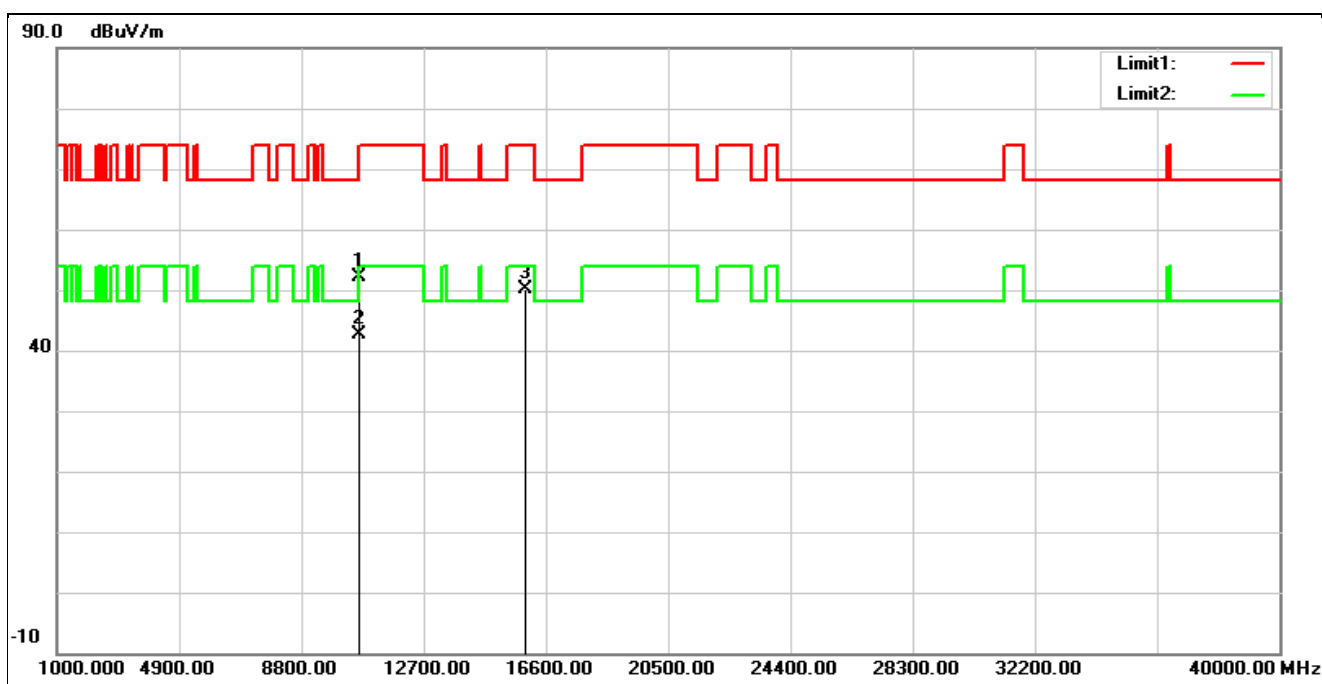


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	37.67	14.41	52.08	74.00	-21.92	peak
2*	10640.000	28.22	14.41	42.63	54.00	-11.37	AVG
3	15960.000	33.62	16.55	50.17	74.00	-23.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

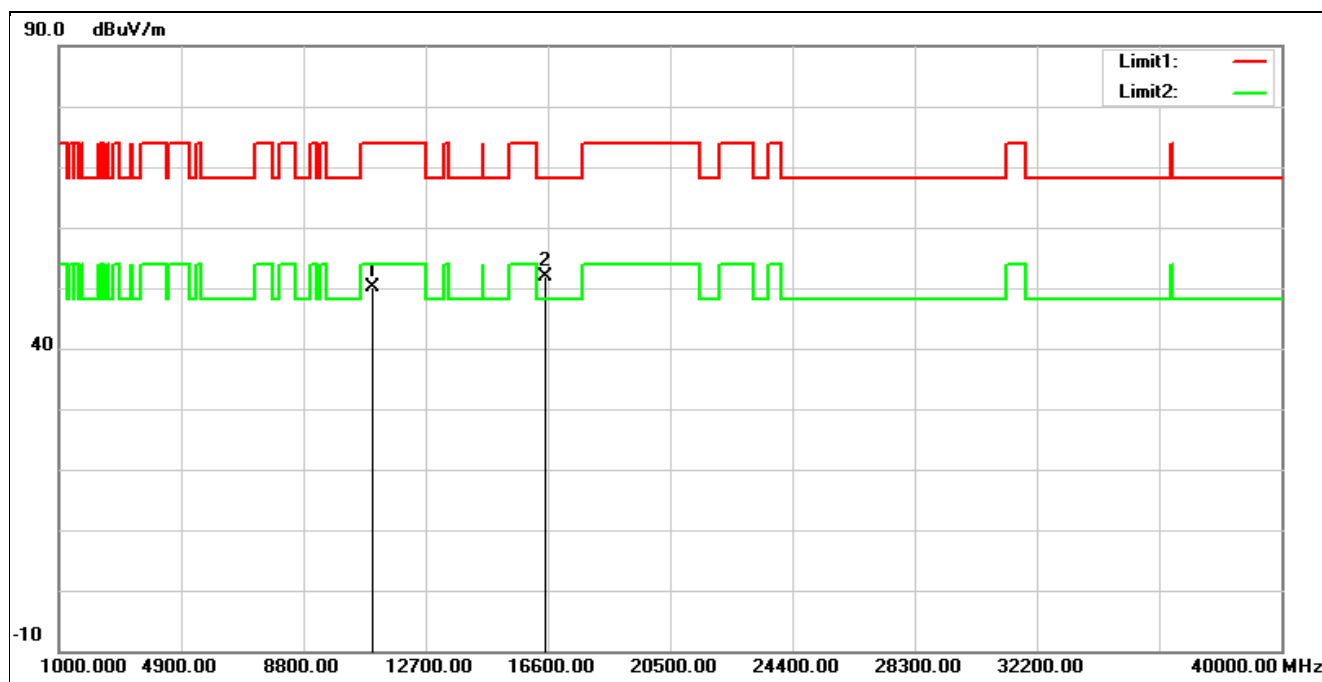


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.36	14.73	50.09	74.00	-23.91	peak
2*	16500.000	34.11	17.77	51.88	68.20	-16.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

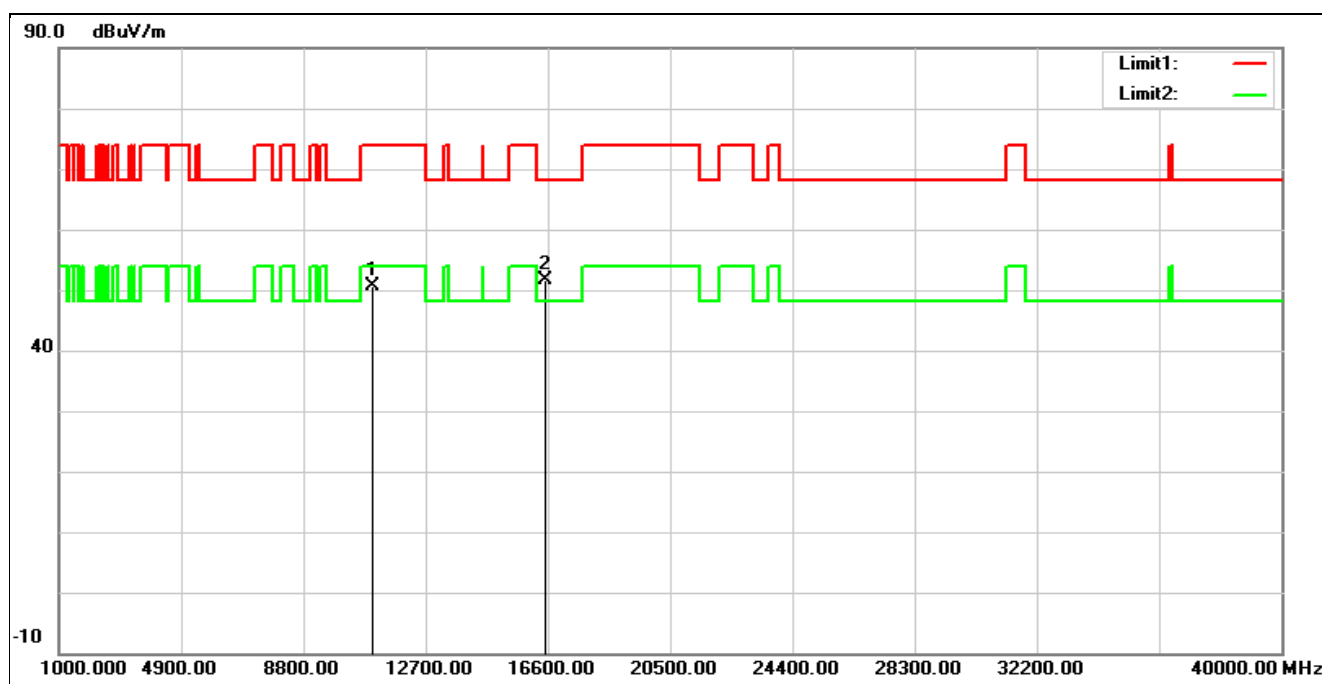


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.00	14.73	50.73	74.00	-23.27	peak
2*	16500.000	33.78	17.77	51.55	68.20	-16.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

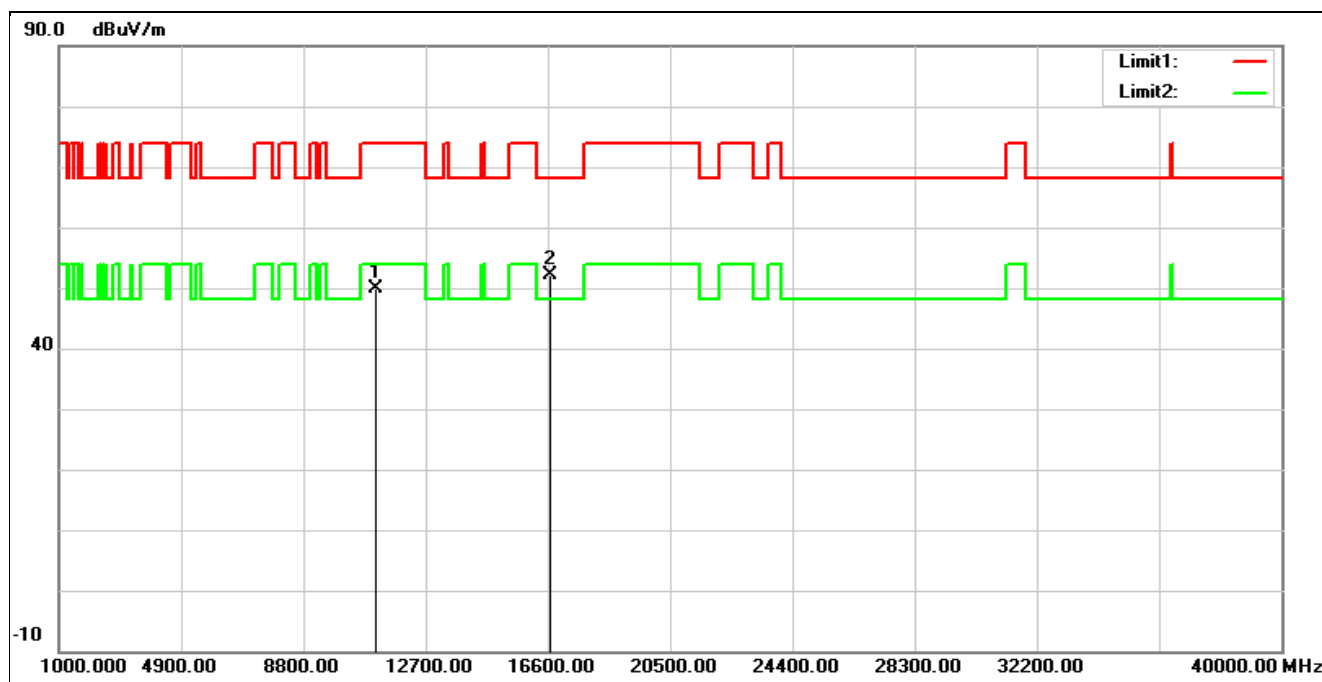


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.12	14.79	49.91	74.00	-24.09	peak
2*	16680.000	33.57	18.61	52.18	68.20	-16.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5560 MHz		
Remark:			

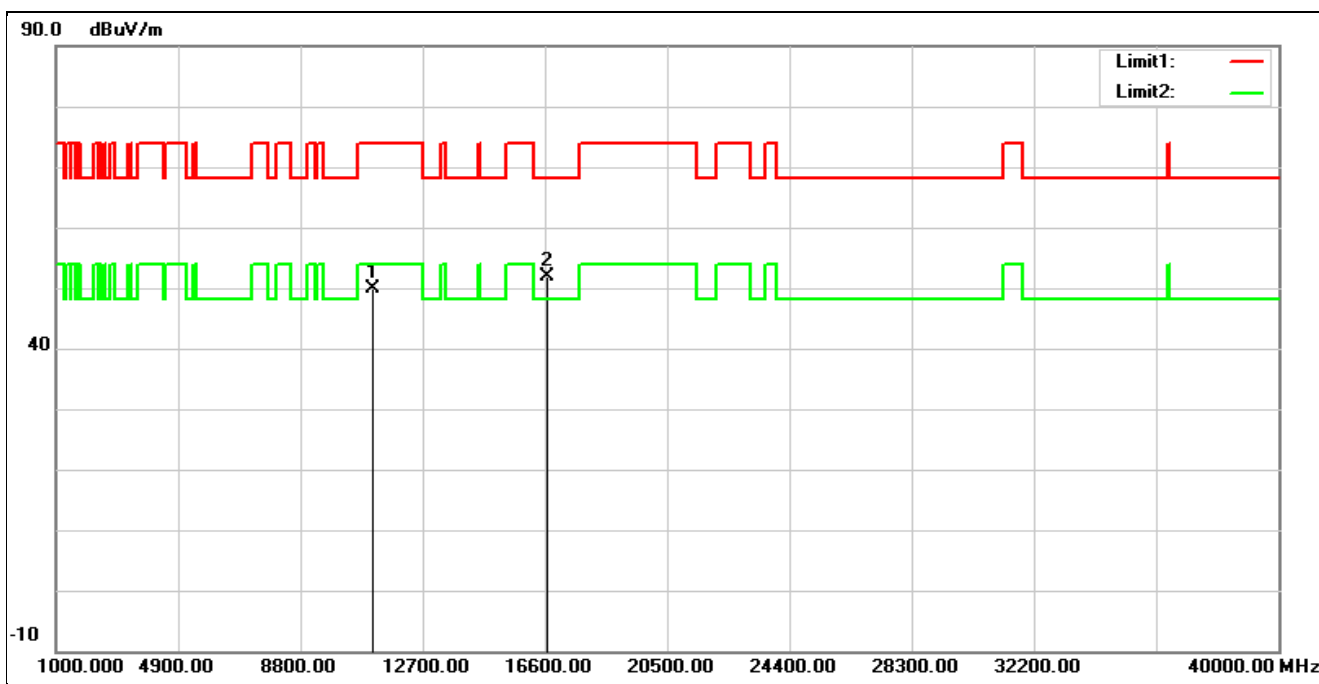


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.20	14.79	49.99	74.00	-24.01	peak
2*	16680.000	33.38	18.61	51.99	68.20	-16.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

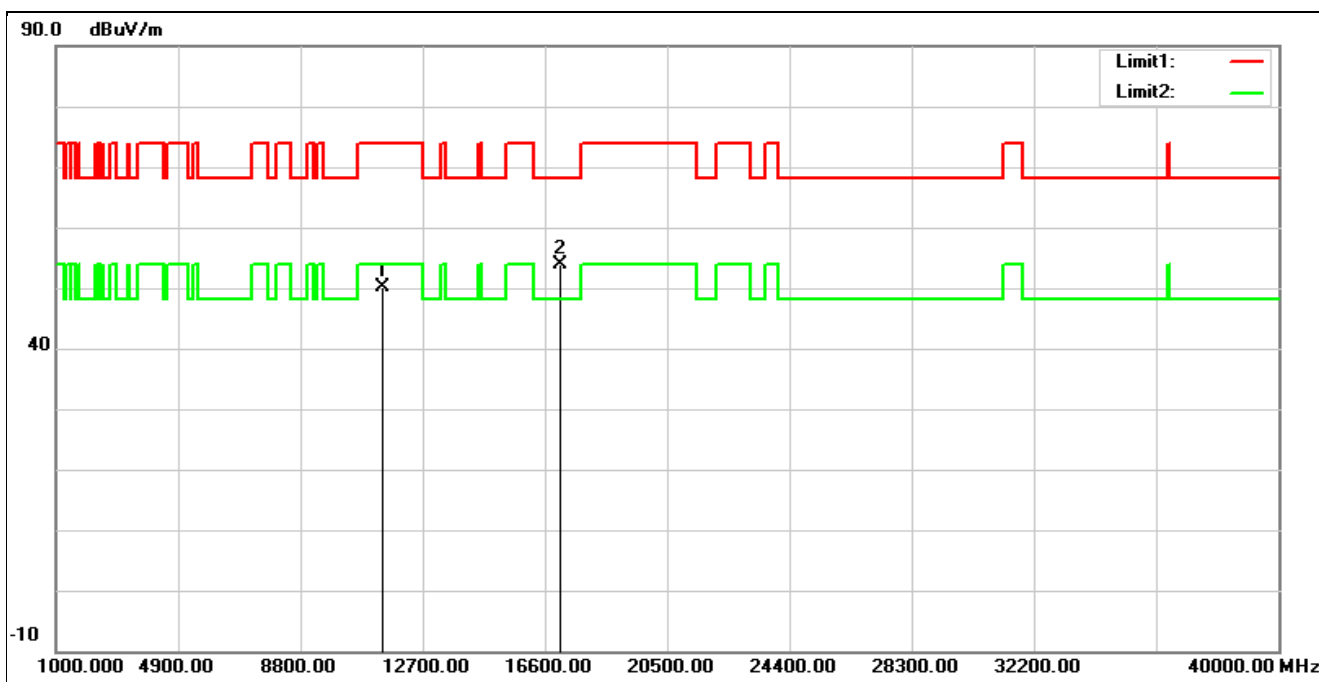


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.09	15.07	50.16	74.00	-23.84	peak
2*	17100.000	33.19	20.64	53.83	68.20	-14.37	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

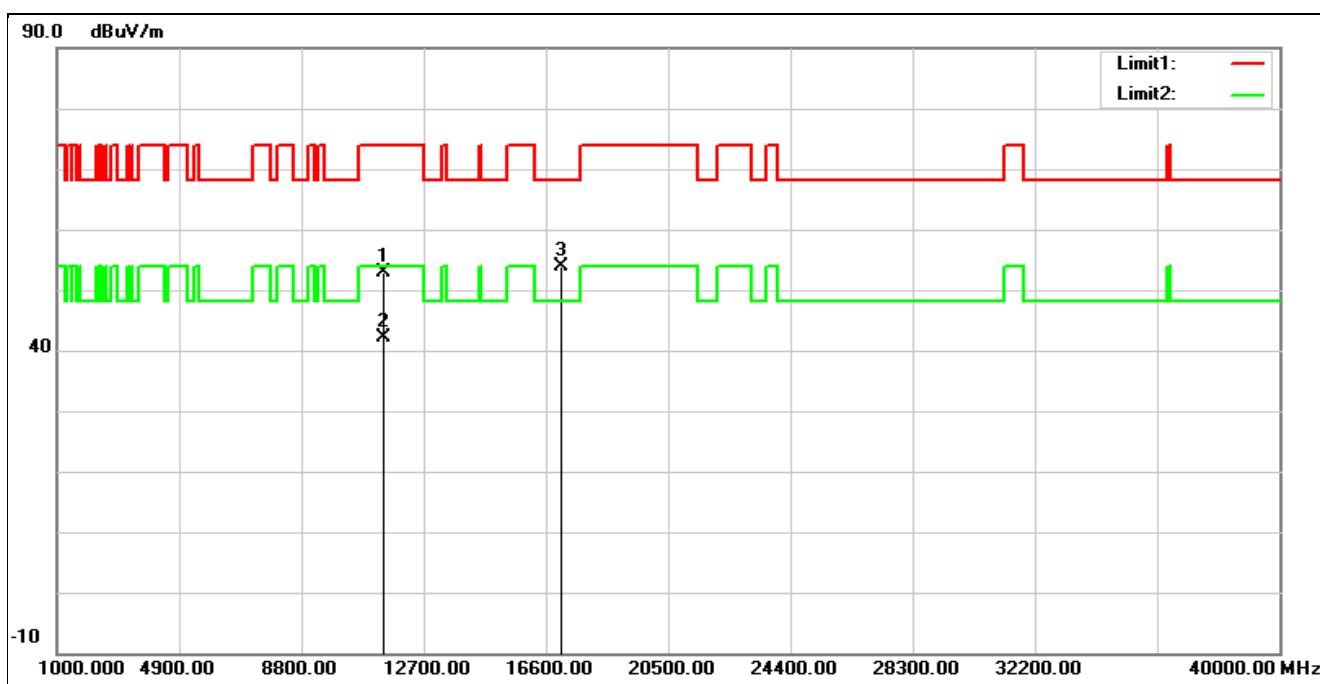


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	37.69	15.07	52.76	74.00	-21.24	peak
2*	11400.000	26.98	15.07	42.05	54.00	-11.95	AVG
3	17100.000	33.35	20.64	53.99	68.20	-14.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

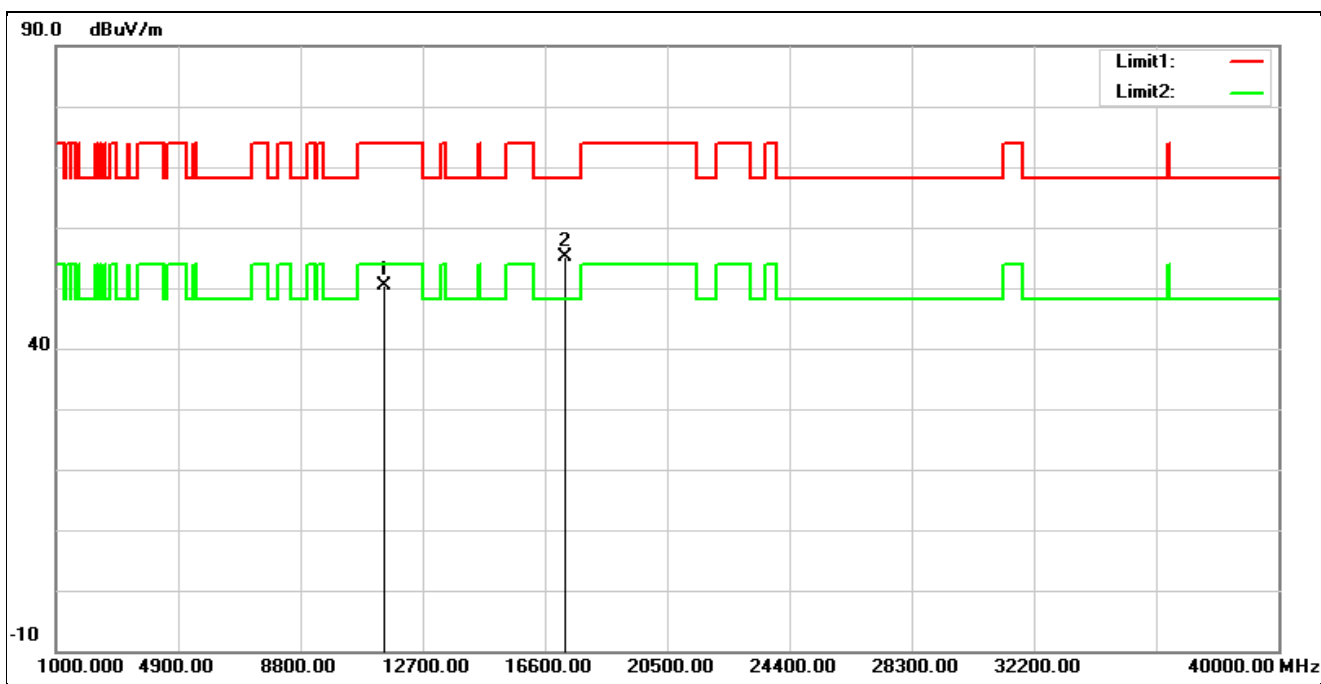


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.91	15.42	50.33	74.00	-23.67	peak
2*	17235.000	33.01	22.01	55.02	68.20	-13.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

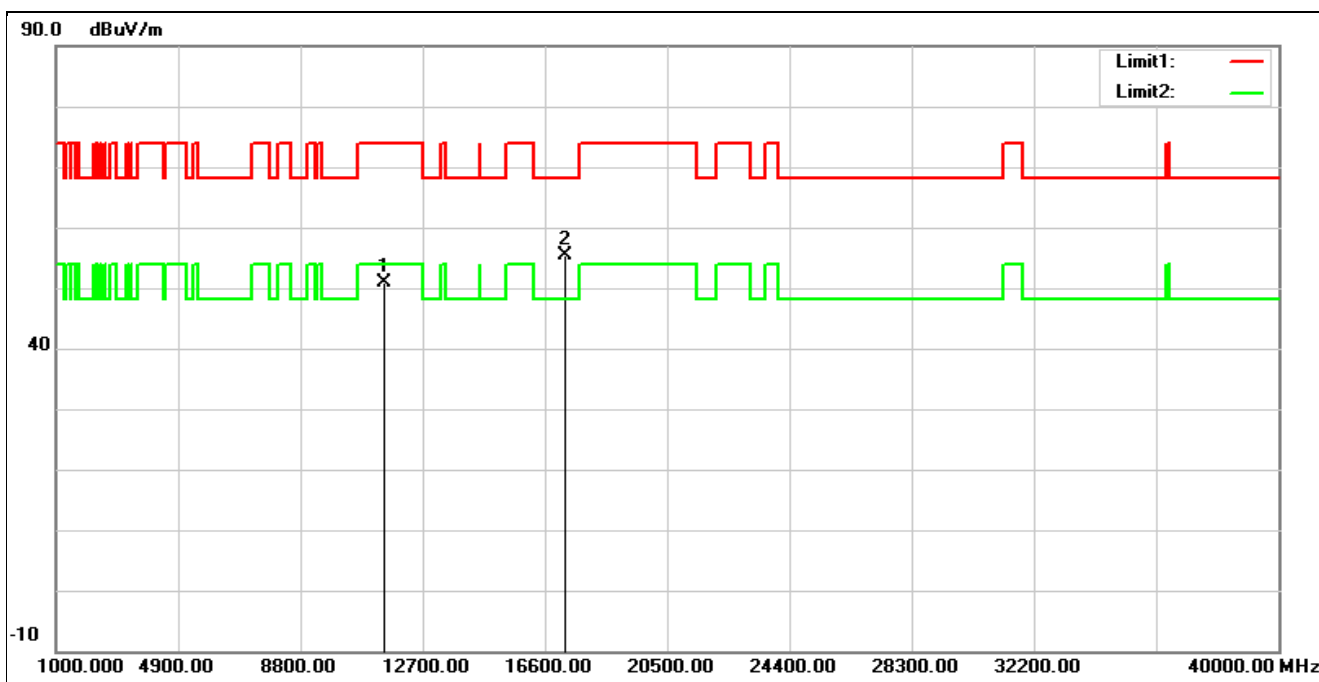


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.47	15.42	50.89	74.00	-23.11	peak
2*	17235.000	33.49	22.01	55.50	68.20	-12.70	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

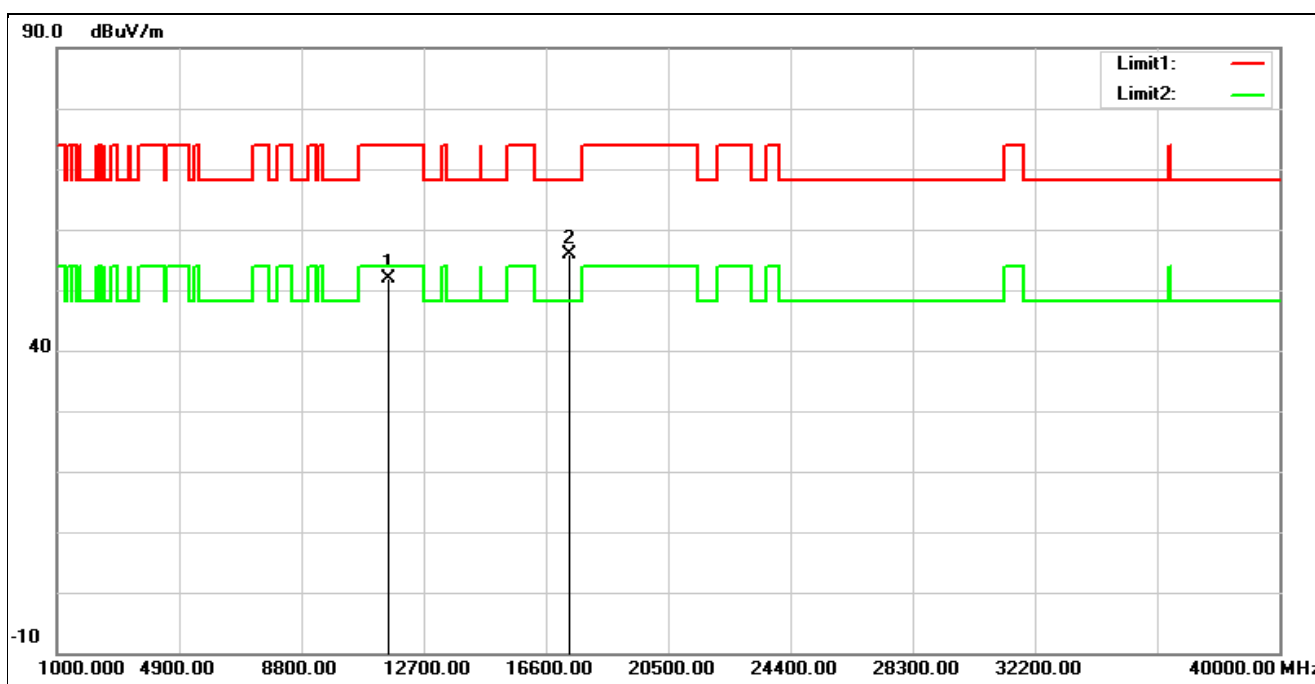


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.73	15.21	51.94	74.00	-22.06	peak
2*	17355.000	32.91	22.96	55.87	68.20	-12.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

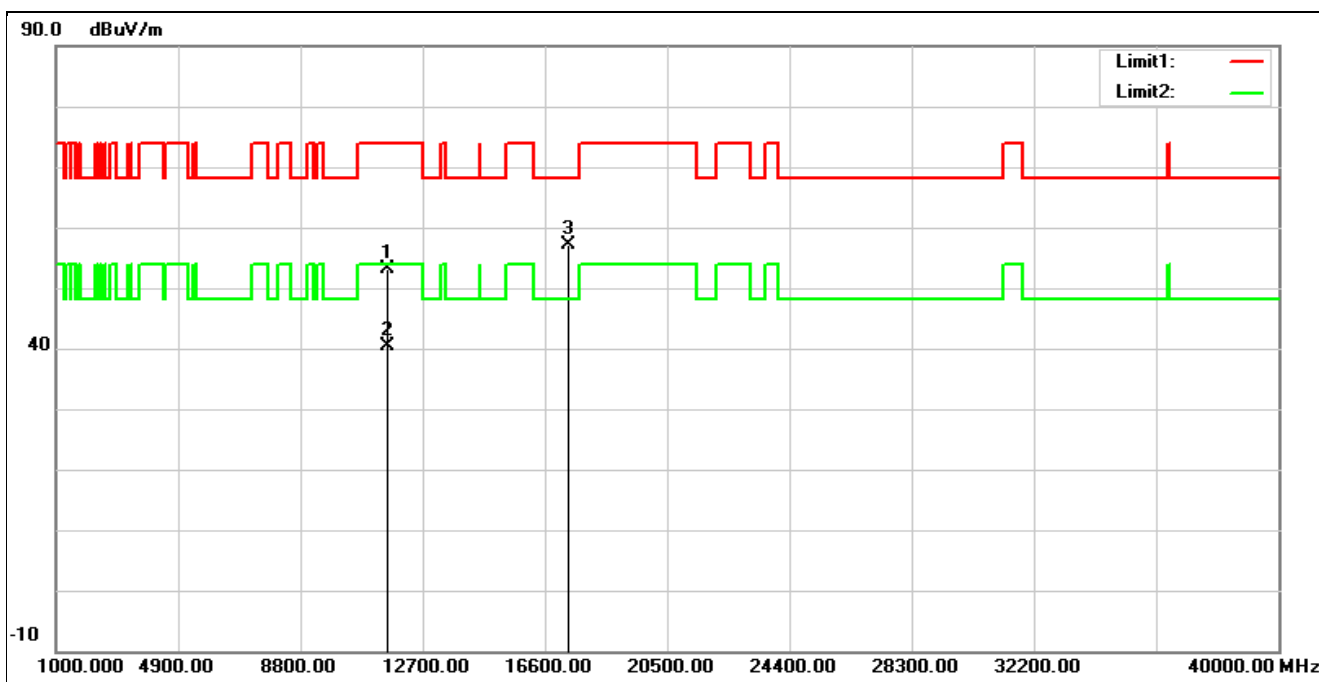


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	37.86	15.21	53.07	74.00	-20.93	peak
2	11570.000	25.05	15.21	40.26	54.00	-13.74	AVG
3*	17355.000	34.09	22.96	57.05	68.20	-11.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

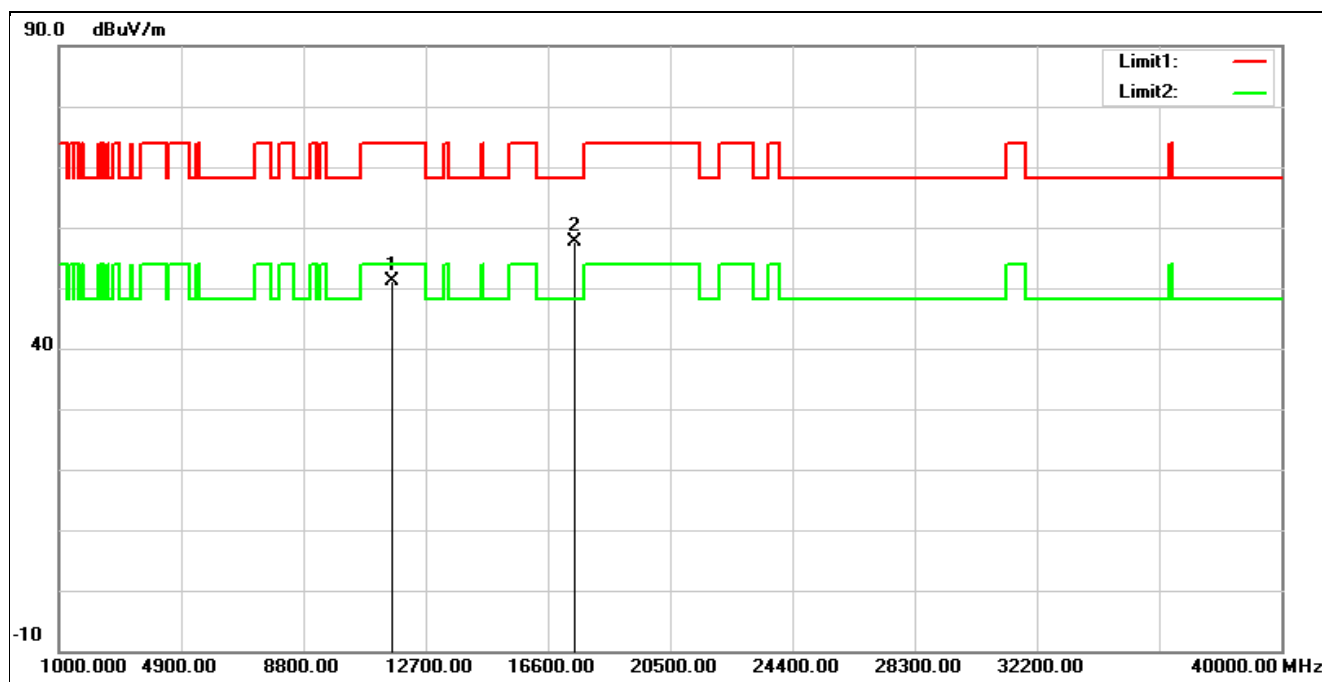


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.09	15.04	51.13	74.00	-22.87	peak
2*	17475.000	33.75	23.95	57.70	68.20	-10.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

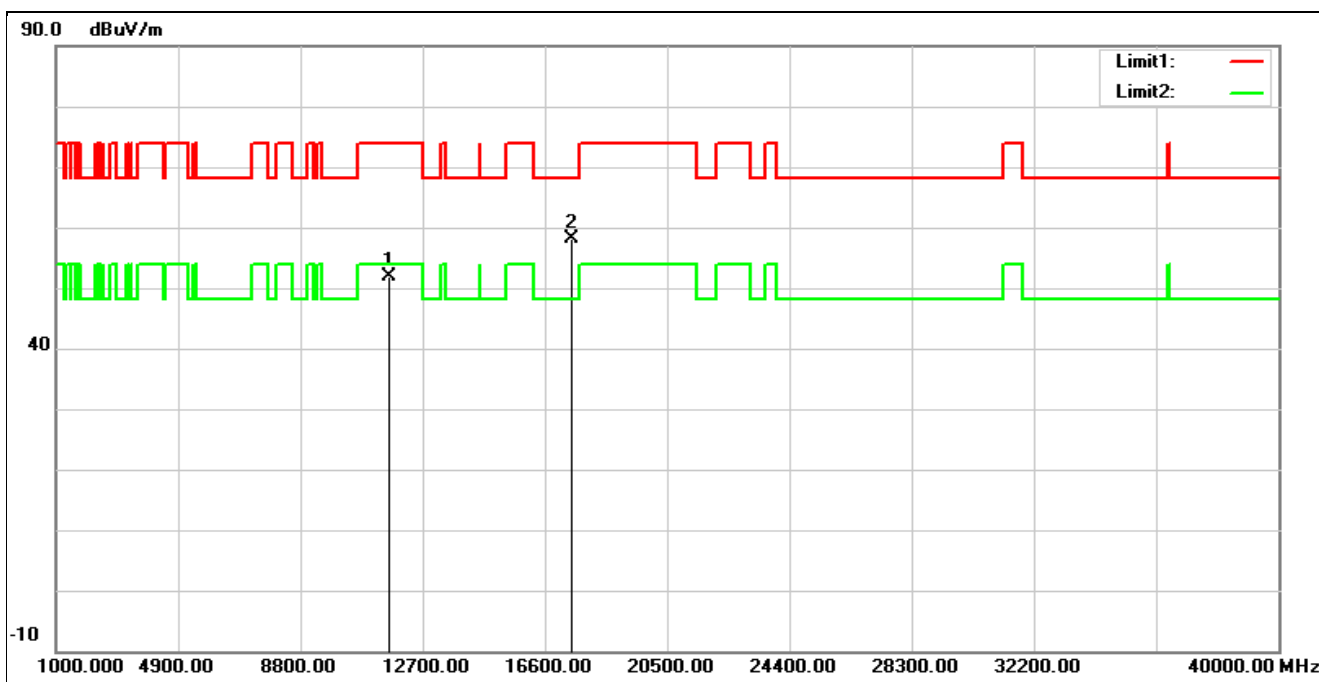


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.89	15.04	51.93	74.00	-22.07	peak
2*	17475.000	34.19	23.95	58.14	68.20	-10.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

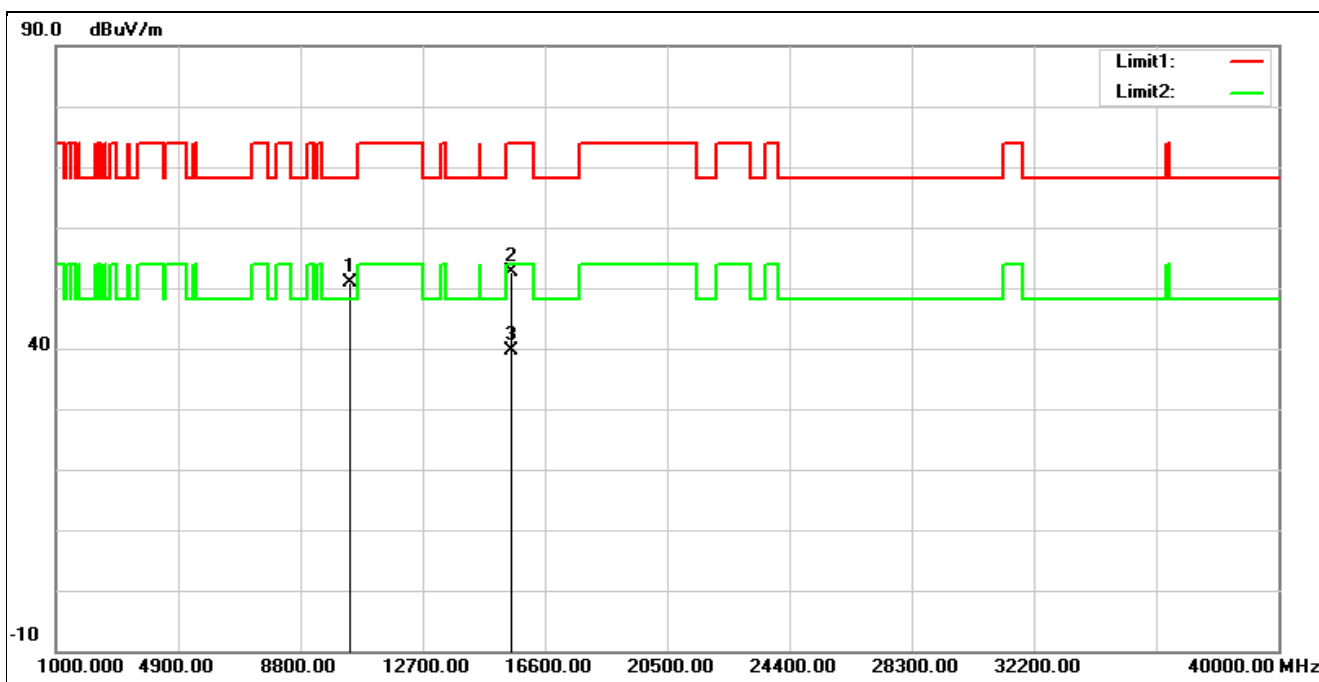


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.89	13.99	50.88	68.20	-17.32	peak
2	15540.000	35.22	17.31	52.53	74.00	-21.47	peak
3*	15540.000	22.43	17.31	39.74	54.00	-14.26	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

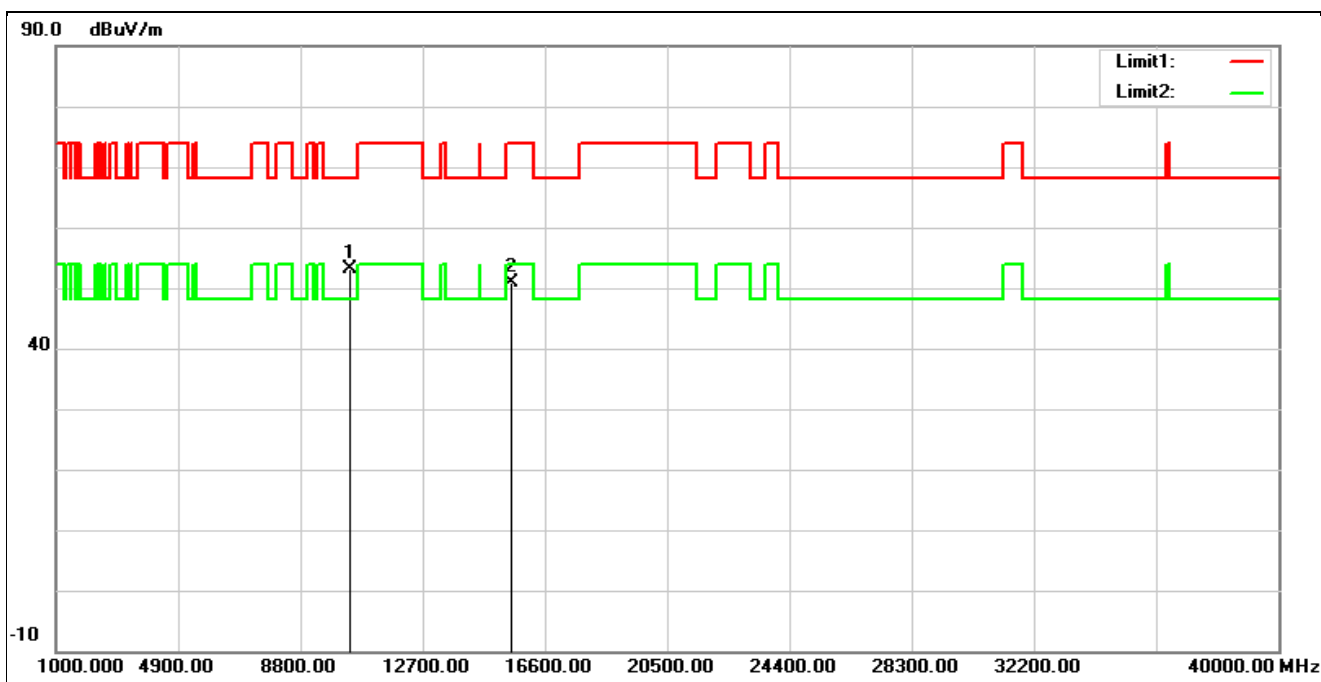


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	39.20	13.99	53.19	68.20	-15.01	peak
2	15540.000	33.55	17.31	50.86	74.00	-23.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

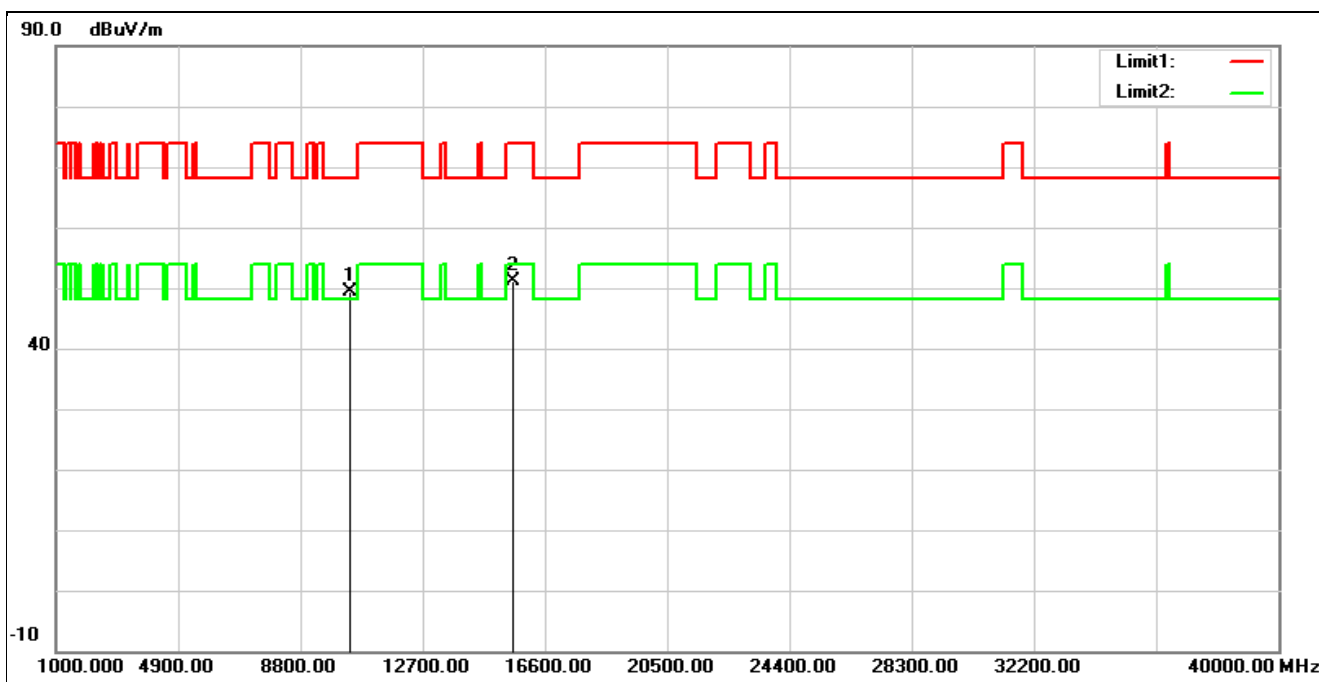


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.17	14.10	49.27	68.20	-18.93	peak
2	15600.000	34.14	17.01	51.15	74.00	-22.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

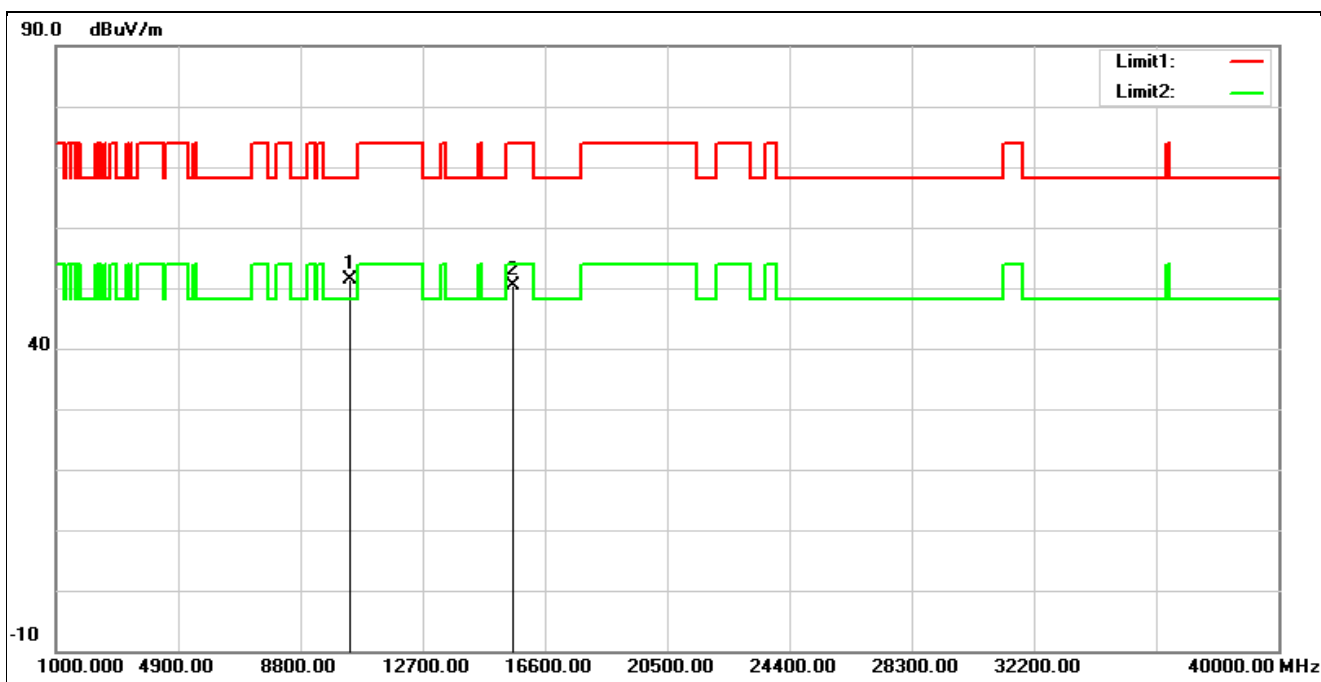


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	37.28	14.10	51.38	68.20	-16.82	peak
2	15600.000	33.39	17.01	50.40	74.00	-23.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

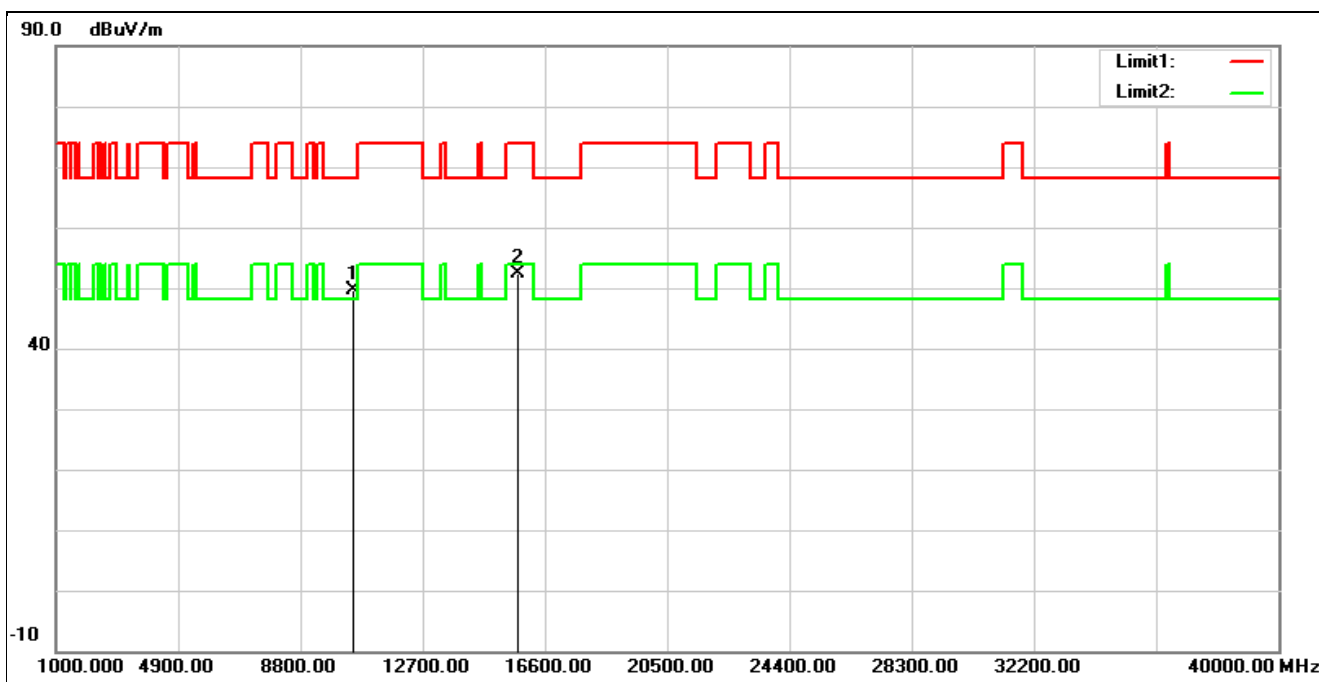


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.16	14.54	49.70	68.20	-18.50	peak
2	15720.000	34.97	17.34	52.31	74.00	-21.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

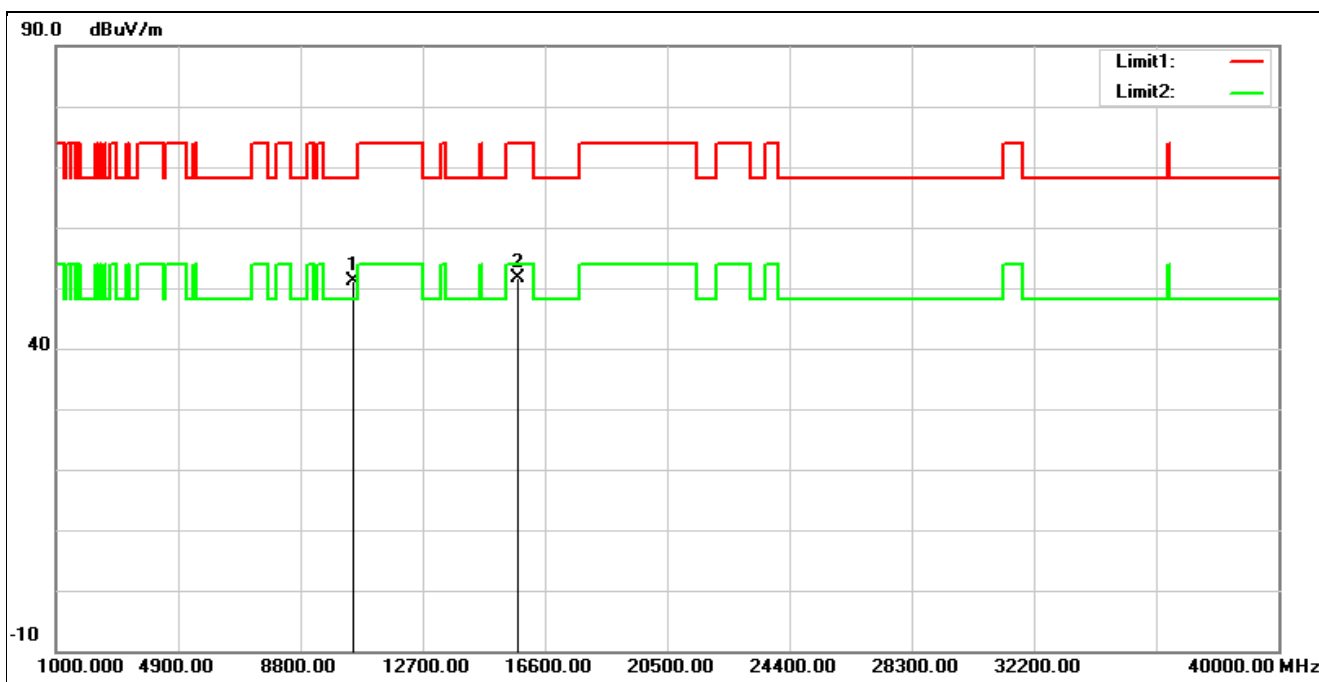


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	36.69	14.54	51.23	68.20	-16.97	peak
2	15720.000	34.18	17.34	51.52	74.00	-22.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

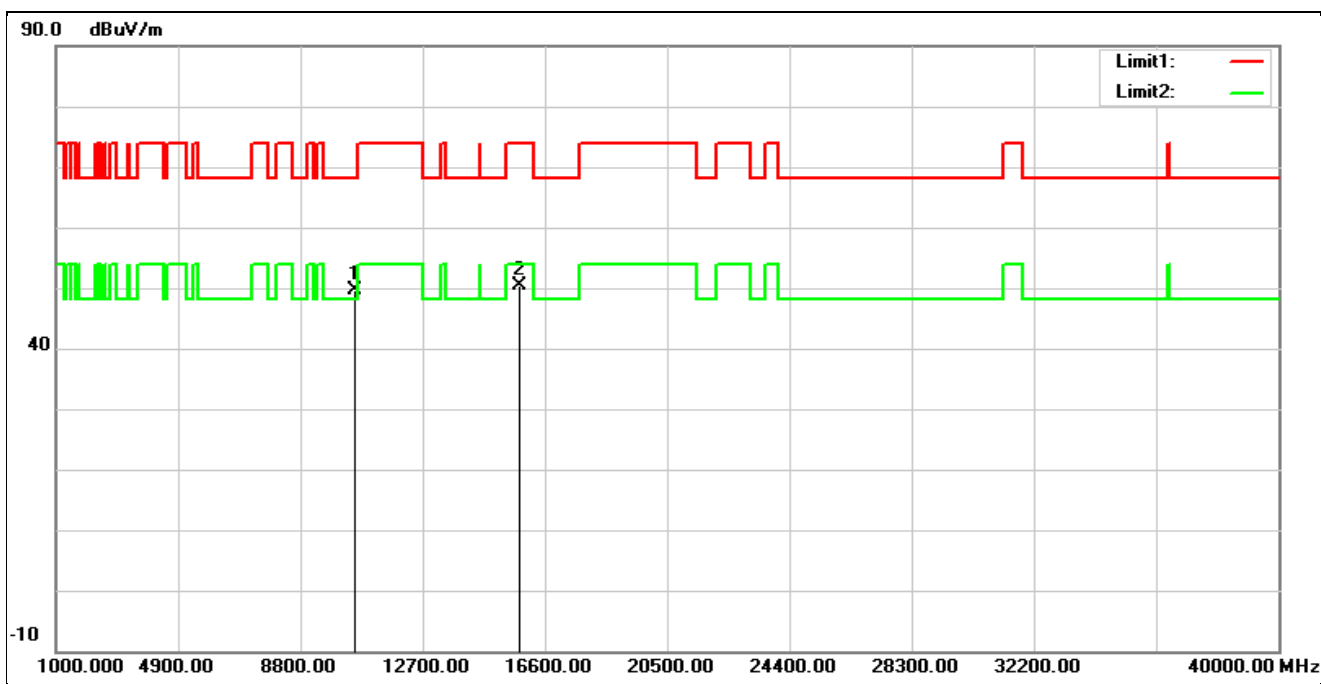


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	35.13	14.60	49.73	68.20	-18.47	peak
2	15780.000	33.27	17.10	50.37	74.00	-23.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

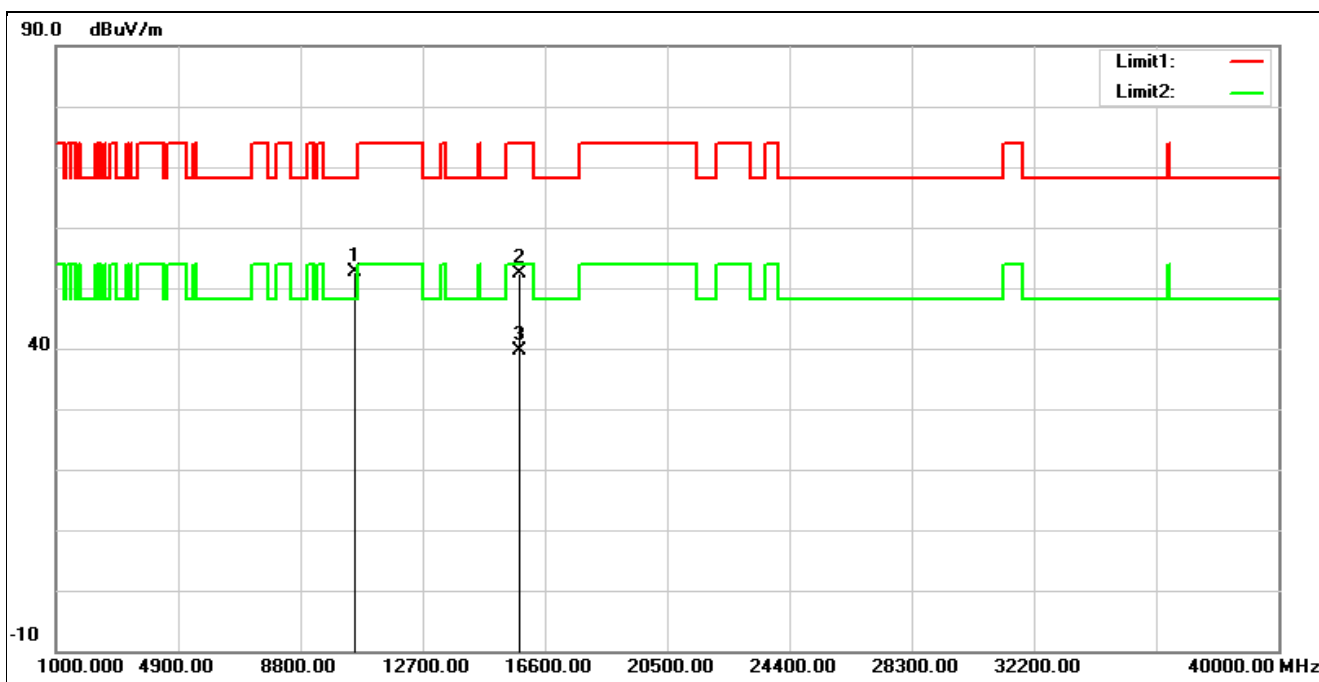


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	37.95	14.60	52.55	68.20	-15.65	peak
2	15780.000	35.33	17.10	52.43	74.00	-21.57	peak
3*	15780.000	22.48	17.10	39.58	54.00	-14.42	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

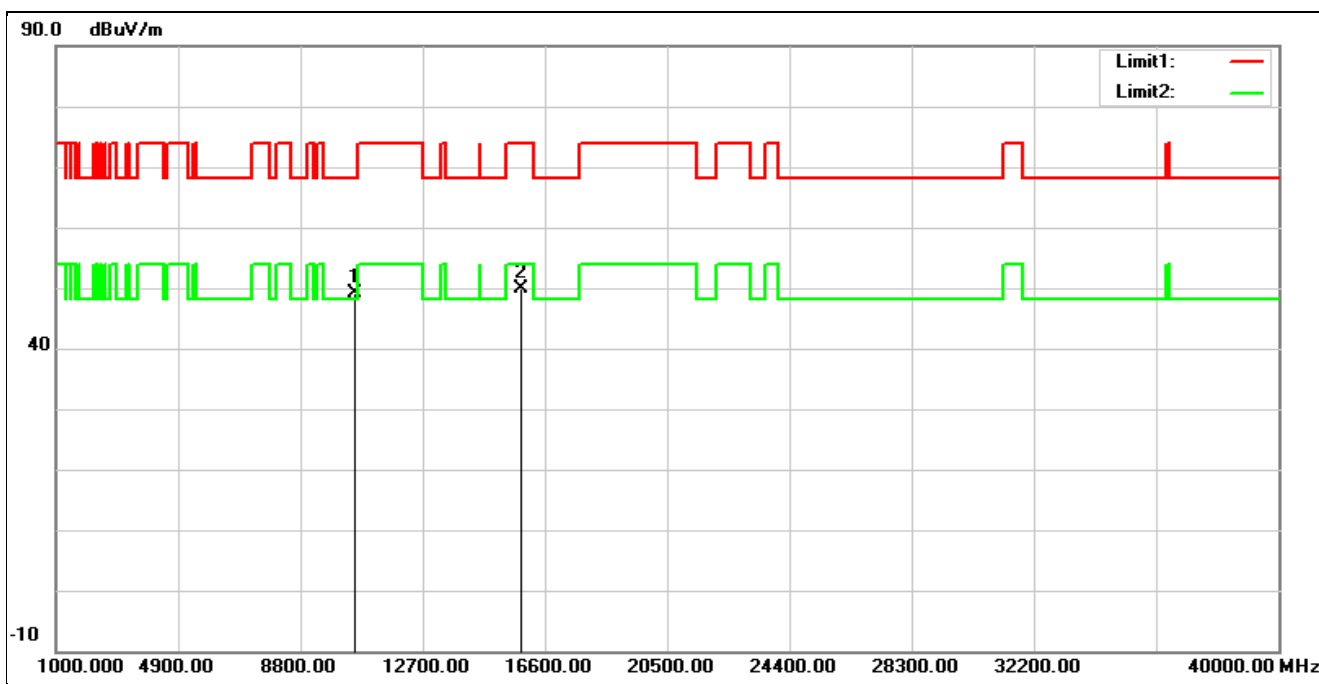


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	34.57	14.48	49.05	68.20	-19.15	peak
2	15840.000	33.05	16.90	49.95	74.00	-24.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

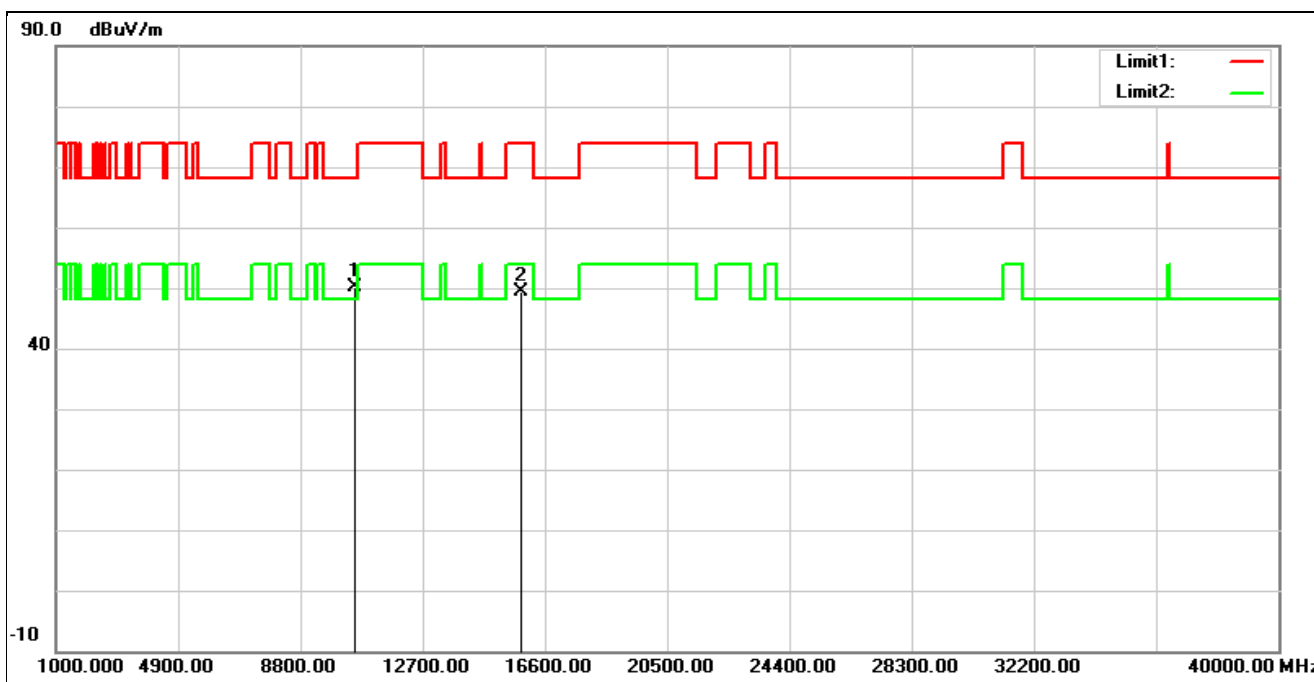


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.76	14.48	50.24	68.20	-17.96	peak
2	15840.000	32.54	16.90	49.44	74.00	-24.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

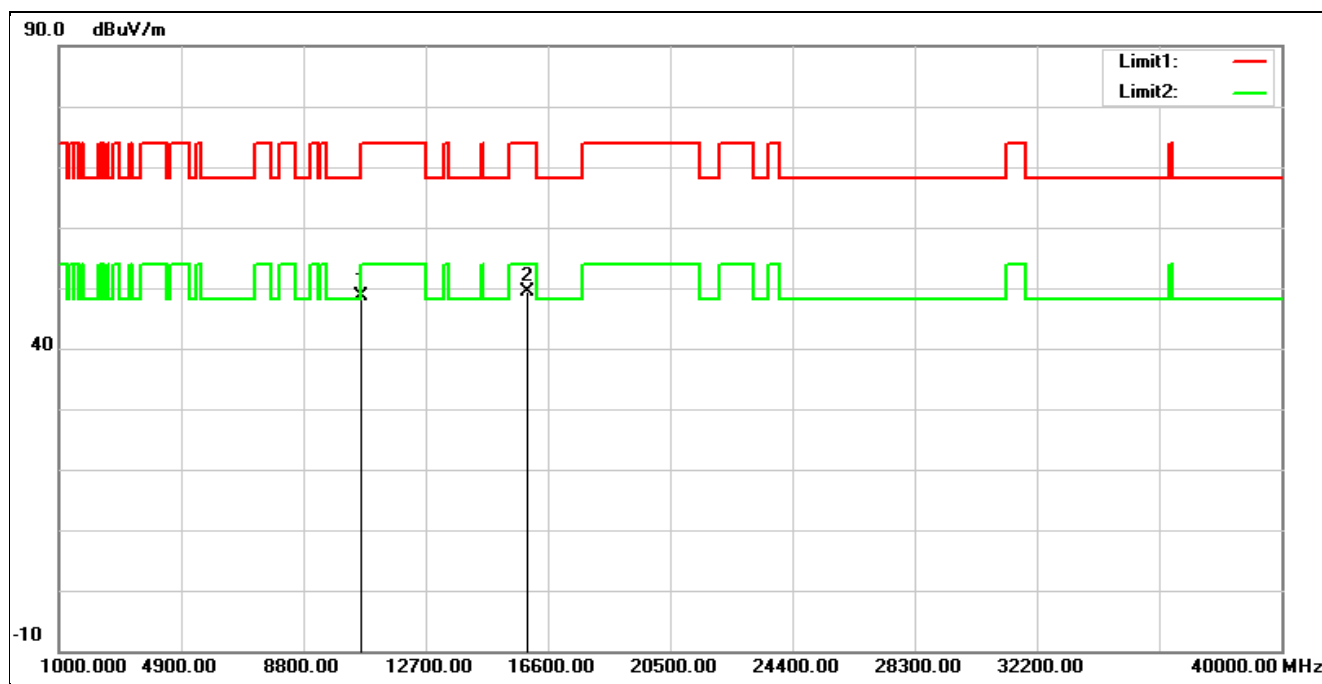


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.11	14.41	48.52	74.00	-25.48	peak
2*	15960.000	32.88	16.55	49.43	74.00	-24.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

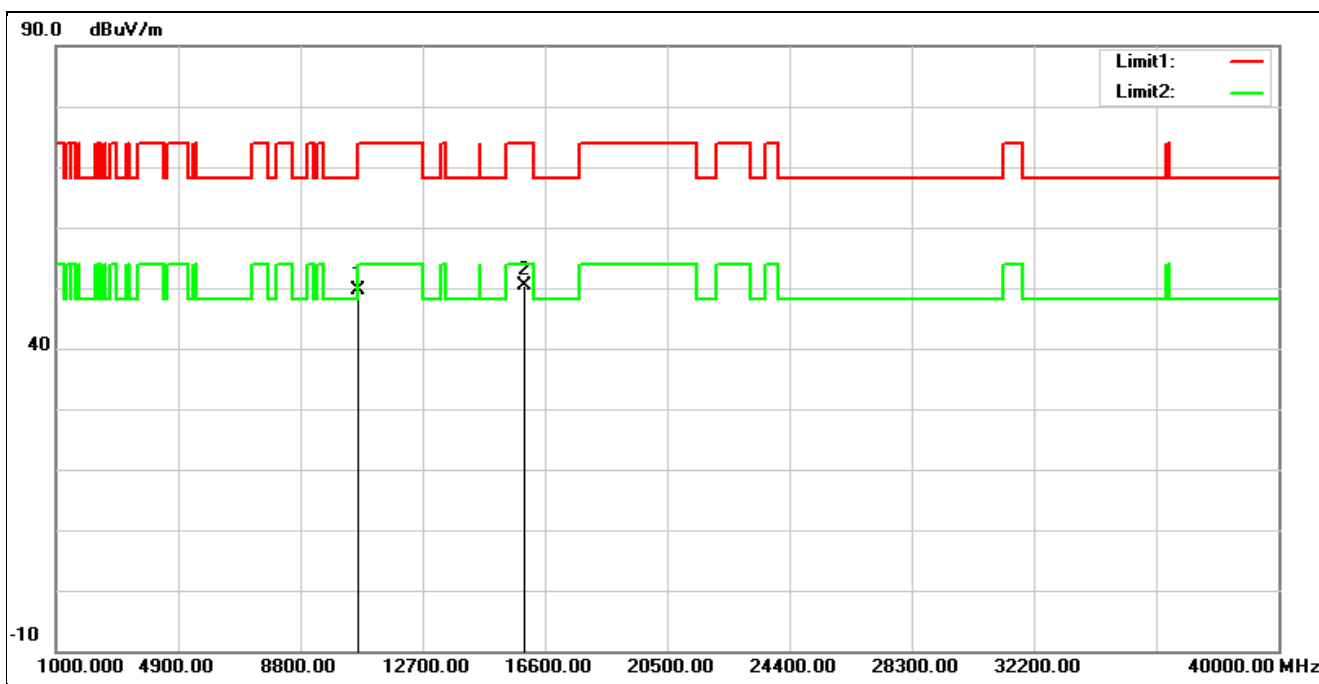


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.10	14.41	49.51	74.00	-24.49	peak
2*	15960.000	33.71	16.55	50.26	74.00	-23.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

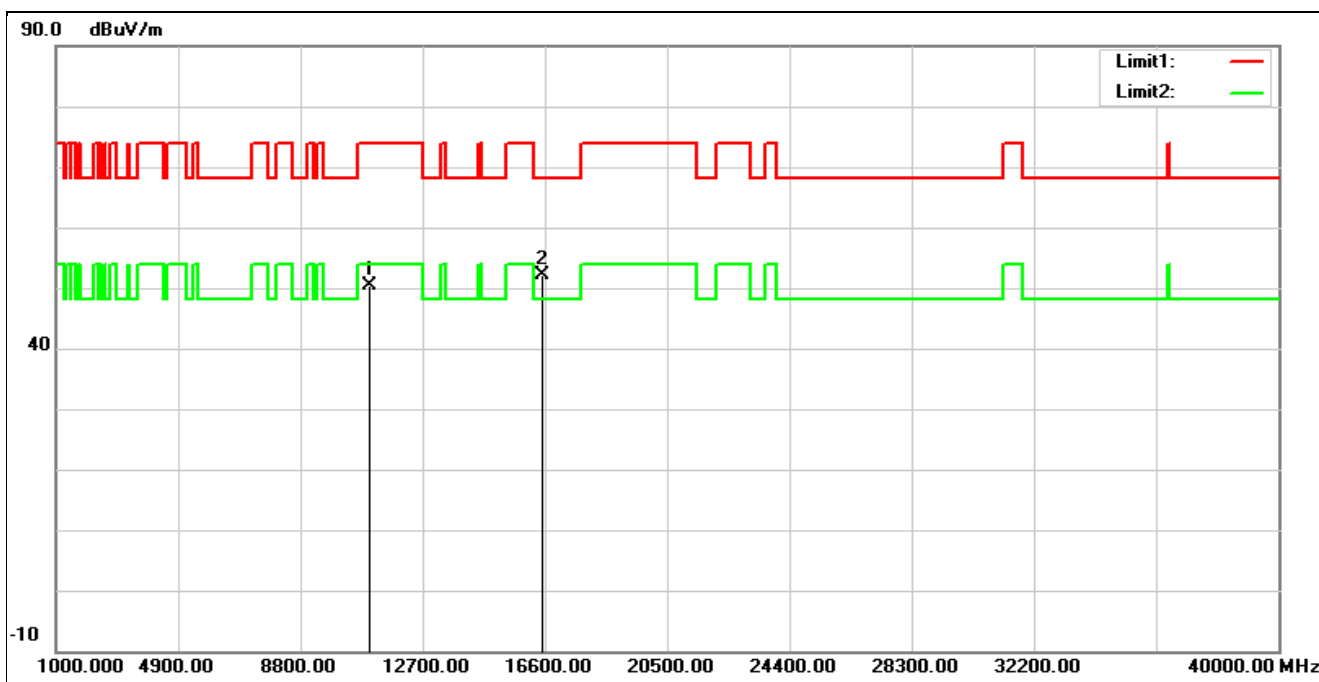


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.62	14.73	50.35	74.00	-23.65	peak
2*	16500.000	34.45	17.77	52.22	68.20	-15.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

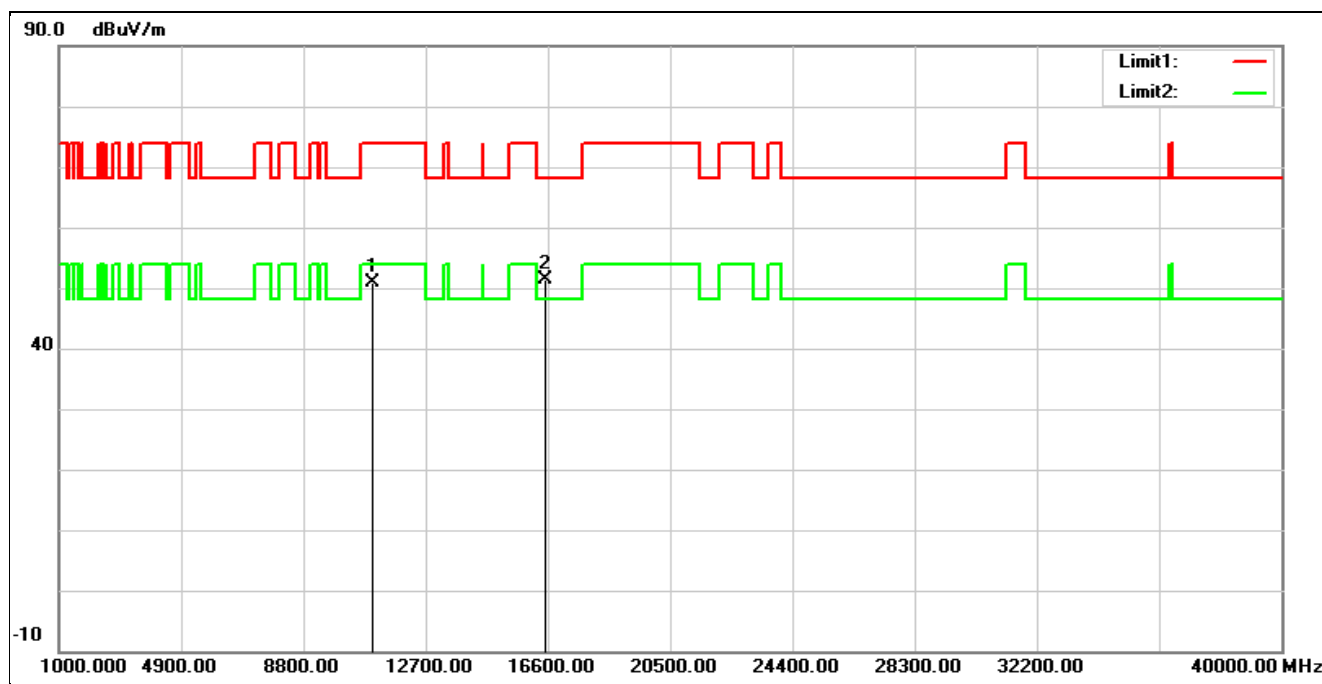


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.20	14.73	50.93	74.00	-23.07	peak
2*	16500.000	33.51	17.77	51.28	68.20	-16.92	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

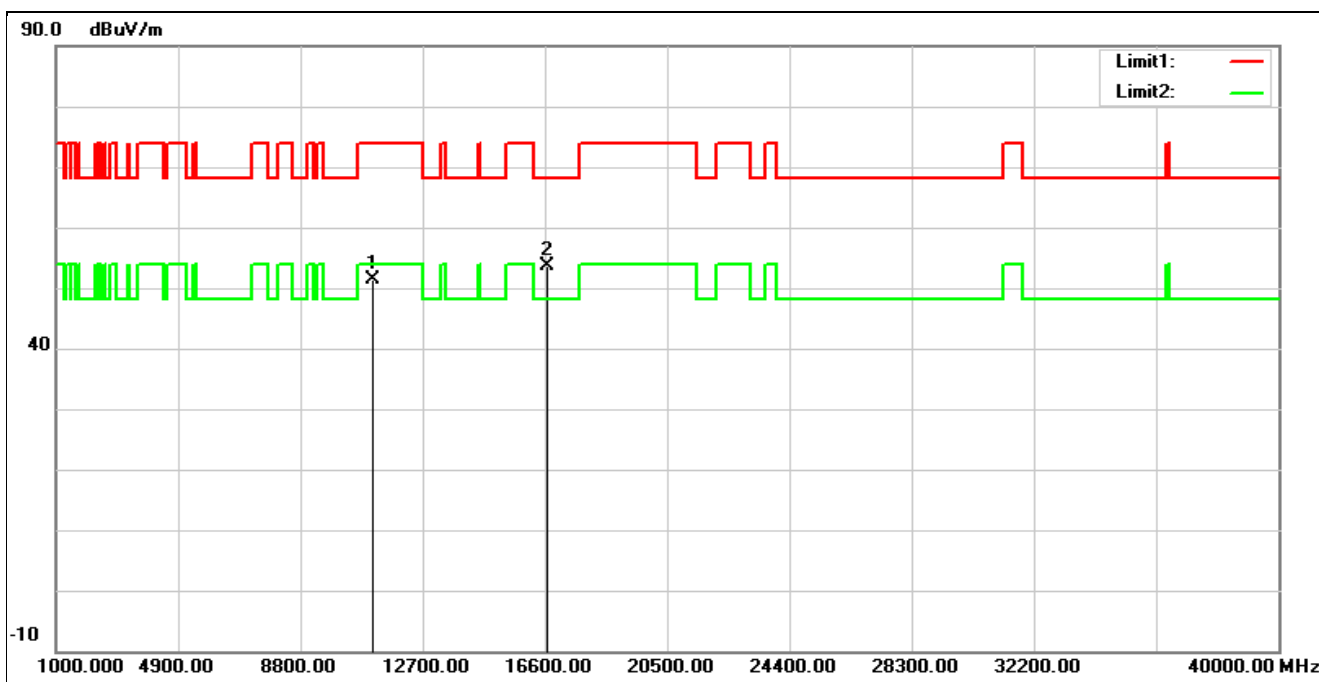


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.55	14.79	51.34	74.00	-22.66	peak
2*	16680.000	35.12	18.61	53.73	68.20	-14.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

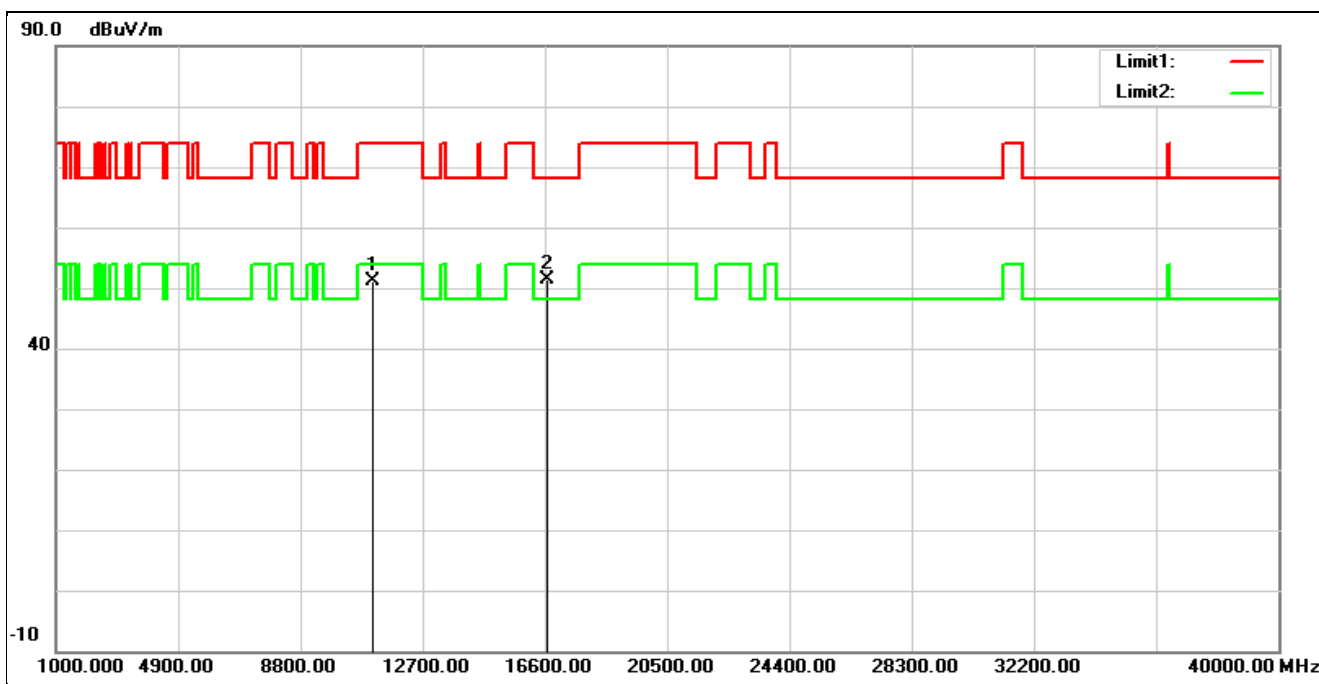


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.22	14.79	51.01	74.00	-22.99	peak
2*	16680.000	32.86	18.61	51.47	68.20	-16.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

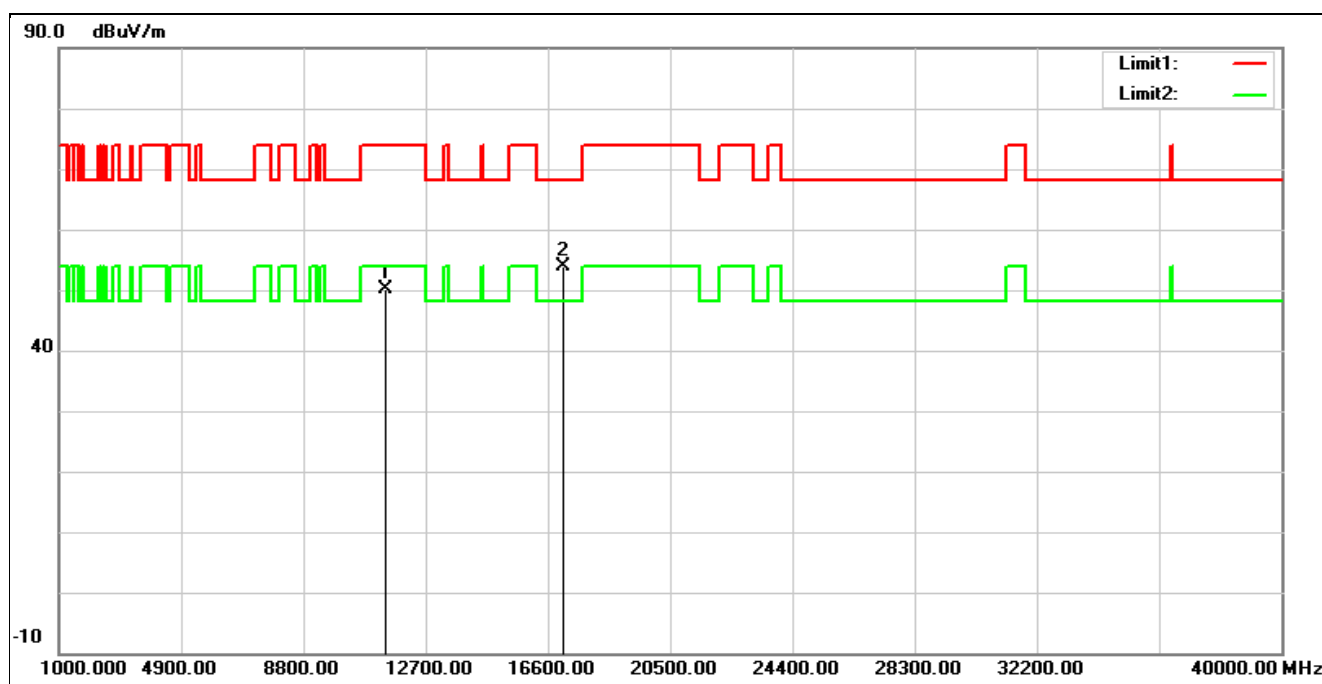


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.18	15.07	50.25	74.00	-23.75	peak
2*	17100.000	33.13	20.64	53.77	68.20	-14.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

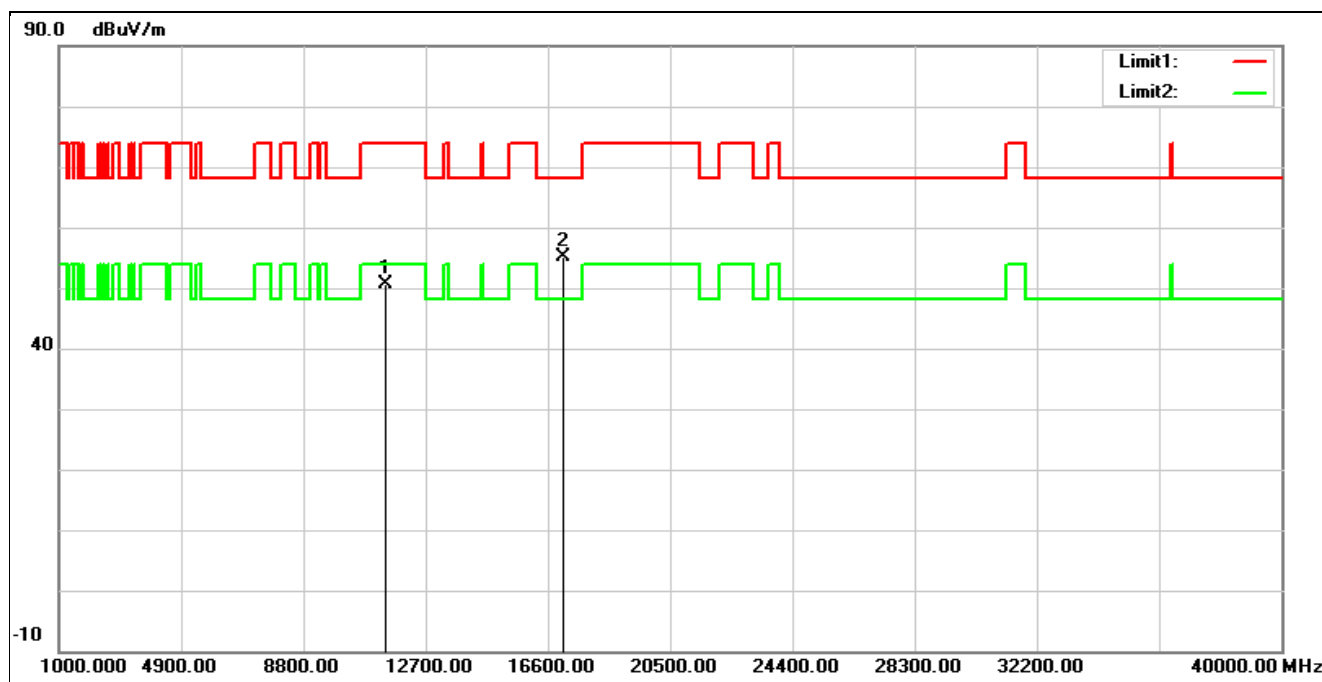


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.56	15.07	50.63	74.00	-23.37	peak
2*	17100.000	34.42	20.64	55.06	68.20	-13.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

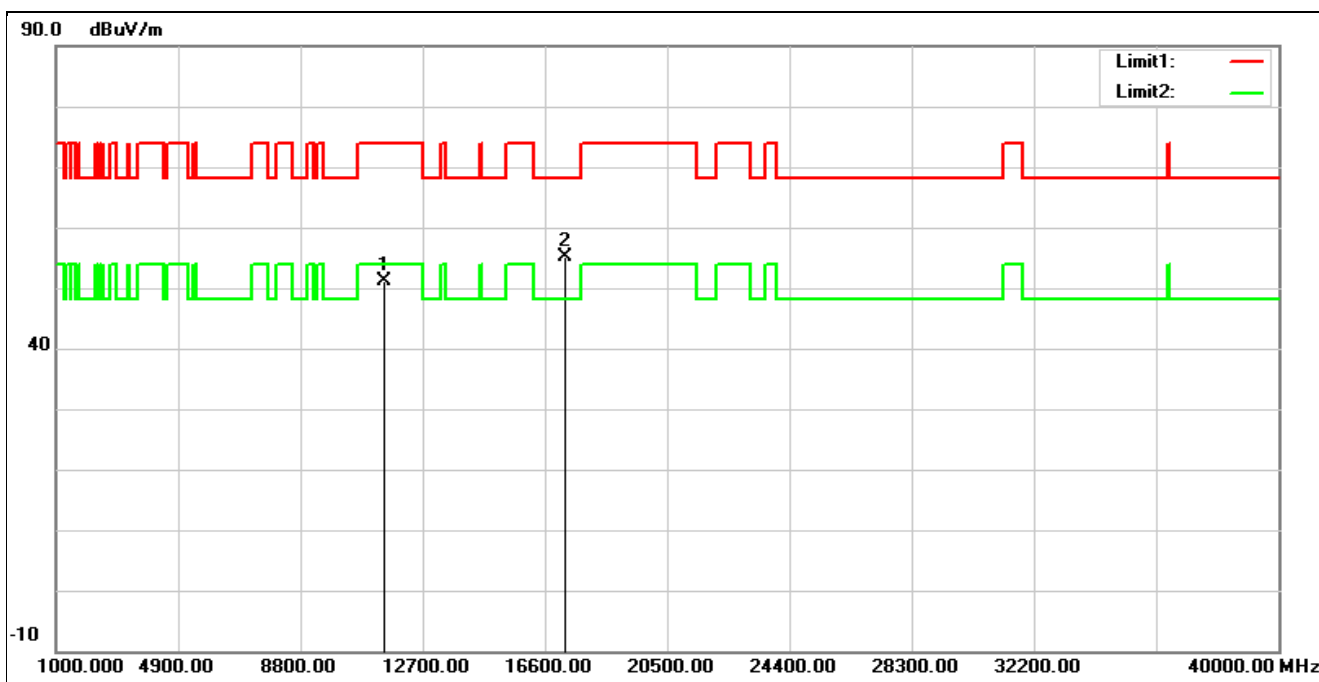


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.67	15.42	51.09	74.00	-22.91	peak
2*	17235.000	33.02	22.01	55.03	68.20	-13.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

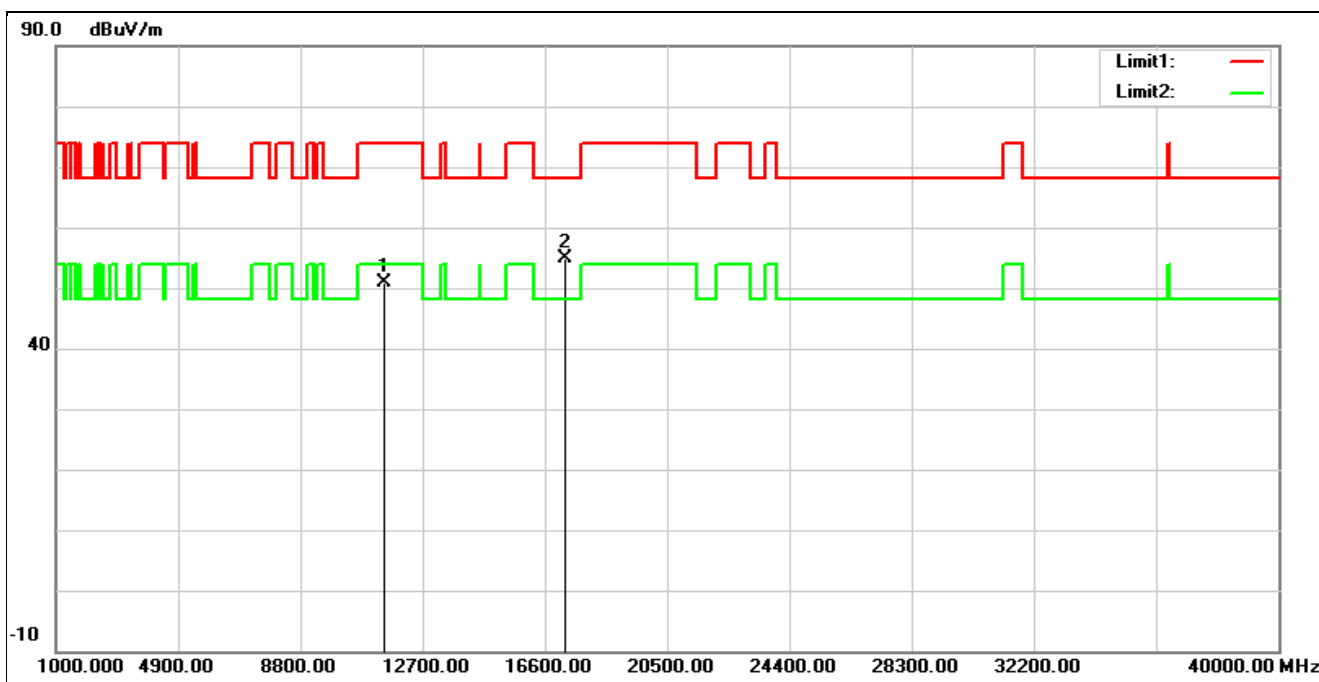


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.57	15.42	50.99	74.00	-23.01	peak
2*	17235.000	32.75	22.01	54.76	68.20	-13.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

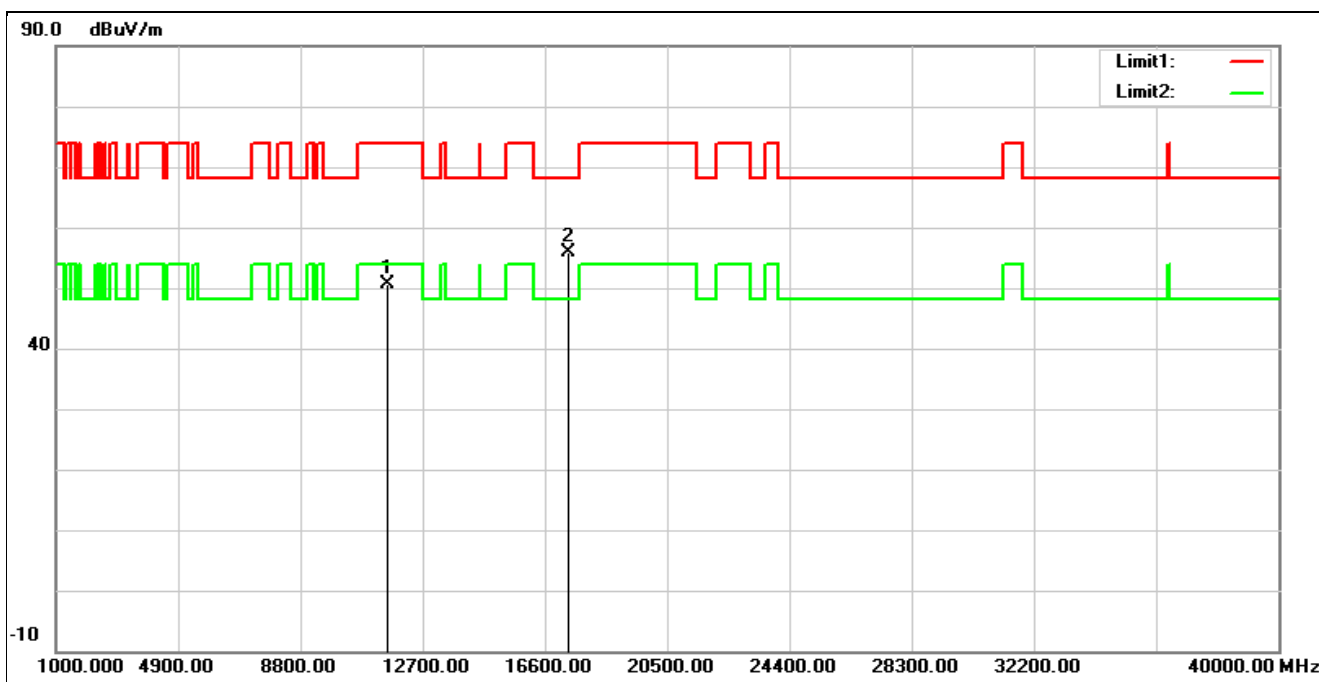


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.40	15.21	50.61	74.00	-23.39	peak
2*	17355.000	32.82	22.96	55.78	68.20	-12.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

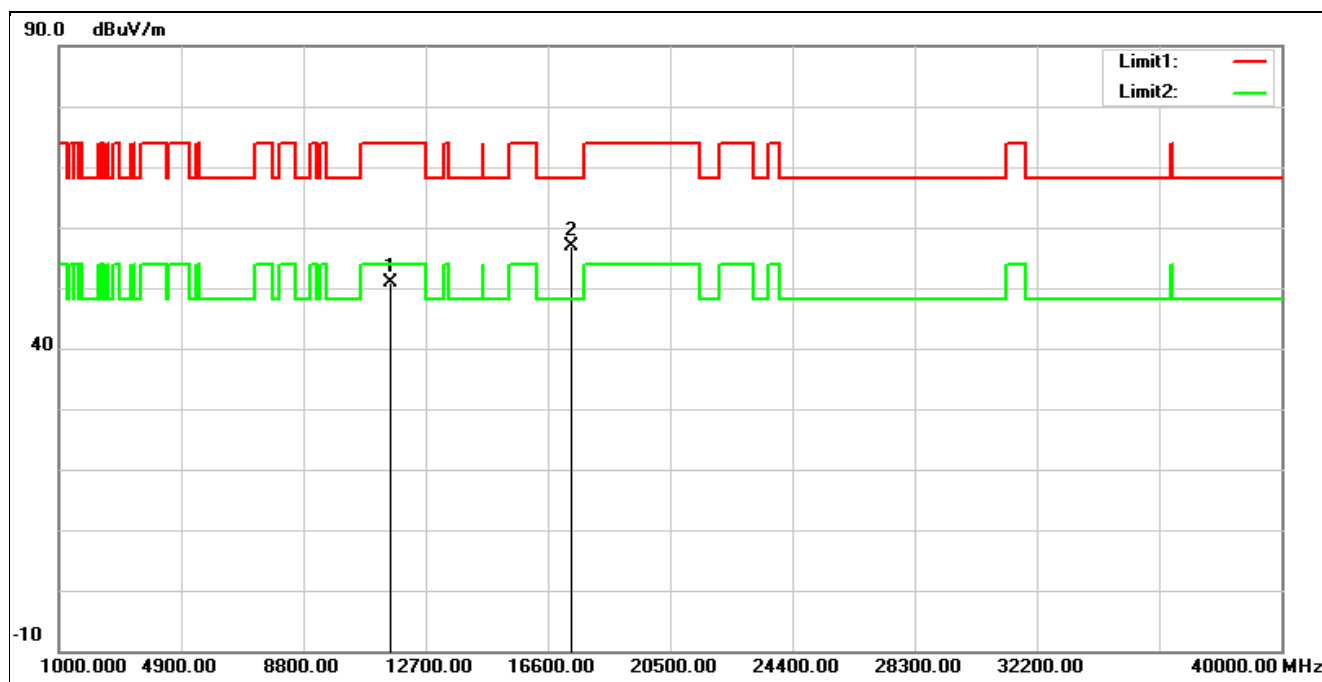


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.72	15.21	50.93	74.00	-23.07	peak
2*	17355.000	33.83	22.96	56.79	68.20	-11.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

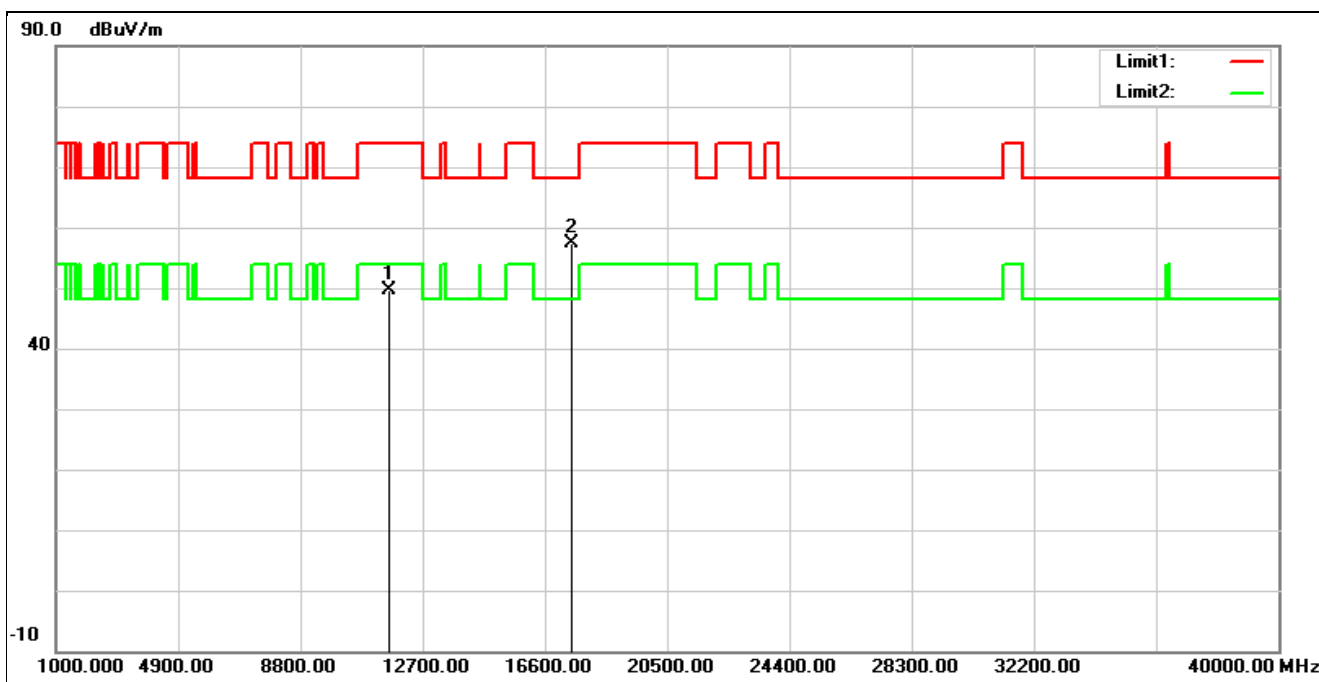


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.61	15.04	49.65	74.00	-24.35	peak
2*	17475.000	33.49	23.95	57.44	68.20	-10.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

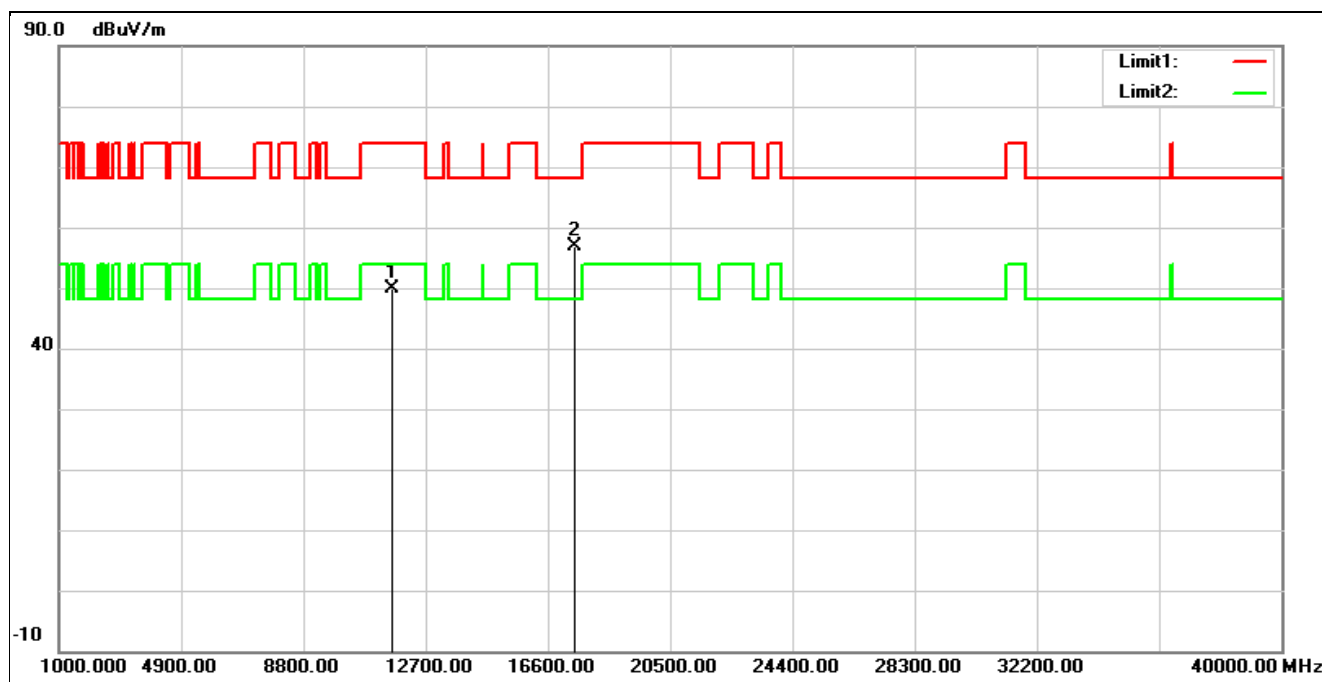


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.88	15.04	49.92	74.00	-24.08	peak
2*	17475.000	32.92	23.95	56.87	68.20	-11.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

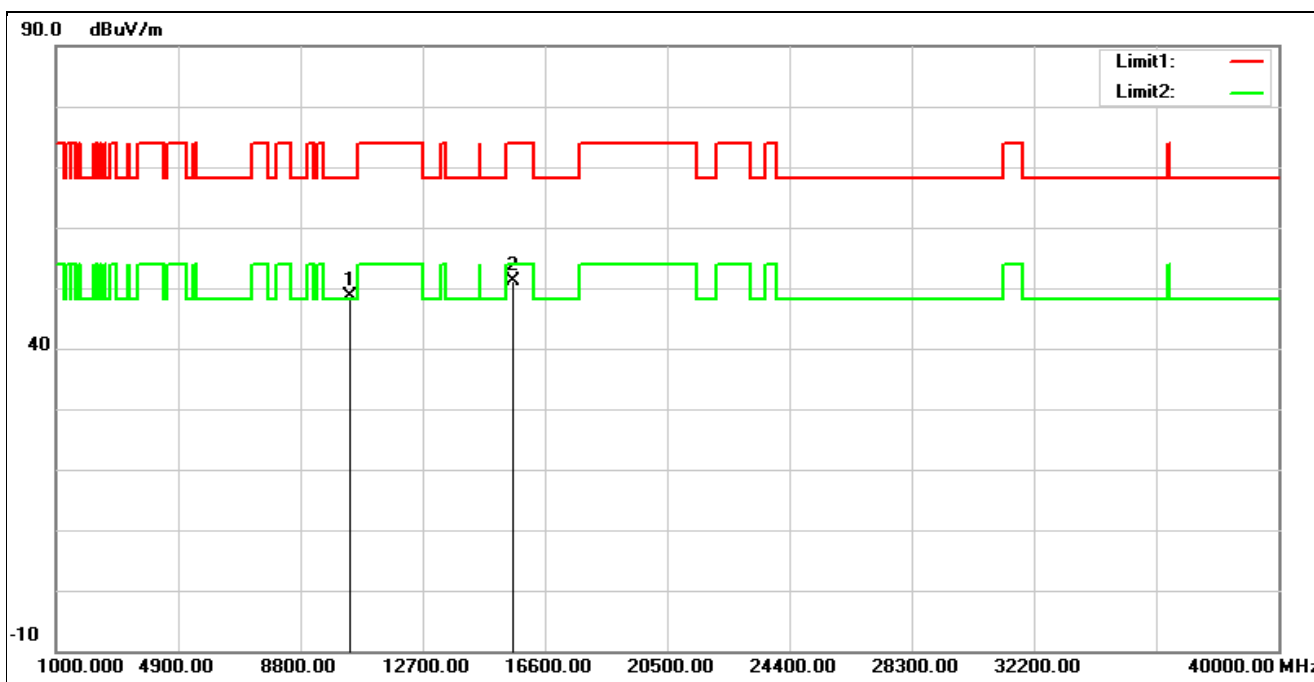


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	34.56	14.04	48.60	68.20	-19.60	peak
2	15570.000	33.91	17.16	51.07	74.00	-22.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

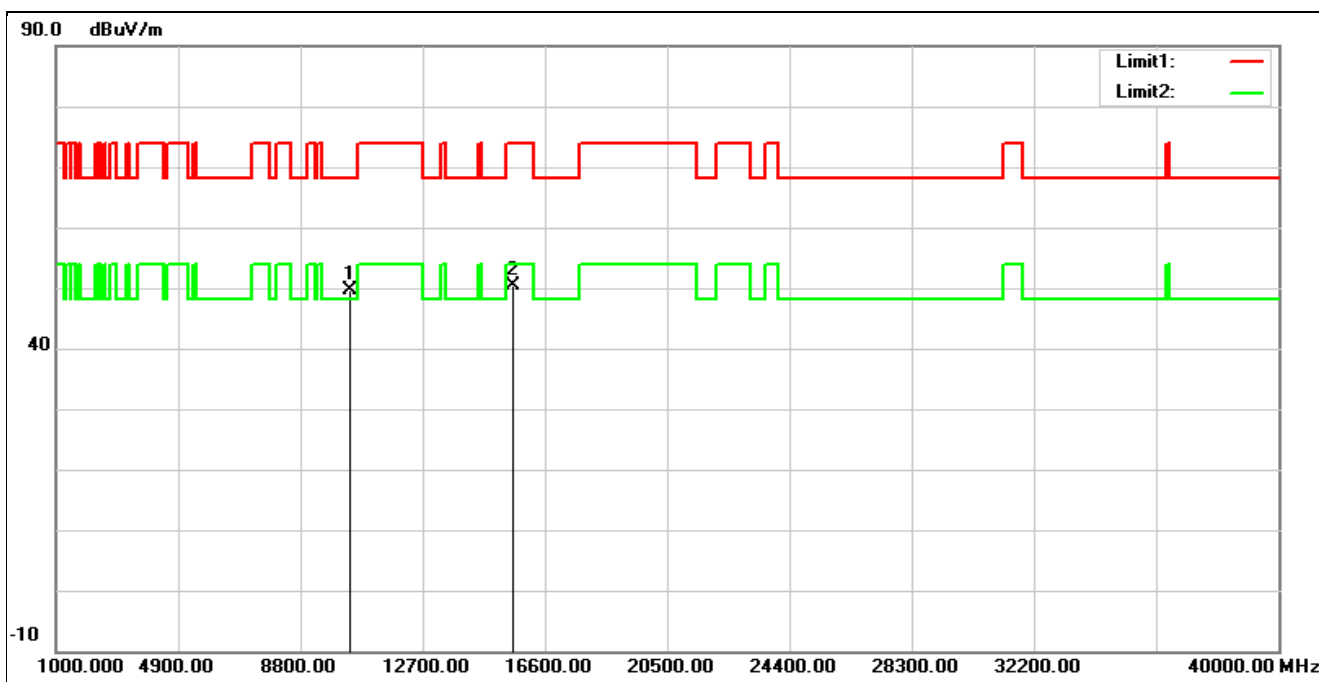


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	35.71	14.04	49.75	68.20	-18.45	peak
2	15570.000	33.10	17.16	50.26	74.00	-23.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

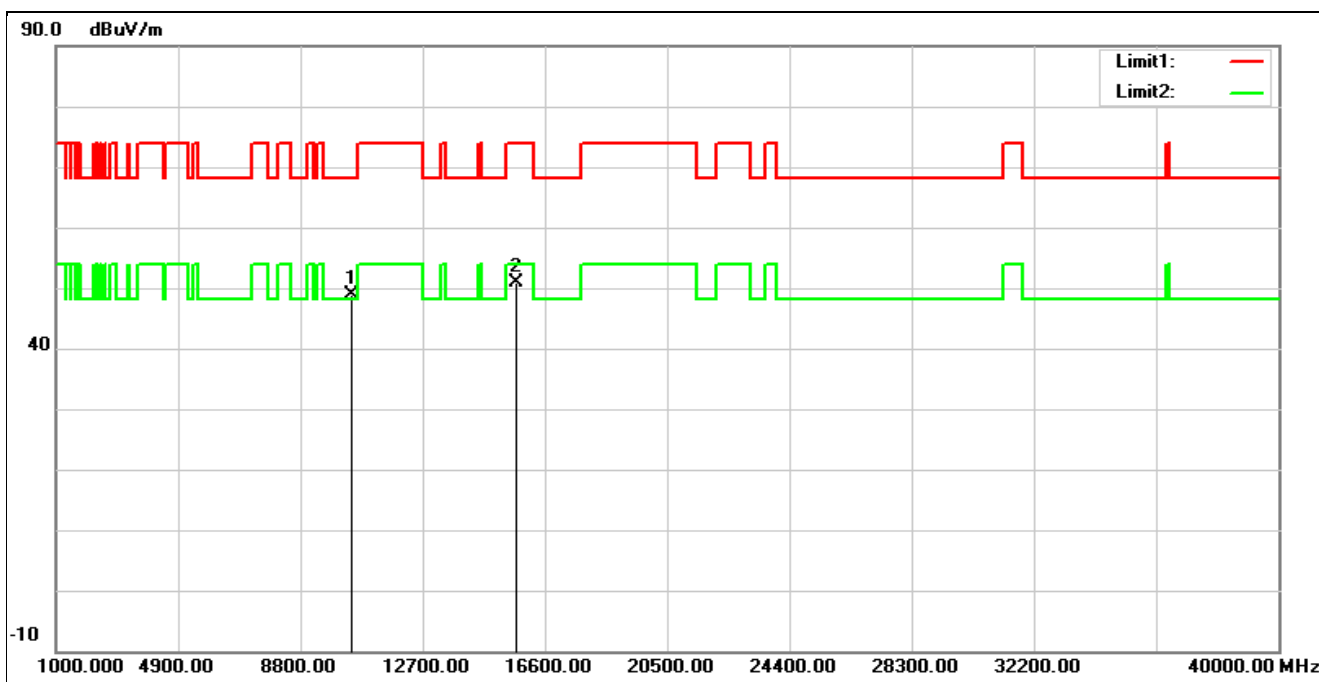


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	34.54	14.43	48.97	68.20	-19.23	peak
2	15690.000	33.56	17.37	50.93	74.00	-23.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

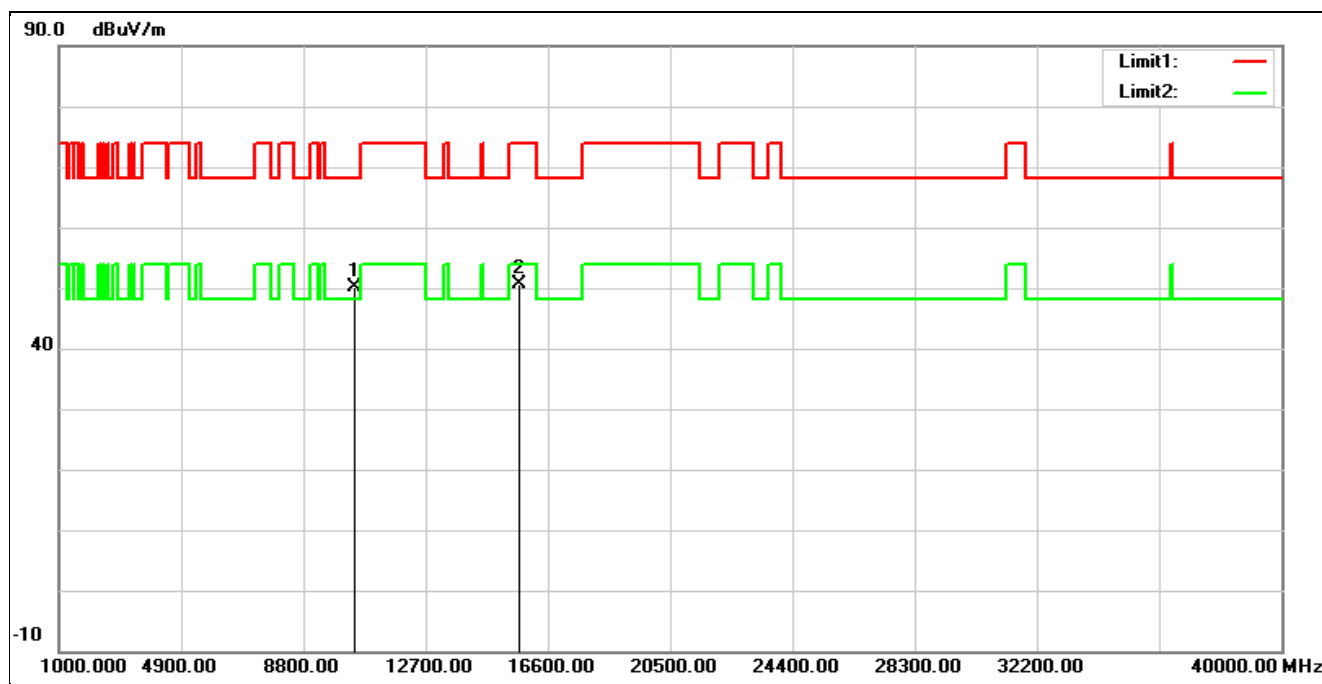


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	35.71	14.43	50.14	68.20	-18.06	peak
2	15690.000	33.18	17.37	50.55	74.00	-23.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

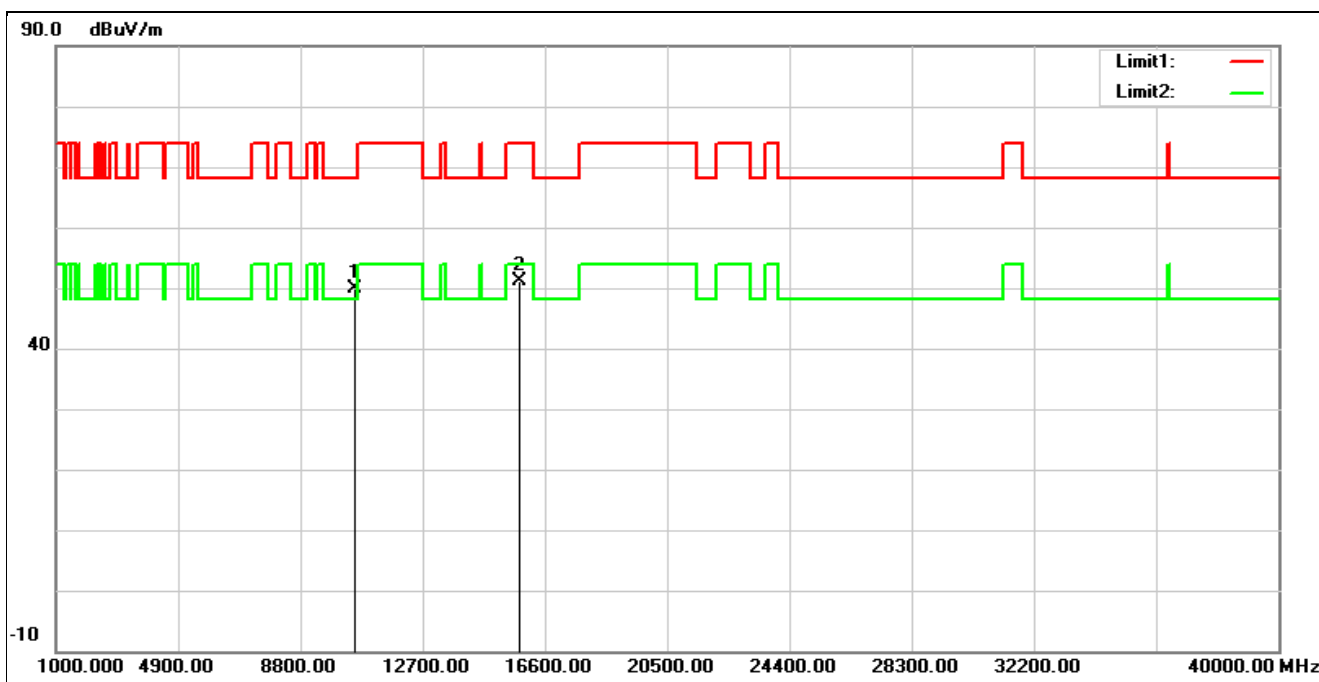


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.28	14.55	49.83	68.20	-18.37	peak
2	15810.000	34.10	17.00	51.10	74.00	-22.90	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

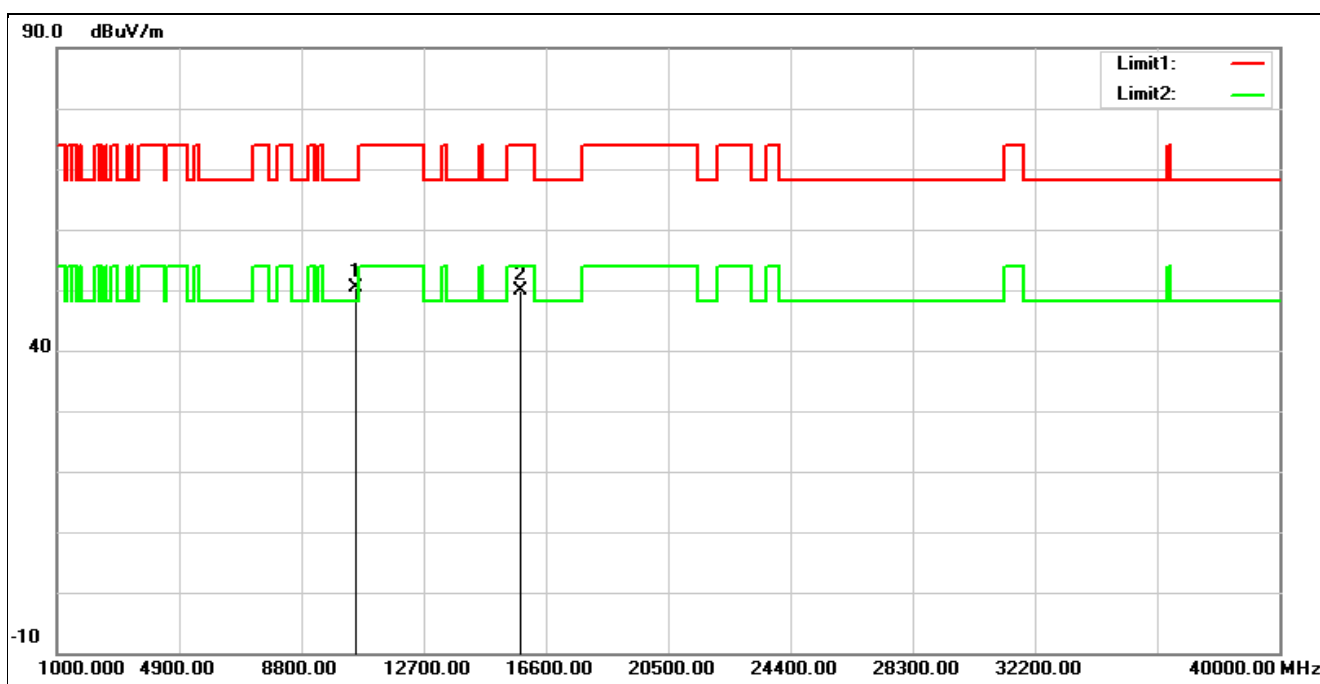


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.94	14.55	50.49	68.20	-17.71	peak
2	15810.000	32.97	17.00	49.97	74.00	-24.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

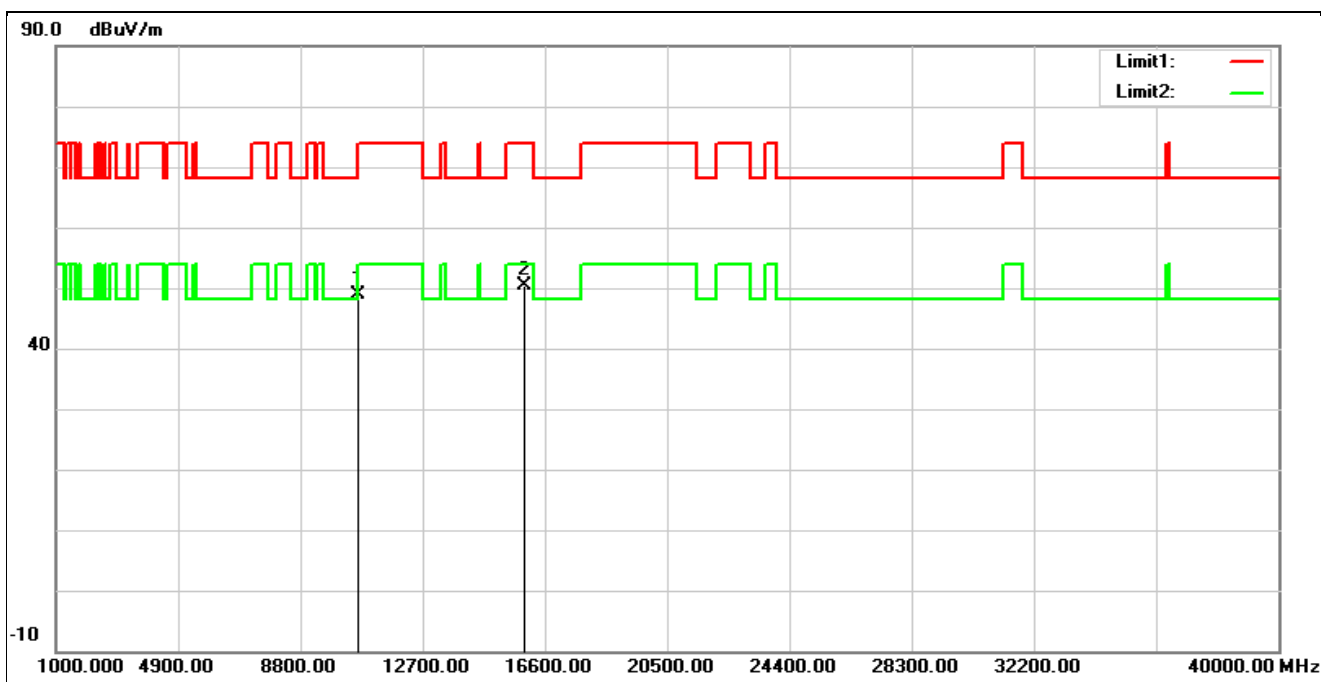


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.55	14.40	48.95	74.00	-25.05	peak
2*	15930.000	33.66	16.64	50.30	74.00	-23.70	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

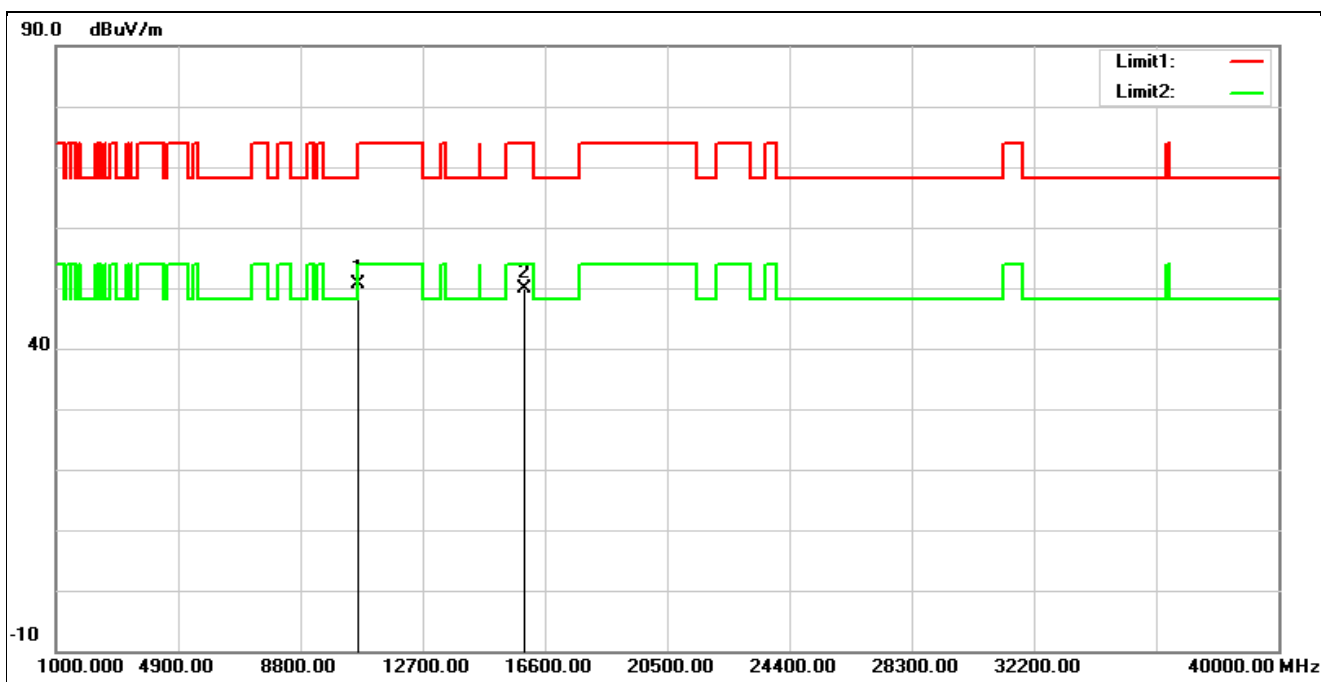


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	36.25	14.40	50.65	74.00	-23.35	peak
2	15930.000	33.32	16.64	49.96	74.00	-24.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

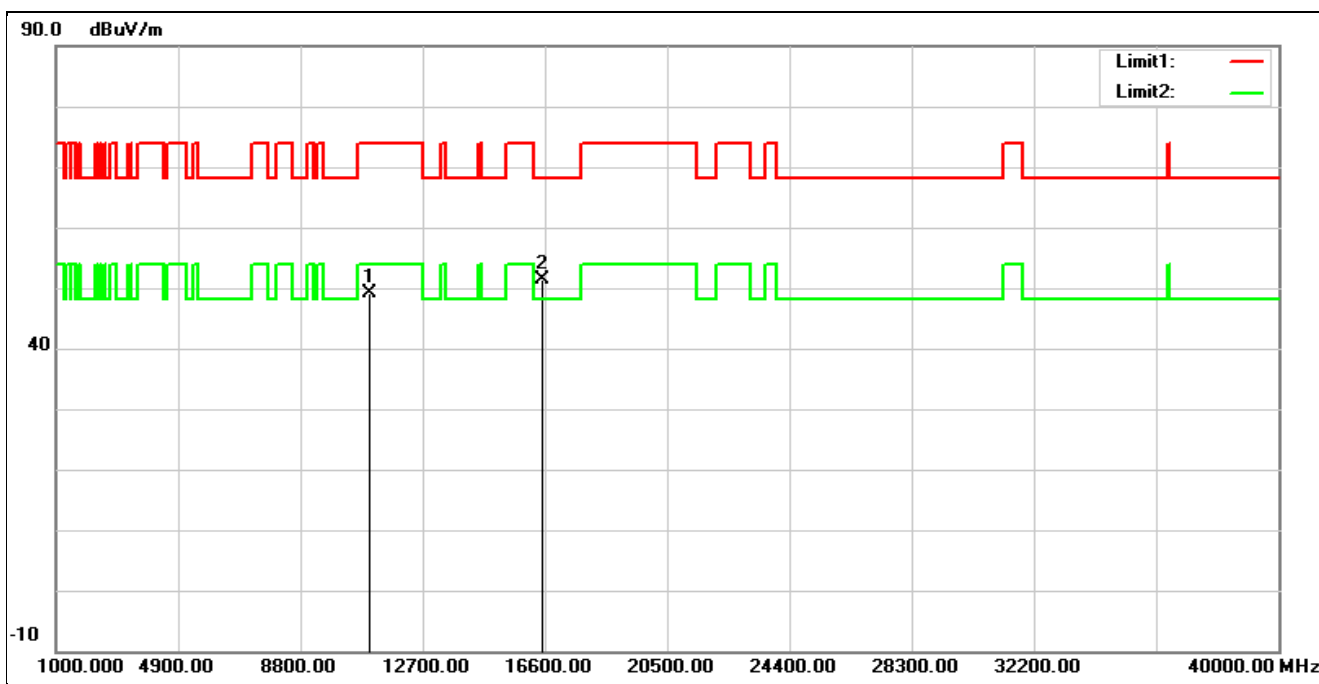


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.28	14.75	49.03	74.00	-24.97	peak
2*	16530.000	33.56	17.92	51.48	68.20	-16.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

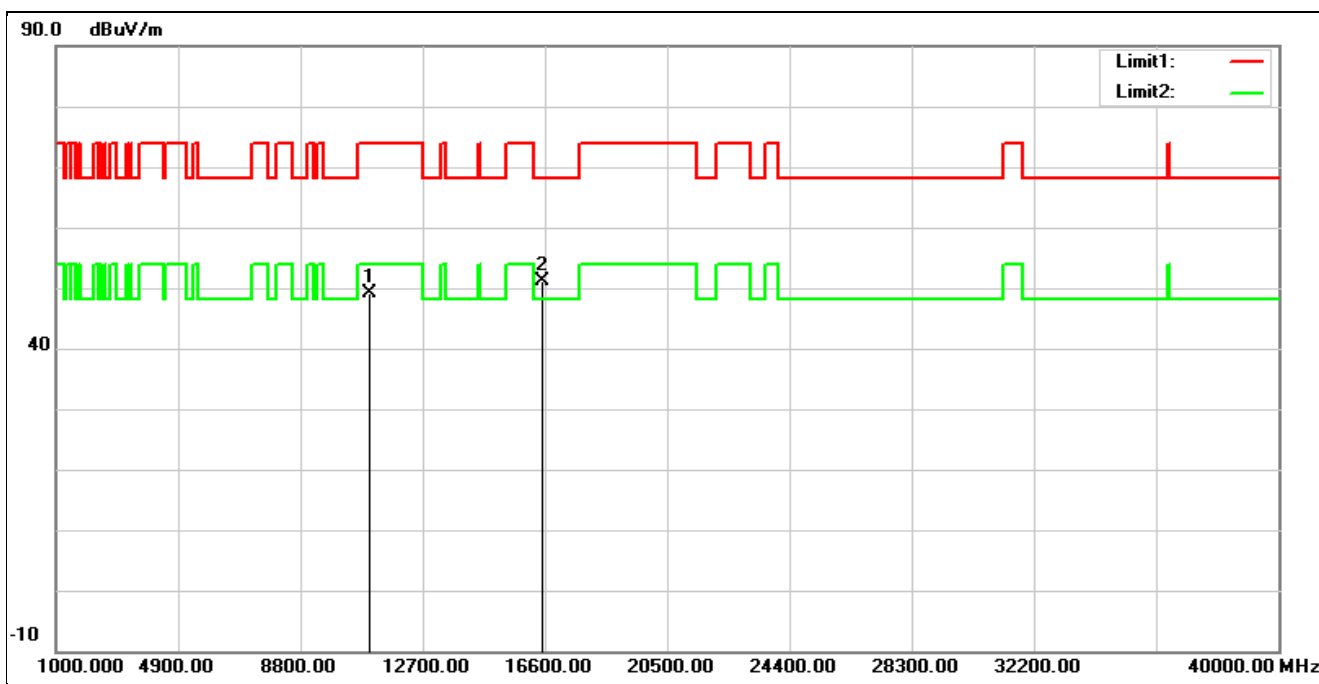


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.35	14.75	49.10	74.00	-24.90	peak
2*	16530.000	33.14	17.92	51.06	68.20	-17.14	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

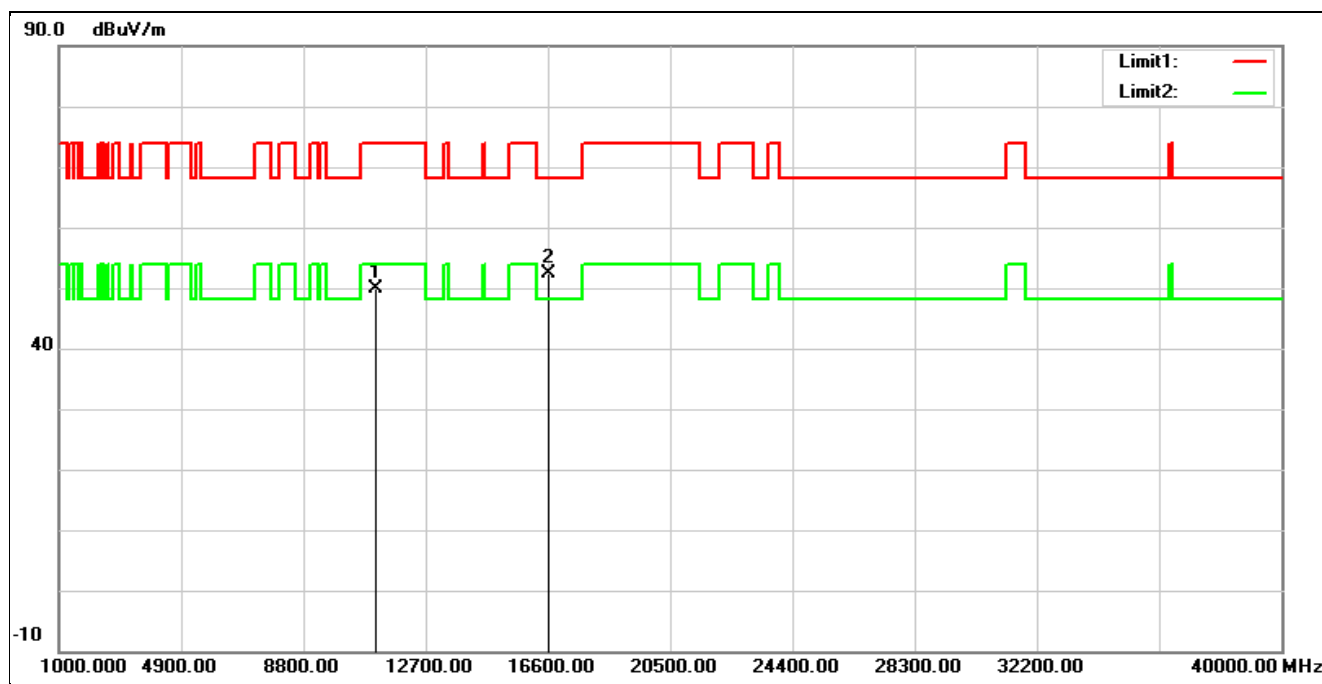


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.10	14.82	49.92	74.00	-24.08	peak
2*	16650.000	33.93	18.49	52.42	68.20	-15.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

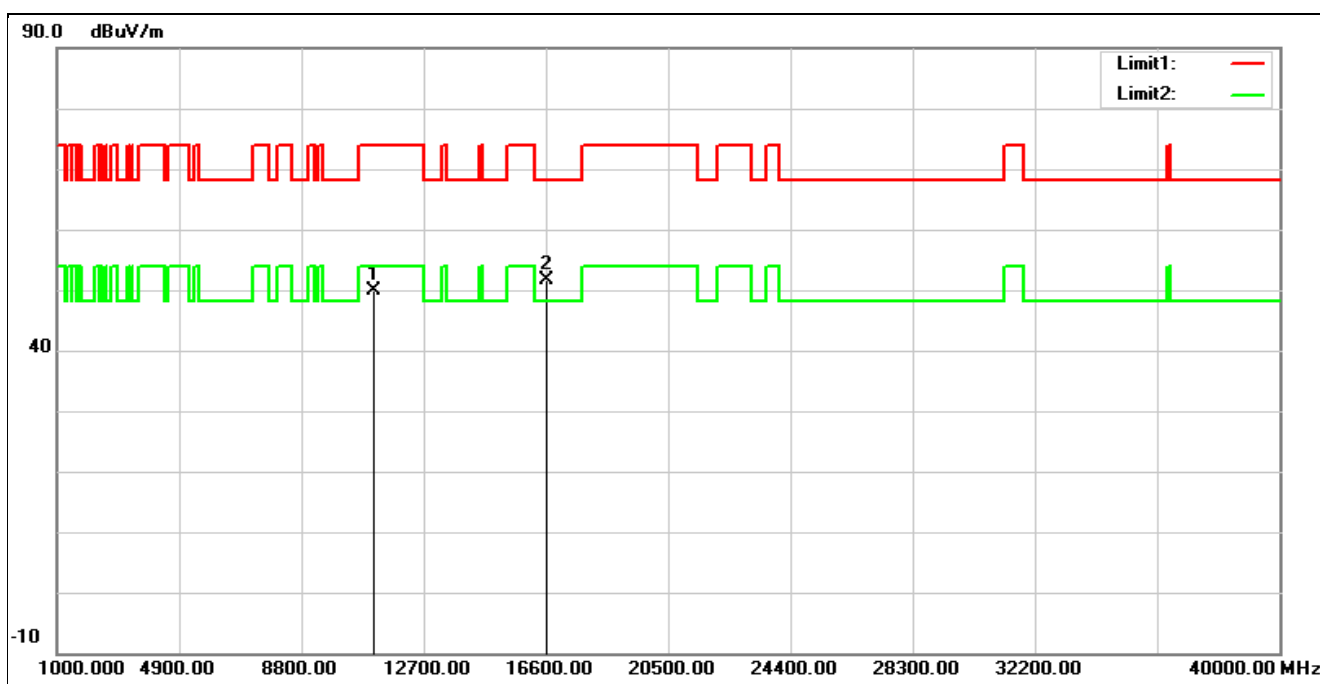


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.04	14.82	49.86	74.00	-24.14	peak
2*	16650.000	33.26	18.49	51.75	68.20	-16.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

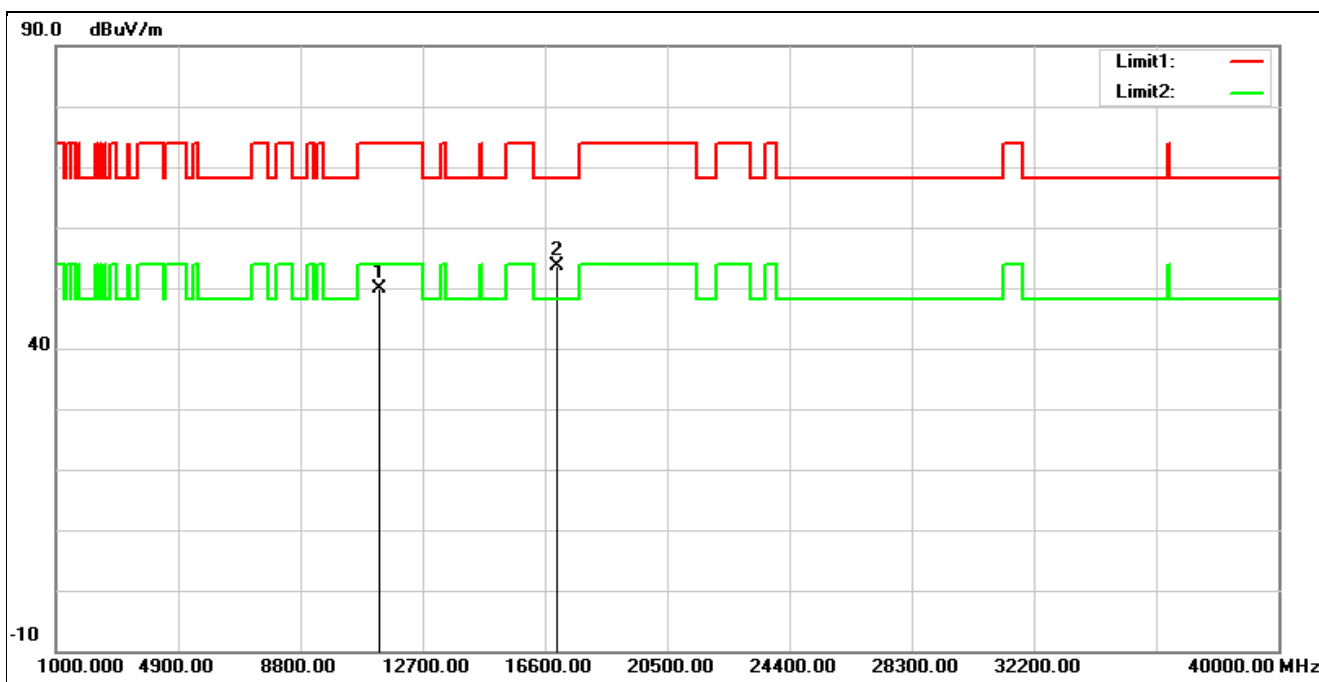


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.95	14.84	49.79	74.00	-24.21	peak
2*	17010.000	33.62	20.09	53.71	68.20	-14.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

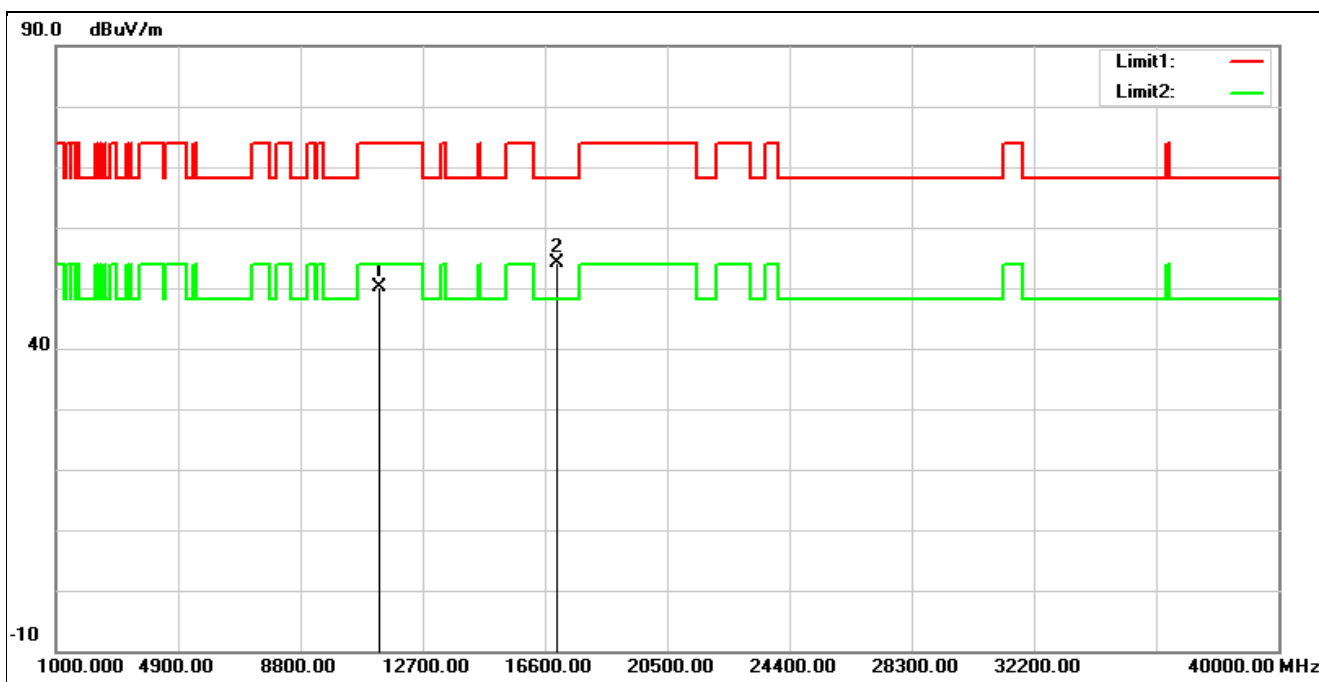


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.39	14.84	50.23	74.00	-23.77	peak
2*	17010.000	34.02	20.09	54.11	68.20	-14.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

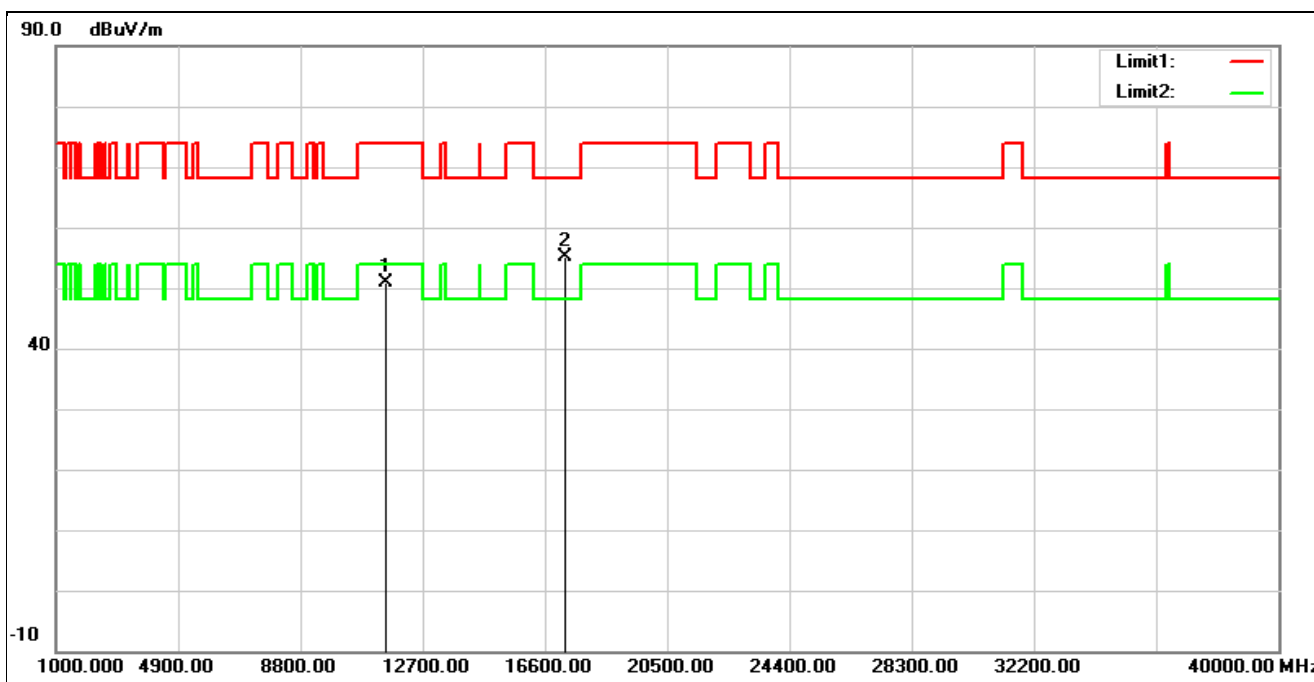


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.44	15.42	50.86	74.00	-23.14	peak
2*	17265.000	32.91	22.32	55.23	68.20	-12.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

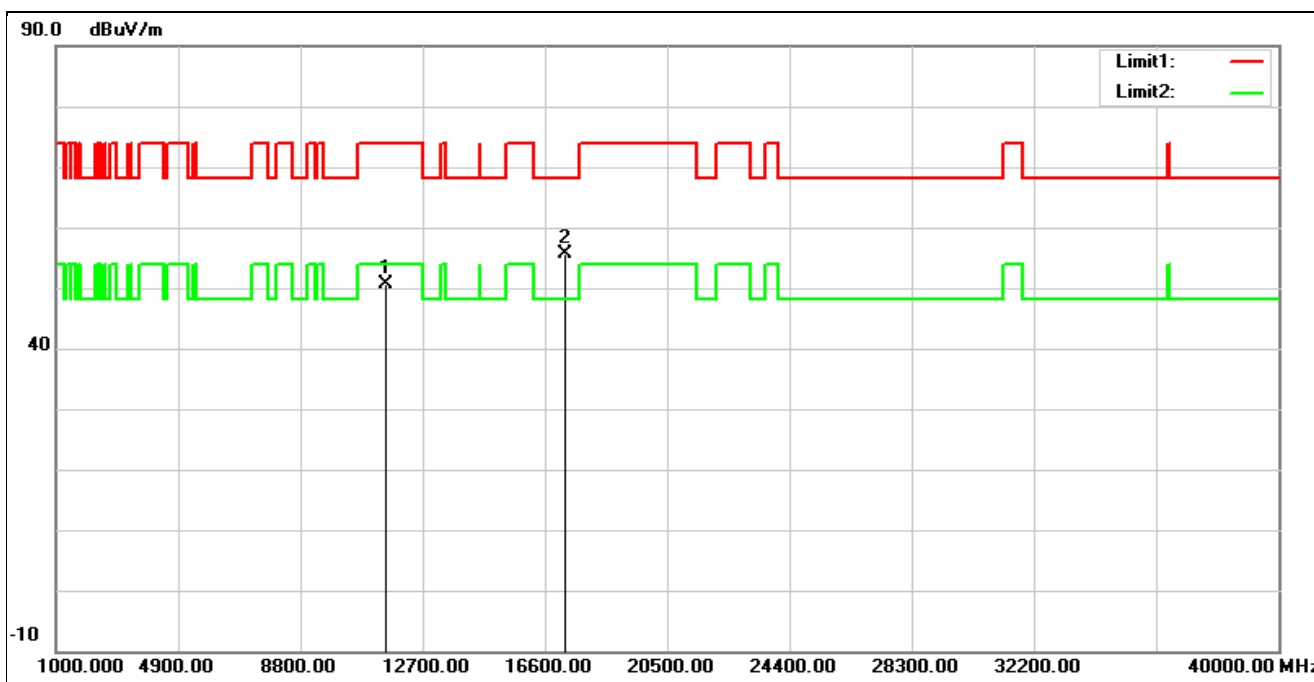


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.20	15.42	50.62	74.00	-23.38	peak
2*	17265.000	33.19	22.32	55.51	68.20	-12.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

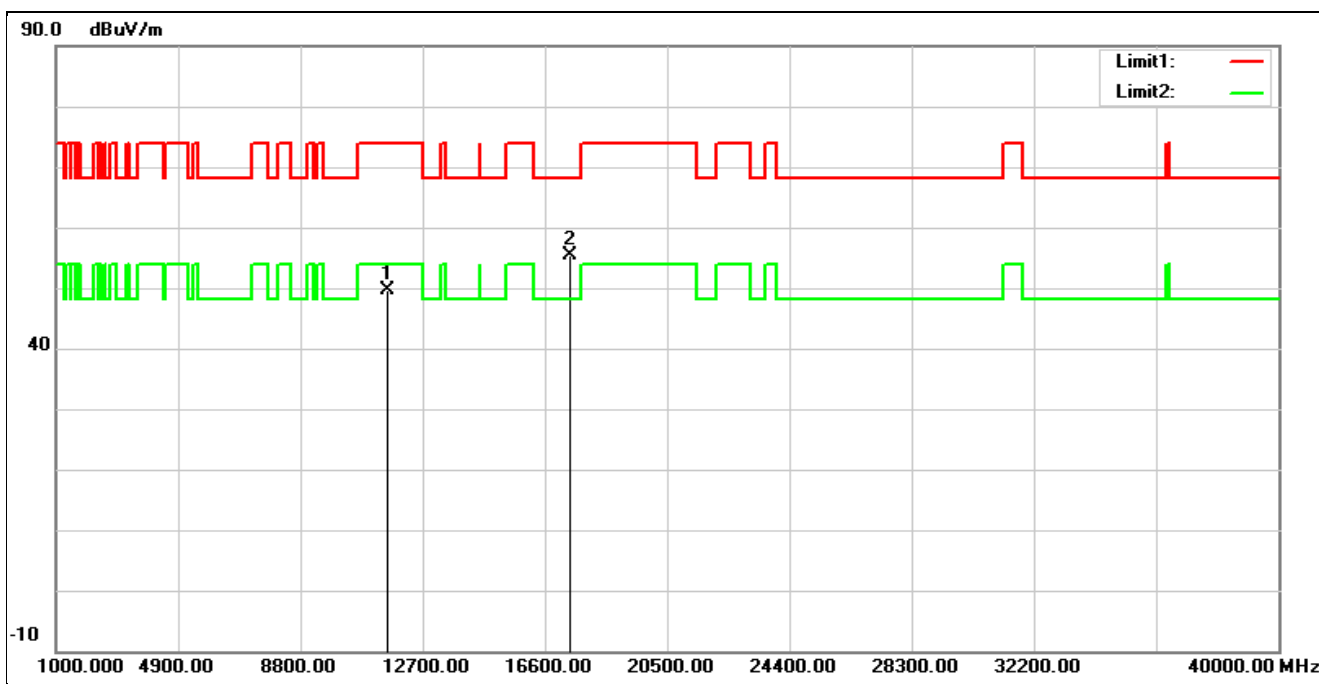


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.39	15.14	49.53	74.00	-24.47	peak
2*	17385.000	32.28	23.11	55.39	68.20	-12.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

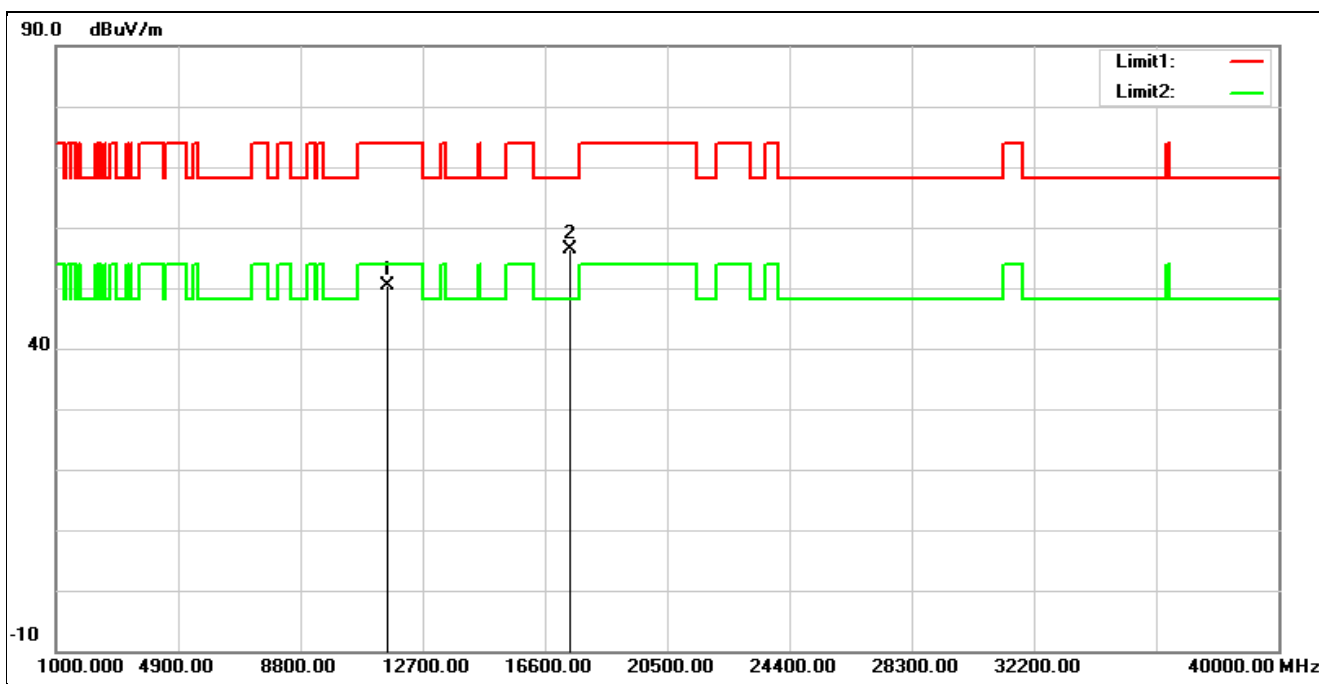


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.30	15.14	50.44	74.00	-23.56	peak
2*	17385.000	33.31	23.11	56.42	68.20	-11.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Remark:			

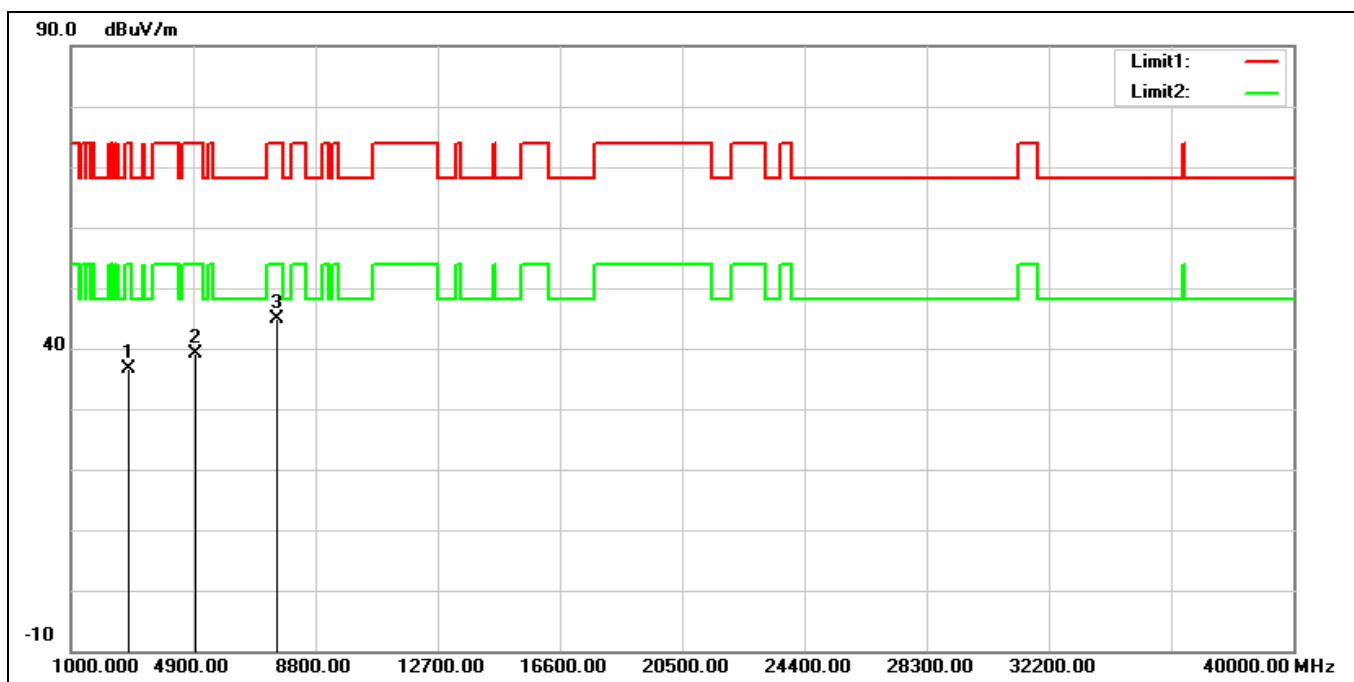

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	41.83	-5.26	36.57	74.00	-37.43	peak
2	4995.000	38.38	0.70	39.08	74.00	-34.92	peak
3*	7545.000	36.40	8.45	44.85	74.00	-29.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Remark:			

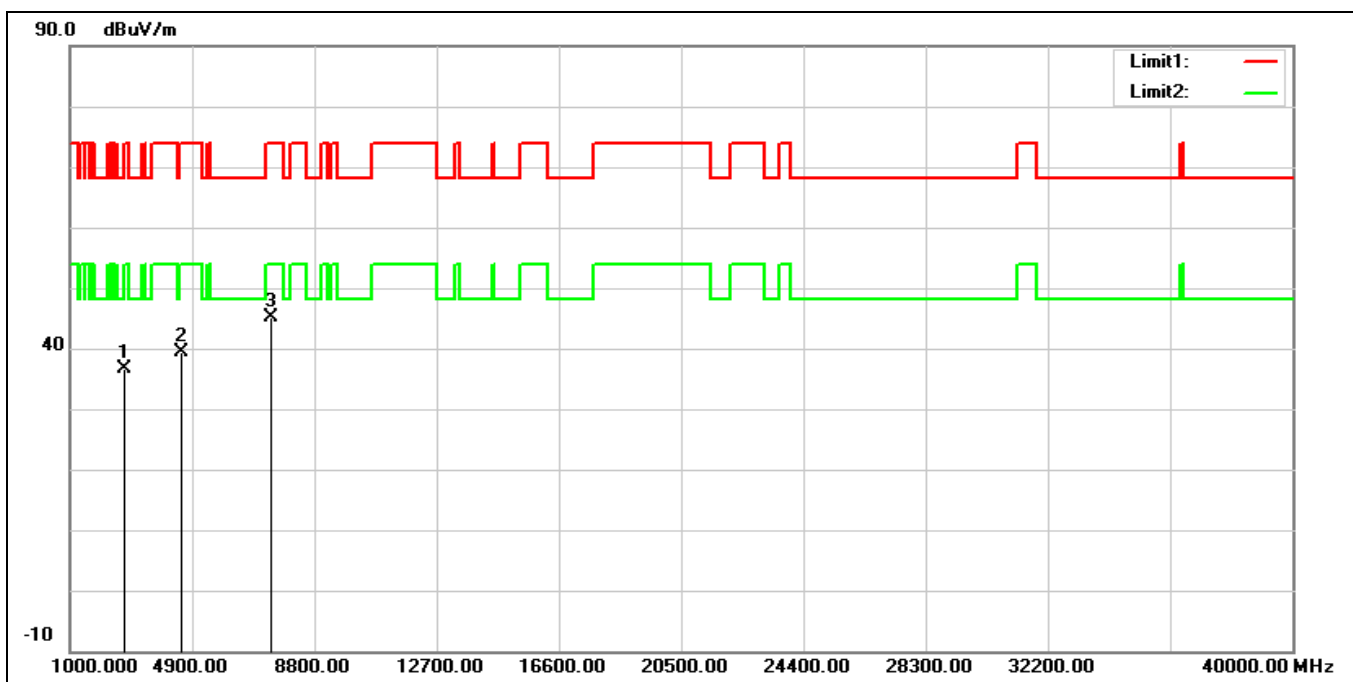


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2734.000	42.22	-5.71	36.51	74.00	-37.49	peak
2	4587.000	40.16	-0.66	39.50	74.00	-34.50	peak
3*	7375.000	36.96	8.08	45.04	74.00	-28.96	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

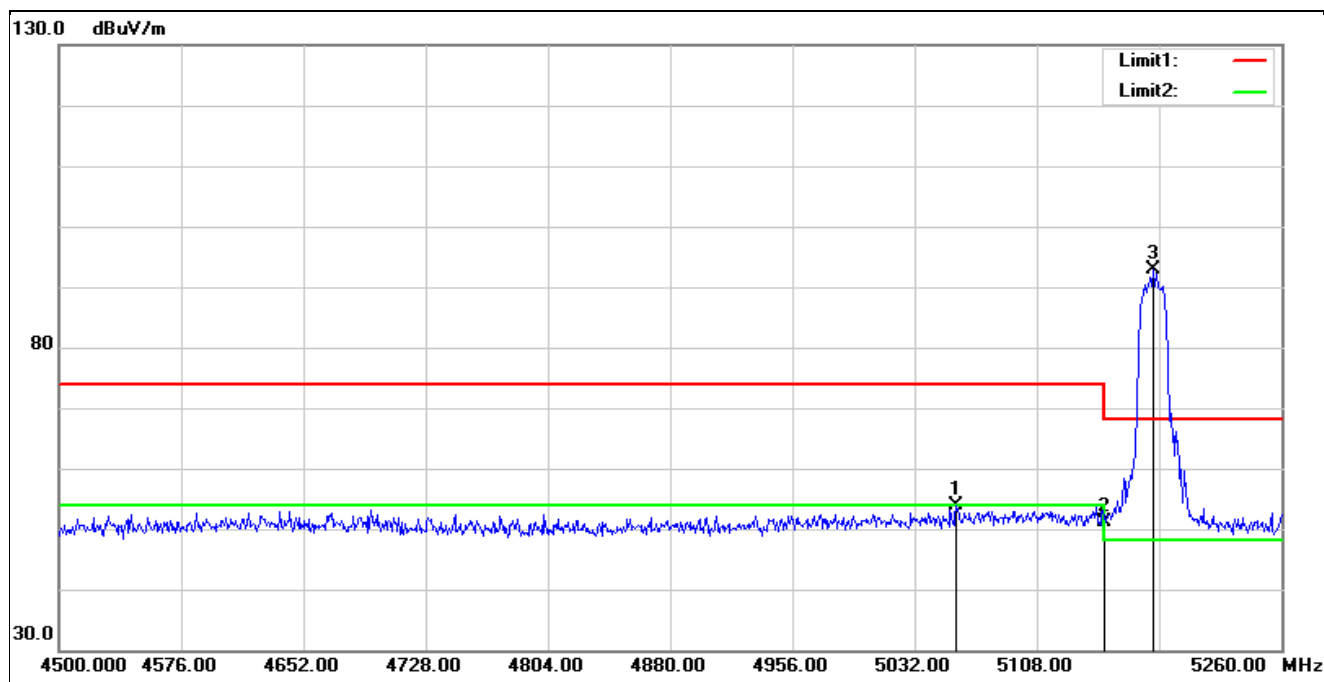


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5057.840	52.71	1.12	53.83	74.00	-20.17	peak
2	5150.000	49.66	1.42	51.08	74.00	-22.92	peak
3*	5180.200	91.55	1.34	92.89	68.20	24.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

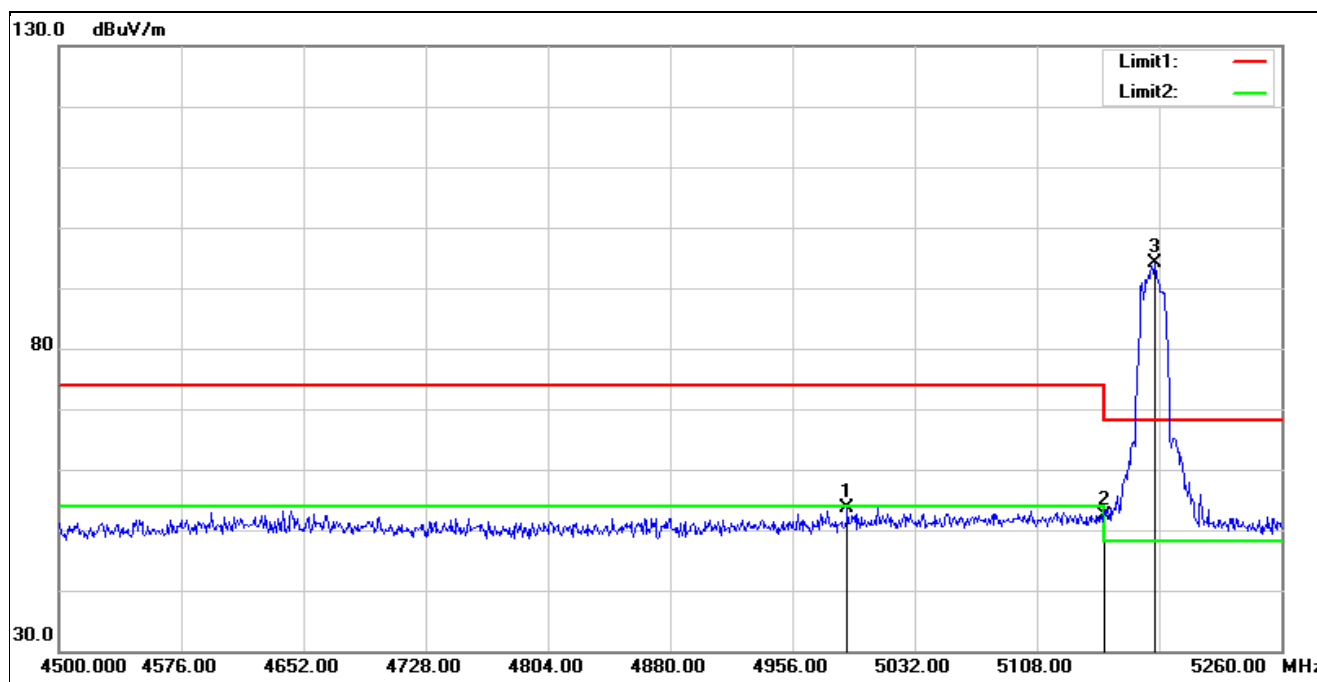


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4990.200	52.91	0.69	53.60	74.00	-20.40	peak
2	5150.000	50.99	1.42	52.41	74.00	-21.59	peak
3*	5180.960	92.67	1.34	94.01	68.20	25.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

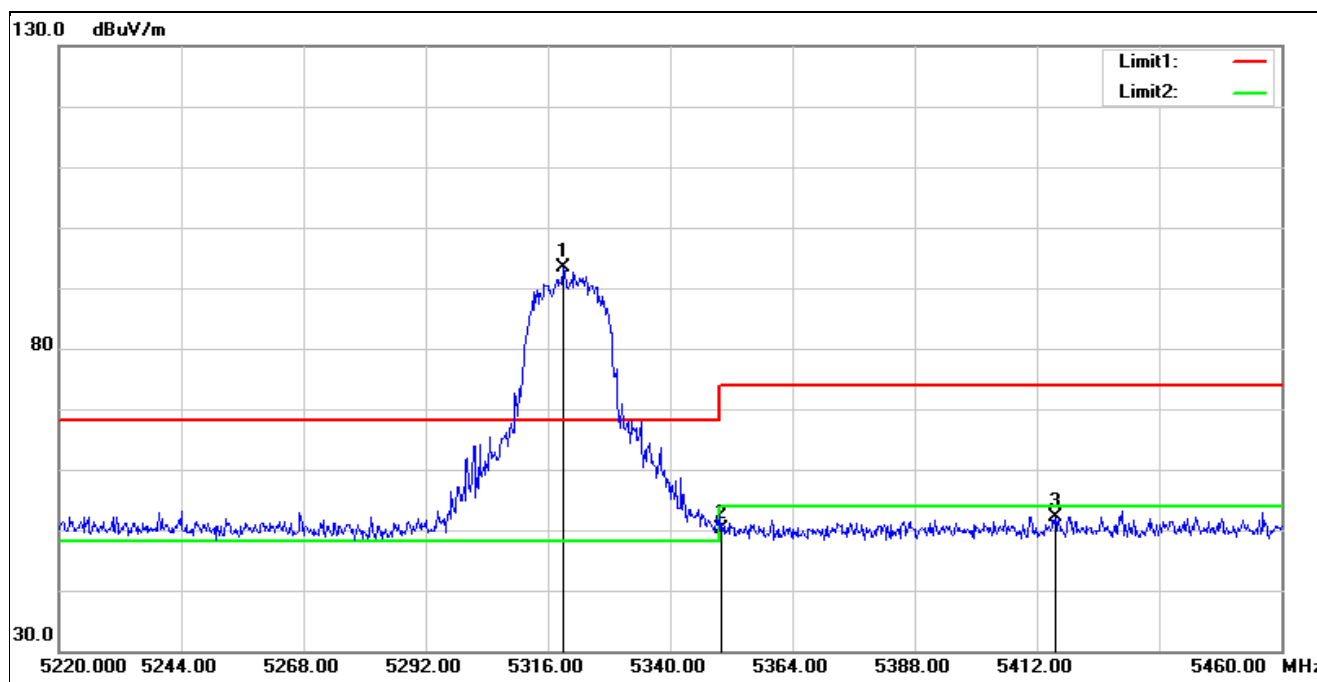


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.880	92.46	0.98	93.44	68.20	25.24	peak
2	5350.000	49.04	1.08	50.12	74.00	-23.88	peak
3	5415.600	50.64	1.60	52.24	74.00	-21.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

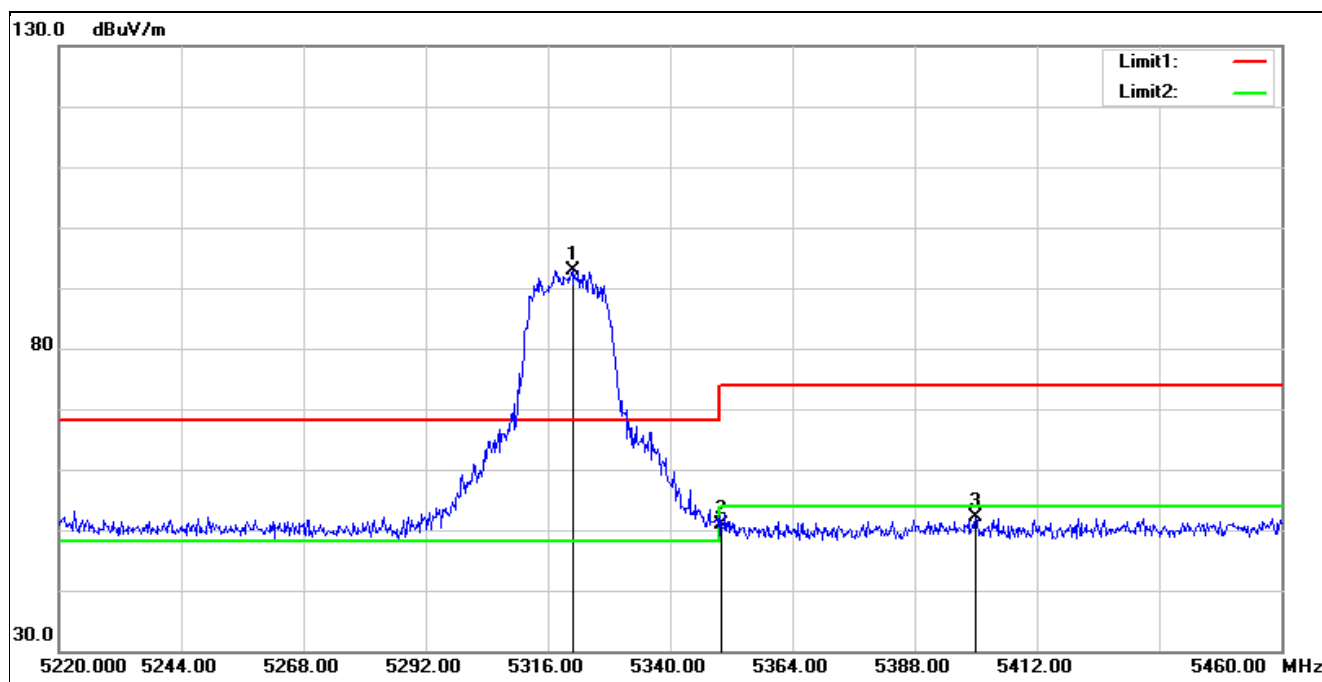


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5320.800	91.96	0.98	92.94	68.20	24.74	peak
2	5350.000	49.90	1.08	50.98	74.00	-23.02	peak
3	5400.000	50.62	1.55	52.17	74.00	-21.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

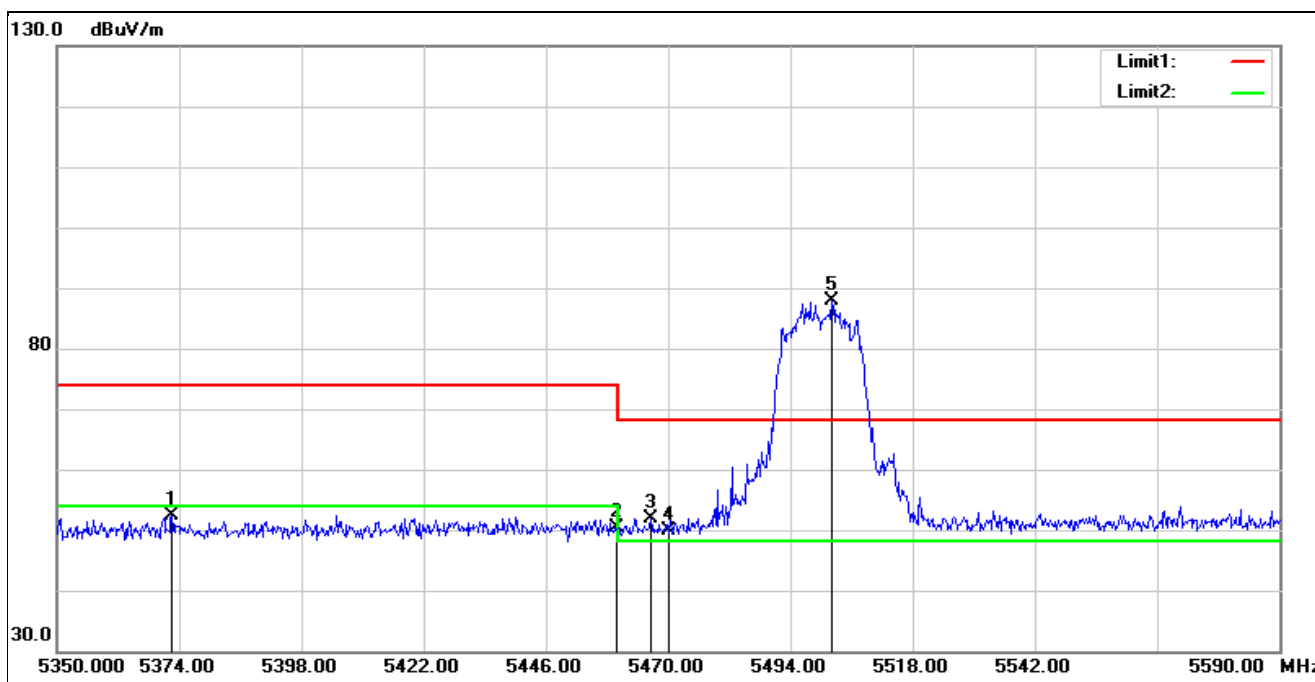


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.560	51.15	1.29	52.44	74.00	-21.56	peak
2	5460.000	48.57	1.73	50.30	74.00	-23.70	peak
3	5466.640	50.23	1.74	51.97	68.20	-16.23	peak
4	5470.000	48.26	1.74	50.00	68.20	-18.20	peak
5*	5502.160	86.03	1.79	87.82	68.20	19.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

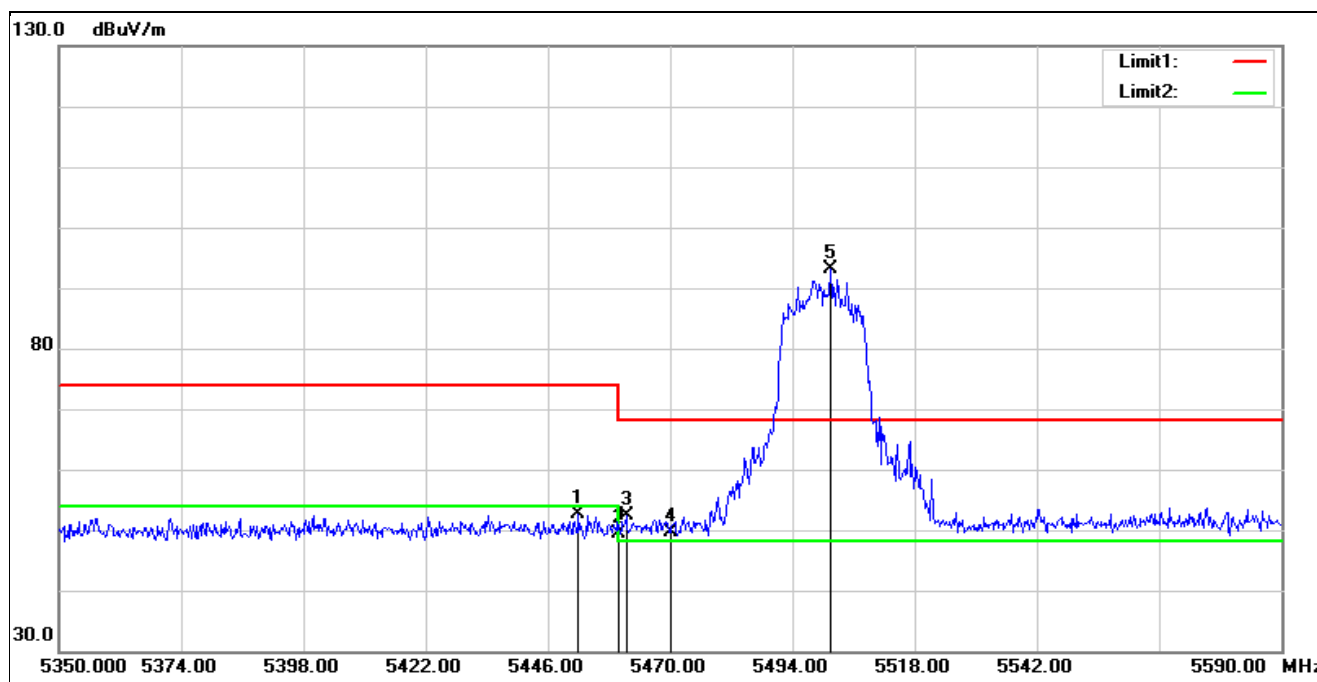


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.000	50.96	1.72	52.68	74.00	-21.32	peak
2	5460.000	47.75	1.73	49.48	74.00	-24.52	peak
3	5461.360	50.64	1.73	52.37	68.20	-15.83	peak
4	5470.000	47.92	1.74	49.66	68.20	-18.54	peak
5*	5501.440	91.36	1.79	93.15	68.20	24.95	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

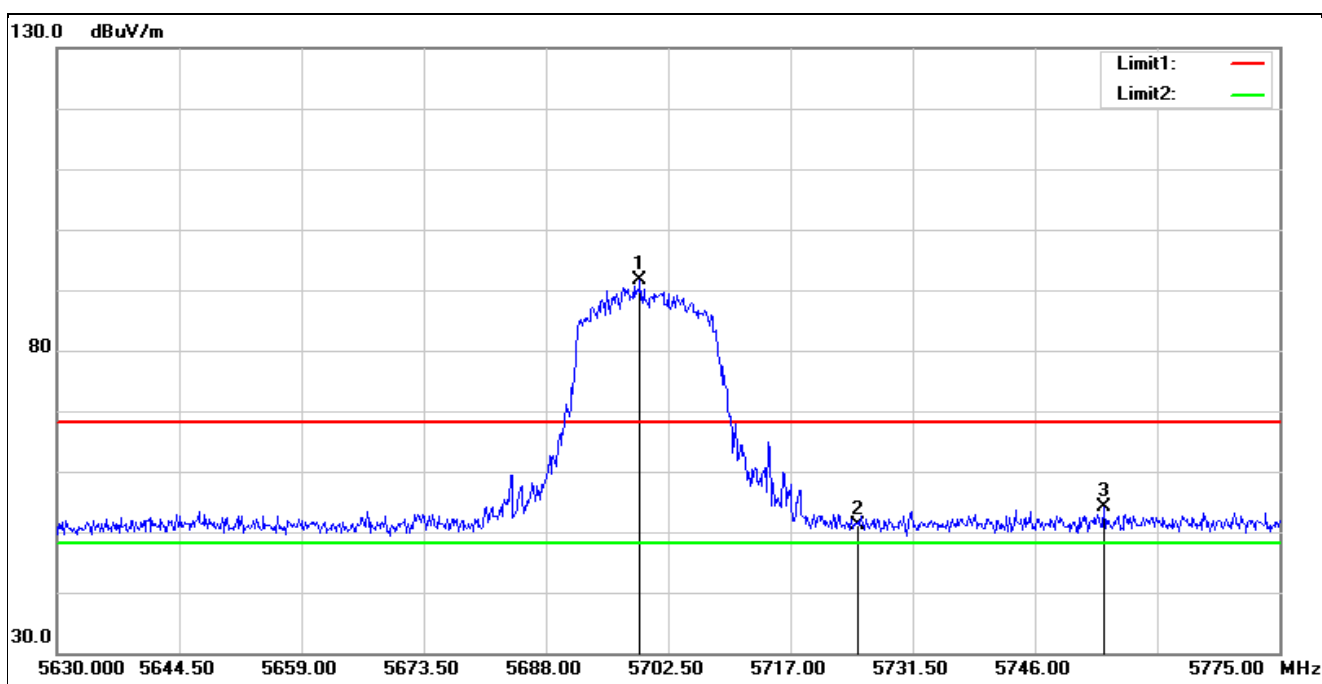


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5699.165	89.64	2.06	91.70	68.20	23.50	peak
2	5725.000	48.72	2.30	51.02	68.20	-17.18	peak
3	5754.120	51.60	2.56	54.16	68.20	-14.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

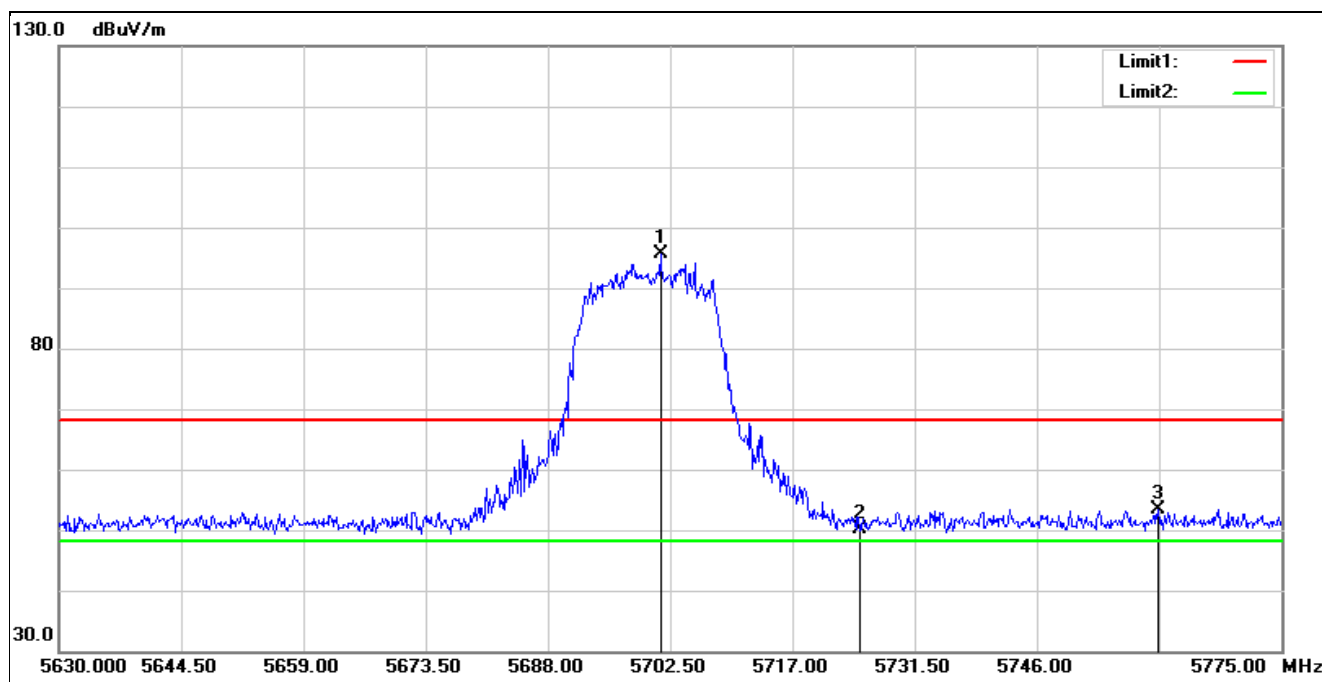


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.340	93.66	2.07	95.73	68.20	27.53	peak
2	5725.000	47.76	2.30	50.06	68.20	-18.14	peak
3	5760.355	50.81	2.60	53.41	68.20	-14.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

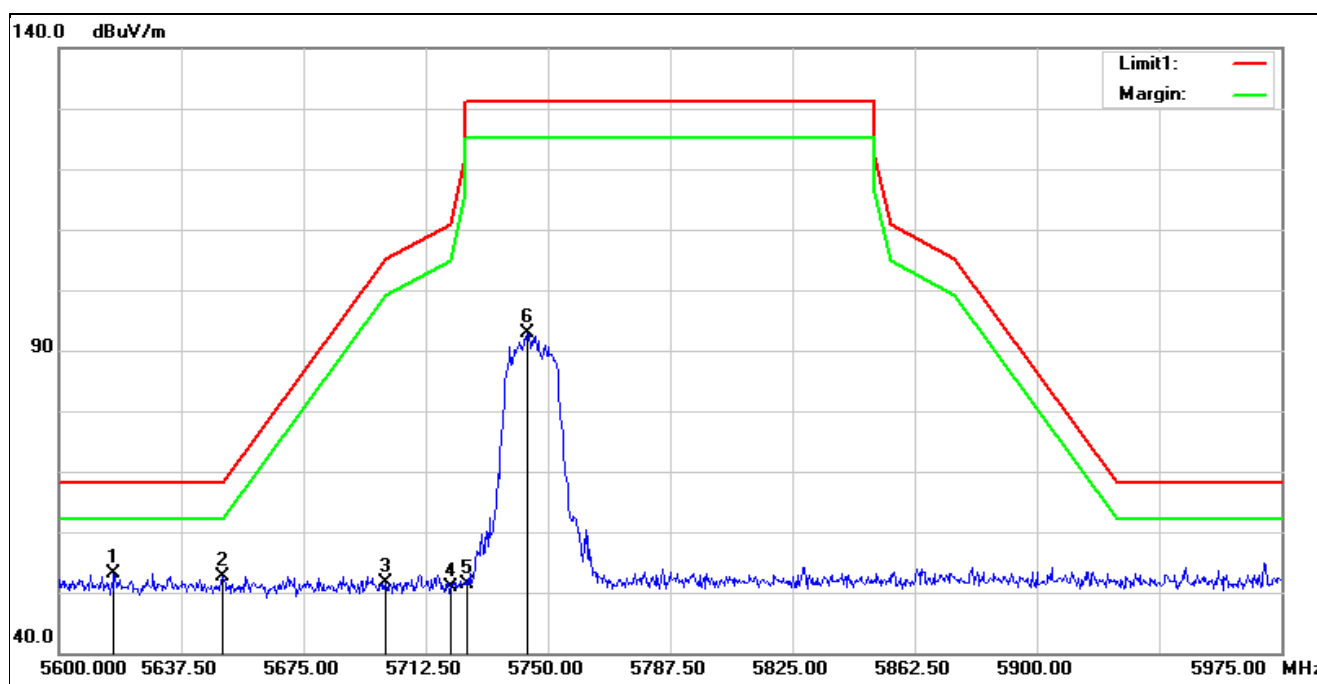


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5616.875	51.14	1.97	53.11	68.20	-15.09	peak
2	5650.000	50.68	1.90	52.58	68.20	-15.62	peak
3	5700.000	49.50	2.06	51.56	105.20	-53.64	peak
4	5720.000	48.70	2.26	50.96	110.80	-59.84	peak
5	5725.000	49.18	2.30	51.48	122.20	-70.72	peak
6	5743.625	90.37	2.49	92.86	131.20	-38.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

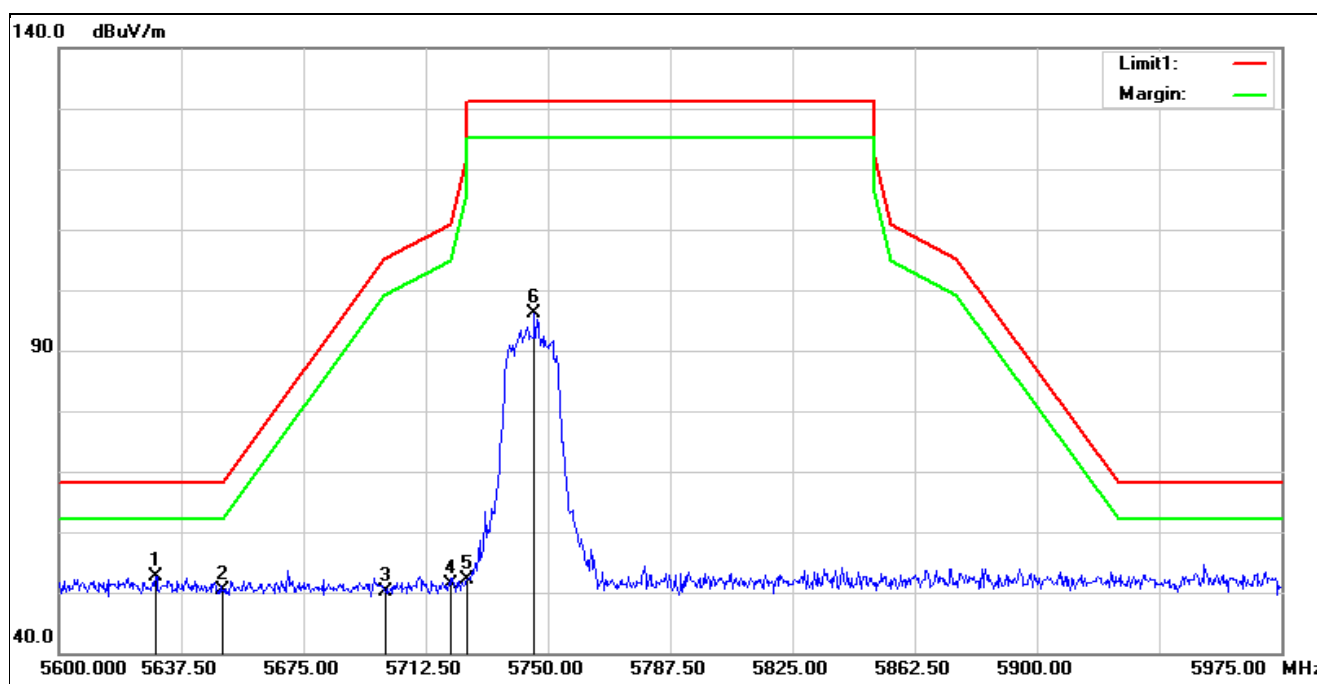


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5629.625	50.75	1.94	52.69	68.20	-15.51	peak
2	5650.000	48.42	1.90	50.32	68.20	-17.88	peak
3	5700.000	48.01	2.06	50.07	105.20	-55.13	peak
4	5720.000	49.24	2.26	51.50	110.80	-59.30	peak
5	5725.000	49.71	2.30	52.01	122.20	-70.19	peak
6	5745.875	93.53	2.51	96.04	131.20	-35.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

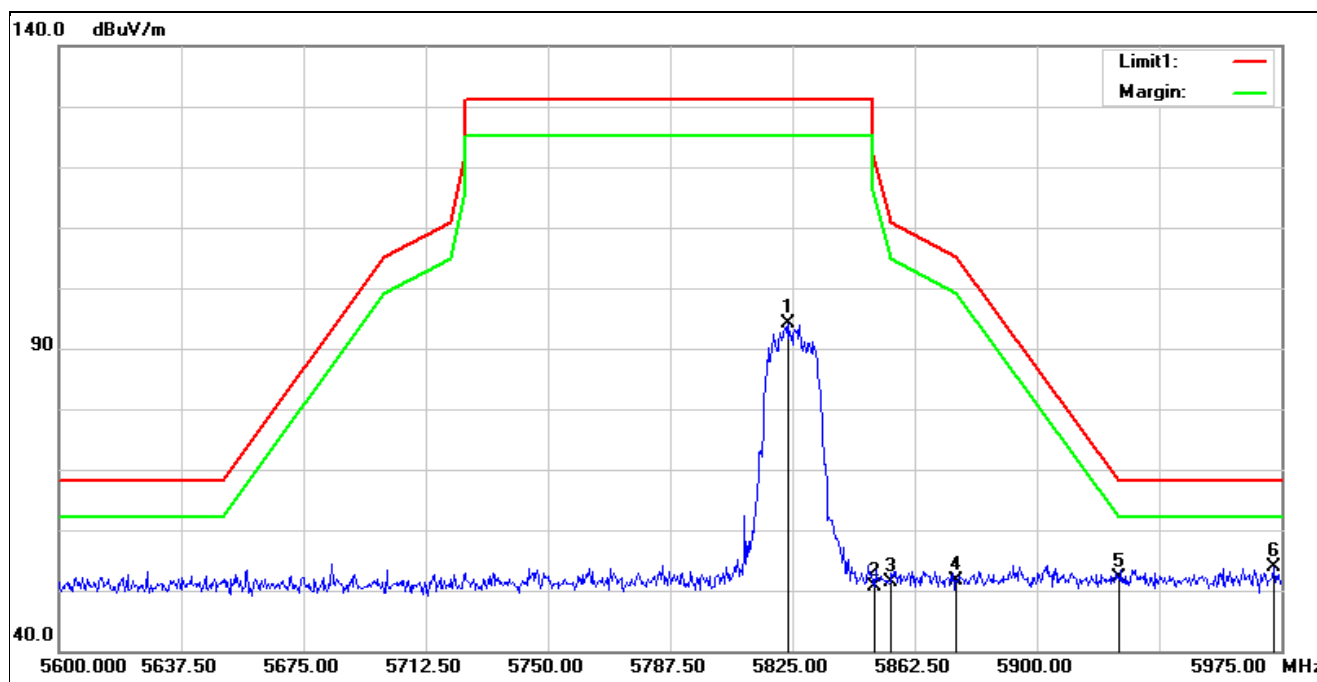


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.875	91.28	2.89	94.17	131.20	-37.03	peak
2	5850.000	47.72	2.98	50.70	122.20	-71.50	peak
3	5855.000	48.33	3.01	51.34	110.80	-59.46	peak
4	5875.000	48.66	3.07	51.73	105.20	-53.47	peak
5	5925.000	48.98	3.10	52.08	68.20	-16.12	peak
6*	5972.750	50.66	3.15	53.81	68.20	-14.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

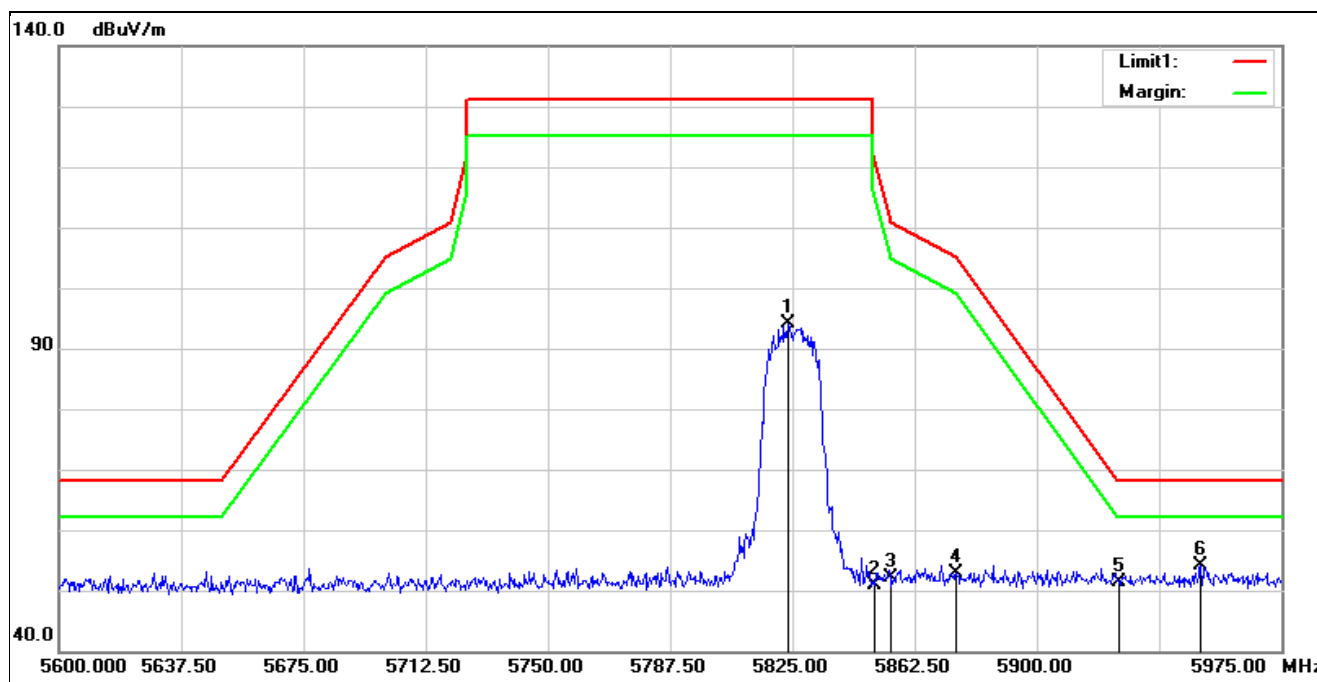


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.875	91.20	2.89	94.09	131.20	-37.11	peak
2	5850.000	47.96	2.98	50.94	122.20	-71.26	peak
3	5855.000	49.22	3.01	52.23	110.80	-58.57	peak
4	5875.000	49.88	3.07	52.95	105.20	-52.25	peak
5	5925.000	48.16	3.10	51.26	68.20	-16.94	peak
6*	5950.250	50.99	3.02	54.01	68.20	-14.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

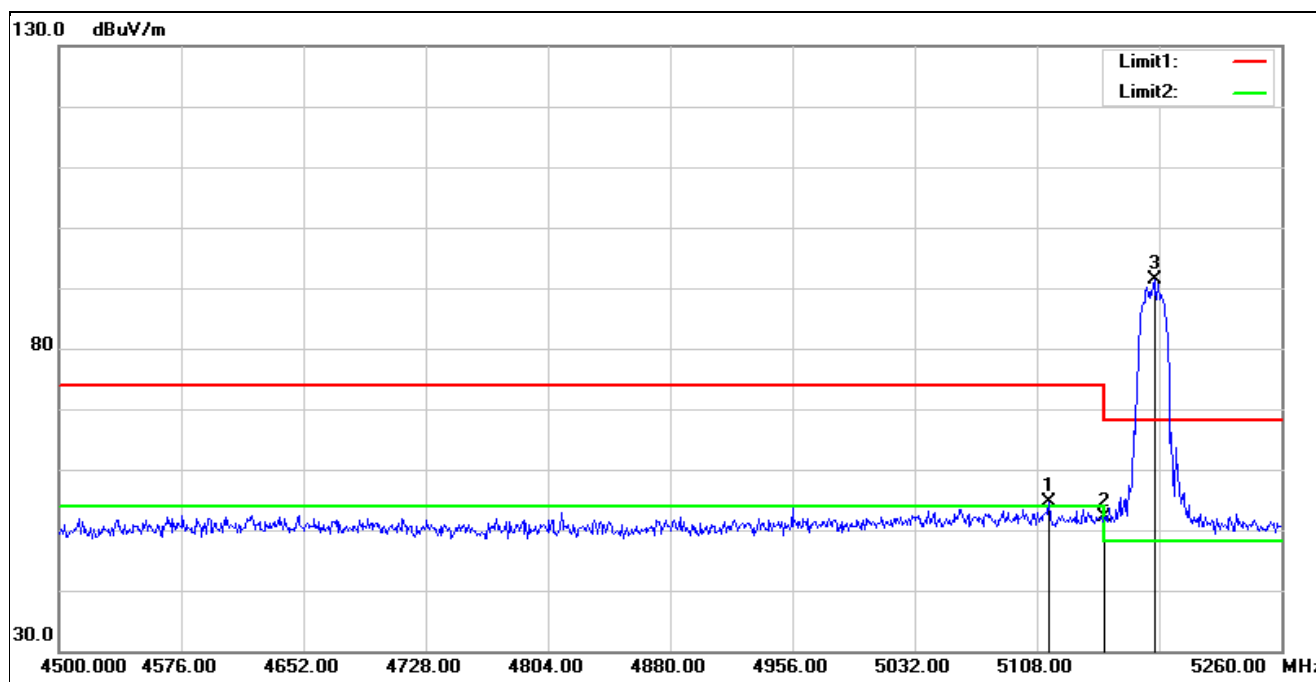


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5115.600	53.15	1.37	54.52	74.00	-19.48	peak
2	5150.000	50.78	1.42	52.20	74.00	-21.80	peak
3*	5180.960	90.07	1.34	91.41	68.20	23.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

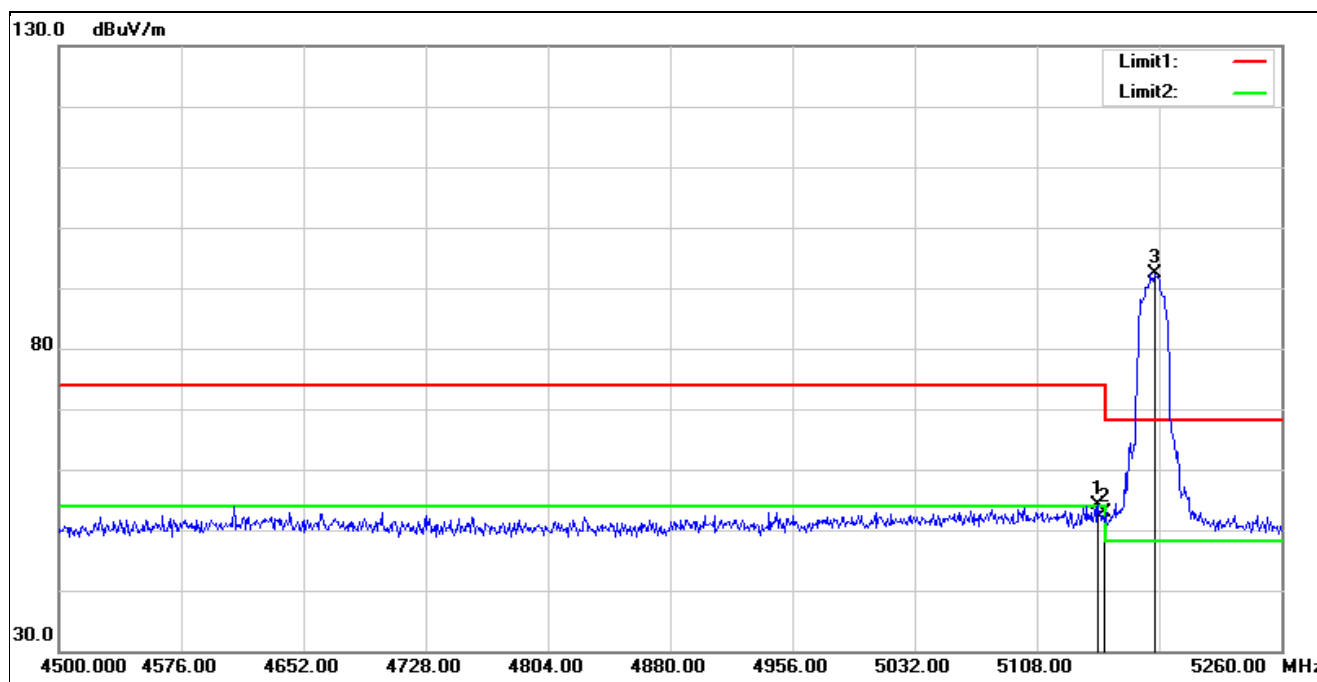


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	52.74	1.42	54.16	74.00	-19.84	peak
2	5150.000	51.40	1.42	52.82	74.00	-21.18	peak
3*	5180.960	91.16	1.34	92.50	68.20	24.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

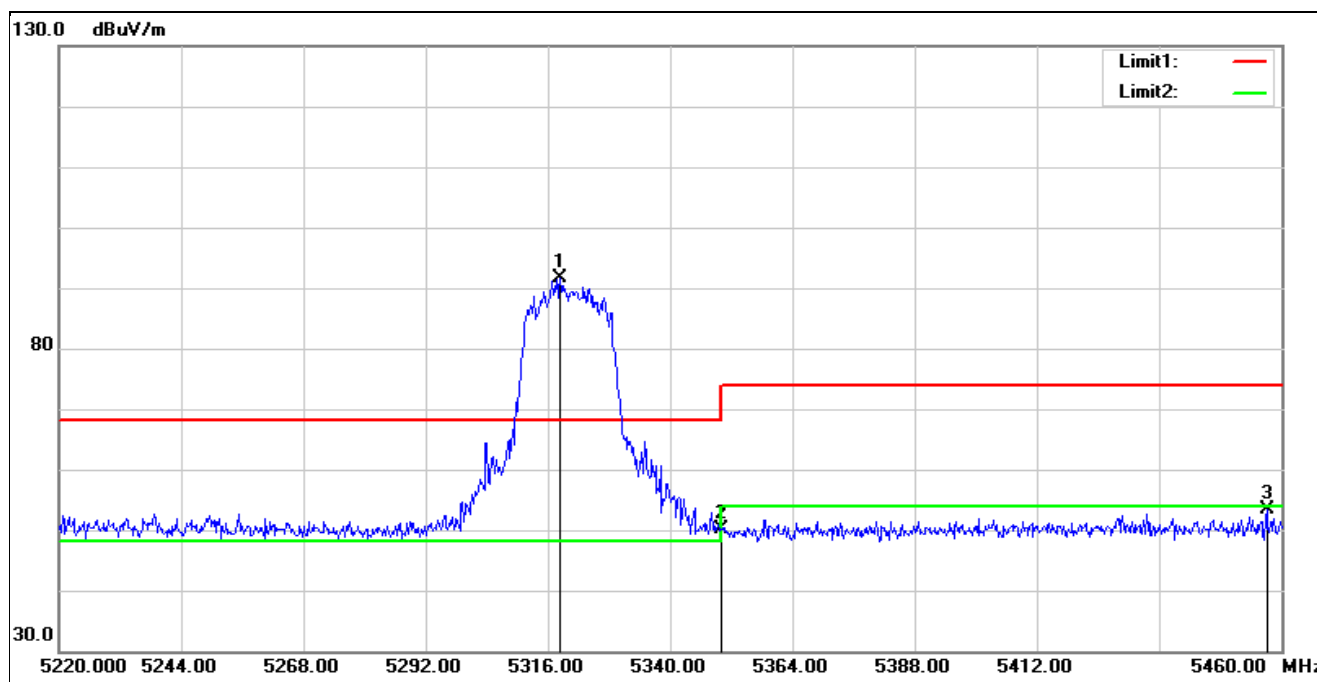


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.400	90.66	0.98	91.64	68.20	23.44	peak
2	5350.000	49.10	1.08	50.18	74.00	-23.82	peak
3	5457.120	51.66	1.72	53.38	74.00	-20.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

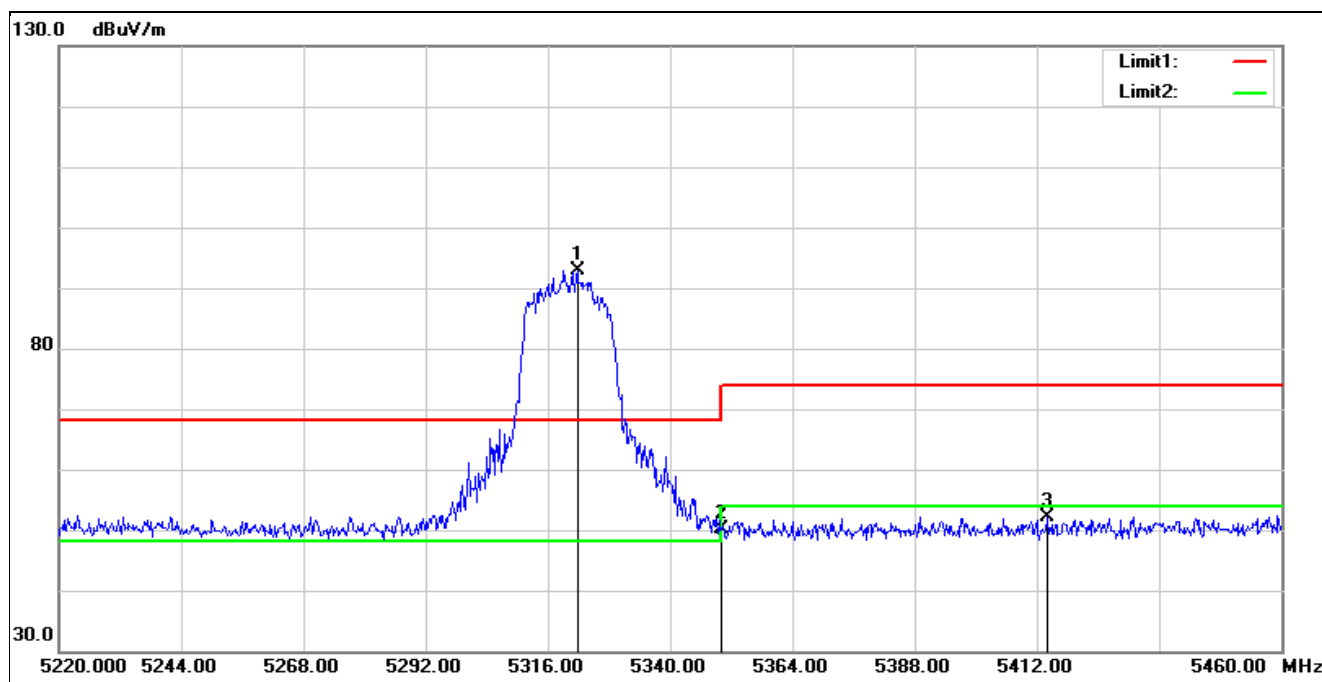


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5321.760	91.98	0.98	92.96	68.20	24.76	peak
2	5350.000	49.00	1.08	50.08	74.00	-23.92	peak
3	5413.920	50.47	1.60	52.07	74.00	-21.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

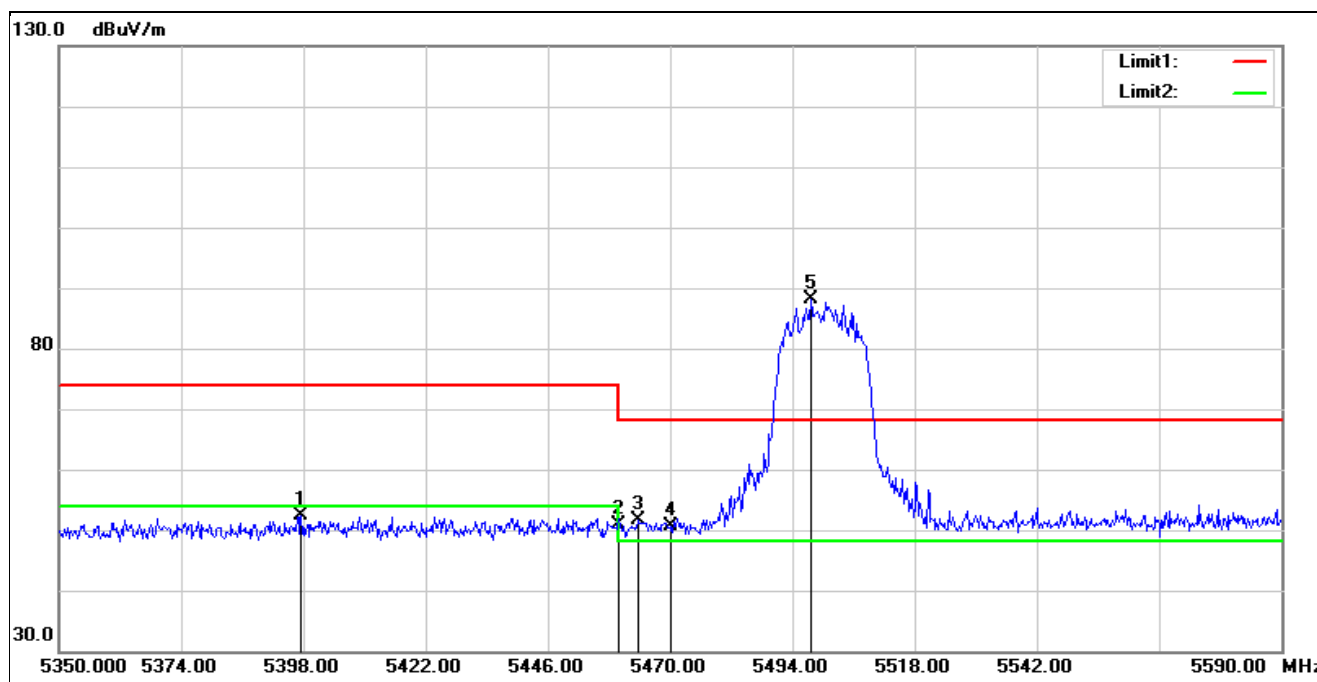


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5397.520	50.75	1.53	52.28	74.00	-21.72	peak
2	5460.000	49.16	1.73	50.89	74.00	-23.11	peak
3	5463.760	49.85	1.73	51.58	68.20	-16.62	peak
4	5470.000	48.92	1.74	50.66	68.20	-17.54	peak
5*	5497.600	86.41	1.78	88.19	68.20	19.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

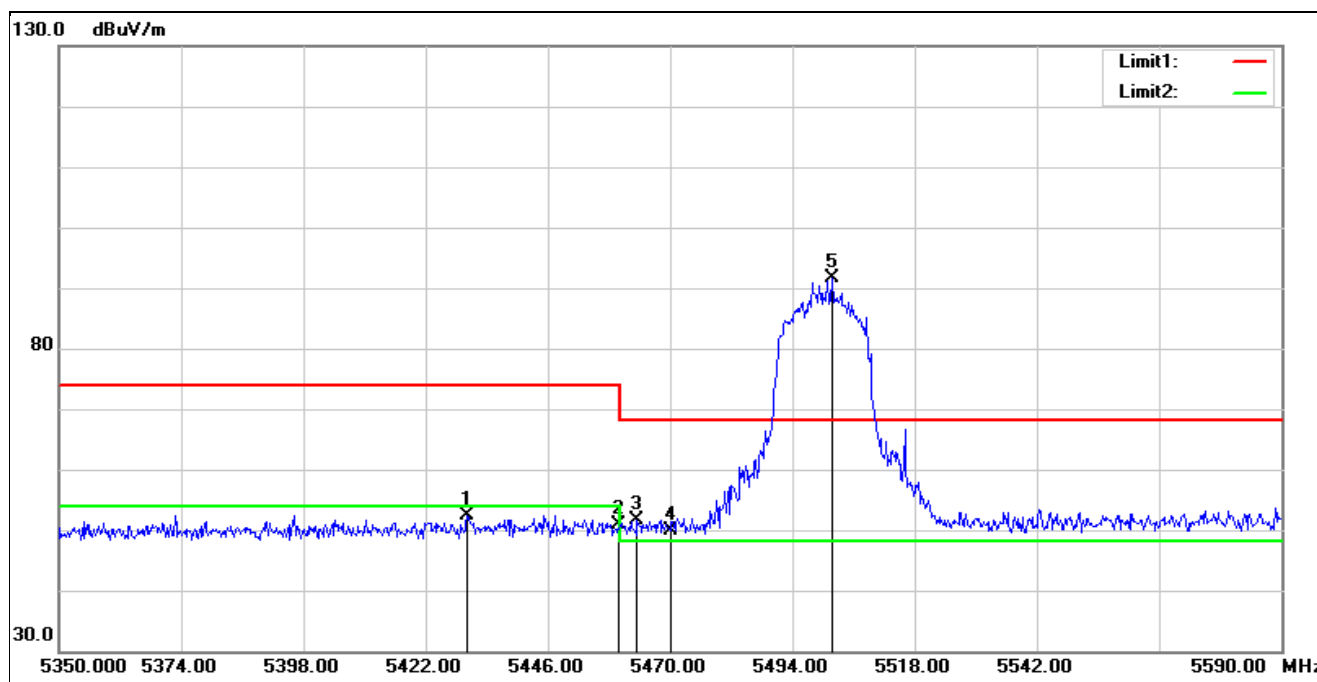


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.160	50.73	1.65	52.38	74.00	-21.62	peak
2	5460.000	49.08	1.73	50.81	74.00	-23.19	peak
3	5463.520	49.89	1.73	51.62	68.20	-16.58	peak
4	5470.000	48.04	1.74	49.78	68.20	-18.42	peak
5*	5501.920	89.74	1.79	91.53	68.20	23.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

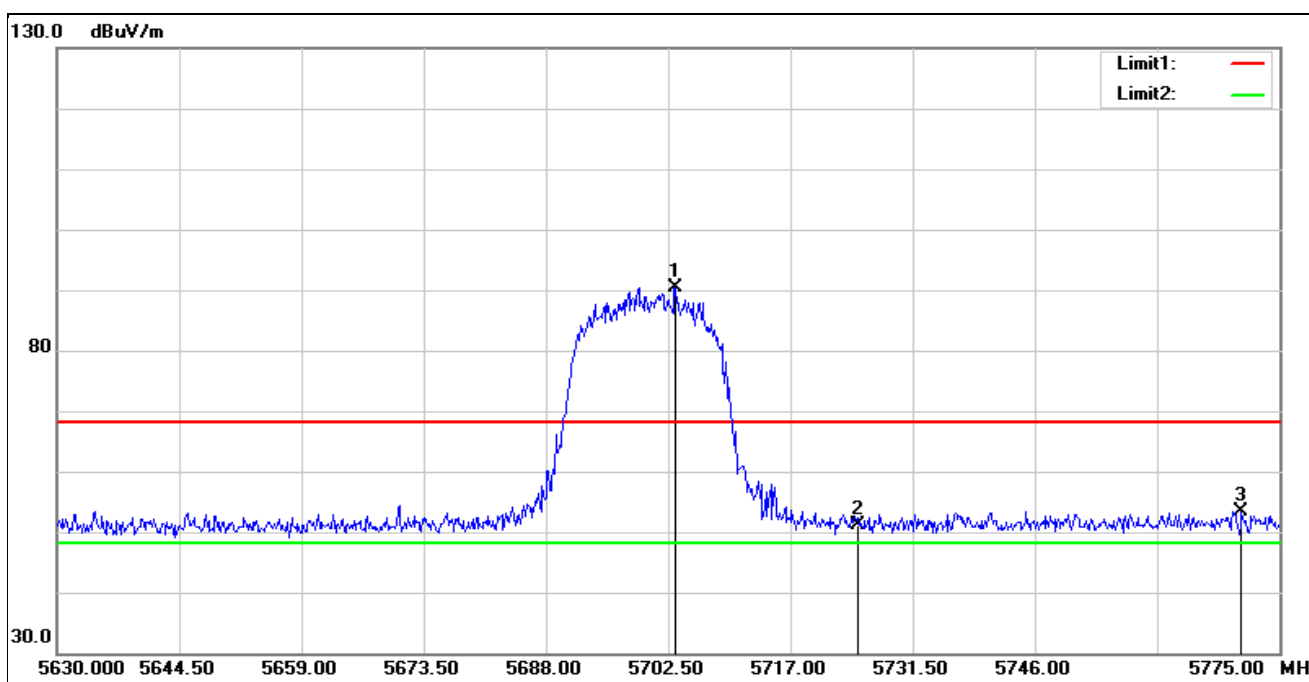


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5703.370	88.25	2.11	90.36	68.20	22.16	peak
2	5725.000	48.94	2.30	51.24	68.20	-16.96	peak
3	5770.505	50.72	2.64	53.36	68.20	-14.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

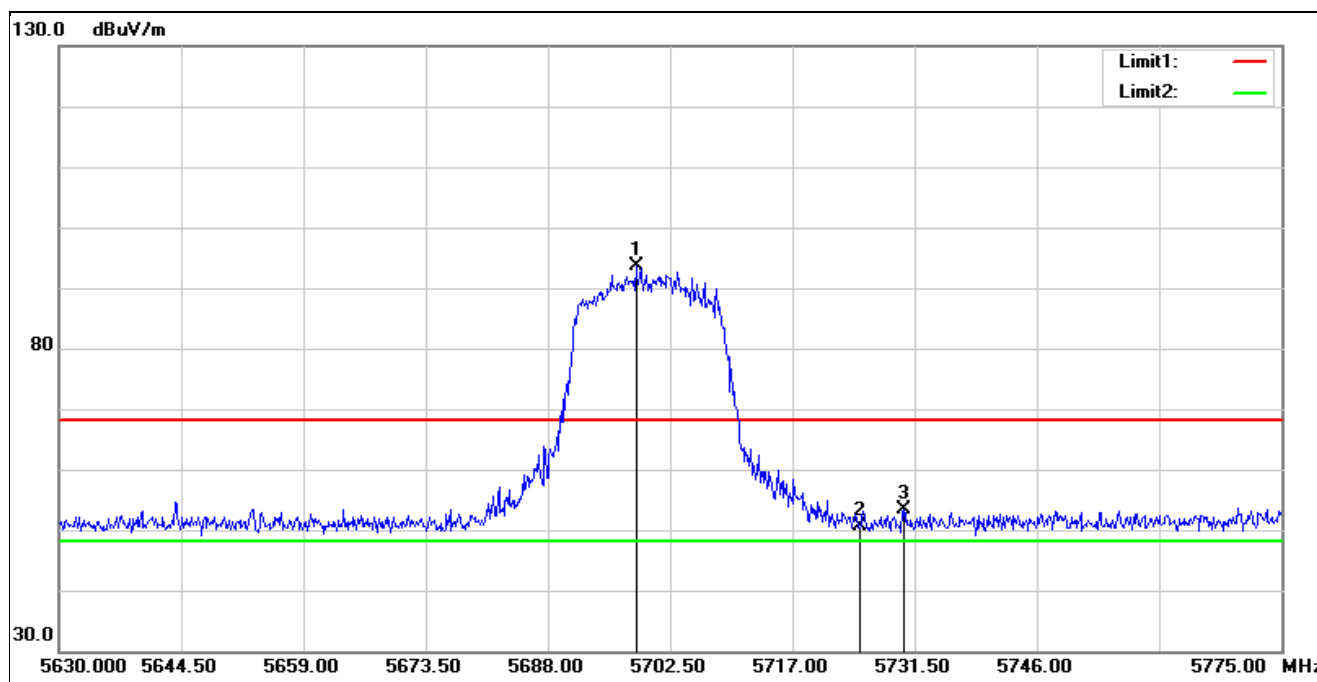


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5698.440	91.66	2.06	93.72	68.20	25.52	peak
2	5725.000	48.45	2.30	50.75	68.20	-17.45	peak
3	5730.195	51.02	2.36	53.38	68.20	-14.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

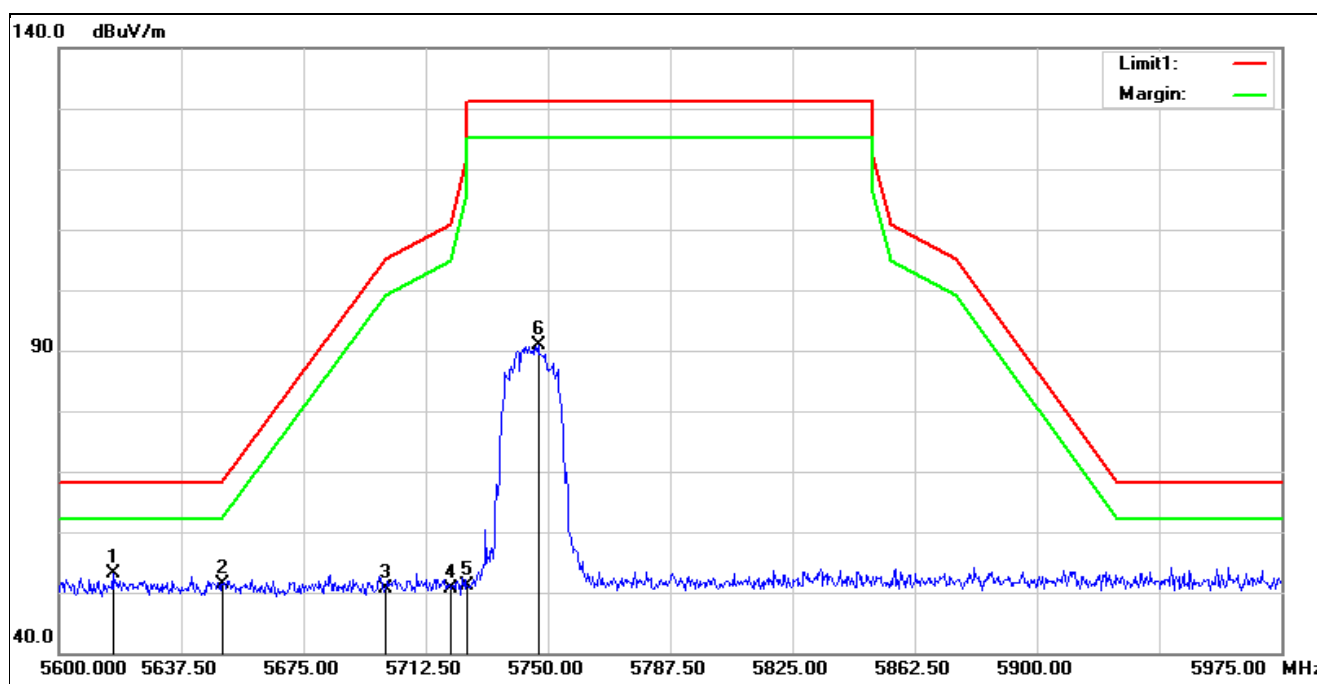


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5616.500	51.15	1.97	53.12	68.20	-15.08	peak
2	5650.000	49.36	1.90	51.26	68.20	-16.94	peak
3	5700.000	48.47	2.06	50.53	105.20	-54.67	peak
4	5720.000	48.46	2.26	50.72	110.80	-60.08	peak
5	5725.000	48.77	2.30	51.07	122.20	-71.13	peak
6	5747.000	88.26	2.52	90.78	131.20	-40.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

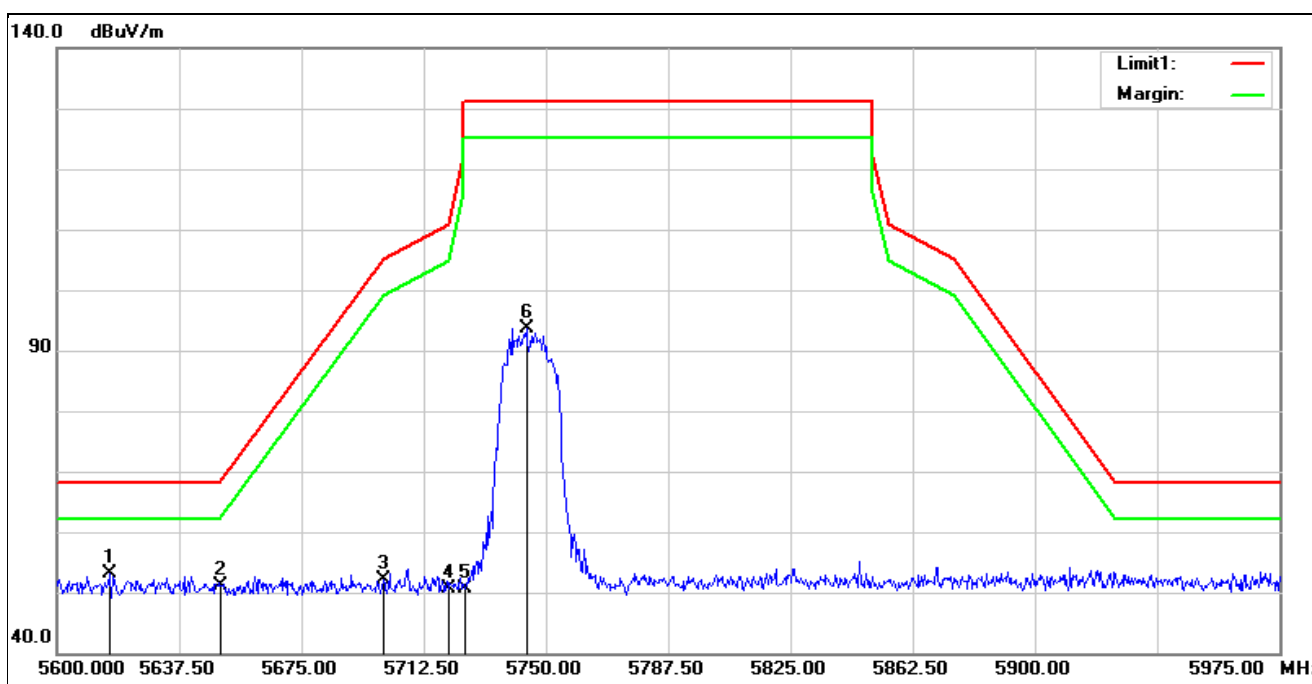


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5616.125	51.18	1.98	53.16	68.20	-15.04	peak
2	5650.000	49.20	1.90	51.10	68.20	-17.10	peak
3	5700.000	50.07	2.06	52.13	105.20	-53.07	peak
4	5720.000	48.34	2.26	50.60	110.80	-60.20	peak
5	5725.000	48.27	2.30	50.57	122.20	-71.63	peak
6	5744.000	91.13	2.49	93.62	131.20	-37.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

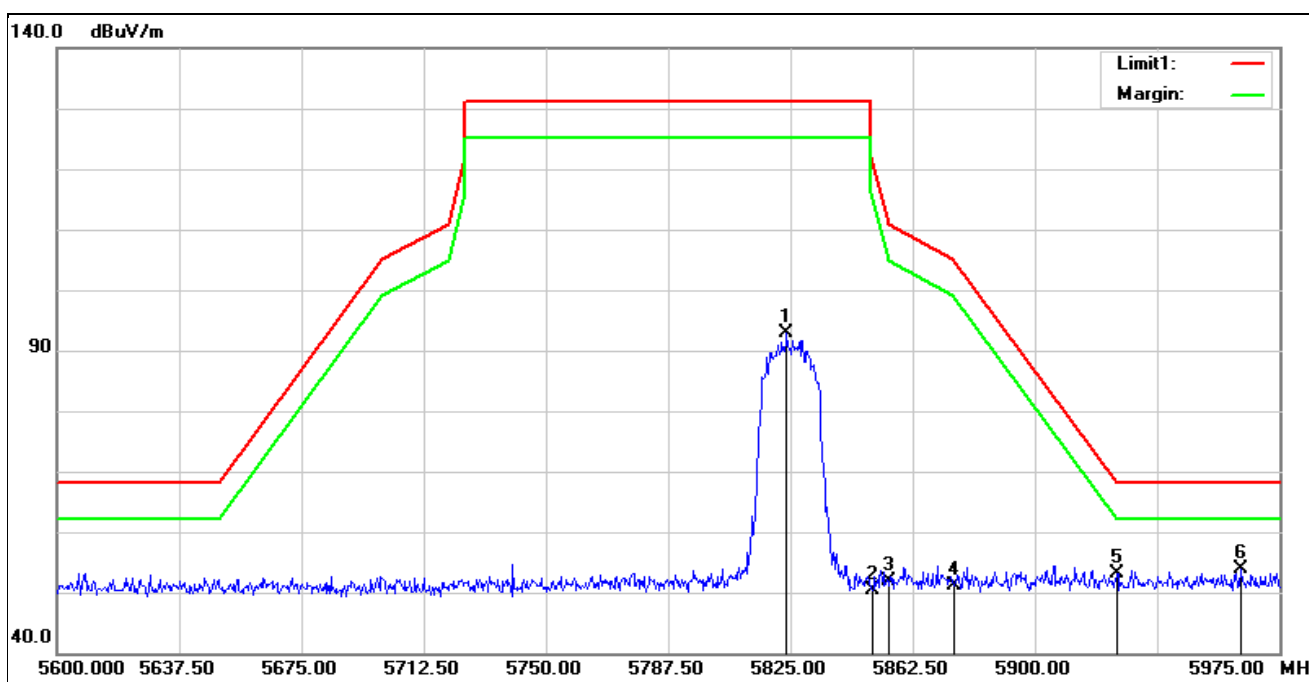


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.875	90.03	2.89	92.92	131.20	-38.28	peak
2	5850.000	47.44	2.98	50.42	122.20	-71.78	peak
3	5855.000	48.89	3.01	51.90	110.80	-58.90	peak
4	5875.000	48.15	3.07	51.22	105.20	-53.98	peak
5	5925.000	50.08	3.10	53.18	68.20	-15.02	peak
6*	5963.375	50.82	3.09	53.91	68.20	-14.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

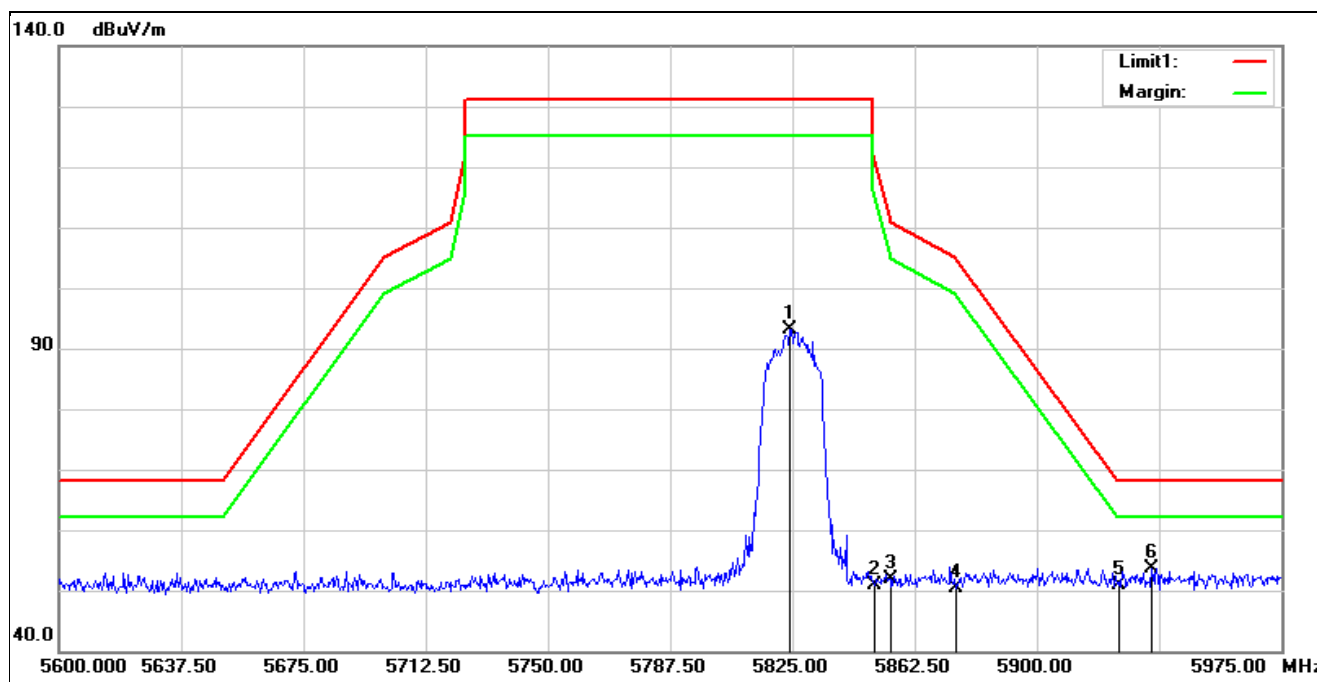


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5824.250	90.32	2.89	93.21	131.20	-37.99	peak
2	5850.000	47.96	2.98	50.94	122.20	-71.26	peak
3	5855.000	48.88	3.01	51.89	110.80	-58.91	peak
4	5875.000	47.26	3.07	50.33	105.20	-54.87	peak
5	5925.000	47.84	3.10	50.94	68.20	-17.26	peak
6*	5935.250	50.48	3.06	53.54	68.20	-14.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

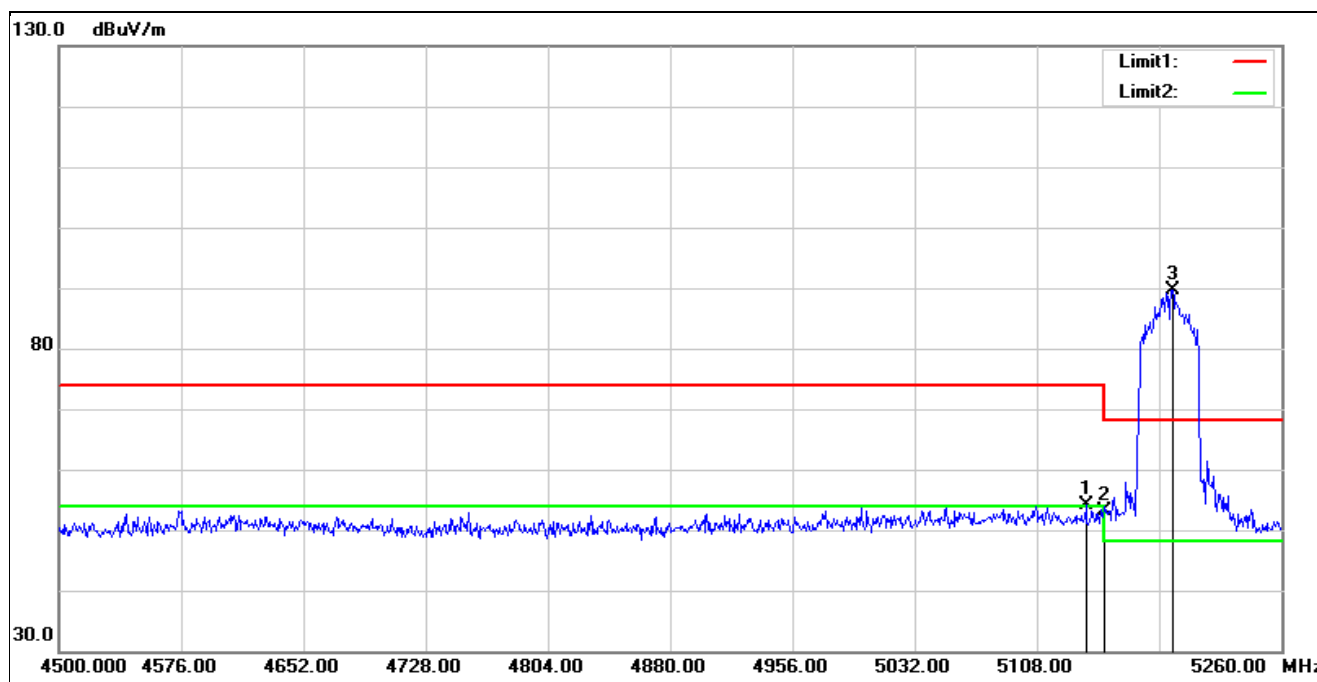


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.400	52.64	1.40	54.04	74.00	-19.96	peak
2	5150.000	51.72	1.42	53.14	74.00	-20.86	peak
3*	5192.360	88.23	1.31	89.54	68.20	21.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

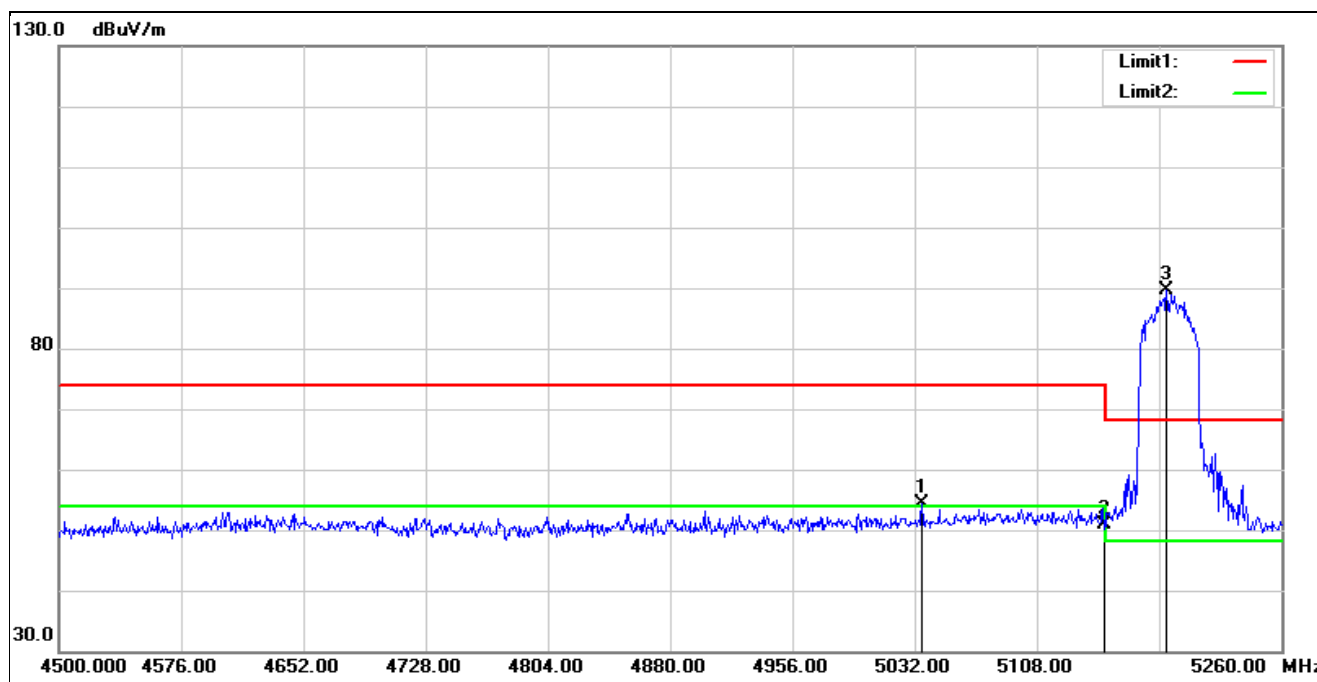


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5036.560	53.37	0.99	54.36	74.00	-19.64	peak
2	5150.000	49.55	1.42	50.97	74.00	-23.03	peak
3*	5188.560	88.37	1.32	89.69	68.20	21.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

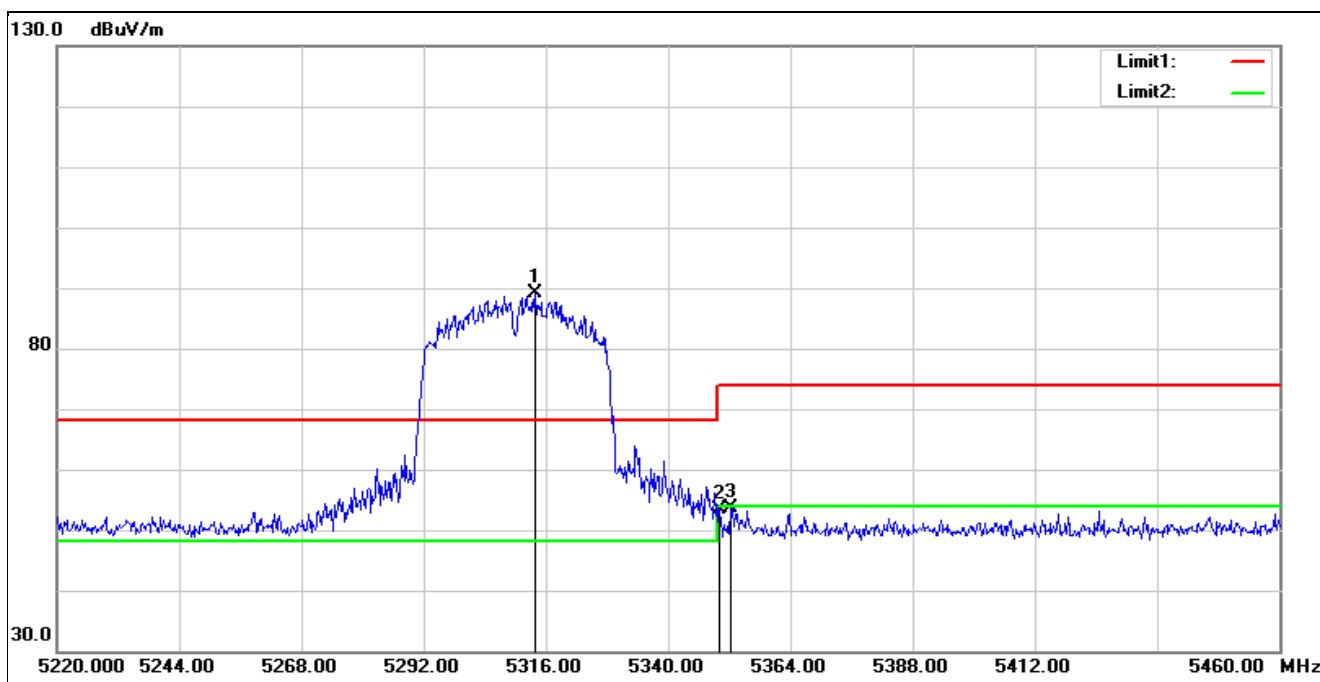


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5313.840	88.14	0.97	89.11	68.20	20.91	peak
2	5350.000	52.19	1.08	53.27	74.00	-20.73	peak
3	5352.240	52.57	1.10	53.67	74.00	-20.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

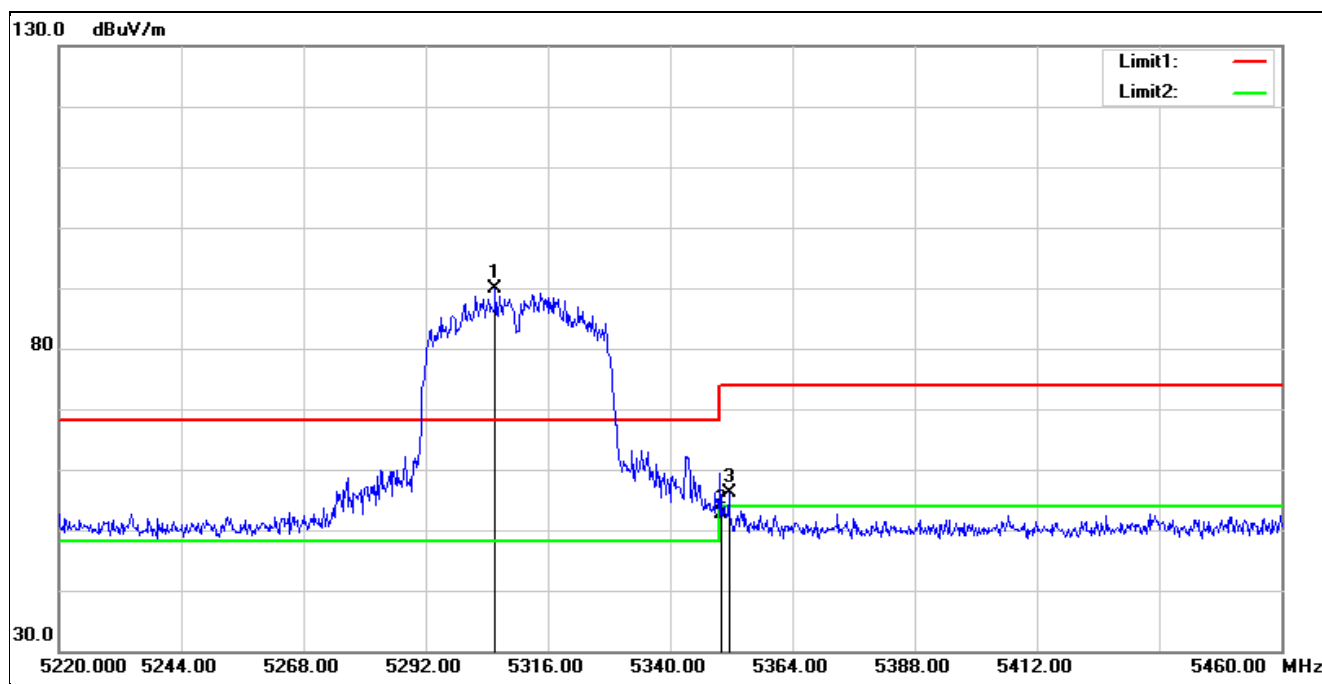


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5305.680	88.96	0.93	89.89	68.20	21.69	peak
2	5350.000	51.49	1.08	52.57	74.00	-21.43	peak
3	5351.520	55.04	1.09	56.13	74.00	-17.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

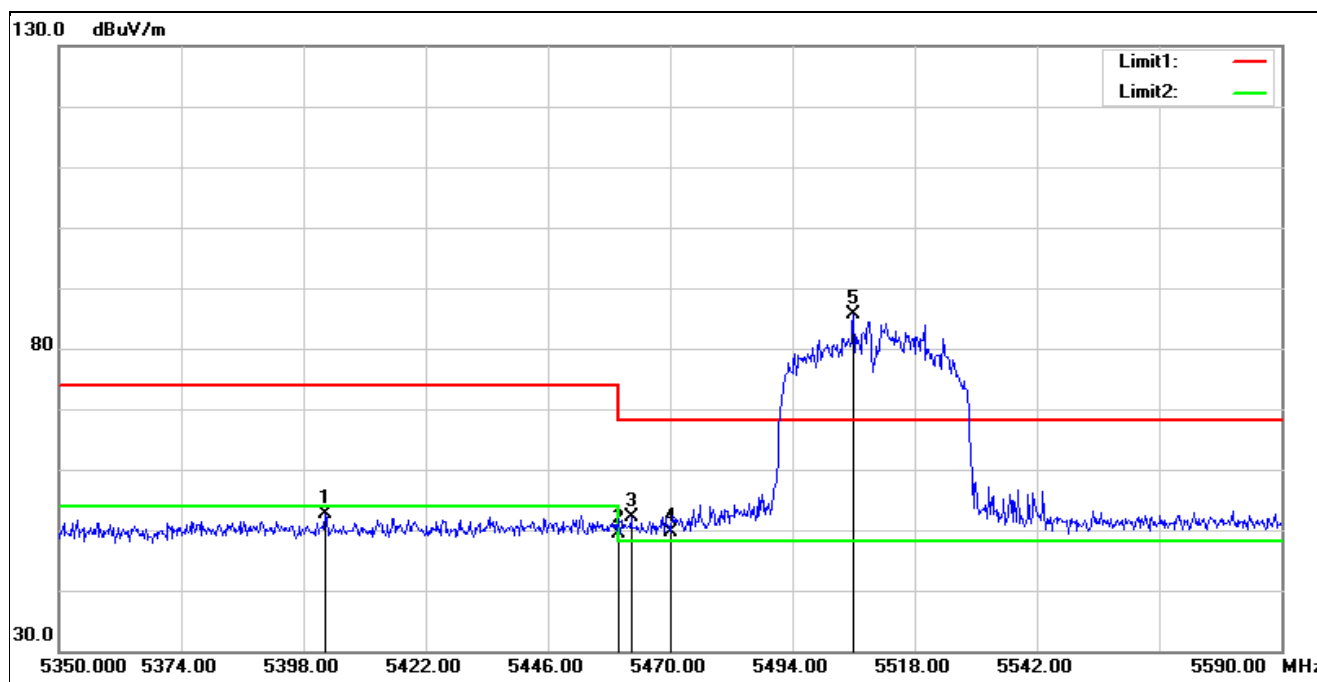


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5402.320	51.13	1.55	52.68	74.00	-21.32	peak
2	5460.000	47.69	1.73	49.42	74.00	-24.58	peak
3	5462.320	50.29	1.73	52.02	68.20	-16.18	peak
4	5470.000	47.92	1.74	49.66	68.20	-18.54	peak
5*	5506.000	83.83	1.80	85.63	68.20	17.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

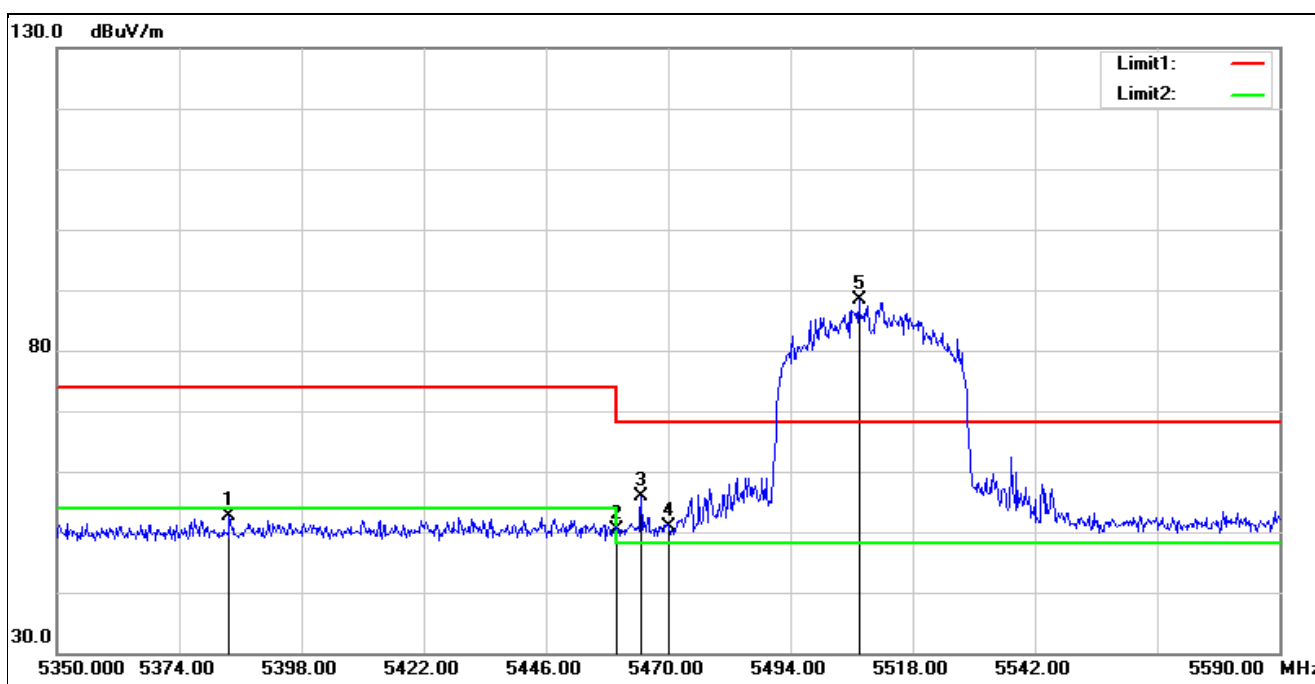


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5383.840	51.20	1.40	52.60	74.00	-21.40	peak
2	5460.000	48.74	1.73	50.47	74.00	-23.53	peak
3	5464.720	54.09	1.73	55.82	68.20	-12.38	peak
4	5470.000	49.10	1.74	50.84	68.20	-17.36	peak
5*	5507.440	86.58	1.83	88.41	68.20	20.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

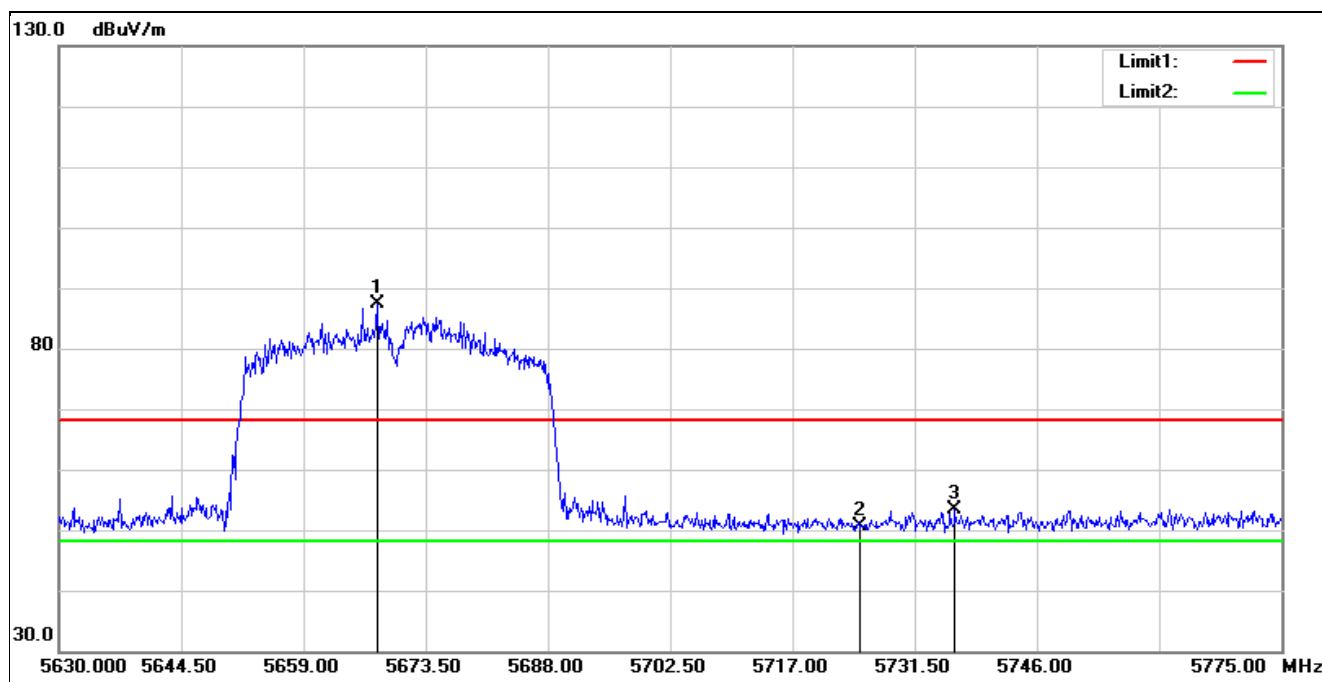


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5667.700	85.32	1.96	87.28	68.20	19.08	peak
2	5725.000	48.29	2.30	50.59	68.20	-17.61	peak
3	5736.285	50.97	2.41	53.38	68.20	-14.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

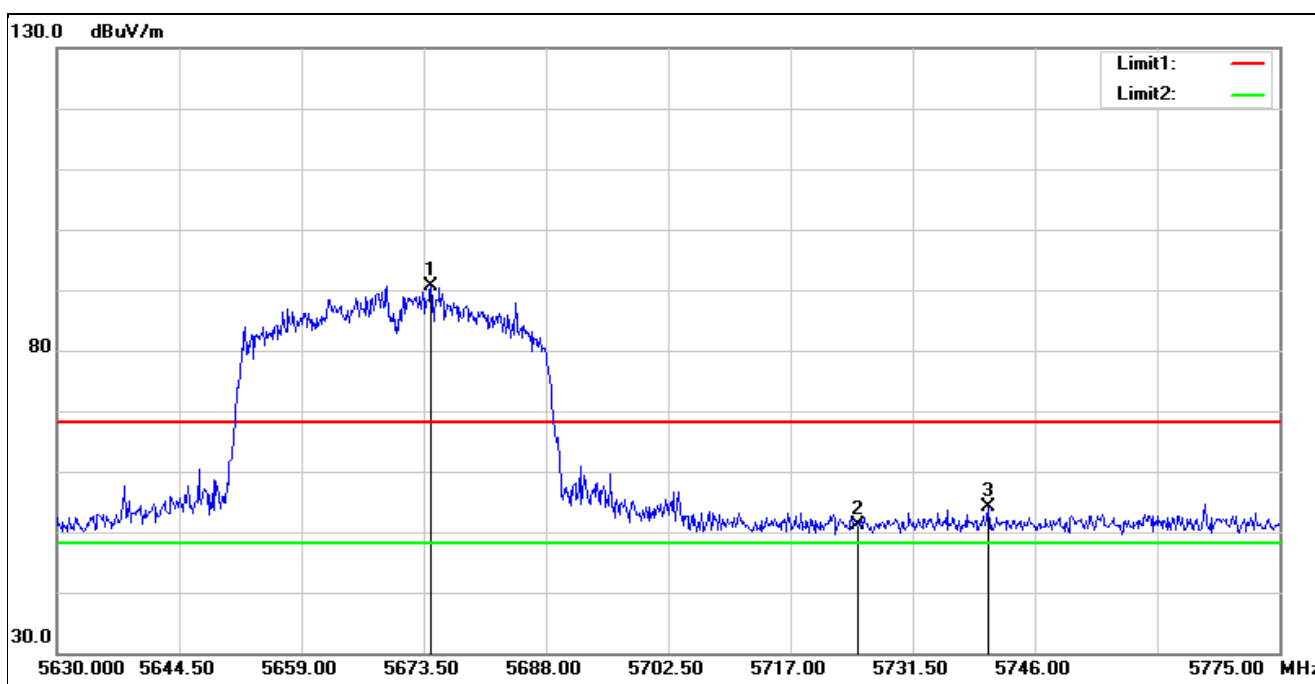


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5674.370	88.57	1.99	90.56	68.20	22.36	peak
2	5725.000	48.93	2.30	51.23	68.20	-16.97	peak
3	5740.490	51.80	2.44	54.24	68.20	-13.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

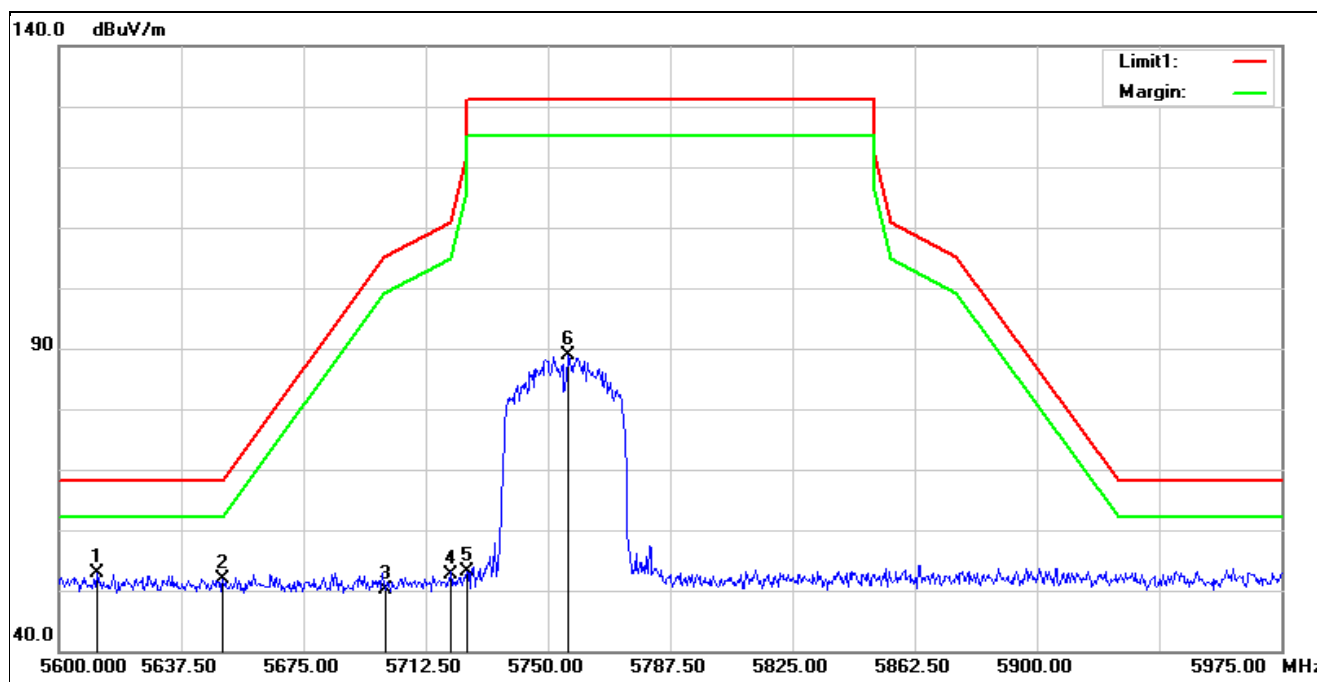


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5611.625	50.89	1.99	52.88	68.20	-15.32	peak
2	5650.000	50.01	1.90	51.91	68.20	-16.29	peak
3	5700.000	48.01	2.06	50.07	105.20	-55.13	peak
4	5720.000	50.35	2.26	52.61	110.80	-58.19	peak
5	5725.000	50.71	2.30	53.01	122.20	-69.19	peak
6	5756.375	86.41	2.57	88.98	131.20	-42.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

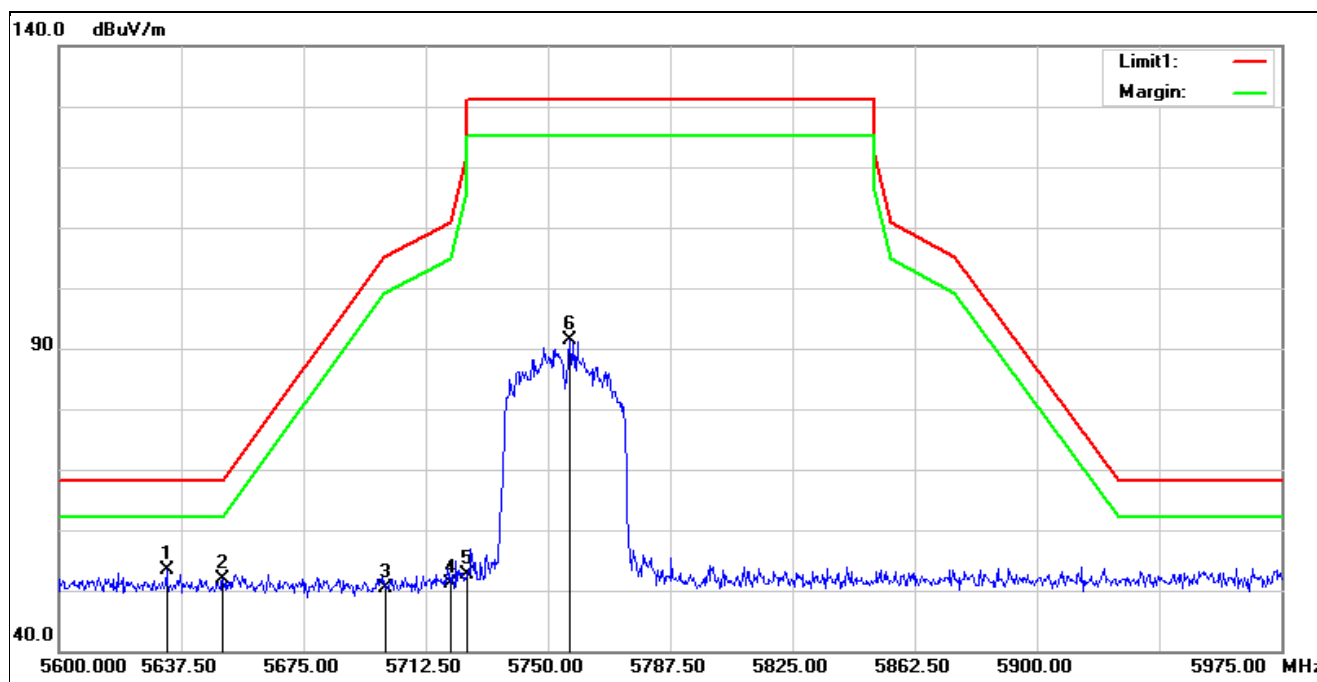


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5633.000	51.37	1.95	53.32	68.20	-14.88	peak
2	5650.000	49.88	1.90	51.78	68.20	-16.42	peak
3	5700.000	48.24	2.06	50.30	105.20	-54.90	peak
4	5720.000	48.92	2.26	51.18	110.80	-59.62	peak
5	5725.000	50.22	2.30	52.52	122.20	-69.68	peak
6	5756.750	88.88	2.57	91.45	131.20	-39.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

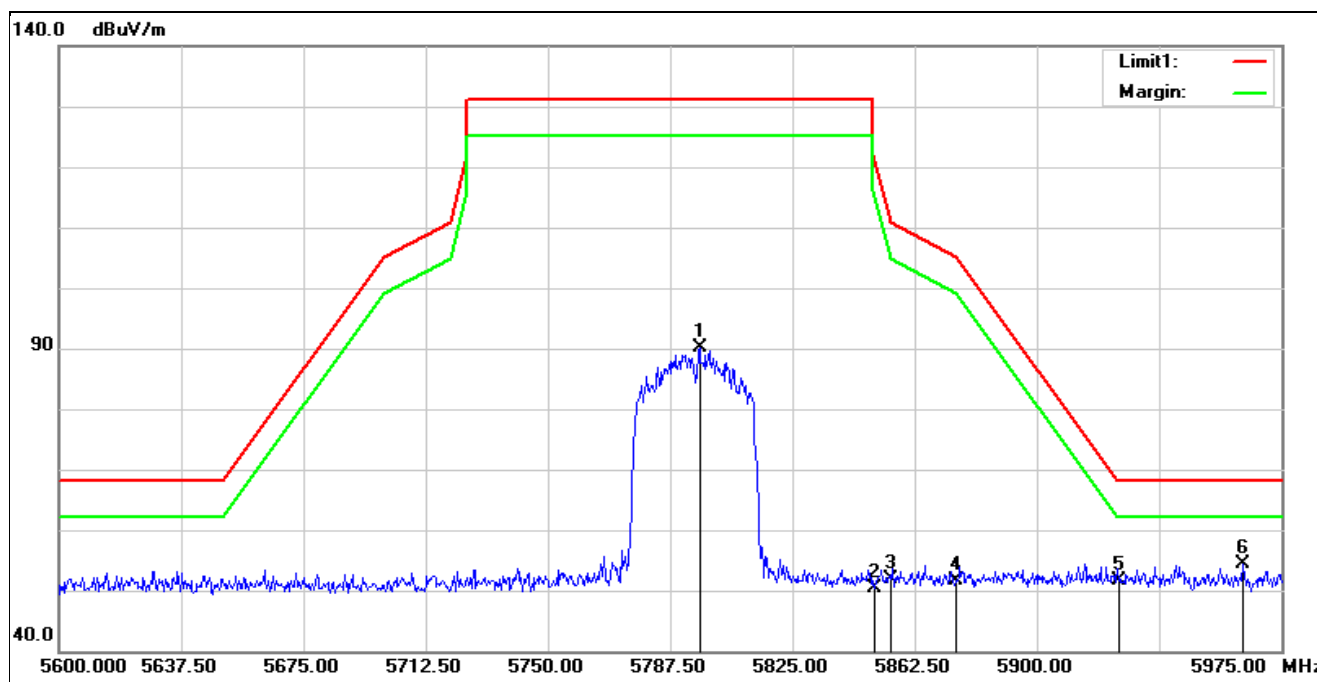

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5796.500	87.32	2.79	90.11	131.20	-41.09	peak
2	5850.000	47.52	2.98	50.50	122.20	-71.70	peak
3	5855.000	48.93	3.01	51.94	110.80	-58.86	peak
4	5875.000	48.55	3.07	51.62	105.20	-53.58	peak
5	5925.000	48.56	3.10	51.66	68.20	-16.54	peak
6*	5963.000	51.39	3.09	54.48	68.20	-13.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

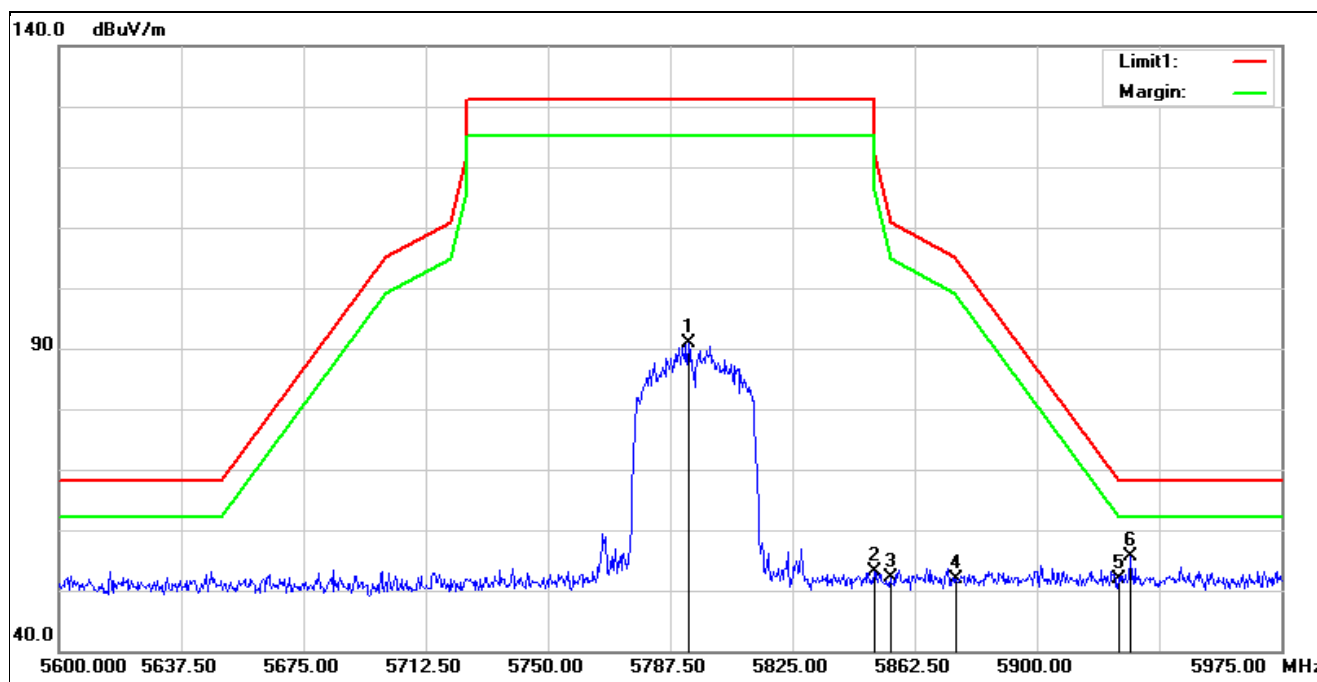

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5793.125	88.06	2.77	90.83	131.20	-40.37	peak
2	5850.000	50.24	2.98	53.22	122.20	-68.98	peak
3	5855.000	49.08	3.01	52.09	110.80	-58.71	peak
4	5875.000	48.78	3.07	51.85	105.20	-53.35	peak
5	5925.000	48.78	3.10	51.88	68.20	-16.32	peak
6*	5928.500	52.63	3.09	55.72	68.20	-12.48	peak


Average

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11a 5180 MHz

Remark:

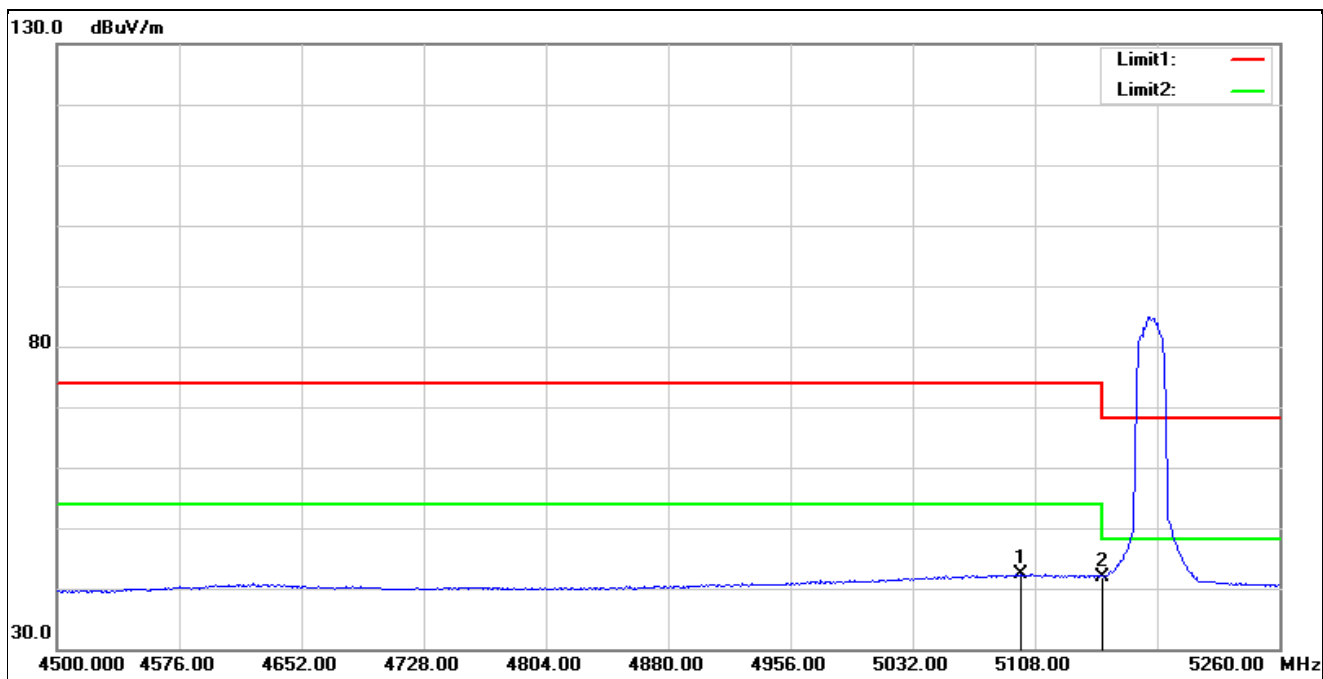


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5098.880	40.98	1.35	42.33	54.00	-11.67	AVG
2	5150.000	40.55	1.42	41.97	54.00	-12.03	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

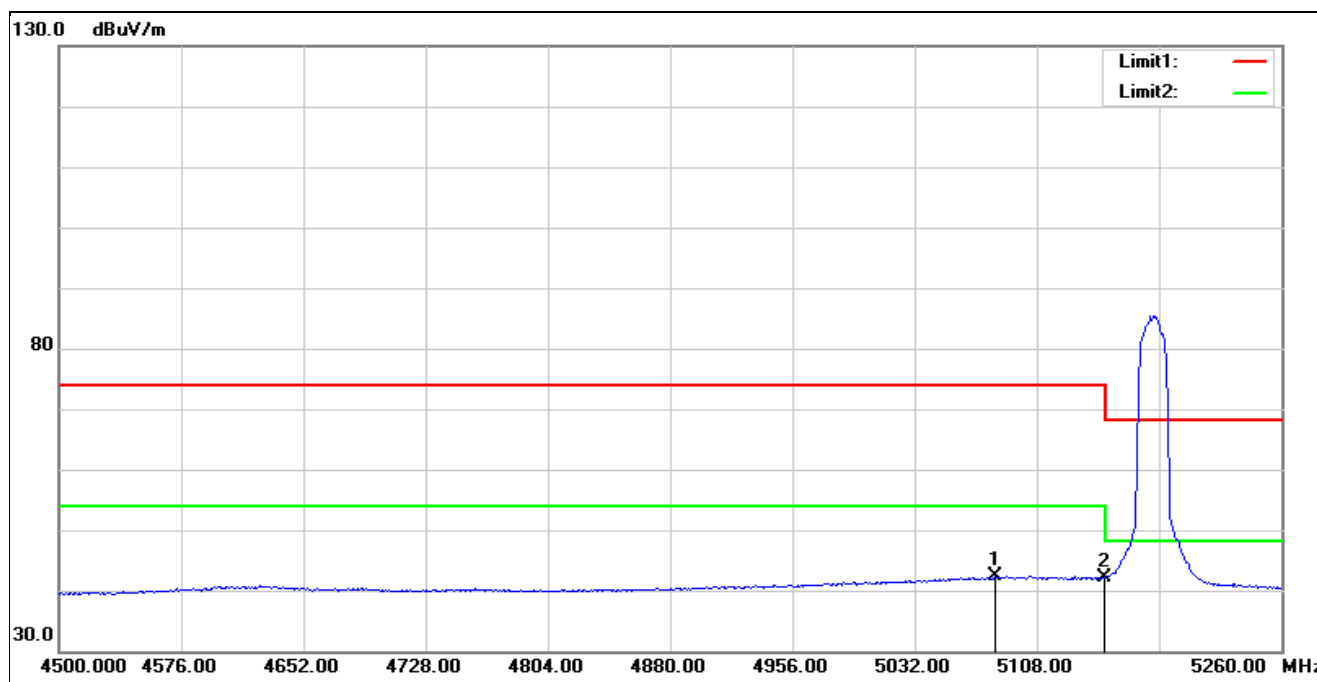


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5082.160	41.11	1.26	42.37	54.00	-11.63	AVG
2	5150.000	40.69	1.42	42.11	54.00	-11.89	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

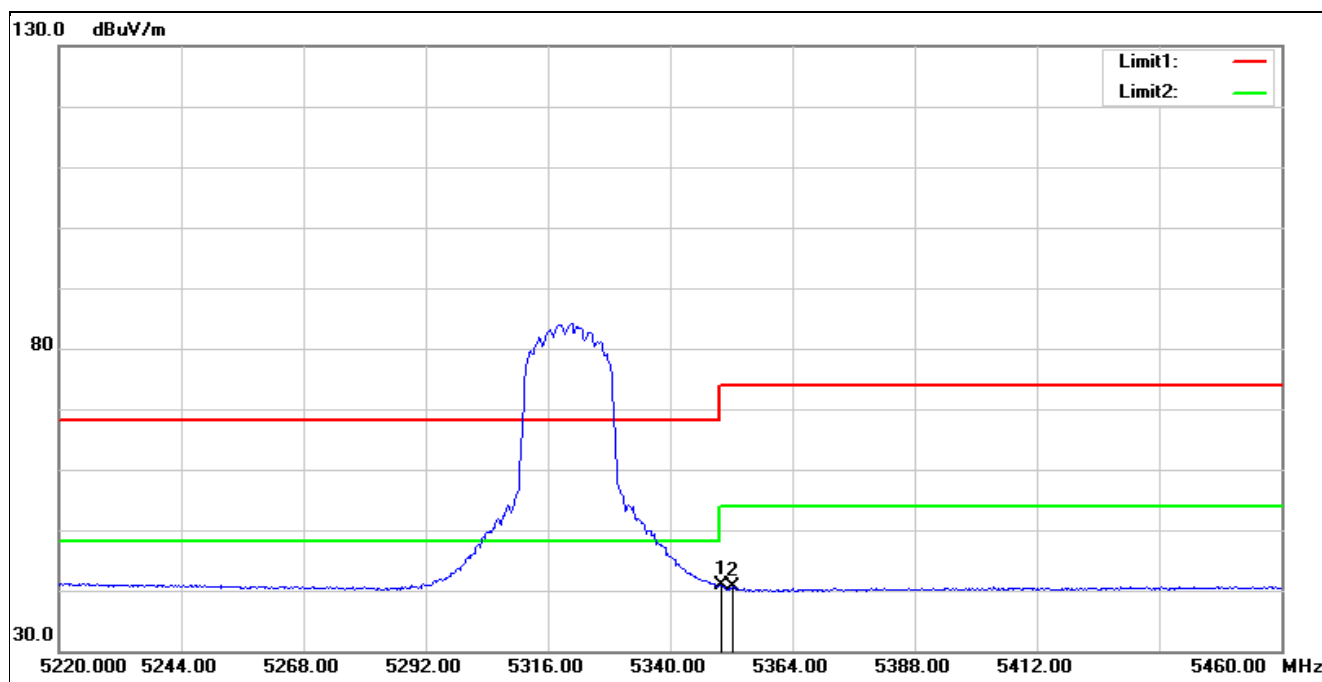


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	39.71	1.08	40.79	54.00	-13.21	AVG
2	5352.240	39.56	1.10	40.66	54.00	-13.34	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

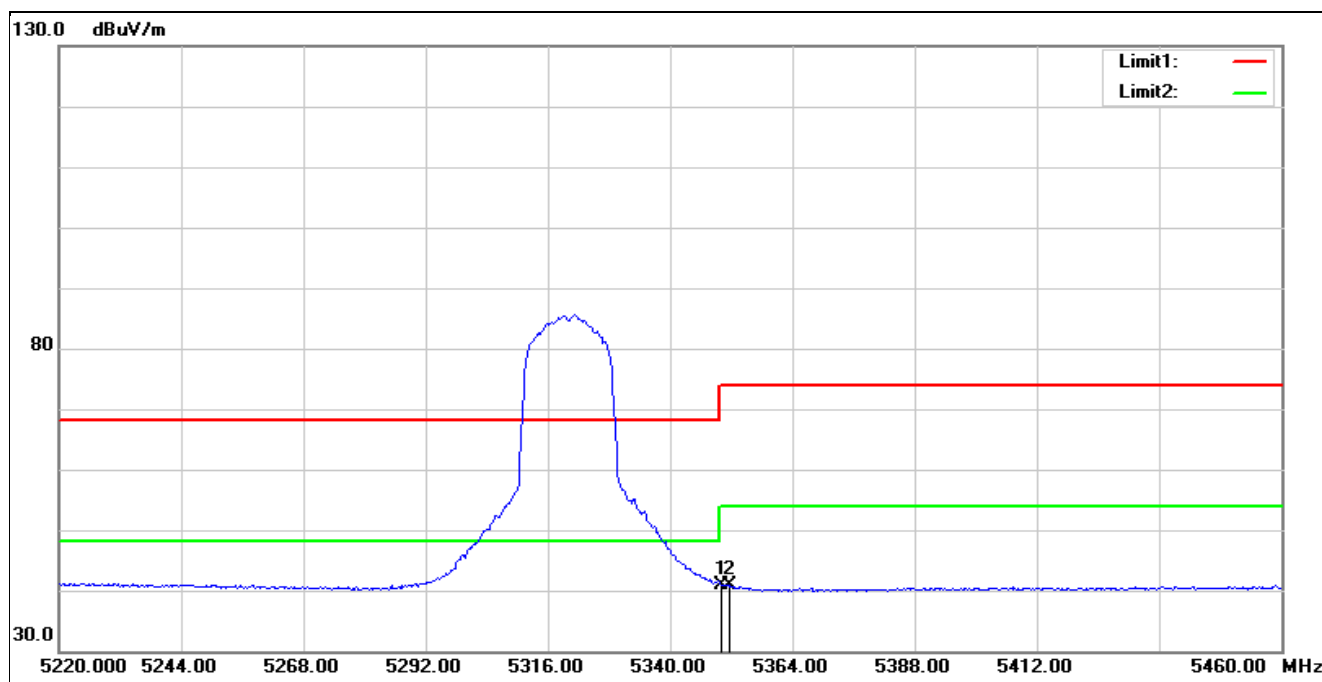


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	39.80	1.08	40.88	54.00	-13.12	AVG
2	5351.760	39.73	1.09	40.82	54.00	-13.18	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

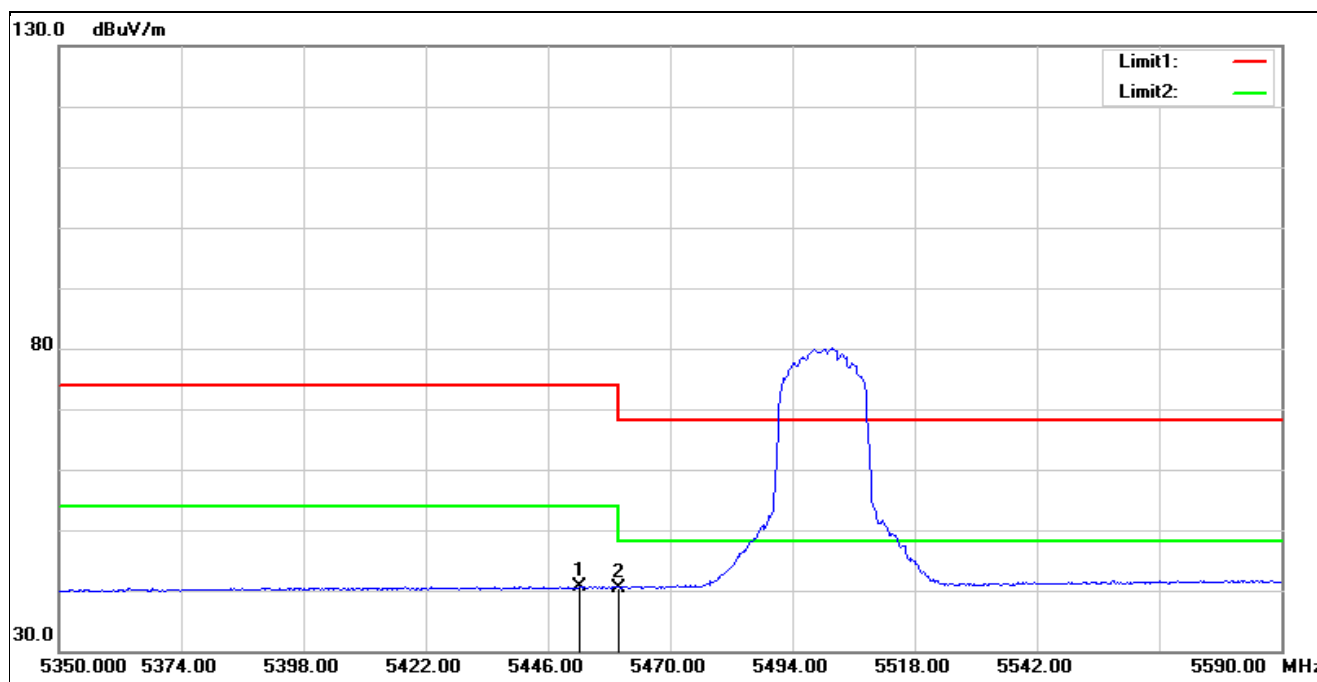


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5452.240	39.00	1.72	40.72	54.00	-13.28	AVG
2	5460.000	38.71	1.73	40.44	54.00	-13.56	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

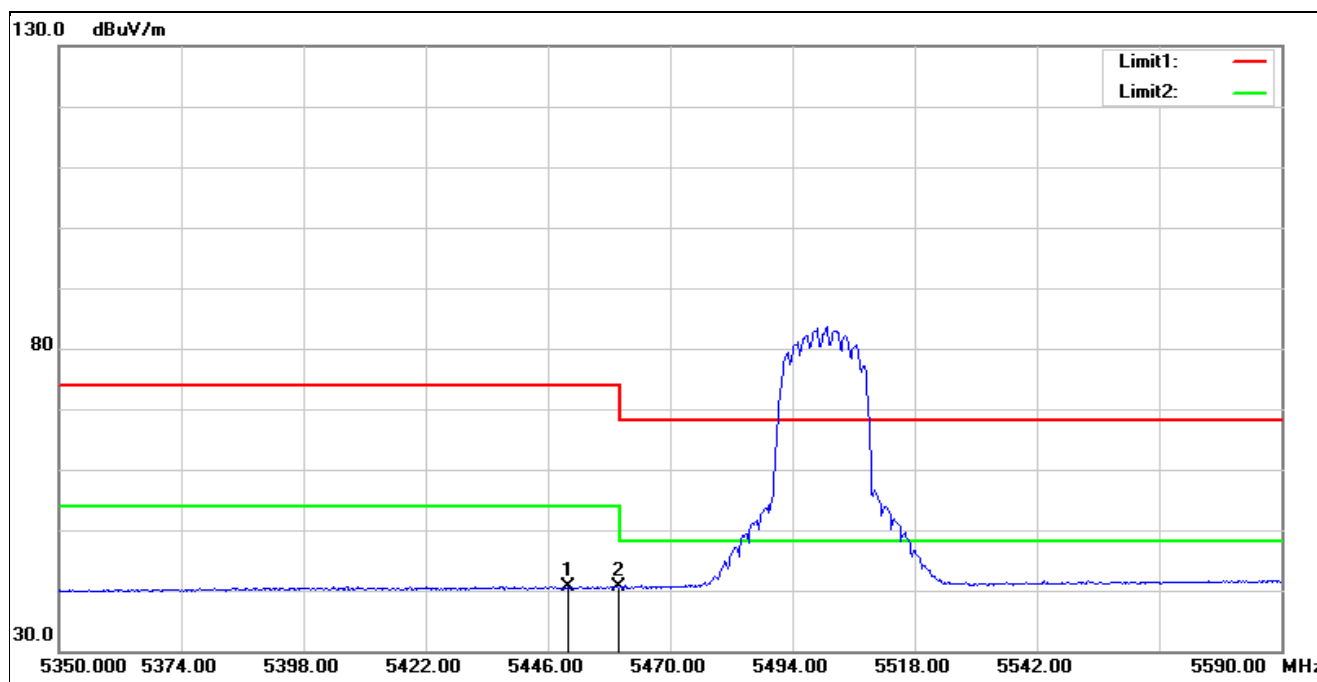


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5450.080	38.95	1.71	40.66	54.00	-13.34	AVG
2	5460.000	38.84	1.73	40.57	54.00	-13.43	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

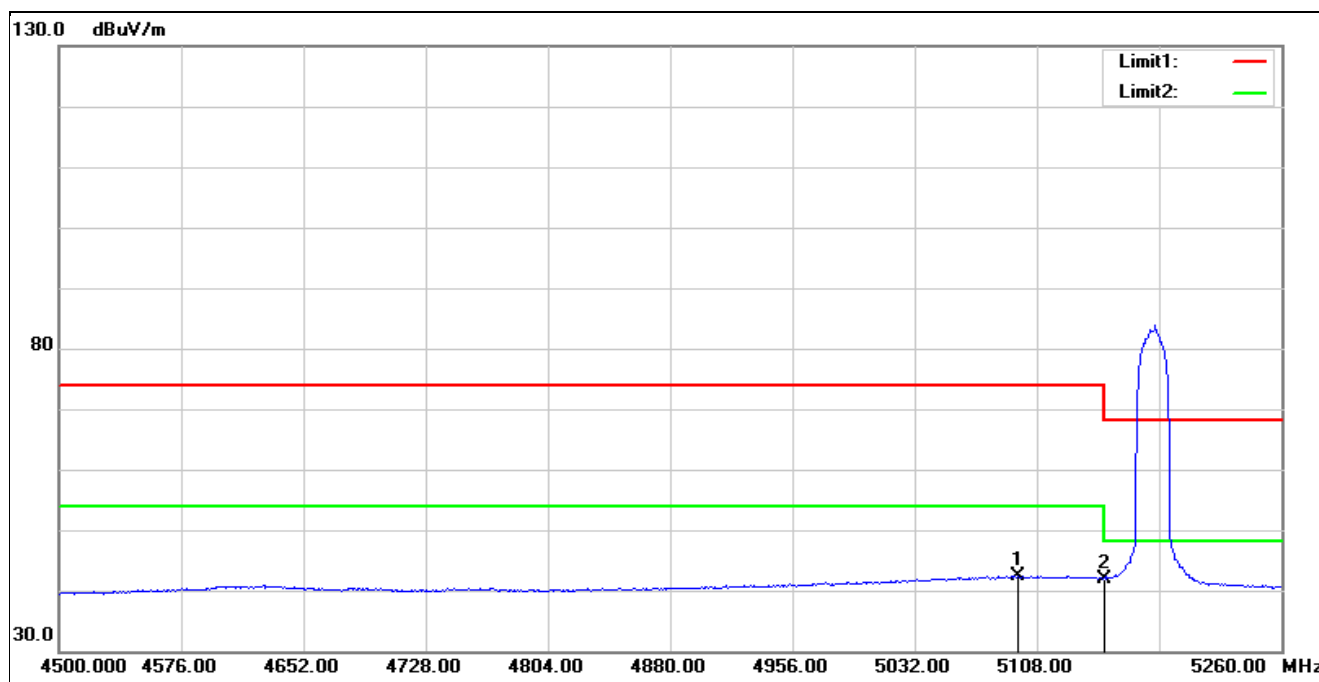


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5096.600	41.06	1.34	42.40	54.00	-11.60	AVG
2	5150.000	40.57	1.42	41.99	54.00	-12.01	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

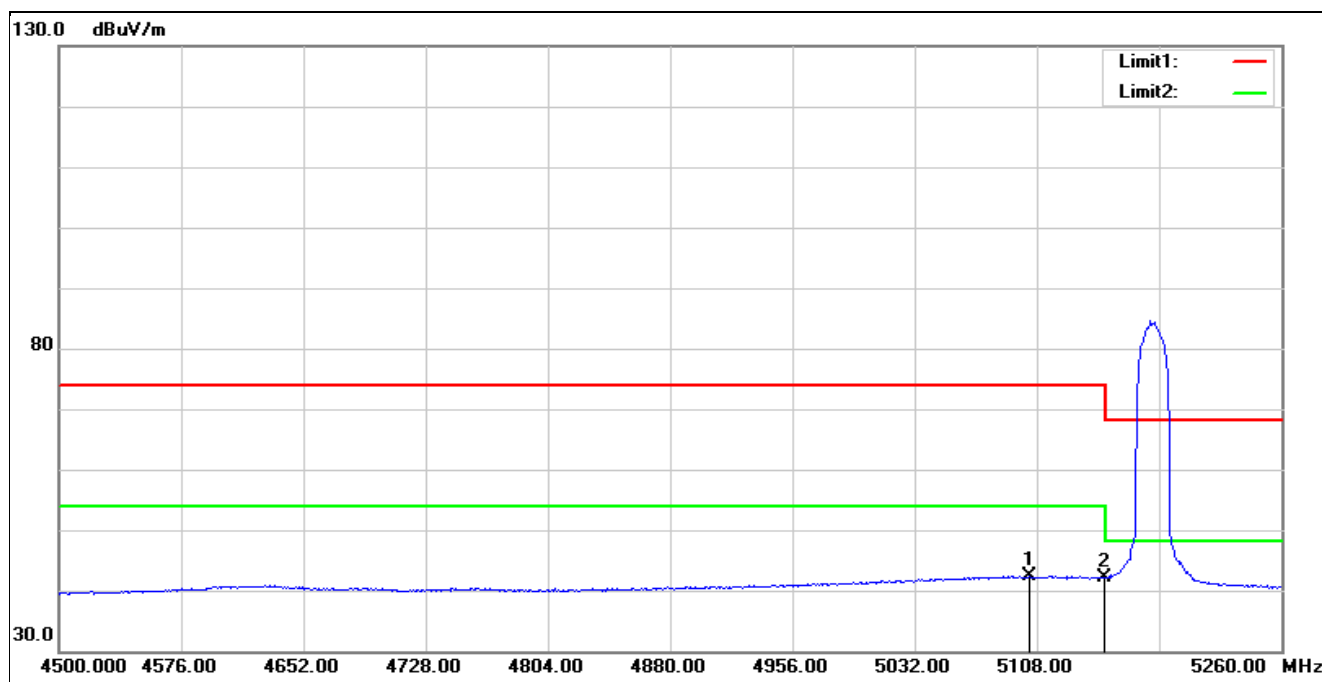


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5103.440	41.02	1.35	42.37	54.00	-11.63	AVG
2	5150.000	40.70	1.42	42.12	54.00	-11.88	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

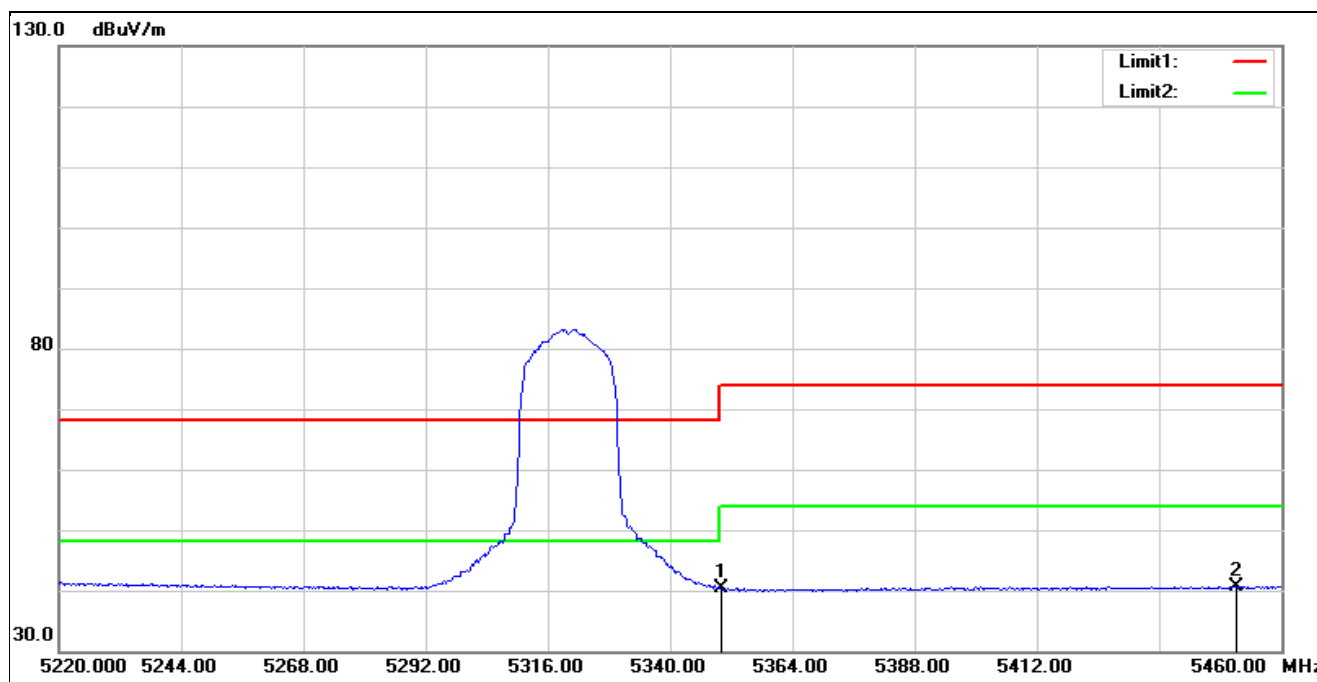


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.23	1.08	40.31	54.00	-13.69	AVG
2*	5451.120	39.01	1.71	40.72	54.00	-13.28	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

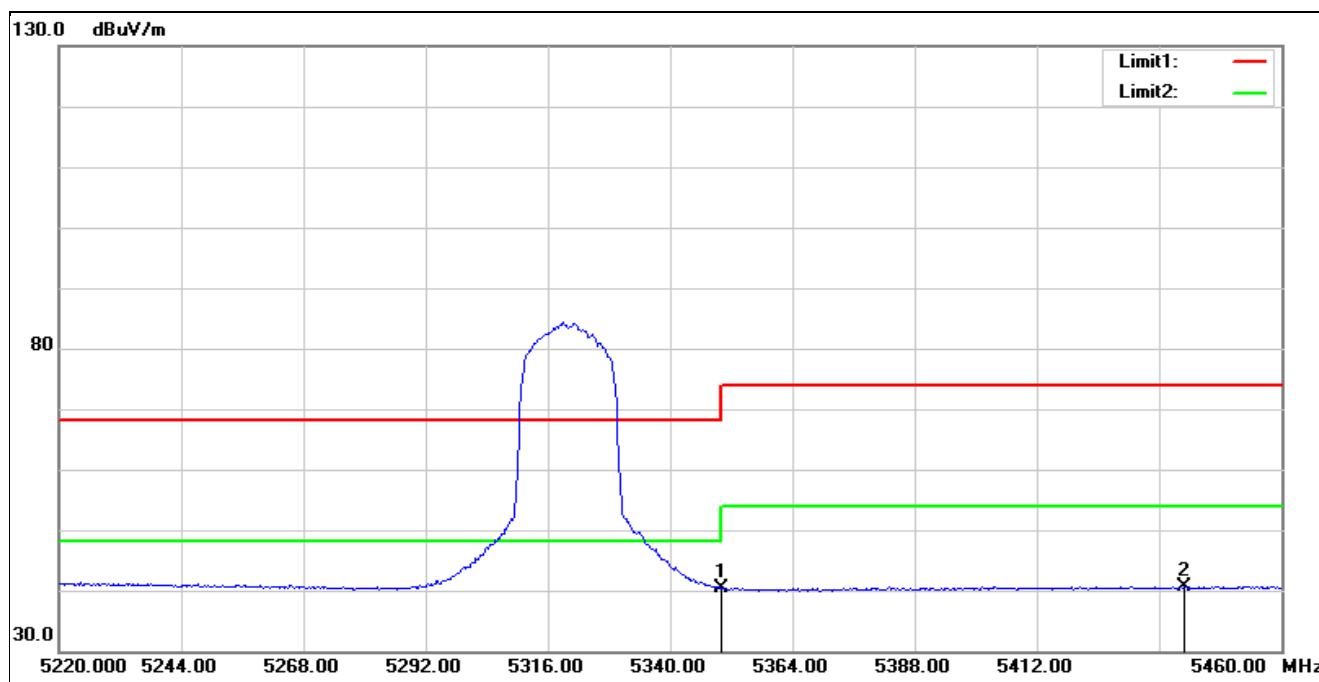


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.32	1.08	40.40	54.00	-13.60	AVG
2*	5441.040	39.06	1.68	40.74	54.00	-13.26	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

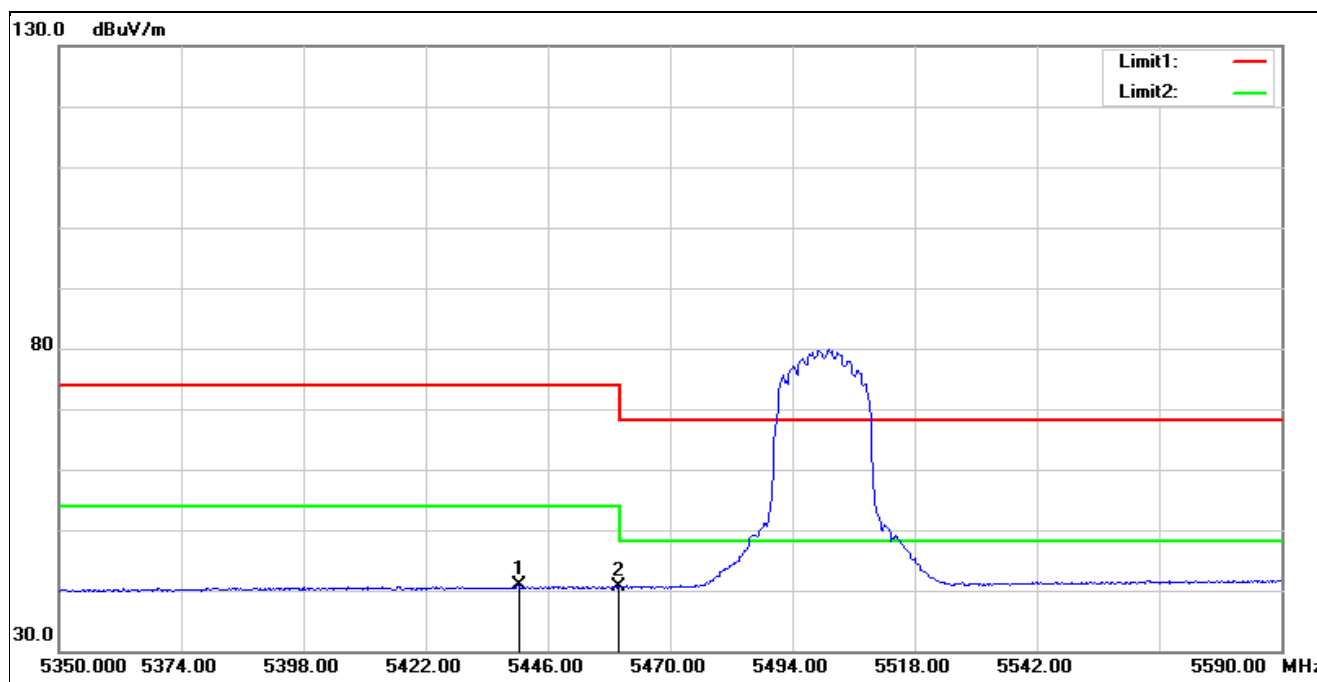


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5440.240	39.28	1.68	40.96	54.00	-13.04	AVG
2	5460.000	39.00	1.73	40.73	54.00	-13.27	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

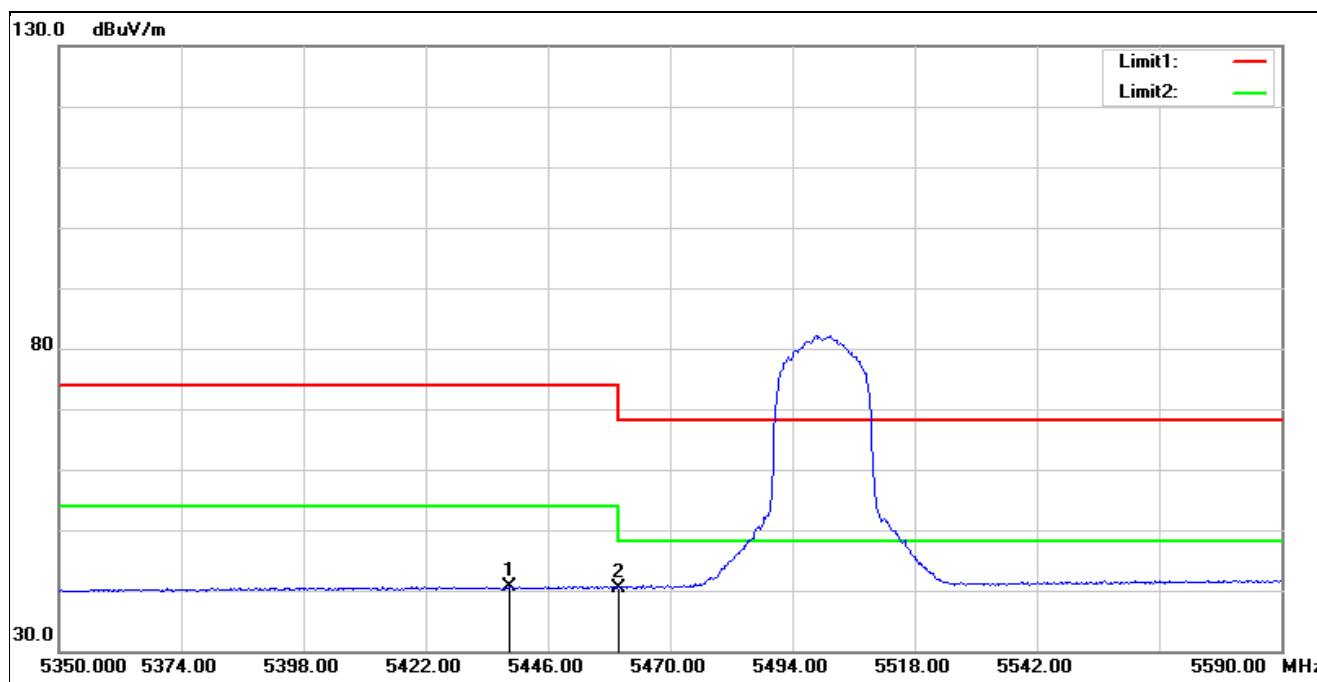


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5438.560	39.03	1.68	40.71	54.00	-13.29	AVG
2	5460.000	38.77	1.73	40.50	54.00	-13.50	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

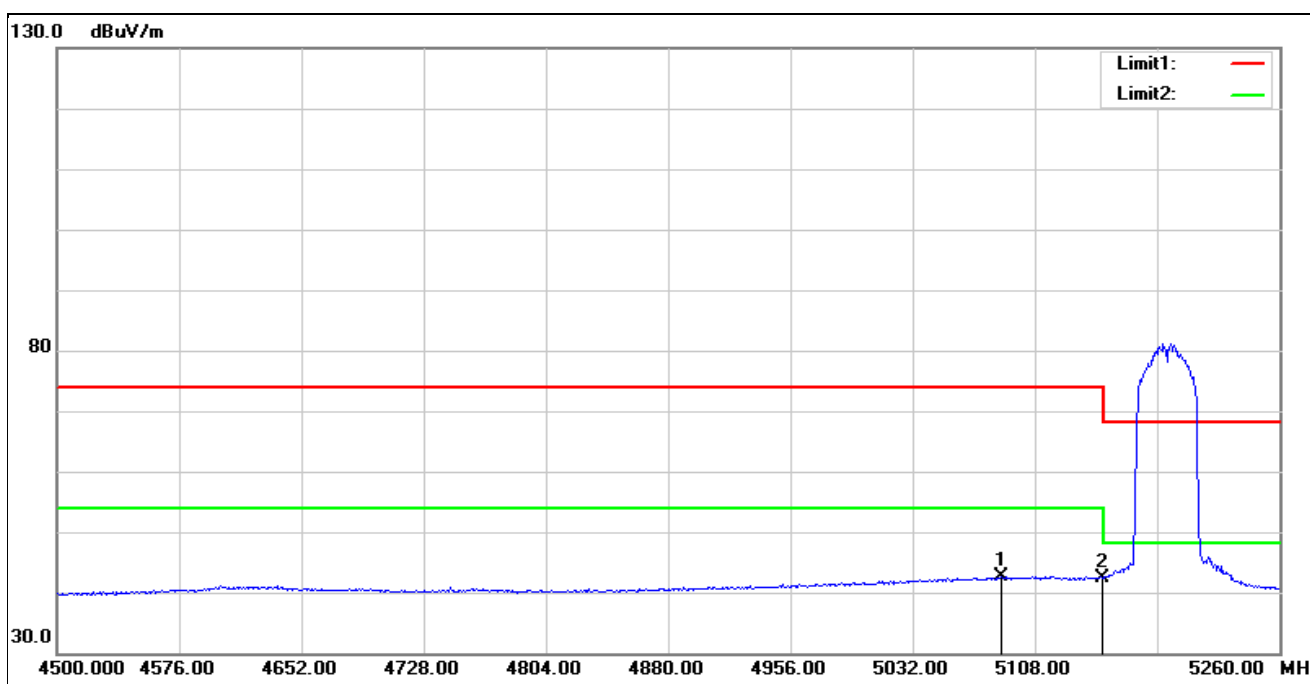


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5087.480	41.42	1.28	42.70	54.00	-11.30	AVG
2	5150.000	41.05	1.42	42.47	54.00	-11.53	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

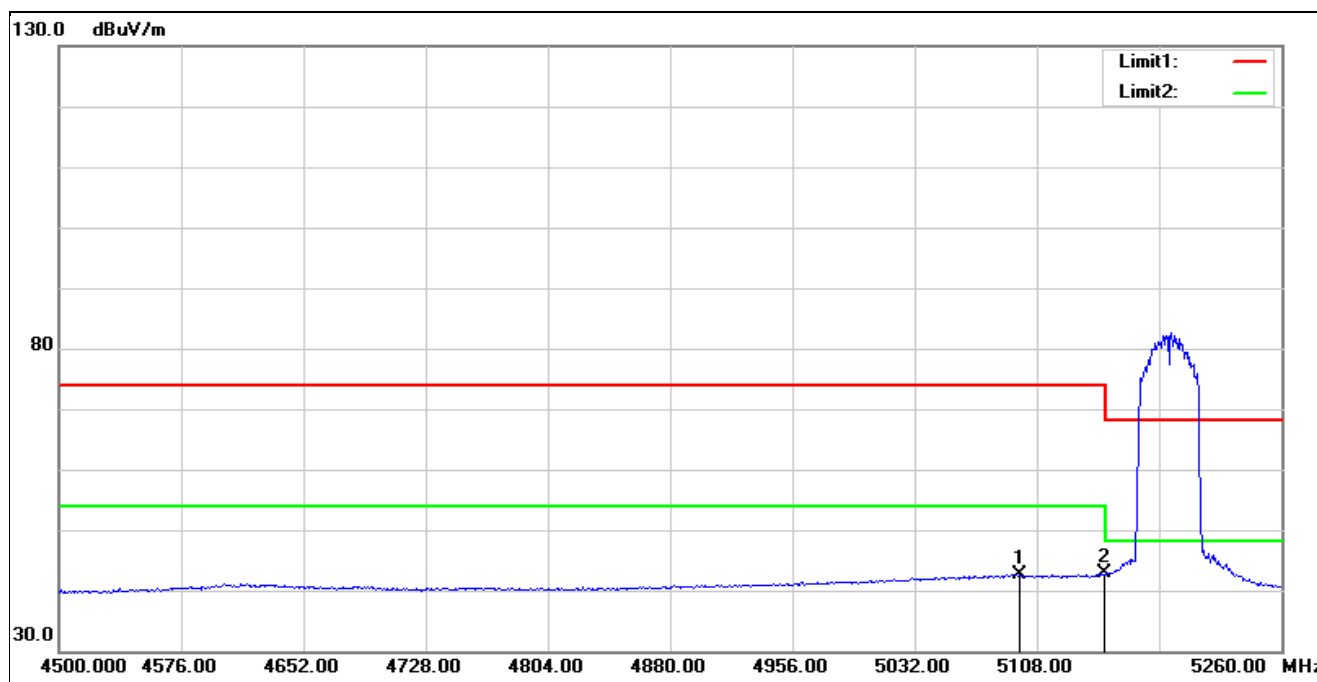


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5097.360	41.35	1.34	42.69	54.00	-11.31	AVG
2*	5150.000	41.40	1.42	42.82	54.00	-11.18	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

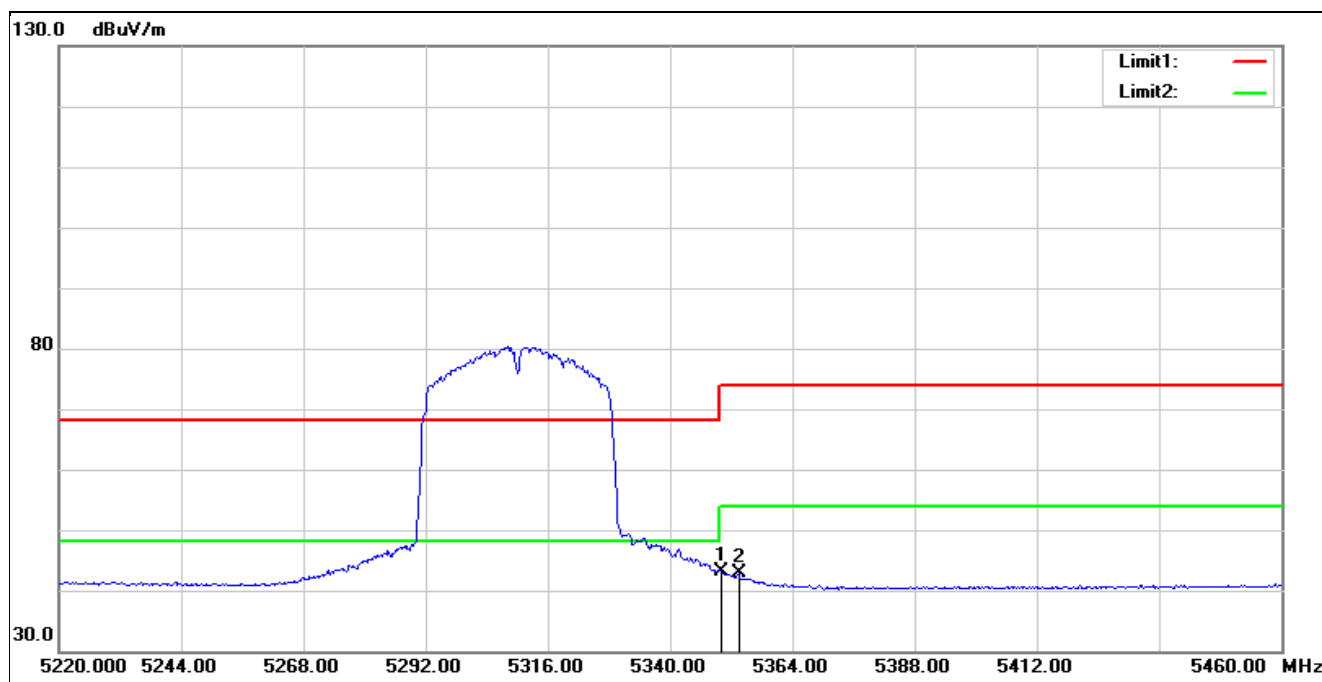


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.98	1.08	43.06	54.00	-10.94	AVG
2	5353.440	41.65	1.11	42.76	54.00	-11.24	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

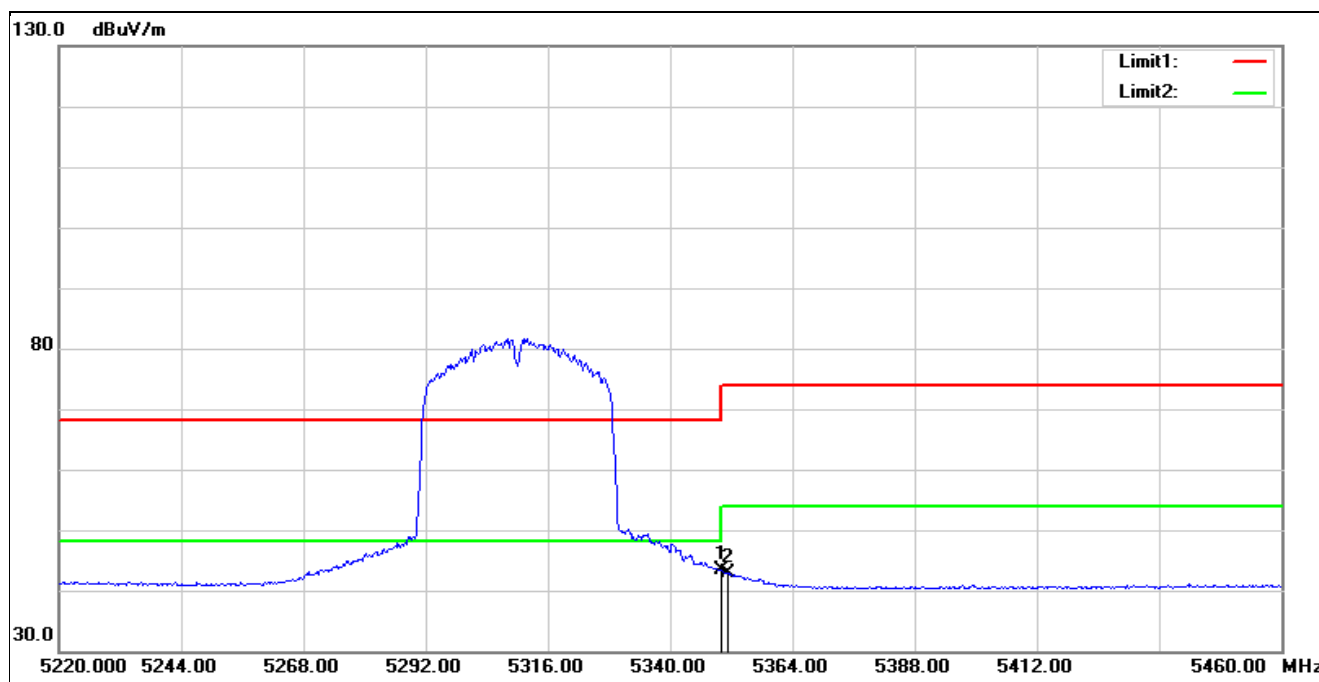


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	42.41	1.08	43.49	54.00	-10.51	AVG
2	5351.280	41.81	1.09	42.90	54.00	-11.10	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

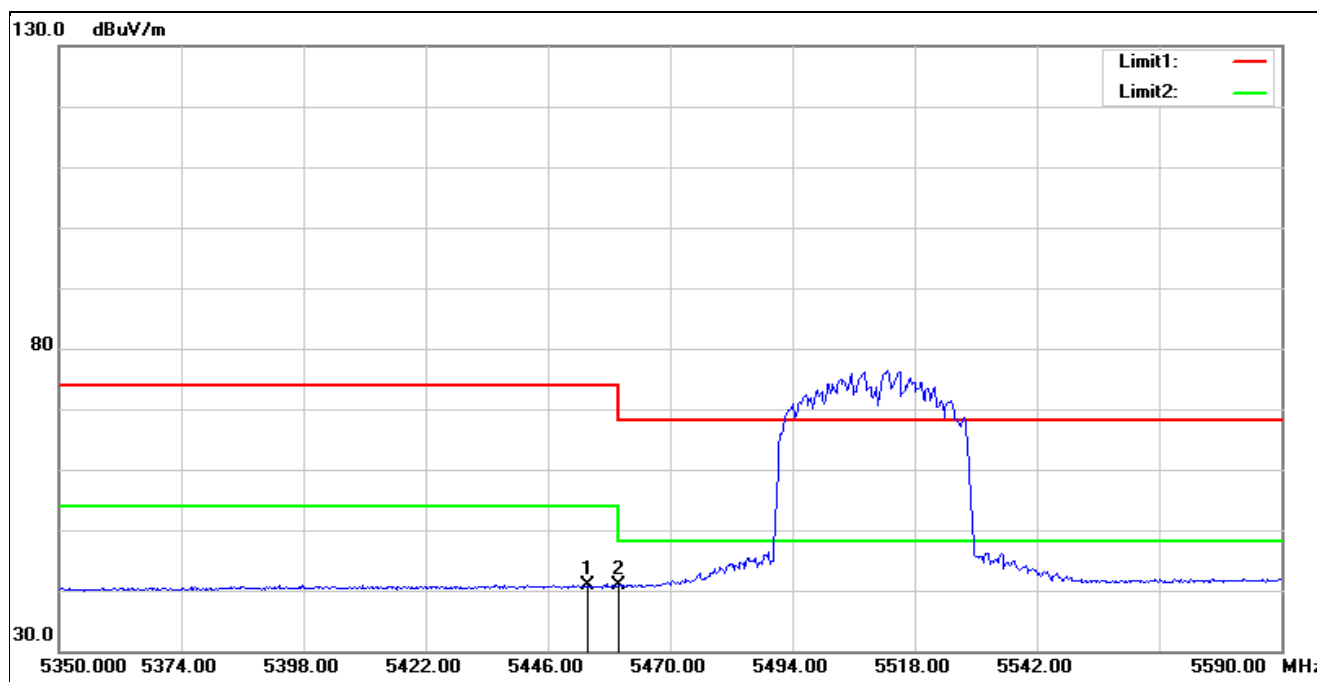

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.920	39.22	1.72	40.94	54.00	-13.06	AVG
2	5460.000	39.05	1.73	40.78	54.00	-13.22	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

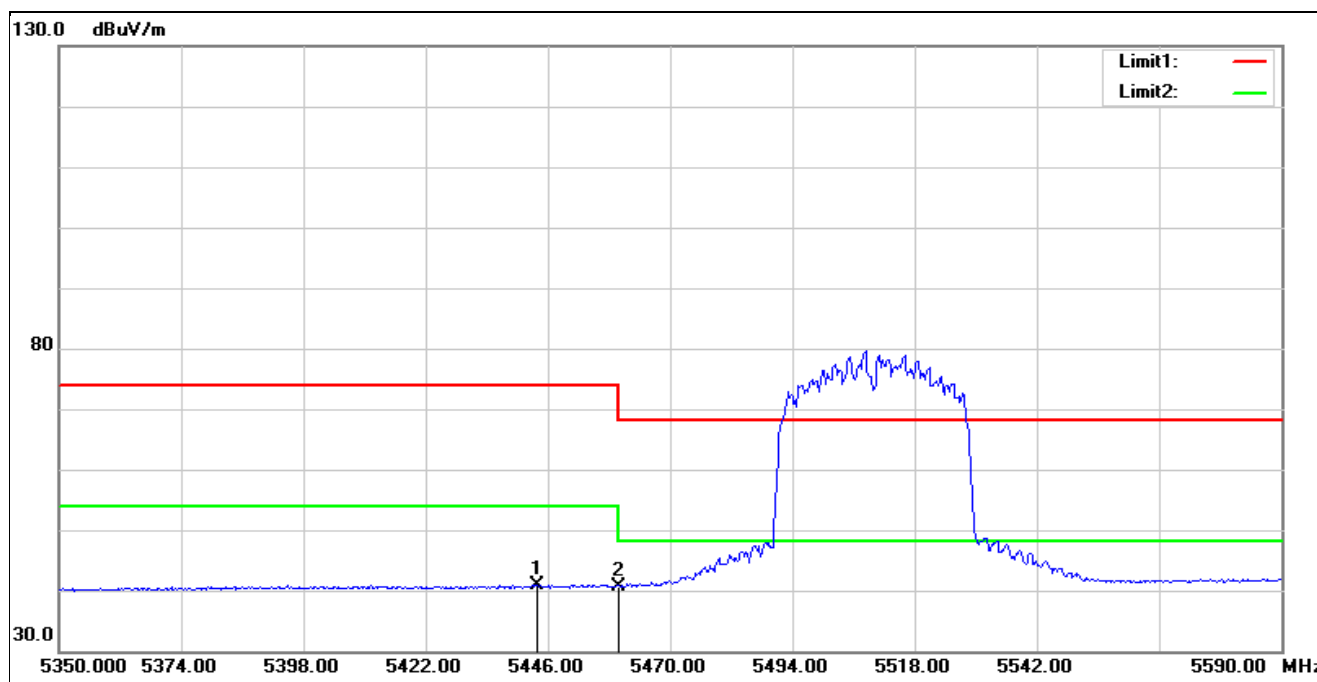


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5443.840	39.21	1.70	40.91	54.00	-13.09	AVG
2	5460.000	38.91	1.73	40.64	54.00	-13.36	AVG

Antenna brand: ABRACON


Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

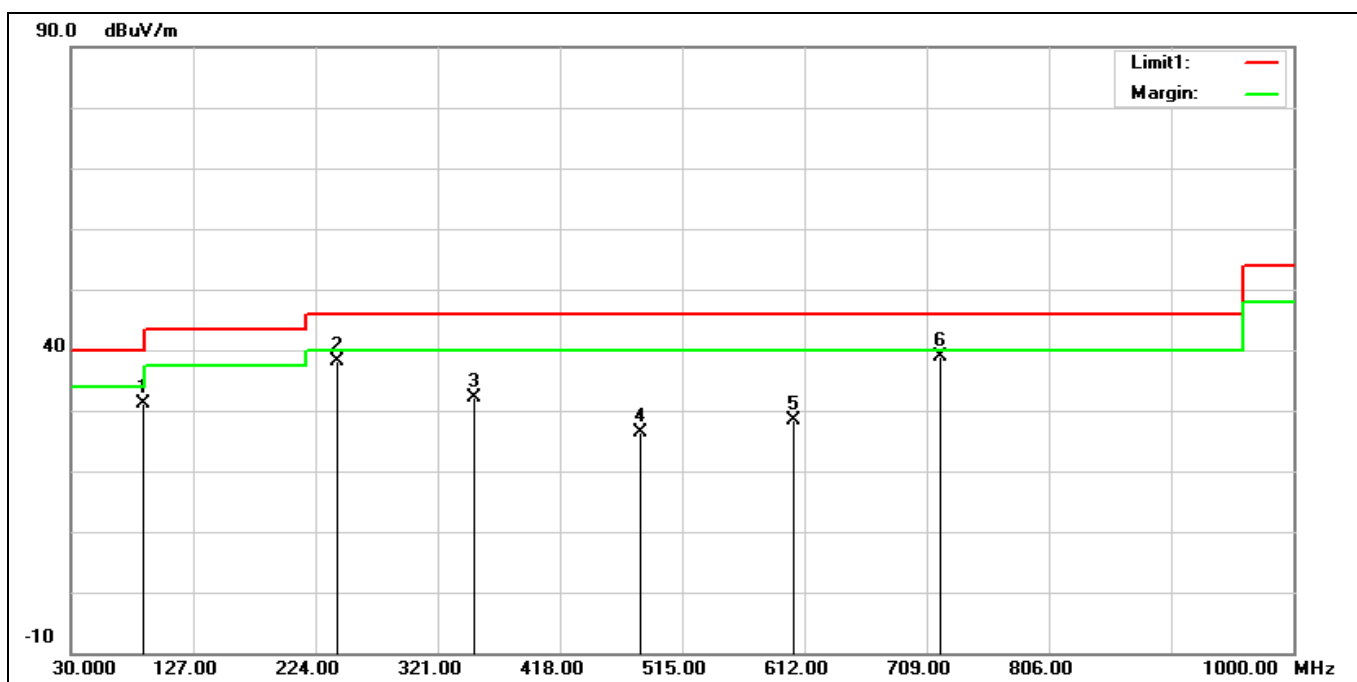

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	87.2300	44.25	-13.12	31.13	40.00	-8.87	QP
2	241.4600	45.72	-7.62	38.10	46.00	-7.90	QP
3	350.1000	36.88	-4.75	32.13	46.00	-13.87	QP
4	482.0200	28.56	-2.17	26.39	46.00	-19.61	QP
5	603.2700	28.10	0.23	28.33	46.00	-17.67	QP
6*	719.6700	36.86	2.09	38.95	46.00	-7.05	QP

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

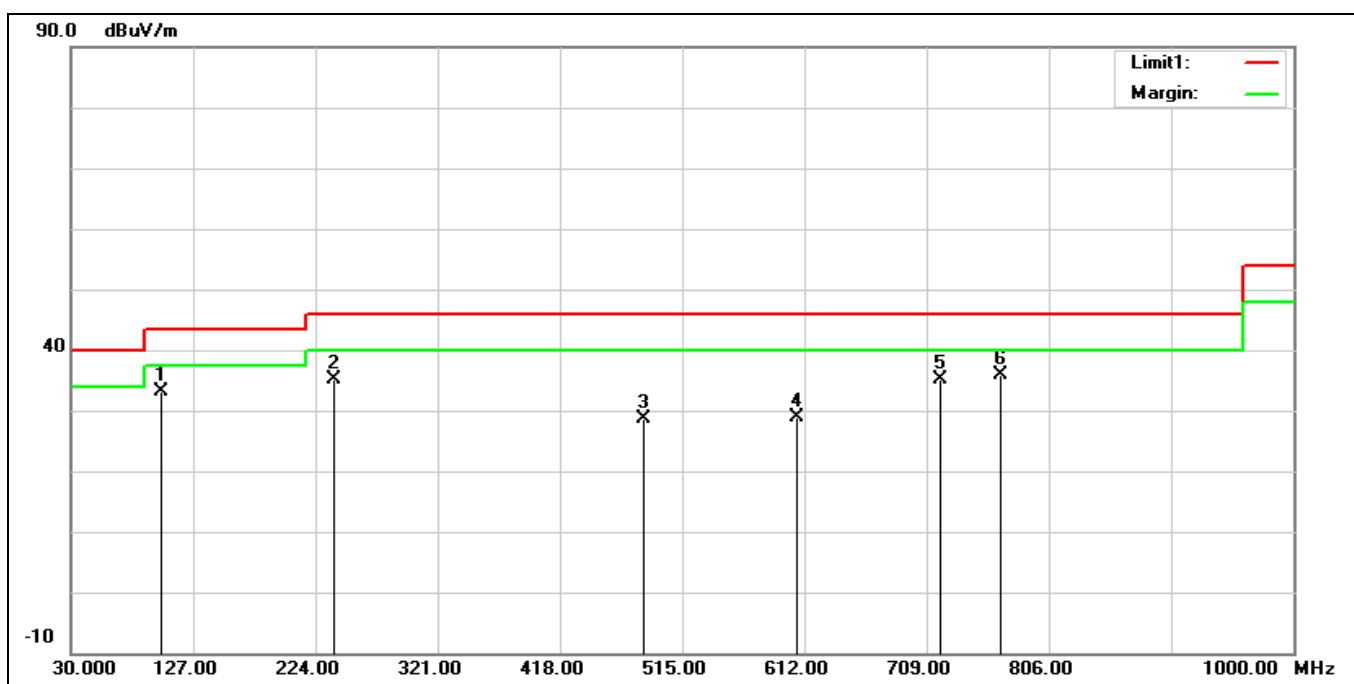


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	101.7800	45.23	-12.06	33.17	43.50	-10.33	QP
2	238.5500	42.78	-7.77	35.01	46.00	-10.99	QP
3	483.9600	30.89	-2.15	28.74	46.00	-17.26	QP
4	606.1800	28.73	0.25	28.98	46.00	-17.02	QP
5	719.6700	32.96	2.09	35.05	46.00	-10.95	QP
6*	767.2000	32.87	3.13	36.00	46.00	-10.00	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

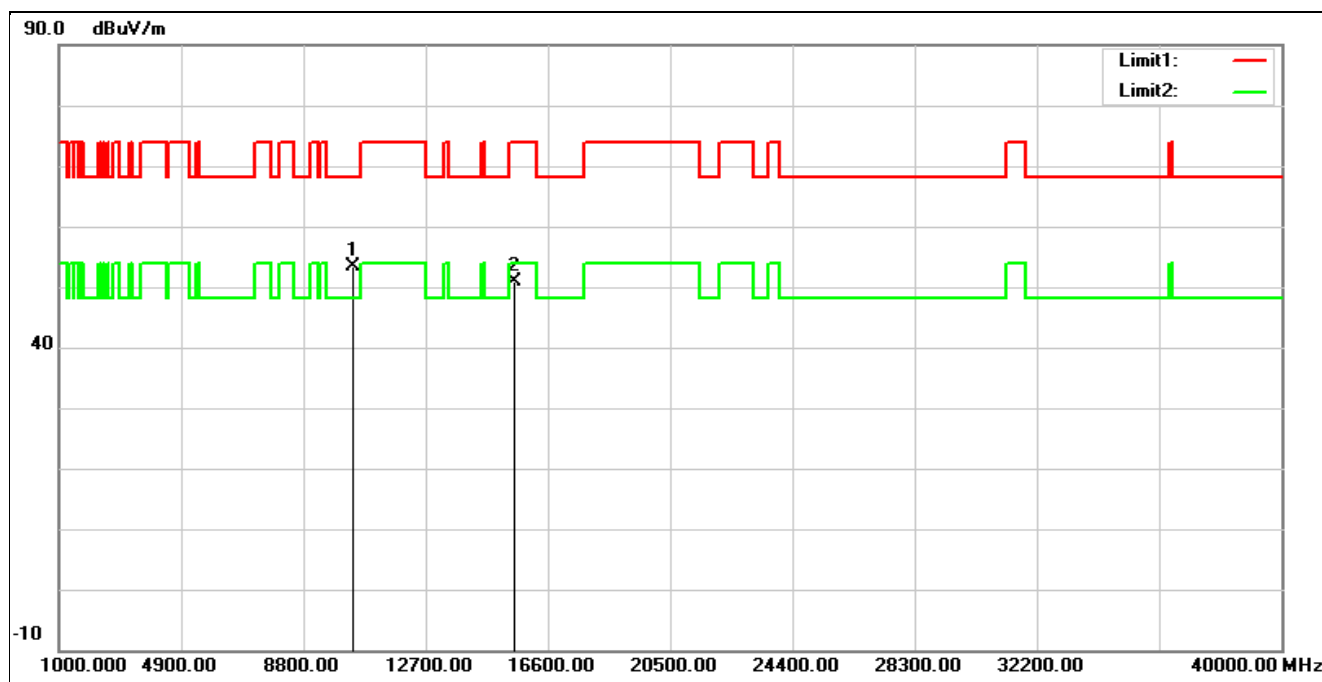


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	39.38	13.99	53.37	68.20	-14.83	peak
2	15540.000	33.59	17.31	50.90	74.00	-23.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

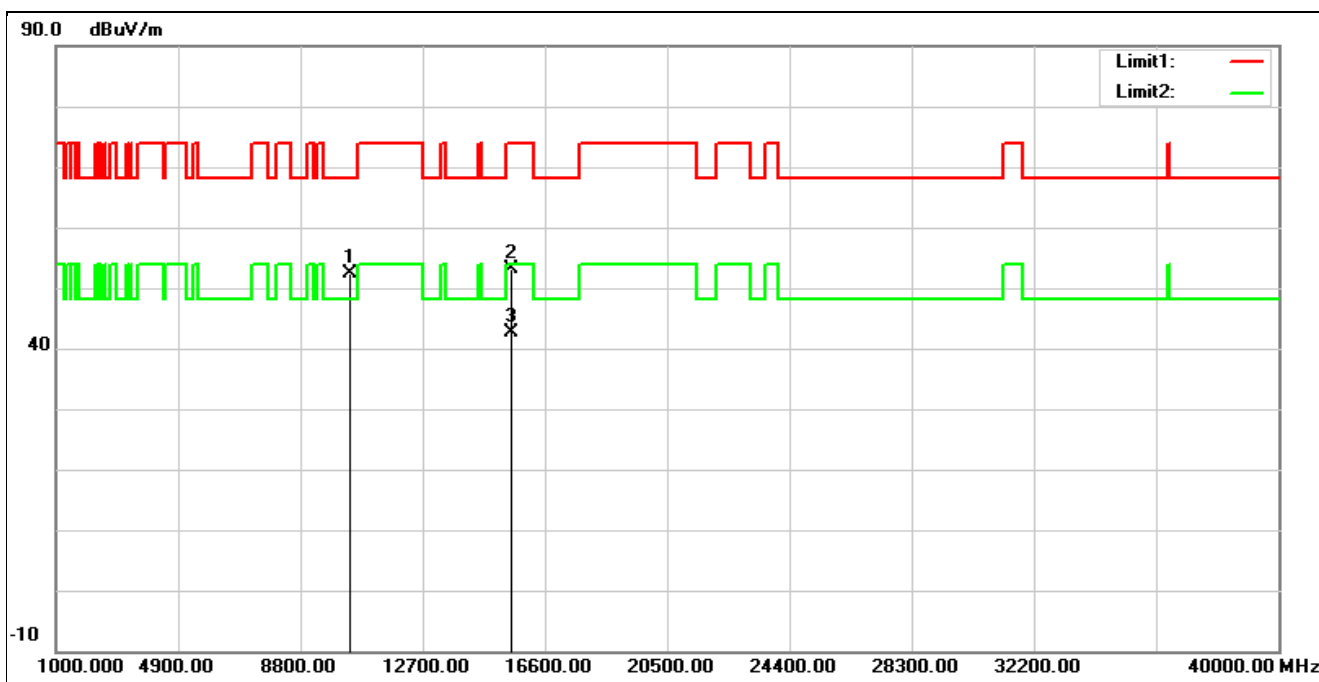


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	38.27	13.99	52.26	68.20	-15.94	peak
2	15540.000	35.71	17.31	53.02	74.00	-20.98	peak
3*	15540.000	25.27	17.31	42.58	54.00	-11.42	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5200 MHz		
Remark:			

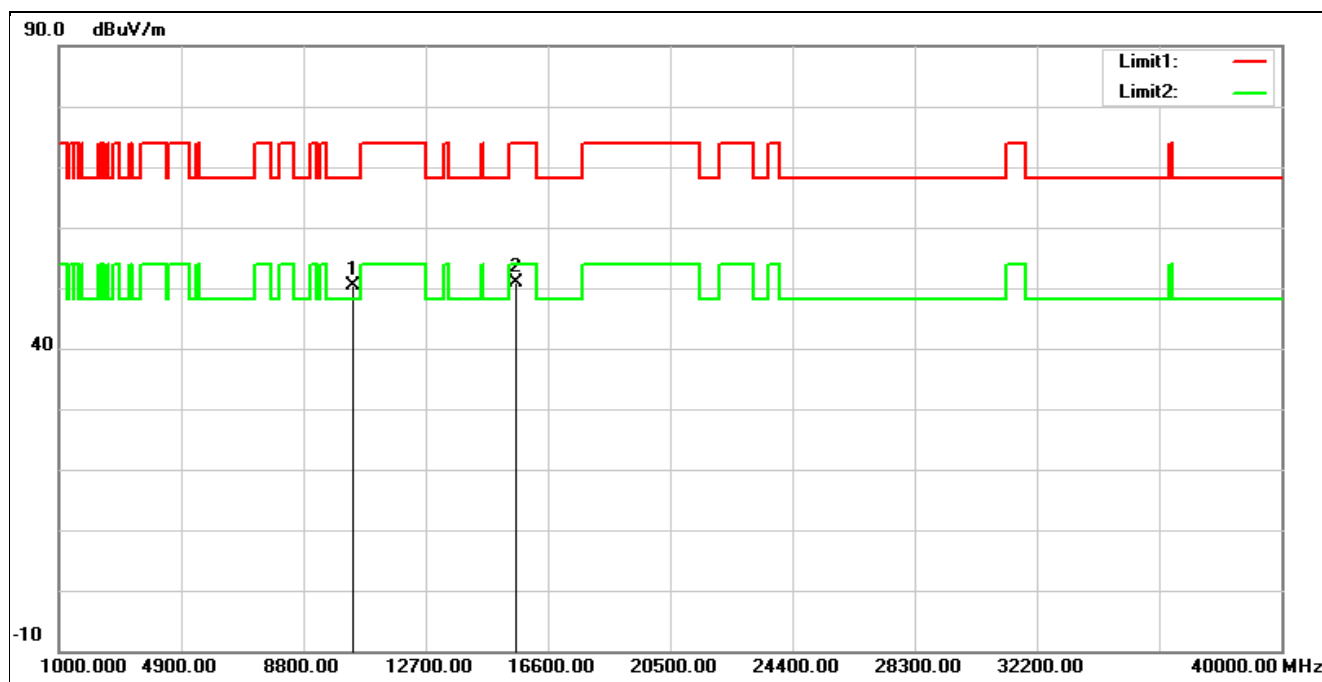


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	36.38	14.10	50.48	68.20	-17.72	peak
2	15600.000	33.81	17.01	50.82	74.00	-23.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5200 MHz		
Remark:			

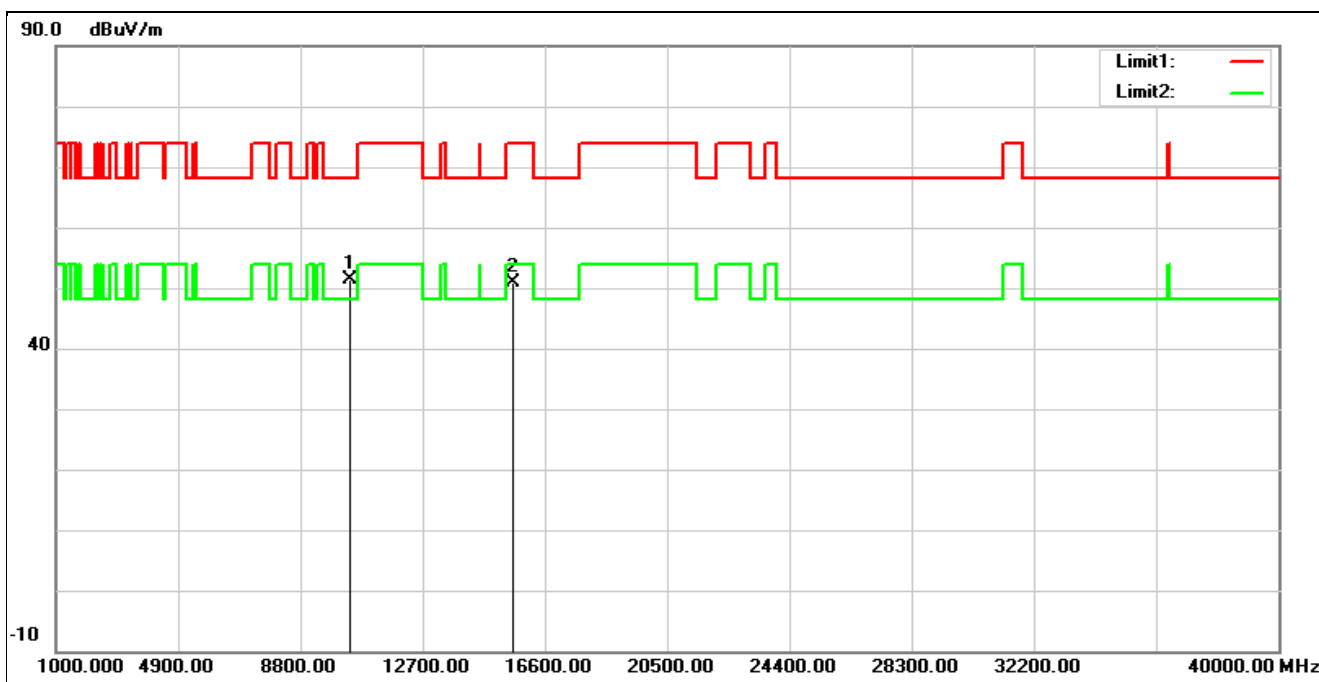


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	37.28	14.10	51.38	68.20	-16.82	peak
2	15600.000	33.96	17.01	50.97	74.00	-23.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

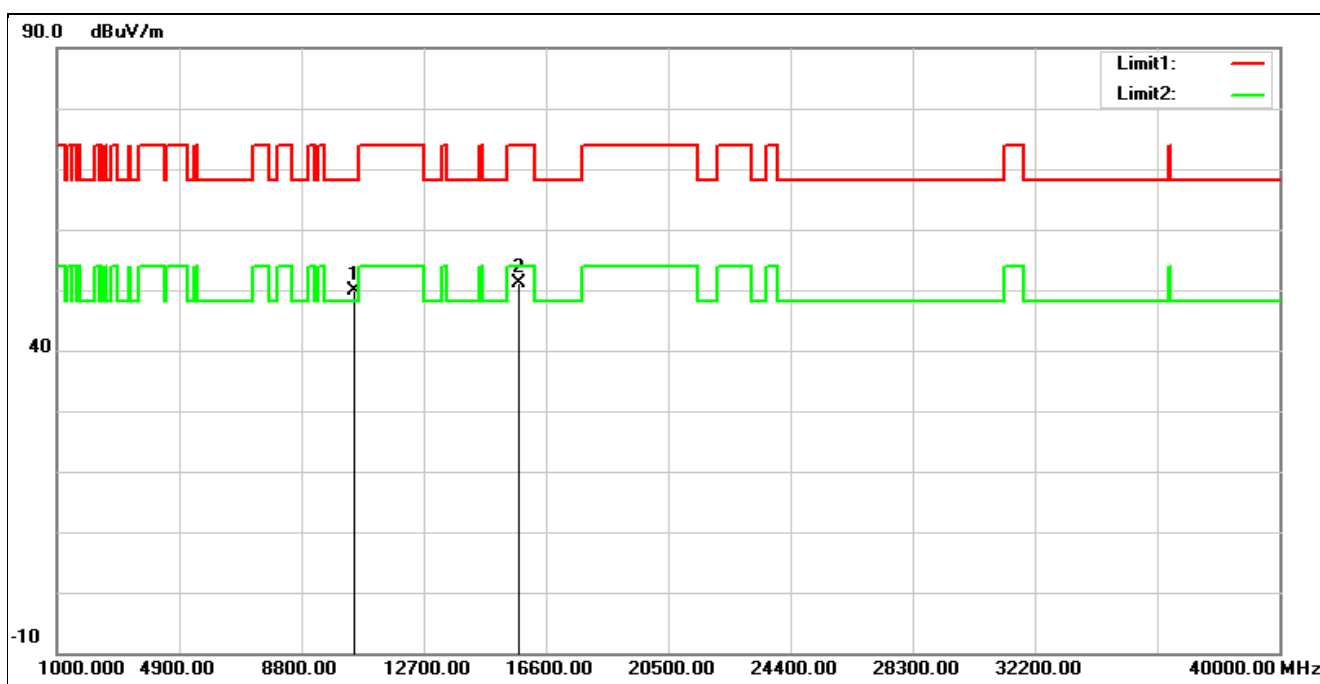


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	35.23	14.54	49.77	68.20	-18.43	peak
2	15720.000	33.68	17.34	51.02	74.00	-22.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5240 MHz		
Remark:			

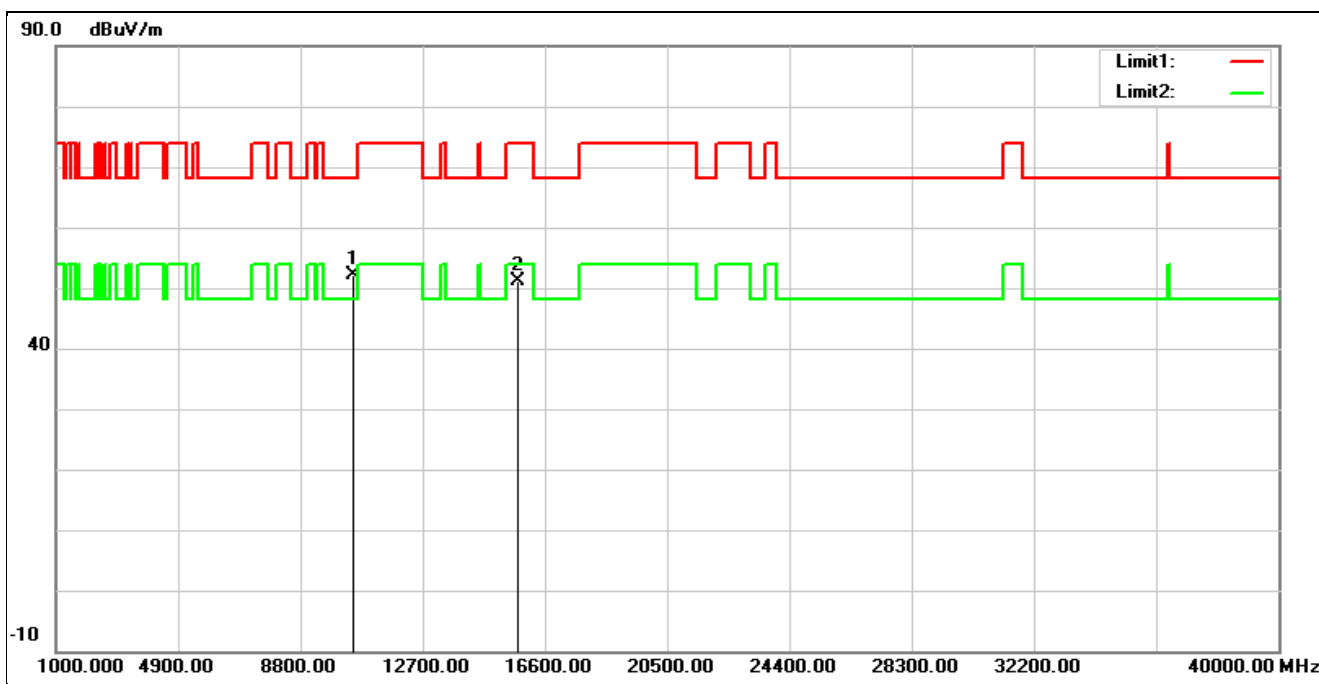


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	37.69	14.54	52.23	68.20	-15.97	peak
2	15720.000	33.73	17.34	51.07	74.00	-22.93	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5260 MHz		
Remark:			

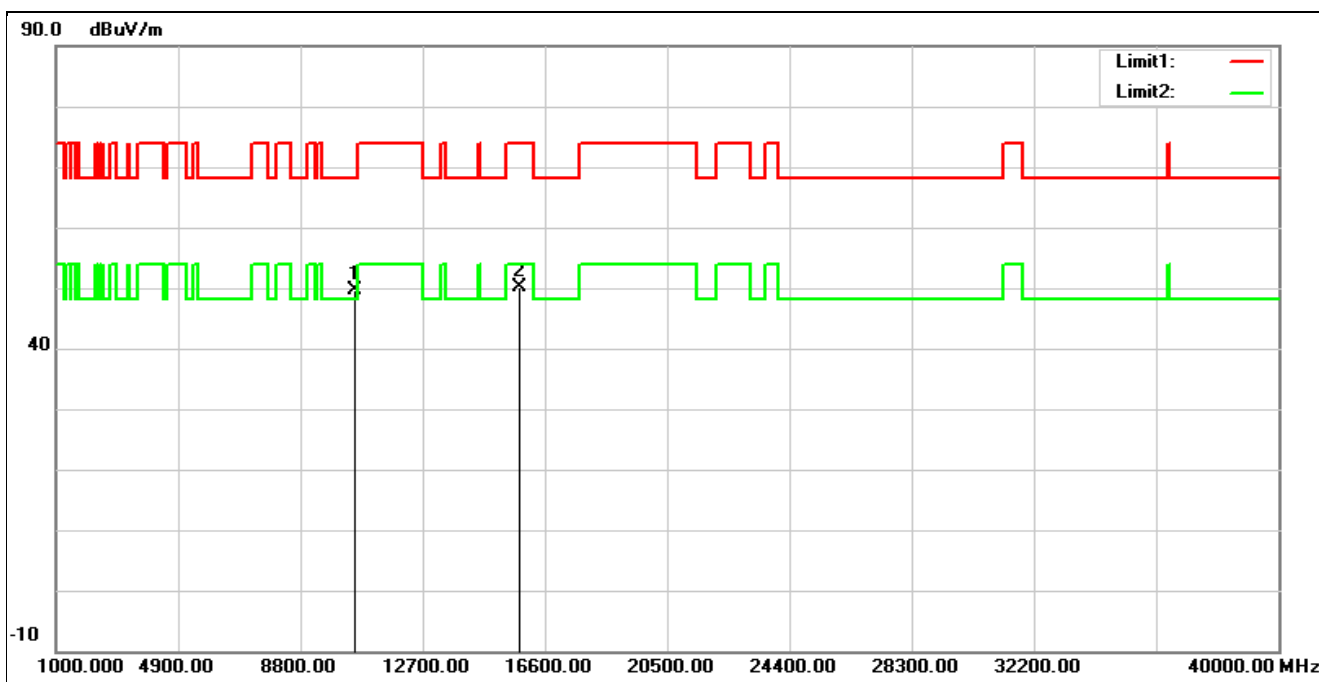


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	34.91	14.60	49.51	68.20	-18.69	peak
2	15780.000	33.14	17.10	50.24	74.00	-23.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5260 MHz		
Remark:			

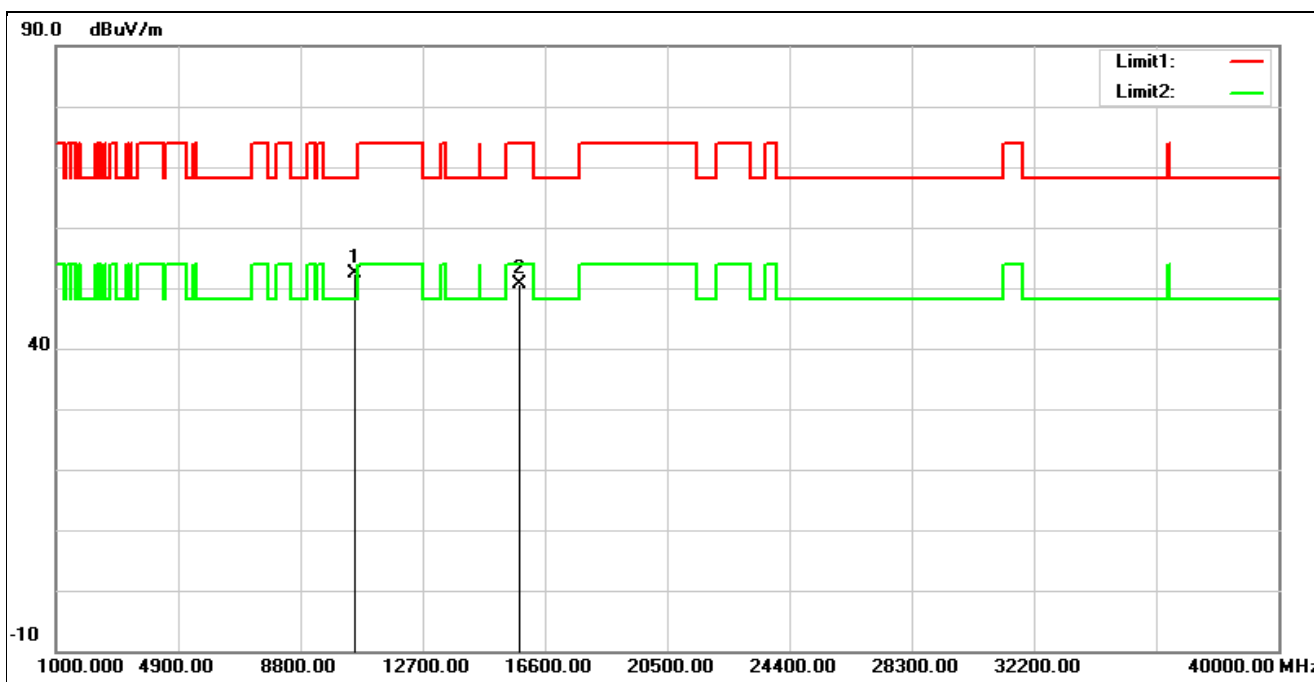


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	37.66	14.60	52.26	68.20	-15.94	peak
2	15780.000	33.44	17.10	50.54	74.00	-23.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5280 MHz		
Remark:			

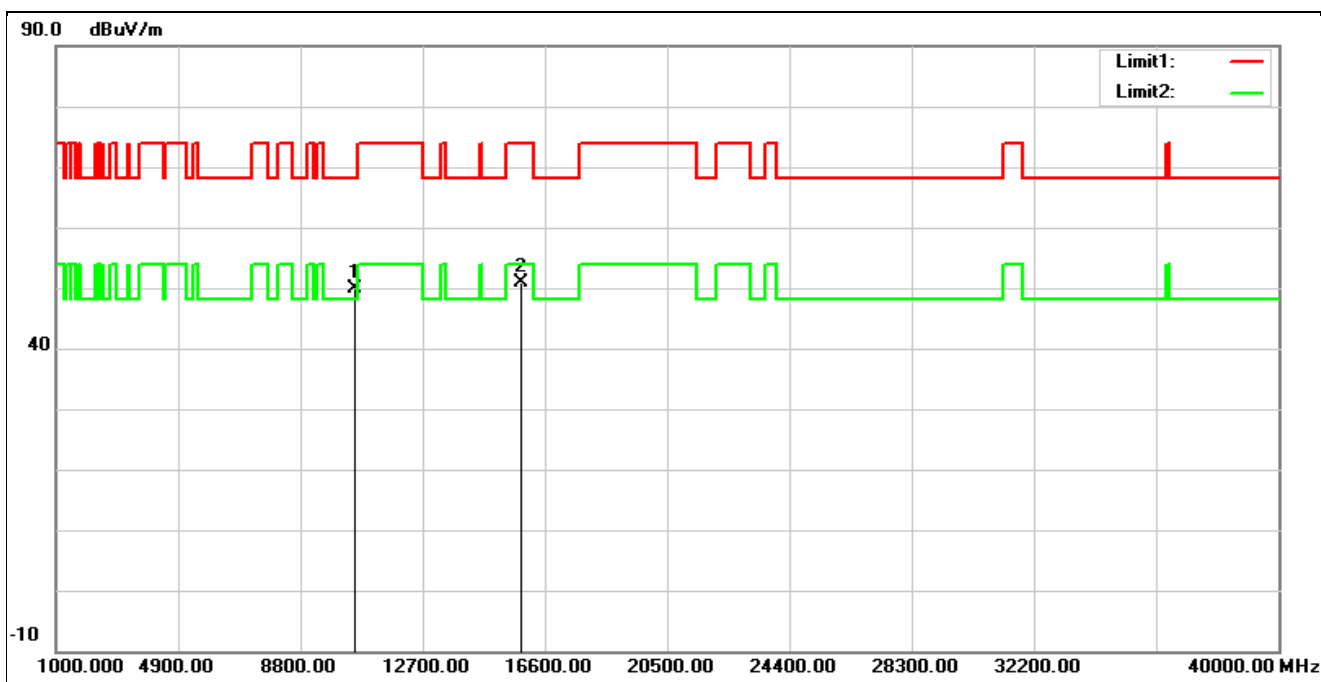


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.41	14.48	49.89	68.20	-18.31	peak
2	15840.000	34.02	16.90	50.92	74.00	-23.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

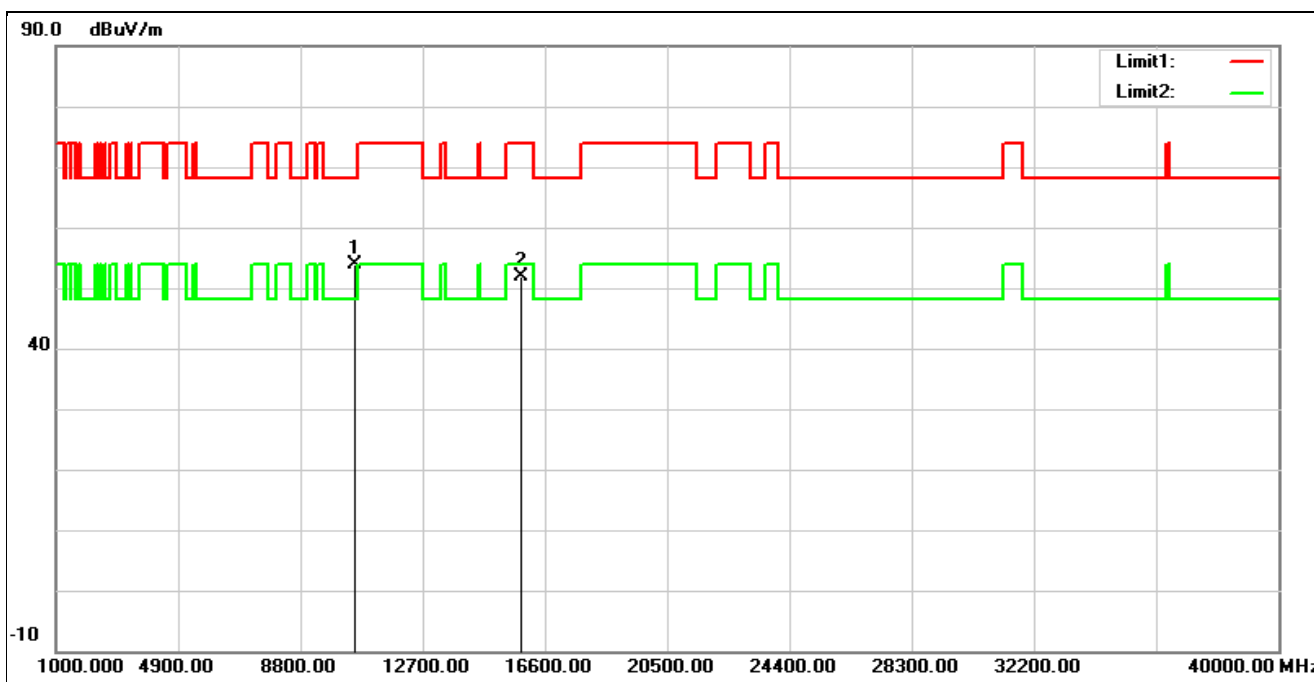


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	39.32	14.48	53.80	68.20	-14.40	peak
2	15840.000	34.89	16.90	51.79	74.00	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

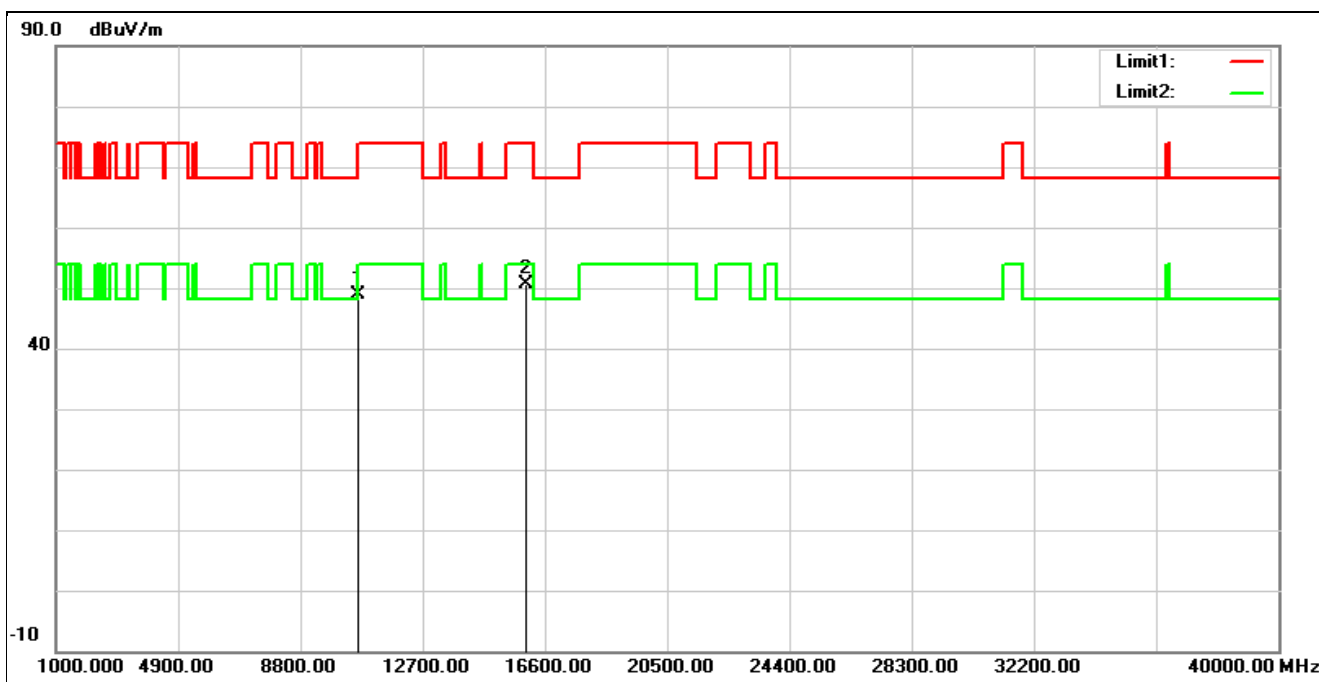


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.56	14.41	48.97	74.00	-25.03	peak
2*	15960.000	33.98	16.55	50.53	74.00	-23.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

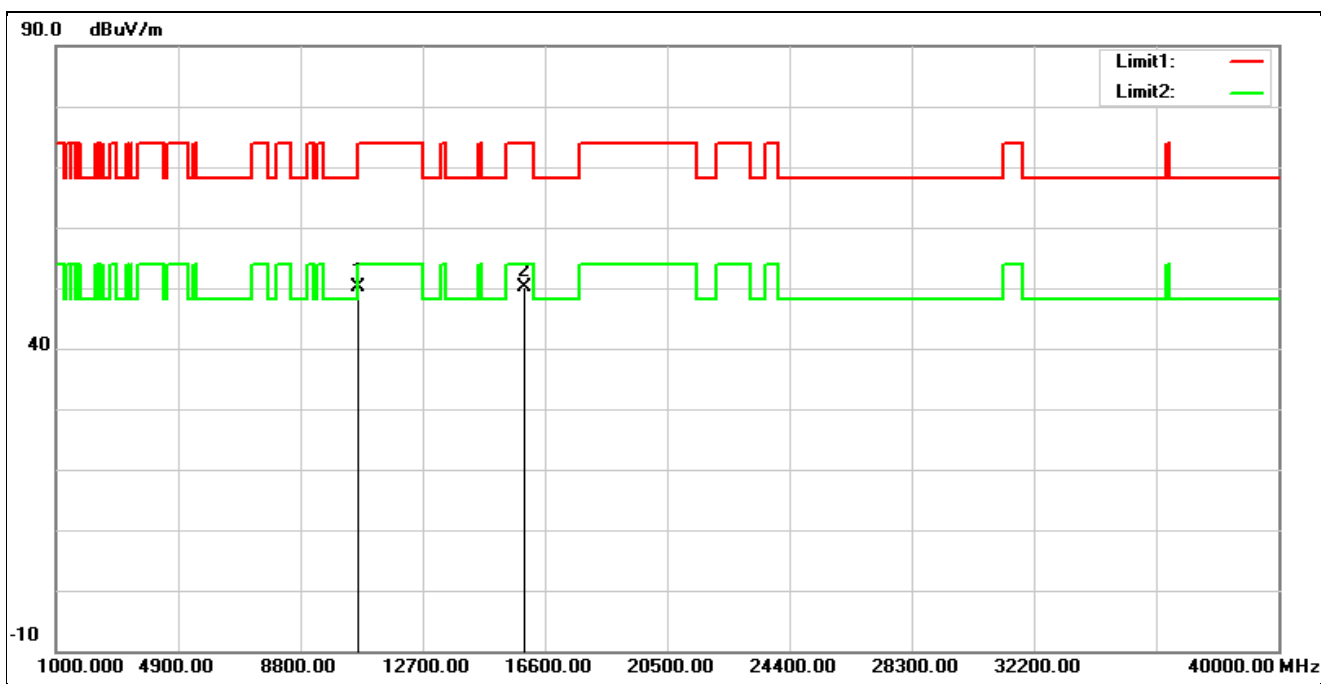


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.73	14.41	50.14	74.00	-23.86	peak
2*	15960.000	33.65	16.55	50.20	74.00	-23.80	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

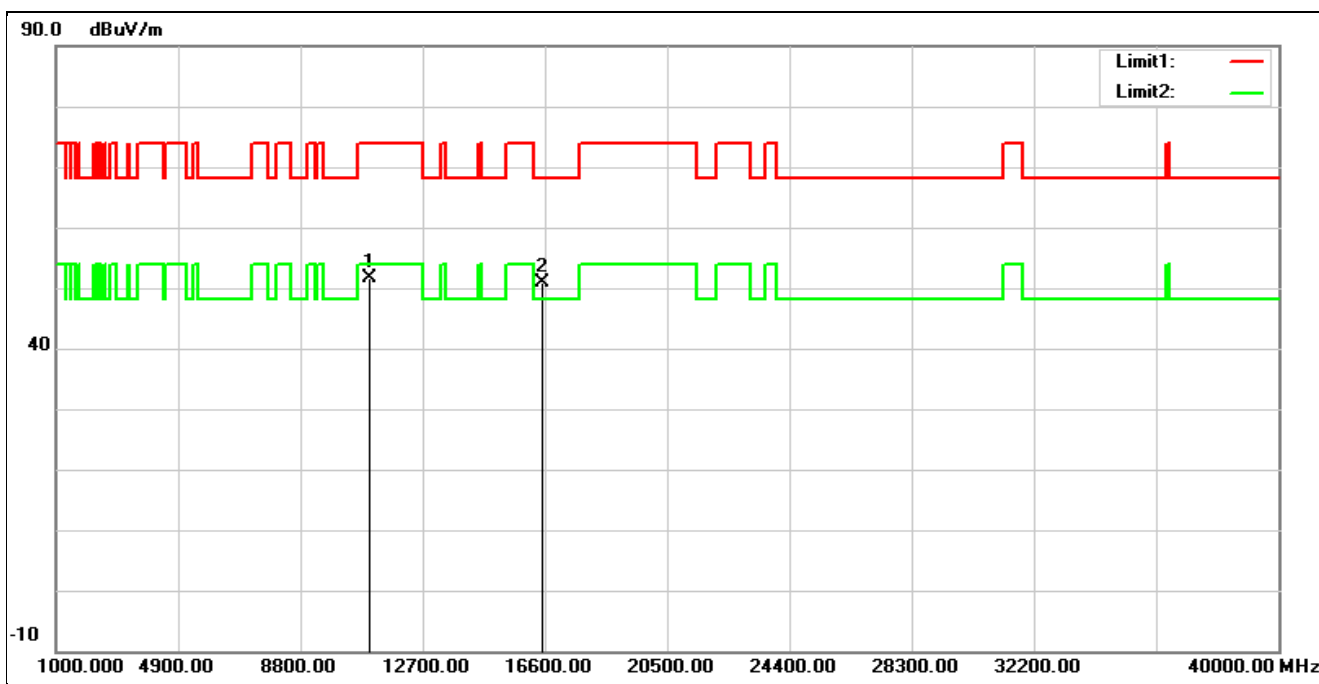


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.89	14.73	51.62	74.00	-22.38	peak
2*	16500.000	33.00	17.77	50.77	68.20	-17.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

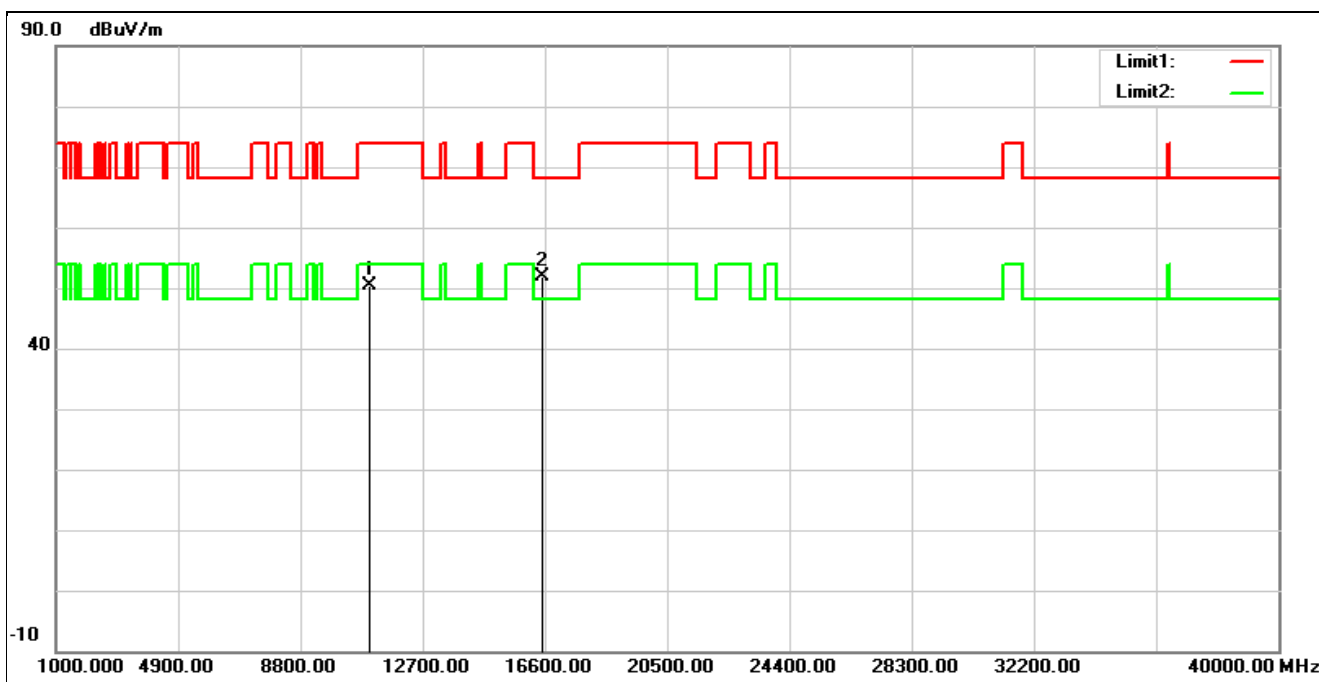


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.64	14.73	50.37	74.00	-23.63	peak
2*	16500.000	34.19	17.77	51.96	68.20	-16.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

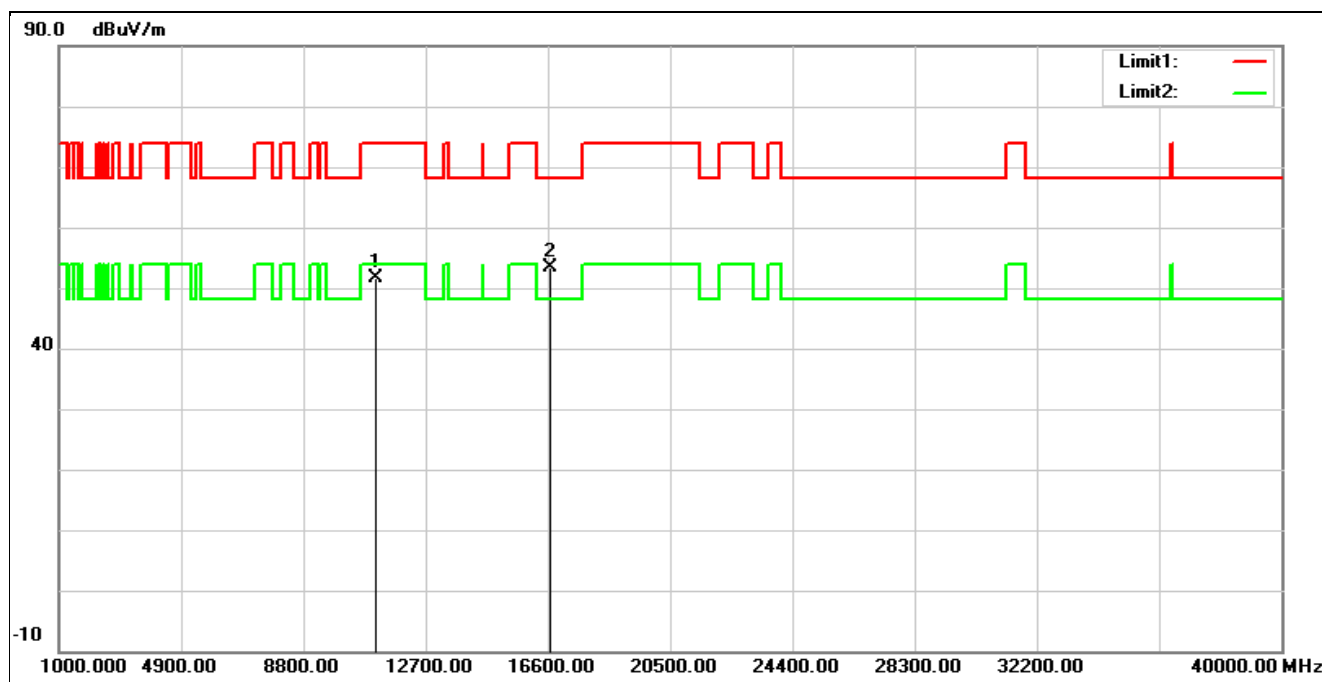


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.93	14.79	51.72	74.00	-22.28	peak
2*	16680.000	34.76	18.61	53.37	68.20	-14.83	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5560 MHz		
Remark:			

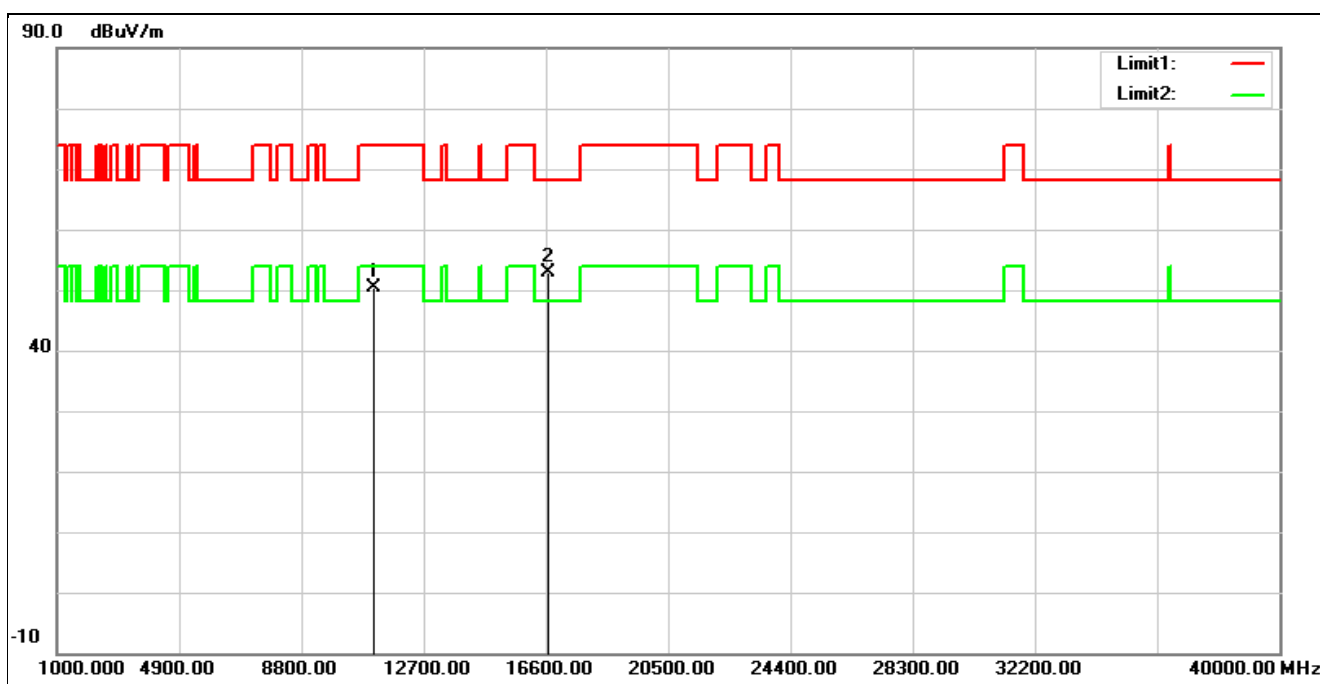


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.70	14.79	50.49	74.00	-23.51	peak
2*	16680.000	34.17	18.61	52.78	68.20	-15.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

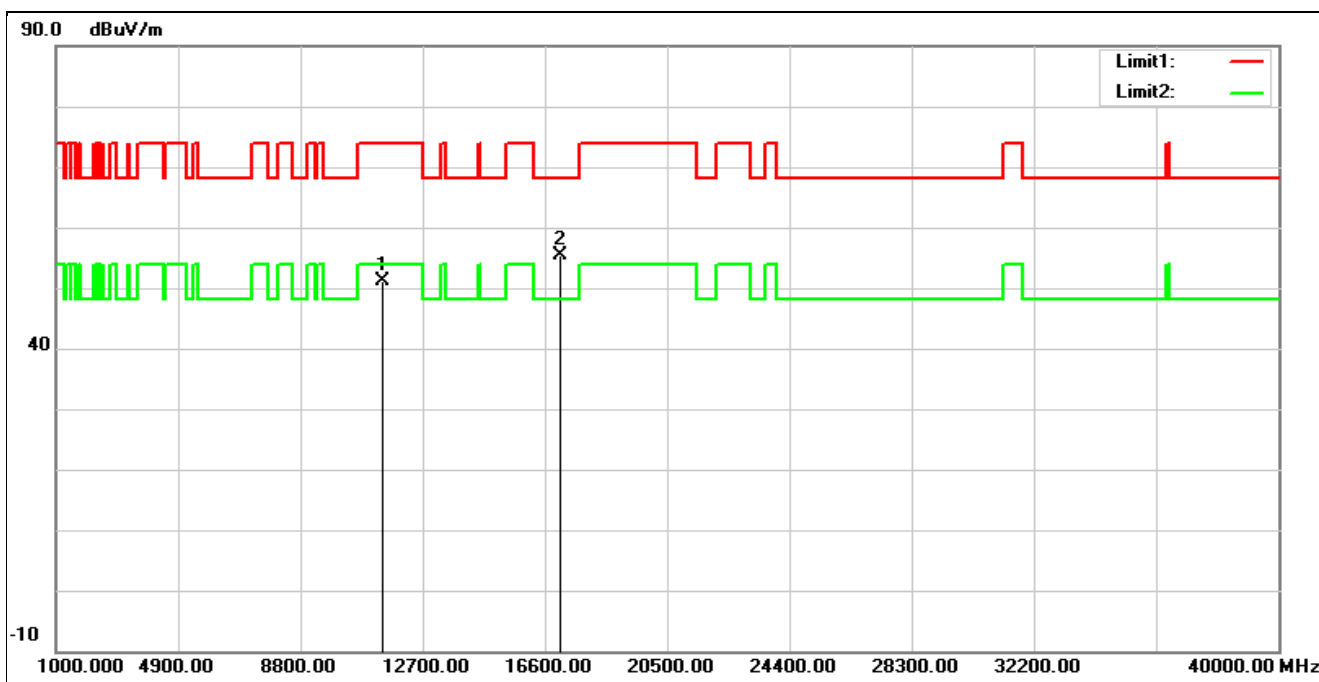


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.09	15.07	51.16	74.00	-22.84	peak
2*	17100.000	34.67	20.64	55.31	68.20	-12.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

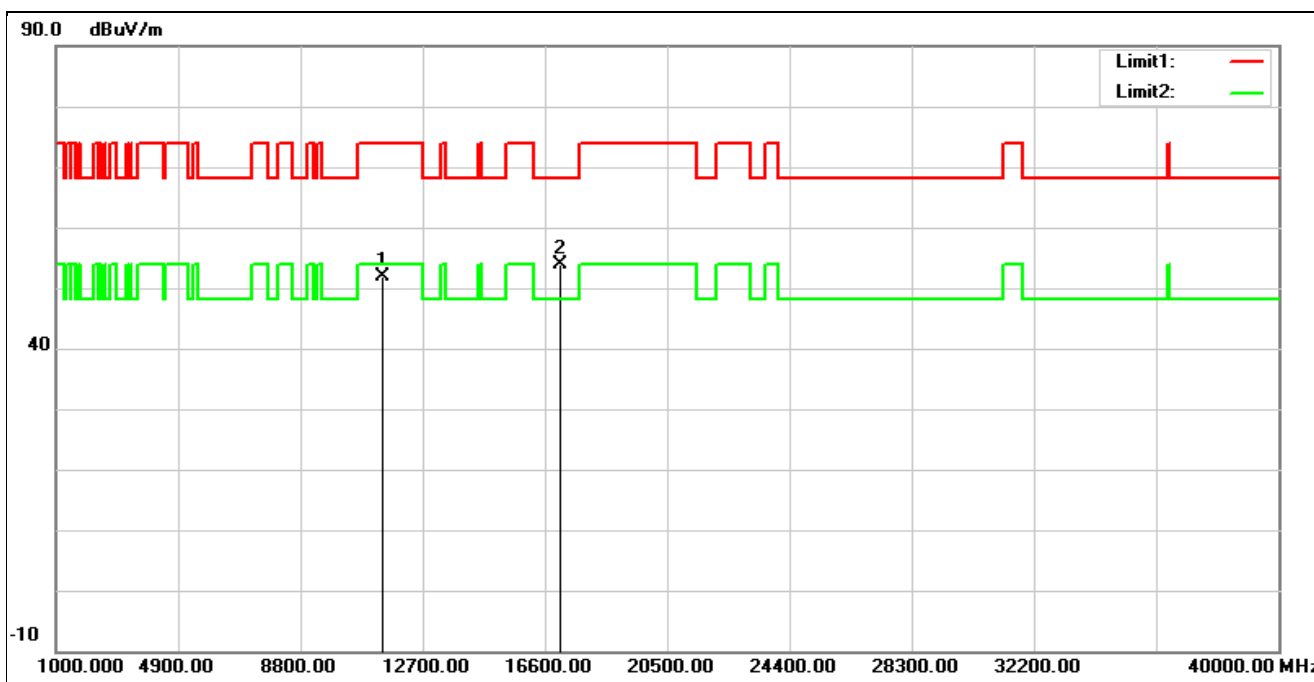


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.82	15.07	51.89	74.00	-22.11	peak
2*	17100.000	33.29	20.64	53.93	68.20	-14.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

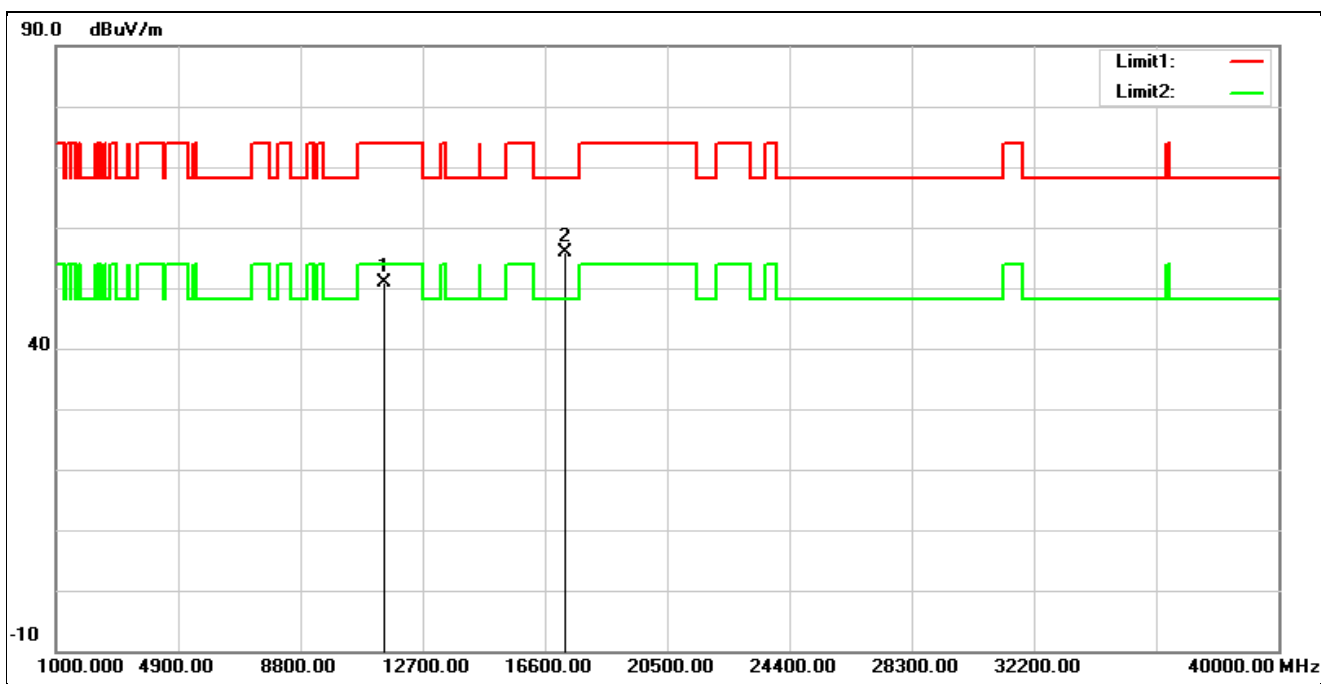


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.56	15.42	50.98	74.00	-23.02	peak
2*	17235.000	33.96	22.01	55.97	68.20	-12.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

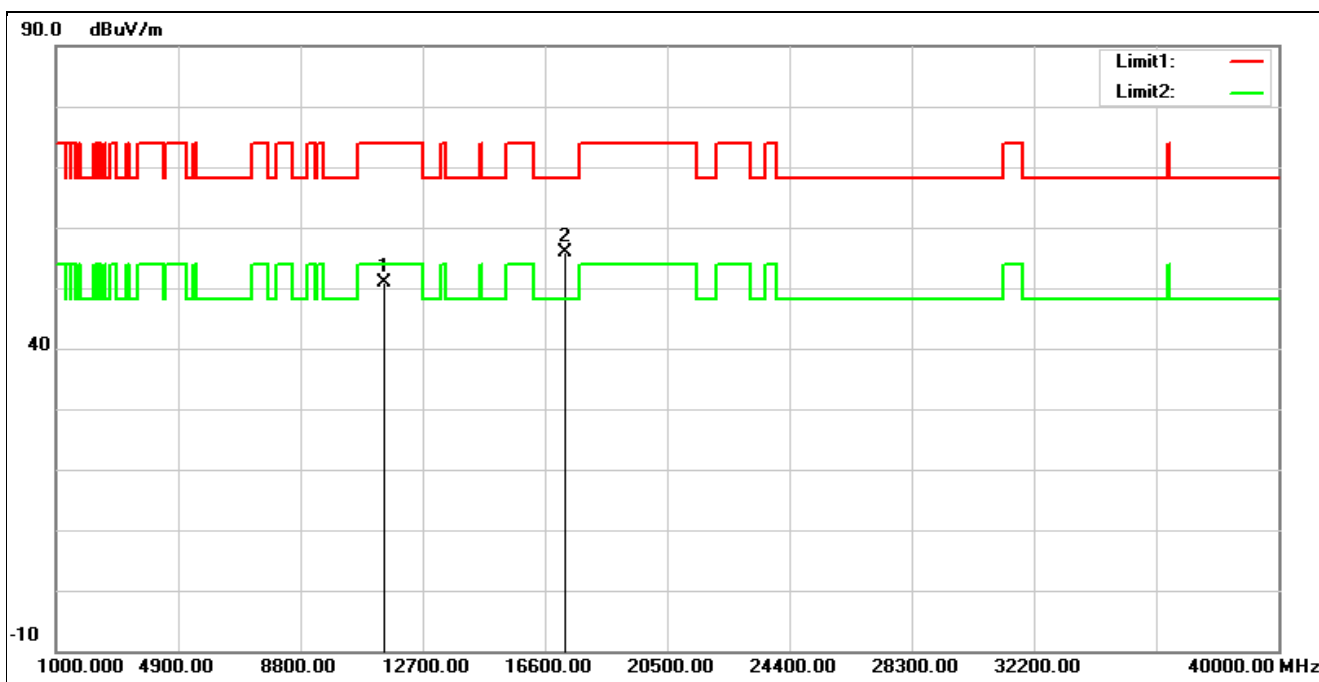


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.43	15.42	50.85	74.00	-23.15	peak
2*	17235.000	33.94	22.01	55.95	68.20	-12.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5785 MHz		
Remark:			

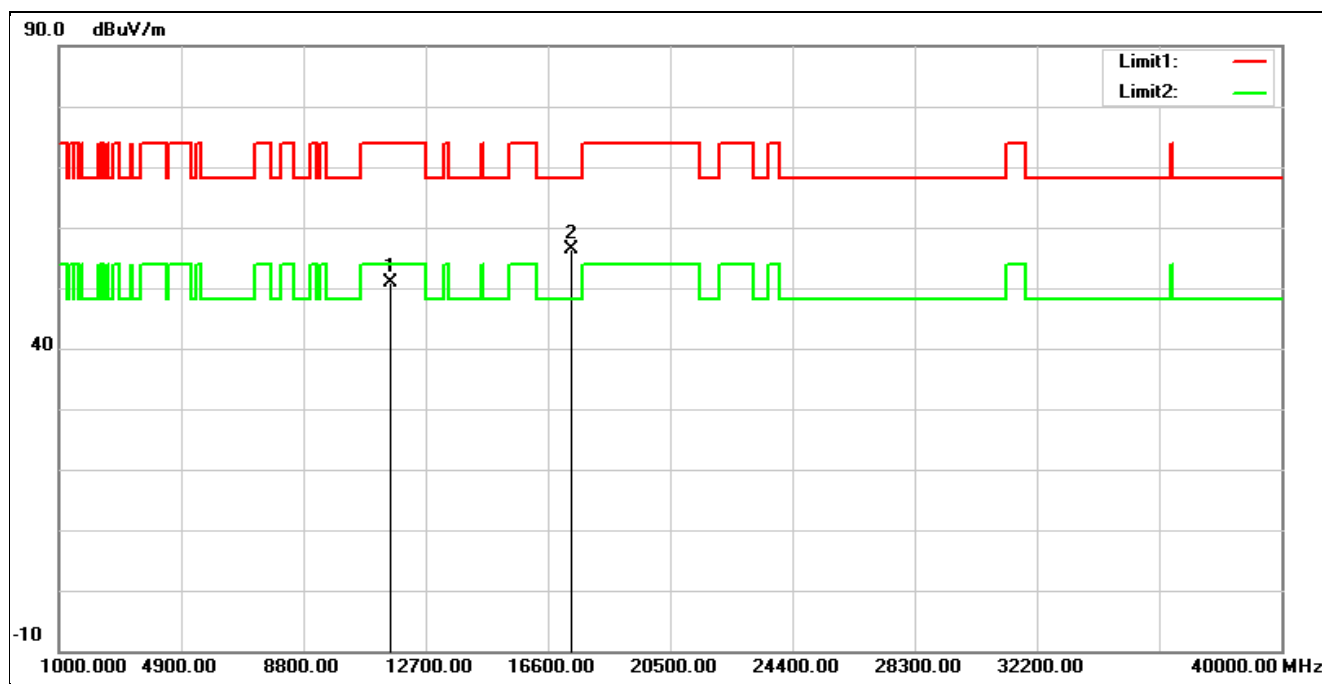


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.69	15.21	50.90	74.00	-23.10	peak
2*	17355.000	33.40	22.96	56.36	68.20	-11.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5785 MHz		
Remark:			

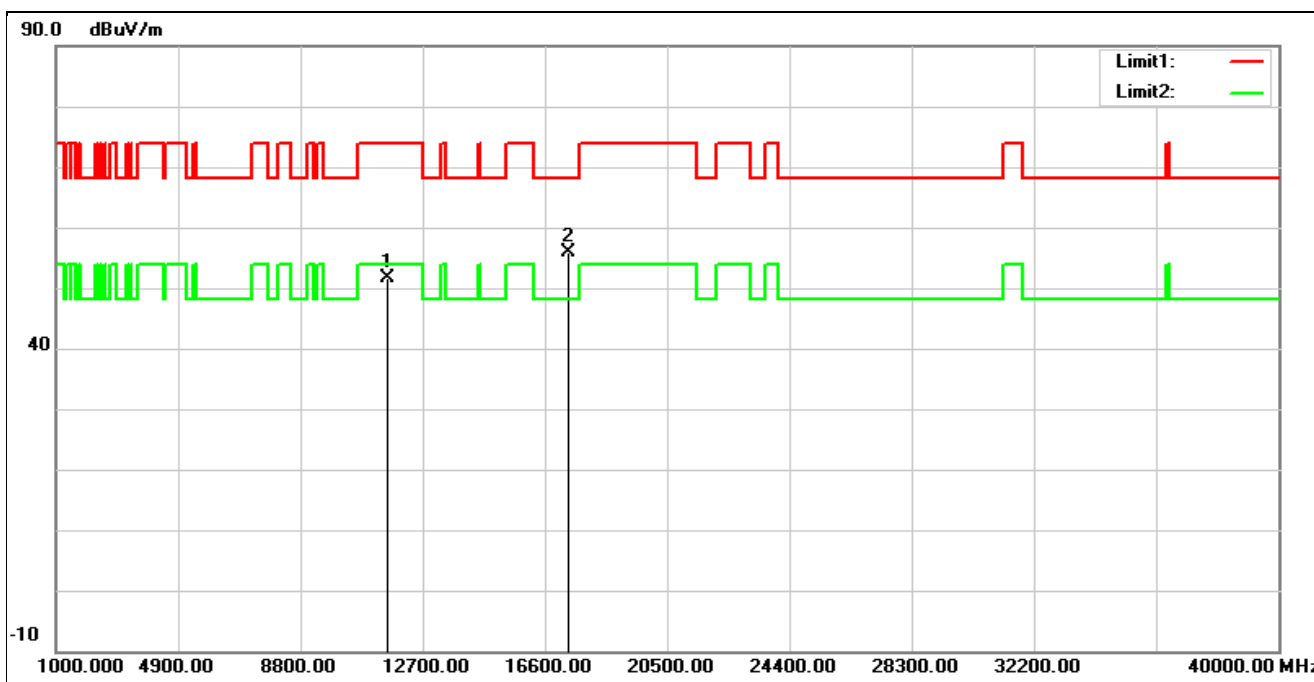


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.39	15.21	51.60	74.00	-22.40	peak
2*	17355.000	32.98	22.96	55.94	68.20	-12.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

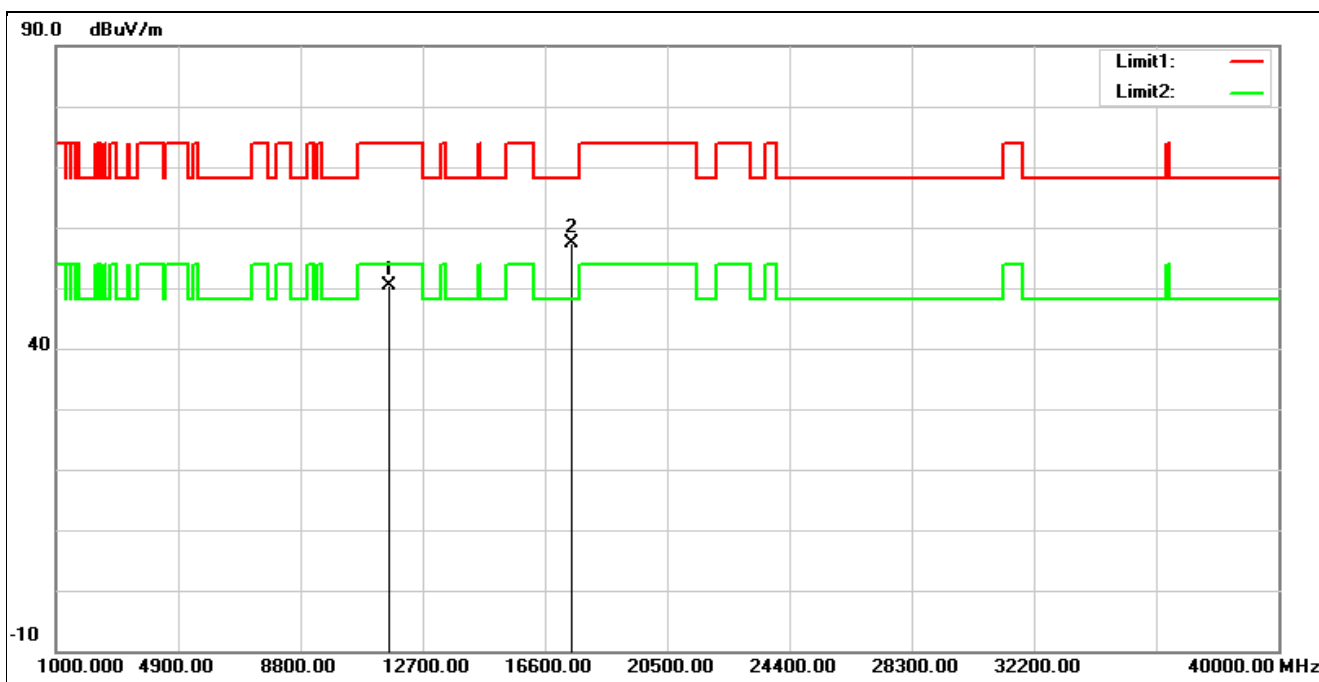


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.37	15.04	50.41	74.00	-23.59	peak
2*	17475.000	33.44	23.95	57.39	68.20	-10.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

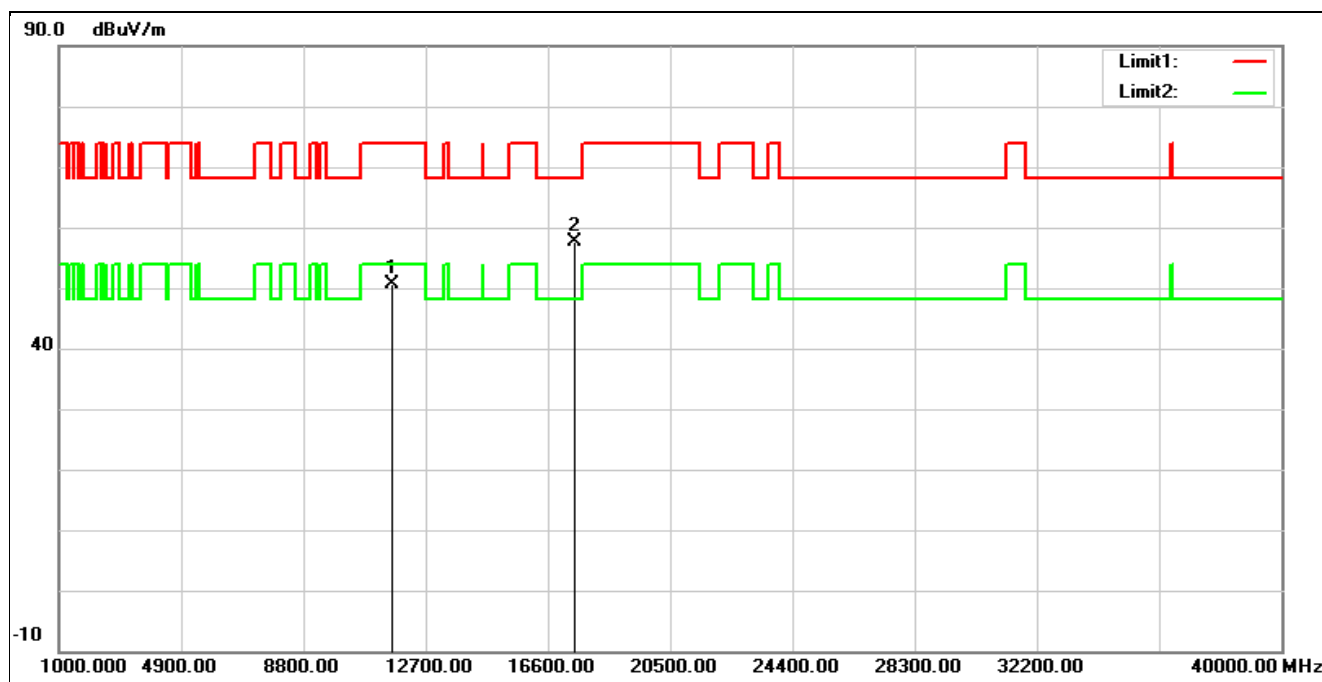


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.71	15.04	50.75	74.00	-23.25	peak
2*	17475.000	33.75	23.95	57.70	68.20	-10.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

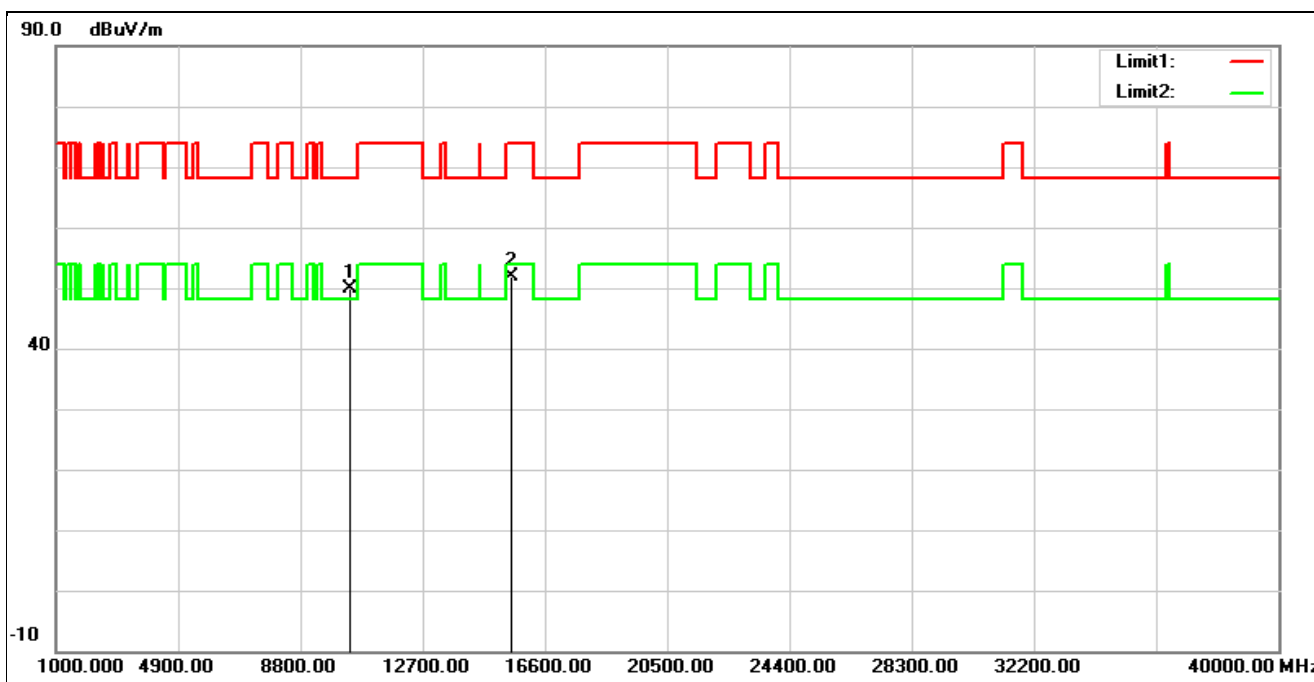


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	36.00	13.99	49.99	68.20	-18.21	peak
2	15540.000	34.61	17.31	51.92	74.00	-22.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

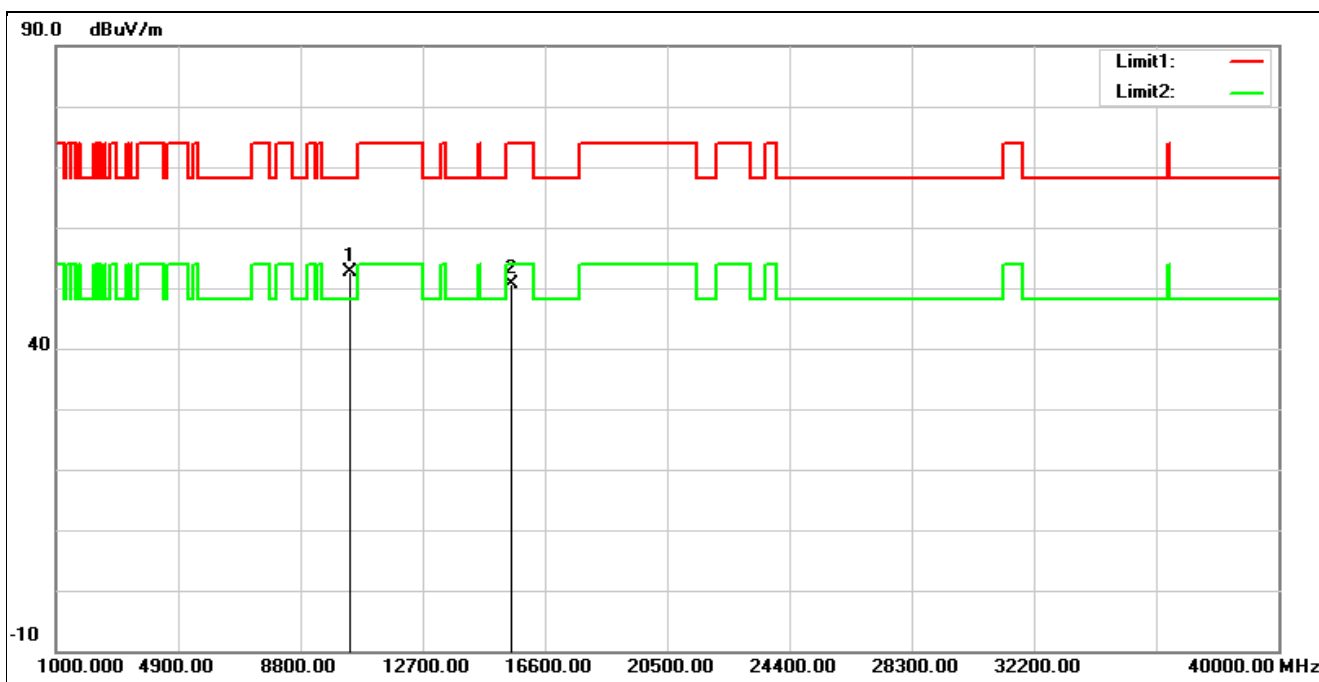


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	38.53	13.99	52.52	68.20	-15.68	peak
2	15540.000	33.44	17.31	50.75	74.00	-23.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

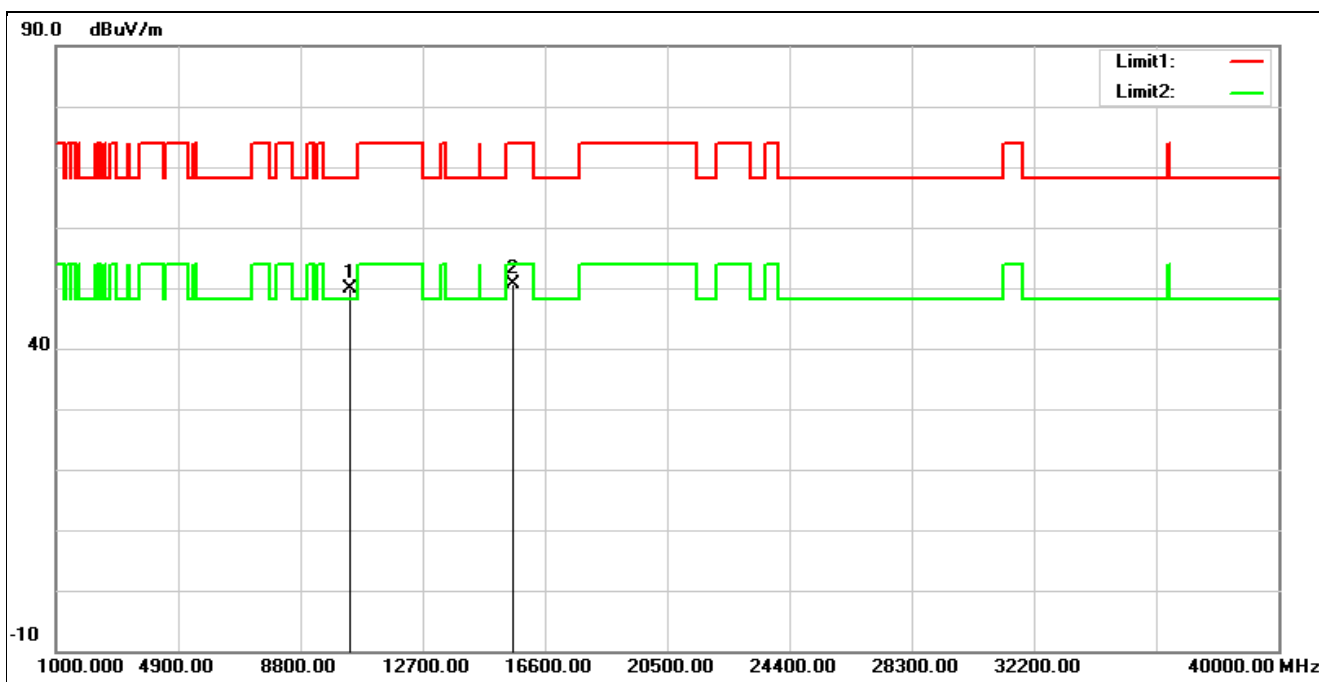


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	35.82	14.10	49.92	68.20	-18.28	peak
2	15600.000	33.67	17.01	50.68	74.00	-23.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5200 MHz		
Remark:			

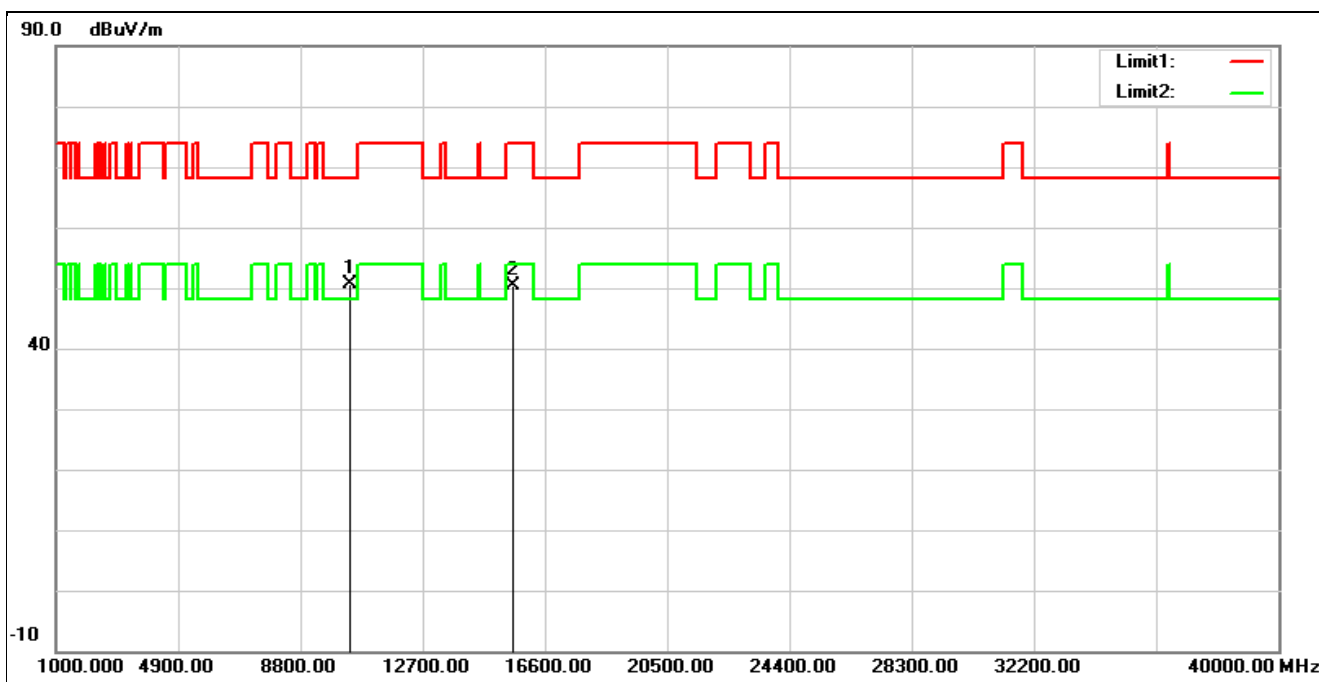


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	36.47	14.10	50.57	68.20	-17.63	peak
2	15600.000	33.26	17.01	50.27	74.00	-23.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

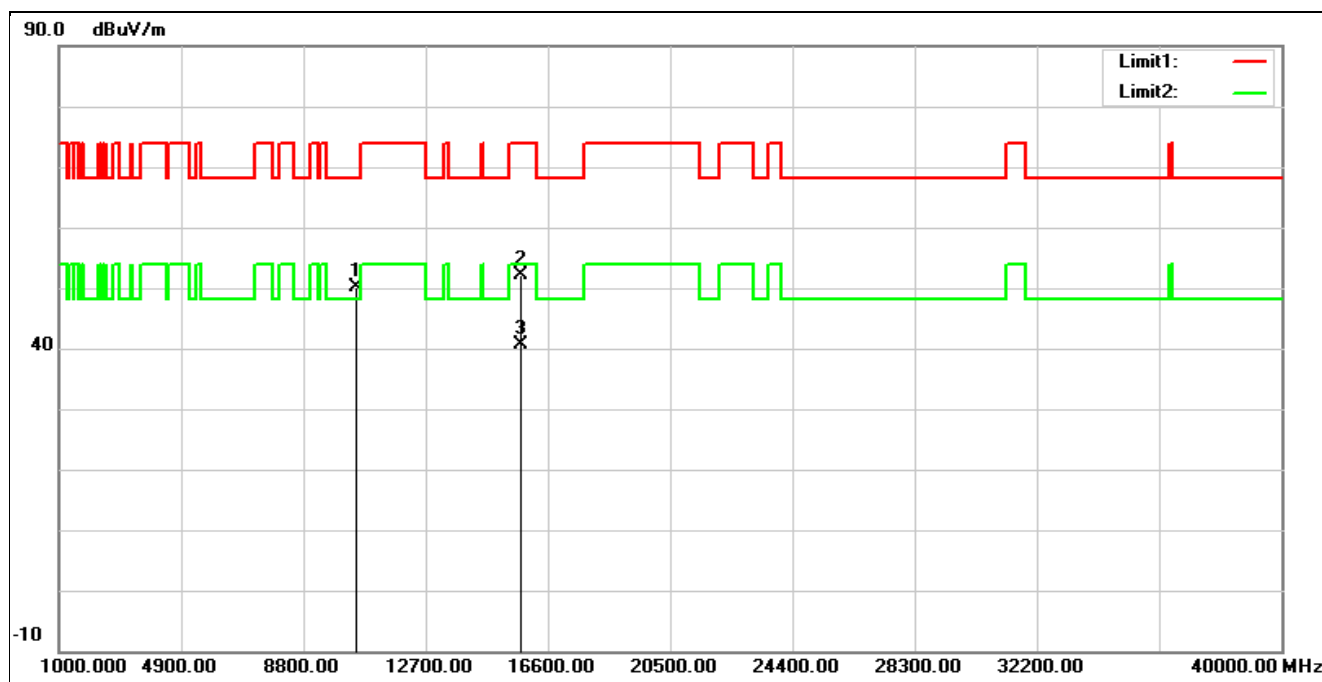


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.62	14.54	50.16	68.20	-18.04	peak
2	15720.000	34.79	17.34	52.13	74.00	-21.87	peak
3*	15720.000	23.34	17.34	40.68	54.00	-13.32	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5240 MHz		
Remark:			

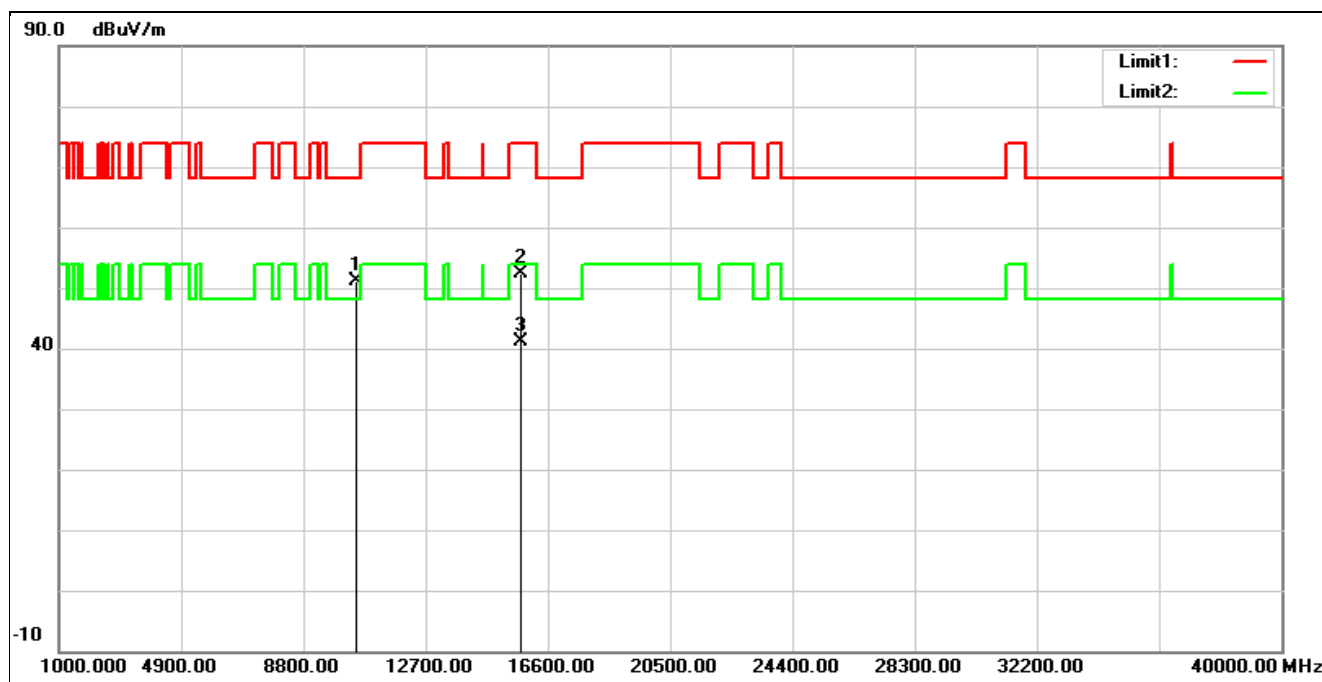


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.66	14.54	51.20	68.20	-17.00	peak
2	15720.000	35.06	17.34	52.40	74.00	-21.60	peak
3*	15720.000	23.82	17.34	41.16	54.00	-12.84	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

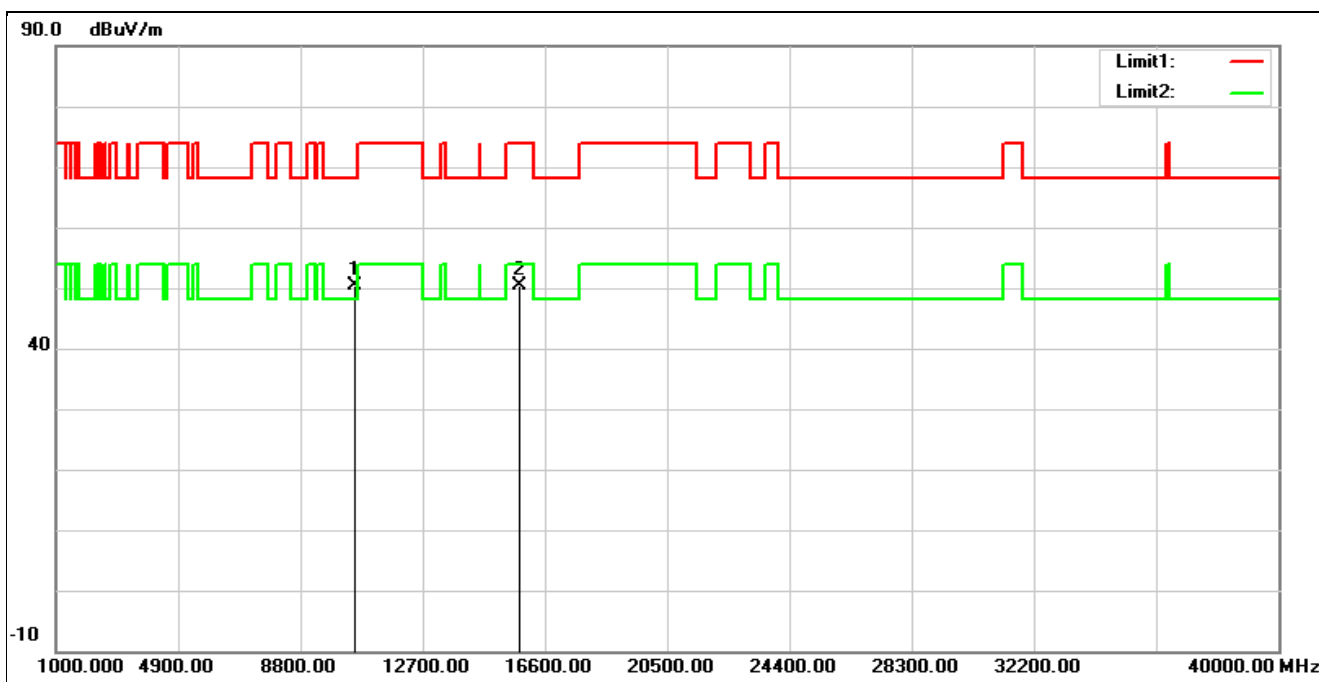


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	35.71	14.60	50.31	68.20	-17.89	peak
2	15780.000	33.21	17.10	50.31	74.00	-23.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5260 MHz		
Remark:			

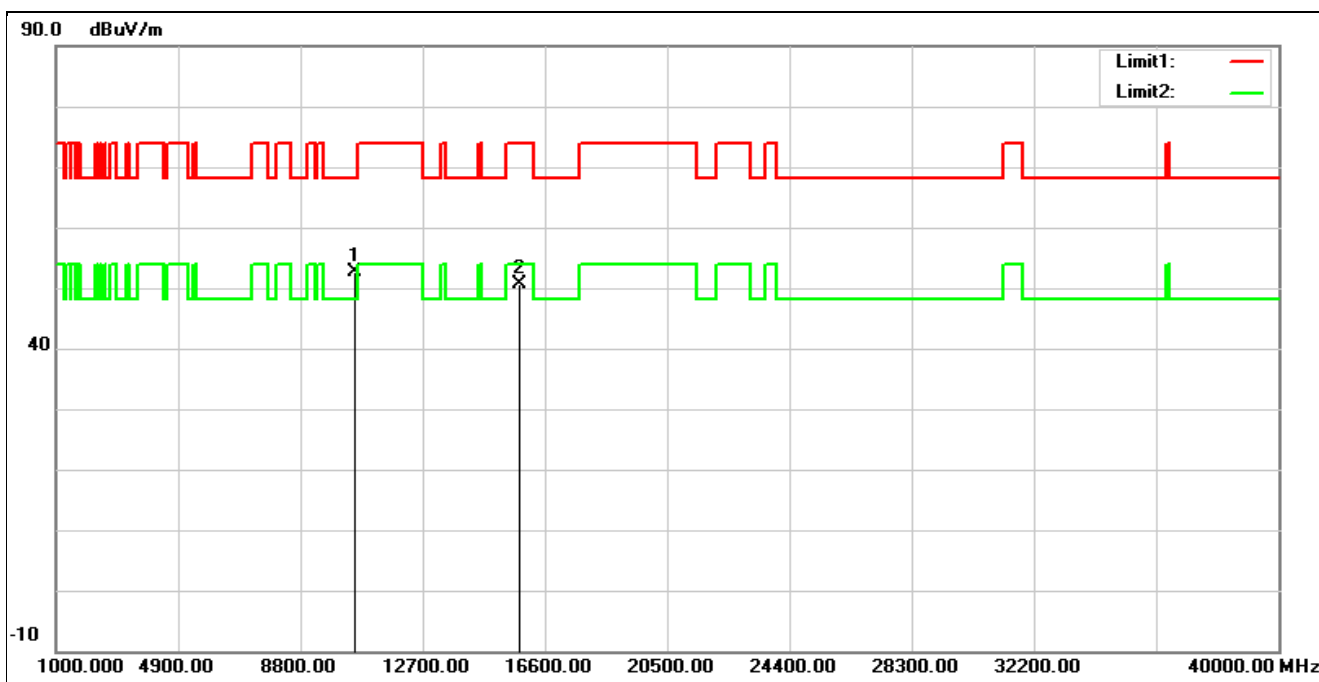


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	37.95	14.60	52.55	68.20	-15.65	peak
2	15780.000	33.64	17.10	50.74	74.00	-23.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

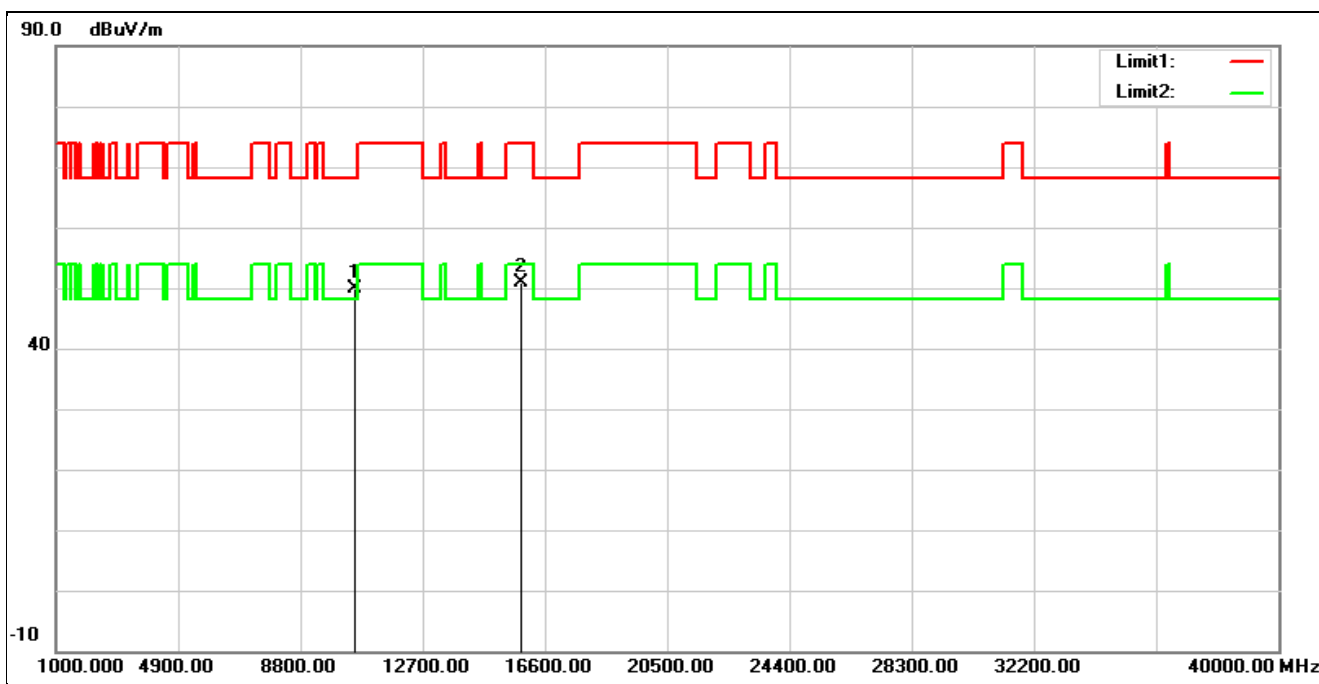


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.46	14.48	49.94	68.20	-18.26	peak
2	15840.000	33.93	16.90	50.83	74.00	-23.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5280 MHz		
Remark:			

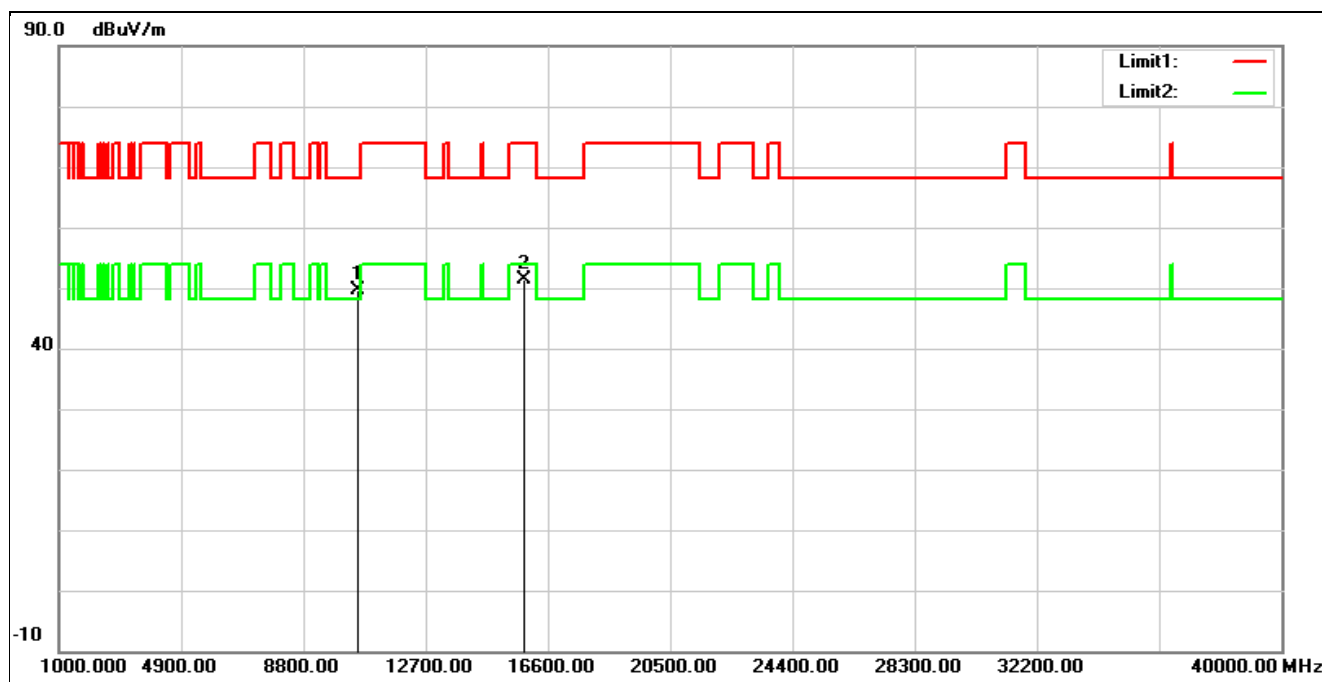


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	35.05	14.48	49.53	68.20	-18.67	peak
2	15840.000	34.48	16.90	51.38	74.00	-22.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

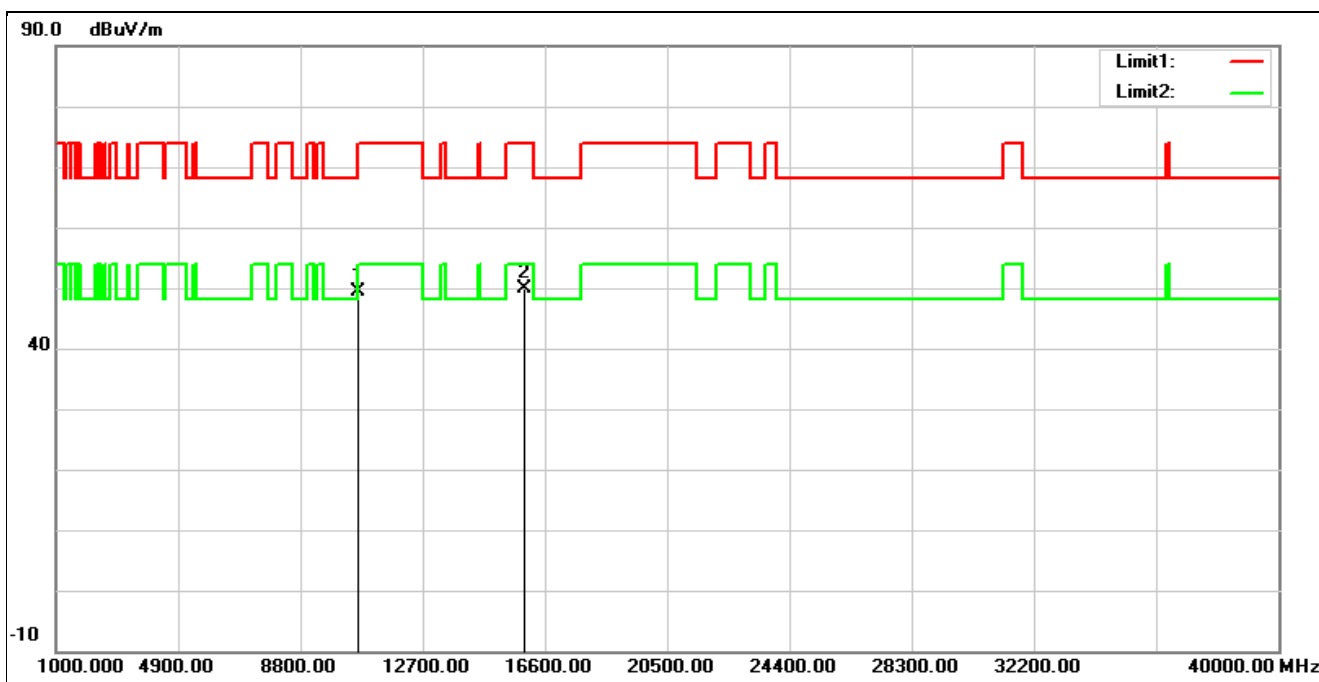


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.01	14.41	49.42	74.00	-24.58	peak
2*	15960.000	33.22	16.55	49.77	74.00	-24.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

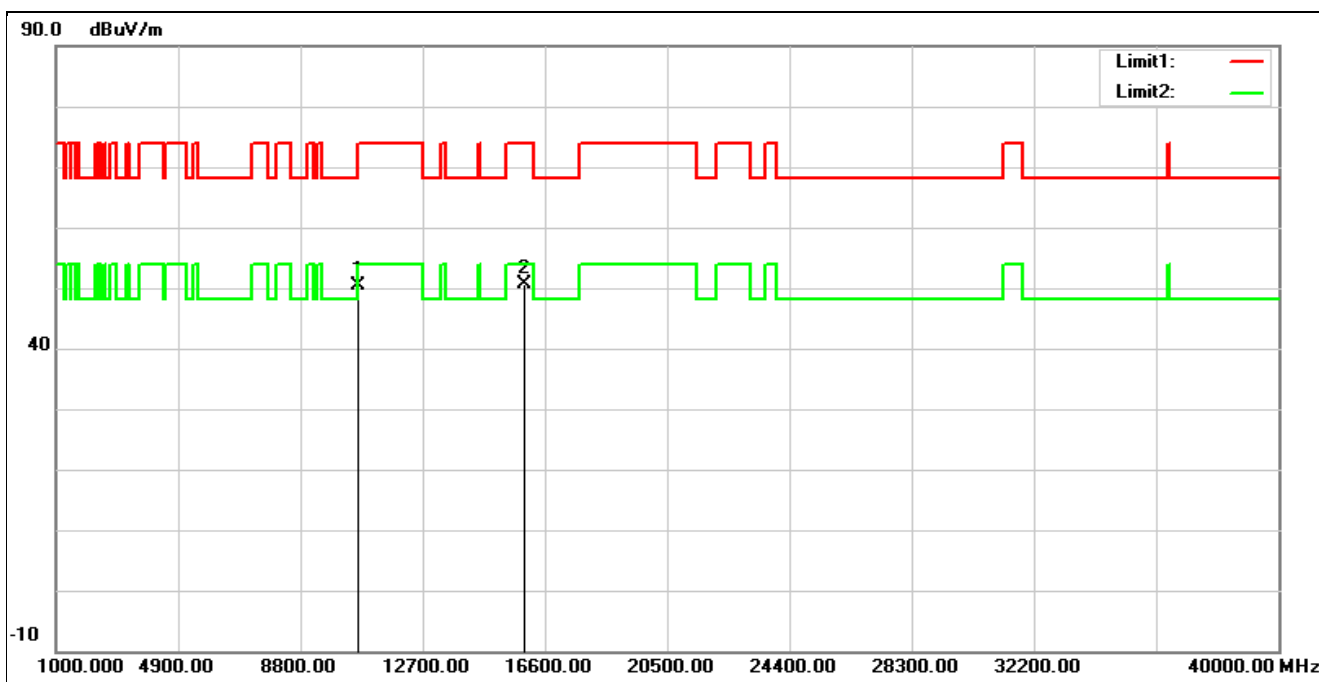


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.97	14.41	50.38	74.00	-23.62	peak
2*	15960.000	34.14	16.55	50.69	74.00	-23.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

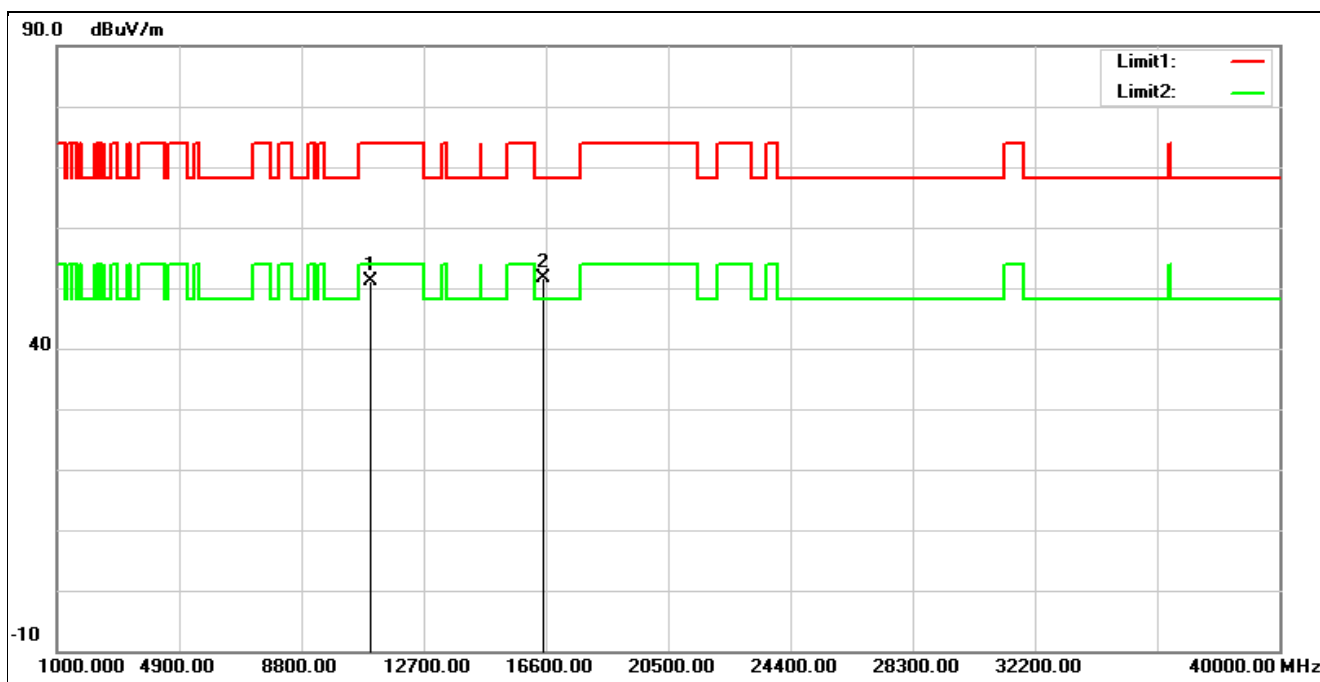


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.36	14.73	51.09	74.00	-22.91	peak
2*	16500.000	33.77	17.77	51.54	68.20	-16.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

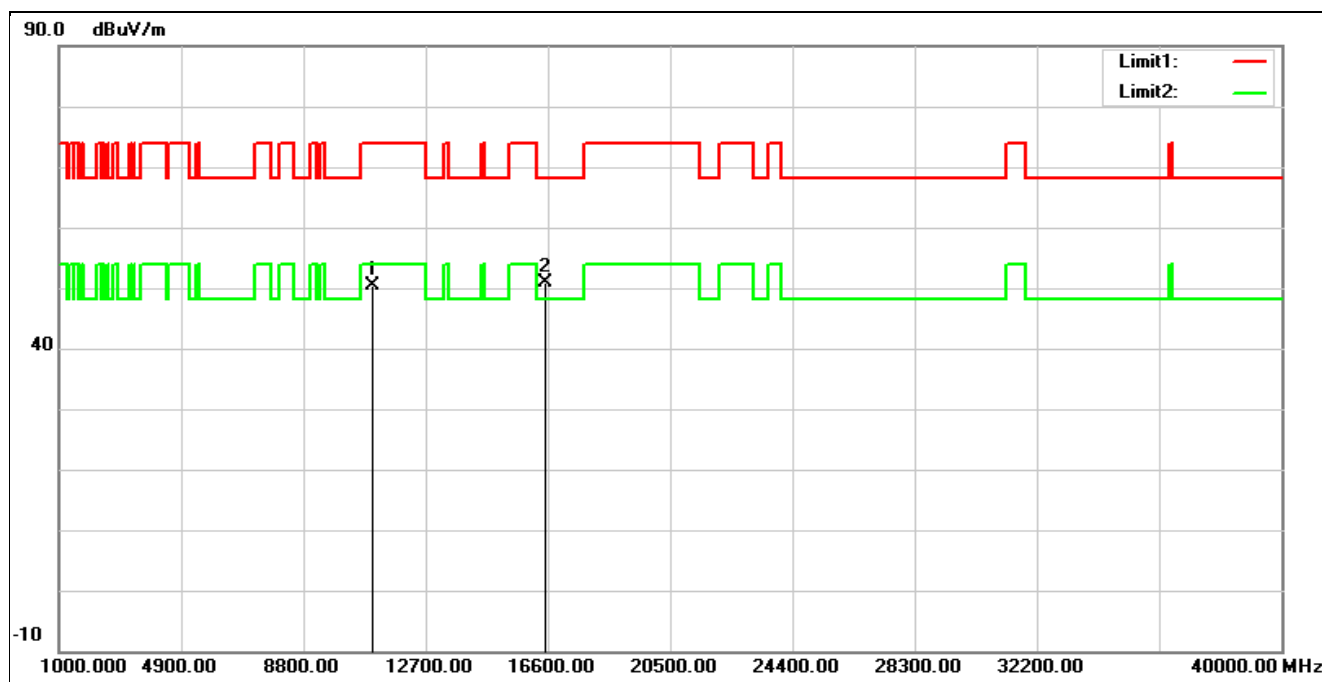


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.63	14.73	50.36	74.00	-23.64	peak
2*	16500.000	33.04	17.77	50.81	68.20	-17.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

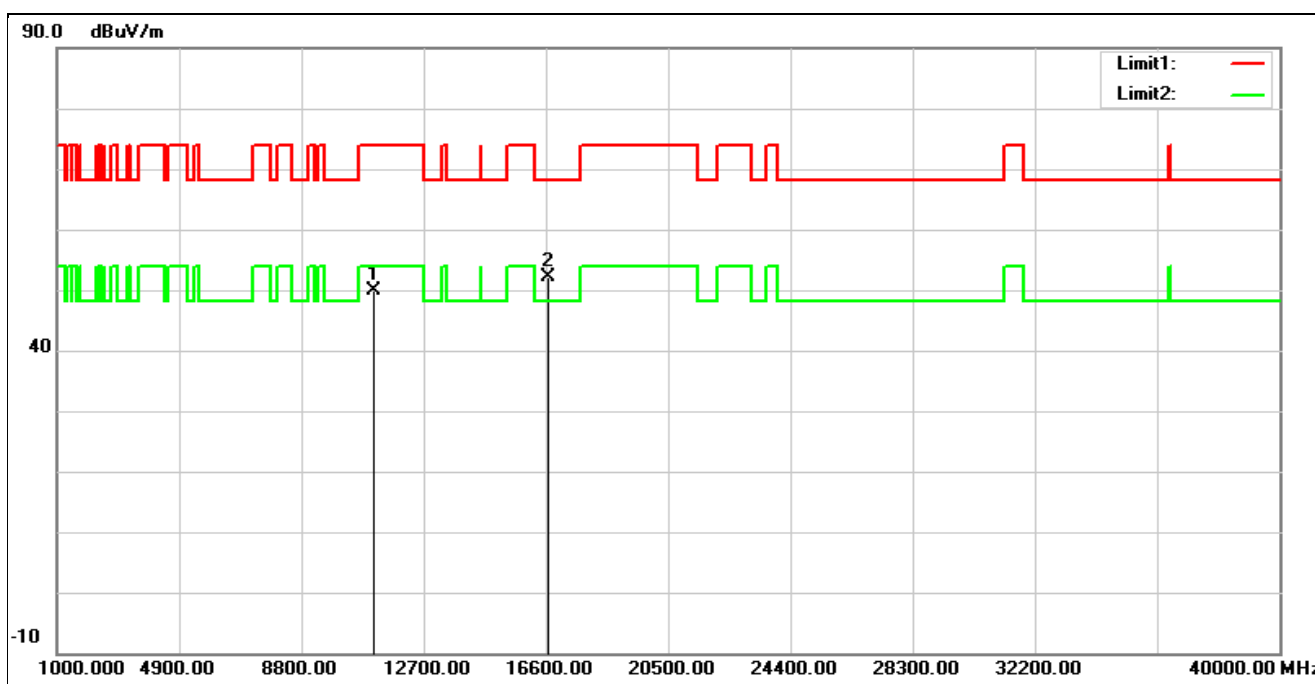


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.18	14.79	49.97	74.00	-24.03	peak
2*	16680.000	33.53	18.61	52.14	68.20	-16.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5560 MHz		
Remark:			

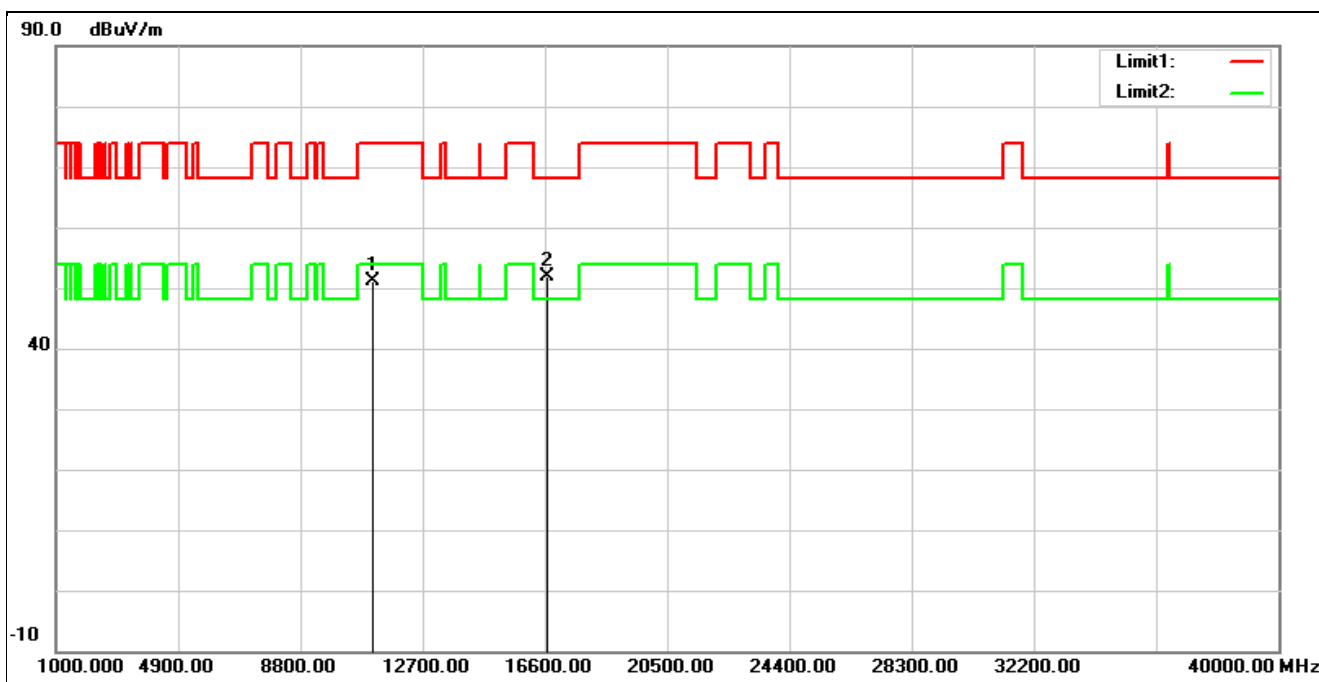


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.34	14.79	51.13	74.00	-22.87	peak
2*	16680.000	33.39	18.61	52.00	68.20	-16.20	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

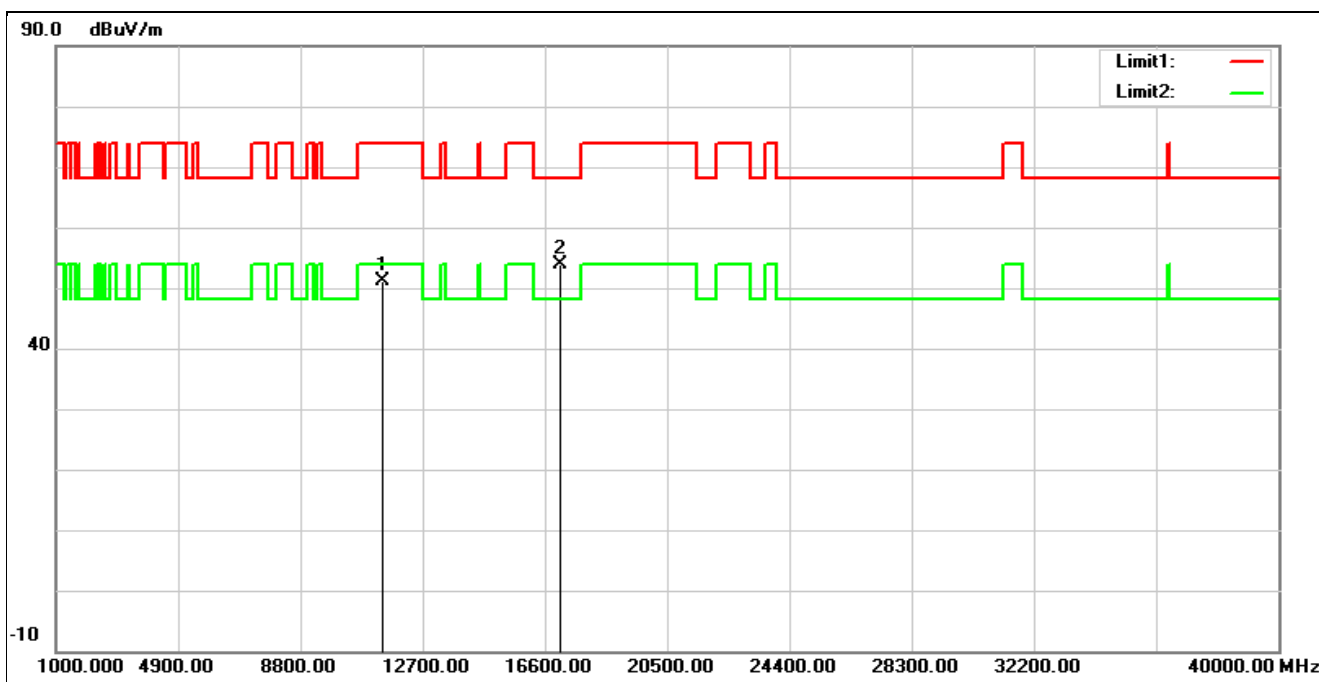


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.13	15.07	51.20	74.00	-22.80	peak
2*	17100.000	33.28	20.64	53.92	68.20	-14.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

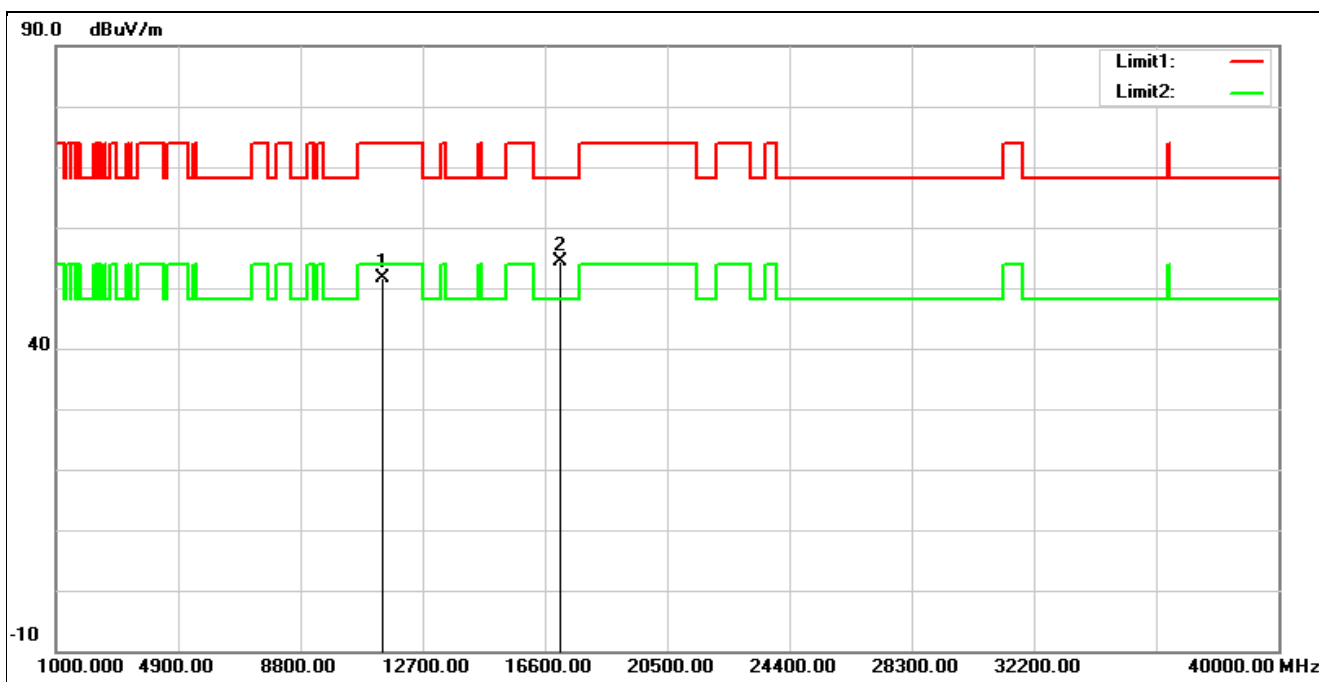


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.52	15.07	51.59	74.00	-22.41	peak
2*	17100.000	33.67	20.64	54.31	68.20	-13.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

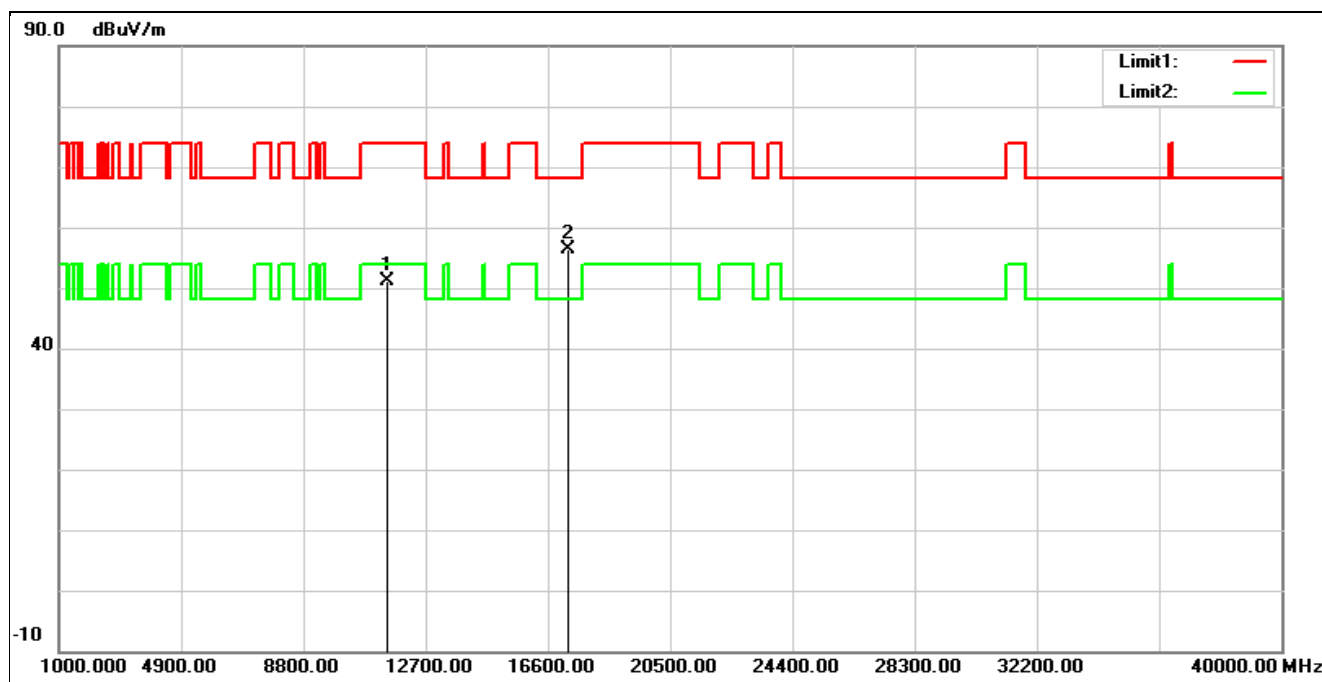


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.68	15.42	51.10	74.00	-22.90	peak
2*	17235.000	34.37	22.01	56.38	68.20	-11.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

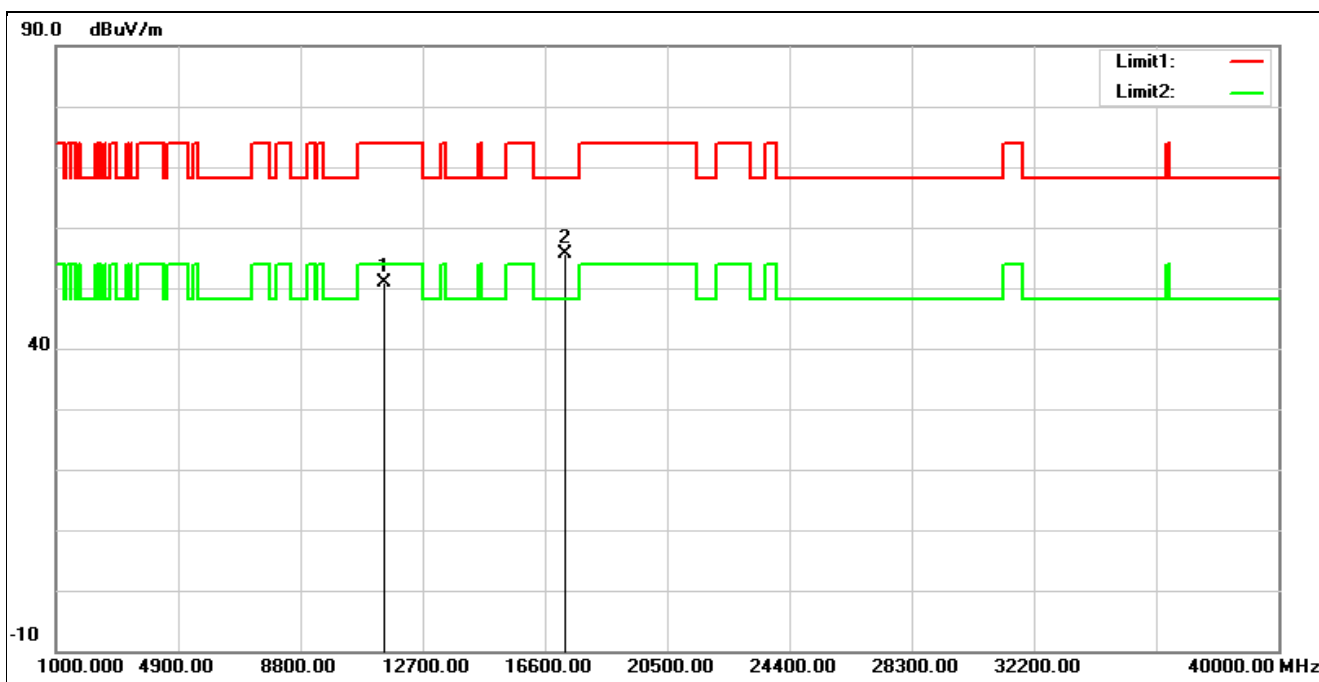


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.48	15.42	50.90	74.00	-23.10	peak
2*	17235.000	33.51	22.01	55.52	68.20	-12.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

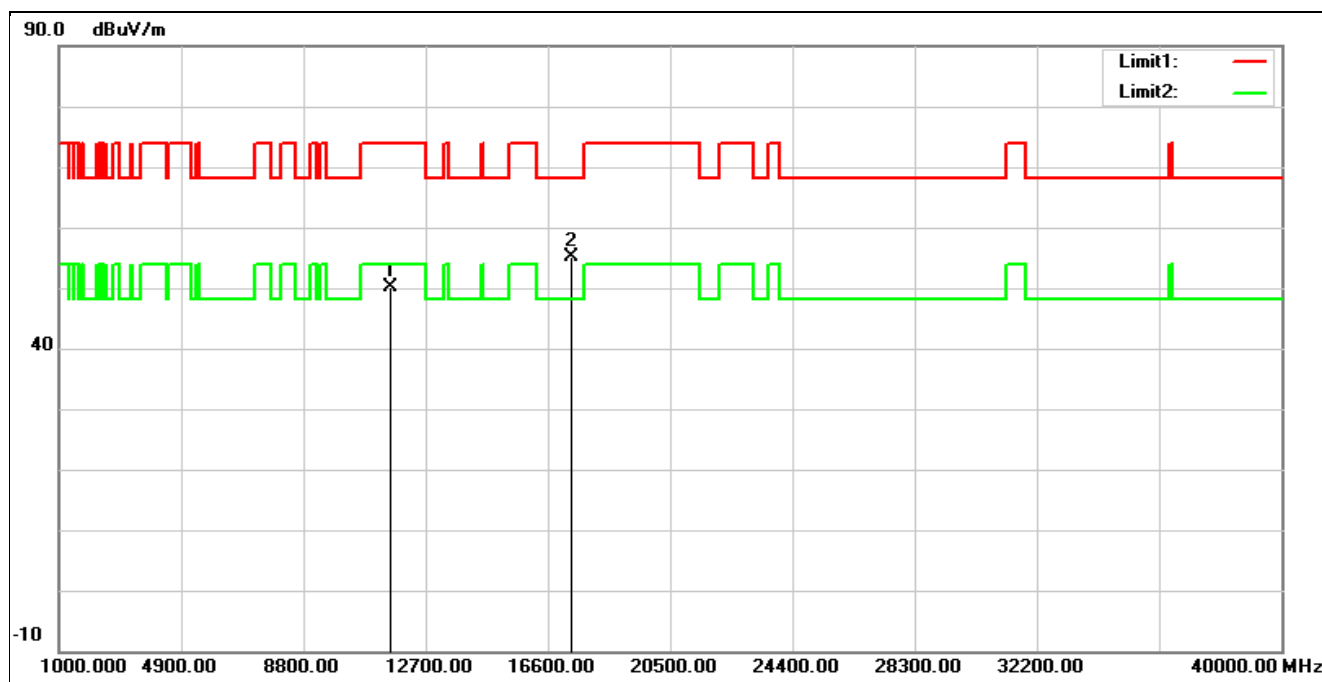


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.80	15.21	50.01	74.00	-23.99	peak
2*	17355.000	32.26	22.96	55.22	68.20	-12.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5785 MHz		
Remark:			

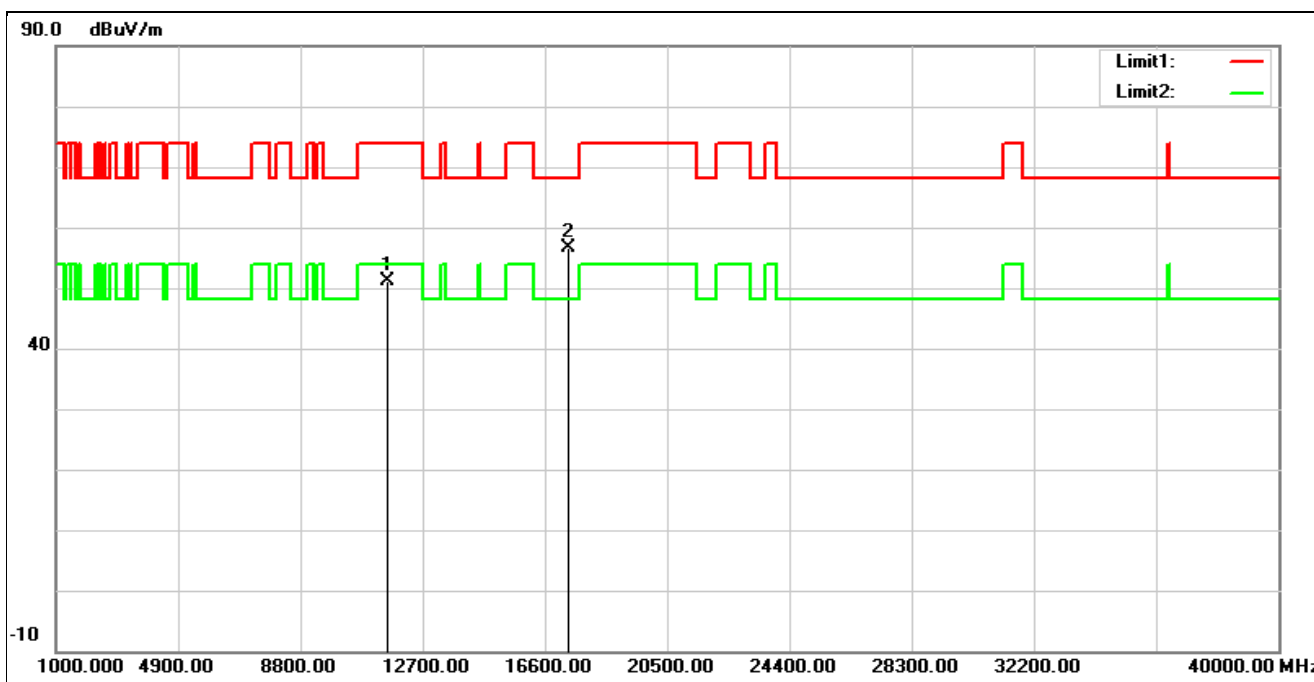


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.80	15.21	51.01	74.00	-22.99	peak
2*	17355.000	33.61	22.96	56.57	68.20	-11.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

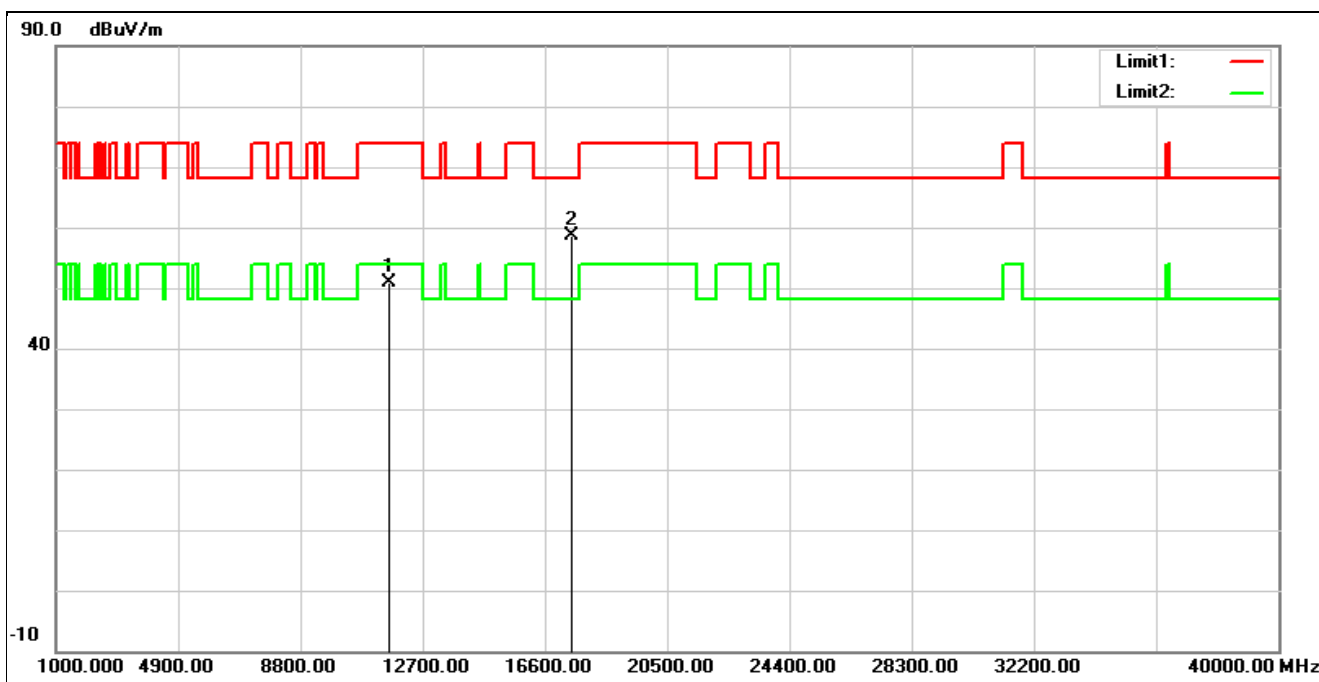


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.83	15.04	50.87	74.00	-23.13	peak
2*	17475.000	34.80	23.95	58.75	68.20	-9.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

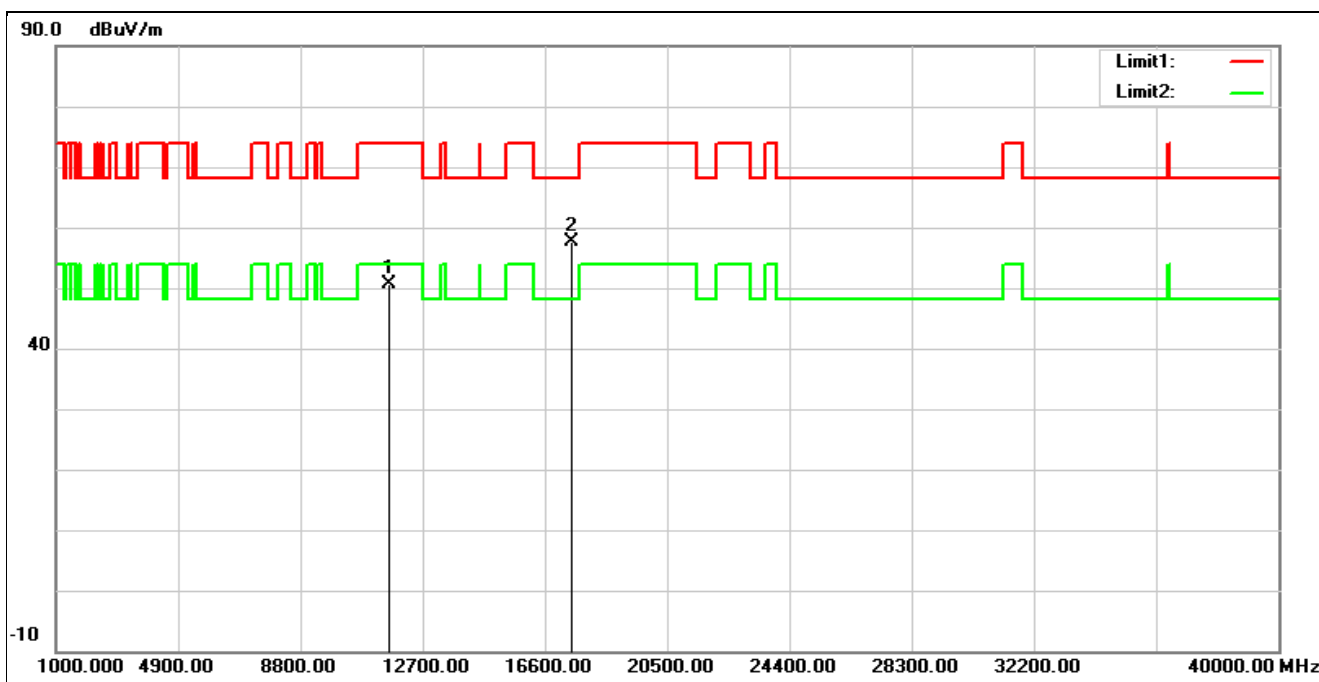


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.71	15.04	50.75	74.00	-23.25	peak
2*	17475.000	33.57	23.95	57.52	68.20	-10.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

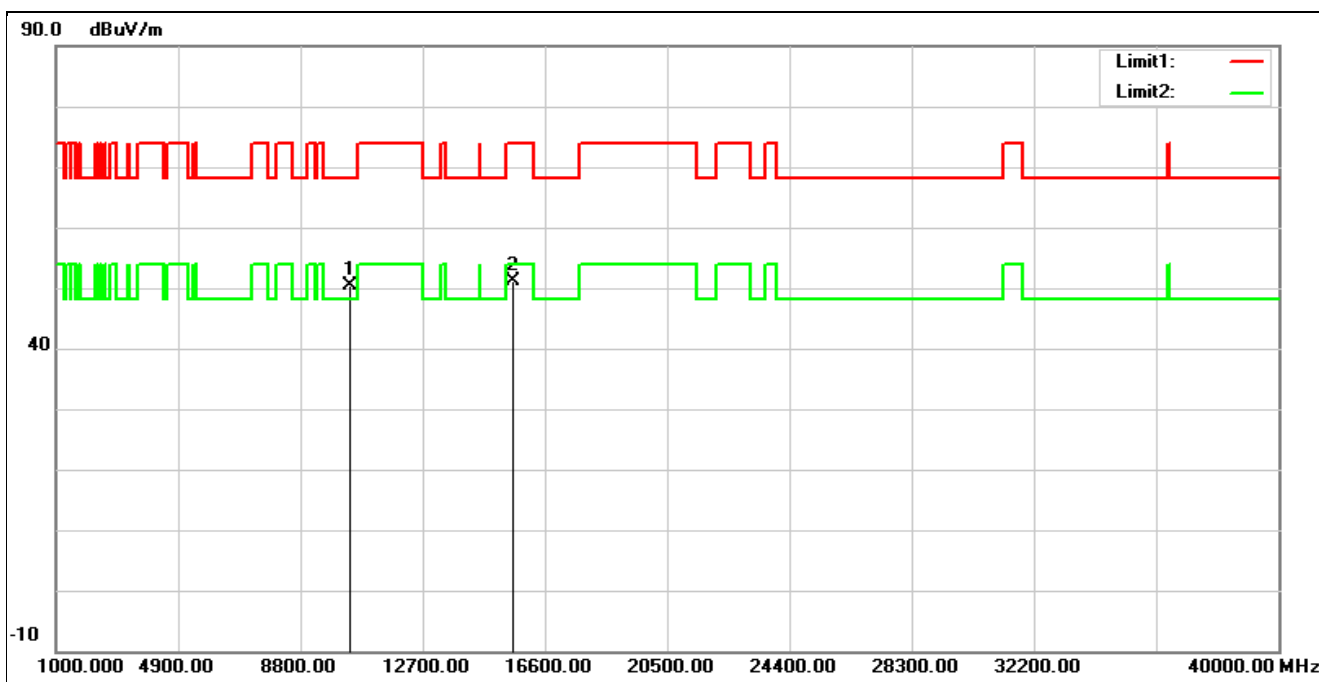


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	36.44	14.04	50.48	68.20	-17.72	peak
2	15570.000	33.99	17.16	51.15	74.00	-22.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

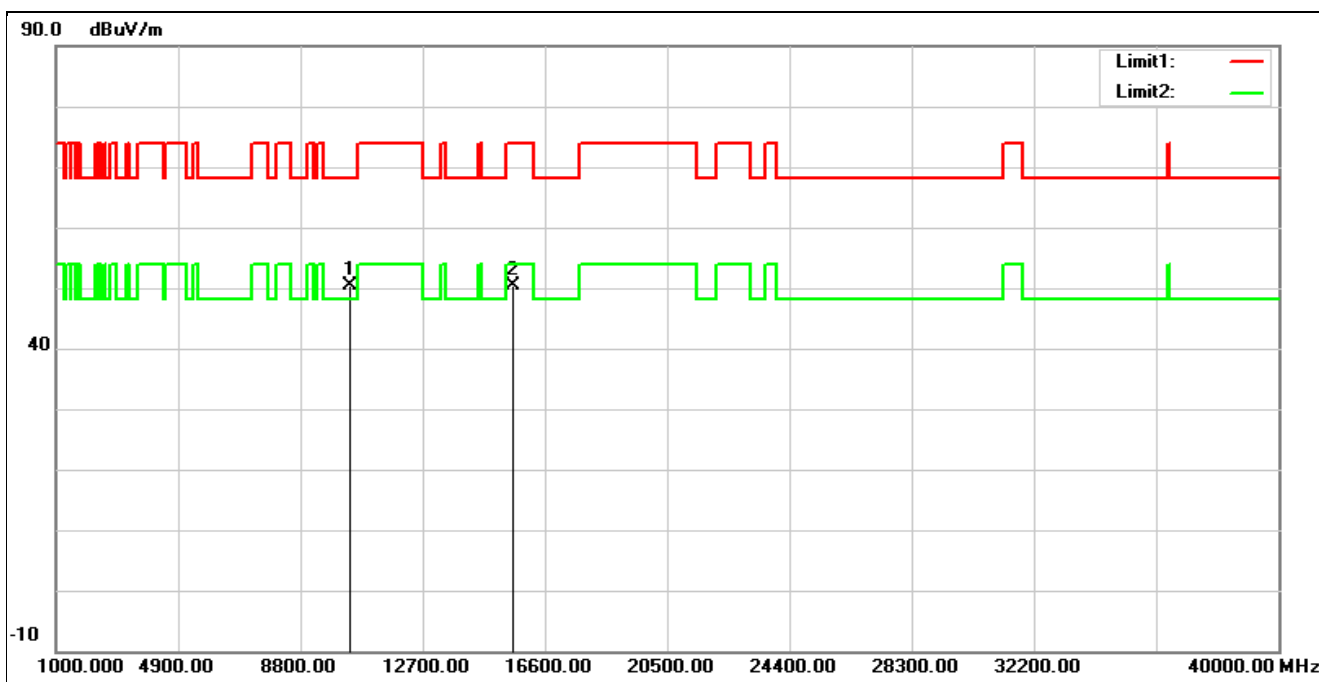


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	36.46	14.04	50.50	68.20	-17.70	peak
2	15570.000	33.26	17.16	50.42	74.00	-23.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

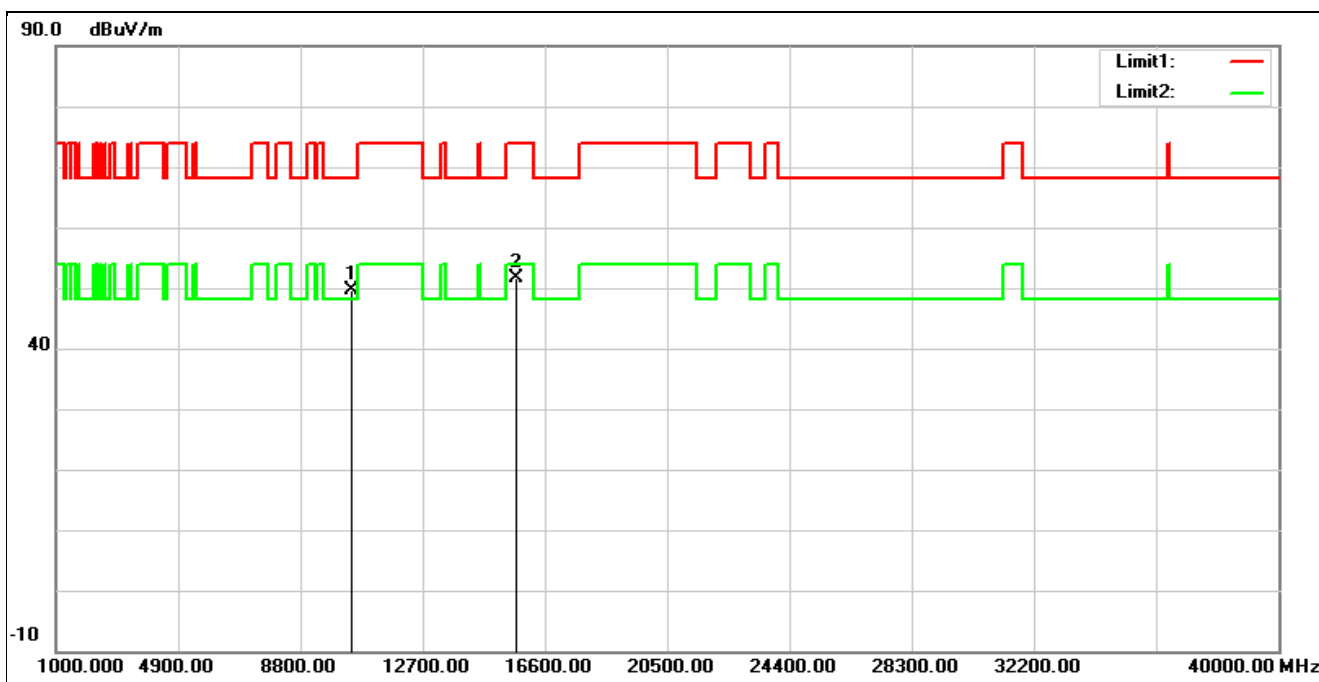


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	35.13	14.43	49.56	68.20	-18.64	peak
2	15690.000	34.19	17.37	51.56	74.00	-22.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5230 MHz		
Remark:			

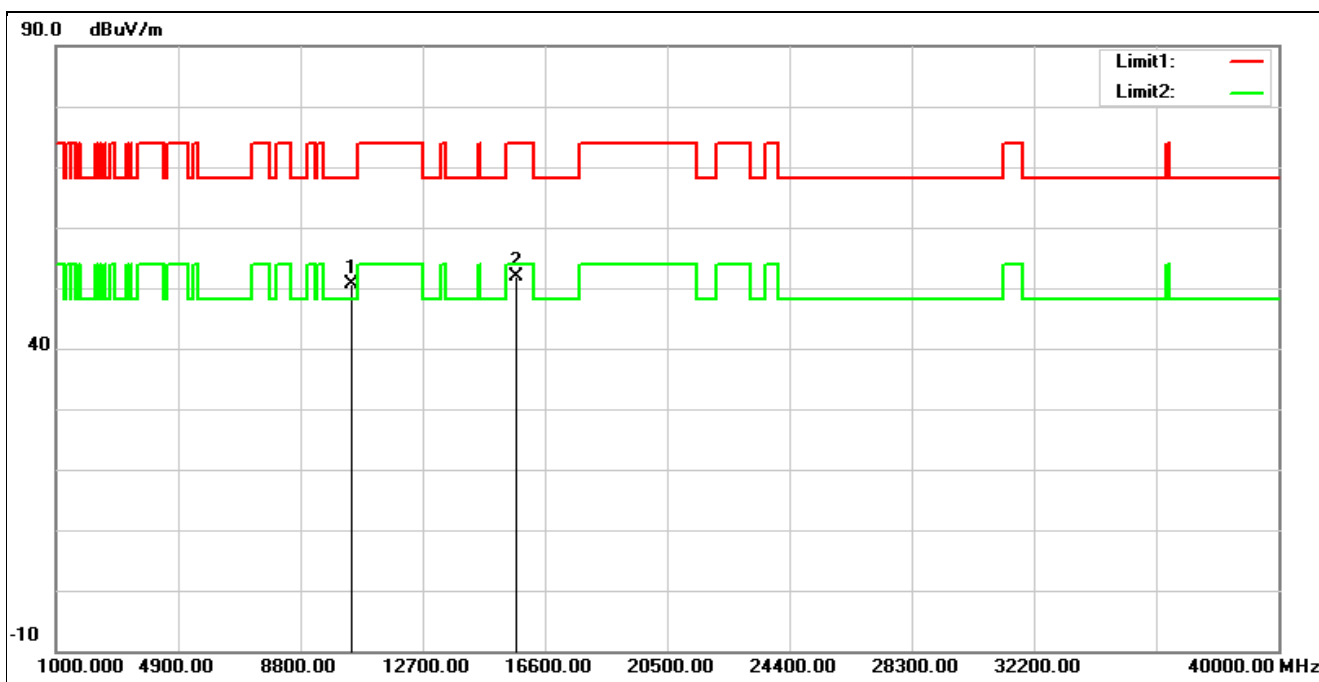


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	36.12	14.43	50.55	68.20	-17.65	peak
2	15690.000	34.59	17.37	51.96	74.00	-22.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

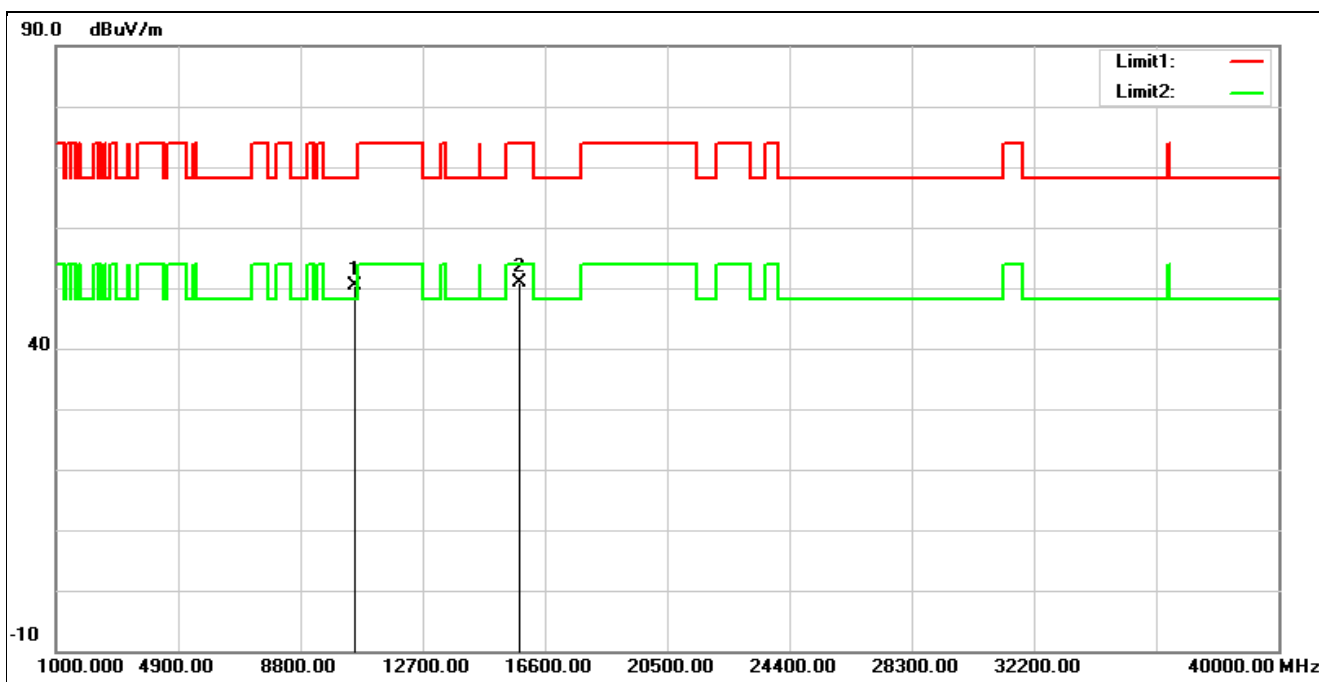


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.83	14.55	50.38	68.20	-17.82	peak
2	15810.000	33.91	17.00	50.91	74.00	-23.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5270 MHz		
Remark:			

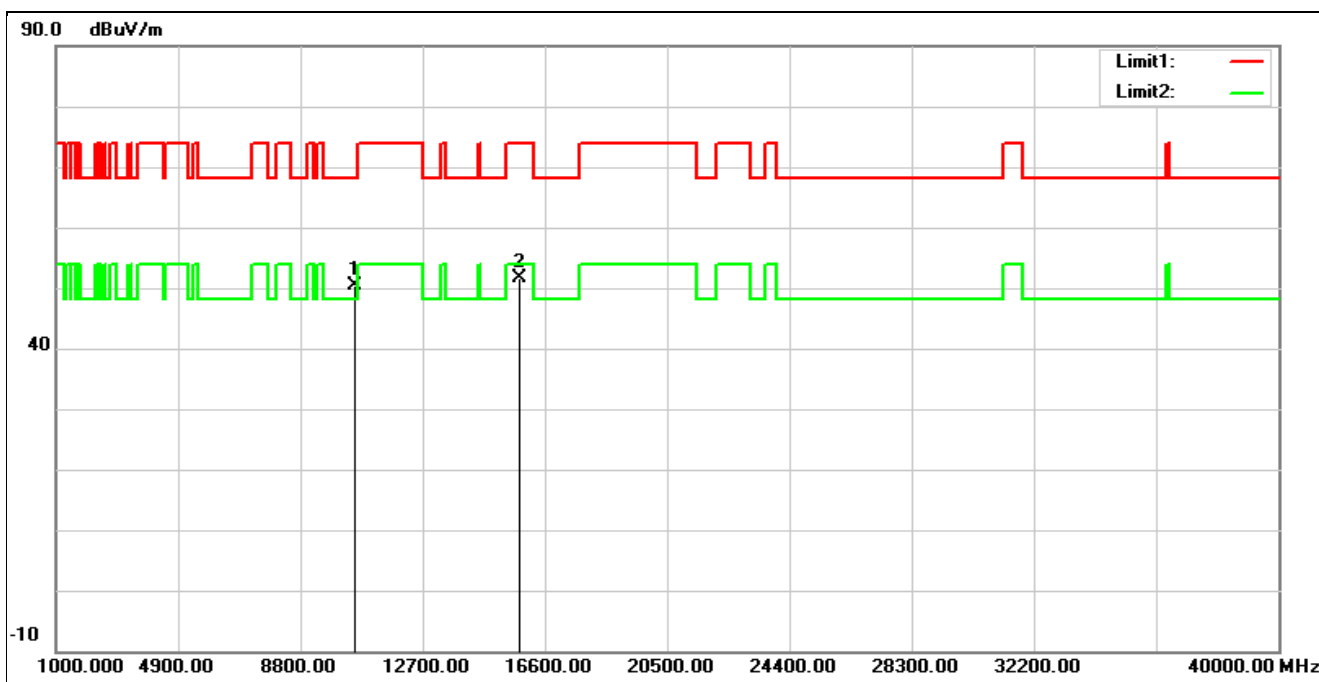


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	35.81	14.55	50.36	68.20	-17.84	peak
2	15810.000	34.55	17.00	51.55	74.00	-22.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

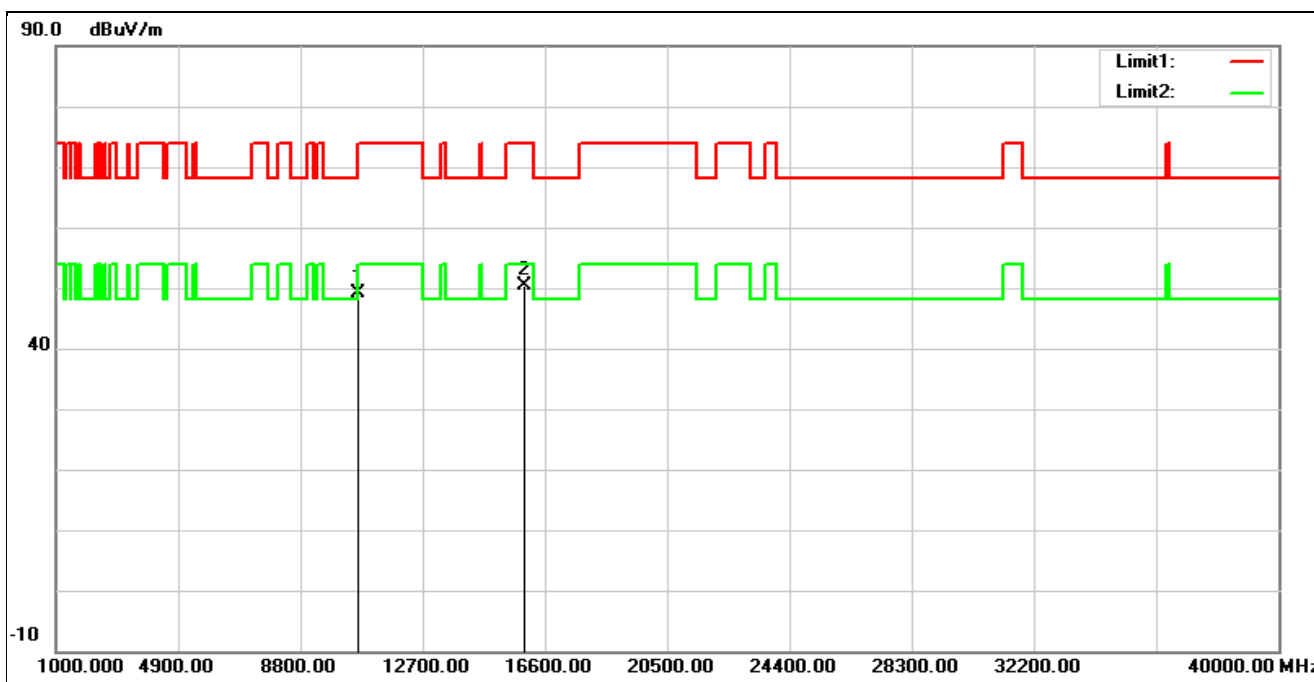


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.82	14.40	49.22	74.00	-24.78	peak
2*	15930.000	33.65	16.64	50.29	74.00	-23.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

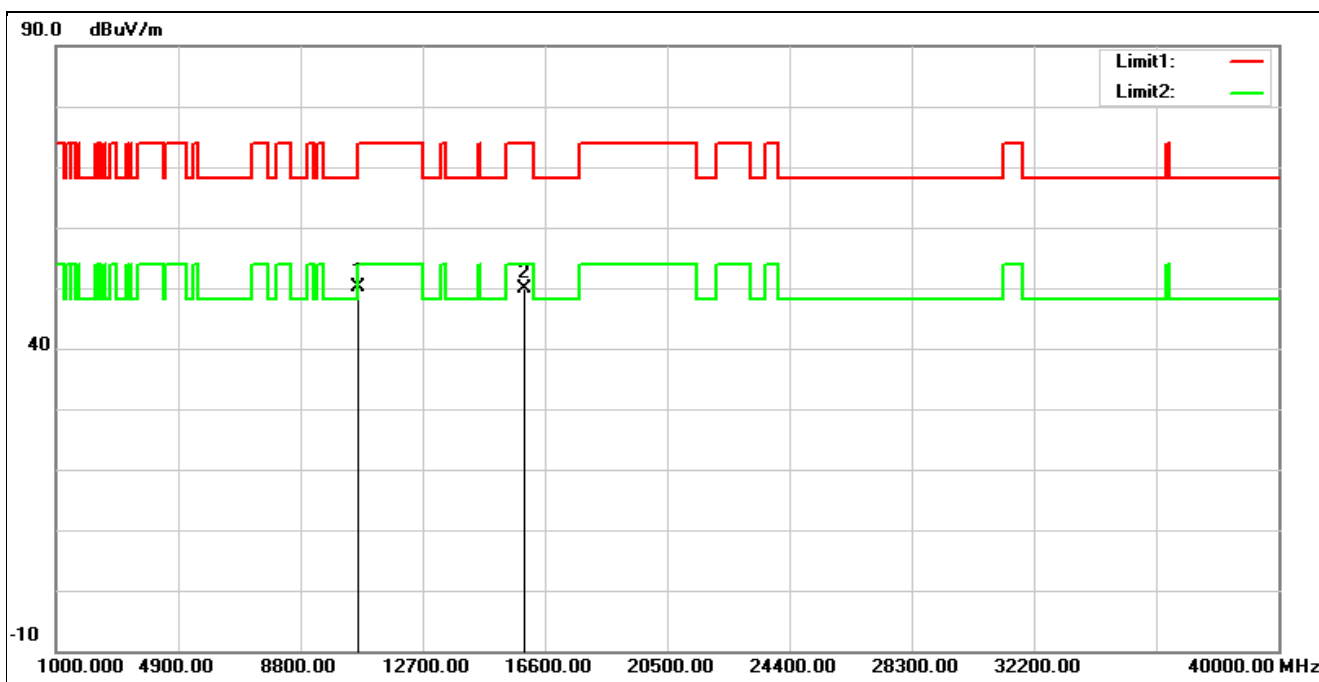


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	35.70	14.40	50.10	74.00	-23.90	peak
2	15930.000	33.21	16.64	49.85	74.00	-24.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

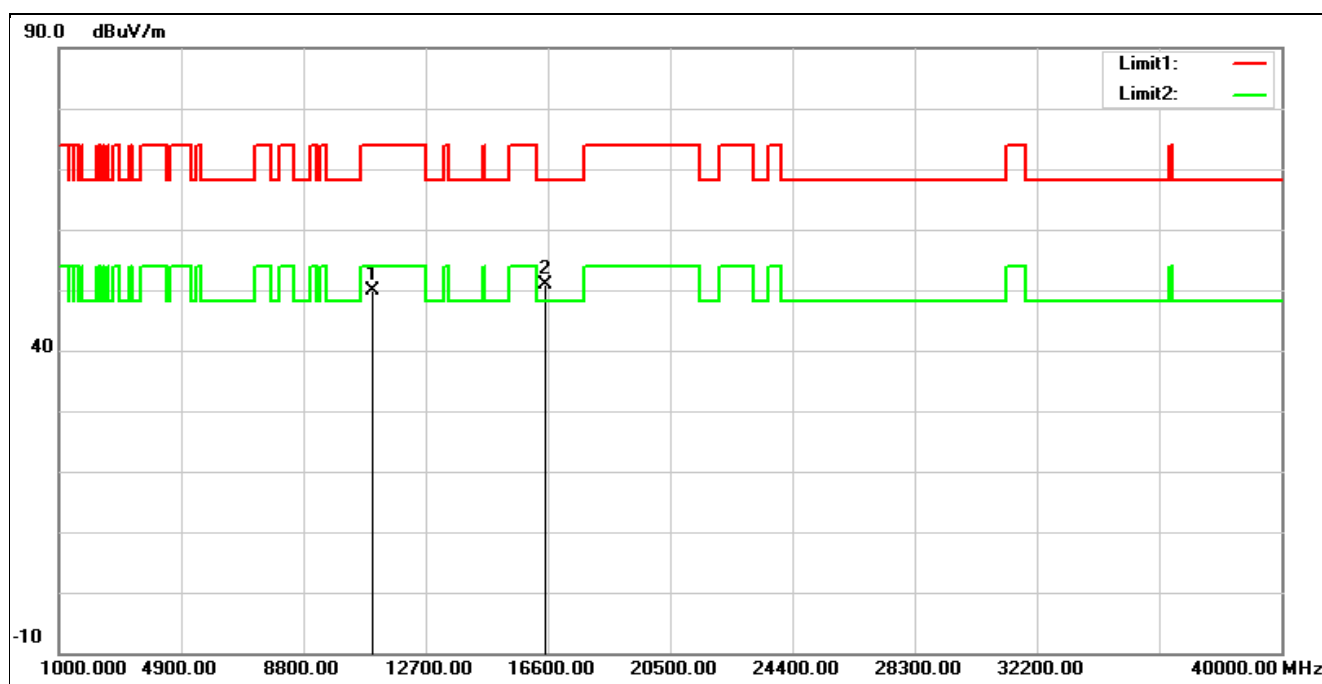


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.11	14.75	49.86	74.00	-24.14	peak
2*	16530.000	32.99	17.92	50.91	68.20	-17.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

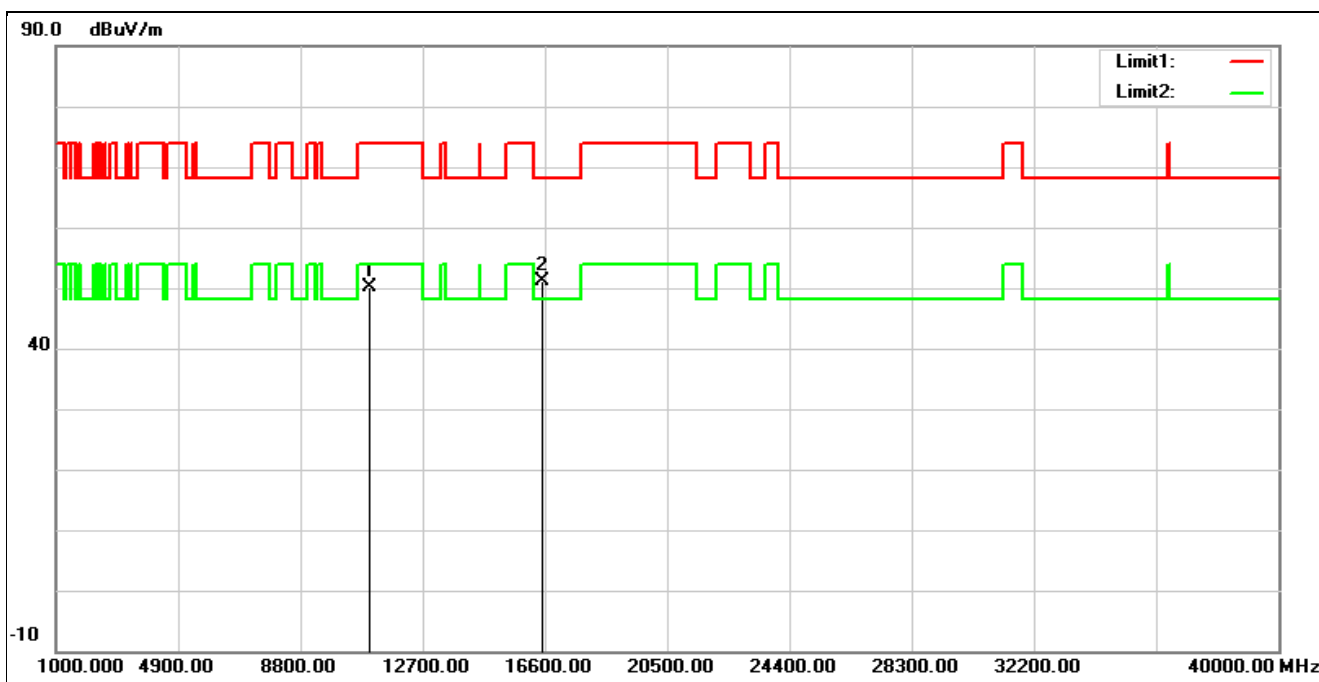


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.45	14.75	50.20	74.00	-23.80	peak
2*	16530.000	33.27	17.92	51.19	68.20	-17.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

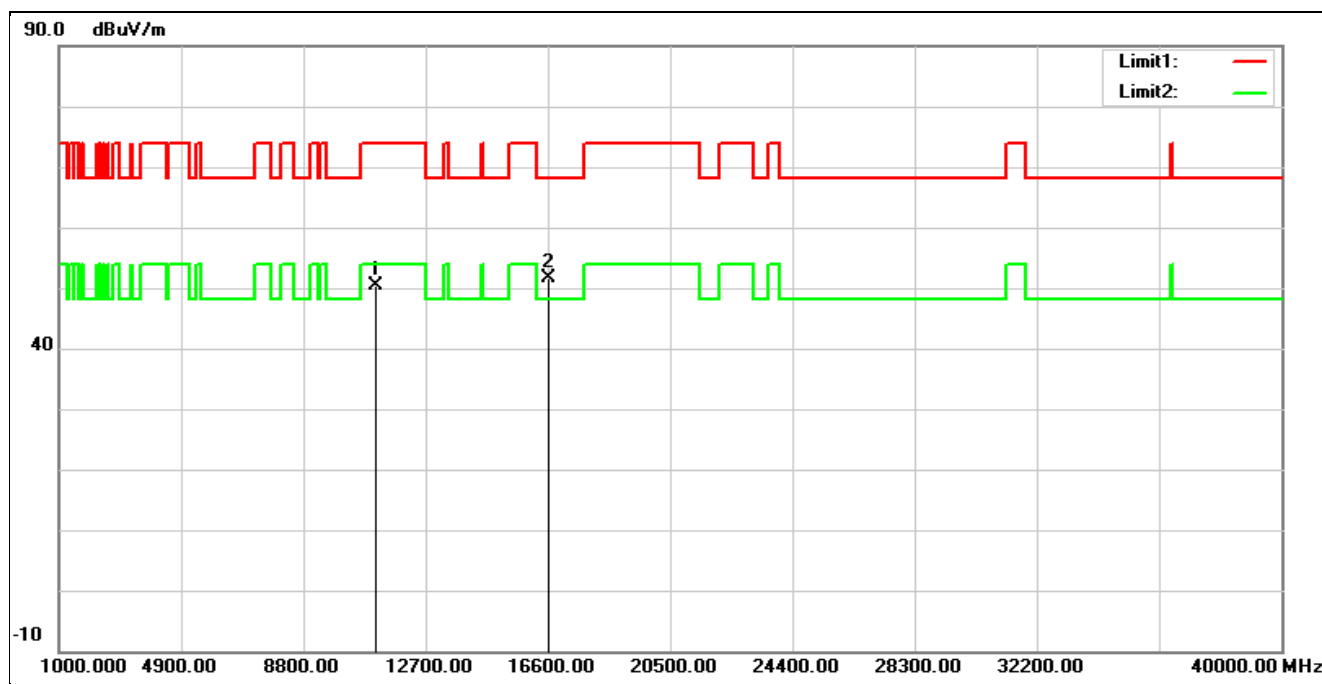


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.54	14.82	50.36	74.00	-23.64	peak
2*	16650.000	33.10	18.49	51.59	68.20	-16.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5550 MHz		
Remark:			

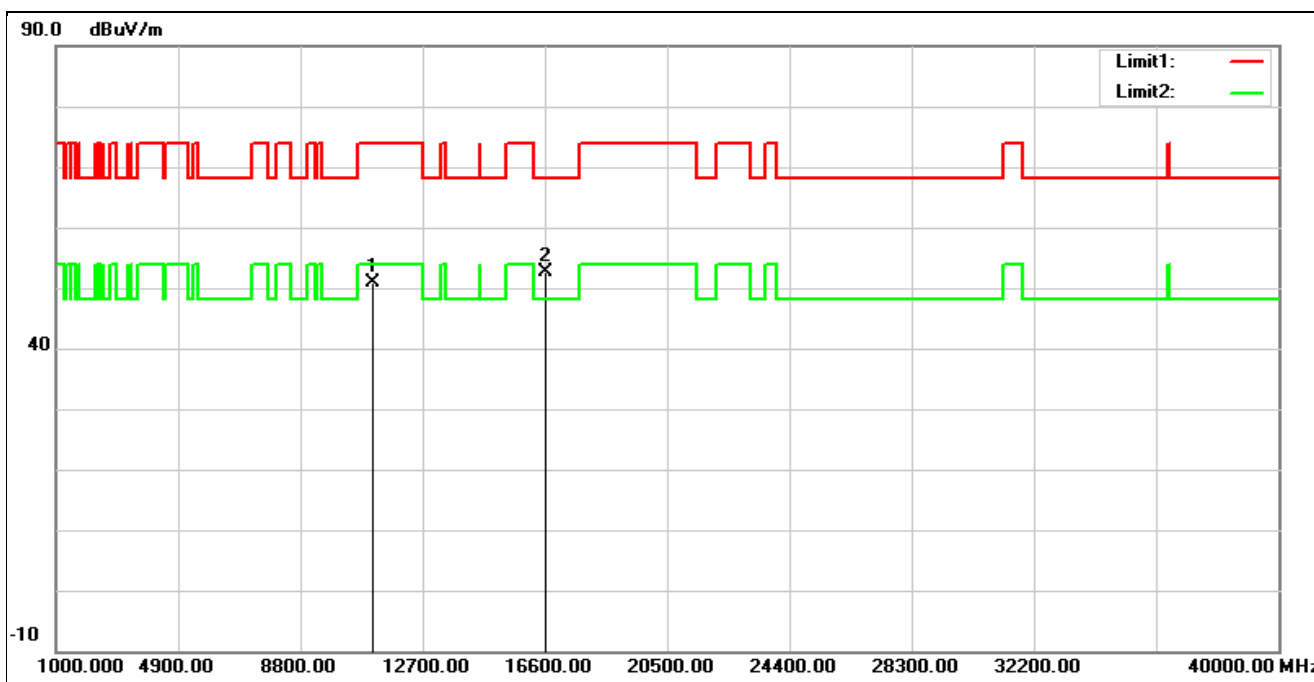


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.94	14.82	50.76	74.00	-23.24	peak
2*	16650.000	34.08	18.49	52.57	68.20	-15.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

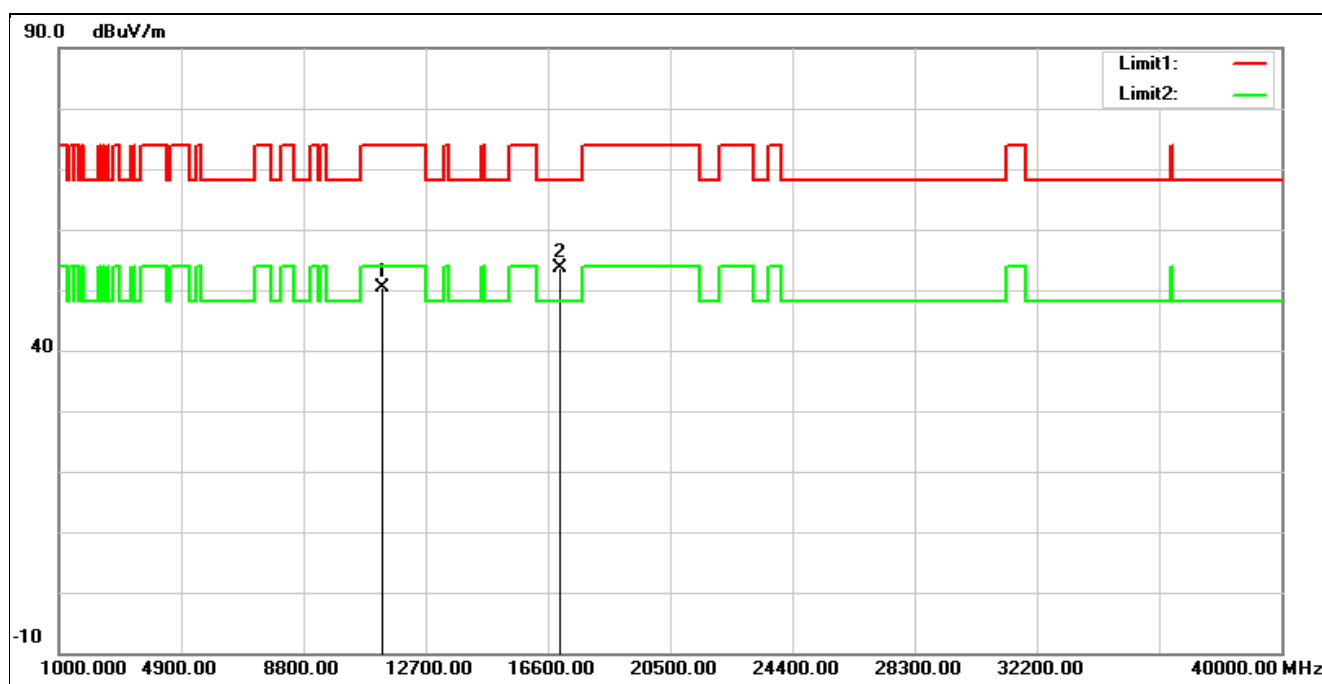


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.53	14.84	50.37	74.00	-23.63	peak
2*	17010.000	33.57	20.09	53.66	68.20	-14.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

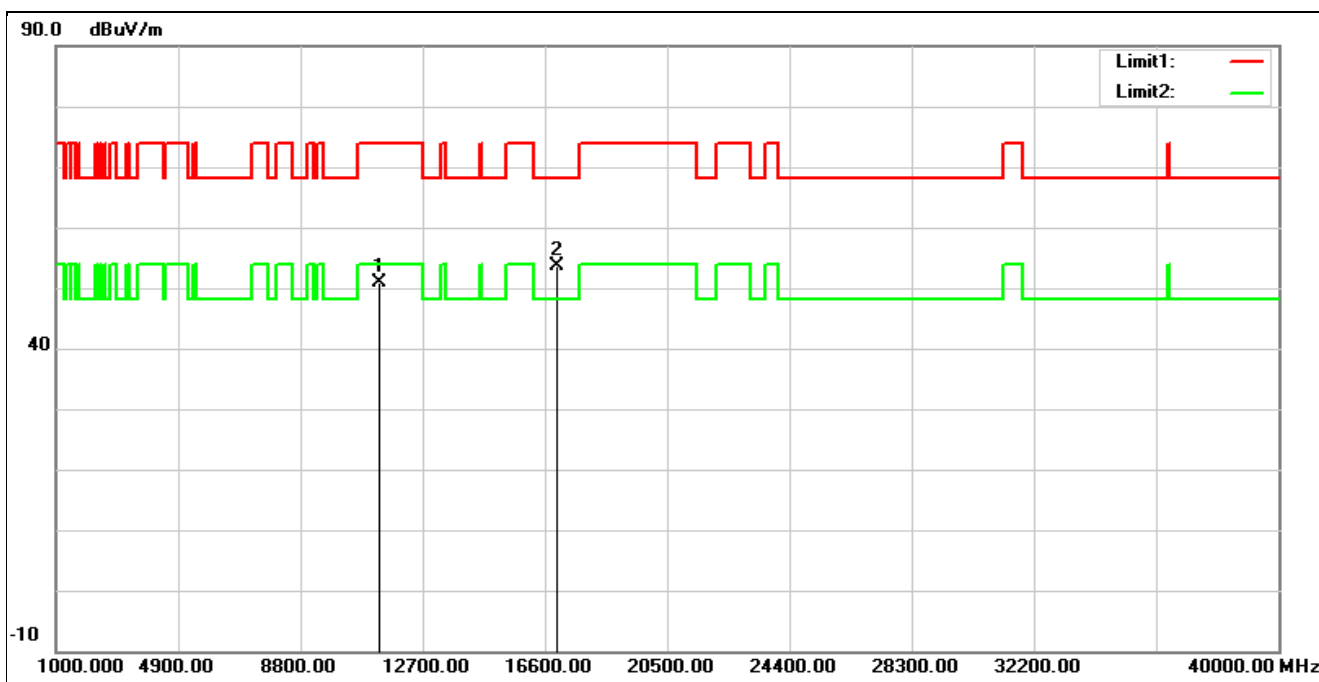


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	36.07	14.84	50.91	74.00	-23.09	peak
2*	17010.000	33.51	20.09	53.60	68.20	-14.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

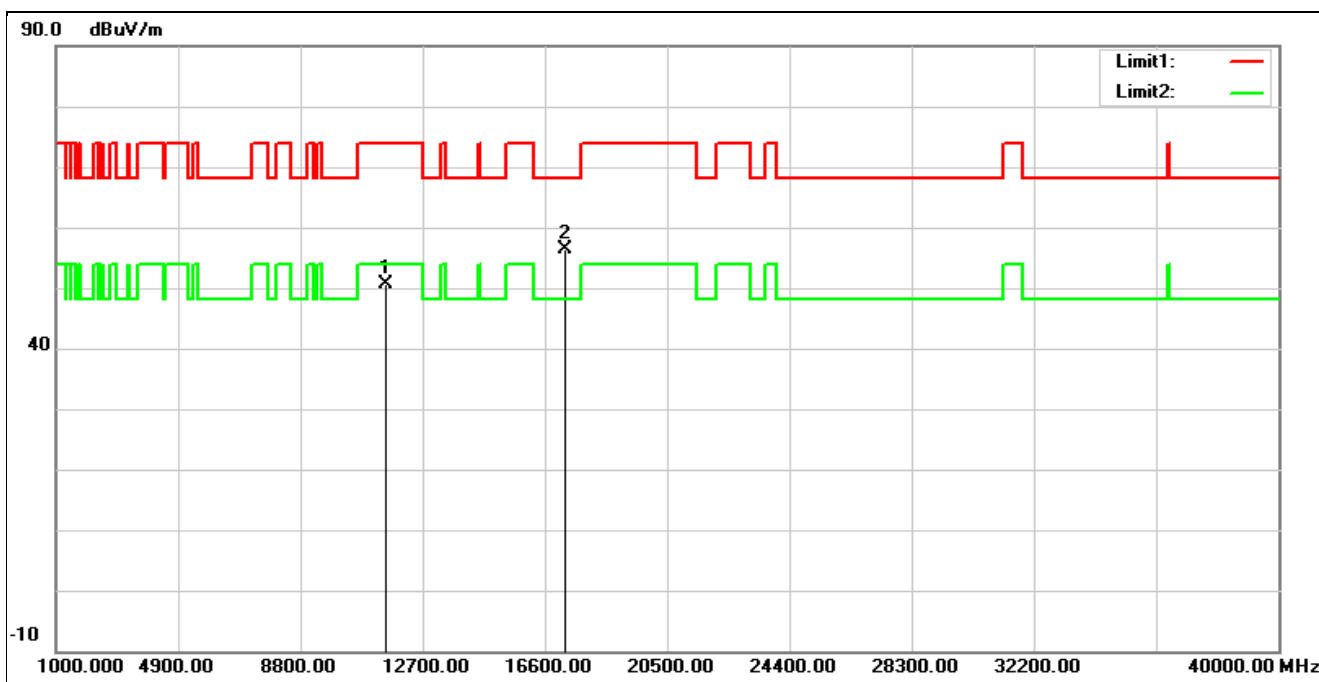


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.22	15.42	50.64	74.00	-23.36	peak
2*	17265.000	34.13	22.32	56.45	68.20	-11.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

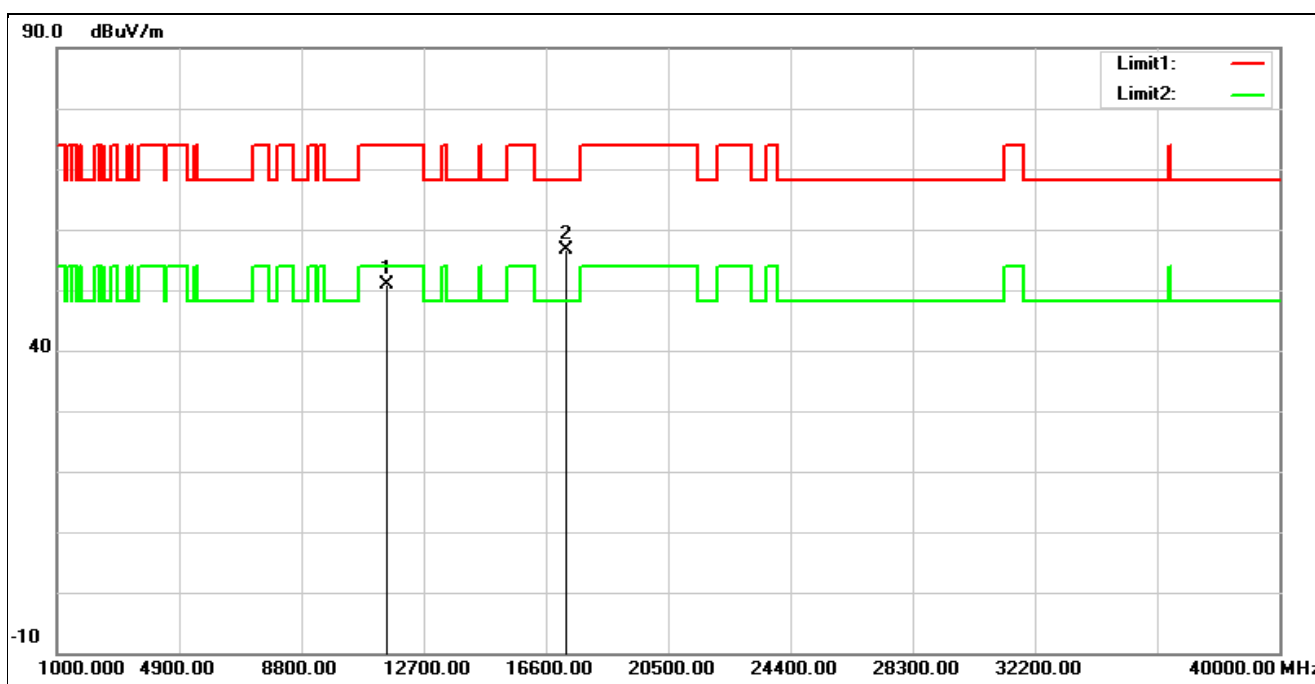


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.56	15.42	50.98	74.00	-23.02	peak
2*	17265.000	34.20	22.32	56.52	68.20	-11.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

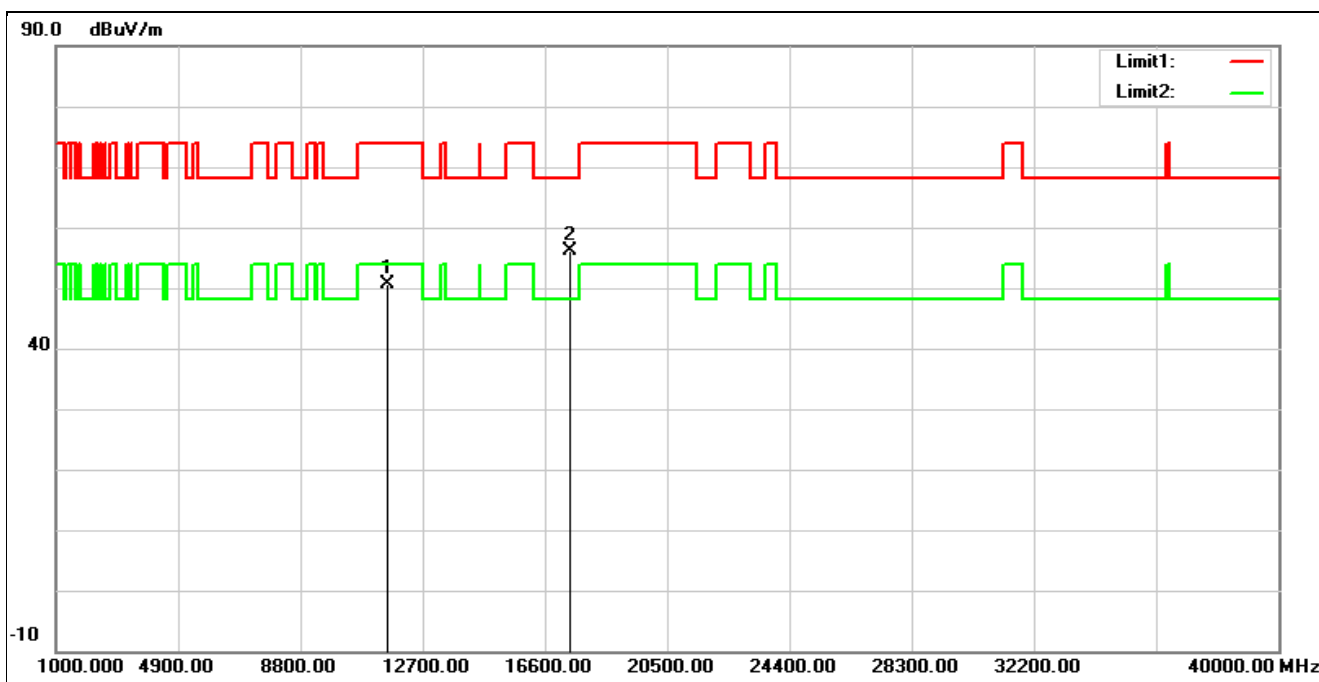


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.50	15.14	50.64	74.00	-23.36	peak
2*	17385.000	33.04	23.11	56.15	68.20	-12.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

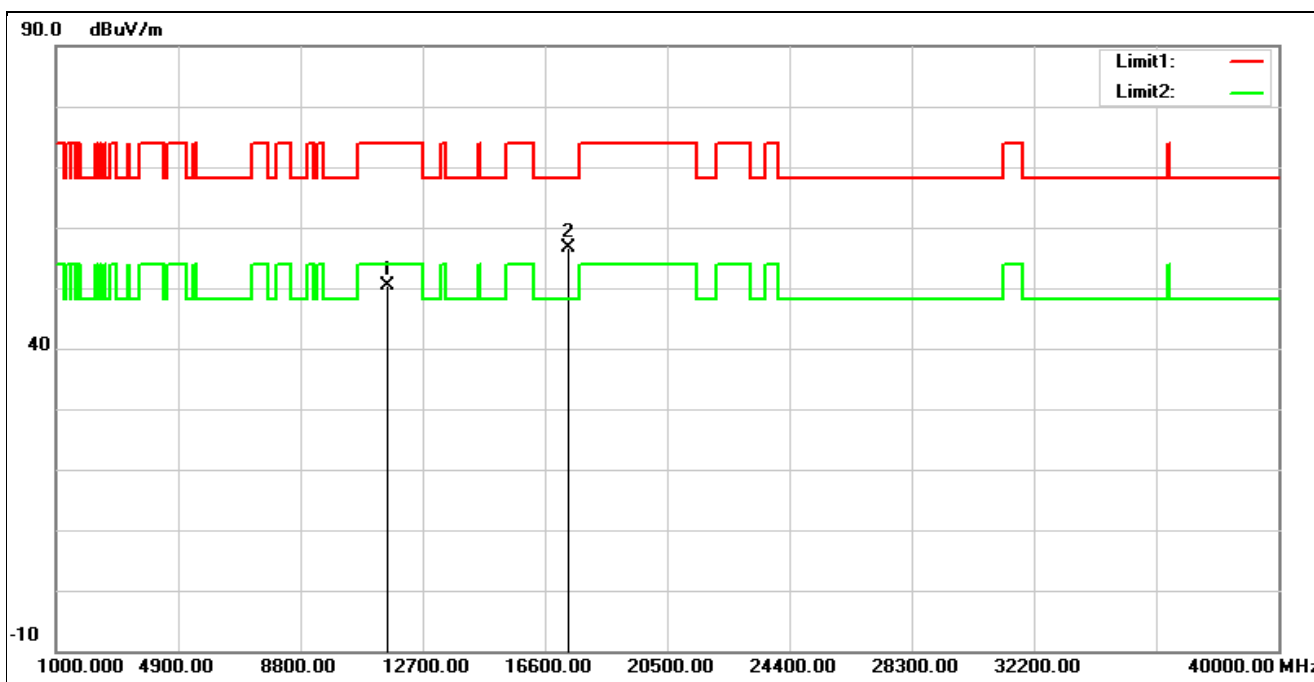


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.28	15.14	50.42	74.00	-23.58	peak
2*	17355.000	33.55	22.96	56.51	68.20	-11.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Remark:			

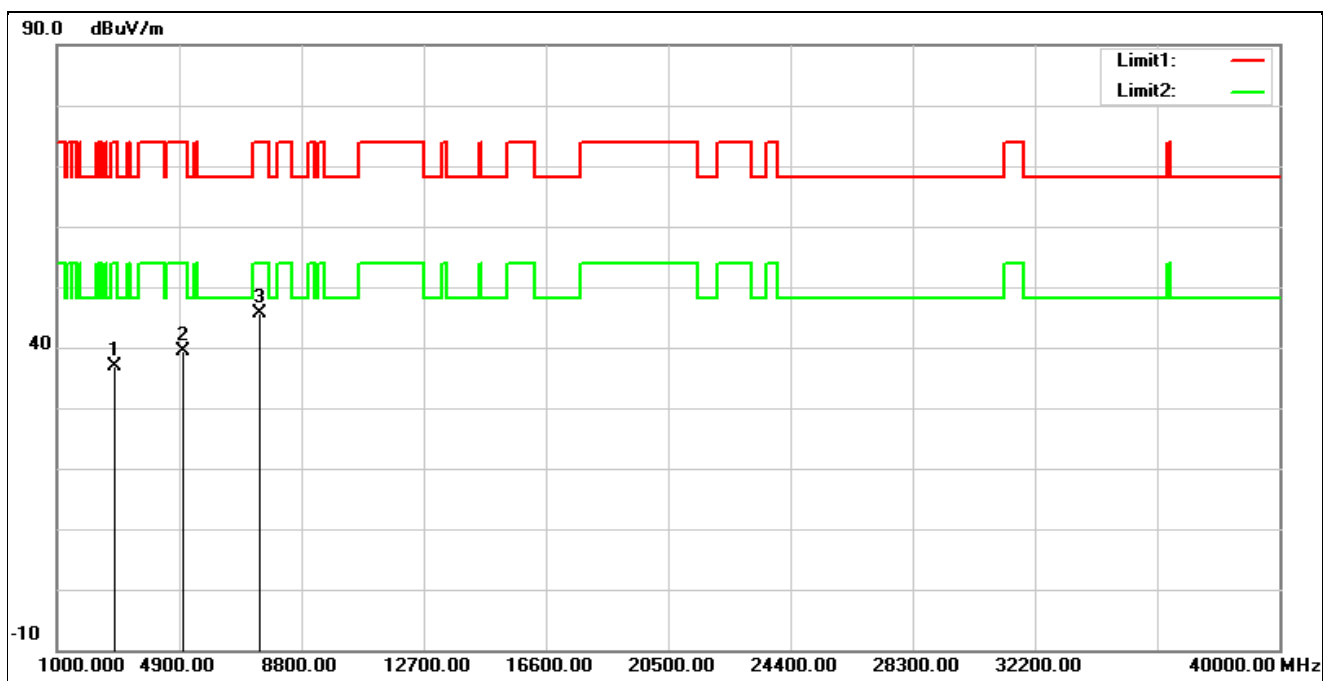

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	42.20	-5.27	36.93	74.00	-37.07	peak
2	5046.000	38.28	1.06	39.34	74.00	-34.66	peak
3*	7443.000	37.40	8.35	45.75	74.00	-28.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Remark:			

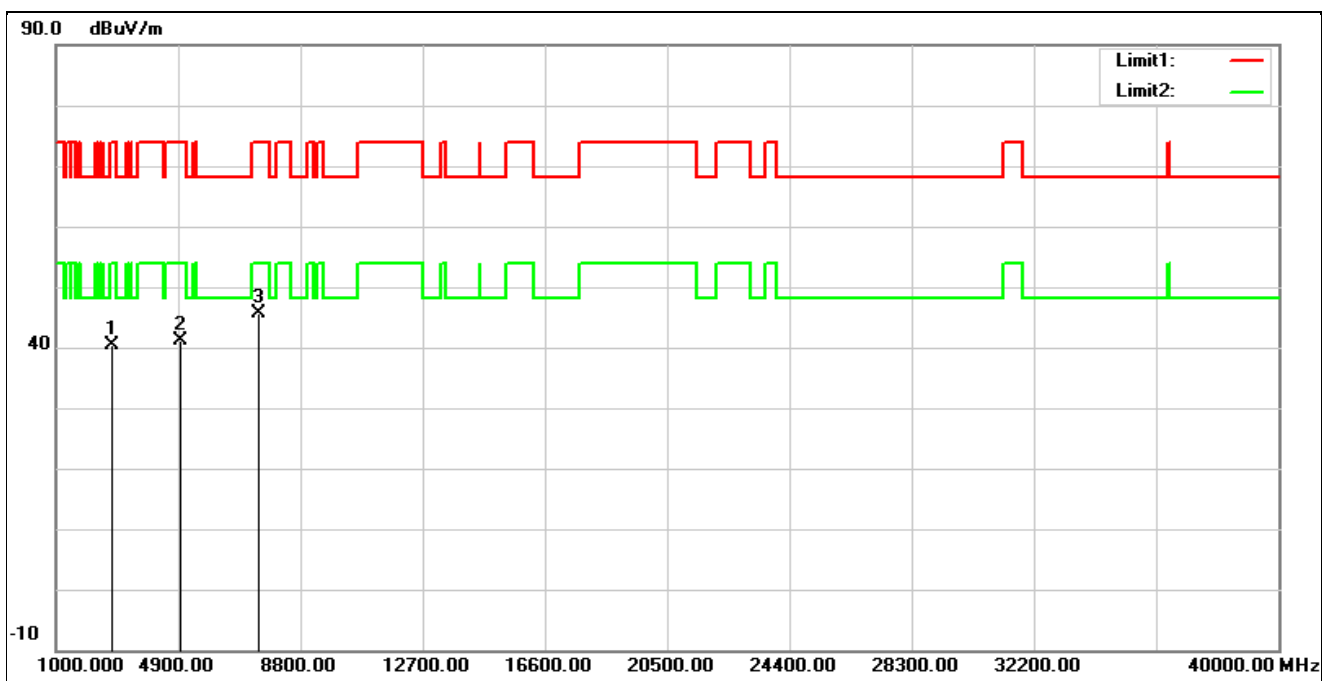


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	45.75	-5.38	40.37	74.00	-33.63	peak
2	4978.000	40.52	0.64	41.16	74.00	-32.84	peak
3*	7443.000	37.33	8.35	45.68	74.00	-28.32	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5180 MHz		
Remark:			

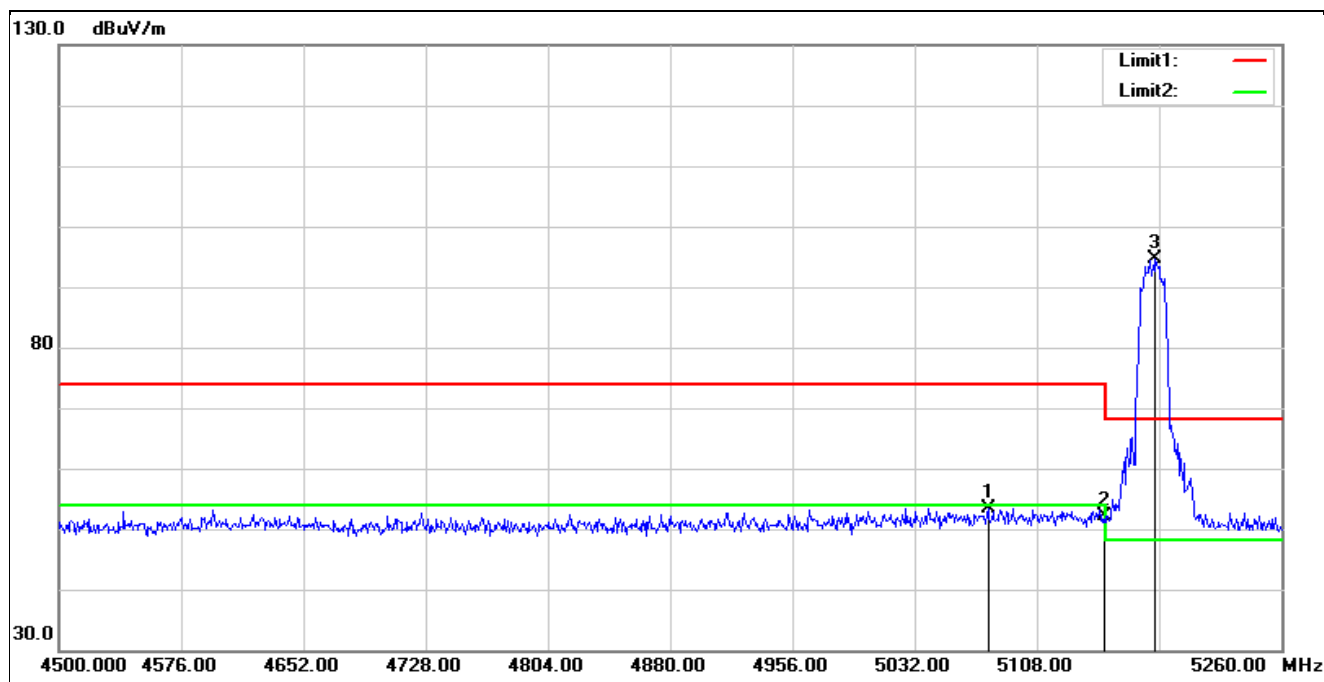


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.600	52.25	1.24	53.49	74.00	-20.51	peak
2	5150.000	50.61	1.42	52.03	74.00	-21.97	peak
3*	5181.720	93.42	1.33	94.75	68.20	26.55	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

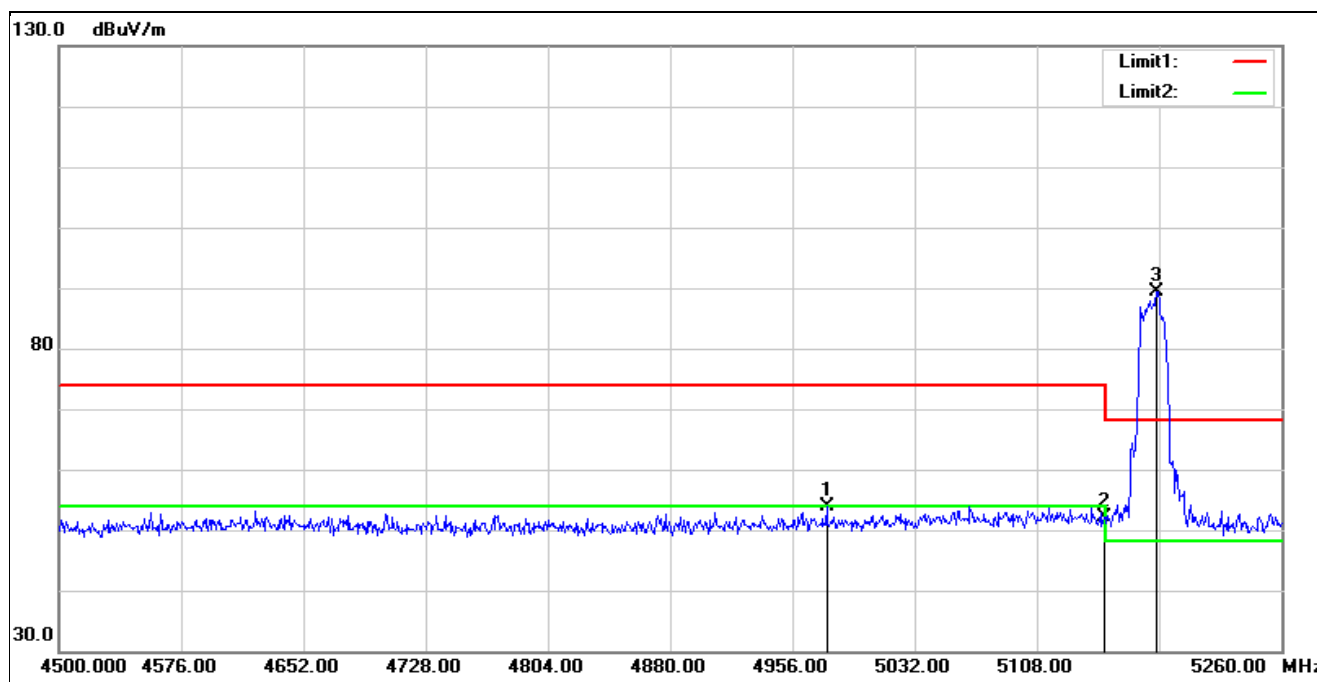


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4977.280	53.37	0.63	54.00	74.00	-20.00	peak
2	5150.000	50.72	1.42	52.14	74.00	-21.86	peak
3*	5182.480	88.17	1.33	89.50	68.20	21.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

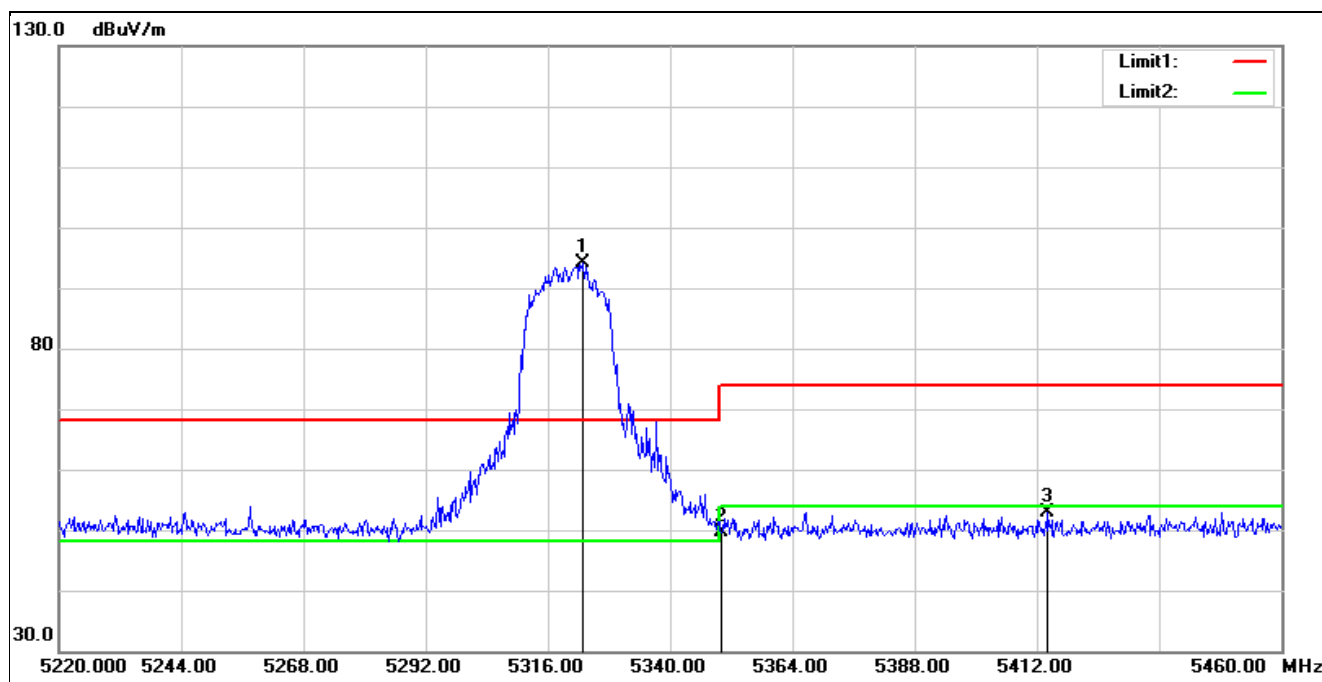


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.960	93.02	0.99	94.01	68.20	25.81	peak
2	5350.000	48.48	1.08	49.56	74.00	-24.44	peak
3	5414.160	51.38	1.60	52.98	74.00	-21.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

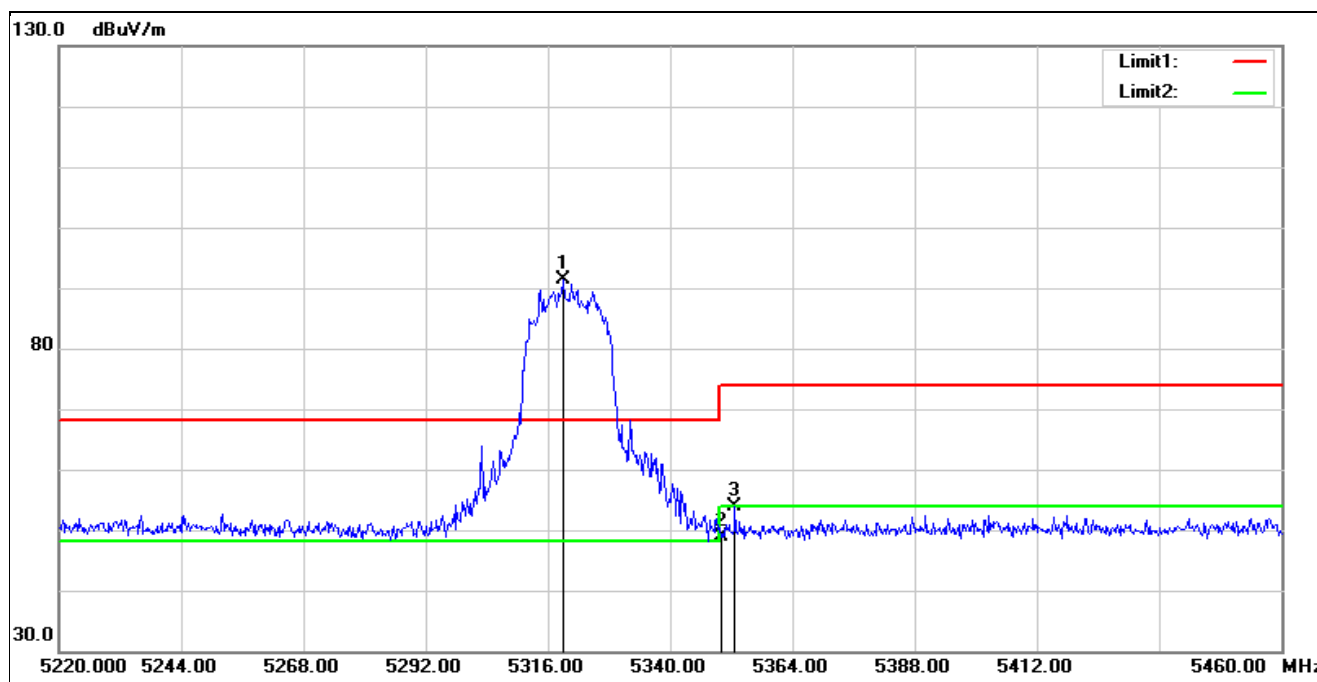


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5319.120	90.47	0.98	91.45	68.20	23.25	peak
2	5350.000	47.91	1.08	48.99	74.00	-25.01	peak
3	5352.720	52.80	1.10	53.90	74.00	-20.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

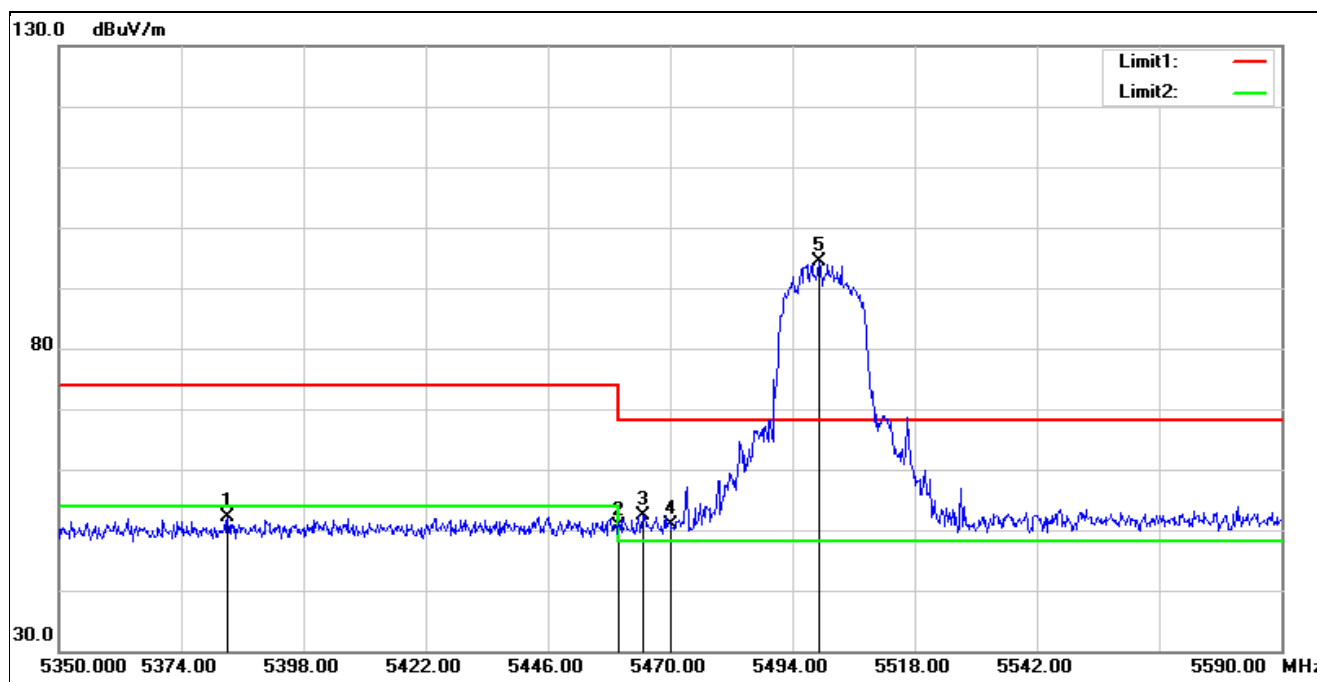


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5383.120	50.70	1.39	52.09	74.00	-21.91	peak
2	5460.000	48.84	1.73	50.57	74.00	-23.43	peak
3	5464.720	50.75	1.73	52.48	68.20	-15.72	peak
4	5470.000	49.04	1.74	50.78	68.20	-17.42	peak
5*	5499.280	92.54	1.78	94.32	68.20	26.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

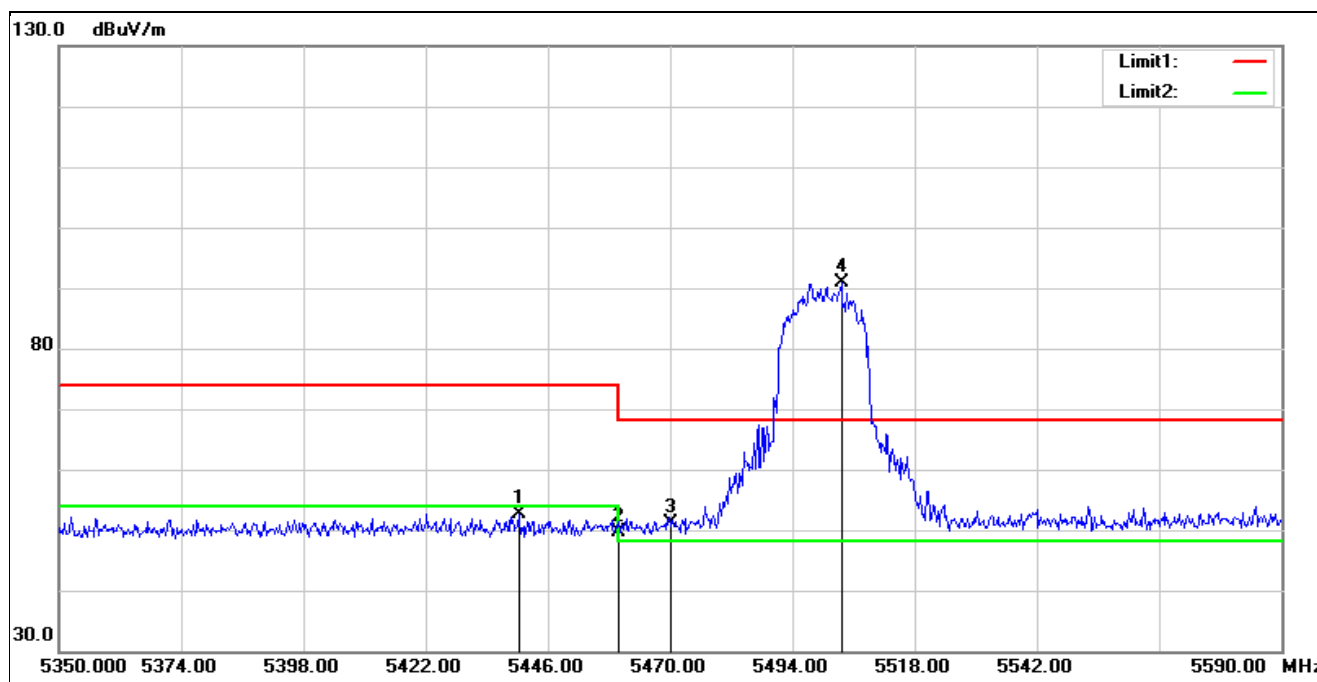


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.240	51.05	1.68	52.73	74.00	-21.27	peak
2	5460.000	47.94	1.73	49.67	74.00	-24.33	peak
3	5470.000	49.41	1.74	51.15	68.20	-17.05	peak
4*	5503.600	89.04	1.79	90.83	68.20	22.63	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5700 MHz		
Remark:			

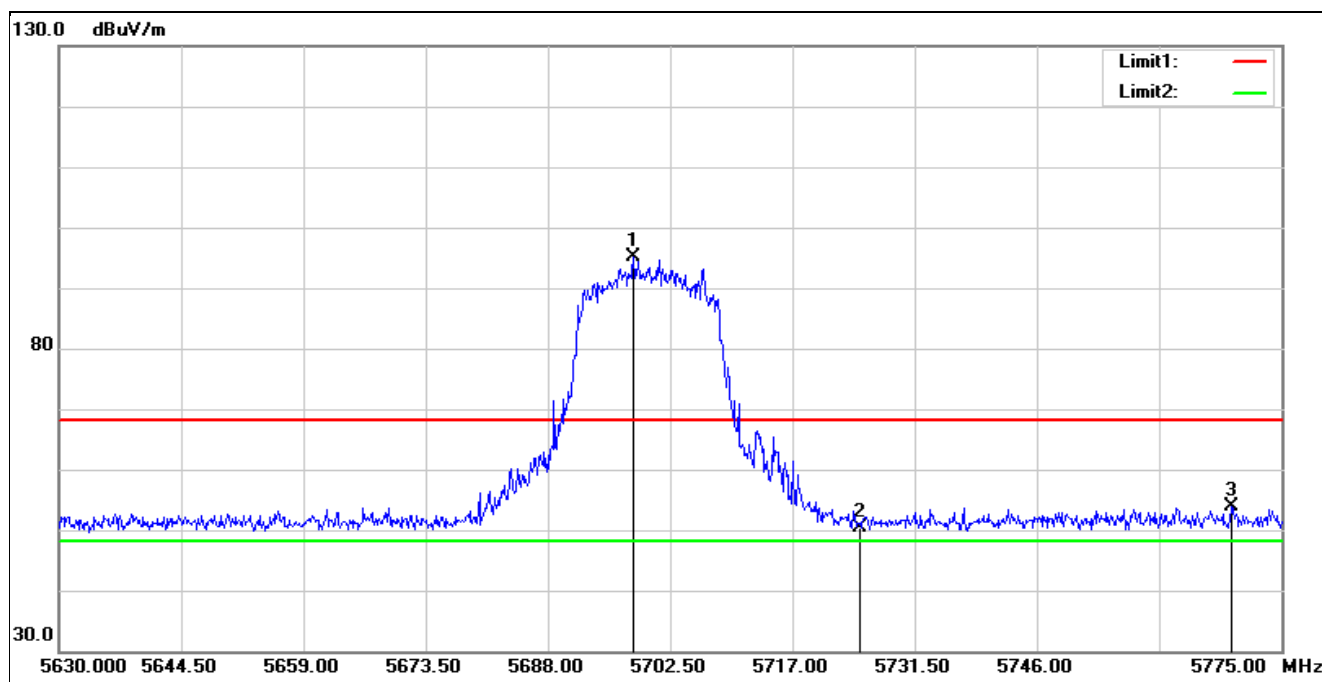


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5698.150	93.13	2.06	95.19	68.20	26.99	peak
2	5725.000	48.16	2.30	50.46	68.20	-17.74	peak
3	5769.055	51.27	2.64	53.91	68.20	-14.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5700 MHz		
Remark:			

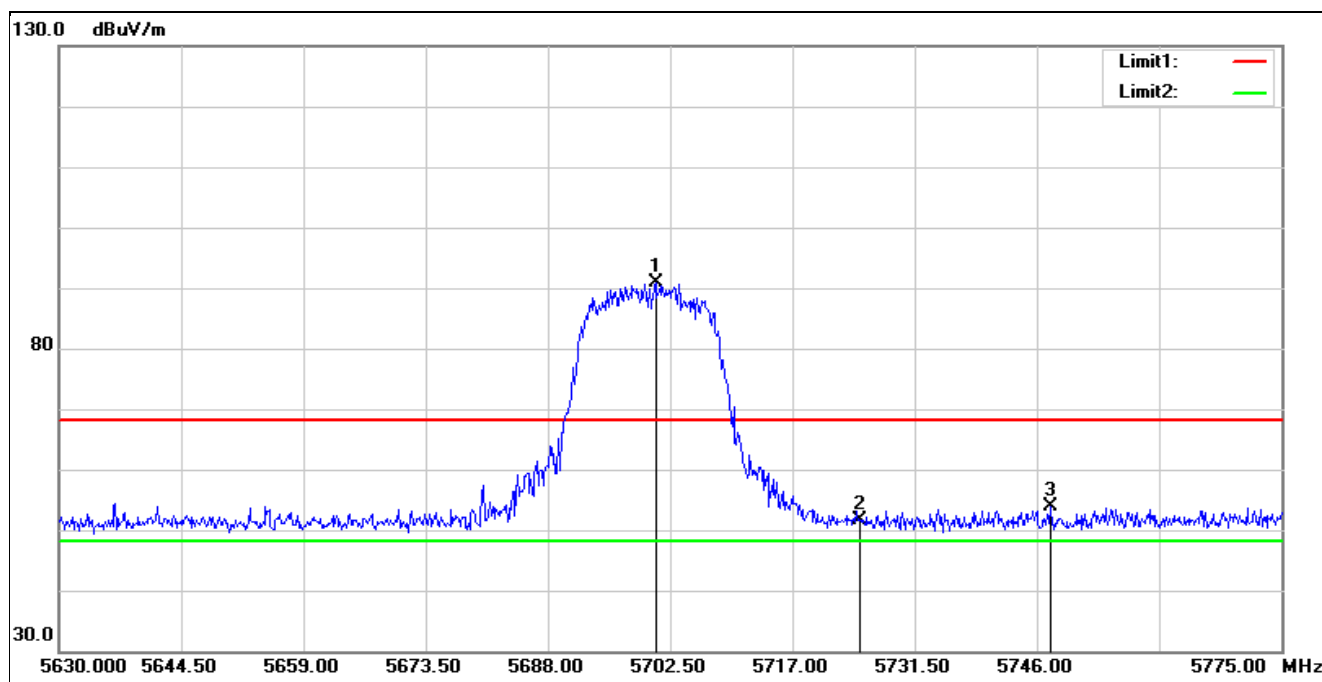


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5700.760	88.87	2.07	90.94	68.20	22.74	peak
2	5725.000	49.26	2.30	51.56	68.20	-16.64	peak
3	5747.595	51.37	2.52	53.89	68.20	-14.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5745 MHz		
Remark:			

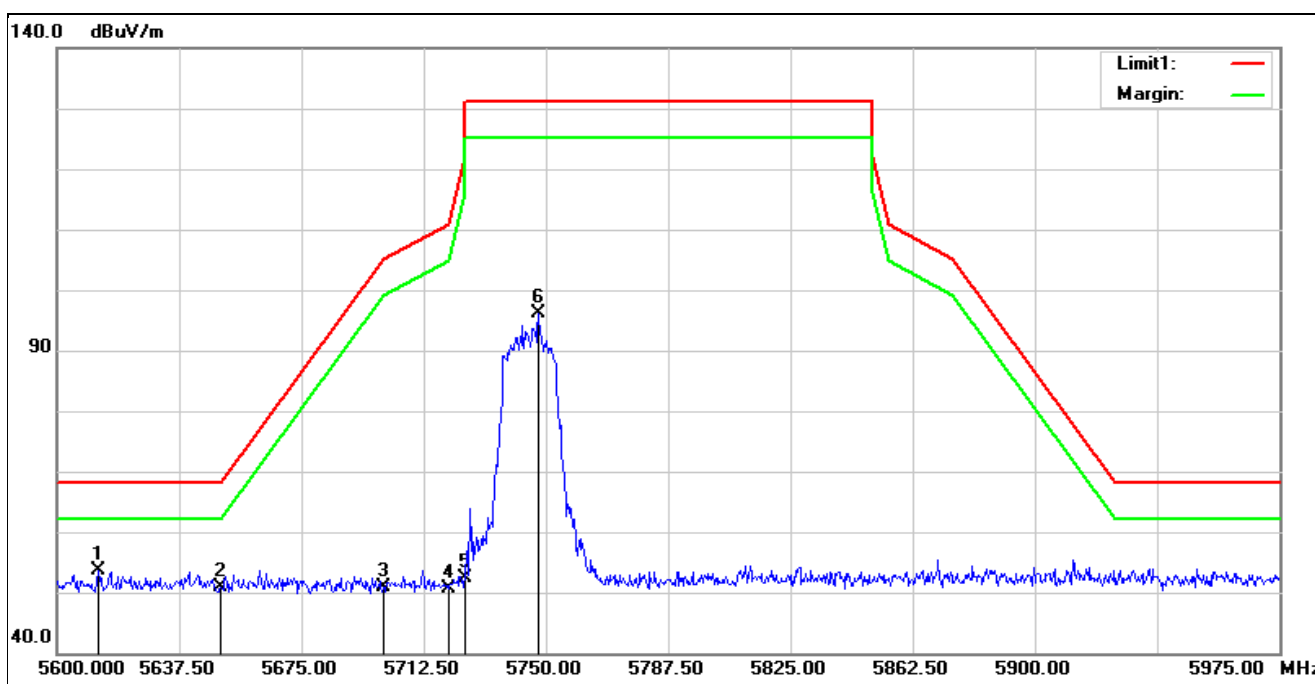


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5612.750	51.62	1.99	53.61	68.20	-14.59	peak
2	5650.000	49.07	1.90	50.97	68.20	-17.23	peak
3	5700.000	48.78	2.06	50.84	105.20	-54.36	peak
4	5720.000	48.37	2.26	50.63	110.80	-60.17	peak
5	5725.000	50.12	2.30	52.42	122.20	-69.78	peak
6	5747.750	93.51	2.52	96.03	131.20	-35.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5745 MHz		
Remark:			

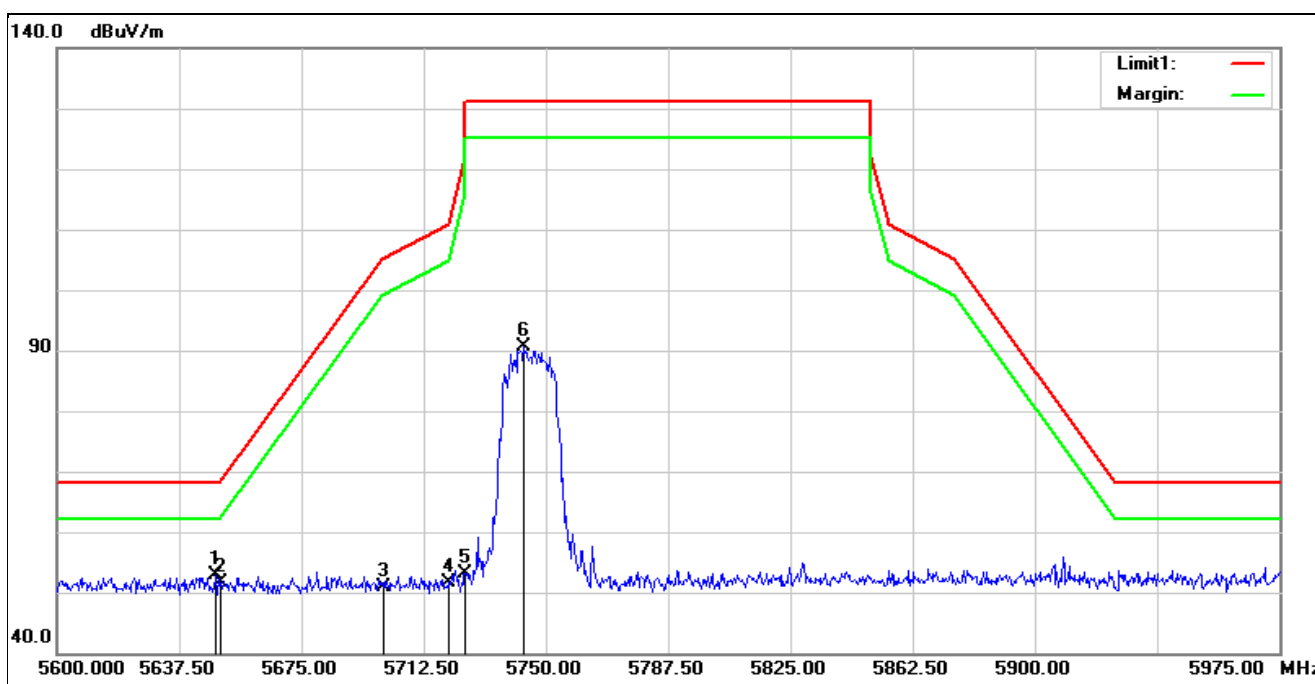


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5648.750	50.99	1.91	52.90	68.20	-15.30	peak
2	5650.000	49.62	1.90	51.52	68.20	-16.68	peak
3	5700.000	48.80	2.06	50.86	105.20	-54.34	peak
4	5720.000	49.26	2.26	51.52	110.80	-59.28	peak
5	5725.000	50.79	2.30	53.09	122.20	-69.11	peak
6	5743.250	88.12	2.49	90.61	131.20	-40.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5825 MHz		
Remark:			

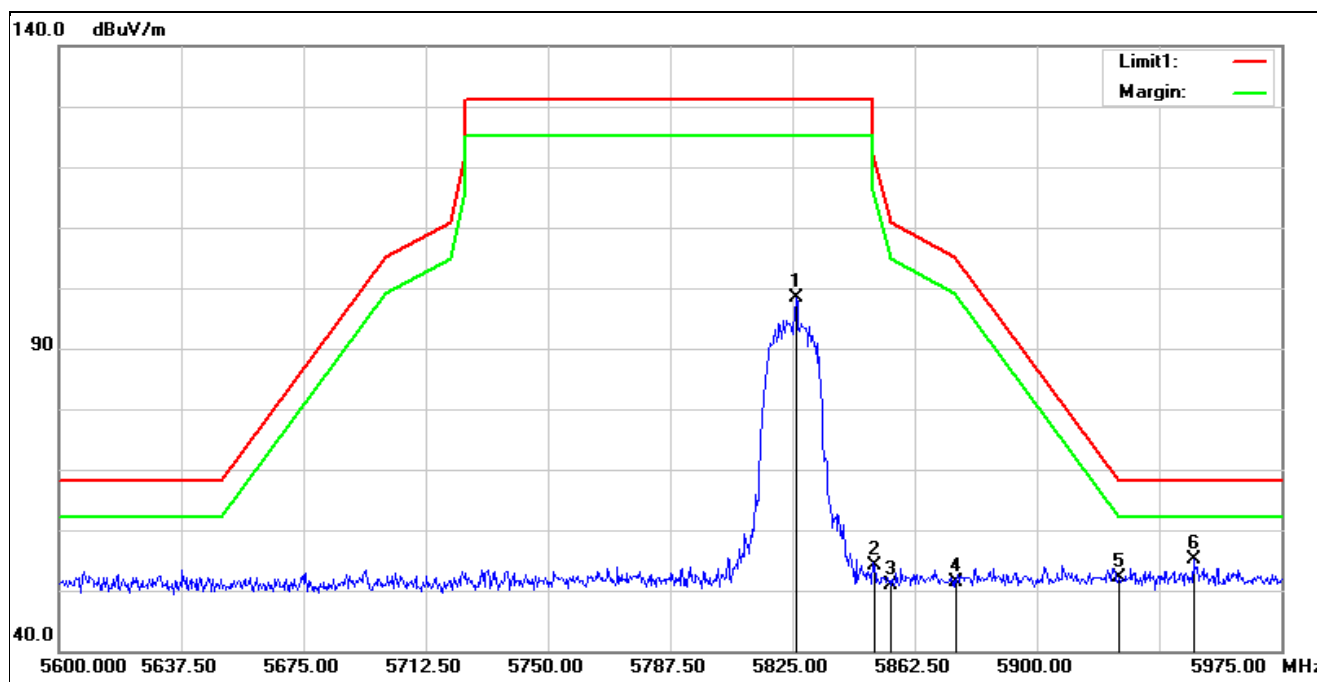


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5826.125	95.40	2.89	98.29	131.20	-32.91	peak
2	5850.000	51.22	2.98	54.20	122.20	-68.00	peak
3	5855.000	47.94	3.01	50.95	110.80	-59.85	peak
4	5875.000	48.24	3.07	51.31	105.20	-53.89	peak
5	5925.000	48.97	3.10	52.07	68.20	-16.13	peak
6*	5948.000	52.12	3.03	55.15	68.20	-13.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5825 MHz		
Remark:			

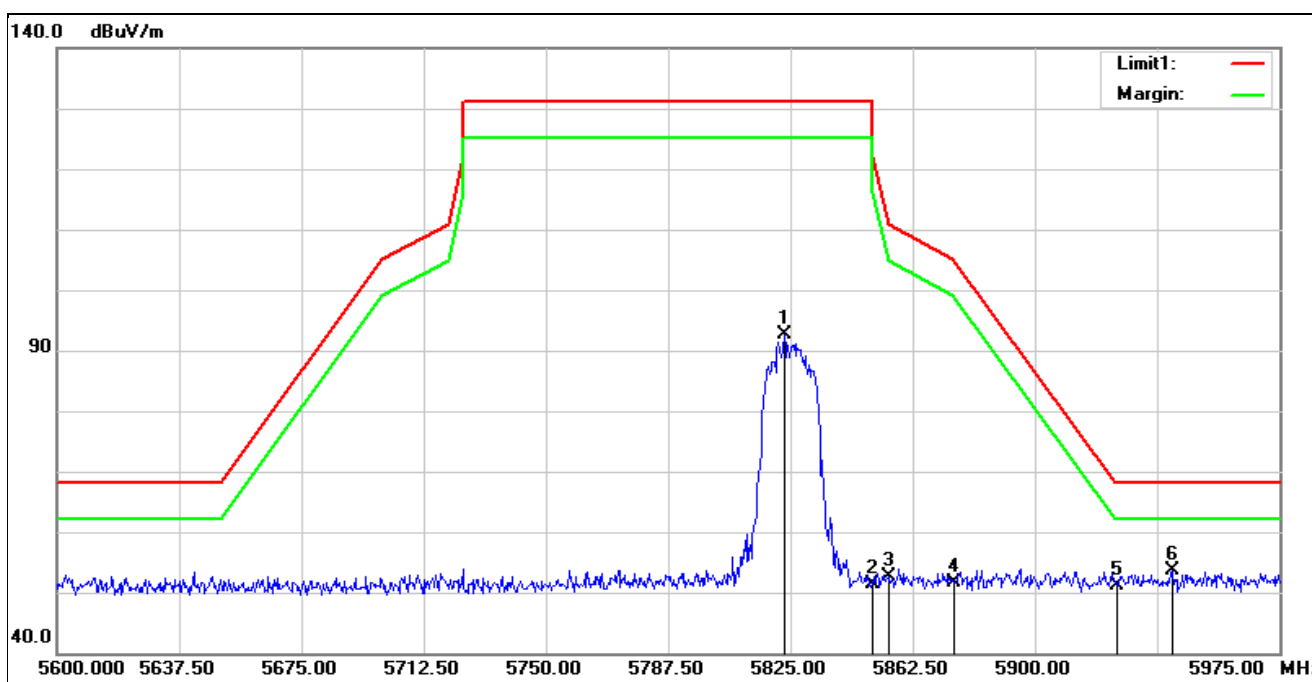


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5823.125	89.70	2.89	92.59	131.20	-38.61	peak
2	5850.000	48.28	2.98	51.26	122.20	-70.94	peak
3	5855.000	49.56	3.01	52.57	110.80	-58.23	peak
4	5875.000	48.65	3.07	51.72	105.20	-53.48	peak
5	5925.000	47.96	3.10	51.06	68.20	-17.14	peak
6*	5942.000	50.47	3.05	53.52	68.20	-14.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

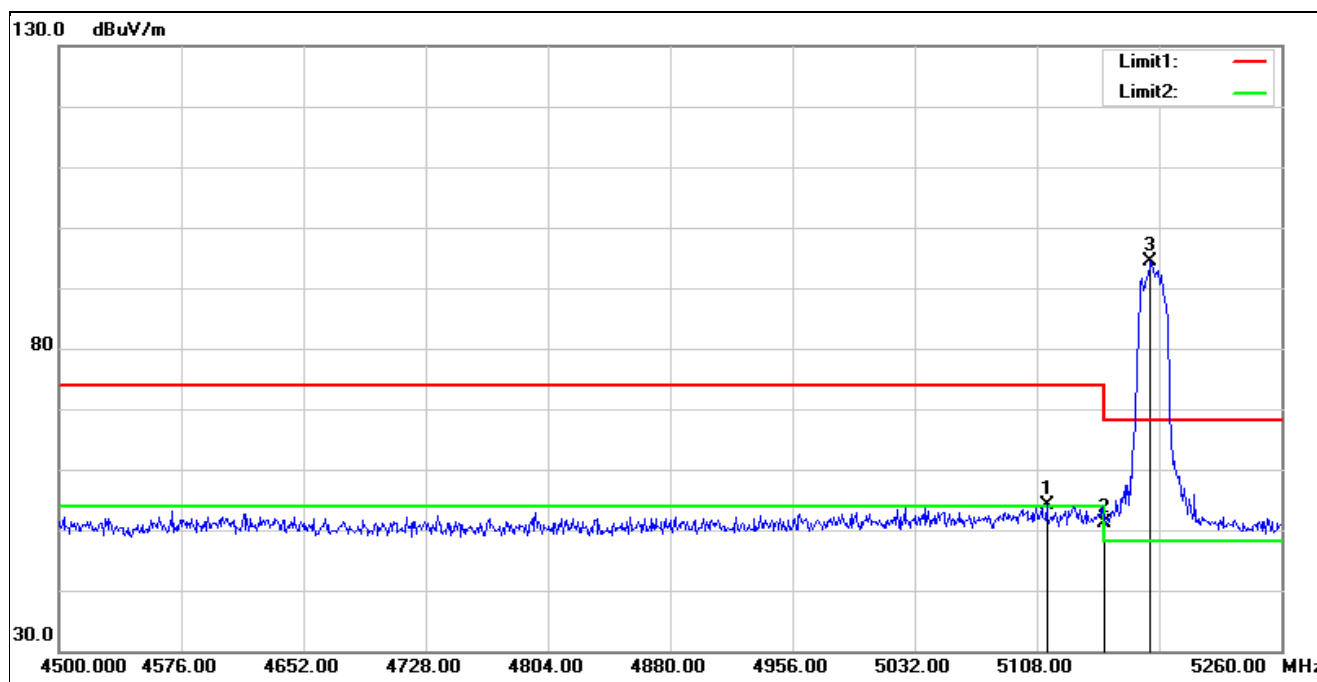


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5114.080	52.64	1.37	54.01	74.00	-19.99	peak
2	5150.000	49.76	1.42	51.18	74.00	-22.82	peak
3*	5178.680	92.91	1.35	94.26	68.20	26.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

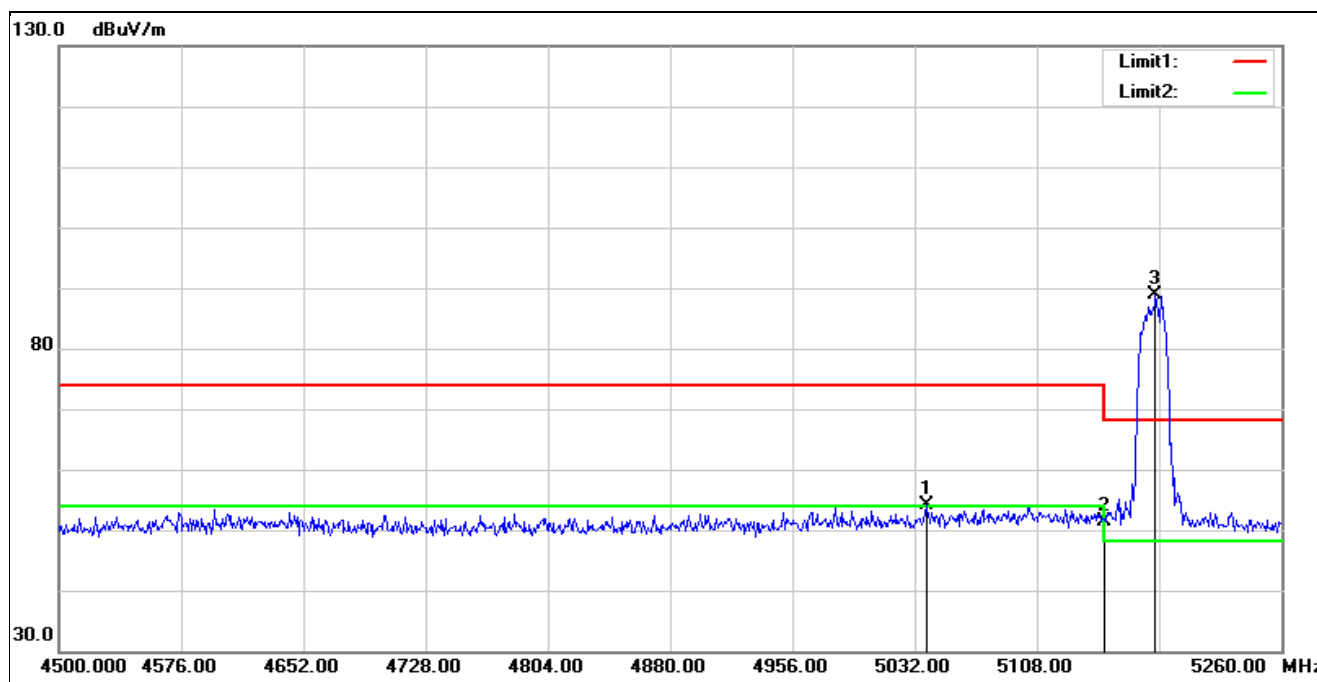


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5039.600	53.22	1.01	54.23	74.00	-19.77	peak
2	5150.000	49.91	1.42	51.33	74.00	-22.67	peak
3*	5181.720	87.62	1.33	88.95	68.20	20.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

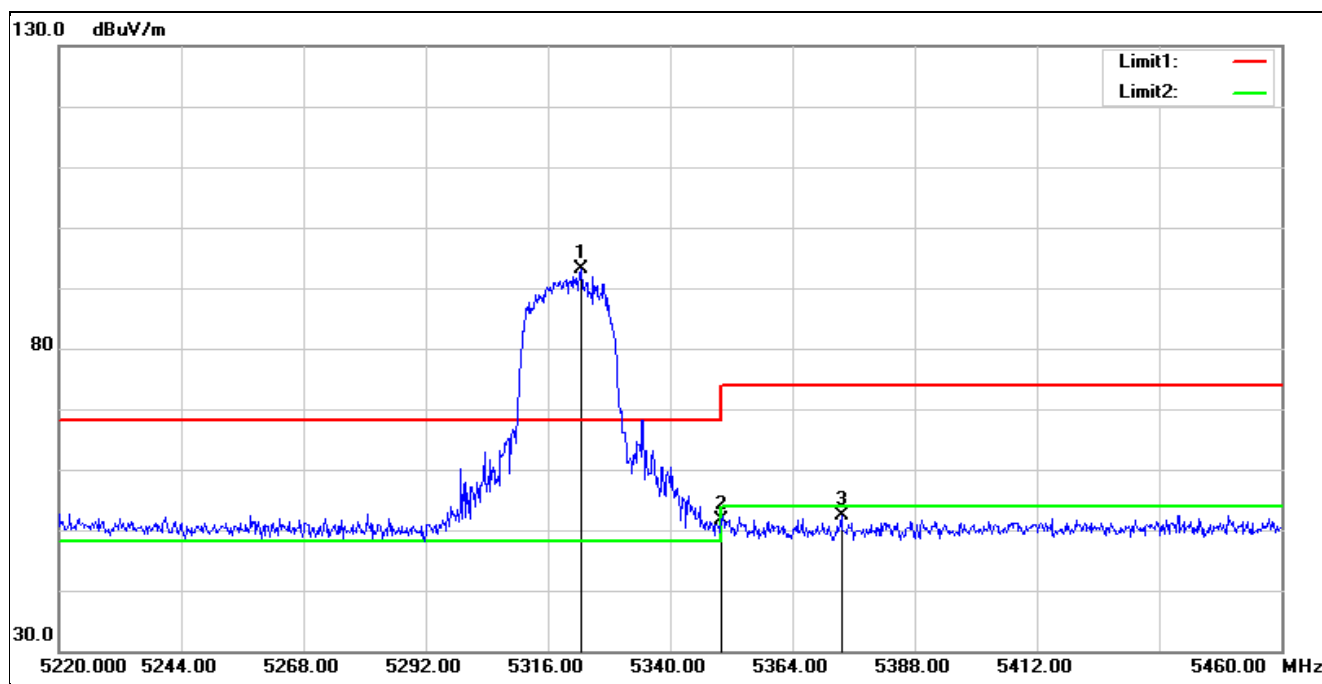


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.480	92.18	0.98	93.16	68.20	24.96	peak
2	5350.000	50.56	1.08	51.64	74.00	-22.36	peak
3	5373.600	51.02	1.30	52.32	74.00	-21.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

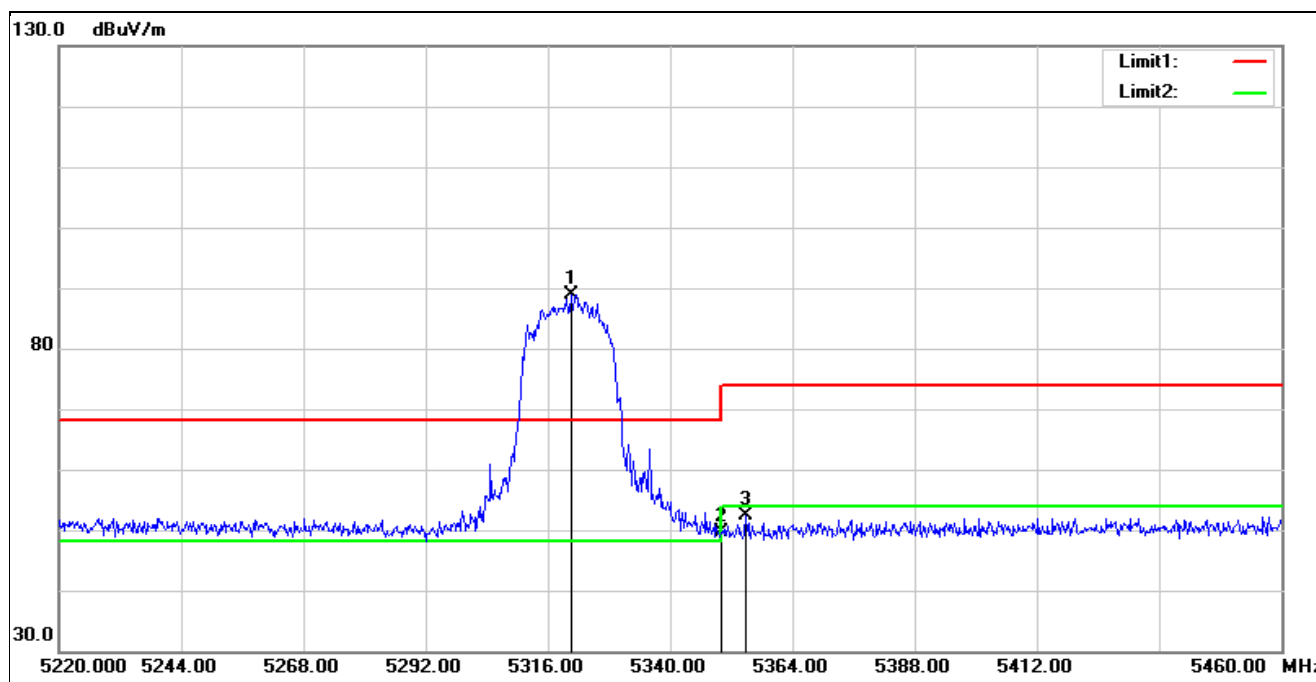


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5320.560	87.92	0.98	88.90	68.20	20.70	peak
2	5350.000	48.50	1.08	49.58	74.00	-24.42	peak
3	5354.880	51.16	1.13	52.29	74.00	-21.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

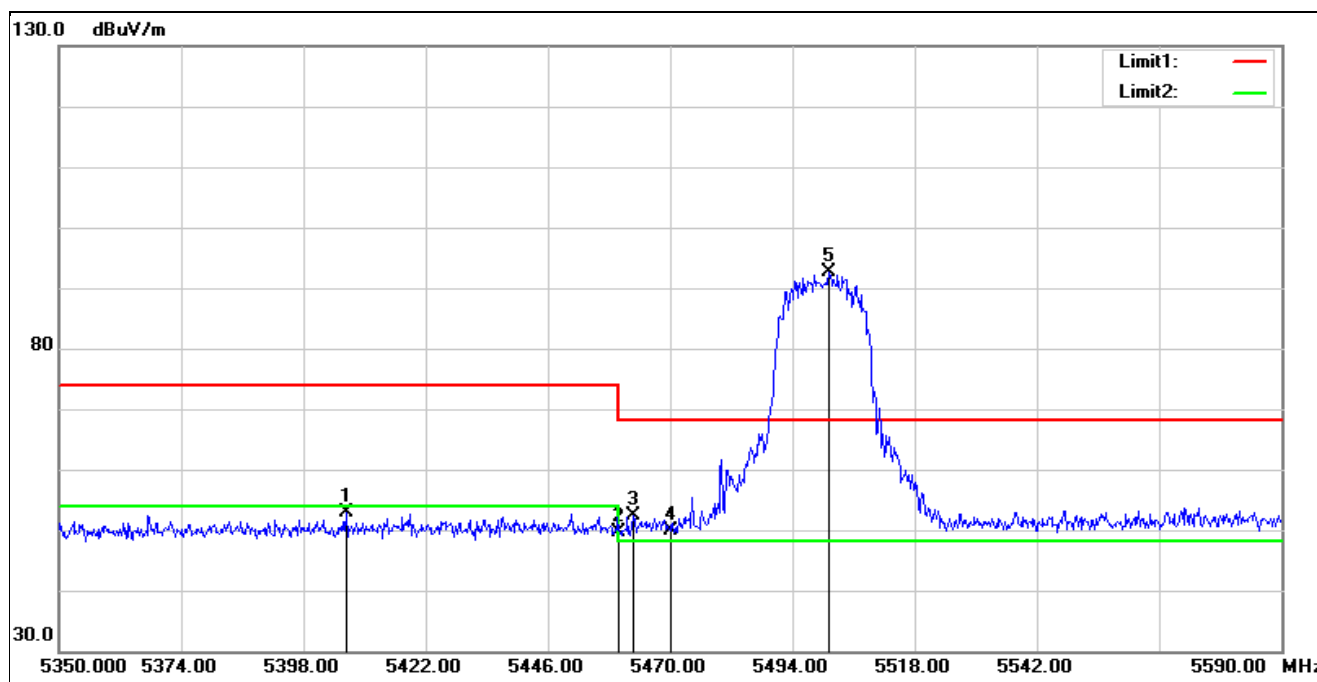


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5406.400	51.29	1.56	52.85	74.00	-21.15	peak
2	5460.000	47.91	1.73	49.64	74.00	-24.36	peak
3	5462.800	50.63	1.73	52.36	68.20	-15.84	peak
4	5470.000	48.18	1.74	49.92	68.20	-18.28	peak
5*	5501.200	90.92	1.78	92.70	68.20	24.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

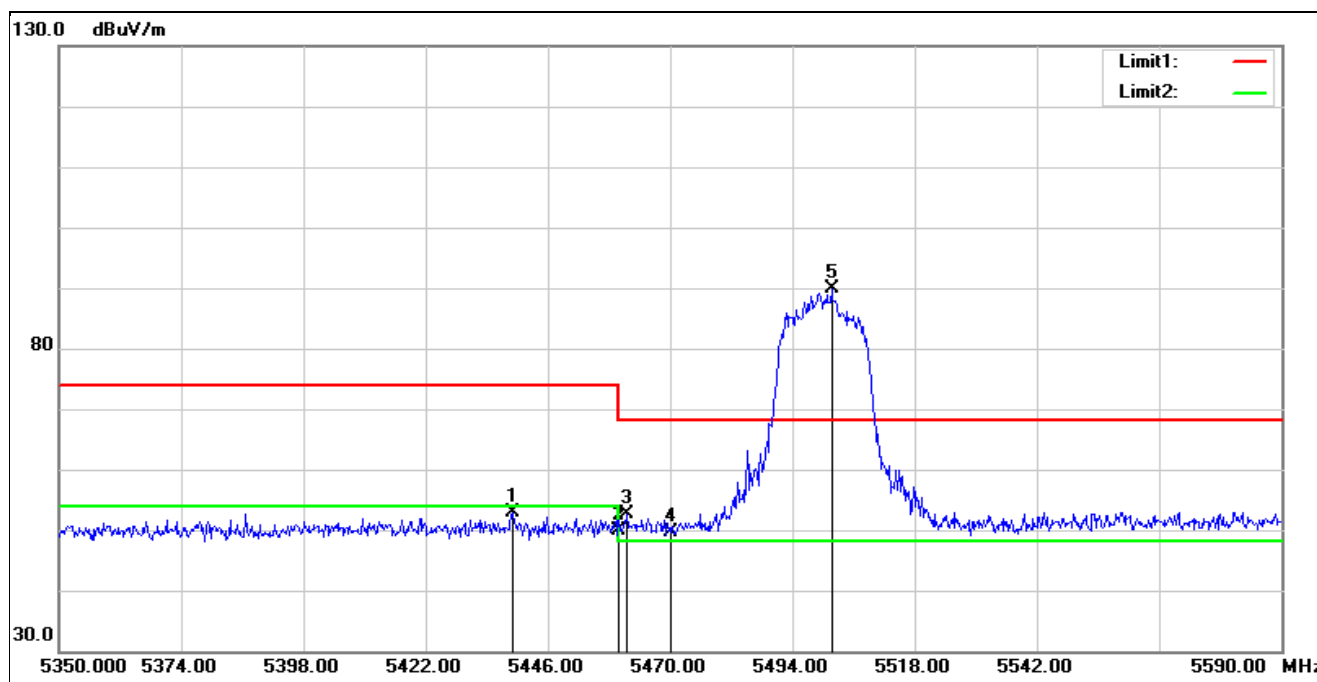


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.040	51.16	1.68	52.84	74.00	-21.16	peak
2	5460.000	48.26	1.73	49.99	74.00	-24.01	peak
3	5461.600	50.96	1.73	52.69	68.20	-15.51	peak
4	5470.000	47.99	1.74	49.73	68.20	-18.47	peak
5*	5501.680	88.09	1.79	89.88	68.20	21.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

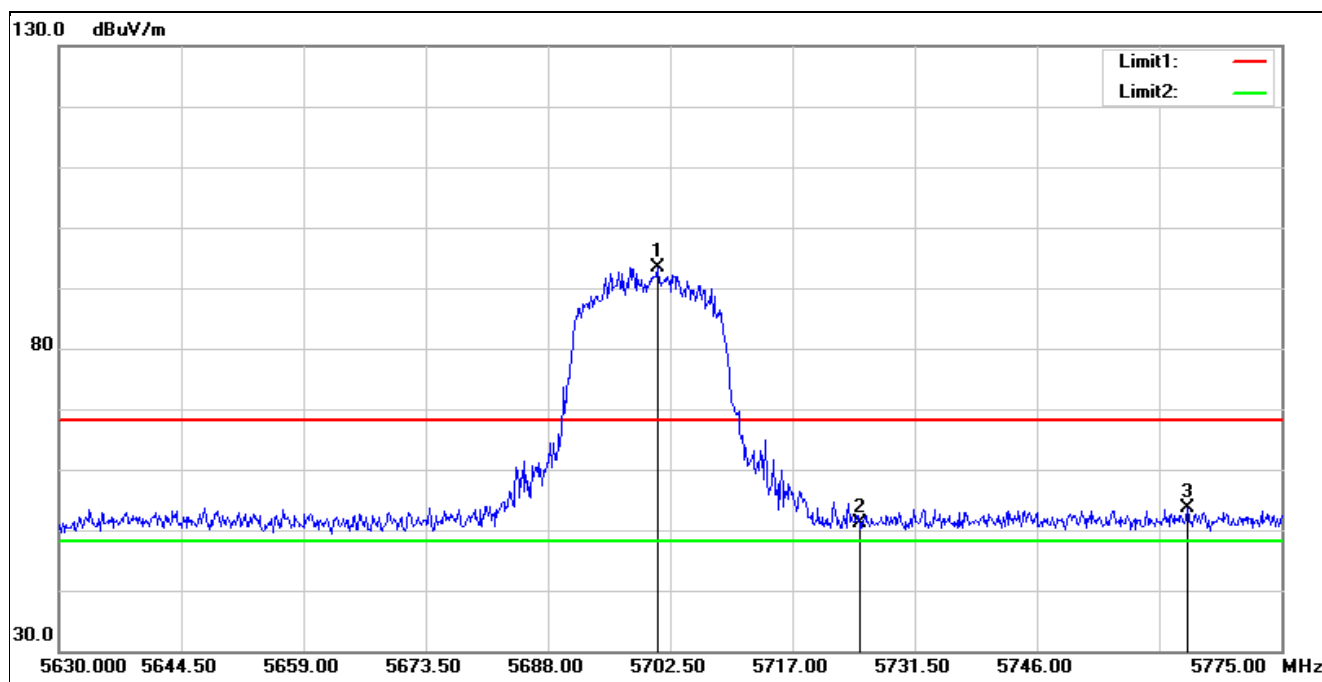


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.050	91.42	2.07	93.49	68.20	25.29	peak
2	5725.000	48.83	2.30	51.13	68.20	-17.07	peak
3	5763.835	51.05	2.62	53.67	68.20	-14.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5700 MHz		
Remark:			

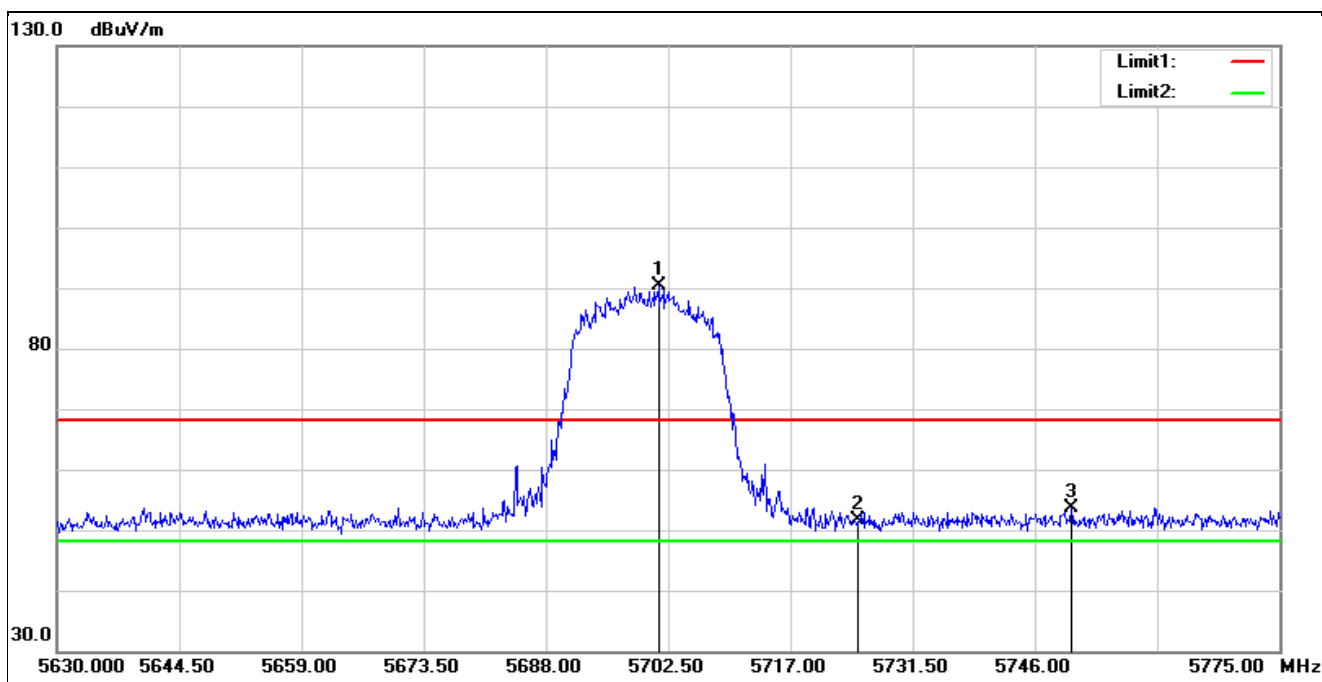


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.340	88.36	2.07	90.43	68.20	22.23	peak
2	5725.000	49.23	2.30	51.53	68.20	-16.67	peak
3	5750.350	51.19	2.54	53.73	68.20	-14.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

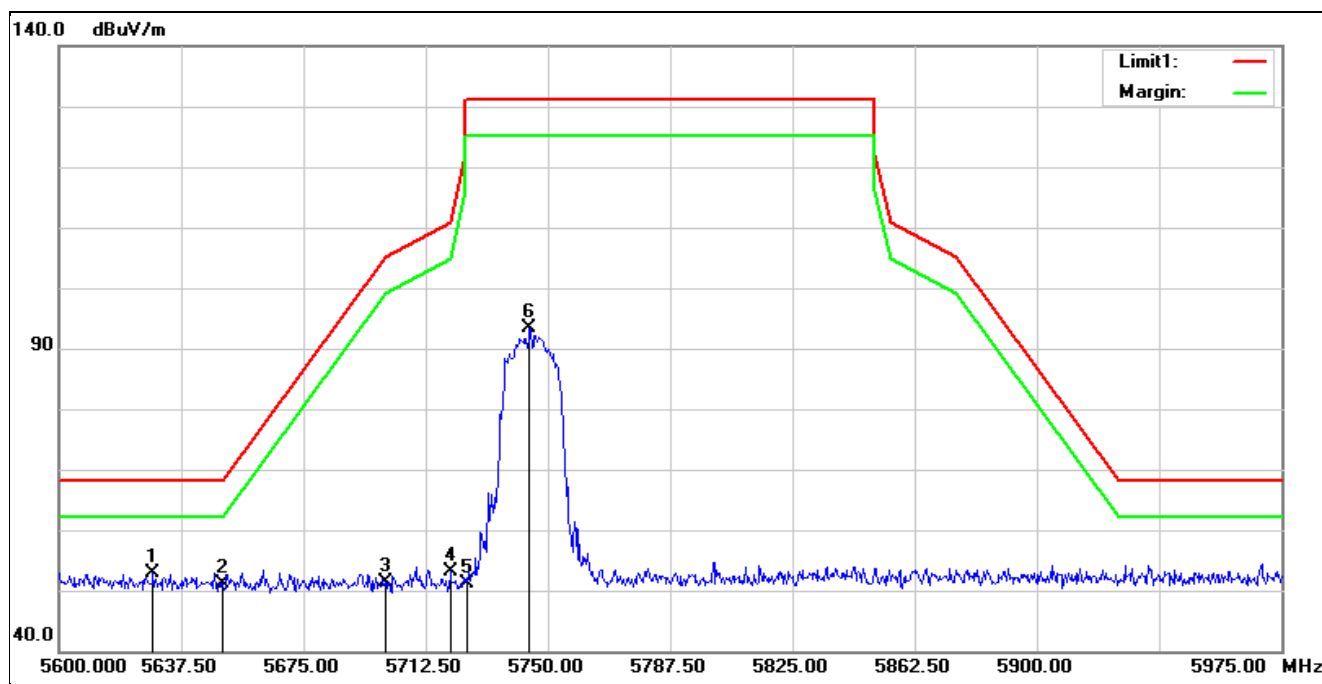


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5628.875	51.04	1.94	52.98	68.20	-15.22	peak
2	5650.000	49.28	1.90	51.18	68.20	-17.02	peak
3	5700.000	49.41	2.06	51.47	105.20	-53.73	peak
4	5720.000	50.92	2.26	53.18	110.80	-57.62	peak
5	5725.000	48.71	2.30	51.01	122.20	-71.19	peak
6	5744.375	90.77	2.49	93.26	131.20	-37.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5745 MHz		
Remark:			

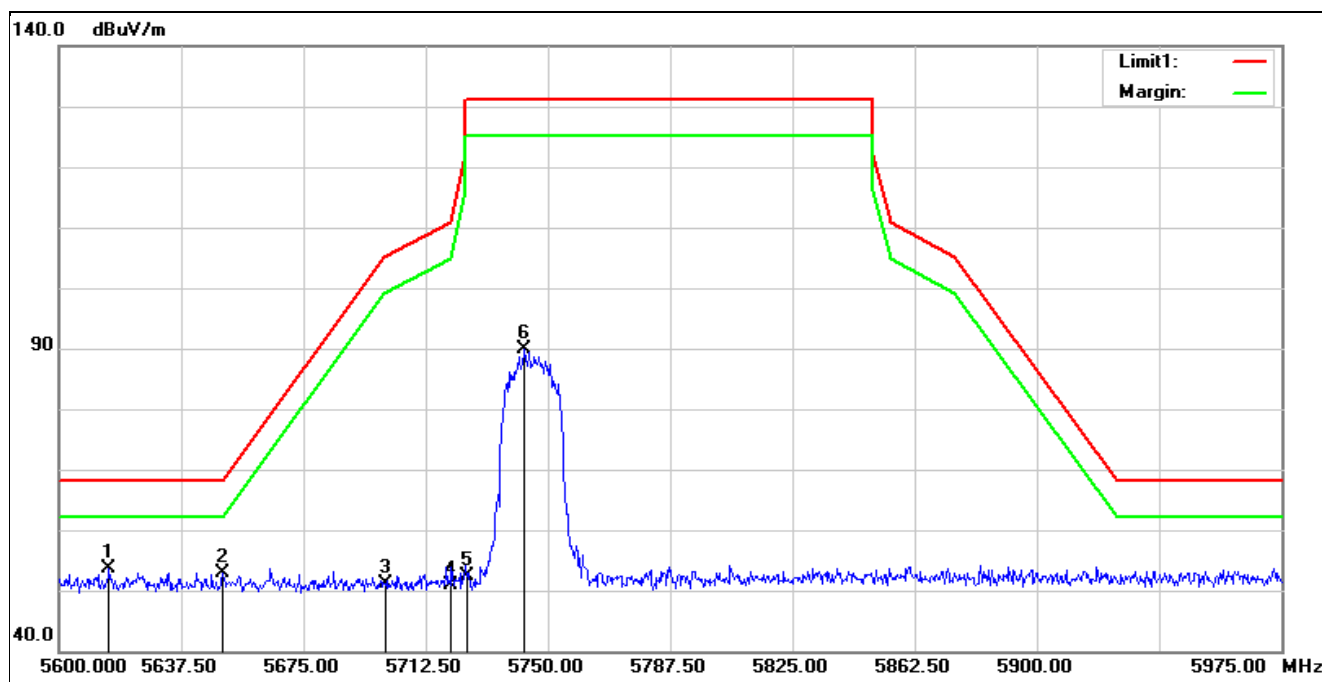


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5615.375	51.64	1.98	53.62	68.20	-14.58	peak
2	5650.000	51.00	1.90	52.90	68.20	-15.30	peak
3	5700.000	49.04	2.06	51.10	105.20	-54.10	peak
4	5720.000	48.69	2.26	50.95	110.80	-59.85	peak
5	5725.000	50.10	2.30	52.40	122.20	-69.80	peak
6	5742.875	87.31	2.46	89.77	131.20	-41.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

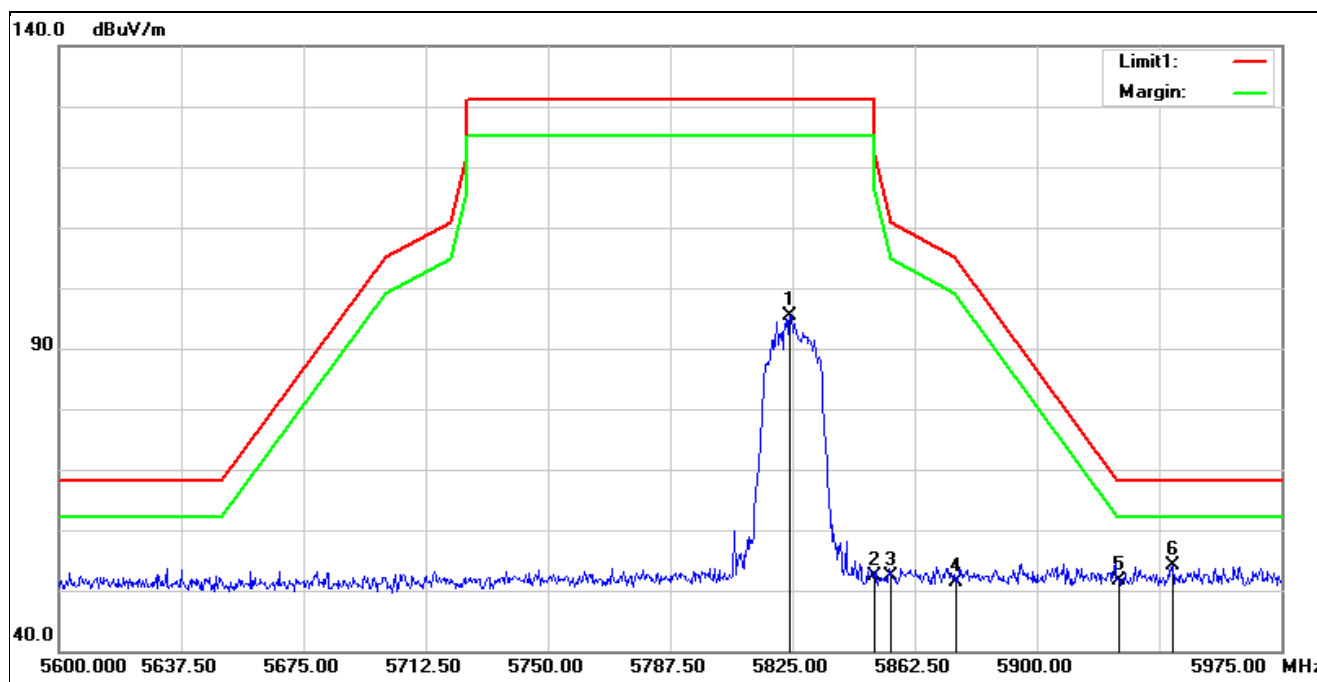


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5824.250	92.50	2.89	95.39	131.20	-35.81	peak
2	5850.000	49.42	2.98	52.40	122.20	-69.80	peak
3	5855.000	49.33	3.01	52.34	110.80	-58.46	peak
4	5875.000	48.31	3.07	51.38	105.20	-53.82	peak
5	5925.000	48.63	3.10	51.73	68.20	-16.47	peak
6*	5941.625	51.12	3.05	54.17	68.20	-14.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5825 MHz		
Remark:			

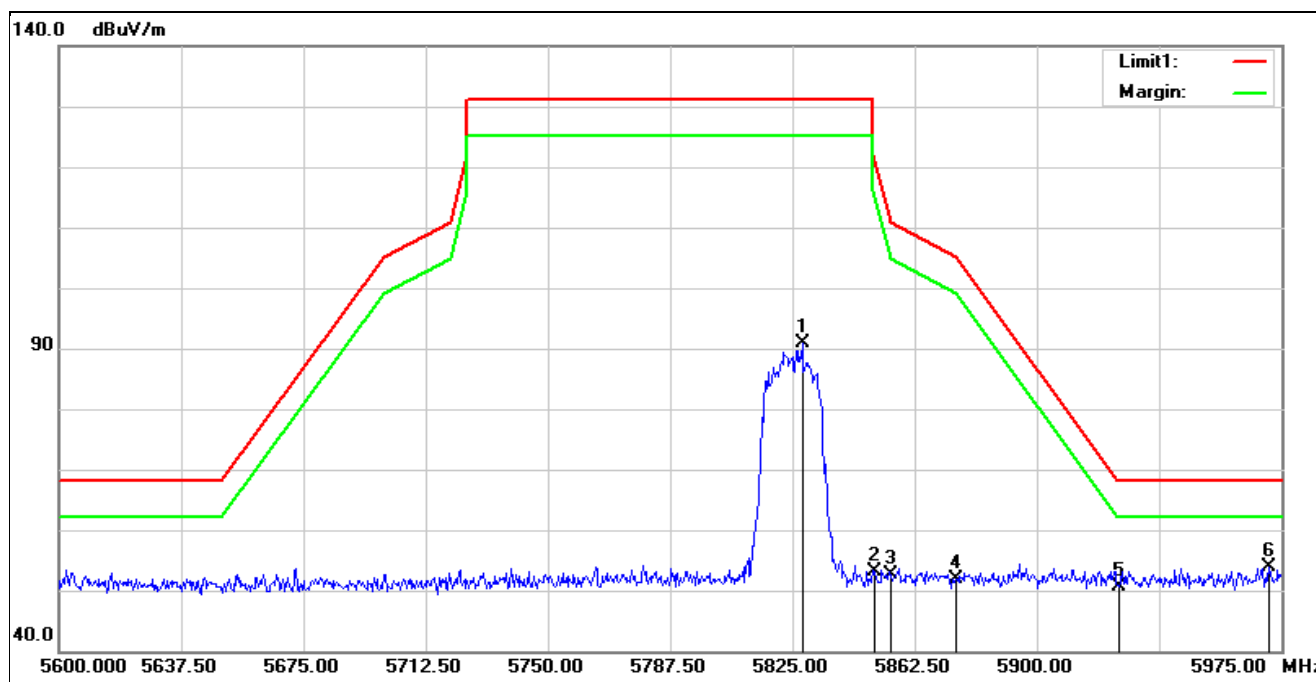


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5828.000	88.01	2.92	90.93	131.20	-40.27	peak
2	5850.000	50.25	2.98	53.23	122.20	-68.97	peak
3	5855.000	49.60	3.01	52.61	110.80	-58.19	peak
4	5875.000	48.79	3.07	51.86	105.20	-53.34	peak
5	5925.000	47.65	3.10	50.75	68.20	-17.45	peak
6*	5971.250	50.64	3.15	53.79	68.20	-14.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

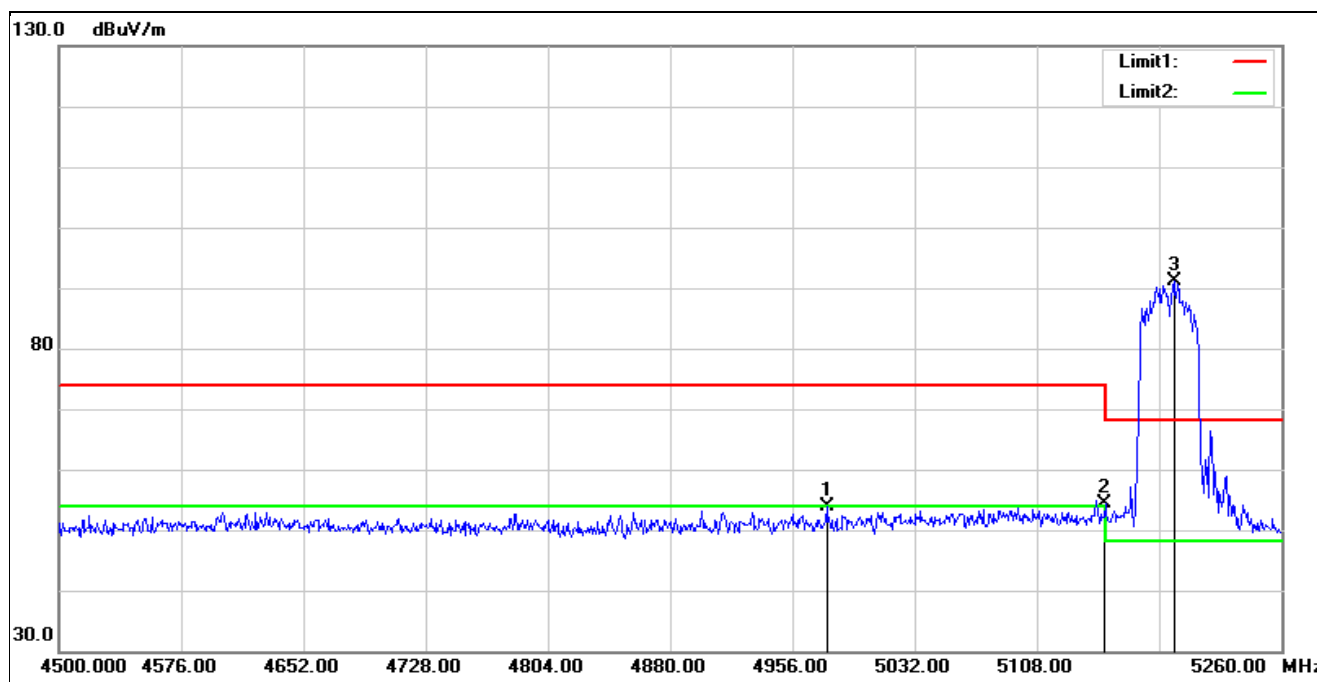


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4977.280	53.15	0.63	53.78	74.00	-20.22	peak
2	5150.000	53.04	1.42	54.46	74.00	-19.54	peak
3*	5193.120	89.91	1.31	91.22	68.20	23.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

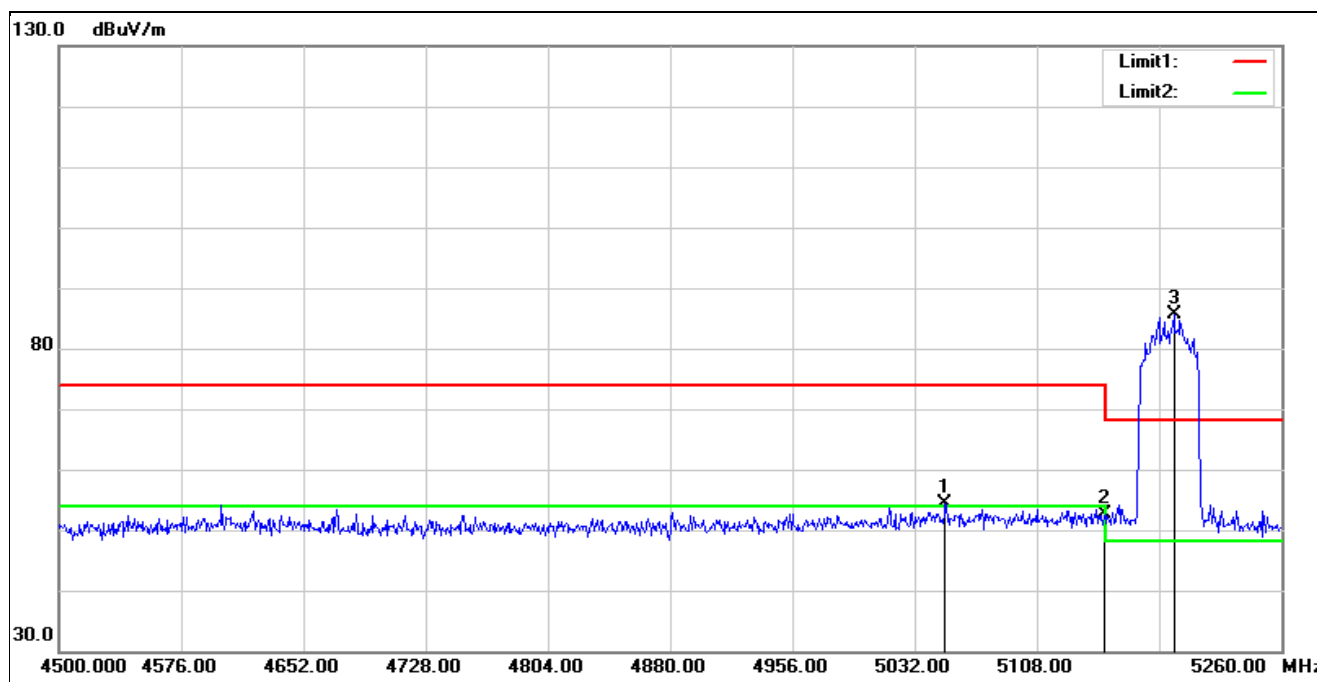


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5051.000	53.17	1.09	54.26	74.00	-19.74	peak
2	5150.000	51.15	1.42	52.57	74.00	-21.43	peak
3*	5193.120	84.31	1.31	85.62	68.20	17.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

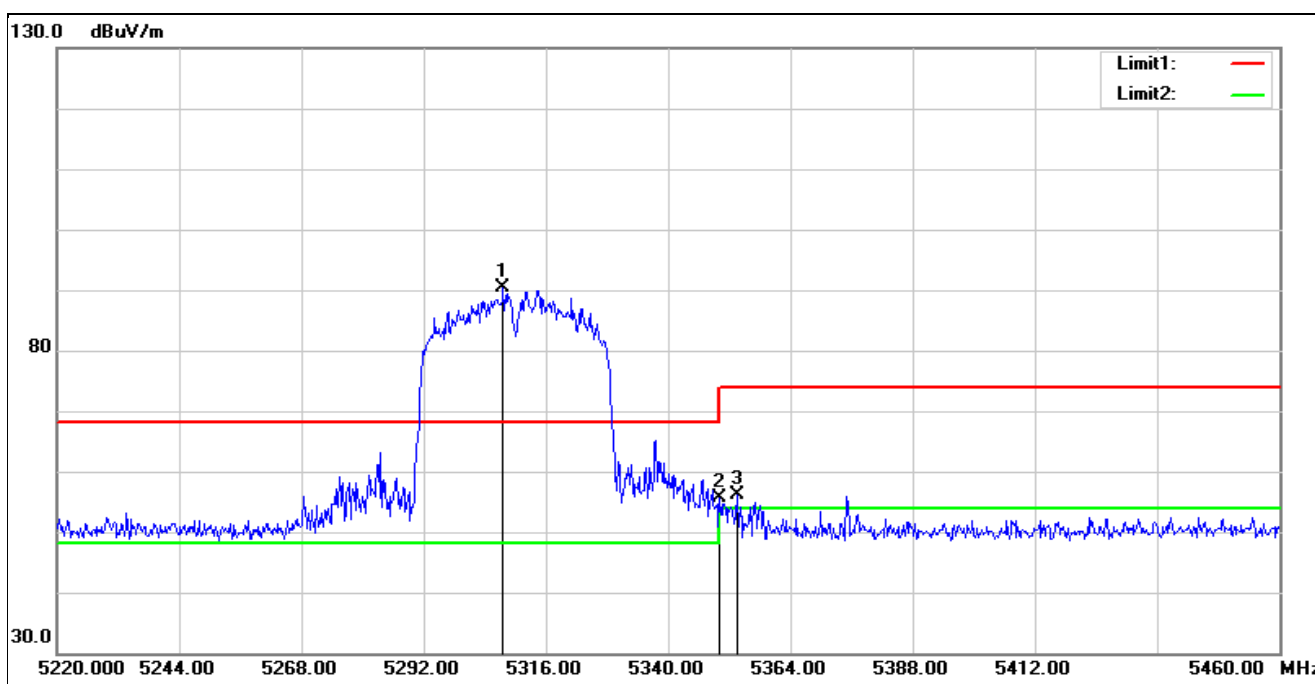


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5307.600	89.36	0.94	90.30	68.20	22.10	peak
2	5350.000	54.54	1.08	55.62	74.00	-18.38	peak
3	5353.440	54.90	1.11	56.01	74.00	-17.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

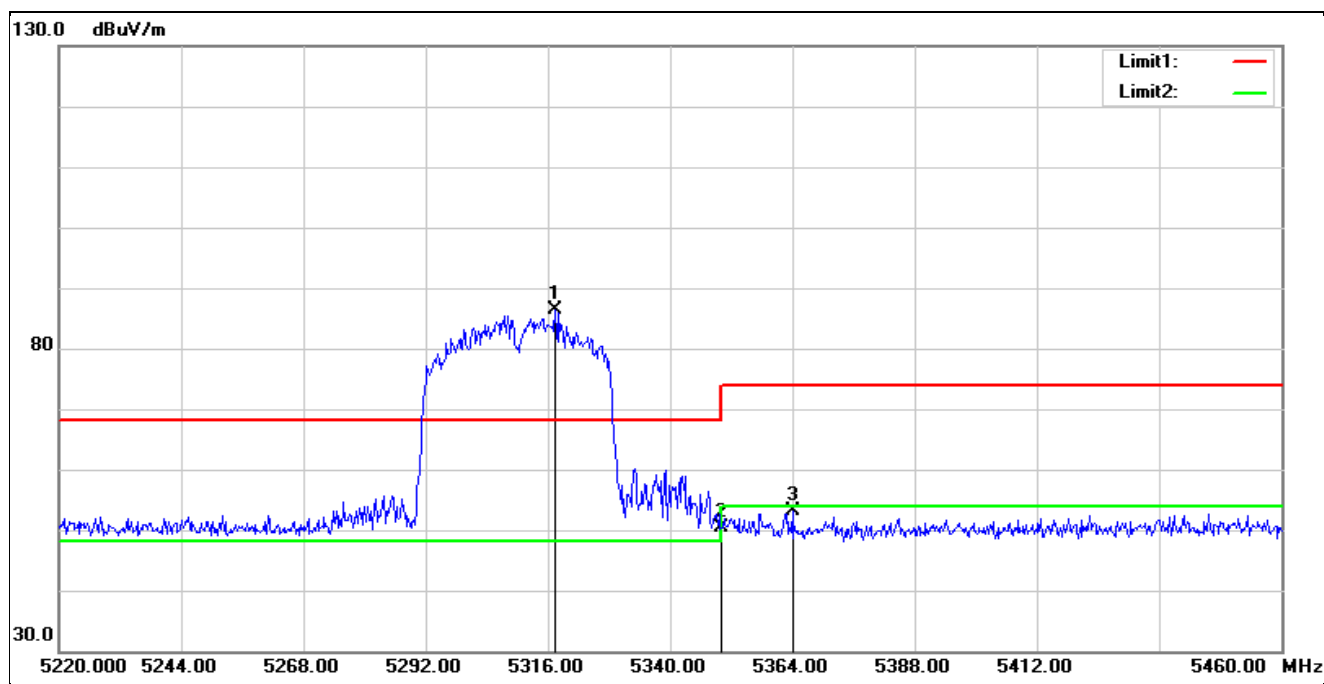


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.440	85.33	0.97	86.30	68.20	18.10	peak
2	5350.000	49.40	1.08	50.48	74.00	-23.52	peak
3	5364.000	51.87	1.21	53.08	74.00	-20.92	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

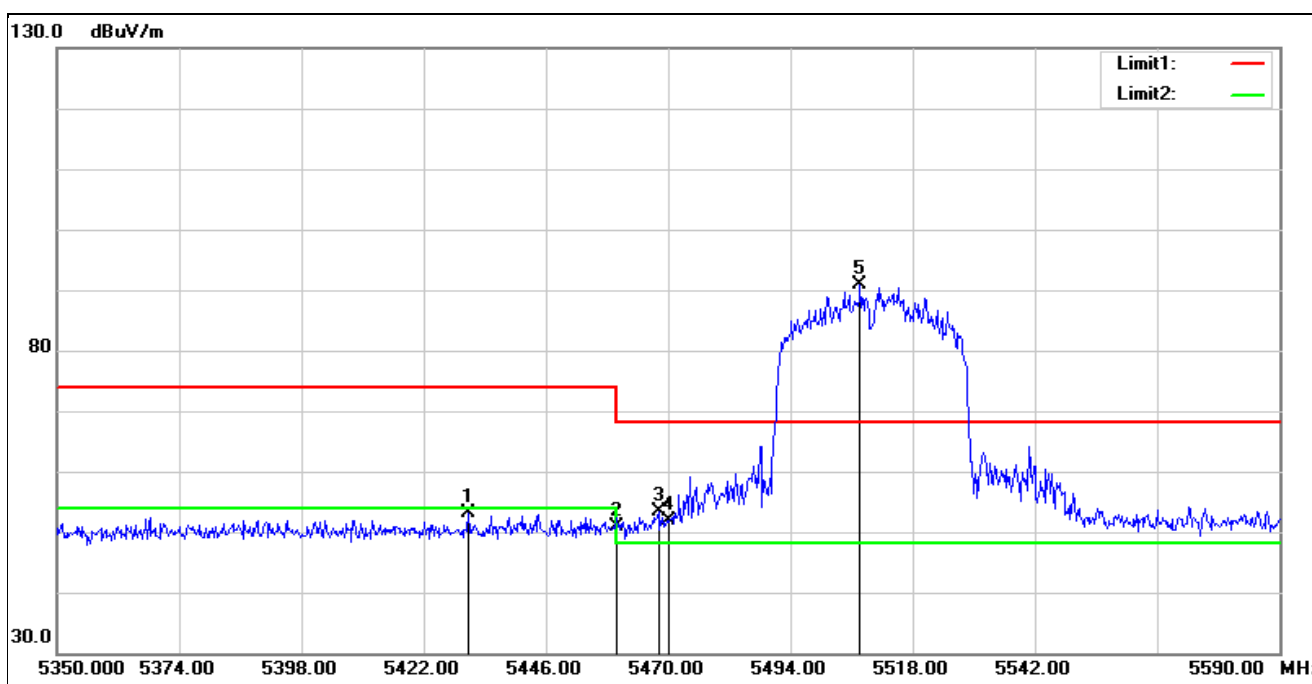


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5430.880	51.55	1.65	53.20	74.00	-20.80	peak
2	5460.000	49.15	1.73	50.88	74.00	-23.12	peak
3	5468.080	51.67	1.74	53.41	68.20	-14.79	peak
4	5470.000	50.14	1.74	51.88	68.20	-16.32	peak
5*	5507.680	89.16	1.83	90.99	68.20	22.79	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

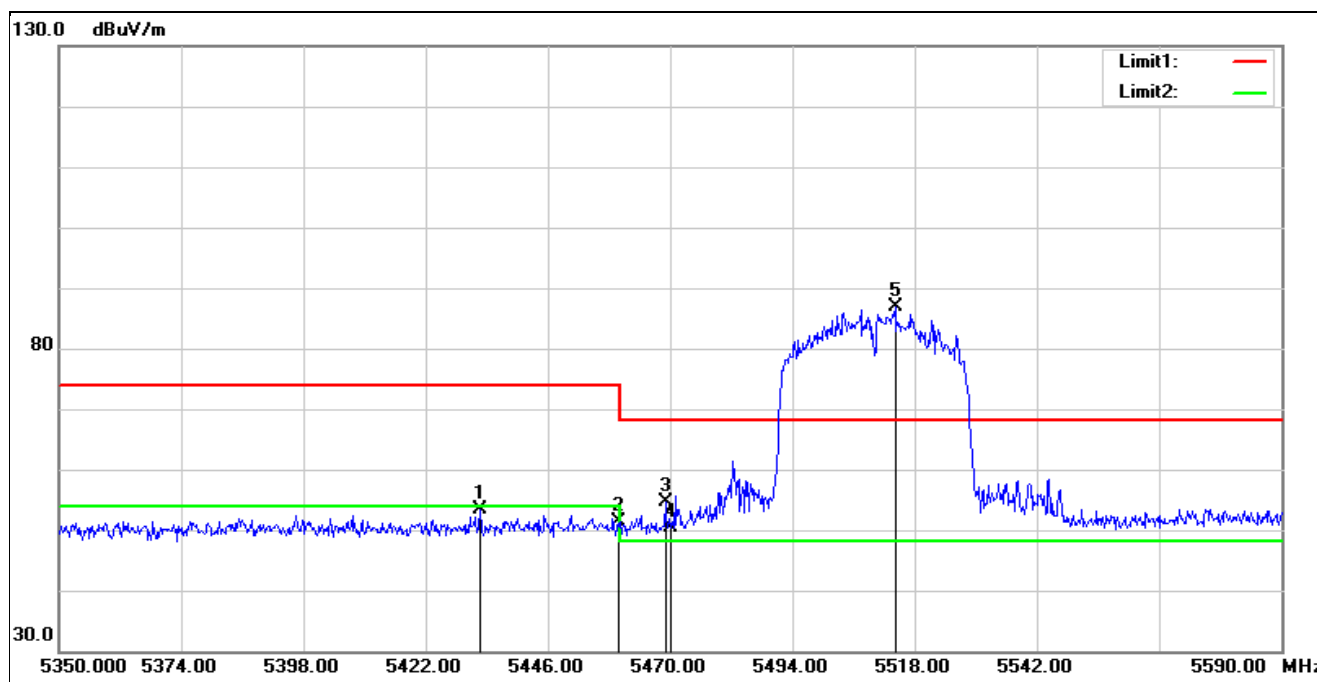


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.560	51.75	1.66	53.41	74.00	-20.59	peak
2	5460.000	49.54	1.73	51.27	74.00	-22.73	peak
3	5469.040	52.80	1.74	54.54	68.20	-13.66	peak
4	5470.000	48.55	1.74	50.29	68.20	-17.91	peak
5*	5514.160	85.14	1.86	87.00	68.20	18.80	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

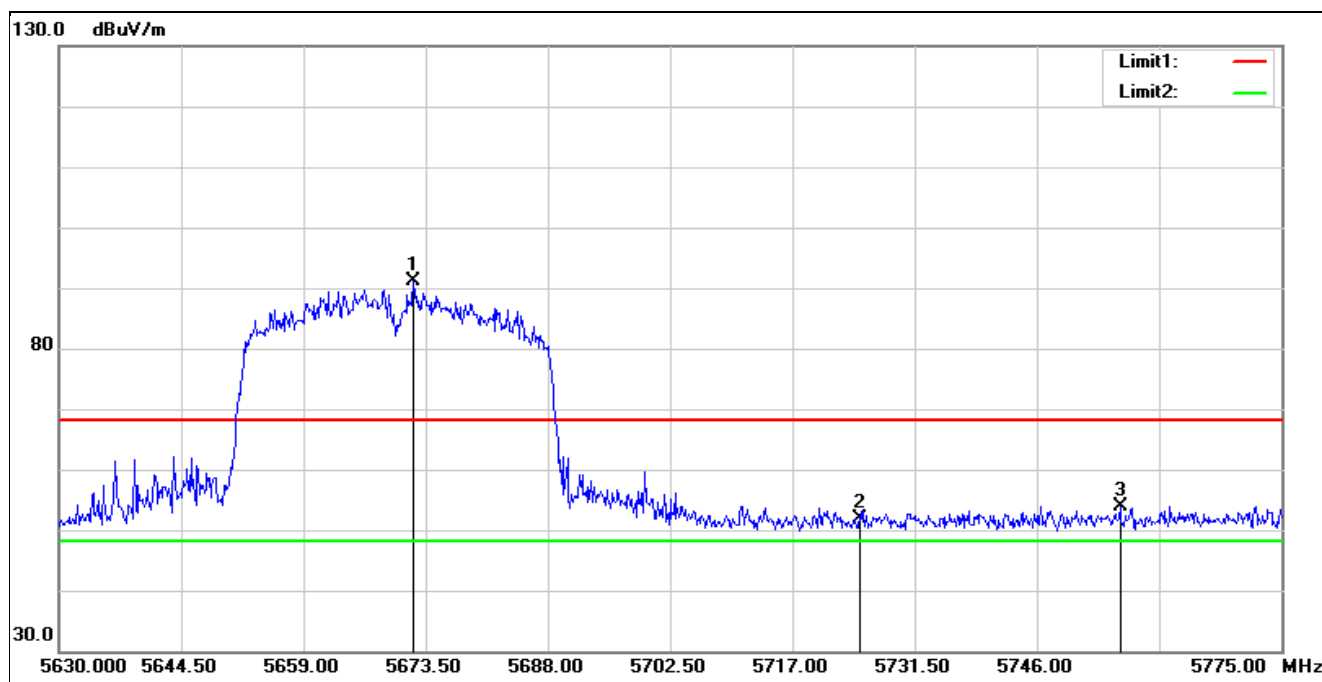


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5672.050	89.08	1.96	91.04	68.20	22.84	peak
2	5725.000	49.56	2.30	51.86	68.20	-16.34	peak
3	5755.860	51.30	2.56	53.86	68.20	-14.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5670 MHz		
Remark:			

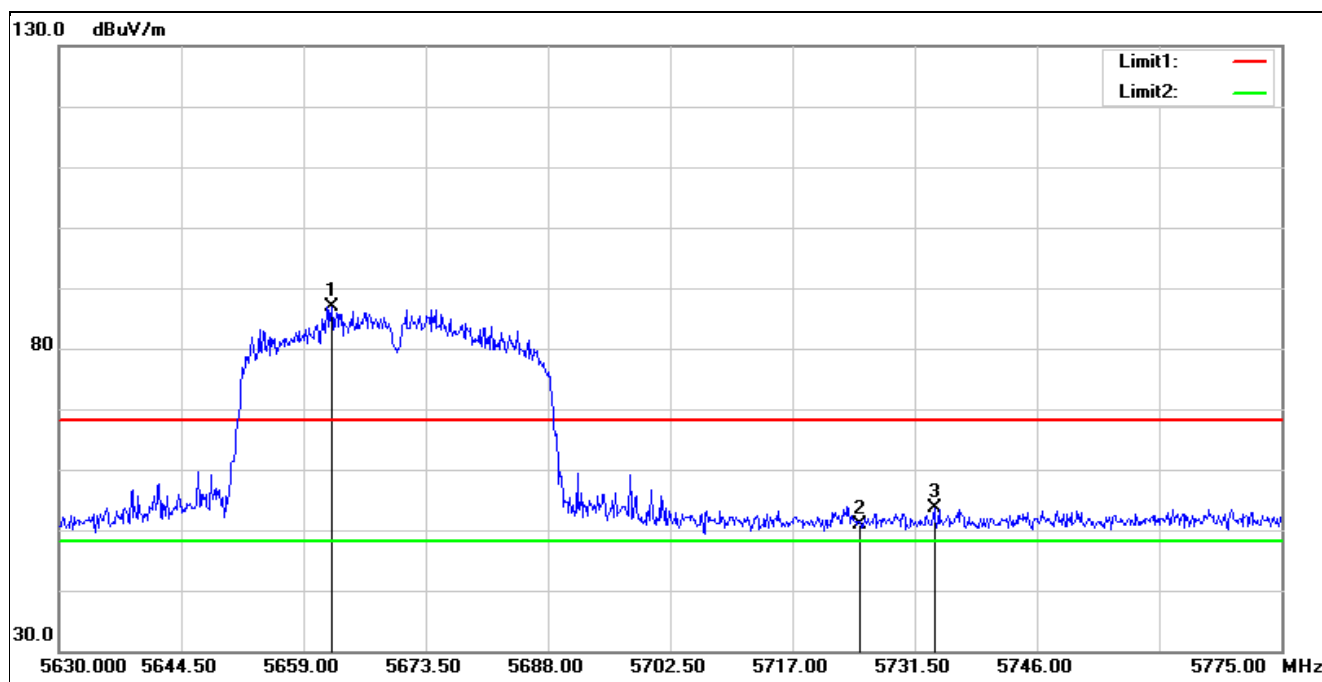


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5662.335	84.88	1.94	86.82	68.20	18.62	peak
2	5725.000	48.68	2.30	50.98	68.20	-17.22	peak
3	5733.820	51.23	2.39	53.62	68.20	-14.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

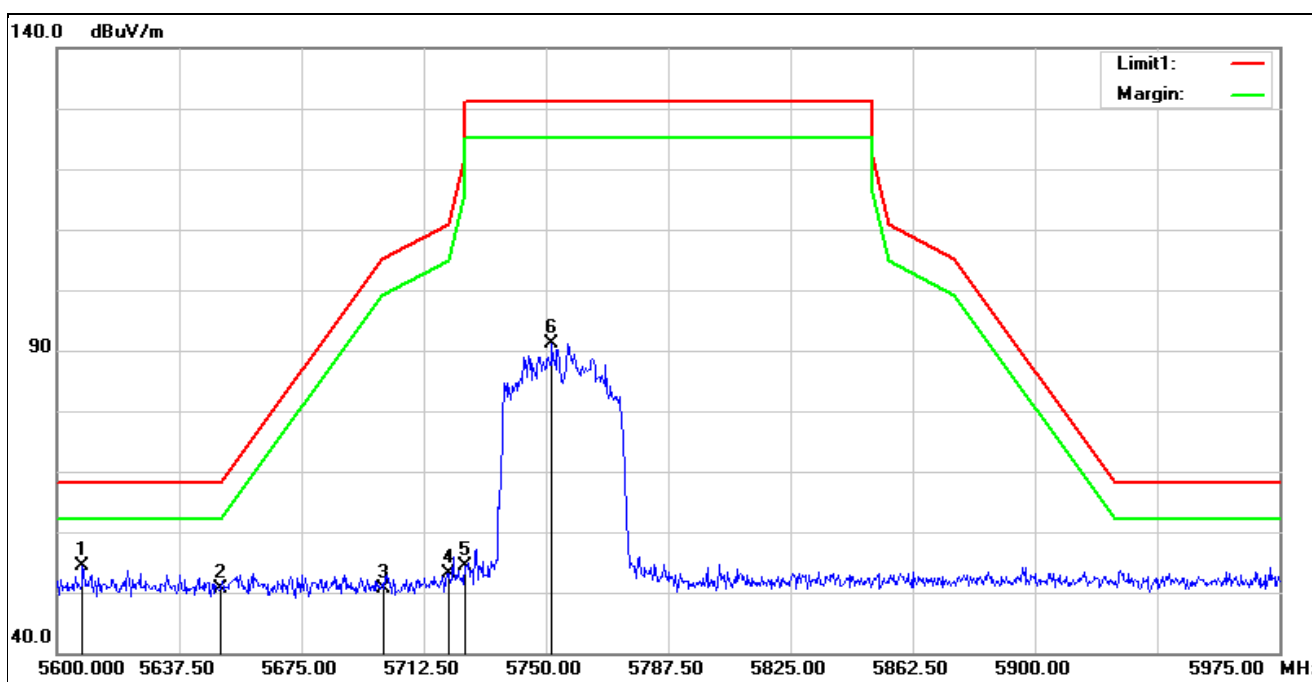


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5607.875	52.47	2.01	54.48	68.20	-13.72	peak
2	5650.000	48.80	1.90	50.70	68.20	-17.50	peak
3	5700.000	48.67	2.06	50.73	105.20	-54.47	peak
4	5720.000	50.75	2.26	53.01	110.80	-57.79	peak
5	5725.000	52.01	2.30	54.31	122.20	-67.89	peak
6	5751.875	88.61	2.55	91.16	131.20	-40.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5755 MHz		
Remark:			

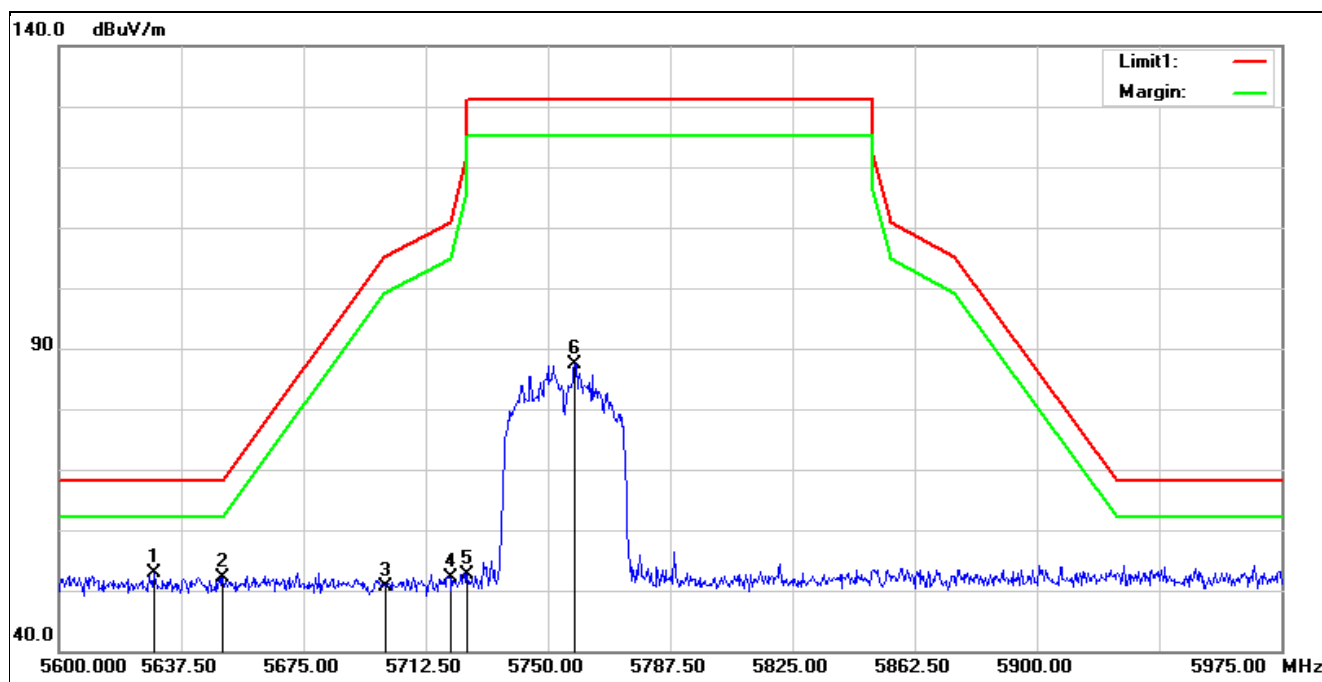


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5629.250	50.91	1.94	52.85	68.20	-15.35	peak
2	5650.000	50.23	1.90	52.13	68.20	-16.07	peak
3	5700.000	48.49	2.06	50.55	105.20	-54.65	peak
4	5720.000	49.85	2.26	52.11	110.80	-58.69	peak
5	5725.000	50.24	2.30	52.54	122.20	-69.66	peak
6	5758.250	84.76	2.59	87.35	131.20	-43.85	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

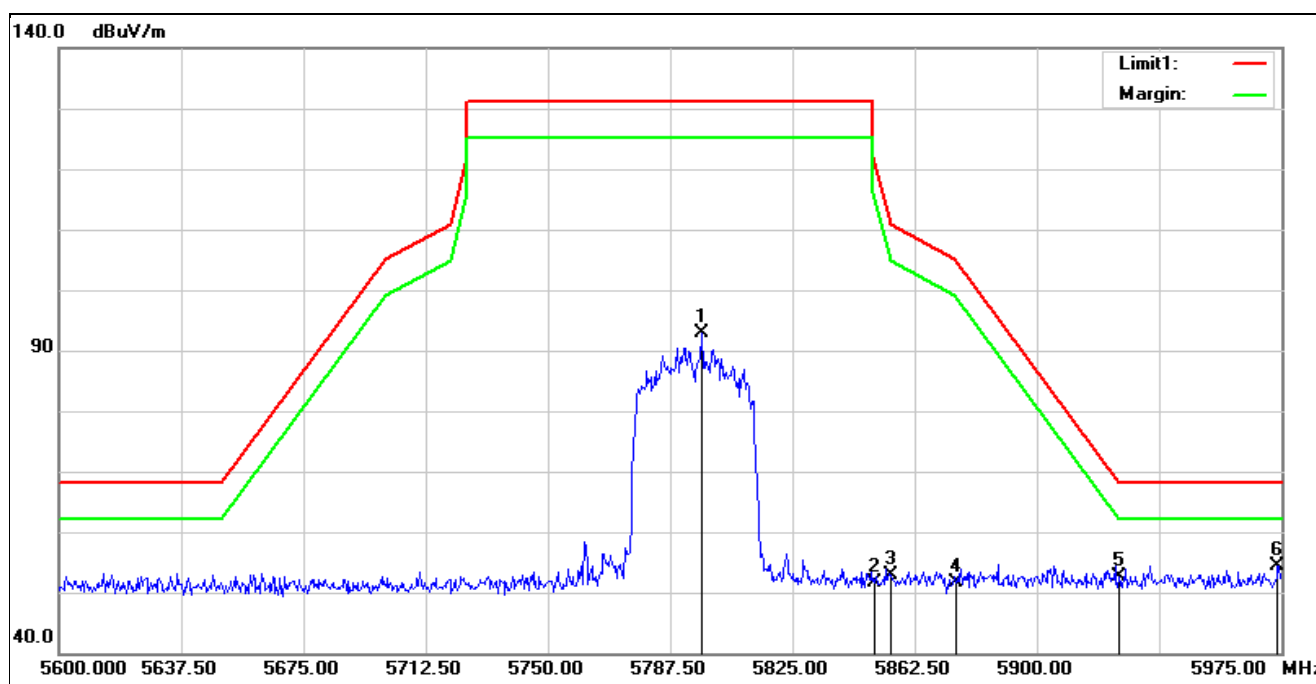

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5797.250	90.02	2.79	92.81	131.20	-38.39	peak
2	5850.000	48.70	2.98	51.68	122.20	-70.52	peak
3	5855.000	49.99	3.01	53.00	110.80	-57.80	peak
4	5875.000	48.51	3.07	51.58	105.20	-53.62	peak
5	5925.000	49.49	3.10	52.59	68.20	-15.61	peak
6*	5973.875	51.18	3.16	54.34	68.20	-13.86	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5795 MHz		
Remark:			

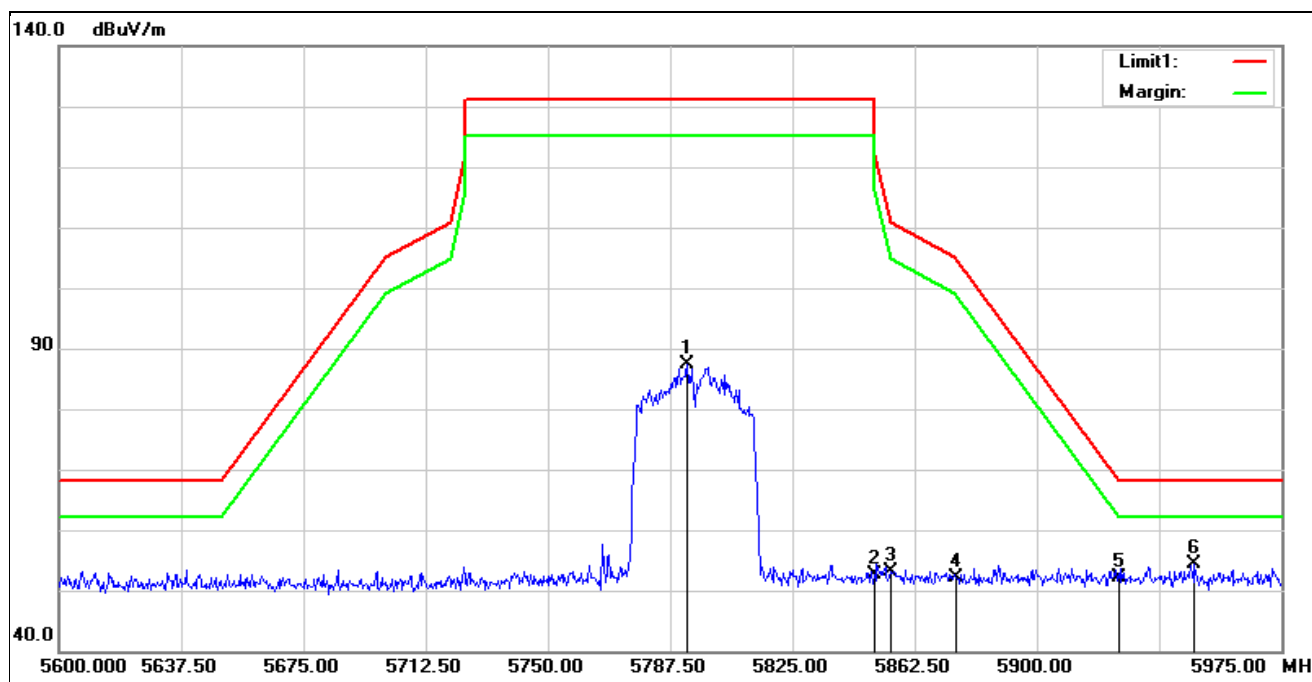

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5792.750	84.62	2.77	87.39	131.20	-43.81	peak
2	5850.000	49.67	2.98	52.65	122.20	-69.55	peak
3	5855.000	50.17	3.01	53.18	110.80	-57.62	peak
4	5875.000	49.11	3.07	52.18	105.20	-53.02	peak
5	5925.000	48.98	3.10	52.08	68.20	-16.12	peak
6*	5948.375	51.28	3.03	54.31	68.20	-13.89	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5180 MHz
Remark:

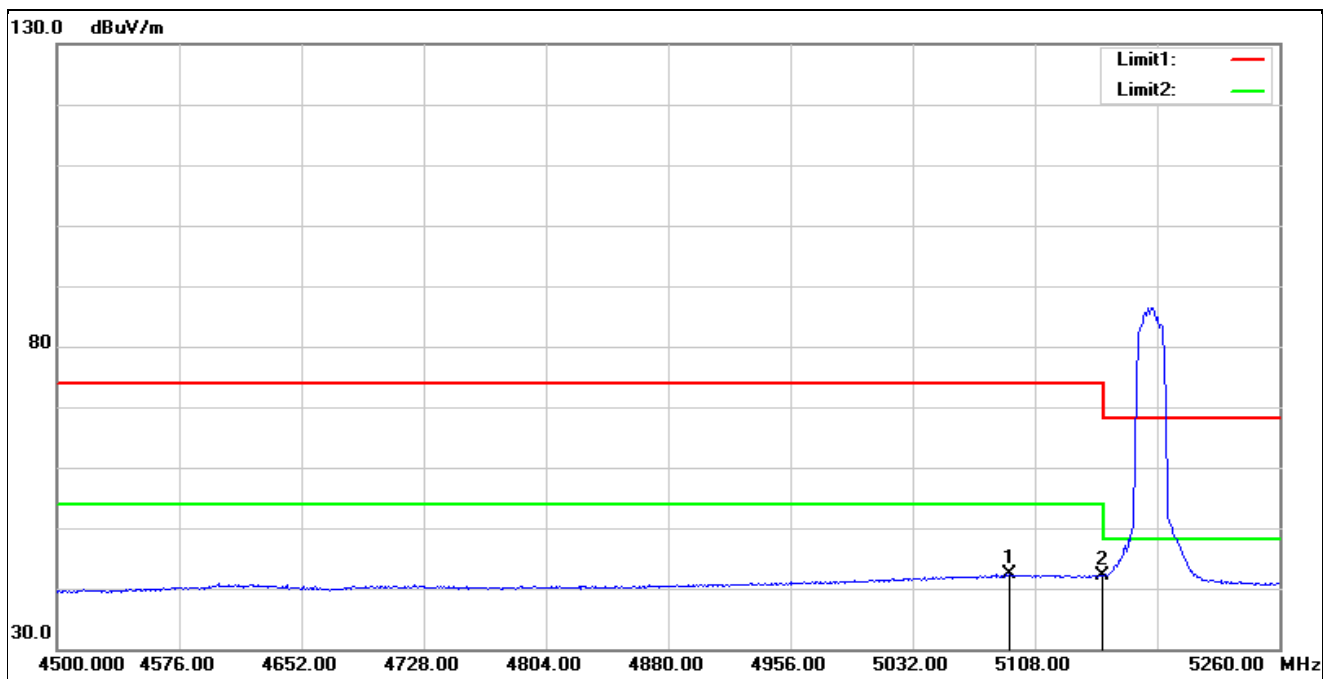


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5092.040	40.98	1.32	42.30	54.00	-11.70	AVG
2	5150.000	40.72	1.42	42.14	54.00	-11.86	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

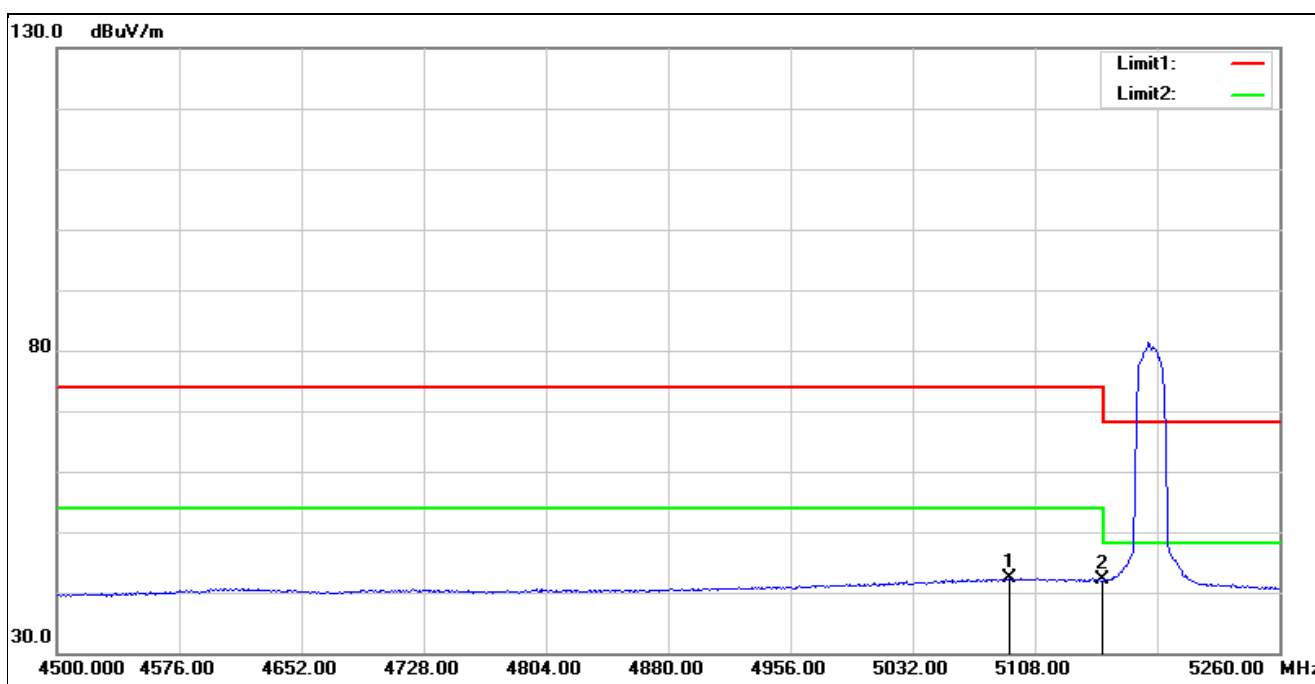


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5092.040	41.05	1.32	42.37	54.00	-11.63	AVG
2	5150.000	40.71	1.42	42.13	54.00	-11.87	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

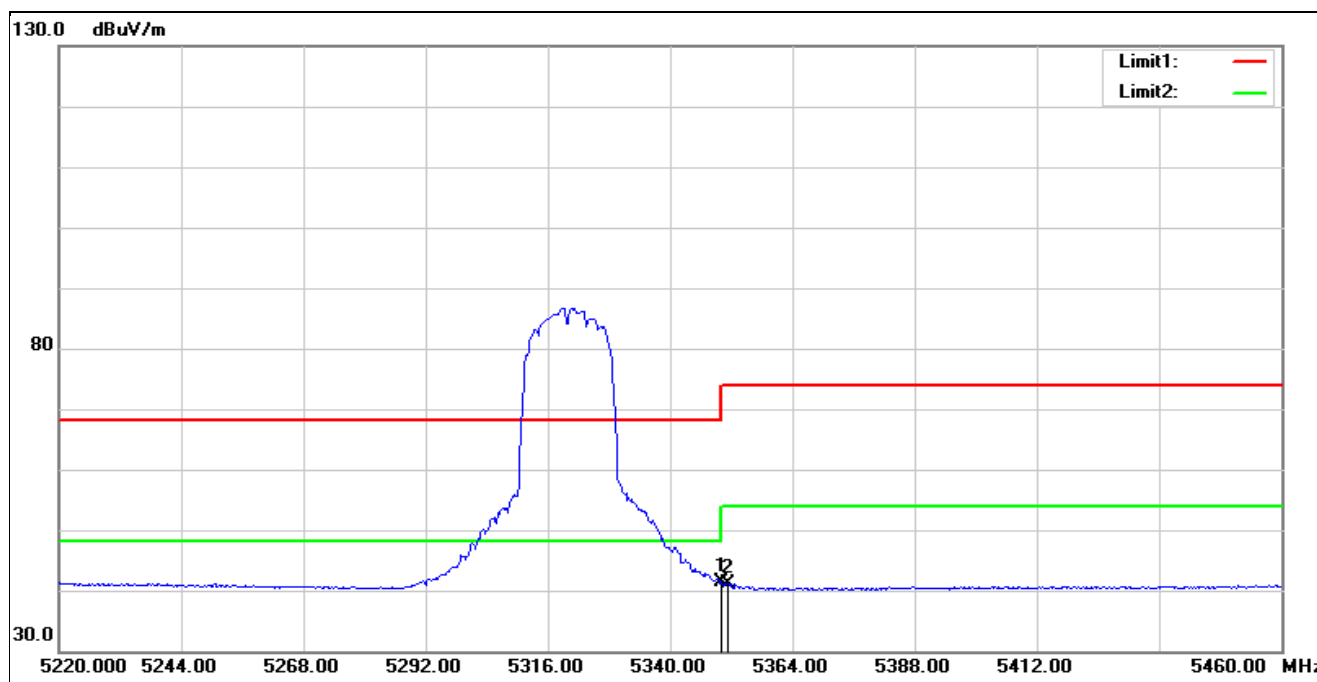


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	40.19	1.08	41.27	54.00	-12.73	AVG
2	5351.280	40.14	1.09	41.23	54.00	-12.77	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

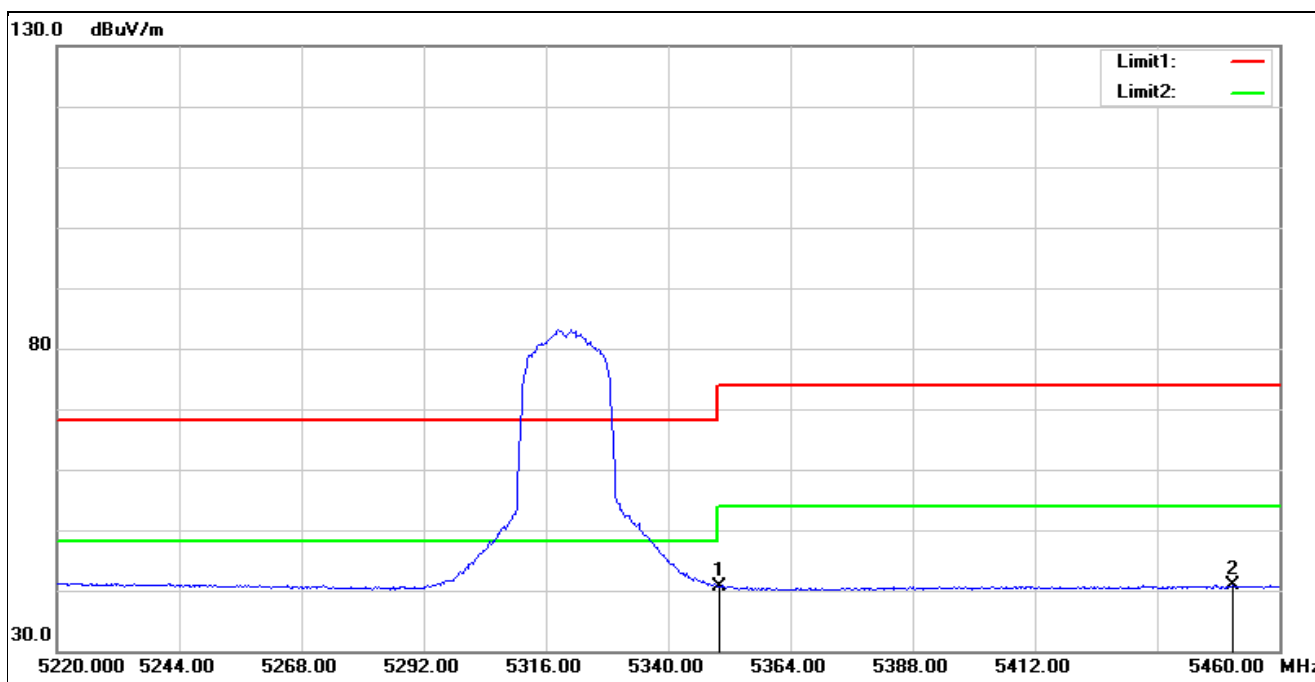


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.43	1.08	40.51	54.00	-13.49	AVG
2*	5450.880	39.13	1.71	40.84	54.00	-13.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

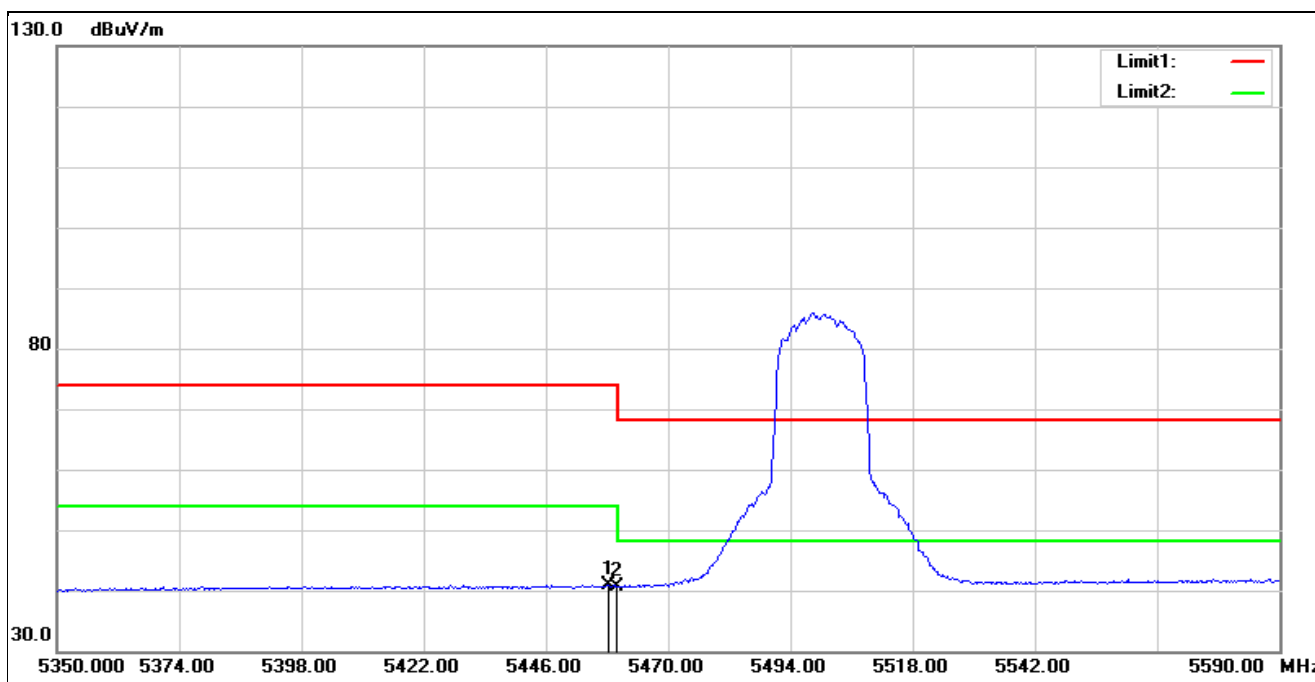


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.240	39.17	1.72	40.89	54.00	-13.11	AVG
2	5460.000	38.93	1.73	40.66	54.00	-13.34	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

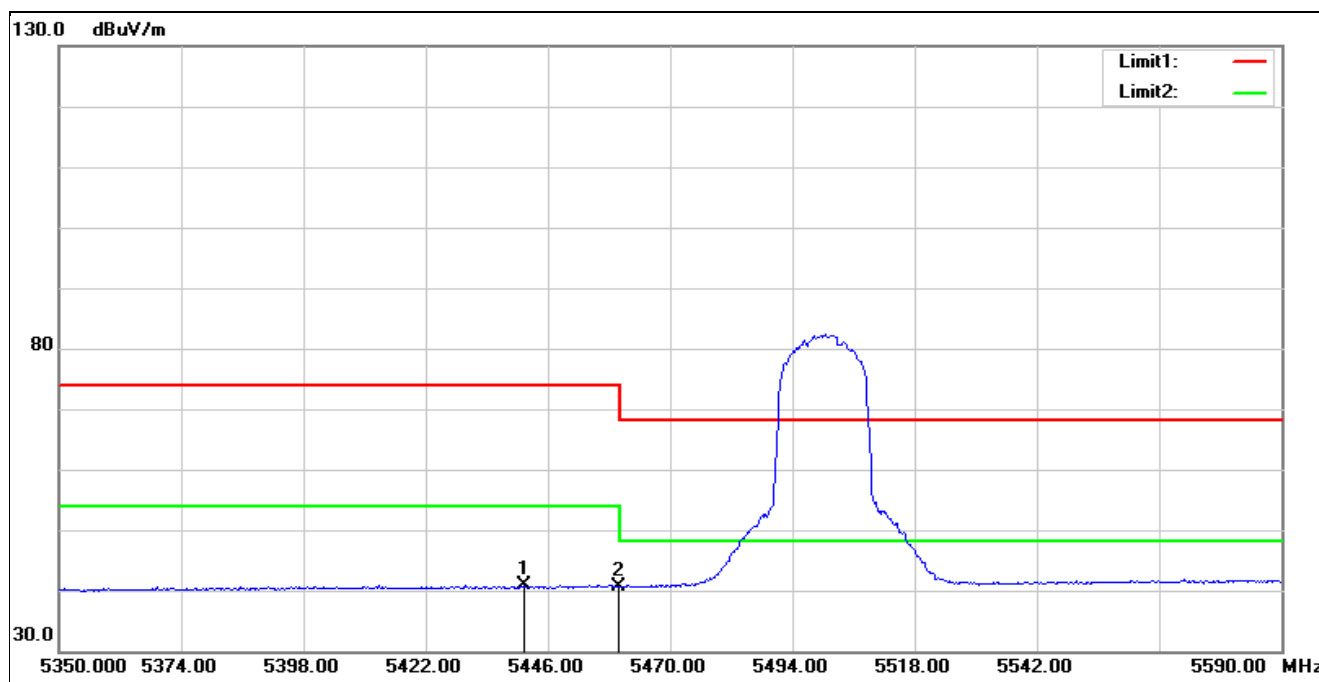


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5441.440	39.11	1.68	40.79	54.00	-13.21	AVG
2	5460.000	38.95	1.73	40.68	54.00	-13.32	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

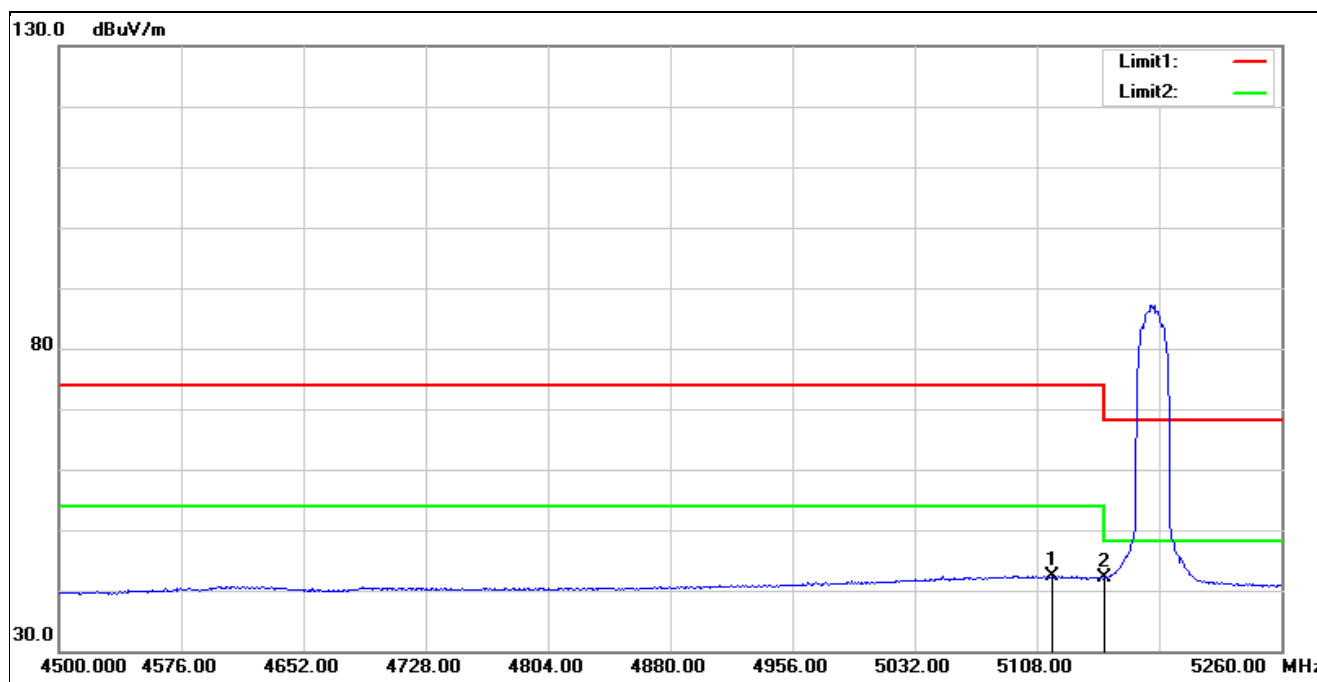


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5117.880	41.08	1.37	42.45	54.00	-11.55	AVG
2	5150.000	40.67	1.42	42.09	54.00	-11.91	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5180 MHz		
Remark:			

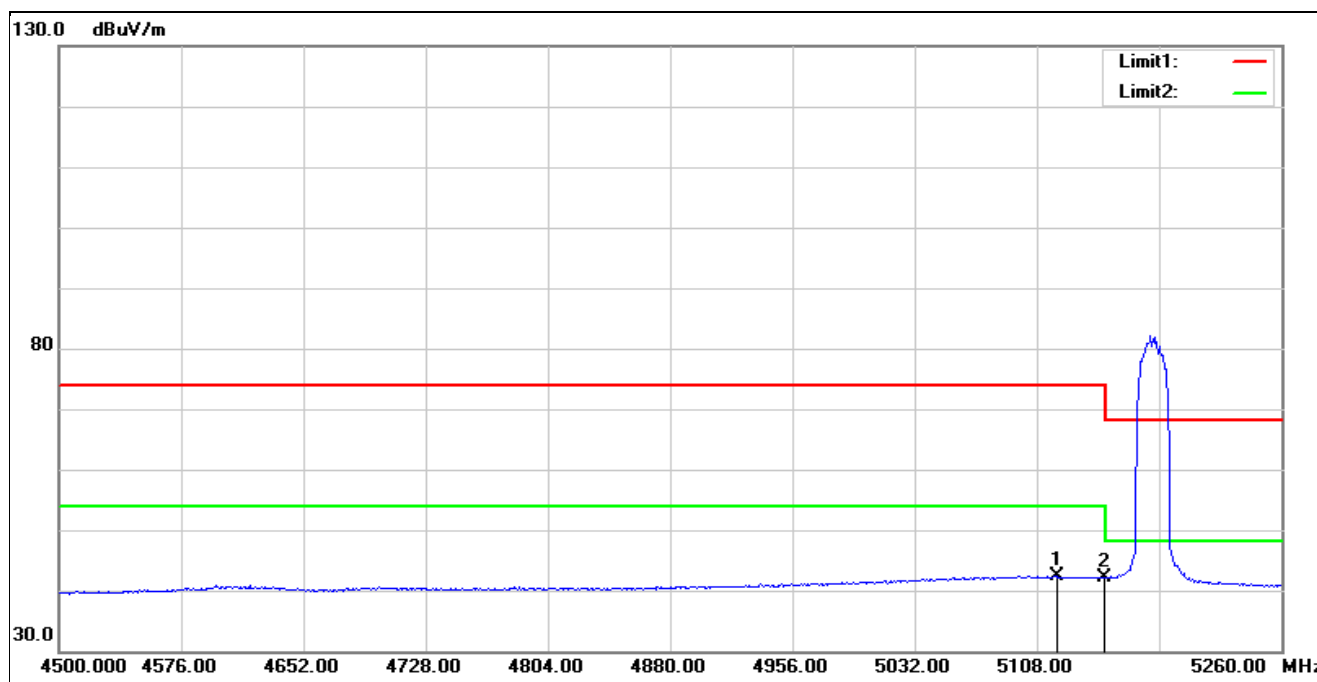


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5120.920	41.01	1.38	42.39	54.00	-11.61	AVG
2	5150.000	40.69	1.42	42.11	54.00	-11.89	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

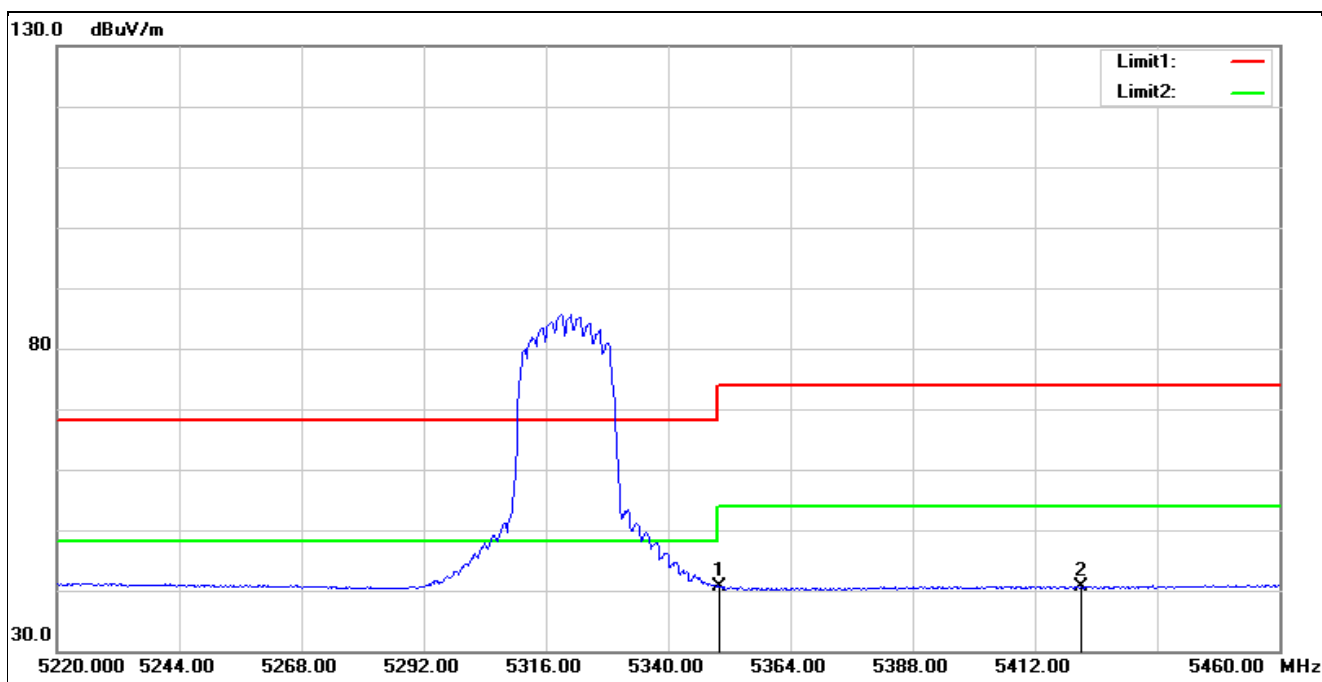


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	39.66	1.08	40.74	54.00	-13.26	AVG
2	5421.120	39.13	1.61	40.74	54.00	-13.26	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5320 MHz		
Remark:			

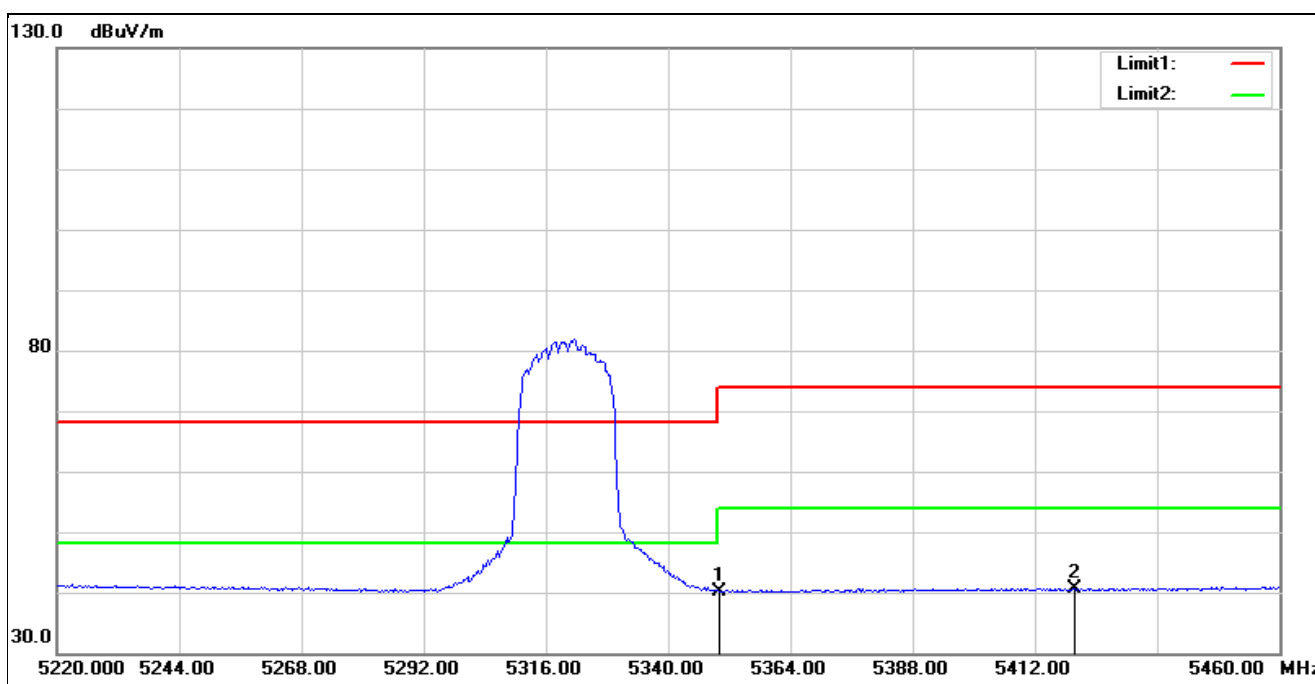


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	39.17	1.08	40.25	54.00	-13.75	AVG
2*	5419.680	39.08	1.61	40.69	54.00	-13.31	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

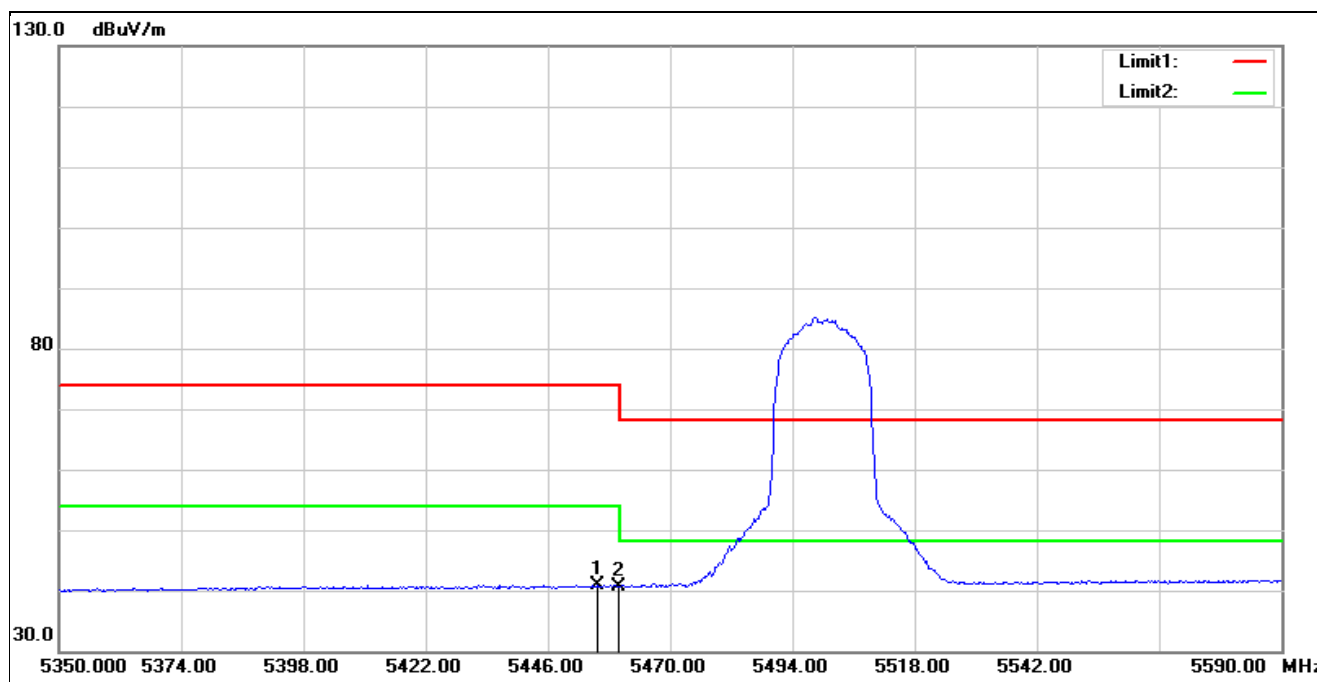


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5455.600	39.17	1.72	40.89	54.00	-13.11	AVG
2	5460.000	39.02	1.73	40.75	54.00	-13.25	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 5500 MHz		
Remark:			

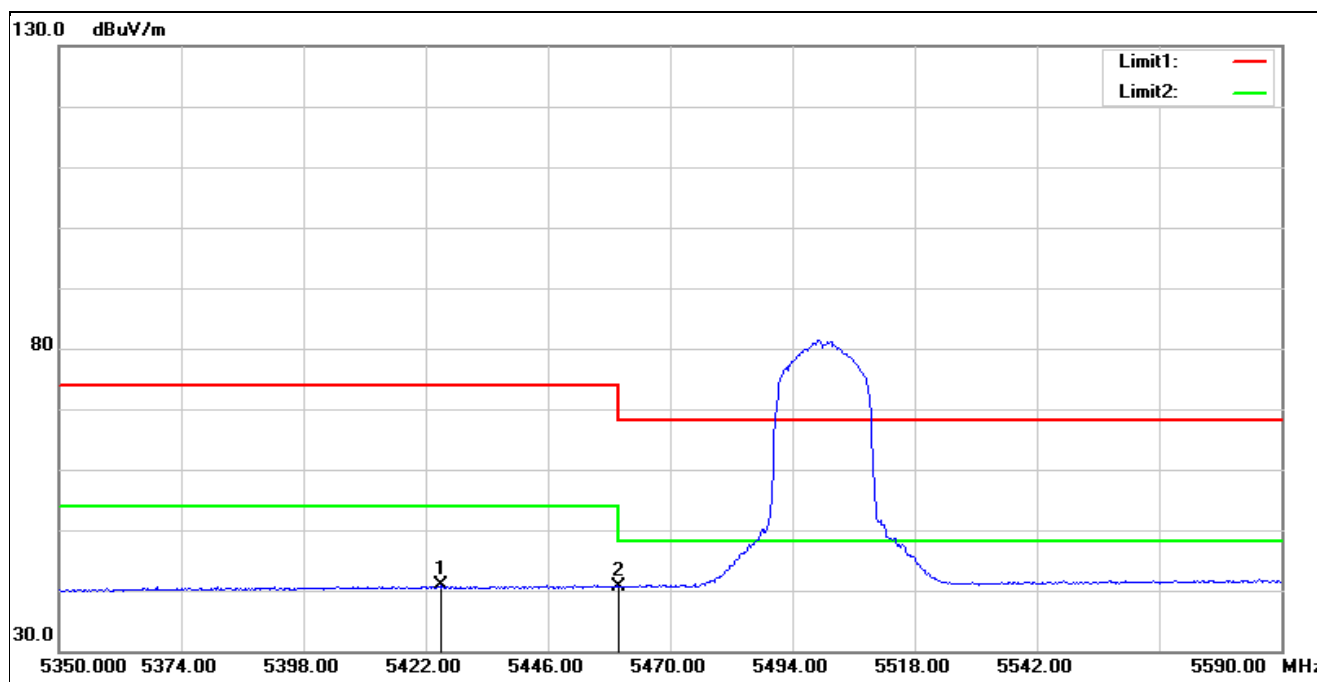


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5425.120	39.24	1.64	40.88	54.00	-13.12	AVG
2	5460.000	38.81	1.73	40.54	54.00	-13.46	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

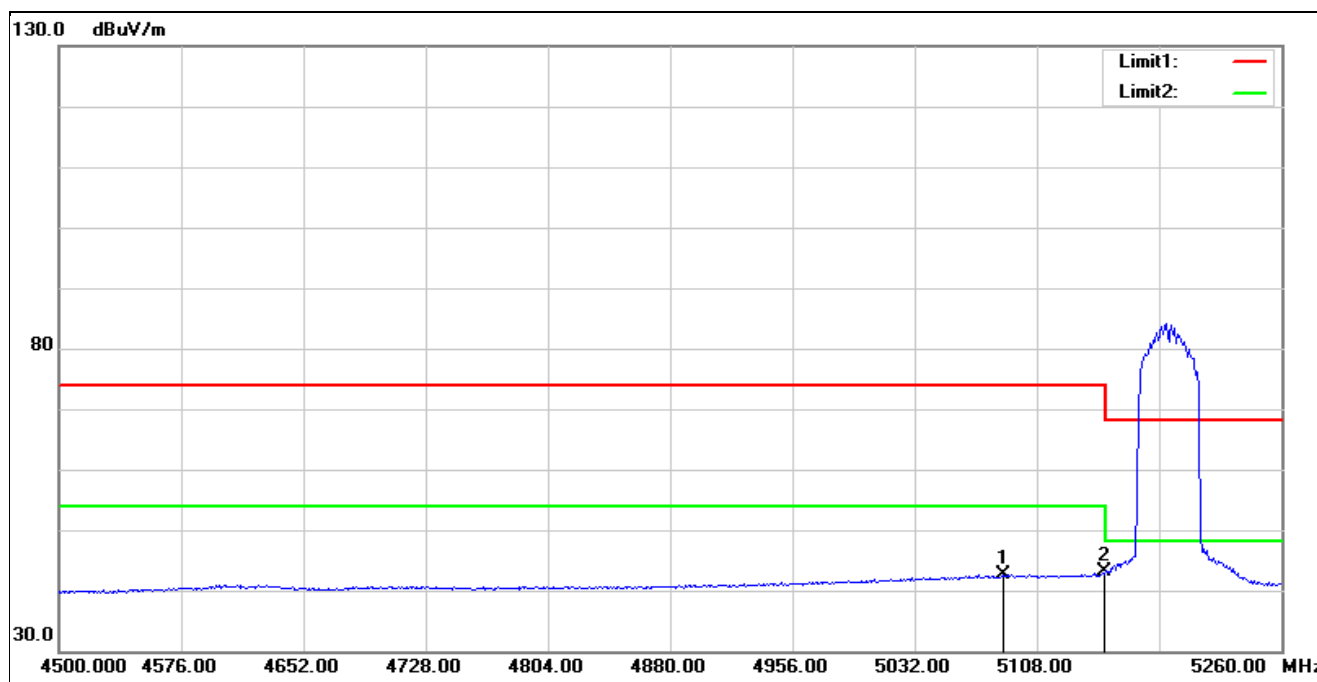


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5087.480	41.37	1.28	42.65	54.00	-11.35	AVG
2*	5150.000	41.69	1.42	43.11	54.00	-10.89	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5190 MHz		
Remark:			

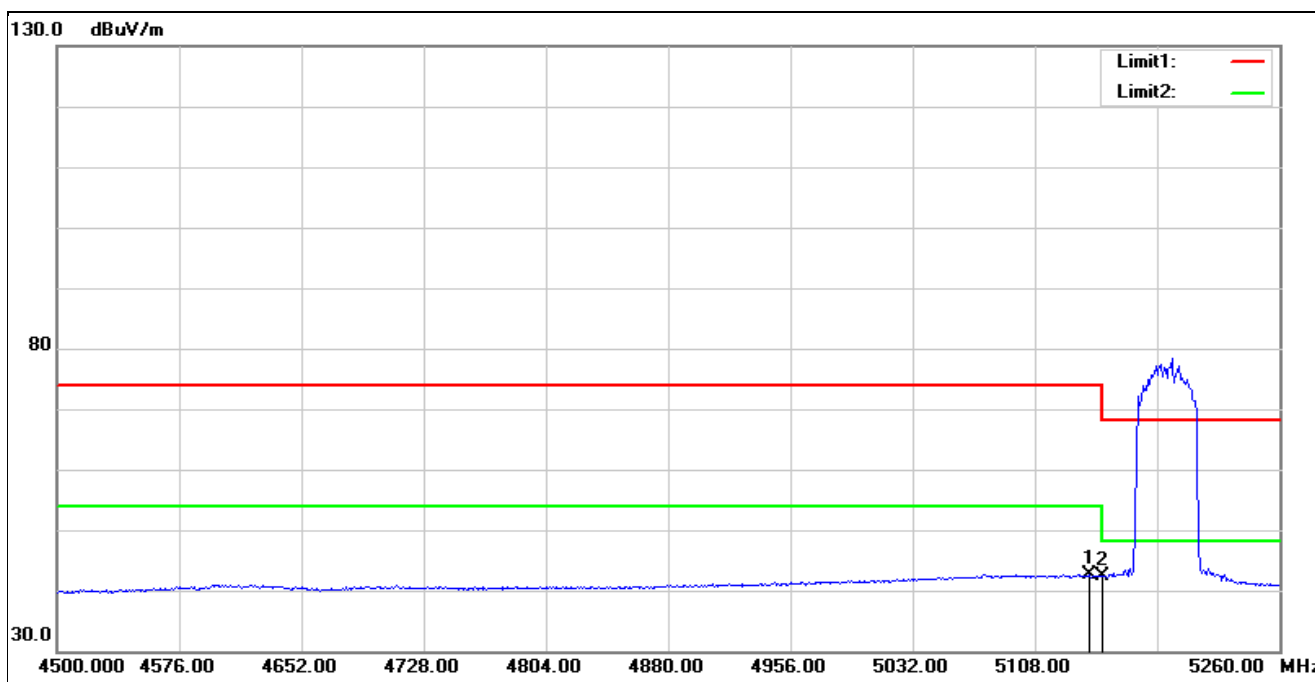


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5142.200	41.16	1.41	42.57	54.00	-11.43	AVG
2	5150.000	40.87	1.42	42.29	54.00	-11.71	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

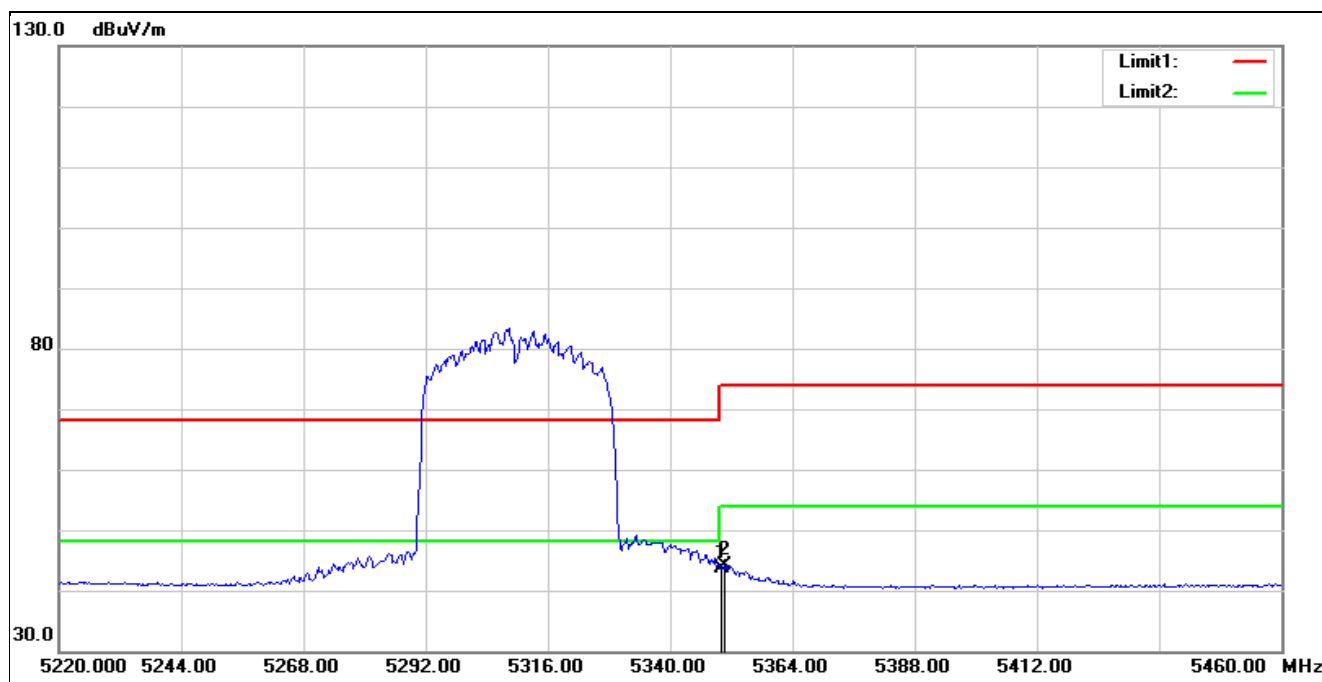


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	42.60	1.08	43.68	54.00	-10.32	AVG
2*	5350.800	43.14	1.09	44.23	54.00	-9.77	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5310 MHz		
Remark:			

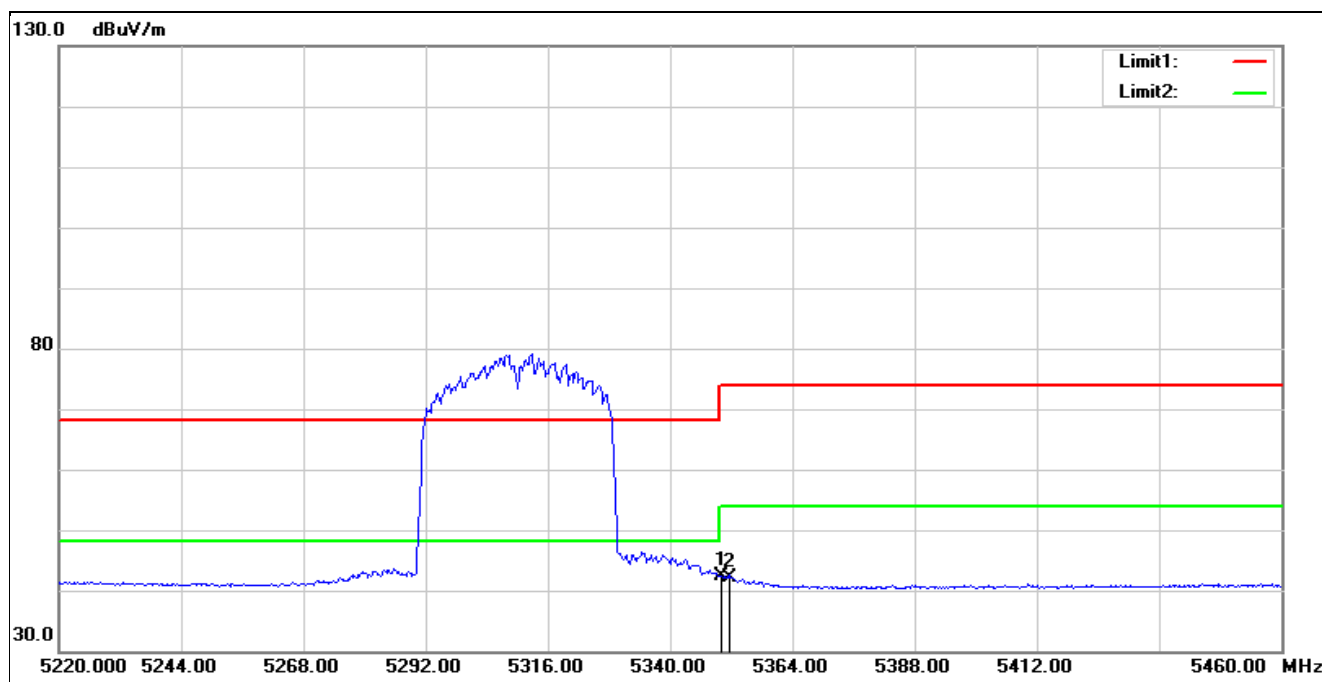


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.23	1.08	42.31	54.00	-11.69	AVG
2	5351.760	41.16	1.09	42.25	54.00	-11.75	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

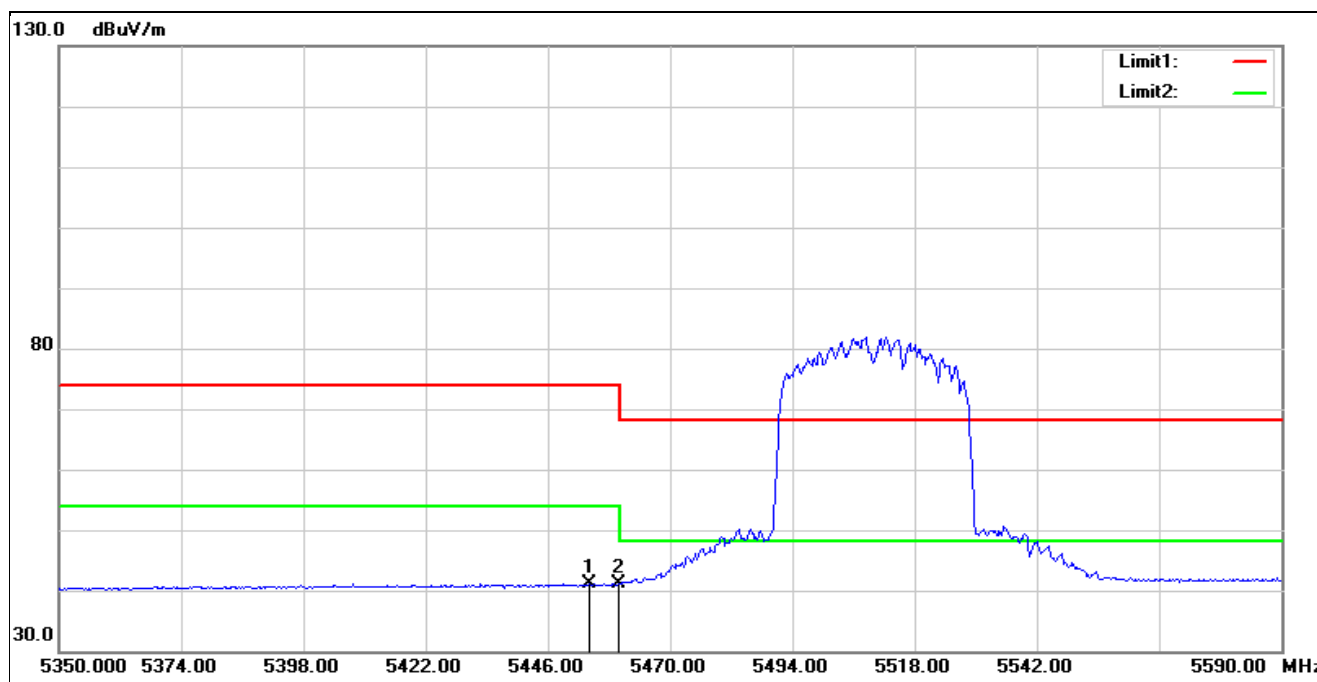

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.160	39.41	1.72	41.13	54.00	-12.87	AVG
2*	5460.000	39.44	1.73	41.17	54.00	-12.83	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 5510 MHz		
Remark:			

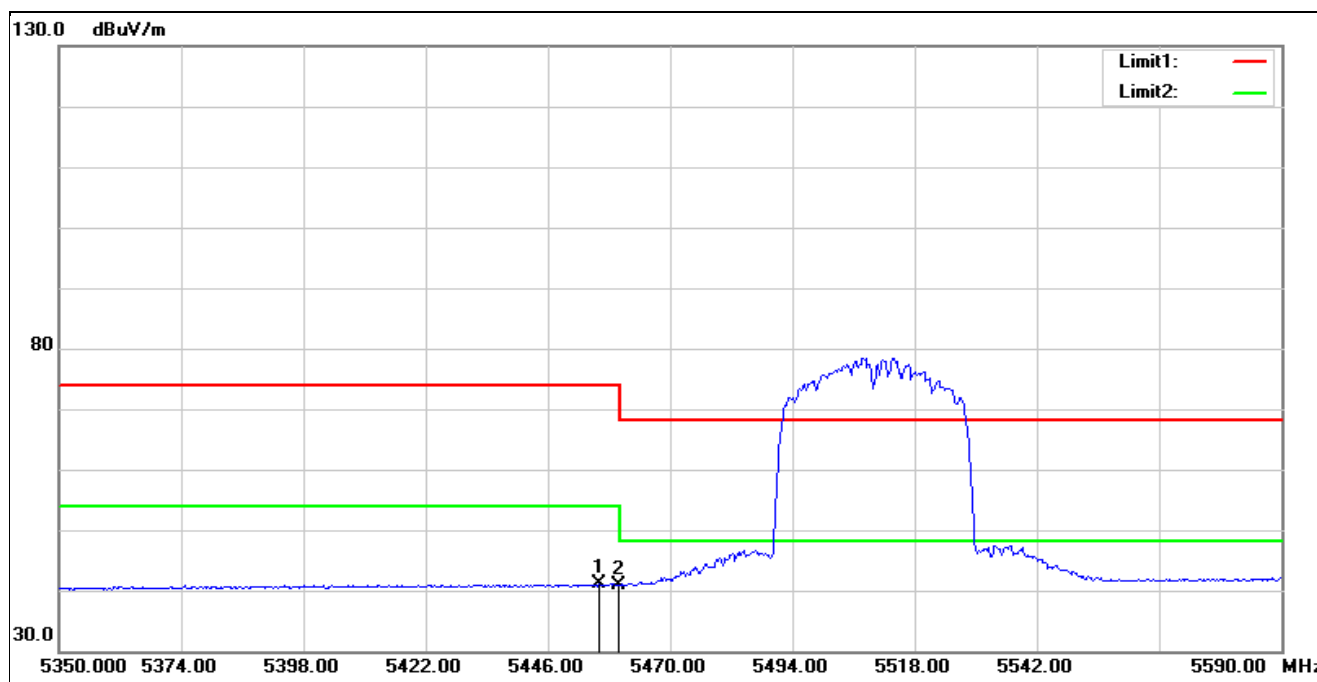

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.080	39.49	1.72	41.21	54.00	-12.79	AVG
2	5460.000	39.19	1.73	40.92	54.00	-13.08	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

Maximum Conducted Output Power Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---