



FCC Part 15C Test Report

FCC ID:2AATQ-HTAIRMKII

Applicant: REL Acoustics Ltd.

Address: North Road, Bridgend Industrial Estate Bridgend CF31 3TP United Kingdom

Manufacturer: Vistron (Dong Guan) Audio Equipment Co.,Ltd

Address: NO.17 Ji Cai Street, Song Gang District, Qing Xi Town, Dong Guan City, Guang Dong Province, China

EUT: Wireless Transmitter & Receiver

Trade Mark: REL

Model Number: HT-Air MKII

Date of Receipt: Mar. 23, 2023

Test Date: Mar. 24, 2023 - May 19, 2023

Date of Report: May 19, 2023

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC CFR Title 47 Part 15 Subpart C Section 15.407

Applicable Standards: RSS-247 Issue 2: February 2017
RSS-GEN, Issue 5: March 2019
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20230519034E

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1. SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION Limits	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~25GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	21
3.3.1 TEST REQUIREMENT:	21
3.3.2 TEST PROCEDURE	21
3.3.3 DEVIATION FROM TEST STANDARD	21
3.3.4 TEST SETUP	22
3.3.5 EUT OPERATING CONDITIONS	22
4.POWER SPECTRAL DENSITY TEST	24
4.1.1 APPLIED PROCEDURES / LIMIT	24
4.1.2 TEST PROCEDURE	24
4.1.3DEVIATION FROM STANDARD	24
4.1.4TEST SETUP	24



Table of Contents	Page
4.1.5 EUT OPERATION CONDITIONS	24
4.1.6 TEST RESULTS	25
5. CHANNEL BANDWIDTH	27
5.1.1 APPLIED PROCEDURES / LIMIT	27
5.1.2 TEST PROCEDURE	27
5.1.3 DEVIATION FROM STANDARD	27
5.1.4 TEST SETUP	27
5.1.5 EUT OPERATION CONDITIONS	27
5.1.6 TEST RESULTS	28
6. PEAK OUTPUT POWER TEST	32
6.1.1 APPLIED PROCEDURES / LIMIT	32
6.1.2 TEST PROCEDURE	32
6.1.3 DEVIATION FROM STANDARD	32
6.1.4 TEST SETUP	32
6.1.5 EUT OPERATION CONDITIONS	32
6.1.6 TEST RESULTS	32
7. CONDUCTED BAND EDGE	33
7.1.1 APPLICABLE STANDARD	33
7.1.2 TEST PROCEDURE	33
7.1.3 DEVIATION FROM STANDARD	33
7.1.4 TEST SETUP	33
7.1.5 EUT OPERATION CONDITIONS	33
7.1.6 TEST RESULTS	34
8. ANTENNA REQUIREMENT	35
9. TEST SEUUP PHOTO	36
10. EUT PHOTO	36



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.407 (a)	Conducted Peak Output Power	PASS	
FCC part 15.407 (e)	6dB Bandwidth& 99% OCB	PASS	
FCC part 15.407 (a)	Power Spectral Density	PASS	
FCC part 15.407(b)	Conducted Bandedge	PASS	
FCC part 15.407(b)/15.209	Radiated Emission and Restricted Bands	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

ISED Registration number: 27485

IC Registered No.:CN0118

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Transmitter & Receiver
Model No.:	HT-Air MKII
Sample ID:	DL-20230519034E-1#
Serial No.:	N/A
Model Difference	N/A
Operation Frequency:	5727MHz~5848MHz
Channel numbers:	62
Channel separation:	2MHz
Modulation technology:	FSK
Antenna Type:	Internal Antenna
Antenna gain:	0.26dBi
Power supply:	DC 5V from Adapter
Adapter information	
Manufacturer:	Shenzhen Merryking Electronics Co., Ltd.
Model No.:	MKC-0500500DEXD
Power Input:	100-240V~50/60Hz 0.4A
Output:	DC 5V/0.5A

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5727	20	5765	38	5801
2	5729	21	5767	39	5803
3	5731	22	5769	40	5805
4	5733	23	5787	41	5807
5	5735	24	5773	42	5809
6	5737	25	5775	43	5811
7	5739	26	5777	51	5827
8	5741	27	5780	52	5829
9	5743	28	5781	53	5831
10	5745	29	5783	54	5833
11	5747	30	5785	55	5835
12	5749	31	5787	56	5837
13	5751	32	5789	57	5839
14	5753	33	5791	58	5841
15	5755	34	5793	59	5843
16	5757	35	5795	60	5845
17	5759	36	5797	61	5847
18	5761	37	5799	62	5848
19	5763				



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH01	FSK
Mode 2	CH31	
Mode 3	CH62	
For Conducted & Radiated Emission		
Final Test Mode	Description	
Mode 1	CH01	FSK
Mode 2	CH31	
Mode 3	CH62	


Note:

(1) The measurements are performed at the highest, middle, lowest available channels.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Wireless Transmitter & Receiver	HT-Air MKII	N/A	EUT
AE	Notebook	B40-80	MP07F6JD	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Test software Version	Test program: EMI_Tool_V23_EverestekInc_2021_1116.exe		
Frequency	5727MHz	5787MHz	5848MHz
Power Setting of Softwave	5	5	5



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 05, 2022	Nov. 04, 2023
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 05, 2022	Nov. 04, 2023
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 05, 2022	Nov. 04, 2023
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2022	Nov. 04, 2023
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 05, 2022	Nov. 04, 2023
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 05, 2022	Nov. 04, 2023
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 05, 2022	Nov. 04, 2023
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 05, 2022	Nov. 04, 2023
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 05, 2022	Nov. 04, 2023
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 05, 2022	Nov. 04, 2023
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 05, 2022	Nov. 04, 2023
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 05, 2022	Nov. 04, 2023
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 05, 2022	Nov. 04, 2023
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 05, 2022	Nov. 04, 2023
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 05, 2022	Nov. 04, 2023
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 05, 2022	Nov. 04, 2023

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 05, 2022	Nov. 04, 2023
3	LISN	R&S	ENV216	102417	Nov. 05, 2022	Nov. 04, 2023
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2022	Nov. 04, 2023

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

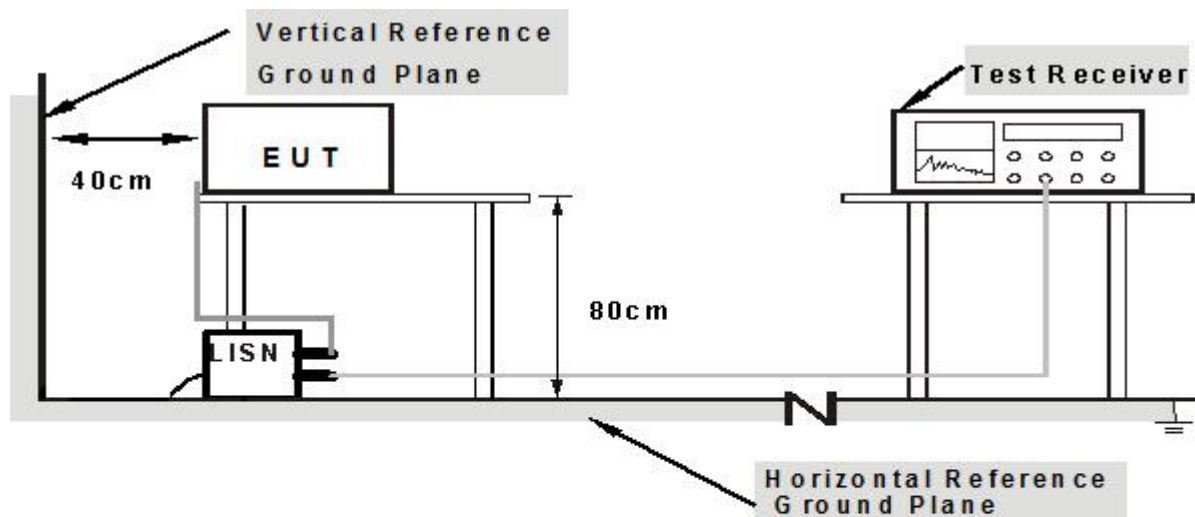

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

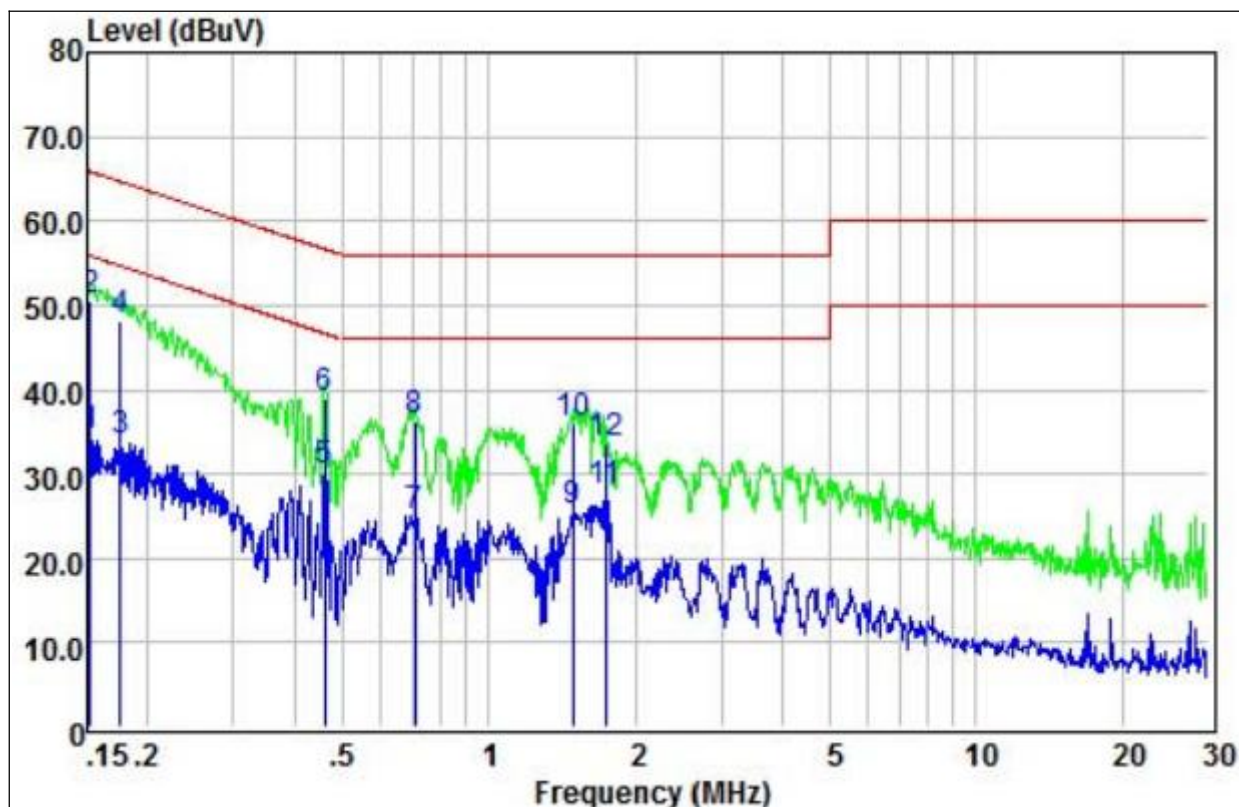


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	24.78	9.63	0.05	34.46	55.87	-21.41	Average
2	0.15	40.91	9.63	0.05	50.59	65.87	-15.28	QP
3	0.18	24.32	9.64	0.05	34.01	54.68	-20.67	Average
4	0.18	38.57	9.64	0.05	48.26	64.68	-16.42	QP
5	0.46	20.50	9.68	0.05	30.23	46.67	-16.44	Average
6	0.46	29.20	9.68	0.05	38.93	56.67	-17.74	QP
7	0.70	15.22	9.64	0.05	24.91	46.00	-21.09	Average
8	0.70	26.57	9.64	0.05	36.26	56.00	-19.74	QP
9	1.49	15.96	9.60	0.06	25.62	46.00	-20.38	Average
10	1.49	26.40	9.60	0.06	36.06	56.00	-19.94	QP
11	1.74	18.30	9.59	0.06	27.95	46.00	-18.05	Average
12	1.74	24.02	9.59	0.06	33.67	56.00	-22.33	QP



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

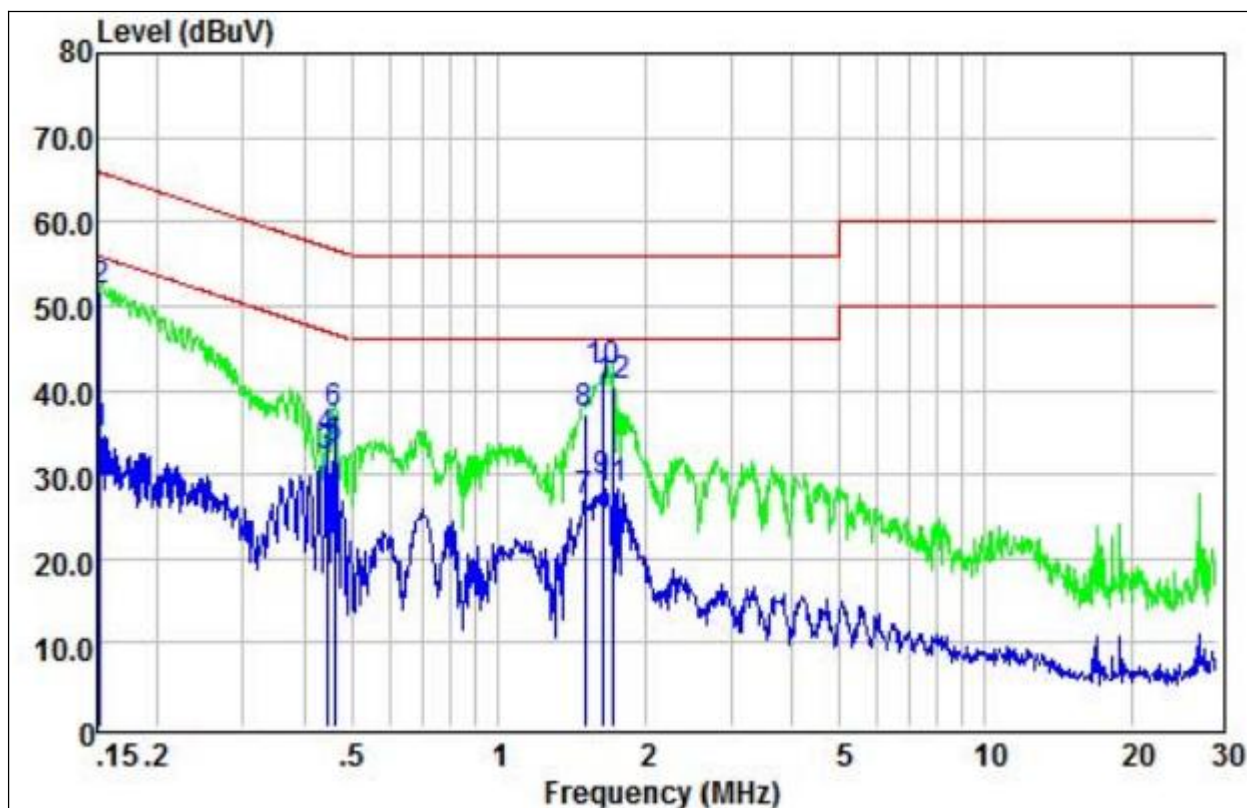

Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	25.04	9.60	0.05	34.69	55.87	-21.18	Average
2	0.15	41.99	9.60	0.05	51.64	65.87	-14.23	QP
3	0.44	22.59	9.62	0.05	32.26	46.98	-14.72	Average
4	0.44	24.59	9.62	0.05	34.26	56.98	-22.72	QP
5	0.46	23.30	9.63	0.05	32.98	46.67	-13.69	Average
6	0.46	27.37	9.63	0.05	37.05	56.67	-19.62	QP
7	1.51	17.19	9.59	0.06	26.84	46.00	-19.16	Average
8	1.51	27.49	9.59	0.06	37.14	56.00	-18.86	QP
9	1.64	19.35	9.59	0.06	29.00	46.00	-17.00	Average
10	1.64	32.56	9.59	0.06	42.21	56.00	-13.79	QP
11	1.72	18.67	9.58	0.06	28.31	46.00	-17.69	Average
12	1.72	30.95	9.58	0.06	40.59	56.00	-15.41	QP



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~230	180	3
230~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 - 928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

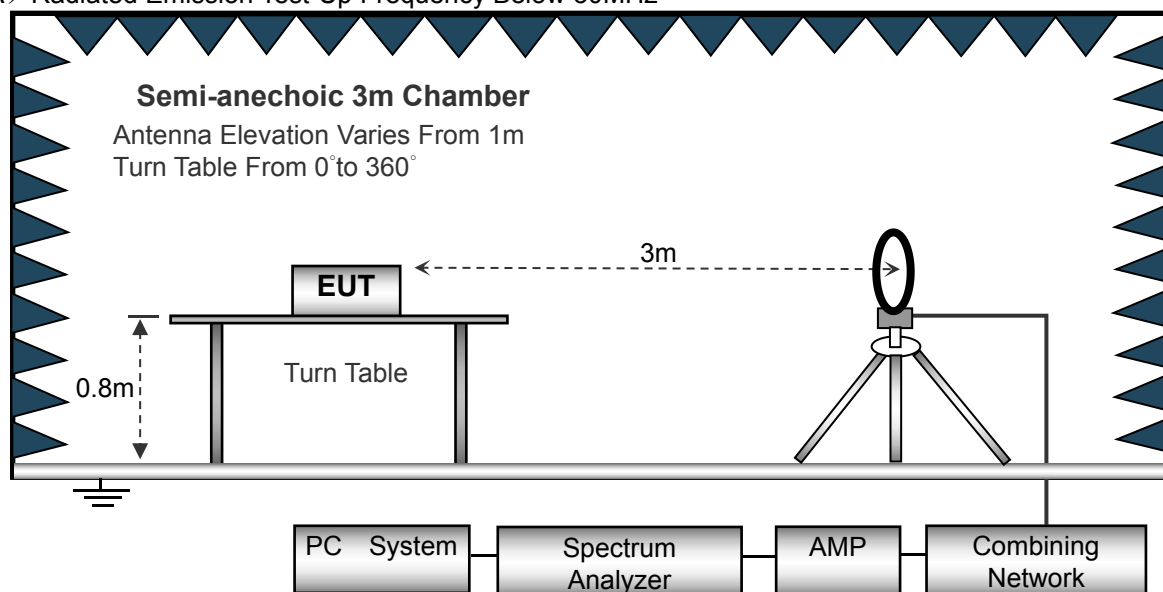

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

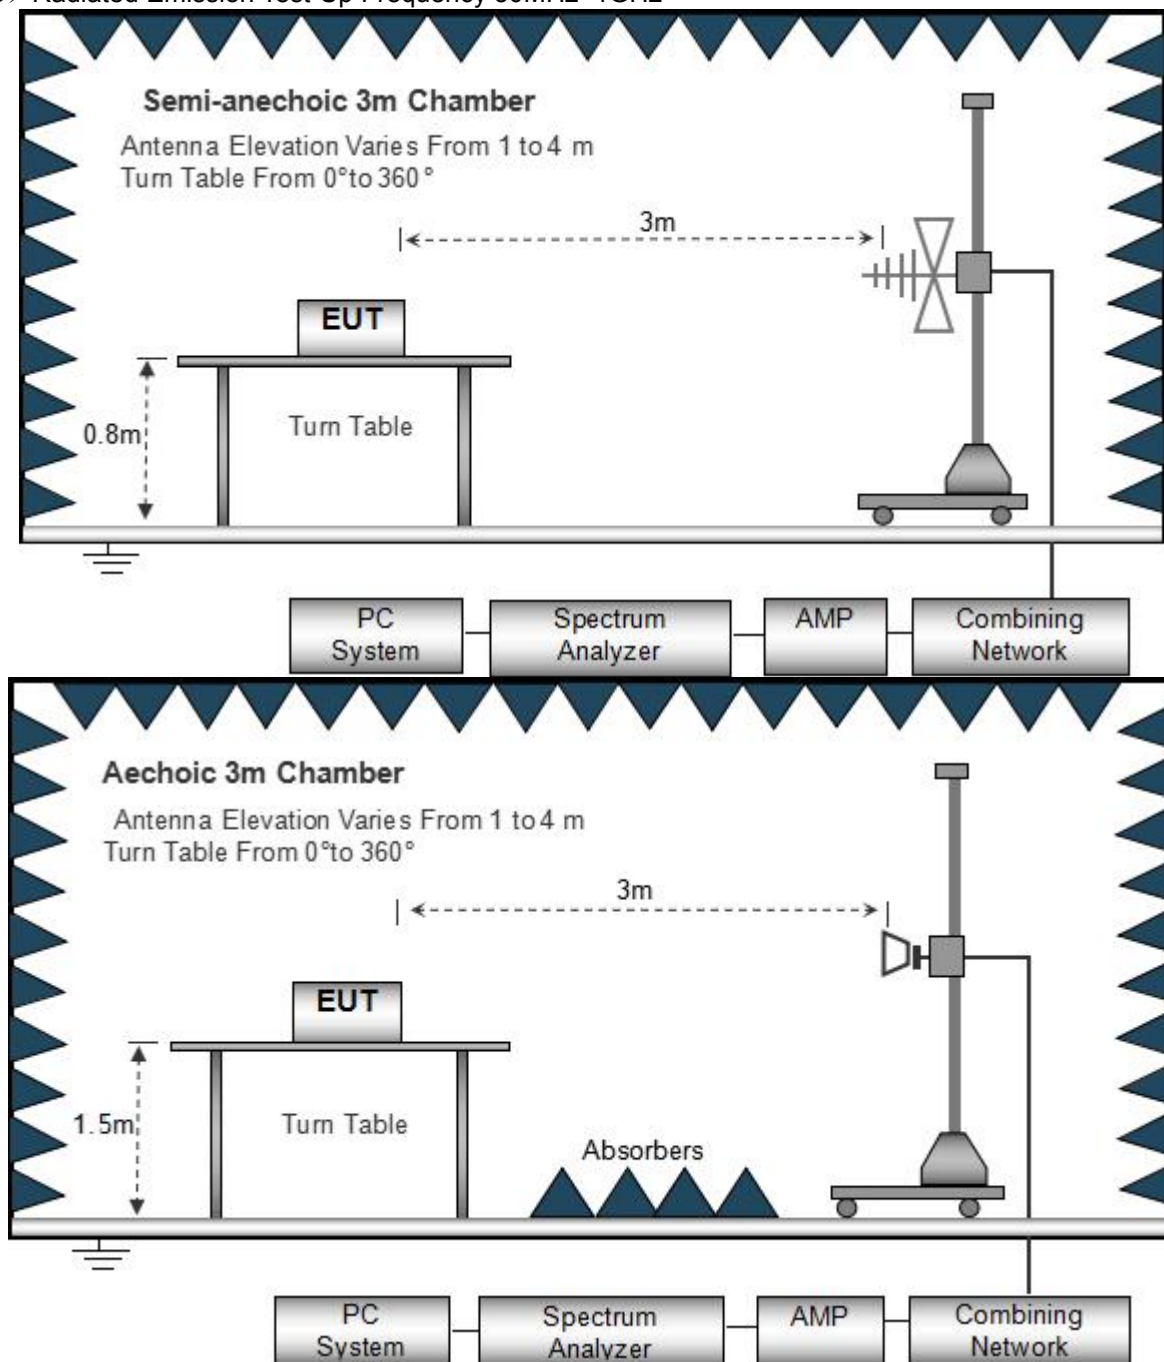

(C) Radiated Emission Test-Up Frequency Above 1GHz

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 1		

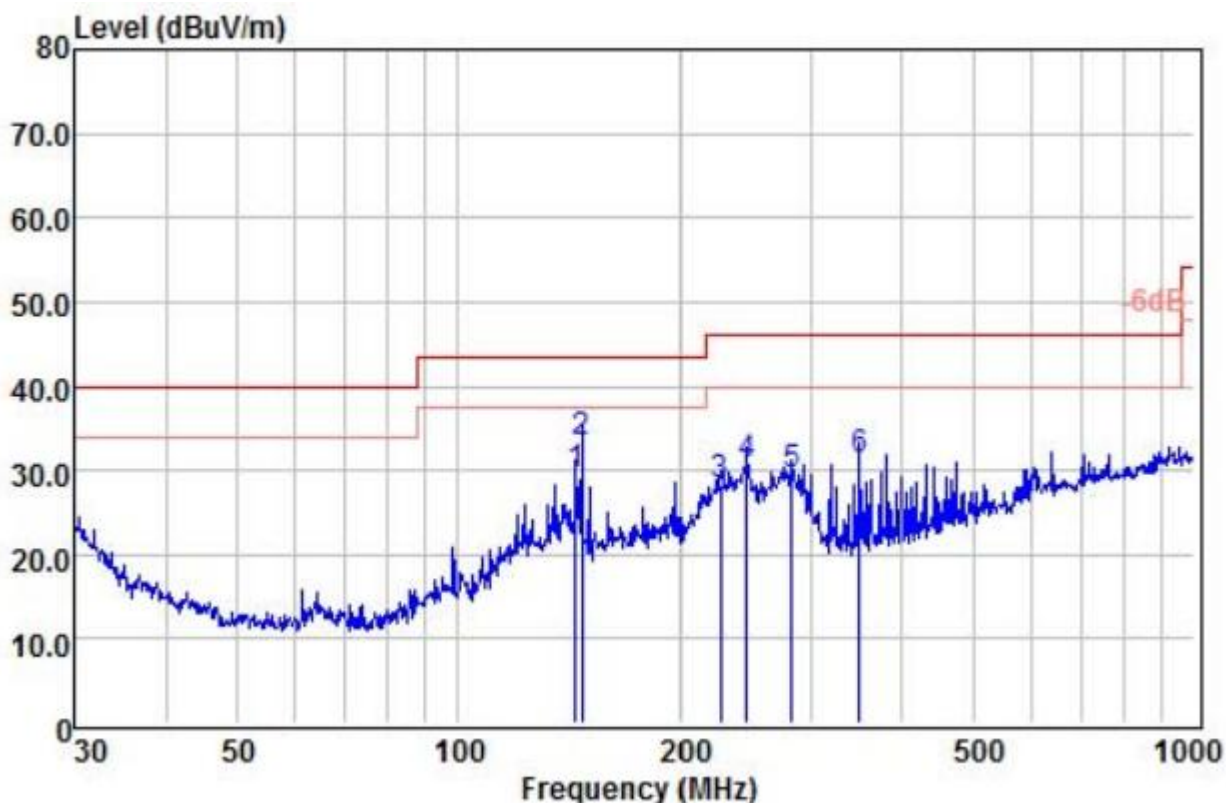

	Freq	ReadAntenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	144.33	19.79	8.70	0.82	29.31	43.50	-14.19
2	147.40	23.88	8.70	0.82	33.40	43.50	-10.10
3	226.89	14.79	12.38	0.94	28.11	46.00	-17.89
4	245.95	16.79	12.90	0.98	30.67	46.00	-15.33
5	282.99	15.09	13.20	1.05	29.34	46.00	-16.66
6	350.48	14.58	15.50	1.21	31.29	46.00	-14.71


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 1		

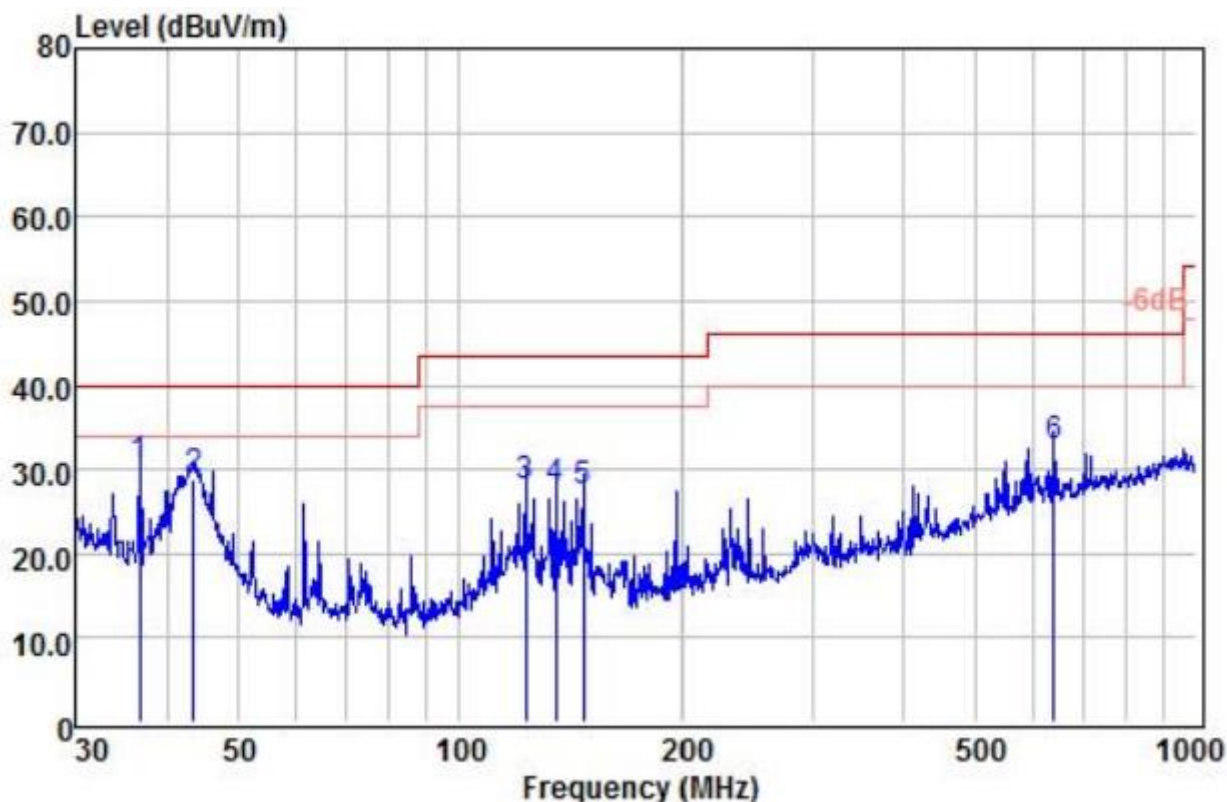

	Freq	ReadAntenna	Cable		Limit	Over	
	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	36.77	15.22	14.81	0.32	30.35	40.00	-9.65 QP
2	43.51	17.27	11.46	0.26	28.99	40.00	-11.01 QP
3	122.83	18.80	8.44	0.79	28.03	43.50	-15.47 QP
4	135.03	18.39	8.35	0.81	27.55	43.50	-15.95 QP
5	147.40	17.74	8.84	0.82	27.40	43.50	-16.10 QP
6	640.61	9.61	21.36	1.67	32.64	46.00	-13.36 QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

FSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5727									
V	11454.00	56.41	30.55	5.77	24.66	56.29	68.20	-11.91	PK
V	11454.00	45.83	30.55	5.77	24.66	45.71	54.00	-8.29	AV
V	17181.00	55.26	30.33	6.32	24.55	55.8	68.20	-12.4	PK
V	17181.00	44.62	30.33	6.32	24.55	45.16	54.00	-8.84	AV
V	22908.00	51.06	30.85	7.45	24.69	52.35	68.20	-15.85	PK
H	11454.00	55.98	30.55	5.77	24.66	55.86	68.20	-12.34	PK
H	11454.00	45.03	30.55	5.77	24.66	44.91	54.00	-9.09	AV
H	17181.00	53.67	30.33	6.32	24.55	54.21	68.20	-13.99	PK
H	17181.00	44.57	30.33	6.32	24.55	45.11	54.00	-8.89	AV
H	22908.00	51.20	30.85	7.45	24.69	52.49	68.20	-15.71	PK
operation frequency:5787									
V	11574.00	55.64	30.55	5.77	24.66	55.52	68.20	-12.68	PK
V	11574.00	45.28	30.55	5.77	24.66	45.16	54.00	-8.84	AV
V	17361.00	53.16	30.33	6.32	24.55	53.7	68.20	-14.5	PK
V	17361.00	44.21	30.33	6.32	24.55	44.75	54.00	-9.25	AV
V	23084.00	51.27	30.85	7.45	24.69	52.56	68.20	-15.64	PK
H	11574.00	55.43	30.55	5.77	24.66	55.31	68.20	-12.89	PK
H	11574.00	45.16	30.55	5.77	24.66	45.04	54.00	-8.96	AV
H	17361.00	54.63	30.33	6.32	24.55	55.17	68.20	-13.03	PK
H	17361.00	44.52	30.33	6.32	24.55	45.06	54.00	-8.94	AV
H	23084.00	51.03	30.85	7.45	24.69	52.32	68.20	-15.88	PK
operation frequency:5848									
V	11696.00	55.36	30.55	5.77	24.66	55.24	68.20	-12.96	PK
V	11696.00	45.27	30.55	5.77	24.66	45.15	54.00	-8.85	AV
V	17544.00	54.19	30.33	6.32	24.55	54.73	68.20	-13.47	PK
V	17544.00	45.28	30.33	6.32	24.55	45.82	54.00	-8.18	AV
V	23216.00	51.34	30.85	7.45	24.69	52.63	68.20	-15.57	PK
H	11696.00	56.83	30.55	5.77	24.66	56.71	68.20	-11.49	PK
H	11696.00	45.03	30.55	5.77	24.66	44.91	54.00	-9.09	AV
H	17544.00	54.23	30.33	6.32	24.55	54.77	68.20	-13.43	PK
H	17544.00	44.17	30.33	6.32	24.55	44.71	54.00	-9.29	AV
H	23216.00	51.24	30.85	7.45	24.69	52.53	68.20	-15.67	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205,

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

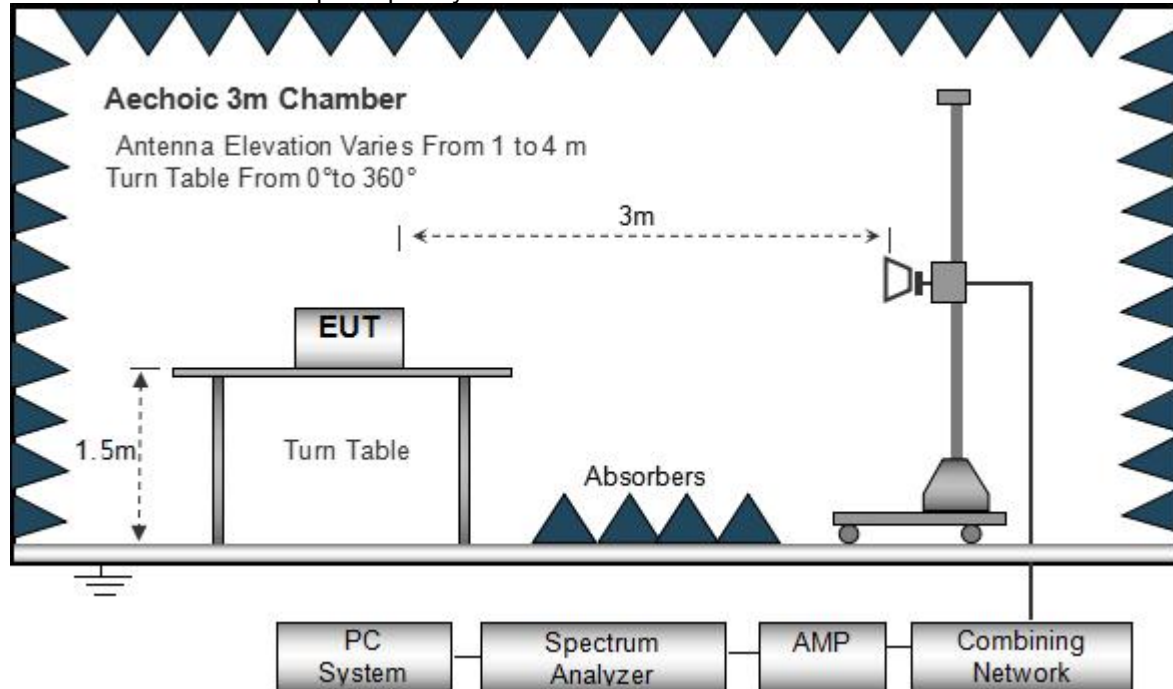

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT**

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
V	5725.00	56.32	30.21	4.83	23.97	54.91	68.2	-13.29	PK
V	5725.00	45.96	30.21	4.83	23.97	44.55	54	-9.45	AV
V	5850.00	56.39	30.22	4.85	23.98	55	68.2	-13.2	PK
V	5850.00	46.71	30.22	4.85	23.98	45.32	54	-8.68	AV
H	5725.00	57.39	30.21	4.83	23.97	55.98	68.2	-12.22	PK
H	5725.00	46.51	30.21	4.83	23.97	45.1	54	-8.9	AV
H	5850.00	56.23	30.22	4.85	23.98	54.84	68.2	-13.36	PK
H	5850.00	46.33	30.22	4.85	23.98	44.94	54	-9.06	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.407 (e)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01

4.1.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.407) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407 (e)	Power Spectral Density	30dBm/500kHz	5725-5850	PASS

4.1.2 TEST PROCEDURE


Methods refer to FCC KDB 789033

- Set RBW $\geq 1/T$, where T is defined in II.B.I.a).
- Set VBW ≥ 3 RBW.
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

4.1.3 DEVIATION FROM STANDARD

No deviation.

4.1.4 TEST SETUP

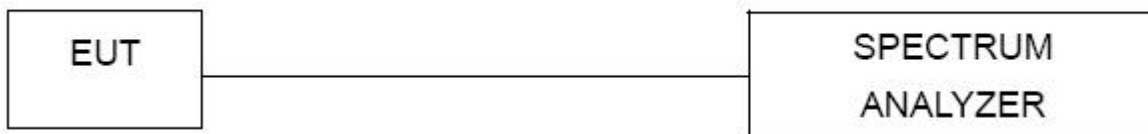

4.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	FSK	Test Voltage :	AC 120V/60Hz


Frequency	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Result
5727 MHz	2.517	30.00	PASS
5787 MHz	2.805	30.00	PASS
5848 MHz	2.653	30.00	PASS

CH01

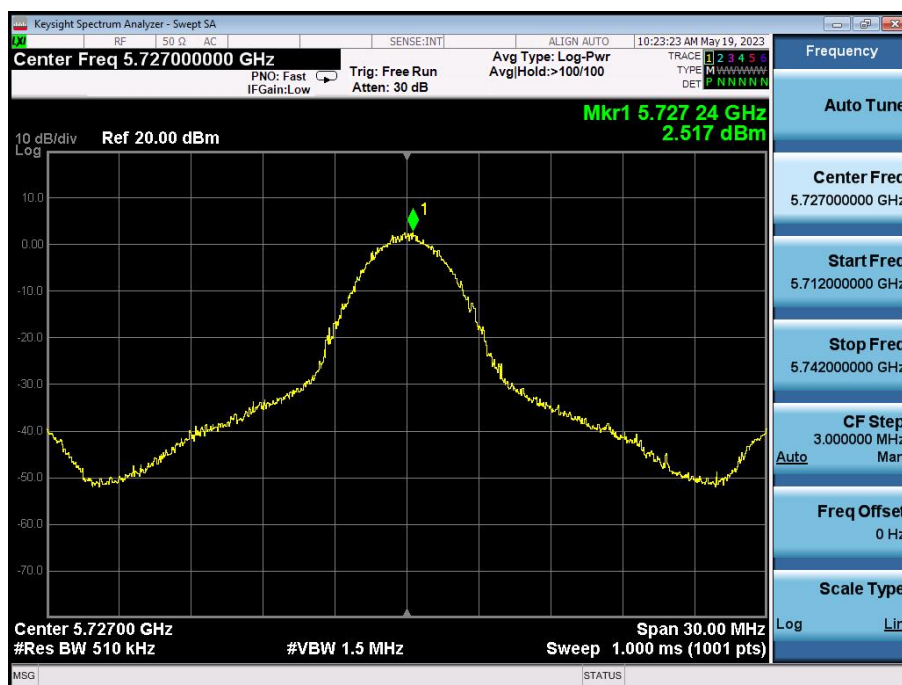




CH31

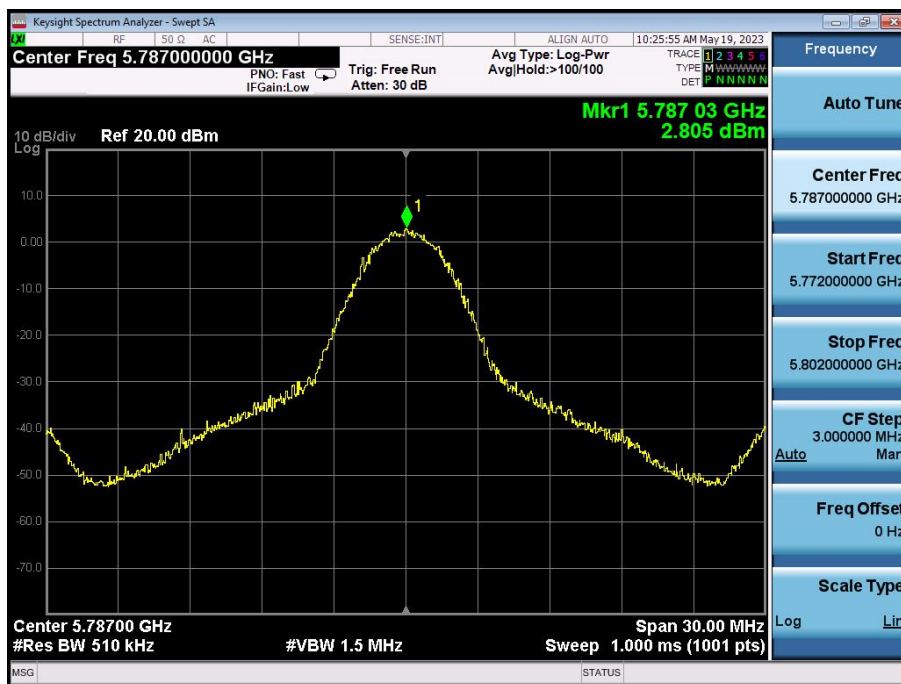

CH62

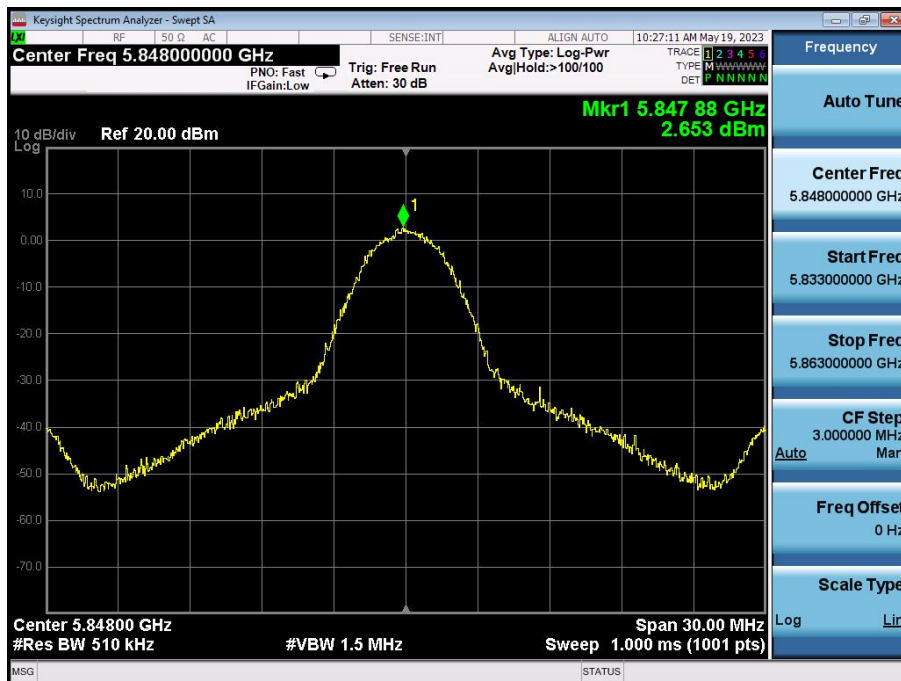



5. CHANNEL BANDWIDTH

5.1.1 APPLIED PROCEDURES / LIMIT

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth. The 26 dB bandwidth is used to determine the conducted power limits. The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

5.1.2 TEST PROCEDURE

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP



5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	FSK	Test Voltage :	AC 120V/60Hz

Test channel	6dB Bandwidth (MHz)	99% Occupied bandwidth(MHz)	Limit(KHz)	Result
Lowest	2.038	4.025	>500	Pass
Middle	2.145	4.075		
Highest	2.141	3.989		

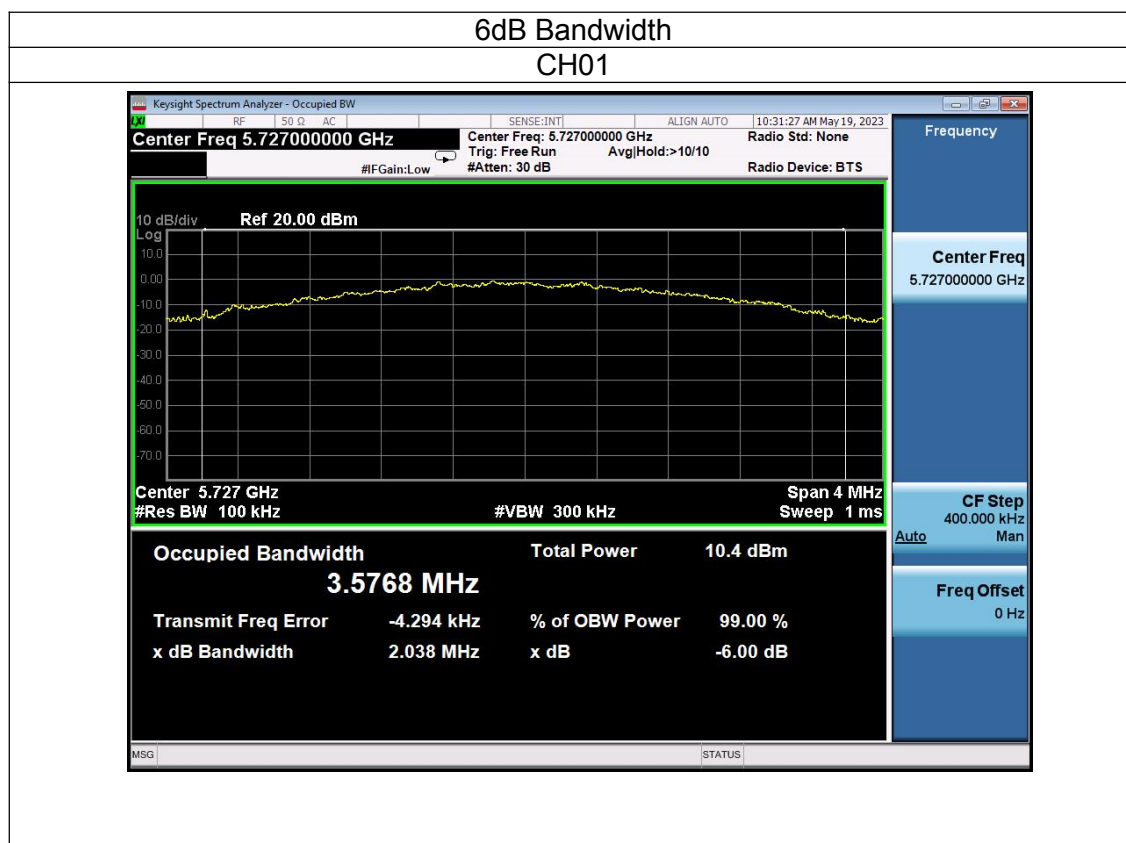



CH31



CH62





99% Bandwidth

CH01



CH31





CH62



**6. PEAK OUTPUT POWER TEST**

Test Requirement:	FCC Part15 C Section 15.407(a)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01

6.1.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.407) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a)	Peak Output Power	1 watt or 30dBm	5725-5850	PASS

6.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter.

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP**6.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	FSK	Test Voltage :	AC 120V/60Hz

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	3.214	30.00	Pass
Middle	2.763		
Highest	2.537		



7. CONDUCTED BAND EDGE

7.1.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

FCC: For the band 5725-5825 MHz, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

7.1.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 1MHz.
- B) Set the VBW = 3MHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP




7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




7.1.6 TEST RESULTS

5727MHz

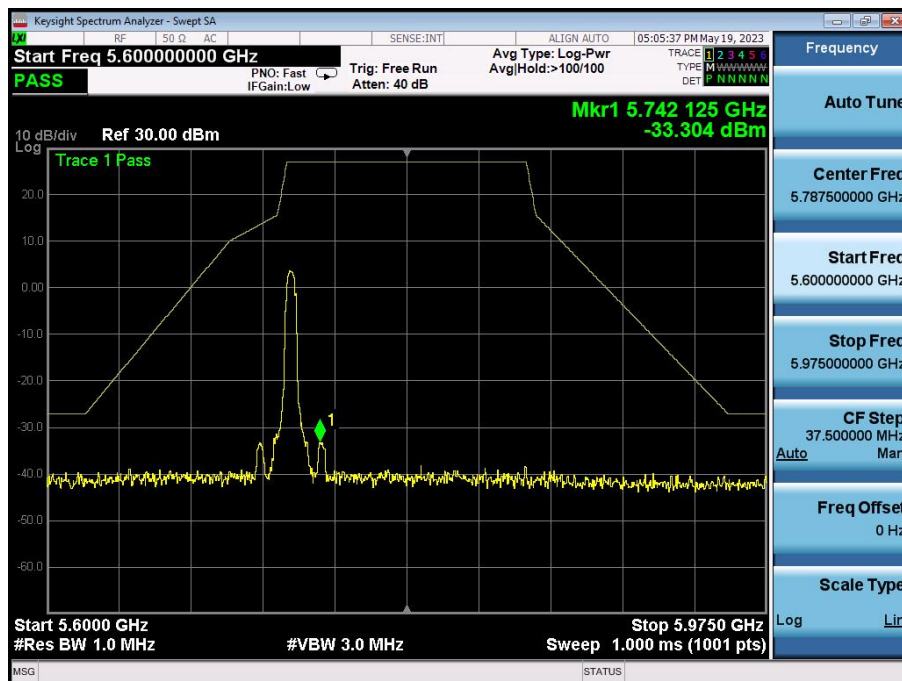


5848MHz

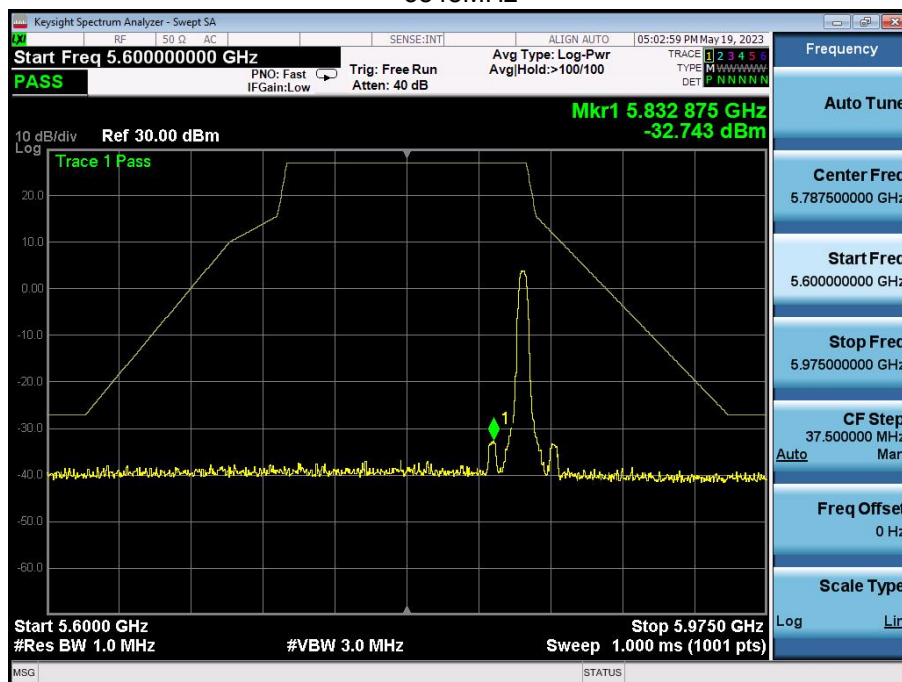



8. ANTENNA REQUIREMENT

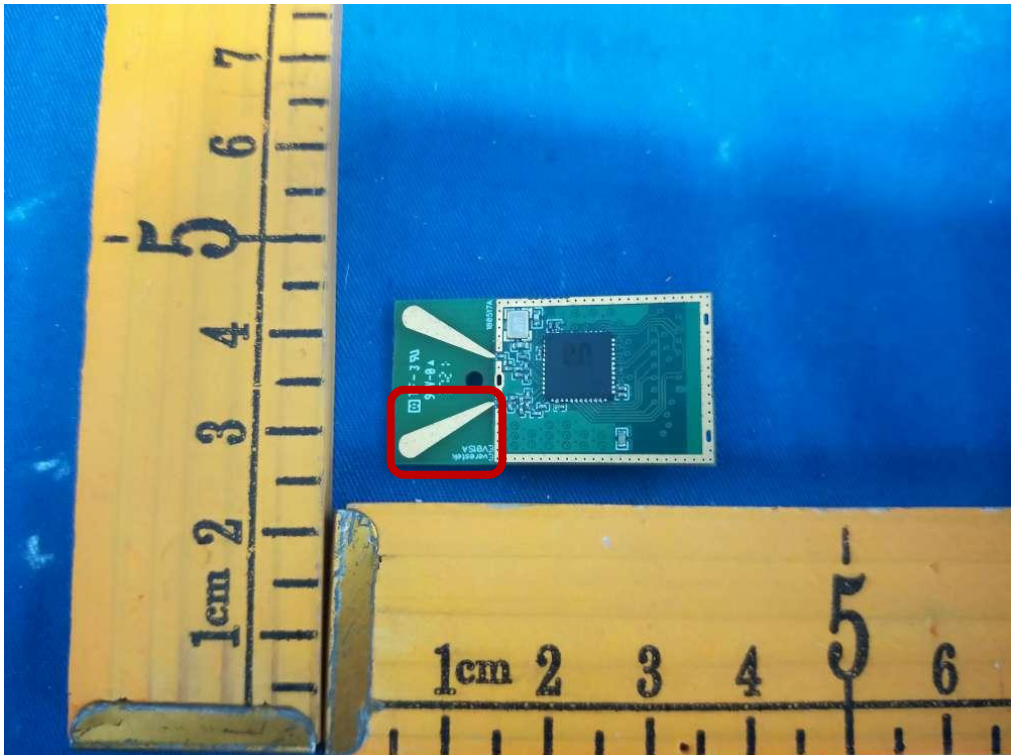Standard requirement:	FCC part 15.203
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For RSS-Gen Section 8.3: A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power	
EUT Antenna:	
The antennas are Internal Antenna, the best case gain of the antennas are 0.26dBi.	
	



9. TEST SEUUP PHOTO

Reference to the appendix I for details.

10. EUT PHOTO

Reference to the appendix II for details.

***** END OF REPORT *****