

SAR TEST REPORT FCC 47 CFR Part 2.1093 Industry Canada RSS-102 RF-Exposure evaluation of portable equipment	
Report Reference No.	G0M-1303-2685-TFC093S-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A
Applicant's name	eResearch Technology GmbH
Address	Sieboldstrasse 3 97230 Estenfeld Germany
Test specification:	
Standard	FCC 47 CFR Part 2 §2.1093 FCC OET Bulletin 65 Supplement C 01-01 IEEE Std. 1528 - 2003 IC RSS-102 Issue 4 Safety Code 6 (2009)
Non-standard test method	None
Test scope	complete Radio compliance test
Equipment under test (EUT):	
Product description	Asthma Monitor AM3
Model No.	AM3 GSM
Hardware version	01
Firmware / Software version	01
Contains	FCC-ID: 2AAUFAM3G01 IC: 11335A-AM3G01
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2013-08-05

Date (s) of performance of tests: 2013-08-22 - 2013-10-08


Compiled by: Christian Weber

Tested by (+ signature).....: Matthias Handrik
(Testing Manager)

Approved by (+ signature): Jens Zimmermann
(Test Lab Manager)

Date of issue: 2013-10-23

Total number of pages: 103



General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Test Report No.: G0M-1303-2685-TFC093S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Version History

Version	Issue Date	Remarks	Revised by
01	2013-10-23	Initial Release	

REPORT INDEX







1	EQUIPMENT (TEST ITEM) DESCRIPTION	6
1.1	Equipment photos	7
1.2	Equipment setup photos	8
1.3	Antenna locations and dimensions	10
1.4	Reference Documents	11
1.5	Supporting Equipment Used During Testing	12
1.6	Supported standalone operating modes	13
1.7	Supported concurrent (multi-transmitter) operating modes	14
1.8	Supported use cases	15
1.9	Radio Test Modes	16
1.10	Test Positions	17
1.11	Test Equipment Used During Testing	18
2	RESULT SUMMARY	19
3	DEFINITIONS	20
3.1	Controlled Exposure	20
3.2	Uncontrolled Exposure	20
3.3	Localized SAR	20
4	LOCALIZED SAR MEASUREMENT EQUIPMENT	21
4.1	Complete SAR DASY5 Measurement System	21
4.2	Robot Arm	23
4.3	Data Acquisition Electronics	23
4.4	Isotropic E-Field Probe ≤ 3 GHz	24
4.5	Isotropic E-Field Probe ≤ 6 GHz	25
4.6	Test phantom and positioner	26
4.7	System Validation Dipoles	27
5	SINGLE-BAND SAR MEASUREMENT	28
5.1	General measurement description	28
5.2	SAR measurement description	28
5.3	Reference lines and points for Handsets	29
5.4	Test positions relative to the Head	30
5.5	Test positions relative to the human body	31
5.6	Test positions front to face	31
5.7	Measurement Uncertainty	32

6	TEST CONDITIONS AND RESULTS	33
6.1	Test Conditions and Results – Conducted Output Power	33
6.2	Test Conditions and Results – Test Exclusion	34
6.3	Test Conditions and Results – Tissue Validation	35
6.4	Test Conditions and Results – System Validation	37
6.5	Test Conditions and Results – Standalone SAR Measurement	38
ANNEX A	Very low duty factor operational description	39
ANNEX B	Calibration Documents	45
ANNEX C	System Validation Reports	78
ANNEX D	SAR Measurement Reports	83

1 Equipment (Test item) Description

Description	Asthma Monitor AM3	
Model	AM3 GSM	
Serial number	None	
Hardware version	01	
Software / Firmware version	01	
Contains FCC-ID	2AAUFAM3G01	
Contains IC	11335A-AM3G01	
Equipment type	End product	
Prototype or production unit	Identical Prototype	
Device category	Handset	
Environment	General public	
Radio technologies	Bluetooth 2.0 (BR only) GSM 850/1900 + GPRS 850/1900	
Operating frequency ranges	Bluetooth: 2402 – 2480 MHz GSM/GRPS 850: 824 - 849 MHz GSM/GRPS 1900: 1850 - 1910 MHz	
Modulations	Bluetooth: GFSK GSM/GPRS 850: GMSK GSM/GPRS 1900: GMSK	
Antenna Bluetooth	Type	integrated
	Model	Mica 2.4 GHz antenna
	Manufacturer	Antenova
	Gain	1.8
Antenna GSM/GPRS	Type	integrated
	Model	custom
	Manufacturer	eResearch Technology GmbH
	Gain	3.7
Power supply	V_{NOM}	3.7 VDC (Lithium Battery)
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Accessories	None	
Manufacturer	ecom instruments GmbH Industriestraße 2 97959 Assamstadt Germany	

1.2 Equipment setup photos

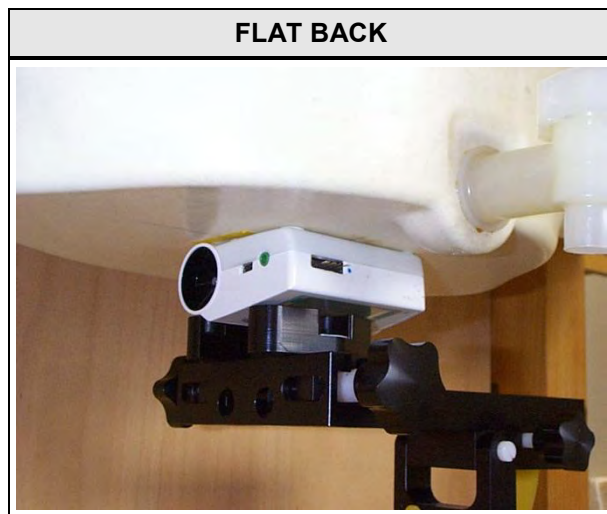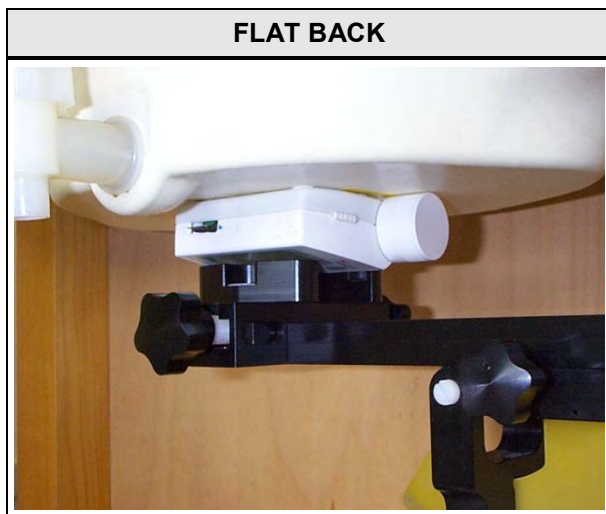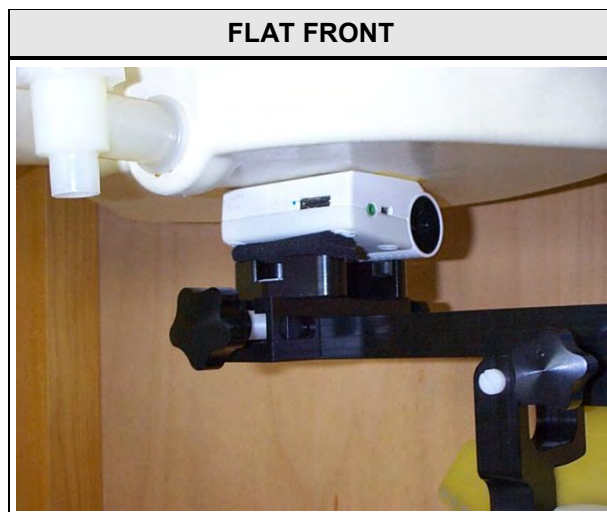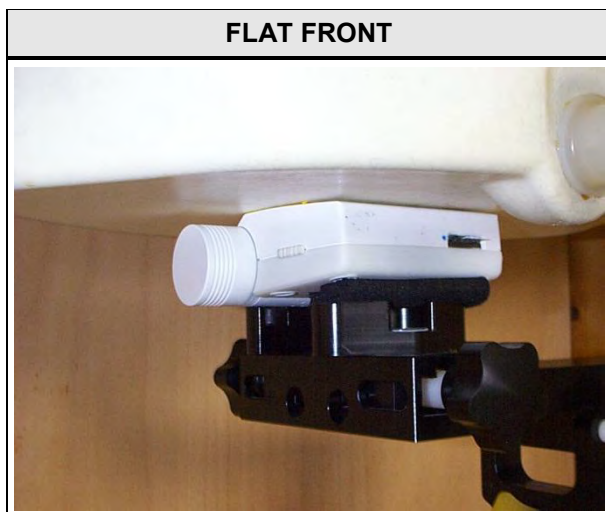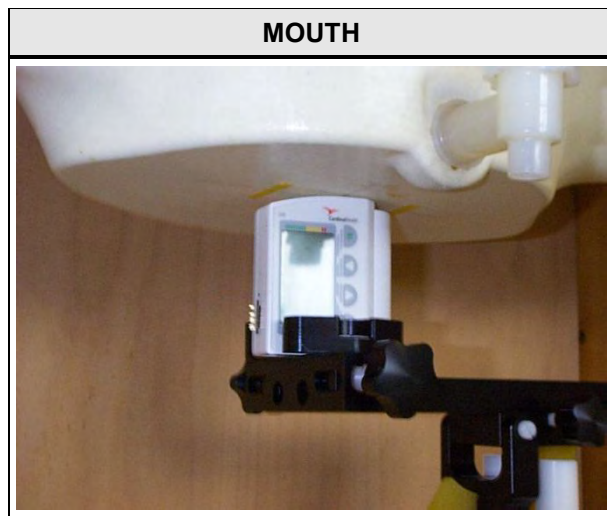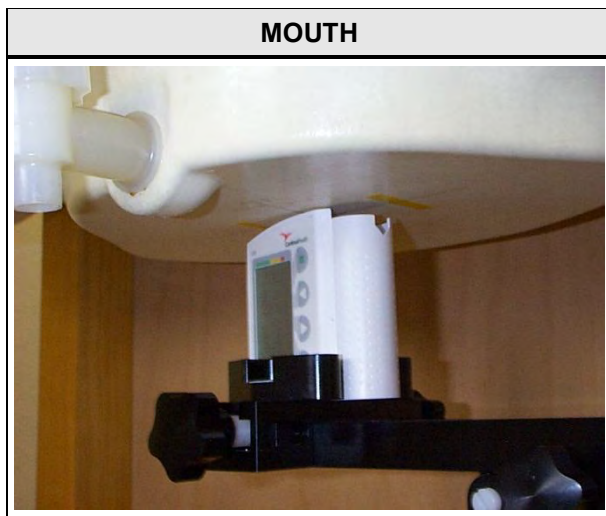

FLAT BOTTOM




FLAT BOTTOM



Test Report No.: G0M-1303-2685-TFC093S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

1.3 Antenna locations and dimensions

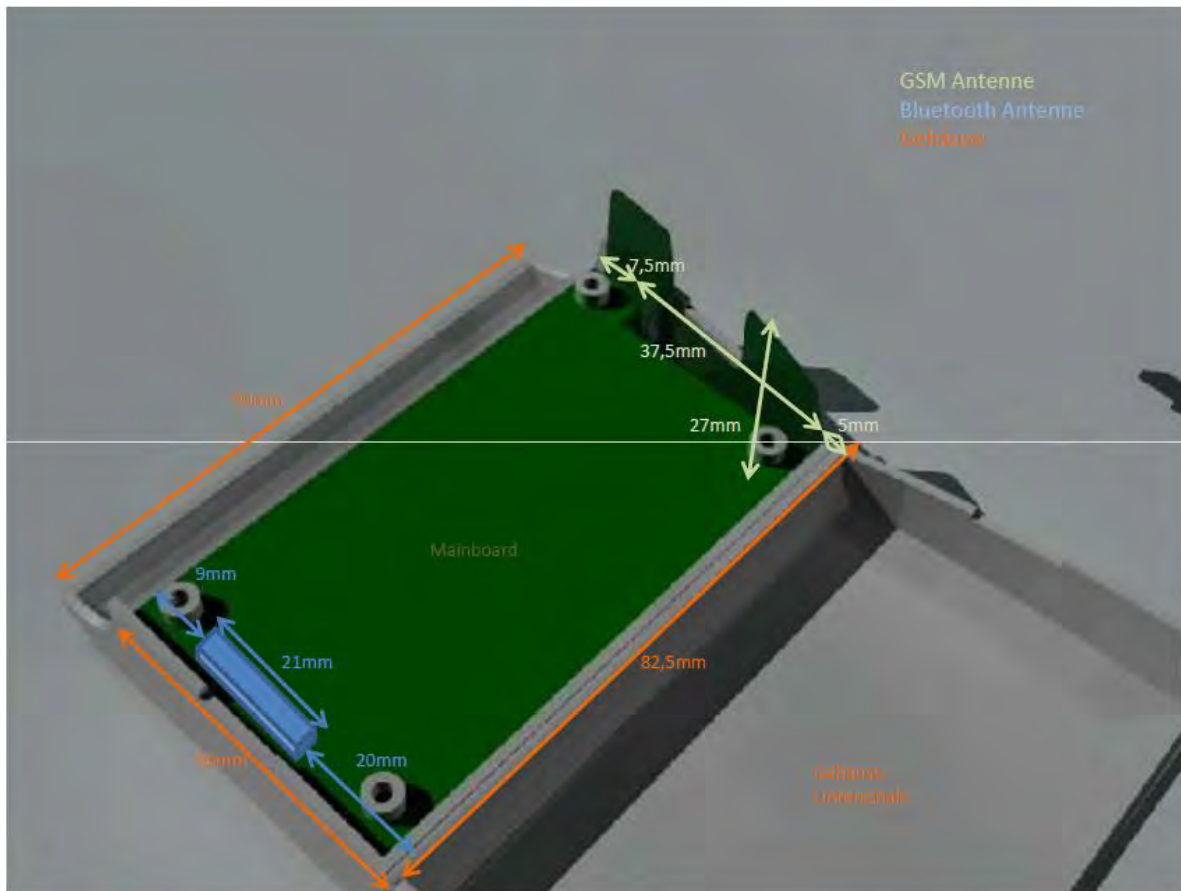

1.4 Reference Documents

Document
KDB Publication 447498 D01 v05r01 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB Publication 865664 D02 v01r01: RF Exposure Compliance Reporting and Documentation Considerations
KDB Publication 648474 D04 v01r01 : SAR Evaluation Considerations for Wireless Handsets
KDB Publication 865664 D01 v01r01 : SAR Measurement Requirements for 100 MHz to 6 GHz
KDB Publication 941225 D01 v02: SAR Measurement Procedures for 3G Devices
KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB Publication 941225 D03 v01: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
KDB Publication 941225 D05 v02r01: SAR Evaluation Considerations for LTE Devices
KDB Publication 447498 D01 v02 : SAR Measurement Procedures for USB Dongle Transmitters
KDB Publication 248227 D01 v01r02 : SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB Publication 450824 D01 v01r01 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz

1.5 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.6 Supported standalone operating modes

Mode	Modulation	Frequency range	Max. Duty cycle
Bluetooth BR	GFSK	2402 – 2480 MHz	0.77
GPRS850 1TS	GMSK	824.2 - 848.8	0.125
GPRS850 2TS	GMSK	824.2 - 848.8	0.25
GPRS1900 1TS	GMSK	1850.2 - 1909.8	0.125
GPRS1900 2 TS	GMSK	1850.2 - 1909.8	0.25

1.7 Supported concurrent (multi-transmitter) operating modes

None

1.8 Supported use cases

Use case	Distance to human body	corresponding test configuration
EUT placed against the human body	0 mm (worst case)	body-worn device
EUT placed against the human mouth	0 mm (worst case)	front-to-face device

1.9 Radio Test Modes

Mode	Settings
Bluetooth BR	Mode = Bluetooth Modulation = GFSK Duty cycle = 77% Data rate = 1 Mbps Power level = maximum Antenna = integrated
GPRS850 1TS	Mode = GSM Modulation = GFSK Duty cycle = 12.5% Power level = maximum (GAMMA 3) Antenna = integrated
GPRS850 2 TS	Mode = GSM Modulation = GFSK Duty cycle = 25% Power level = maximum (GAMMA 3) Antenna = integrated
GPRS1900 1TS	Mode = GSM Modulation = GFSK Duty cycle = 12.5% Power level = maximum (GAMMA 3) Antenna = integrated
GPRS1900 2TS	Mode = GSM Modulation = GFSK Duty cycle = 25% Power level = maximum (GAMMA 3) Antenna = integrated

1.10 Test Positions

Position	Description
FRONT-0MM	EUT front side directly touching the phantom.
BACK-0MM	EUT rear side directly touching the phantom.
BOTTOM-0MM	EUT bottom side directly touching the phantom.
MOUTH-0MM	EUT top side directly touching the phantom.

1.11 Test Equipment Used During Testing

SAR Measurement					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5 Measurement Server	Schmid & Partner		EF00273	functional test	functional test
Control Pendant	Stäubli		EF00274	functional test	functional test
Dell Computer	Schmid & Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid & Partner	DAE3V1	EF00276	2012-09	2013-09
Dosimetric E-Field Probe	Schmid & Partner	ET3DV6	EF00279	2012-09	2013-09
Dosimetric E-Field Probe	Schmid & Partner	EX3DV4	EF00826	2012-11	2013-11
System Validation Kit	Schmid & Partner	D300V3	EF00299	2012-09	2015-09
System Validation Kit	Schmid & Partner	D450V3	EF00300	2012-09	2015-09
System Validation Kit	Schmid & Partner	D900V2	EF00281	2012-09	2015-09
System Validation Kit	Schmid & Partner	D1800V2	EF00282	2012-09	2015-09
System Validation Kit	Schmid & Partner	D1900V2	EF00283	2012-09	2015-09
System Validation Kit	Schmid & Partner	D2450V2	EF00284	2012-09	2015-09
System Validation Kit	Schmid & Partner	D5GHZV2	EF00827	2012-11	2015-11
Flat phantom	Schmid & Partner	V 4.4	EF00328	no calibration required	no calibration required
Oval flat phantom	Schmid & Partner	ELI 4	EF00289	functional test	functional test
Mounting Device	Schmid & Partner	V 3.1	EF00287	functional test	functional test
Millivoltmeter	Rohde & Schwarz	URV 5	EF00126	2010-07	2013-07
Power sensor	Rohde & Schwarz	NRV-Z2	EF00125	2011-03	2013-03
RF signal generator	Rohde & Schwarz	SMP 02	EF00165	2011-03	2013-03
Insertion unit	Rohde & Schwarz	URV5-Z4	EF00322	2012-07	2013-07
Directional Coupler	HP	HP 87300B	EF00288	functional test	functional test
Radio Communication Tester	Rohde & Schwarz	CMD65	EF00625	ICO (initial calibration only)	ICO (initial calibration only)
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	EF00304	2012-05	2013-05
Network Analyzer 300 kHz to 3 GHz	Agilent	8752C	EF00140	2012-06	2013-06
Dielectric Probe Kit	Agilent	85070C	EF00291	functional test	functional test

2 Result Summary

OET Bulletin 65 Supplement C, RSS-102					
Product Specific Standard Section	Requirement – Test	Reference Method	Maximum SAR [W/kg]	Result	Remarks
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Single-band conformity	KDB Publication 447498 KDB Publication 248227 KDB Publication 865664	1.34	PASS	
OET Bulletin 65 Suppl. C Section 2 RSS-102 Section 3	Multi-band conformity	KDB Publication 447498 KDB Publication 648474 KDB Publication 865664	N/A	N/R	No concurrent transmission modes
Remarks:					

3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ_t), expressed in watts per kilogram (W/kg)

$$\text{SAR} = d/dt (dW/dm) = d/dt (dW/\rho_t dV) = \sigma/\rho_t |E_t|^2$$

where

$$dW/dt = \int_V E \cdot J \, dV = \int_V \sigma E^2 \, dV$$

3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

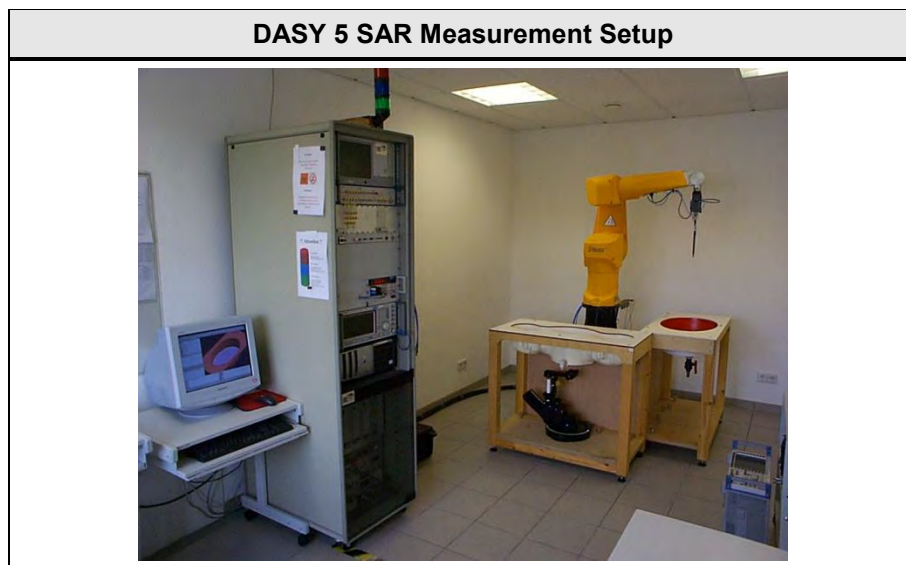

The following Diagram show the elements involved in the measurement setup.

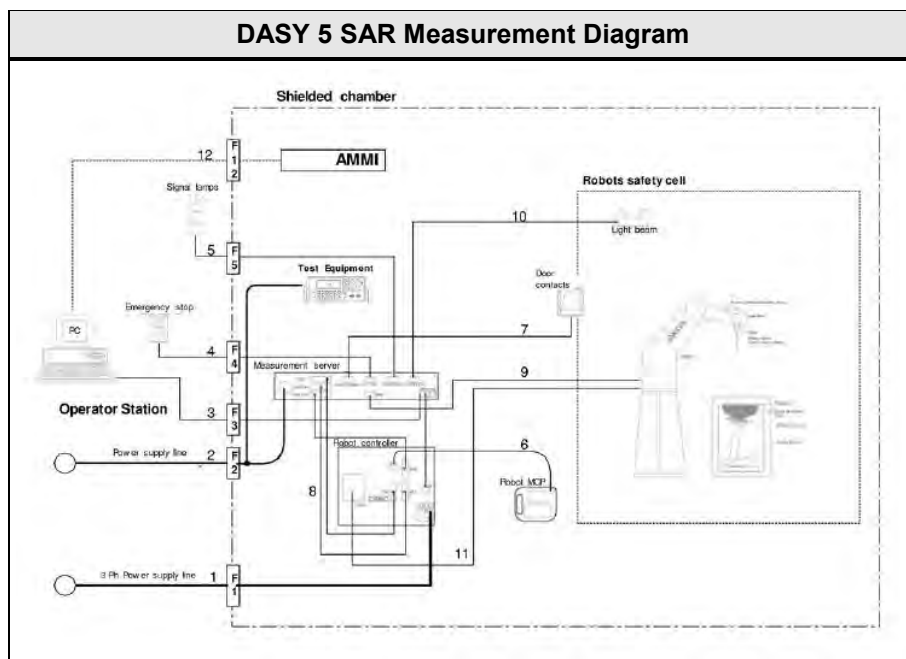

The DASY5 system for performing compliance tests consists of the following items:


DASY5 SAR Measurement System	
Device	Description:
RX90BL	A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.
Probe Alignment Unit	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
Teach Pendant	The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures
Signal Lamps	External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).
DAE	The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
E-Field Probes	Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.
EOC	The electro-optical converter (EOC) performs the conversion between optical and electrical signals
Measurement Server	The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.
Control Computer	A computer operating Windows 2000 or Windows NT with DASY 4 Software.
Control Software	DASY4 and SEMCAD post processing Software
SAM Twin Phantom	The SAM twin phantom enabling testing left-hand and right-hand usage.
Flat Phantom	Flat Phantom (only for body-mounted transceivers operating below 800 MHz).
Tissue simulating liquid	Tissue simulating liquid mixed according to the given recipes.
Device Holder	The device holder for handheld mobile phones.
System Validation Dipoles	System validation dipoles allowing to validate the proper functioning of the system.

4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

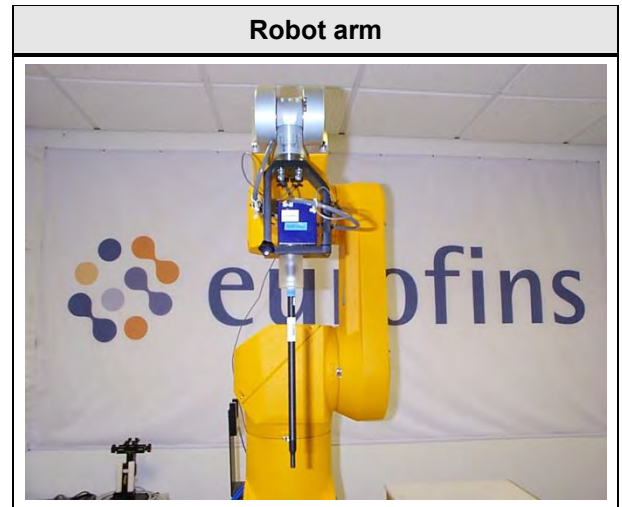

4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

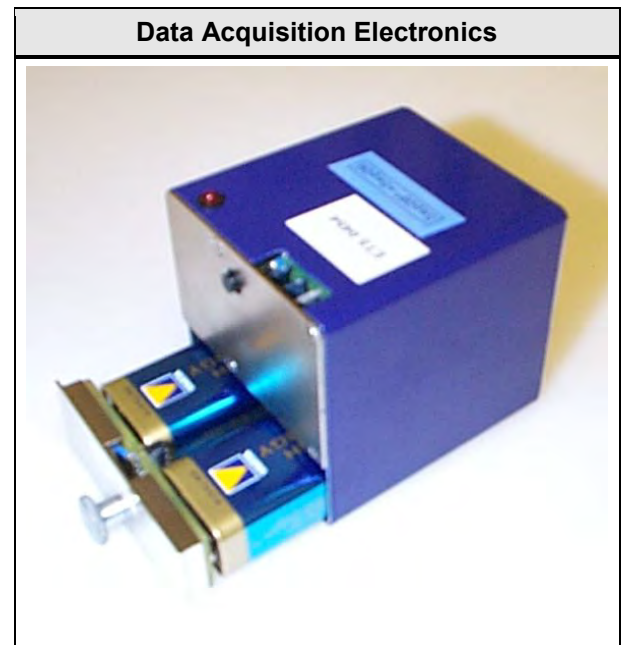

4.4 Isotropic E-Field Probe ≤ 3 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 2.5 GHz,
In brain and muscle simulating tissue at
Frequencies of 835MHz, 900MHz, 1800MHz,
1900 MHz and 2450 MHz

Frequency:

10MHz to > 3 GHz,
Linearity ± 0.2 dB (30MHz to 3GHz)

Directivity:

± 0.2 dB in HSL (rotation around probe axis)
 ± 0.4 dB in HSL (rotation normal to probe axis)

Dynamic Range:

5 μ W/g to > 100 mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 330mm (Tip: 16mm),
Tip Diameter: 6.8mm (Body: 12mm),
Distance from probe tip to dipole centers: 2.7mm

Application:

General dosimetry up to 3 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms



4.5 Isotropic E-Field Probe ≤ 6 GHz

Probe Specifications

Construction:

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

Calibration:

In air from 10 MHz to 6 GHz,
In brain and muscle simulating tissue at
Frequencies of 5200, 5500, 5800

Frequency:

10MHz to 6GHz,
Linearity ± 0.2 dB (30MHz to 6GHz)

Directivity:

± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range:

10 μ W/g to > 100mW/g

Linearity:

± 0.2 dB

Dimensions:

Overall Length: 337mm (Tip: 20mm),
Tip Diameter: 2.5mm (Body: 12mm),
Distance from probe tip to dipole centers: 1mm

Application:


General dosimetry up to 6 GHz
Compliance tests of mobile phones
Fast automatic scanning in arbitrary phantoms



4.6 Test phantom and positioner


The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.

The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.

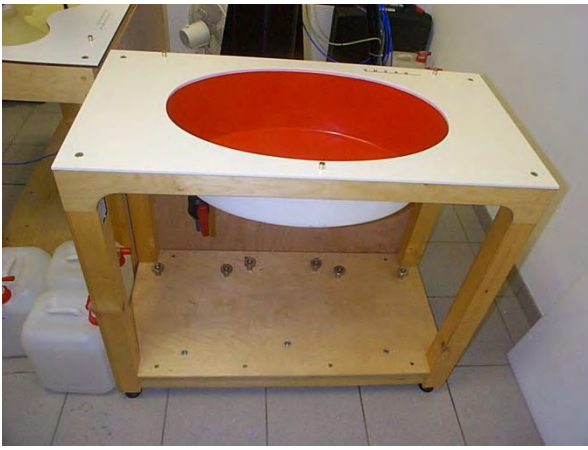Probe Positioner	SAM Twin Phantom
	
ELI4 phantom	Flat phantom
	

4.7 System Validation Dipoles

A set of calibration dipoles (D900V2, D1900V2, D2450V2, D5GHzV2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

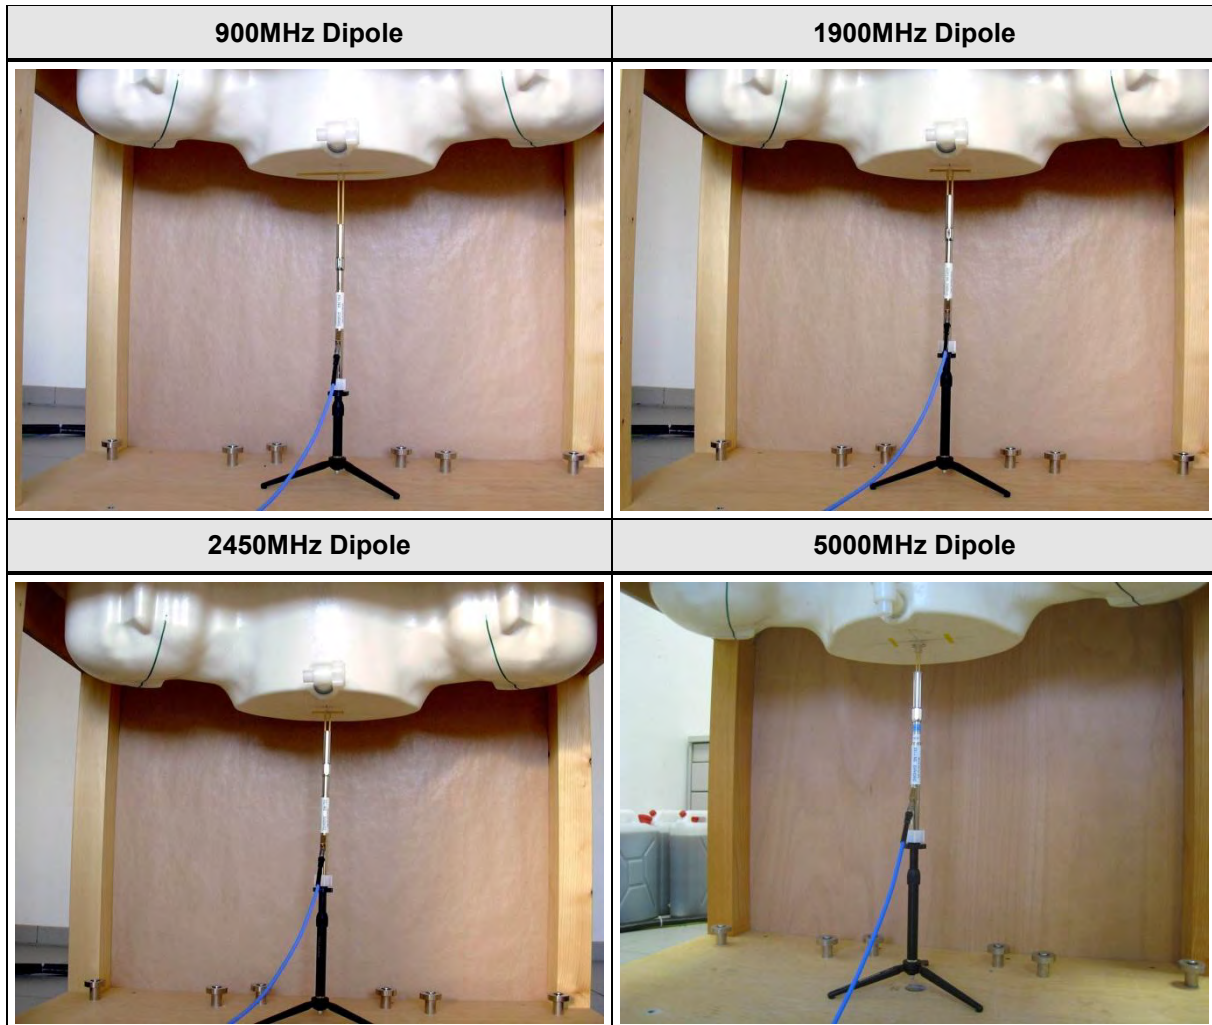

5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, then the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)



The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.

At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.

5.3 Reference lines and points for Handsets


For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.

According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

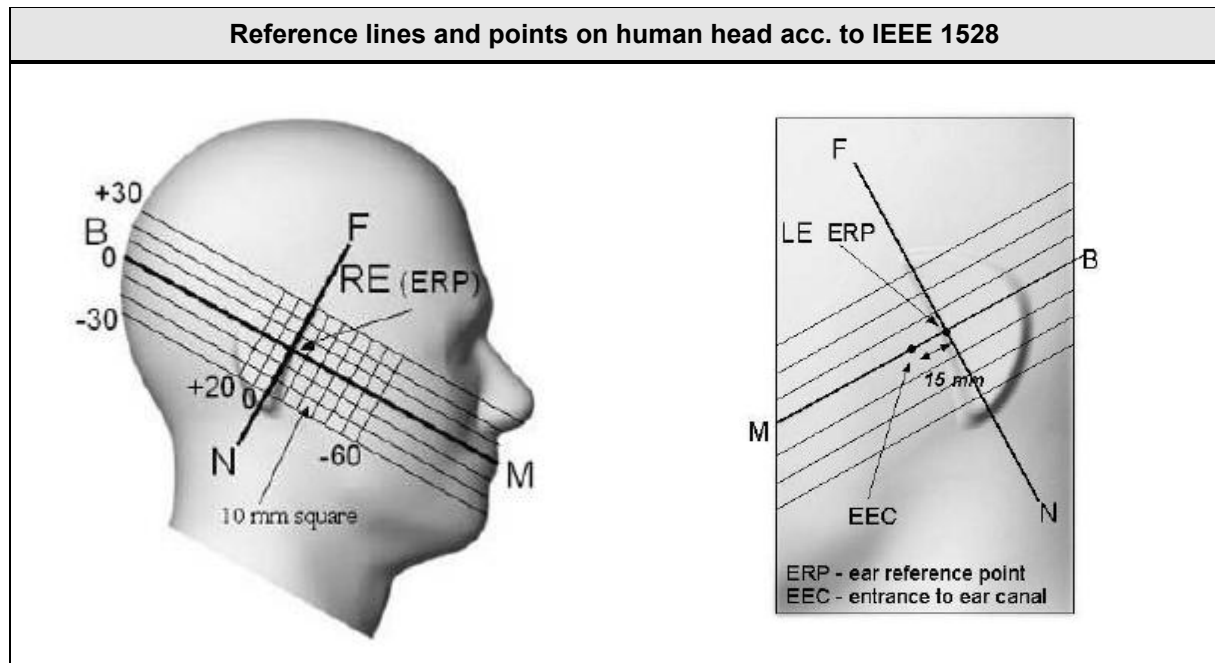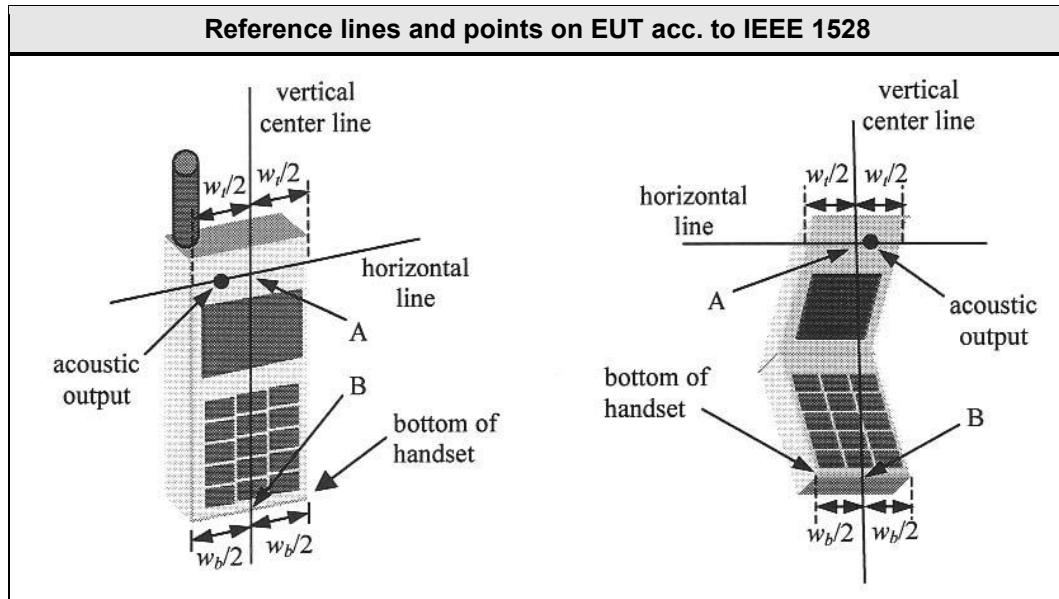

5.4 Test positions relative to the Head


Cheek position

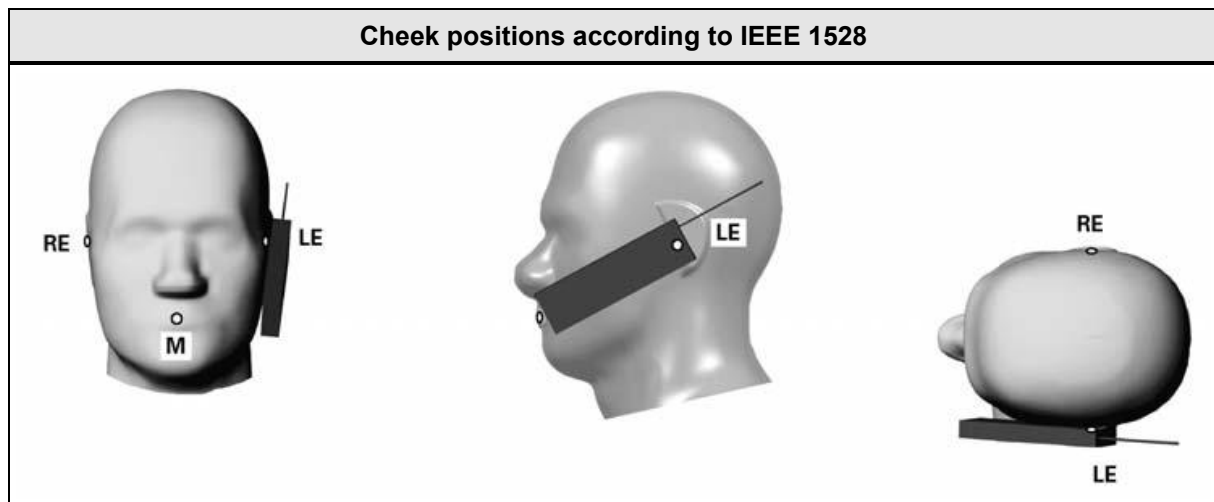

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


Tilt position

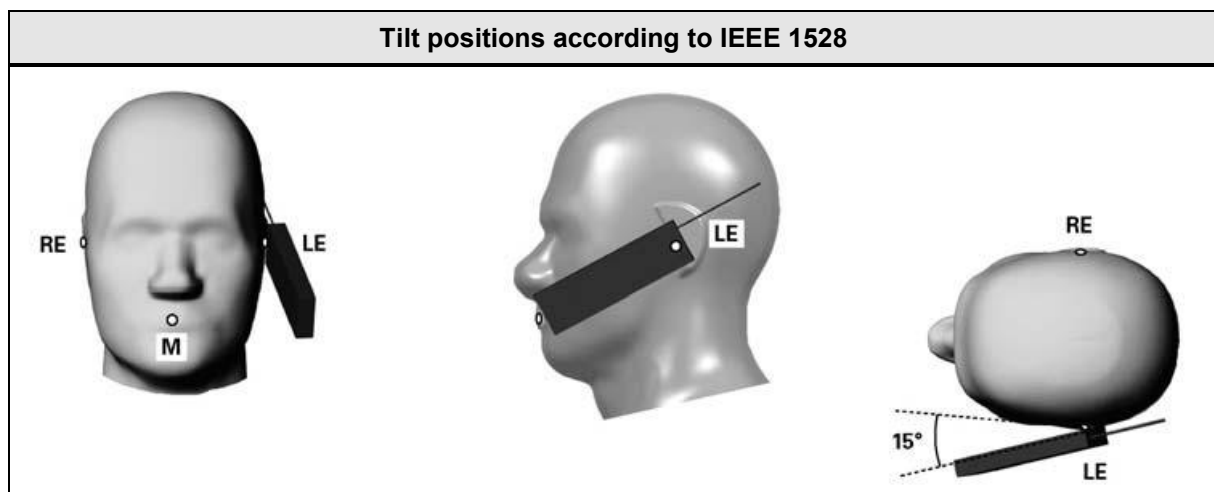

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° . Then the handset is rotated around the horizontal line by 15° .

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head


5.5 Test positions relative to the human body

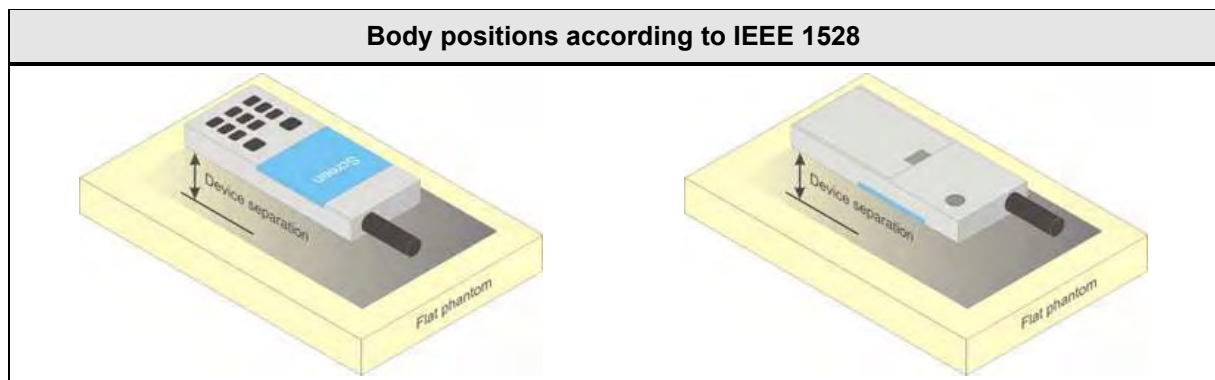

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

5.6 Test positions front to face

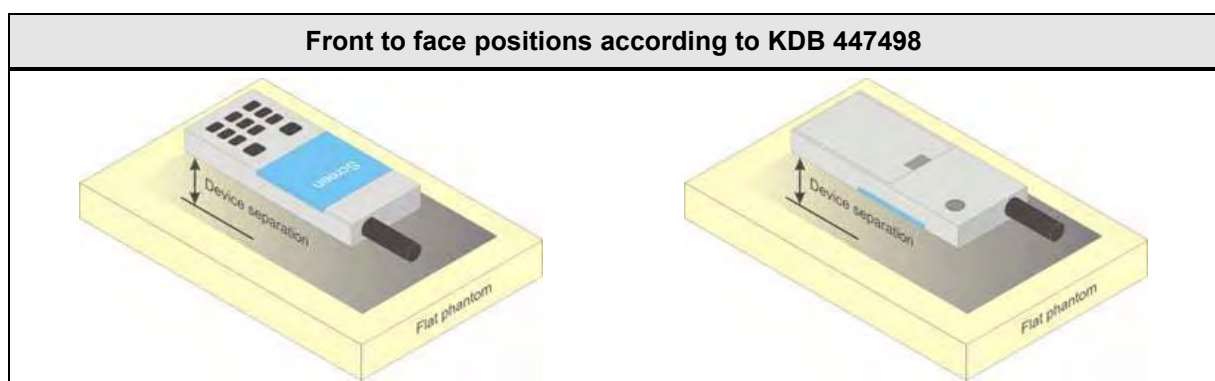

In front to face configuration the device is positioned parallel to the phantom surface.

The separation distance of the EUT is selected according to the use case of the EUT.

5.7 Measurement Uncertainty

Measurement Uncertainty according to IEEE 1528							
Error Description	Uncertainty Value	Probability Distribution	Div.	c _i (1g)	c _i (10g)	Std. Unc. 1g	Std. Unc. 10g
Measurement System							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
Test Sample Related							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Phantom and Setup Related							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
Expanded Standard Uncertainty						±25.6%	±25.4%

Test Report No.: G0M-1303-2685-TFC093S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

6 Test Conditions and Results

6.1 Test Conditions and Results – Conducted Output Power

Bluetooth

Bluetooth							
Channel	Frequency [MHz]	Peak (Burst) RMS Power [dBm]			Source-based time averaged Power [dBm]		
		BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
		DH5	2-DH5	3-DH5	DH5	2-DH5	3-DH5
0	2402	-2.50	N/A	N/A	-3.61	N/A	N/A
39	2441	-1.80	N/A	N/A	<u>-2.91</u>	N/A	N/A
78	2480	-2.80	N/A	N/A	-3.91	N/A	N/A

GSM / GPRS

GSM850										
Band	Mode	Channel	Frequency [MHz]	Coding	Traffic Mode	Number Timeslots	Power Level	Power TS 1 [dBm]	Power TS 2 [dBm]	Source-based time average Power [dBm]
850	GPRS	128	824.2	CS1	Test Mode A	1	GAMMA 3	32.46		23.43
850	GPRS	188	836.6	CS1	Test Mode A	1	GAMMA 3	32.23		23.20
850	GPRS	251	848.0	CS1	Test Mode A	1	GAMMA 3	32.14		23.11
850	GPRS	128	824.2	CS1	Test Mode A	2	GAMMA 3	32.45	32.44	26.43
850	GPRS	188	836.6	CS1	Test Mode A	2	GAMMA 3	32.25	32.23	26.22
850	GPRS	251	848.0	CS1	Test Mode A	2	GAMMA 3	32.12	32.12	26.10

GSM1900										
Band	Mode	Channel	Frequency [MHz]	Coding	Traffic Mode	Number Timeslots	Power Level	Power TS 1 [dBm]	Power TS 2 [dBm]	Source-based time average Power [dBm]
1900	GPRS	512	1850.2	CS1	Test Mode A	1	GAMMA 3	30.13		21.10
1900	GPRS	661	1880.0	CS1	Test Mode A	1	GAMMA 3	29.60		20.57
1900	GPRS	810	1909.8	CS1	Test Mode A	1	GAMMA 3	28.83		19.80
1900	GPRS	512	1850.2	CS1	Test Mode A	2	GAMMA 3	30.08	30.08	24.06
1900	GPRS	661	1880.0	CS1	Test Mode A	2	GAMMA 3	29.52	29.51	23.50
1900	GPRS	810	1909.8	CS1	Test Mode A	2	GAMMA 3	28.81	28.81	22.79

6.2 Test Conditions and Results – Test Exclusion

According to KDB 447498 D01 v05r01 standalone operation modes with an source-based time-averaged output power below the SAR Test Exclusion Threshold can be excluded from SAR measurements.

The 1-g SAR Test Exclusion Threshold for frequencies in the range from 100 MHz to 6 GHz with test separation distances ≤ 50 mm is given by:

$$\frac{\text{Channel Power } mW}{\text{min. Test Separation Distance } [mm]} \cdot \overline{\text{Channel Frequency } GHz} \leq 3.0$$

For test separation distances below 5 mm a test separation distance of 5 mm shall be used.

Bluetooth

For the three main channels of the Bluetooth transmitter the following values apply:

$$\text{Channel 0:} \quad 0.4 \cdot 5 \cdot \overline{2.402} = 0.1 \leq 3.0$$

$$\text{Channel 39:} \quad 0.5 \cdot 5 \cdot \overline{2.441} = 0.2 \leq 3.0$$

$$\text{Channel 78:} \quad 0.4 \cdot 5 \cdot \overline{2.480} = 0.1 \leq 3.0$$

The Bluetooth radio part is below the SAR exclusion threshold on the low, middle and high channel and is therefore excluded from SAR Evaluation.


GSM / GPRS

The GSM/GRPS radio part is above the exclusion threshold.

6.3 Test Conditions and Results – Tissue Validation

Tissue Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102					Verdict: PASS
Test according to measurement reference		Reference Method			
		OET Bulletin 65 Supplement C			
Target Values					
Frequency [MHz]	Head		Body		Permitted tolerance [%]
	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	Relative dielectric constant ϵ_r	Conductivity σ [S/m]	
150	52.3	0.76	61.9	0.80	$\leq \pm 5$
300	45.3	0.87	58.2	0.92	$\leq \pm 5$
450	43.5	0.87	56.7	0.94	$\leq \pm 5$
835	41.5	0.90	55.2	0.97	$\leq \pm 5$
900	41.5	0.97	55.0	1.05	$\leq \pm 5$
915	41.5	0.98	55.0	1.06	$\leq \pm 5$
1450	40.5	1.20	54.0	1.30	$\leq \pm 5$
1610	40.3	1.29	53.8	1.40	$\leq \pm 5$
1800 – 2000	40.0	1.40	53.3	1.52	$\leq \pm 5$
2450	39.2	1.80	52.7	1.95	$\leq \pm 5$
3000	38.5	2.40	52.0	2.73	$\leq \pm 5$
5200	36.0	4.66	49.0	5.30	$\leq \pm 5$
5500	35.6	4.96	48.6	5.65	$\leq \pm 5$
5800	35.3	5.27	48.2	6.00	$\leq \pm 5$

Test setup

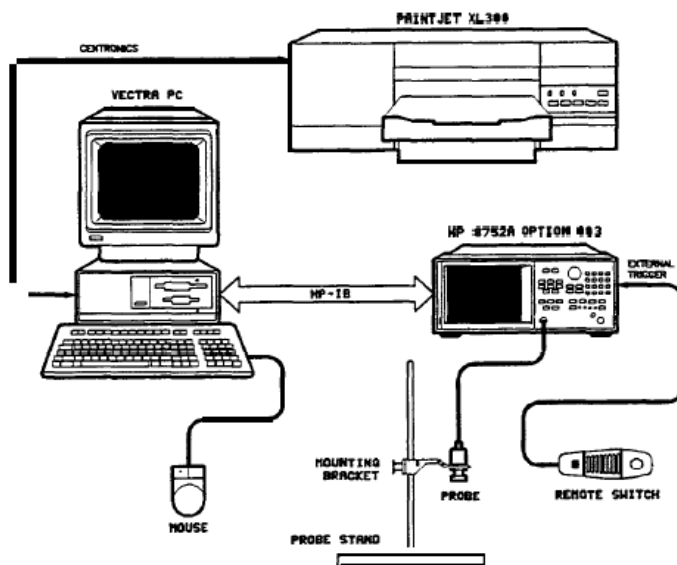

Test procedure


1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined

Test results

Frequency [MHz]	Tissue	Measured ϵ_r	Target ϵ_r	Delta ϵ_r [%]	Measured σ [S/m]	Target σ [S/m]	Delta σ [%]
900	Body	54.42	55.0	-01.05	1.03	1.05	-01.90
1900	Body	54.37	53.3	02.01	1.46	1.52	-03.95

Comments:

6.4 Test Conditions and Results – System Validation

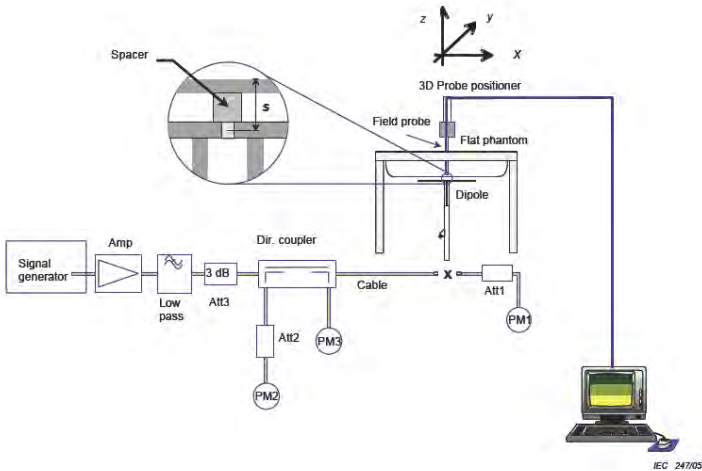System Validation acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102				Verdict: PASS
Test according to measurement reference	Reference Method			
	OET Bulletin 65 Supplement C / IEEE 1528			
Test frequency range	Tested frequencies			
	900 MHz, 1900 MHz			
Test mode	unmodulated CW			
Target Values				
Frequency [MHz]	Target SAR value [W/kg (1g)]		Permitted tolerance [%]	
900	2.76 @ 250mW		≤ ±10	
1900	10.2 @ 250mW		≤ ±10	
The target reference values are taken from the calibration sheets (see annex)				
Test setup				
				
Test procedure				
1. The dipole antenna input power is set to 250mW 2. The reference dipole is positioned under the phantom 3. With the dipole antenna powered the SAR value is measured 4. The measured SAR values are compared to the target SAR values				
Test results				
Frequency [MHz]	Input power [mW]	Measured SAR value [W/kg (1g)]	Target SAR value [W/kg (1g)]	Delta [%]
900	250	2.61	2.76	-05.43
900	250	2.76	2.76	-00.00
1900	250	9.92	10.2	-02.75
1900	250	9.76	10.2	-04.31
Comments:				

Test Report No.: G0M-1303-2685-TFC093S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

6.5 Test Conditions and Results – Standalone SAR Measurement

Standalone SAR acc. to FCC OET Bulletin 65 Suppl. C / IC RSS-102							Verdict: PASS	
Test according to measurement reference			Reference Method					
			FCC OET Bulletin 65 Supplement C / IC RSS-102 Issue 4					
Room temperature			22.0 – 22.6 °C					
Liquid depth			15.5 cm					
Environment			general public					
Limits								
Region			Occupational SAR values [W/kg]		General public SAR values [W/kg]			
Whole body average SAR			0.4		0.08			
Localized SAR (Head and trunk) SAR averaging mass = 10g			8		1.6			
Localized SAR (Limbs) SAR averaging mass = 10g			20		4			
Test results								
Mode	Position	Channel	Frequency [MHz]	Drift [dB]	Average SAR [W/kg (1g)]	Duty Factor	Scaled SAR [W/kg (1g)]	SAR Limit [W/kg (1g)]
GPRS 850 1TS	BOTTOM-0MM	128	824.2	0.11	0.853	0.5	0.427	1.6
GPRS 850 2TS	BOTTOM-0MM	128	824.2	0.16	1.79	0.5	0.895	1.6
GPRS 850 2TS	BOTTOM-0MM	188	836.2	0.12	1.90	0.5	0.95	1.6
GPRS 850 2TS	BOTTOM-0MM	251	848.8	-0.14	1.95	0.5	0.975	1.6
GPRS 850 2TS	BACK-0MM	128	824.2	0.01	1.39	0.5	0.695	1.6
GPRS 850 2TS	BACK-0MM	188	836.2	-0.04	1.45	0.5	0.725	1.6
GPRS 850 2TS	BACK-0MM	251	848.8	0.17	2.02	0.5	1.010	1.6
GPRS 850 2TS	FRONT-0MM	128	824.2	0.18	2.23	0.5	1.115	1.6
GPRS 850 2TS	FRONT-0MM	188	836.2	0.03	1.97	0.5	0.985	1.6
GPRS 850 2TS	FRONT-0MM	251	848.8	-0.18	2.68	0.5	1.340	1.6
GPRS850 2TS	MOUTH-0MM	251	848.8	0.01	0.818	0.5	0.409	1.6
GPRS 1900 1TS	MOUTH-0MM	512	1850.2	-0.19	0.868	0.5	0.434	1.6
GPRS 1900 2TS	MOUTH-0MM	512	1850.2	-0.11	1.71	0.5	0.860	1.6
GPRS 1900 2TS	MOUTH-0MM	661	1880	0.14	1.41	0.5	0.710	1.6
GPRS 1900 2TS	MOUTH-0MM	810	1909.08	0.07	1.03	0.5	0.520	1.6
GPRS 1900 2TS	FRONT-0MM	512	1850.2	0.14	1.75	0.5	0.875	1.6
GPRS 1900 2TS	FRONT-0MM	661	1880.0	0.18	1.22	0.5	0.610	1.6
GPRS 1900 2TS	FRONT-0MM	881	1909.8	-0.18	1.09	0.5	0.545	1.6
GPRS 1900 2TS	BOTTOM-0MM	512	1850.2	-0.09	1.06	0.5	0.530	1.6
GPRS 1900 2TS	BACK-0MM	661	1880.0	0.11	0.735	0.5	0.368	1.6
Overall maximum SAR value [W/kg (1g)]							1.340	1.6
Comments: Very low duty cycle evaluation								
According to KDB 447498 D01 V05r01 the SAR values for low transmission duty factor devices can be scaled if the operation and exposure conditions are fully documented in the test report no voice operation is used. The operational description of the EUT is given in ANNEX A. According to the explanations given in ANNEX A the EUT does not allow any transmission duty factor higher than 50%. For that reason all SAR values of the standalone SAR measurements are scaled by a factor of 0.5 to obtain the final SAR value and the final SAR value for each operational mode and configuration is used for test reduction.								

ANNEX A Very low duty factor operational description


	Project: Embedded Documentation	Page: 1 of 5
	Document Title: Compliance to FCC regulations for SAR	
Embedded Systems	Document Type: Note	

(Document Types: Note, Software description, Test protocol, Hardware description, Work Instruction)

Compliance to FCC regulations for SAR

For internal use only

Change History		
Date	Name	Change description
2013-09-12	Philipp Tiefenthaler	Initial version.
2013-09-19	Philipp Tiefenthaler	Averaging based on a time period of 30 min, reworked intended use.
2013-09-26	Philipp Tiefenthaler	Changed document header and added signature lines.
2013-09-30	Philipp Tiefenthaler	Included risk analysis and worst case scenario.

Signatures				
	Name	Dep.	Date [YYYY-MM-DD]	Signature
Created by	Tiefenthaler, Philipp	R&D	2013-09-30	
Reviewed by	Mark, Bernd	R&D	2013-09-30	
Witnessed by	Krämer, Tobias	RA	2013-09-30	
Approved by	Schülke, Achim	PM	2013-09-30	

	Project: Embedded Documentation	Page: 2 of 5
	Document Title: Compliance to FCC regulations for SAR	
Embedded Systems	Document Type: Note	

(Document Types: Note, Software description, Test protocol, Hardware description, Work Instruction)

Contents

1. Overview	3
2. Device Description	3
3. Intended use	3
3.1. Transfer modes	3
3.2. Transfer workflow	3
4. Worst case scenario	4
5. Risk Analysis	4
5.1. Software crash	4
5.2. Hardware shortage	4
6. Compliance with FCC Guidelines.....	5

References

No Document

- [1] OET Bulletin 65 Edition 97-01
- [2] Supplement C Edition 01-01 to OET Bulletin 65 Edition 97-01
- [3] 47 CFR Ch. I §2.1093 Edition 2013-06-04

Abbreviations

Abbreviation	Explanation
AM	Asthma Monitor
SAR	Specific Absorbption Rate

	Project: Embedded Documentation	Page: 3 of 5
	Document Title: Compliance to FCC regulations for SAR	
Embedded Systems	Document Type: Note	

(Document Types: Note, Software description, Test protocol, Hardware description, Work Instruction)

1. Overview

This document describes how “source-based time averaging” according to OET Bulletin 65 and 47 CFR Ch. I §2.1093 can be applied to the AM3 Option GSM to fulfill compliance to specific absorption rate (SAR) as specified by the FCC.

2. Device Description

The AM3 (Option GSM) is a Peakflow measuring device used in clinical trial studies. Participating asthma patients use the device at home. Each patient is given a device to perform two sessions a day. A session consists of a questionnaire and a final measurement. For our studies it is very important to have measured data available as fast as possible. A GSM/GPRS modem is implemented to the device in order to transfer data from the patient’s home to our server.

3. Intended use

The device is assigned to a single patient. The patient takes the device home to perform two sessions per day, a morning session and an evening session. The measured data, consisting of the questionnaire and measurement results, is stored and prepared to be sent within one single SMS. Data can be sent via three different transfer modes. The GSM module is switched off, it can be turned on in data transfer workflow only.

3.1. Transfer modes

Scheduled data transfer:

A specific, configurable time is chosen by the study sponsor. The AM performs the data transfer at the specified time, e.g. at 4am, and sends up to two SMS messages, one SMS including the morning session’s data and one SMS including the evening sessions’s data.

Automatic data transfer:

In automatic transfer mode measured data is sent after the patient confirms a session as finished. This means there will be two transfers per day, one after the morning session and one after the evening session. One SMS will be sent each transfer.

Manual data transfer:

A manual data transfer can be started via a button in service menu.

3.2. Transfer workflow

Data transfer workflow is performed as stated below:

- 1) Check if a transfer is necessary and allowed:
 - a) Check if there is data to be sent, if not, end transfer workflow.

	Project: Embedded Documentation	Page: 4 of 5
	Document Title: Compliance to FCC regulations for SAR	
Embedded Systems	Document Type: Note	

(Document Types: Note, Software description, Test protocol, Hardware description, Work Instruction)

- b) Check if there has been a data transfer within the last 15 minutes, if yes, end transfer workflow.
- 2) Switch on the GSM module.
- 3) Registrater to GSM network.
- 4) Check if the GSM module has received SMS messages.
- 5) Send the SMS message containing the measurement data to the server.
- 6) Check if the GSM module has received SMS messages.
- 7) Switch off the GSM module.

4. Worst case scenario

Worst case for SAR measurement means the GSM module has the longest possible operating time.

The maximum operating time is reached if the device has bad connection to the GSM network and can not send the SMS. In this case, the AM device tries to register to the network for up to four times, each trial is cancelled after two minutes. The time needed for a successful network registration is less than 30 seconds and the sending process itself takes less than ten seconds. This sums up to a maximum operation time of less than ten minutes per data transfer.

5. Risk Analysis

5.1. Software crash

The GSM Module in the AM device is turned off by hardware according to schematic 708510_SCH_010 (page 5). As the module can only be turned on by the #WISMOFF signal from the micro controller, the risk of a not intended operation due to a software crash can be rated as low¹.

5.2. Hardware shortage

As mentioned above, the GSM Module is turned off by hardware. The transistor Q1 is responsible to separate the GSM Module's #WISMOFF signal from digital ground, this means default off. An internal hardware malfunction or influence from outside the device, causing an internal shortage in the transistor Q1 (DCT144EE resistant up to -10V and to +40V) and that does not cause the GSM Module and the on-board power supply to stop operation is very unlikely. Risk can be rated as low¹.

¹Severity Level:

Low: Issues considered having minimal to no impact to safety and stability.

Medium: Risks determined to have a lower impact to safety and stability.

High: Significant risk that may include direct impact to safety and stability.

	Project: Embedded Documentation	Page: 5 of 5
	Document Title: Compliance to FCC regulations for SAR	
Embedded Systems	Document Type: Note	

(Document Types: Note, Software description, Test protocol, Hardware description, Work Instruction)

6. Compliance with FCC Guidelines

According to OET Bulletin 65, including it's Supplement C, and according to 47 CFR §2.1093 "source-based time averaging" based on an inherent property of a portable device considered to operate in general populatin/uncontrolled environments is allowed as long as the time period, the exposure is averaged over, does not exceed 30 minutes.

As stated above, a data transfer takes a maximum time of ten minutes and a data transfer can only be started after a pause period of min. 15 minutes without any data transfer. This means any 30 minute time period will include at least 15 minutes of pause time.

This results in a factor, being used for source-based time averaging, of $\frac{15min}{30min} = \frac{1}{2} = 50\%$.

ANNEX B Calibration Documents



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Eurofins**

Certificate No: **DAE3-522_Sep13**

CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 522**

Calibration procedure(s) **QA CAL-06.v26**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **September 11, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	02-Oct-12 (No:12728)	Oct-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-13 (in house check)	In house check: Jan-14
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-13 (in house check)	In house check: Jan-14

	Name	Function	Signature
Calibrated by:	R.Mayoraz	Technician	
Approved by:	Fin Bomholt	Deputy Technical Manager	

Issued: September 11, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption:* Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.235 $\pm$ 0.02% (k=2)	403.905 $\pm$ 0.02% (k=2)	404.733 $\pm$ 0.02% (k=2)
Low Range	3.96415 $\pm$ 1.50% (k=2)	3.95903 $\pm$ 1.50% (k=2)	3.97308 $\pm$ 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	57.0 ° $\pm$ 1 °
---	------------------

Appendix

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	199994.84	-1.61	-0.00
Channel X	+ Input	20002.41	2.31	0.01
Channel X	- Input	-19996.48	4.99	-0.02
Channel Y	+ Input	199996.01	-0.32	-0.00
Channel Y	+ Input	20000.12	0.00	0.00
Channel Y	- Input	-19996.80	4.74	-0.02
Channel Z	+ Input	199996.36	-0.14	-0.00
Channel Z	+ Input	19999.47	-0.63	-0.00
Channel Z	- Input	-20000.32	1.29	-0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2000.73	0.37	0.02
Channel X	+ Input	202.12	1.52	0.76
Channel X	- Input	-198.07	1.15	-0.58
Channel Y	+ Input	2000.27	-0.12	-0.01
Channel Y	+ Input	200.27	-0.32	-0.16
Channel Y	- Input	-199.53	-0.32	0.16
Channel Z	+ Input	2000.40	0.21	0.01
Channel Z	+ Input	199.46	-1.06	-0.53
Channel Z	- Input	-200.31	-0.98	0.49

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-3.46	-5.15
	- 200	6.33	5.03
Channel Y	200	-0.62	-0.84
	- 200	-1.40	-1.23
Channel Z	200	17.02	16.63
	- 200	-16.85	-17.55

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-2.55	-1.42
Channel Y	200	7.66	-	-0.32
Channel Z	200	6.37	4.74	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15741	16839
Channel Y	15715	14908
Channel Z	16057	16580

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	1.14	-0.51	2.54	0.62
Channel Y	-0.99	-2.51	0.31	0.52
Channel Z	0.68	-0.45	2.23	0.54

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Eurofins**

Certificate No: **ET3-1711_Sep13**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1711**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v8, QA CAL-23.v5, QA CAL-25.v6**
 Calibration procedure for dosimetric E-field probes

Calibration date: **September 18, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	4-Sep-13 (No. DAE4-660_Sep13)	Apr-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: September 18, 2013			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(*f*)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1711

Manufactured: August 7, 2002
Calibrated: September 18, 2013

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.89	1.86	2.06	$\pm 10.1 \%$
DCP (mV) ^B	96.7	98.1	98.0	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	148.0	$\pm 2.7 \%$
		Y	0.0	0.0	1.0		154.3	
		Z	0.0	0.0	1.0		153.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.37	7.37	7.37	0.26	2.45	± 13.4 %
900	41.5	0.97	6.19	6.19	6.19	0.43	2.27	± 12.0 %
1810	40.0	1.40	5.37	5.37	5.37	0.76	2.28	± 12.0 %
1950	40.0	1.40	5.16	5.16	5.16	0.80	2.19	± 12.0 %
2450	39.2	1.80	4.58	4.58	4.58	0.80	1.85	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.59	7.59	7.59	0.16	2.30	± 13.4 %
900	55.0	1.05	5.99	5.99	5.99	0.32	2.91	± 12.0 %
1810	53.3	1.52	4.69	4.69	4.69	0.80	2.34	± 12.0 %
1950	53.3	1.52	4.68	4.68	4.68	0.80	2.27	± 12.0 %
2450	52.7	1.95	4.05	4.05	4.05	0.67	1.27	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

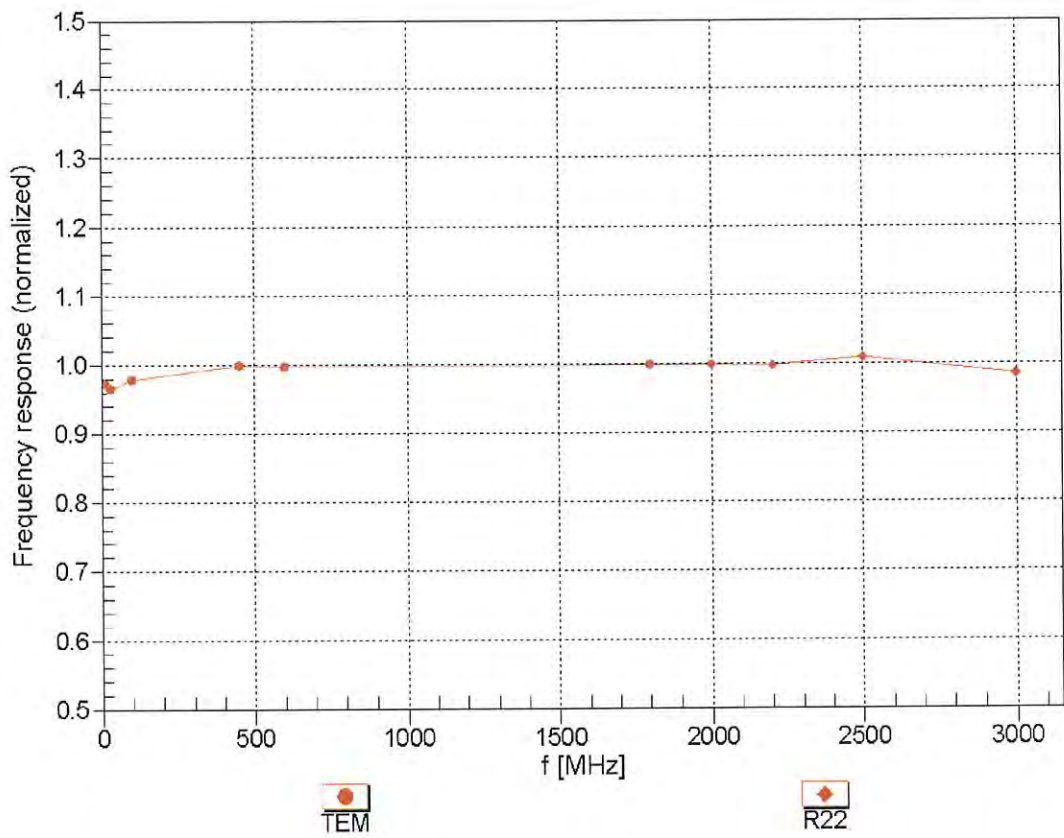


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

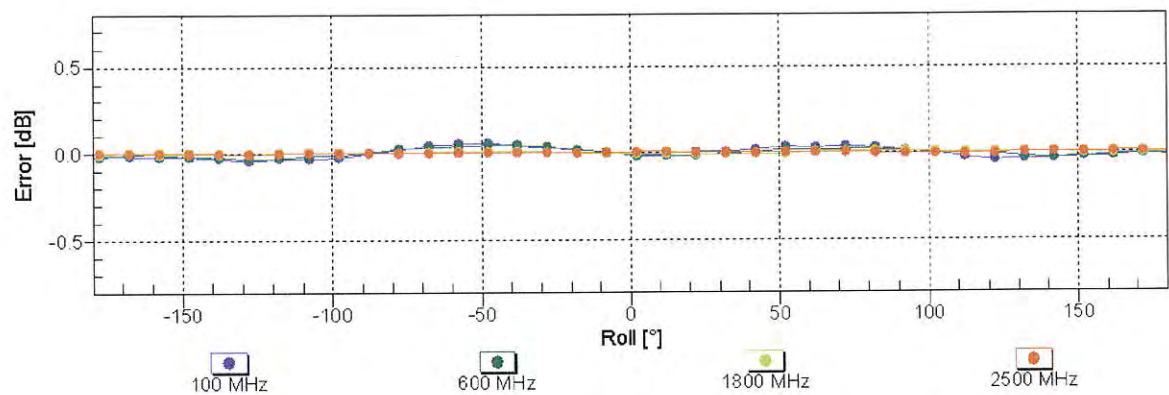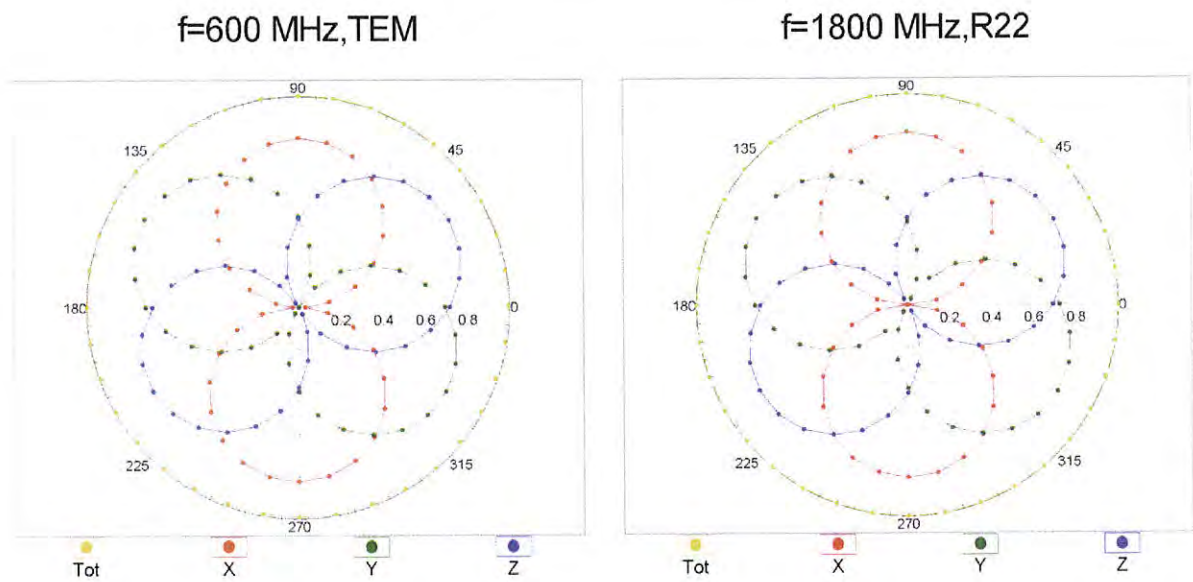


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head})
(TEM cell , f = 900 MHz)

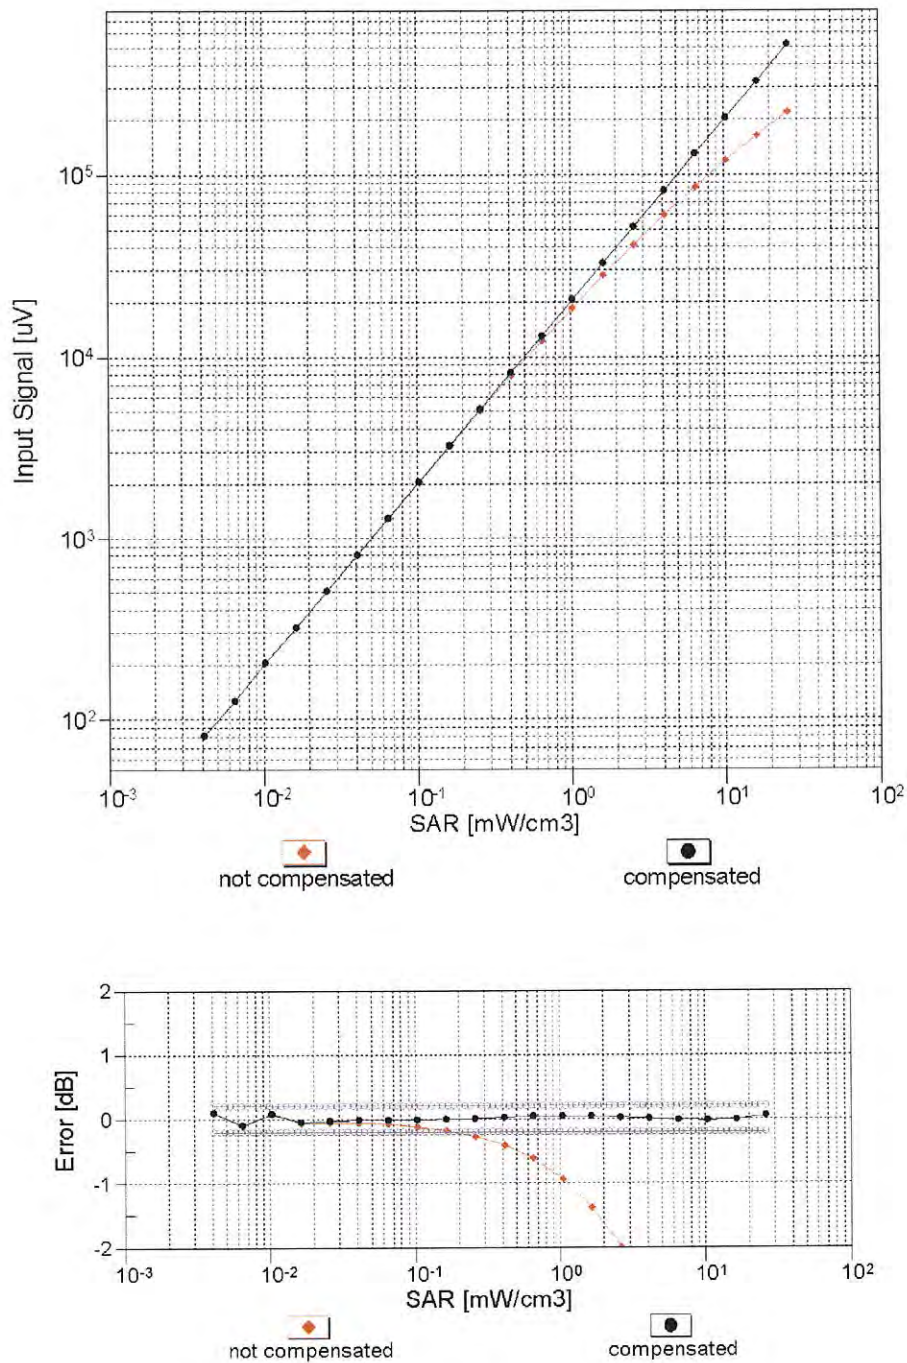


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

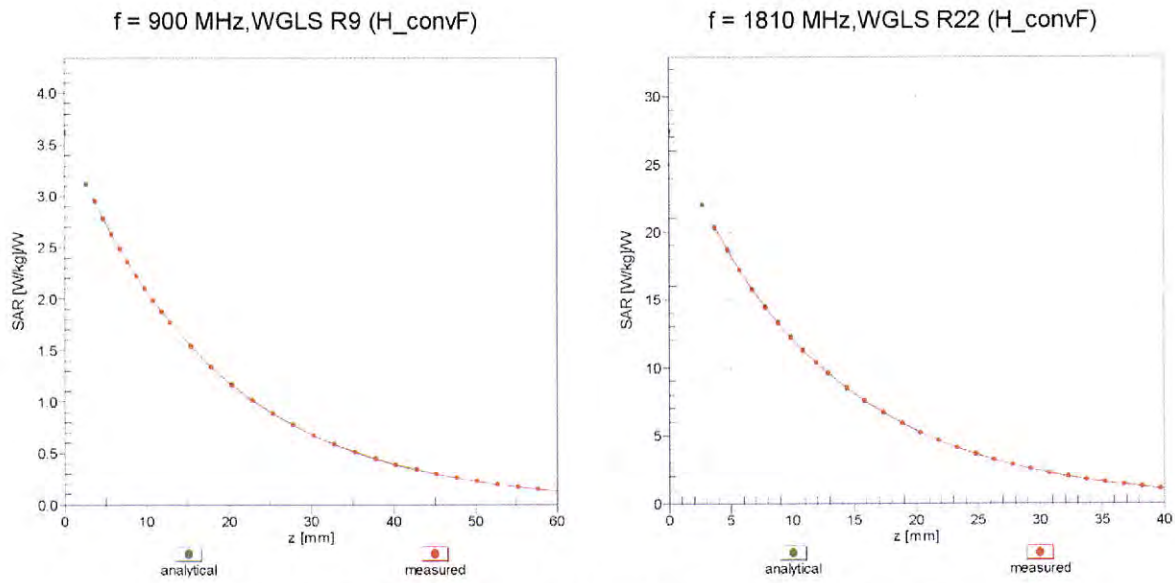

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

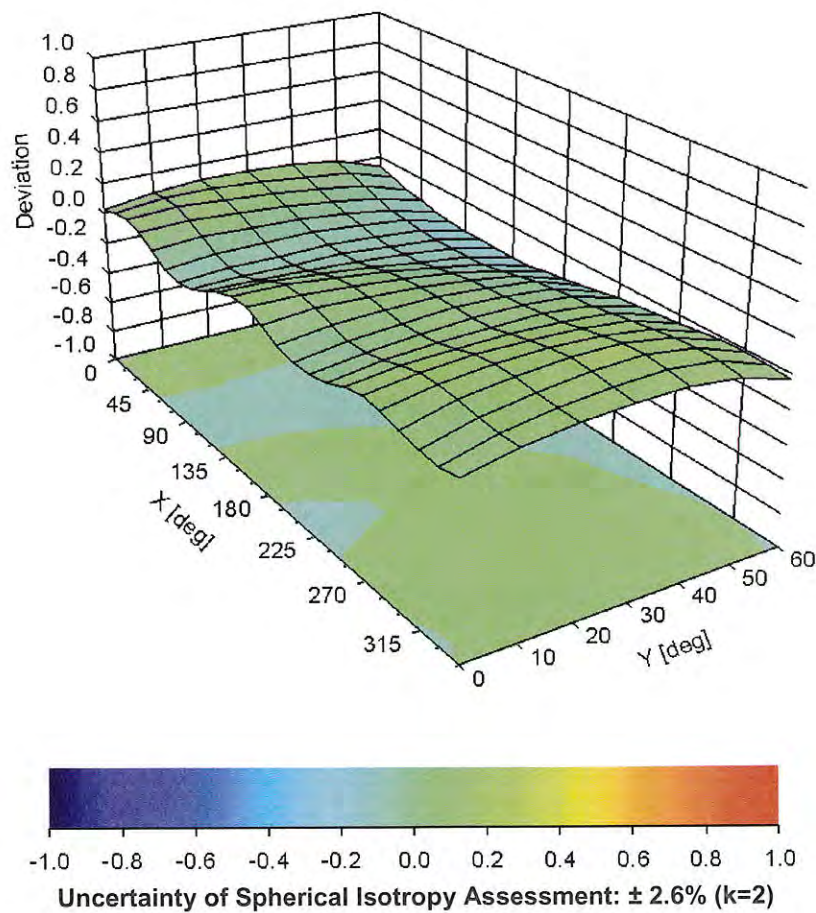

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1711

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-107.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Eurofins**

Certificate No: **D900V2-164_Sep12**

CALIBRATION CERTIFICATE

Object **D900V2 - SN: 164**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 24, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Israe El-Naouq
Katja Pokovic

Issued: September 24, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.3 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.64 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	10.6 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.81 mW / g $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.7 $\pm$ 6 %	1.06 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.76 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	10.9 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.77 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	7.00 mW / g $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 Ω - 8.0 j Ω
Return Loss	- 22.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.3 Ω - 8.5 j Ω
Return Loss	- 20.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.407 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 16, 2002

DASY5 Validation Report for Head TSL

Date: 24.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 164

Communication System: CW; Frequency: 900 MHz

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.279 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.960 mW/g

SAR(1 g) = 2.64 mW/g; SAR(10 g) = 1.7 mW/g

Maximum value of SAR (measured) = 3.07 W/kg

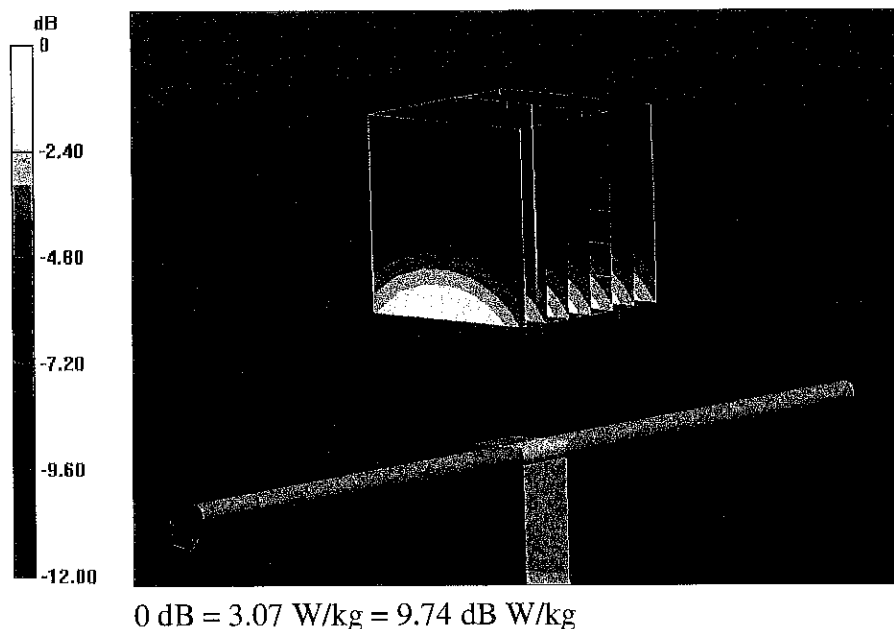

Impedance Measurement Plot for Head TSL

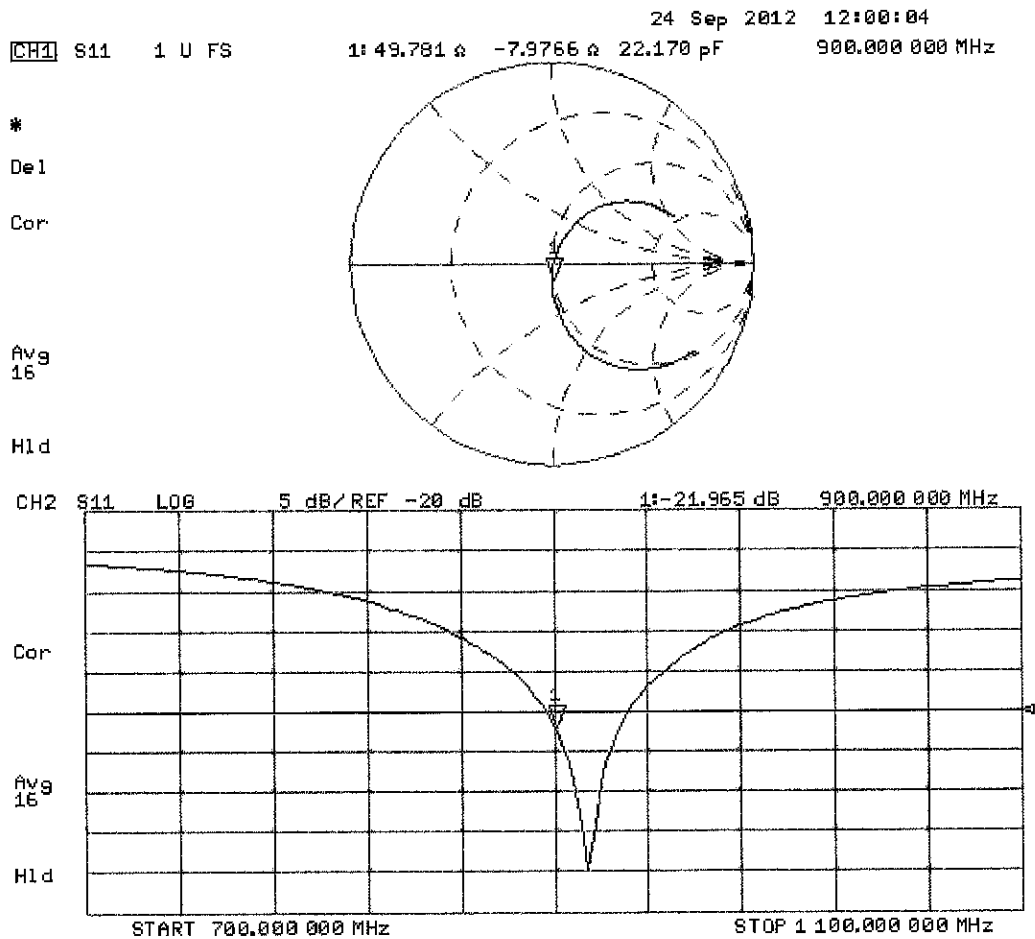

DASY5 Validation Report for Body TSL

Date: 24.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN: 164

Communication System: CW; Frequency: 900 MHz

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.06 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.94, 5.94, 5.94); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.279 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.229 mW/g

SAR(1 g) = 2.76 mW/g; SAR(10 g) = 1.77 mW/g

Maximum value of SAR (measured) = 3.21 W/kg

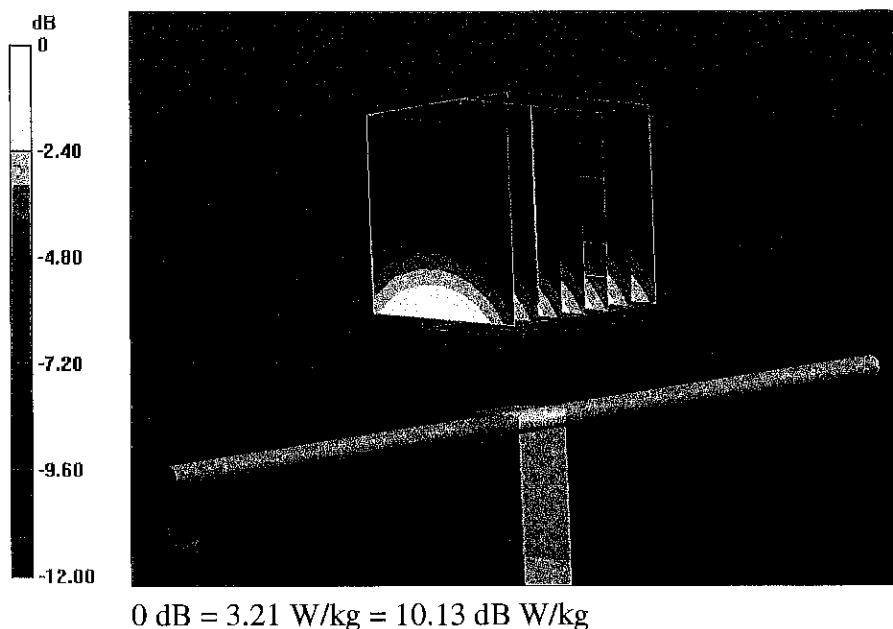

Impedance Measurement Plot for Body TSL

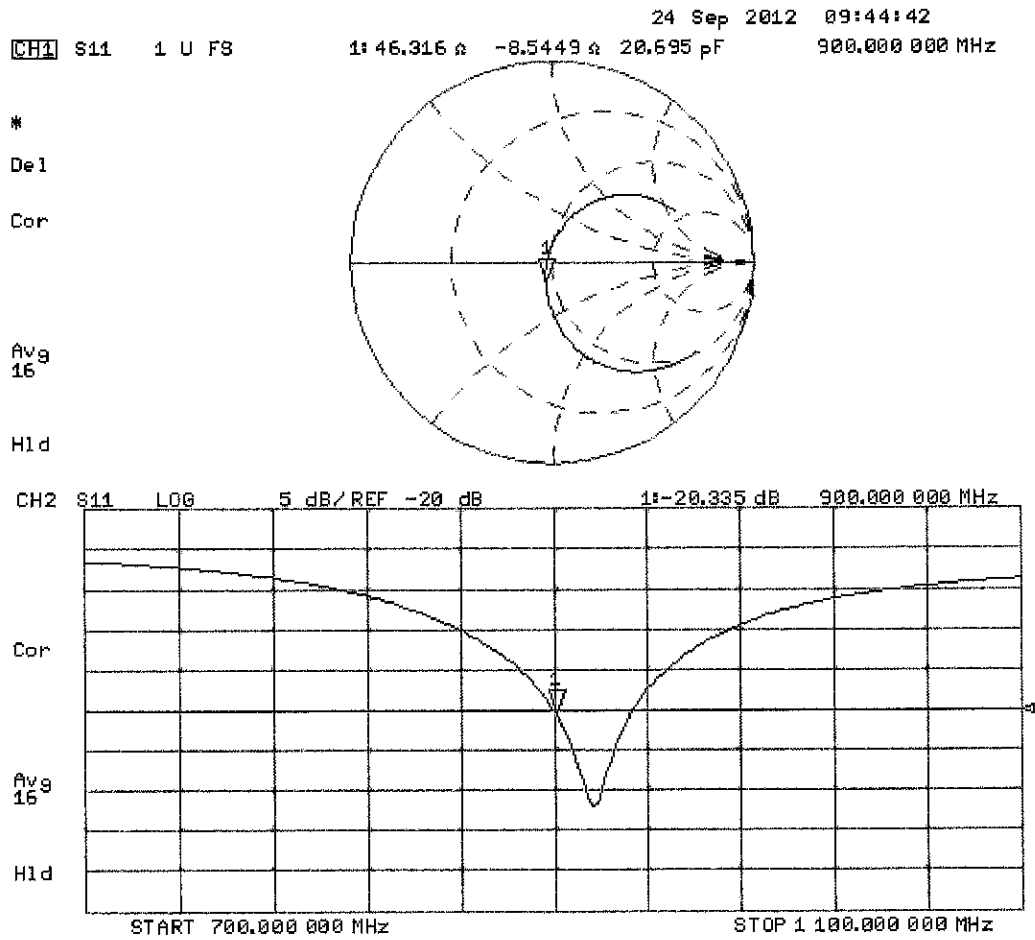



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Eurofins**

Certificate No: **D1900V2-5d025_Sep12**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d025**

Calibration procedure(s) **QA CAL-05.v8**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 21, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	05-Oct-11 (No. 217-01451)	Oct-12
Power sensor HP 8481A	US37292783	05-Oct-11 (No. 217-01451)	Oct-12
Reference 20 dB Attenuator	SN: 5058 (20k)	27-Mar-12 (No. 217-01530)	Apr-13
Type-N mismatch combination	SN: 5047.2 / 06327	27-Mar-12 (No. 217-01533)	Apr-13
Reference Probe ES3DV3	SN: 3205	30-Dec-11 (No. ES3-3205_Dec11)	Dec-12
DAE4	SN: 601	27-Jun-12 (No. DAE4-601_Jun12)	Jun-13
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by: **Israe El-Naouq** **Laboratory Technician**

Function **Signature**

Approved by: **Katja Pokovic** **Technical Manager**

Israe El-Naouq
Katja Pokovic

Issued: September 21, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.6 $\pm$ 6 %	1.37 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.78 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.8 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.17 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.9 mW / g $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.5 $\pm$ 6 %	1.54 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	40.3 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.42 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.5 mW / g $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 Ω + 4.7 j Ω
Return Loss	- 26.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω + 5.1 j Ω
Return Loss	- 24.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 29, 2002

DASY5 Validation Report for Head TSL

Date: 21.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d025

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.699 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.364 mW/g


SAR(1 g) = 9.78 mW/g; SAR(10 g) = 5.17 mW/g

Maximum value of SAR (measured) = 11.9 W/kg

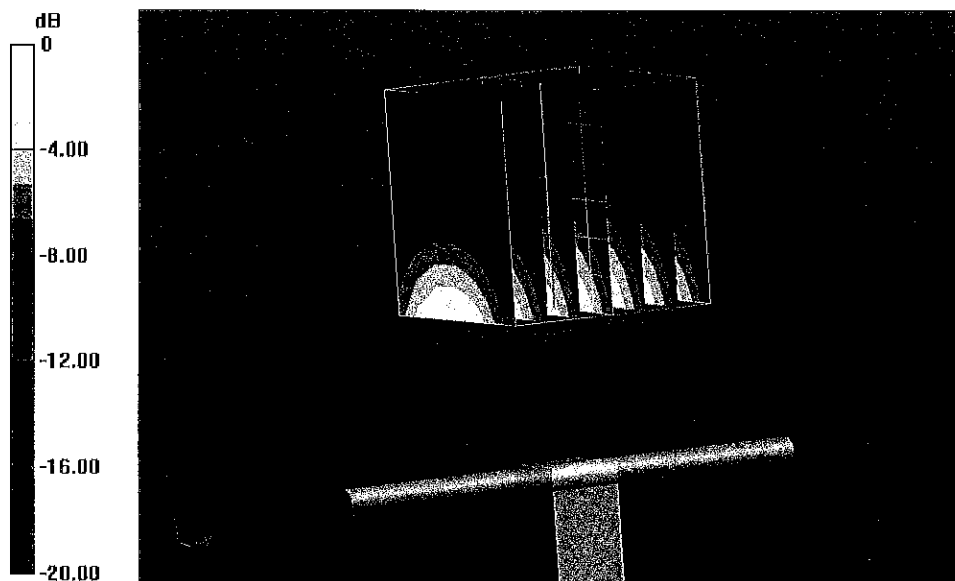

0 dB = 11.9 W/kg = 21.51 dB W/kg

Impedance Measurement Plot for Head TSL

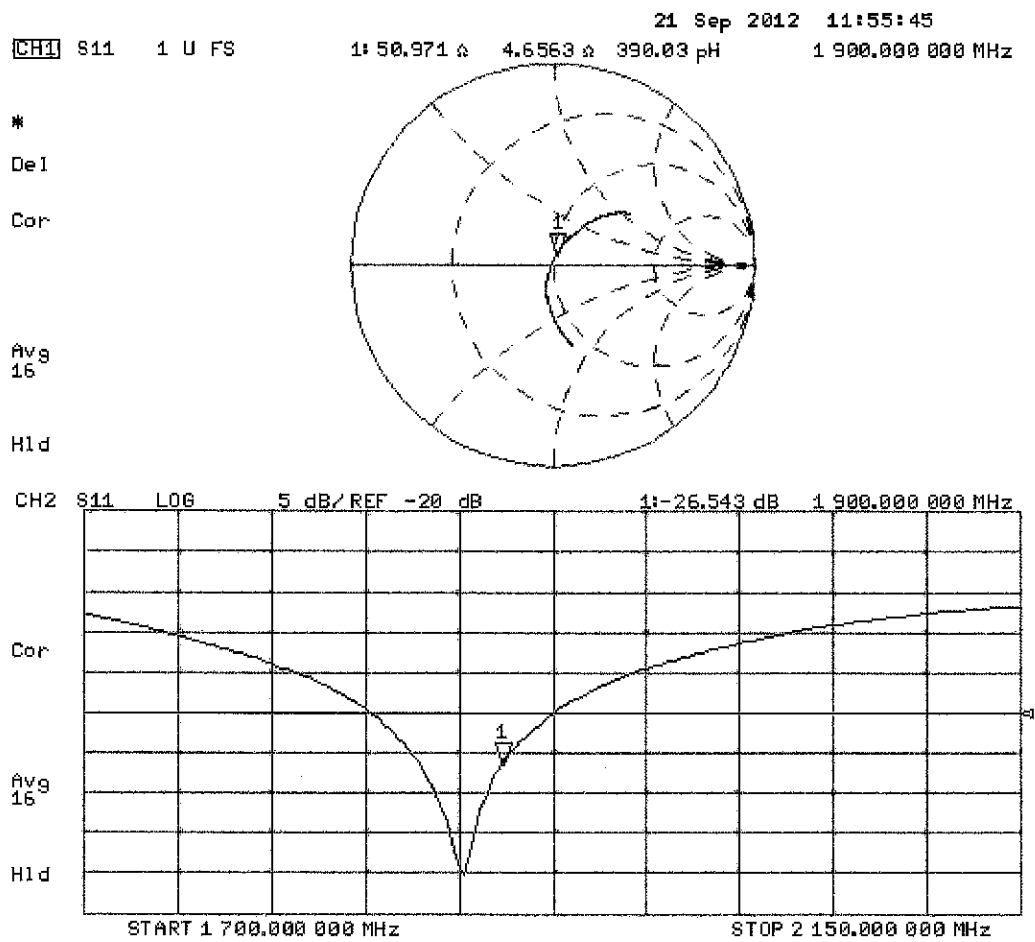

DASY5 Validation Report for Body TSL

Date: 21.09.2012

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d025

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.699 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.830 mW/g


SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.42 mW/g

Maximum value of SAR (measured) = 12.8 W/kg

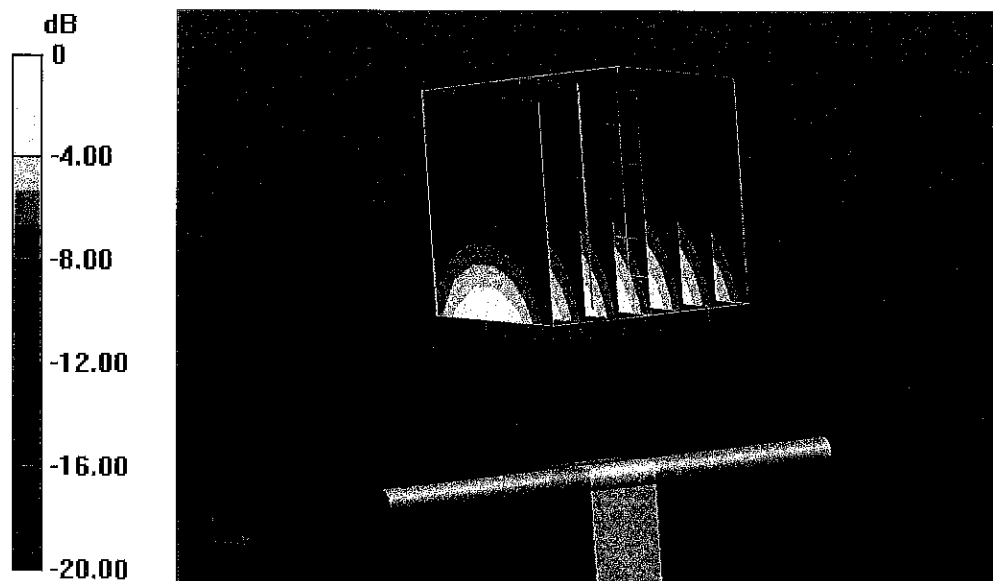

0 dB = 12.8 W/kg = 22.14 dB W/kg

Impedance Measurement Plot for Body TSL

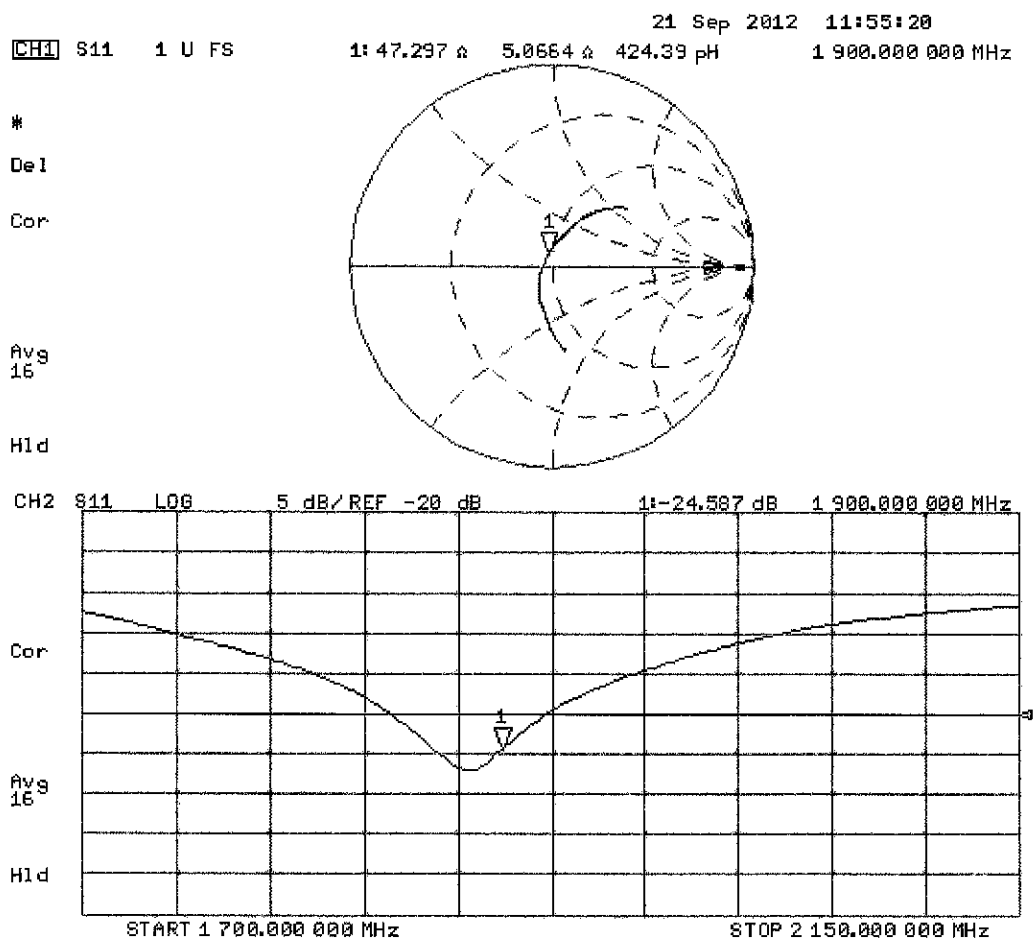

ANNEX C System Validation Reports

Test Laboratory: Eurofins Product Service GmbH

Dipol Vali 900 MHz (m) 250mW 22_08_2013

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ S/m}$; $\epsilon_r = 54.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.46 W/kg


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.713 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.70 W/kg

SAR(1 g) = 2.61 W/kg; SAR(10 g) = 1.72 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

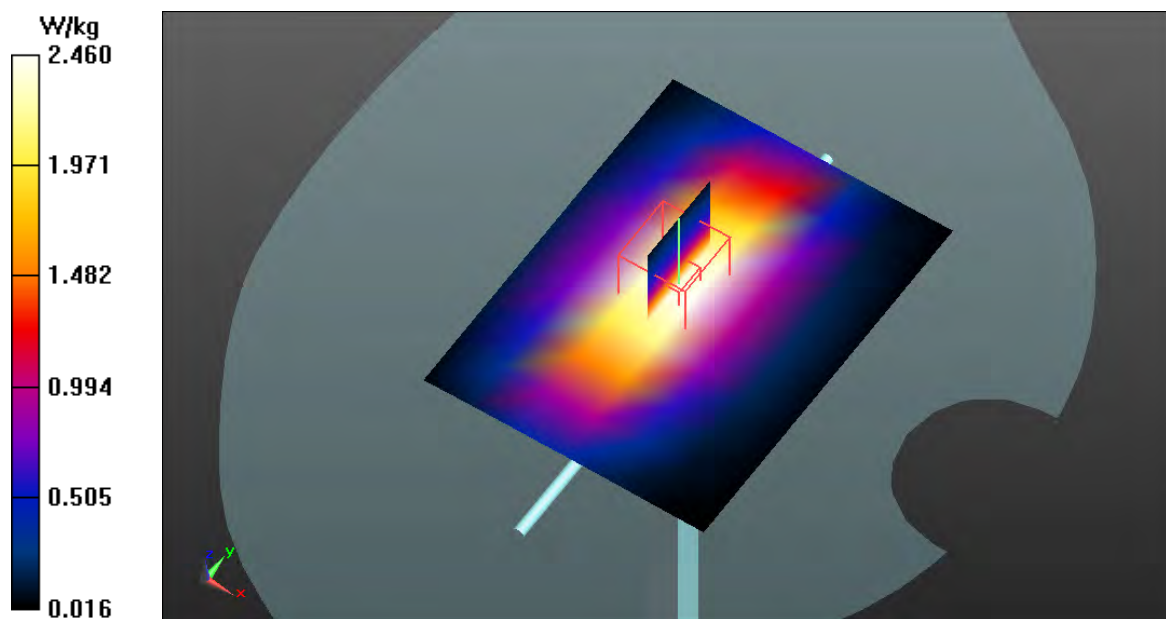

Test Laboratory: Eurofins Product Service GmbH

Dipol Vali 900 MHz (m) 250mW 08_10_2013

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: UID 0 - n/a, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.03 \text{ S/m}$; $\epsilon_r = 54.419$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.64 W/kg


System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.166 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.99 W/kg

SAR(1 g) = 2.76 W/kg; SAR(10 g) = 1.8 W/kg

Maximum value of SAR (measured) = 3.00 W/kg

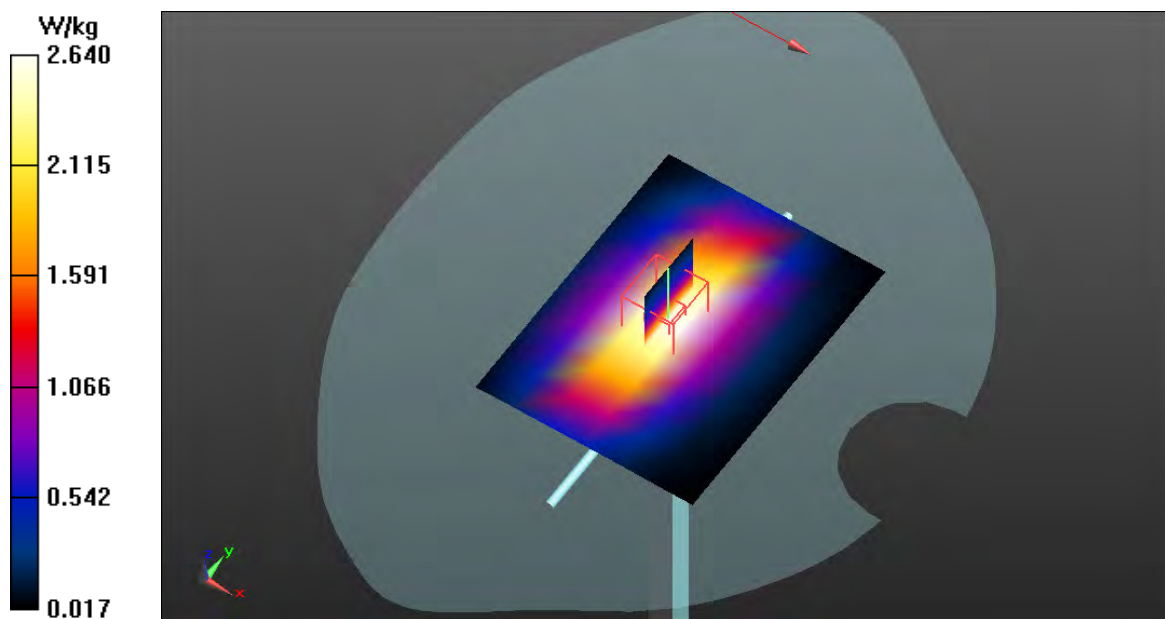

Test Laboratory: Eurofins Product Service GmbH

Dipol Valid.1900 (m)_250mW 26.09.2013

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 54.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 9.70 W/kg

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 87.703 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 16.0 W/kg
SAR(1 g) = 9.92 W/kg; SAR(10 g) = 5.45 W/kg
Maximum value of SAR (measured) = 11.3 W/kg

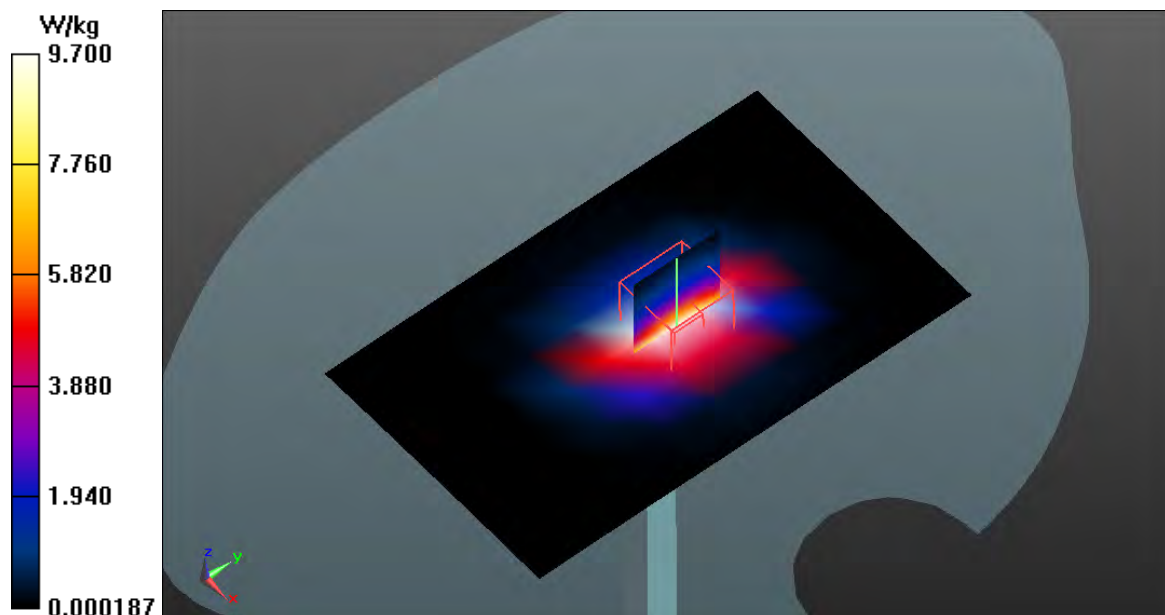

Test Laboratory: Eurofins Product Service GmbH

Dipol Valid.1900 (m)_250mW 07.10.2013

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025

Communication System: UID 0 - n/a, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 54.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 10.8 W/kg

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (ET-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.412 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 16.2 W/kg
SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.25 W/kg
Maximum value of SAR (measured) = 11.1 W/kg

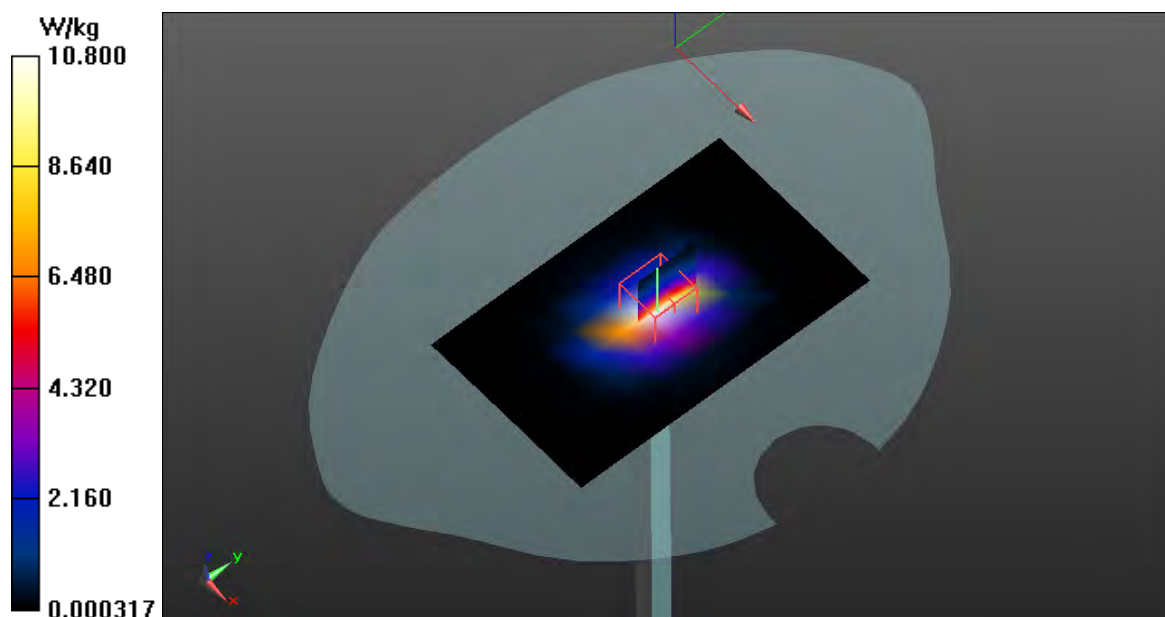

ANNEX D SAR Measurement Reports

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-128_1xSlot_Gamma3_Flat_bottom_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 55.419$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.847 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.205 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.551 W/kg

Maximum value of SAR (measured) = 0.936 W/kg

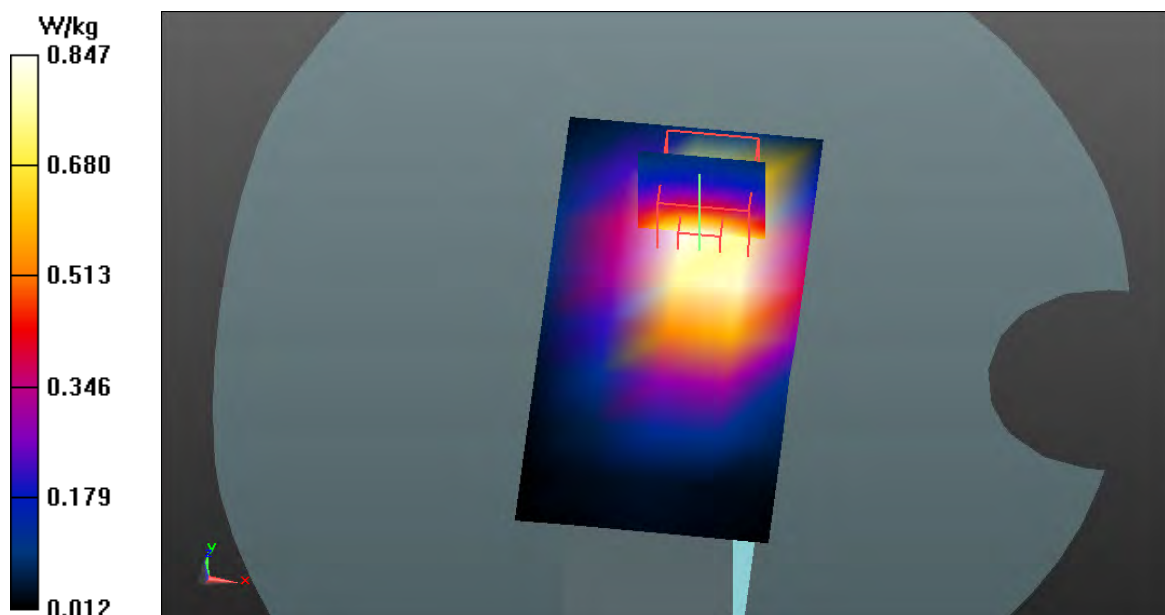

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-128_2xSlot_Gamma3_Flat_back_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 824.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 55.419$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 1.41 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.606 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.929 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

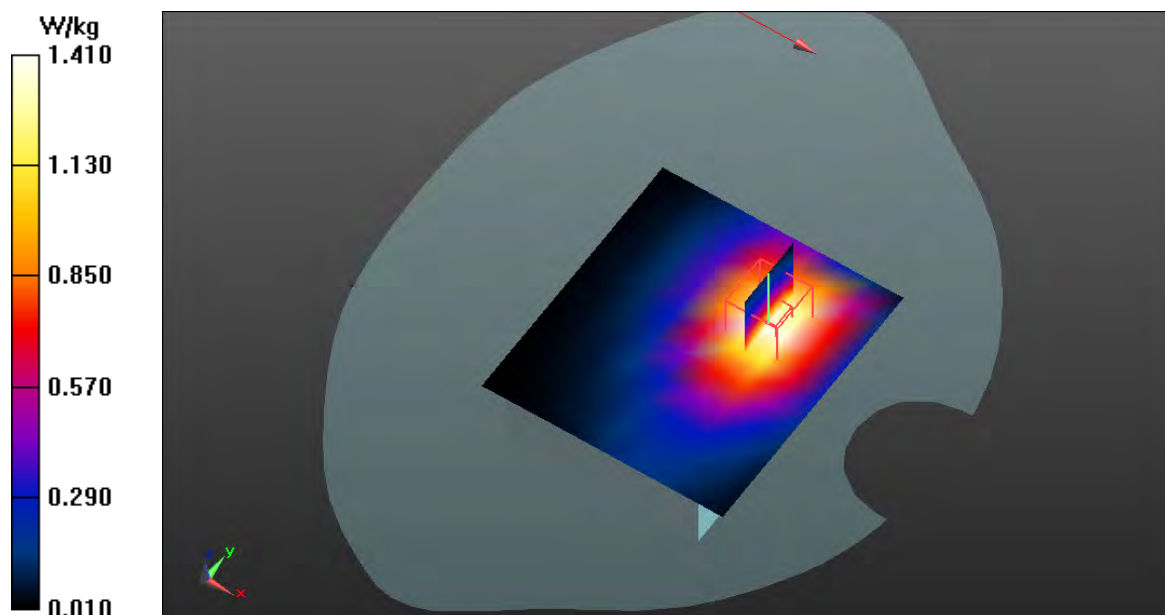

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-128_2xSlot_Gamma3_Flat_bottom_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 824.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 55.419$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.86 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.958 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.79 W/kg; SAR(10 g) = 1.12 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

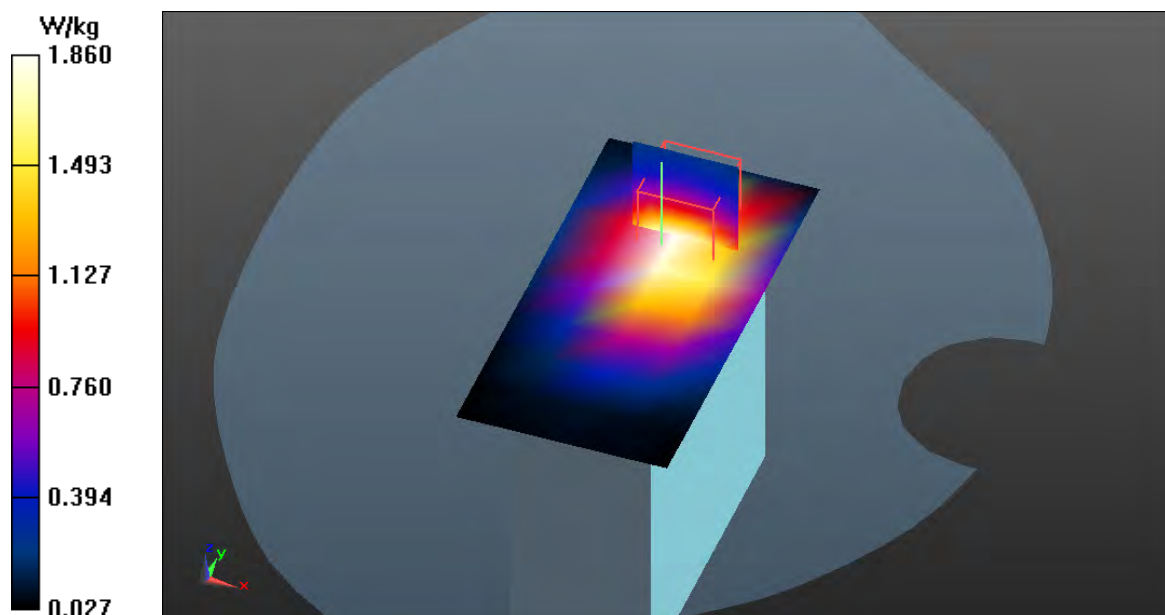

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-128_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 824.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.949$ S/m; $\epsilon_r = 55.419$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 2.09 W/kg

Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 49.813 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 4.45 W/kg
SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.19 W/kg
Maximum value of SAR (measured) = 2.49 W/kg

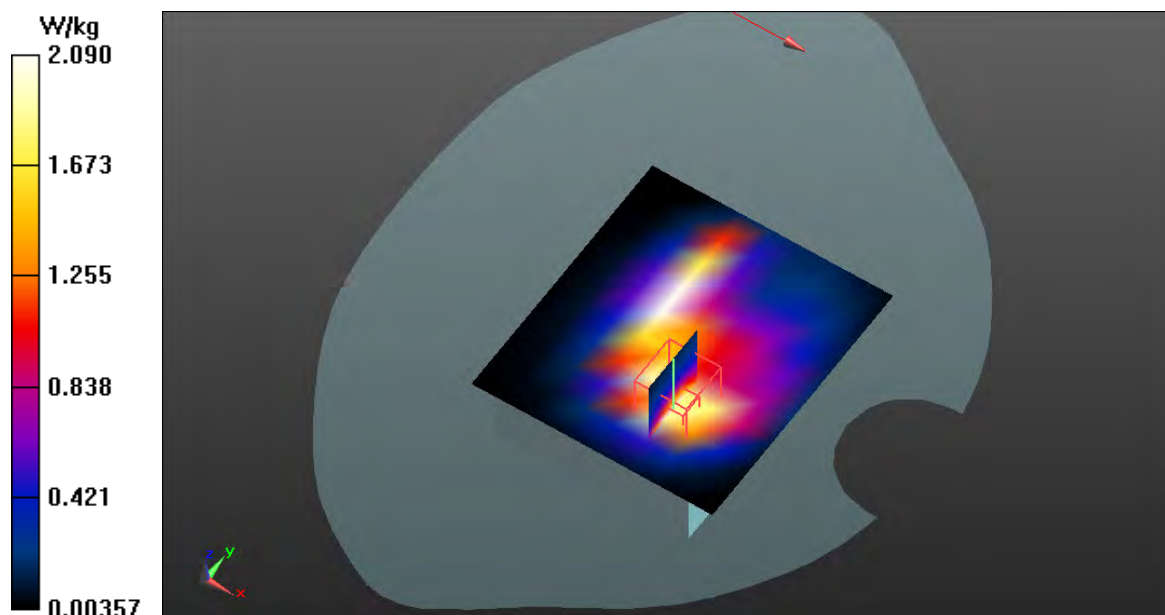

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-188_2xSlot_Gamma3_Flat_back_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 836.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.2$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.299$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 1.42 W/kg

Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 19.943 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 1.45 W/kg; SAR(10 g) = 0.963 W/kg
Maximum value of SAR (measured) = 1.54 W/kg

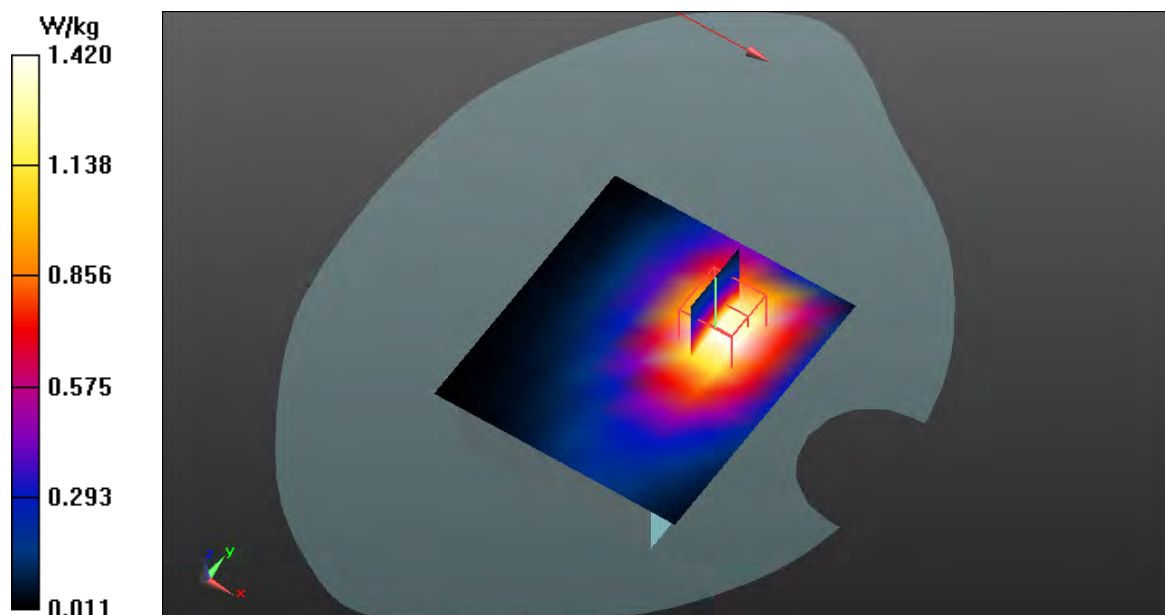

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-188_2xSlot_Gamma3_Flat_bottom_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 836.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.2$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.299$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.88 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.018 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 1.90 W/kg; SAR(10 g) = 1.09 W/kg

Maximum value of SAR (measured) = 1.94 W/kg

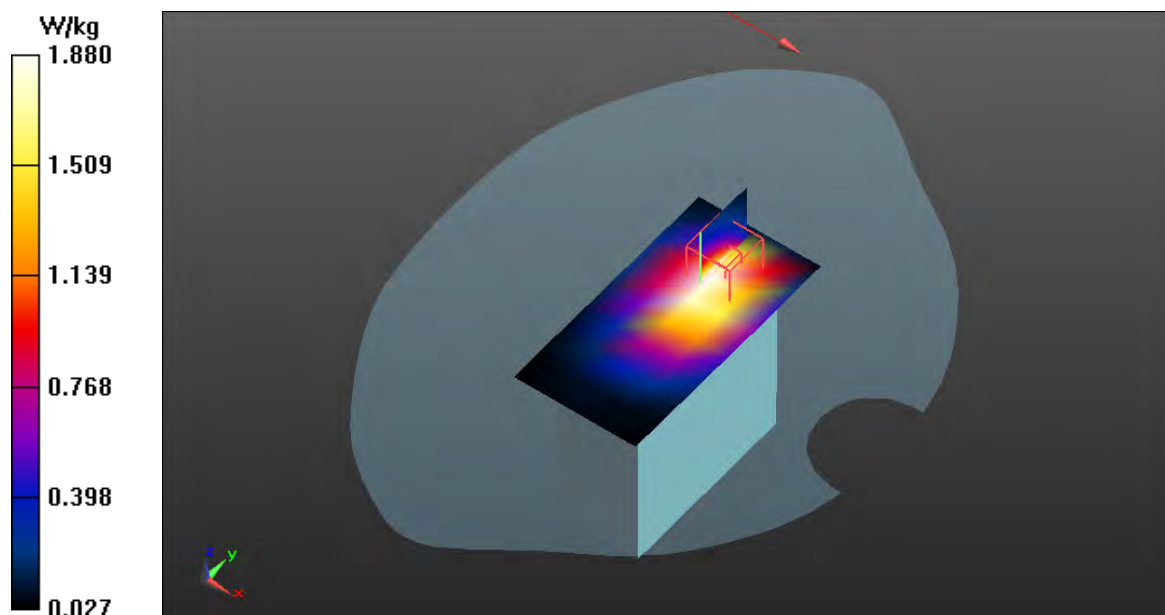

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-188_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 836.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 836.2$ MHz; $\sigma = 0.953$ S/m; $\epsilon_r = 55.299$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.99, 5.99, 5.99); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 2.20 W/kg

Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.712 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 4.19 W/kg
SAR(1 g) = 1.97 W/kg; SAR(10 g) = 1.01 W/kg
Maximum value of SAR (measured) = 2.23 W/kg

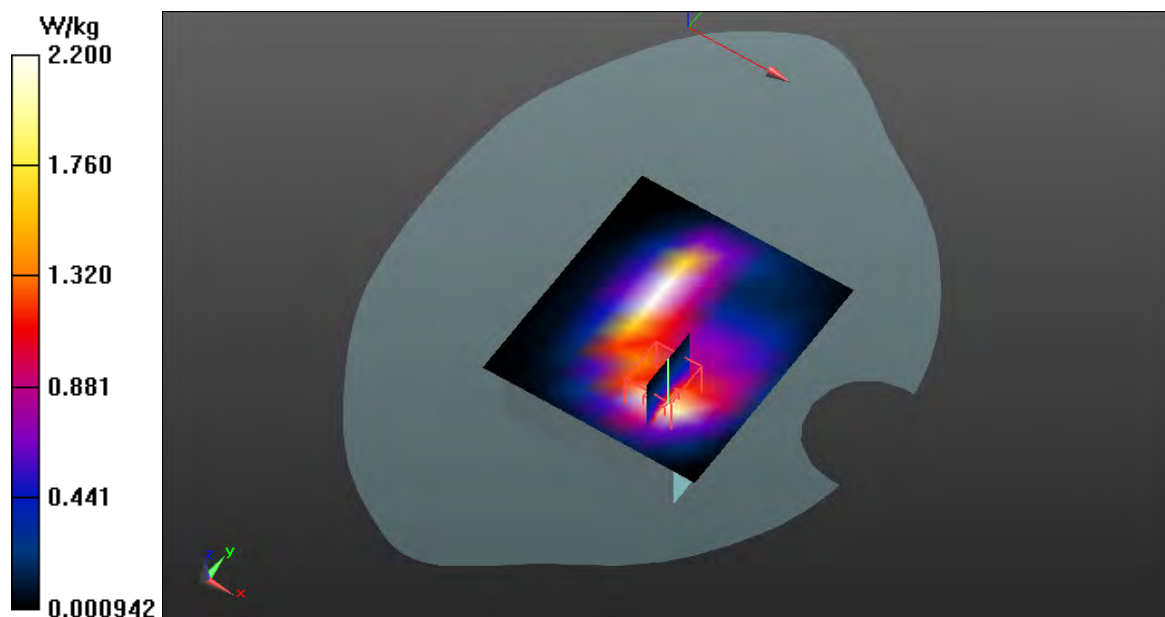

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-251_2xSlot_Gamma3_Flat_back_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 848.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 55.112$;
 $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (8x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.10 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.662 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.02 W/kg ; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.20 W/kg

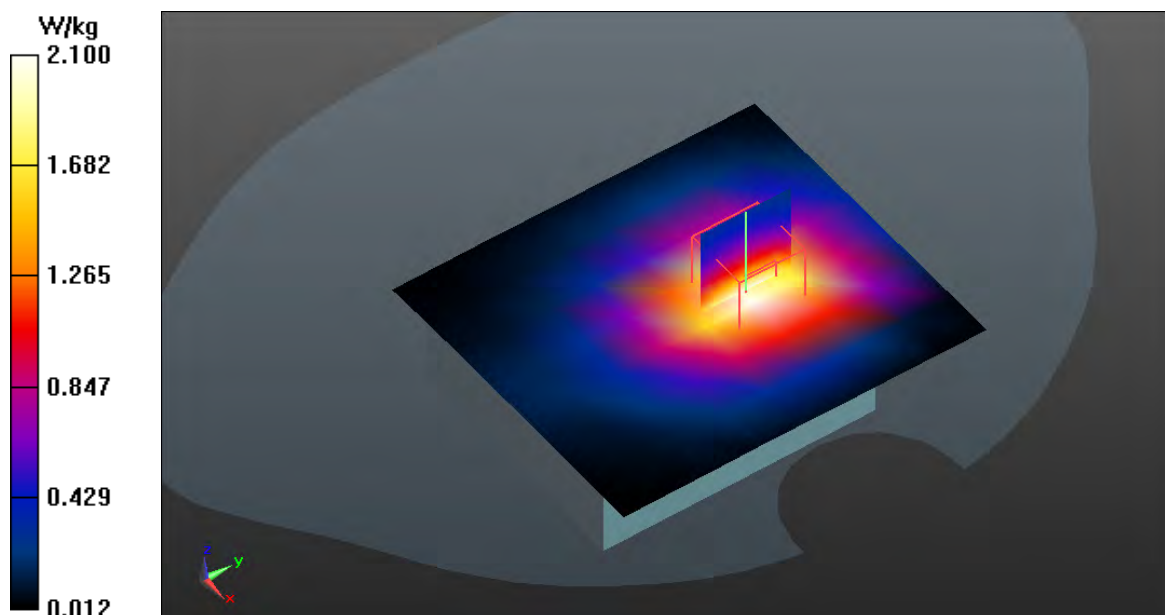

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-251_2xSlot_Gamma3_Flat_bottom_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 848.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.112$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.08 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.083 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 1.95 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 2.12 W/kg

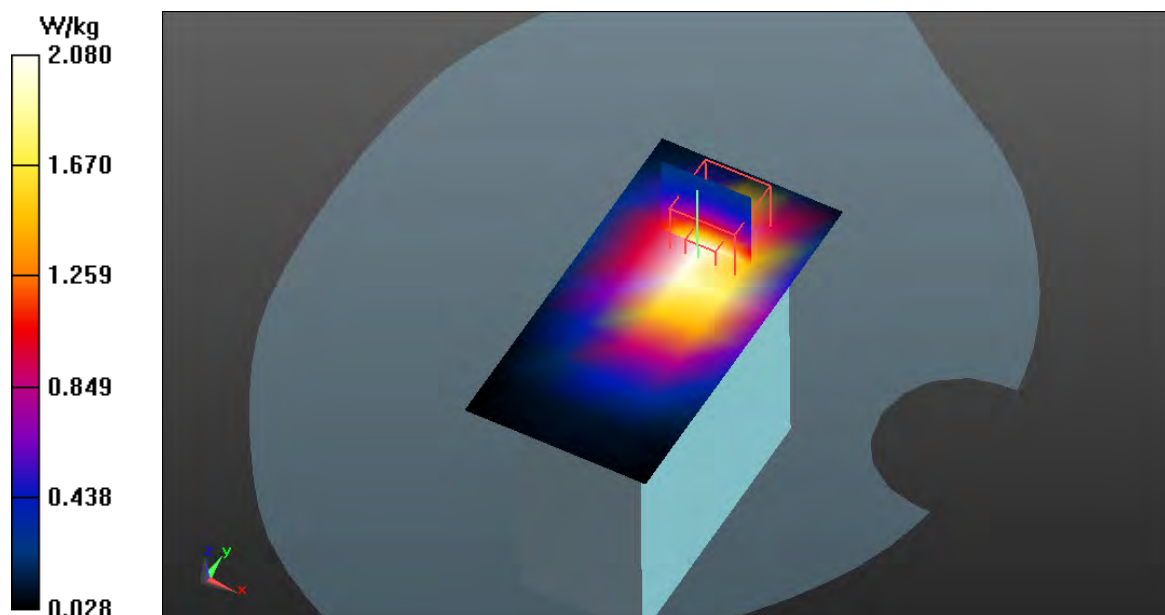

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-251_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 848.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.112$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.84 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.193 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 5.90 W/kg

SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

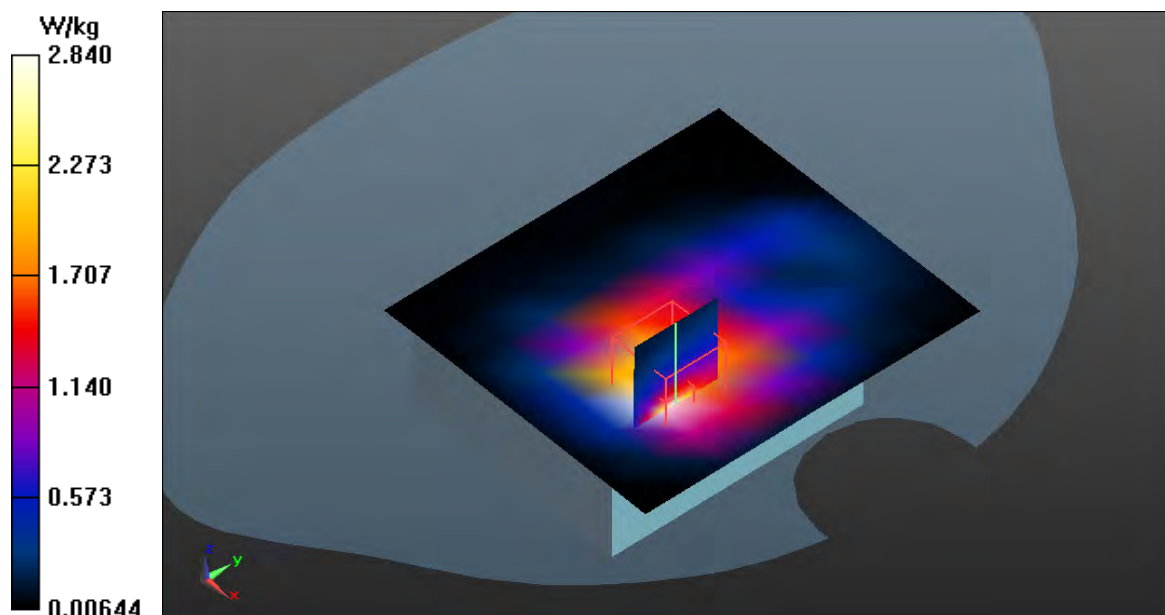

Test Laboratory: Eurofins Product Service GmbH

GPRS 850-CH-251_2xSlot_Gamma3_Flat_mouthpiece_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 850 2xSlot; Frequency: 848.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 55.112$;
 $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.07, 6.07, 6.07); Calibrated: 19.09.2012;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 13.09.2012
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.854 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.536 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.883 W/kg

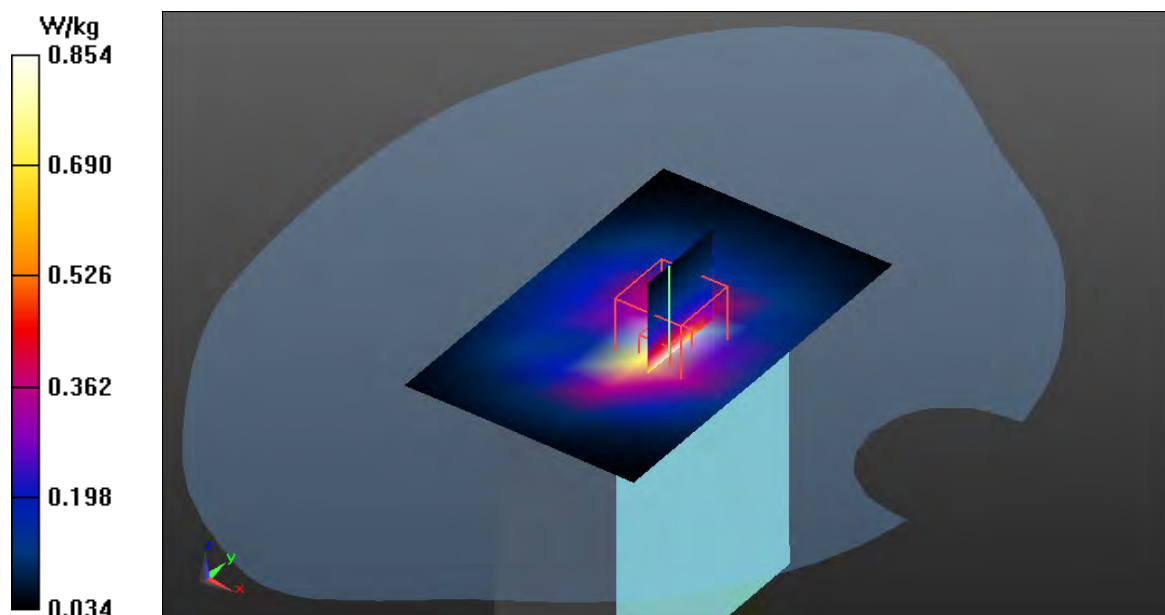

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-512_1xSlot_Gamma3_Flat_mouthpiece_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 54.087$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (7x10x1): Measurement grid: $dx=12.5$ mm, $dy=12.5$ mm
Maximum value of SAR (measured) = 1.06 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.933 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.868 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

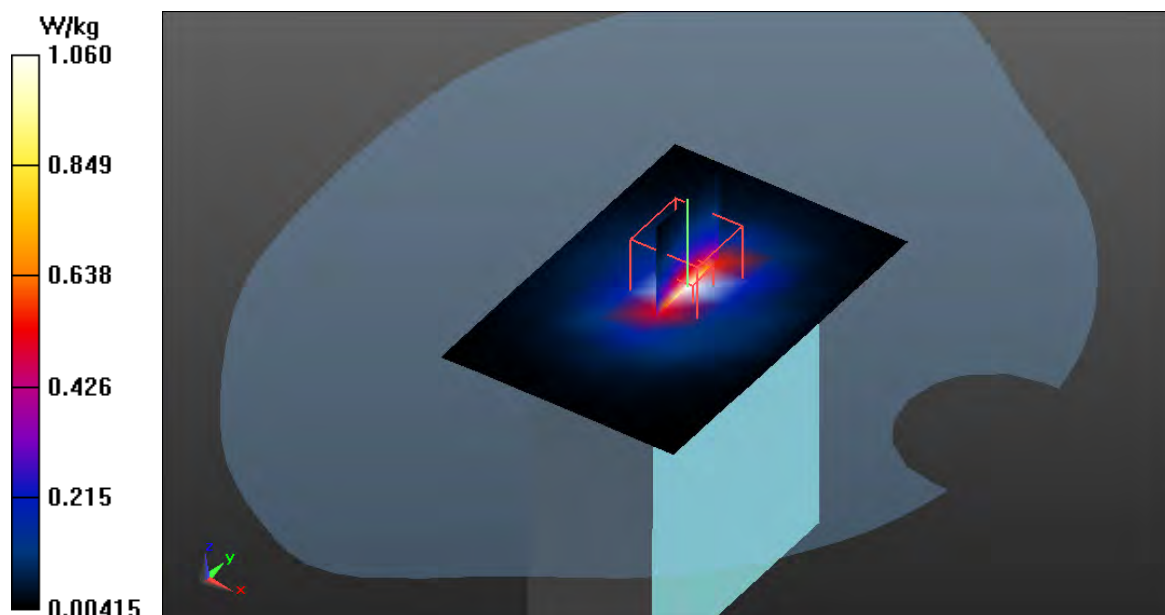

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-512_2xSlot_Gamma3_Flat_bottom_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 54.087$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (7x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 1.10 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.038 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.615 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

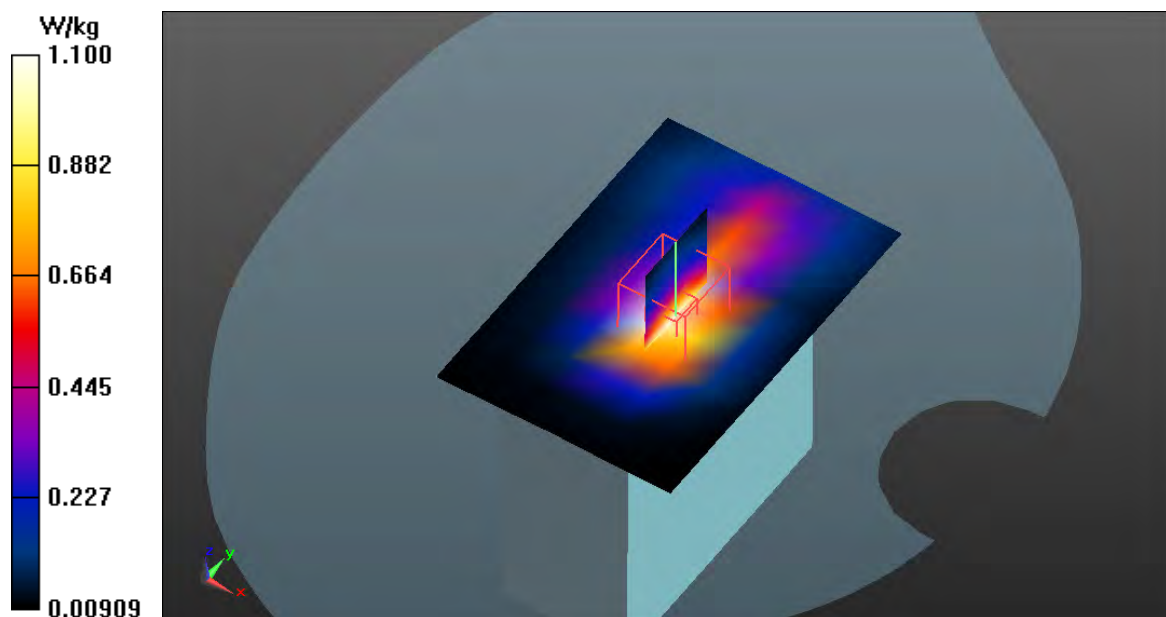

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-512_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 54.087$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: $dx=12.5\text{mm}$, $dy=12.5\text{mm}$
Maximum value of SAR (measured) = 1.99 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.247 V/m ; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 1.75 W/kg ; SAR(10 g) = 0.817 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

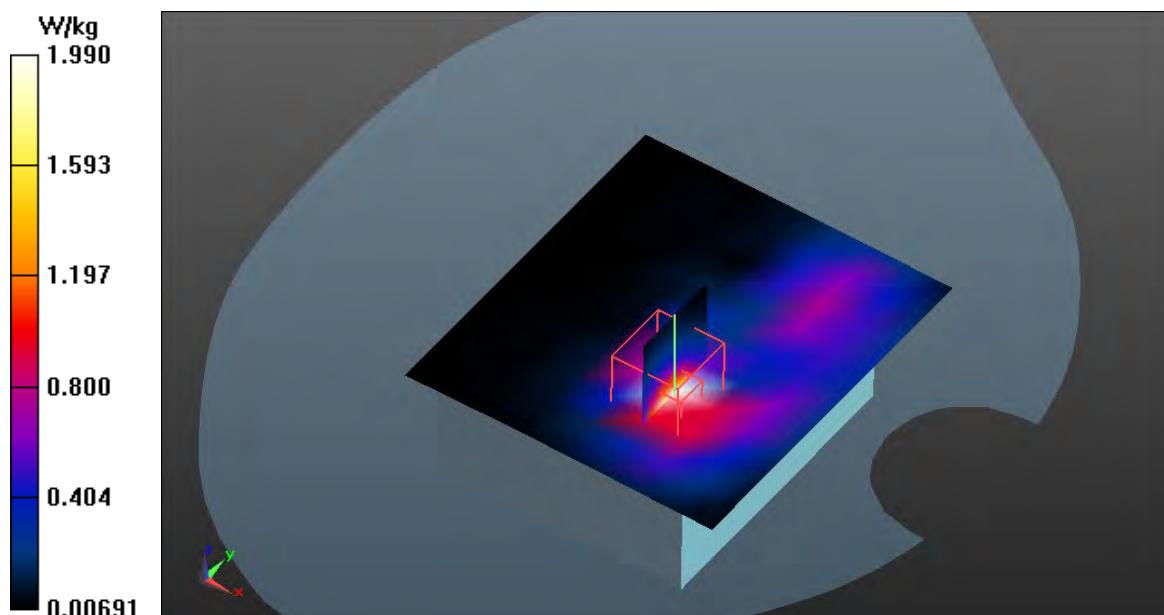

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-512_2xSlot_Gamma3_Flat_mouthpiece_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1850.2 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 54.087$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (7x10x1): Measurement grid: dx=12.5mm, dy=12.5mm
Maximum value of SAR (measured) = 2.09 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.317 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 1.71 W/kg; SAR(10 g) = 0.754 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

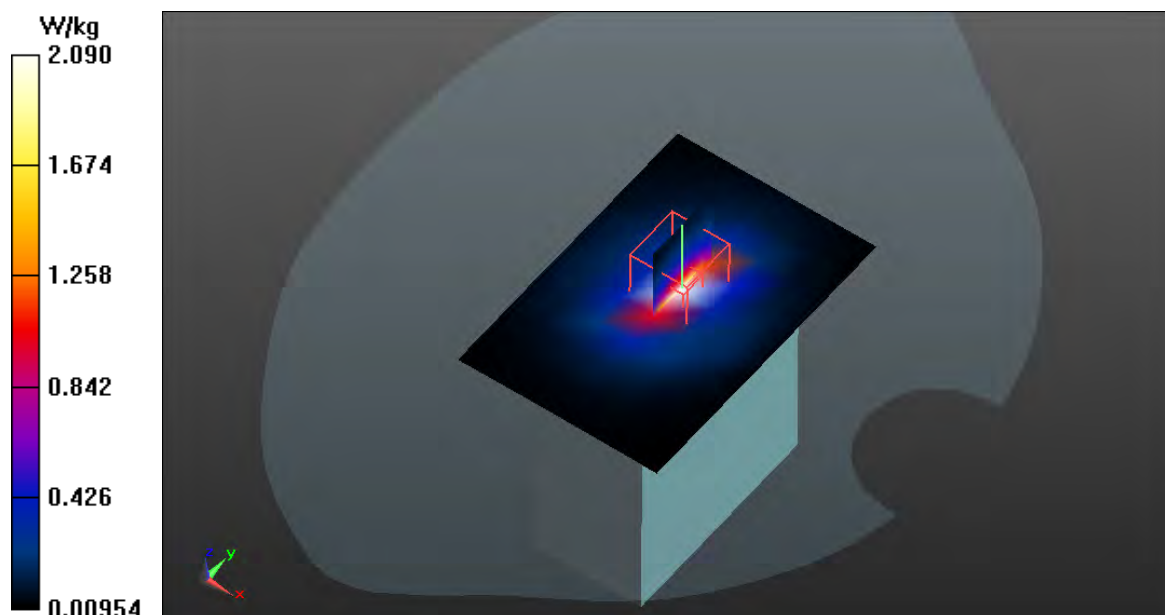

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-661_2xSlot_Gamma3_Flat_back_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (10x10x1): Measurement grid: $dx=12.5\text{mm}$, $dy=12.5\text{mm}$

Maximum value of SAR (measured) = 0.697 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.297 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.735 W/kg ; SAR(10 g) = 0.452 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

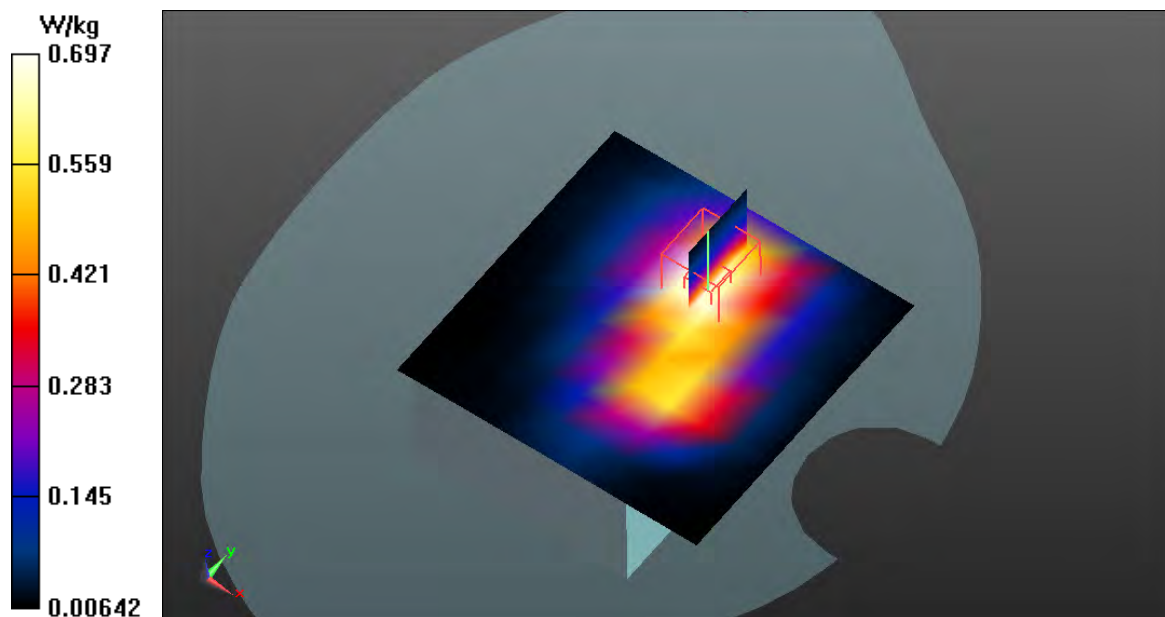

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-661_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: dx=12.5mm, dy=12.5mm

Maximum value of SAR (measured) = 1.24 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.226 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.567 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

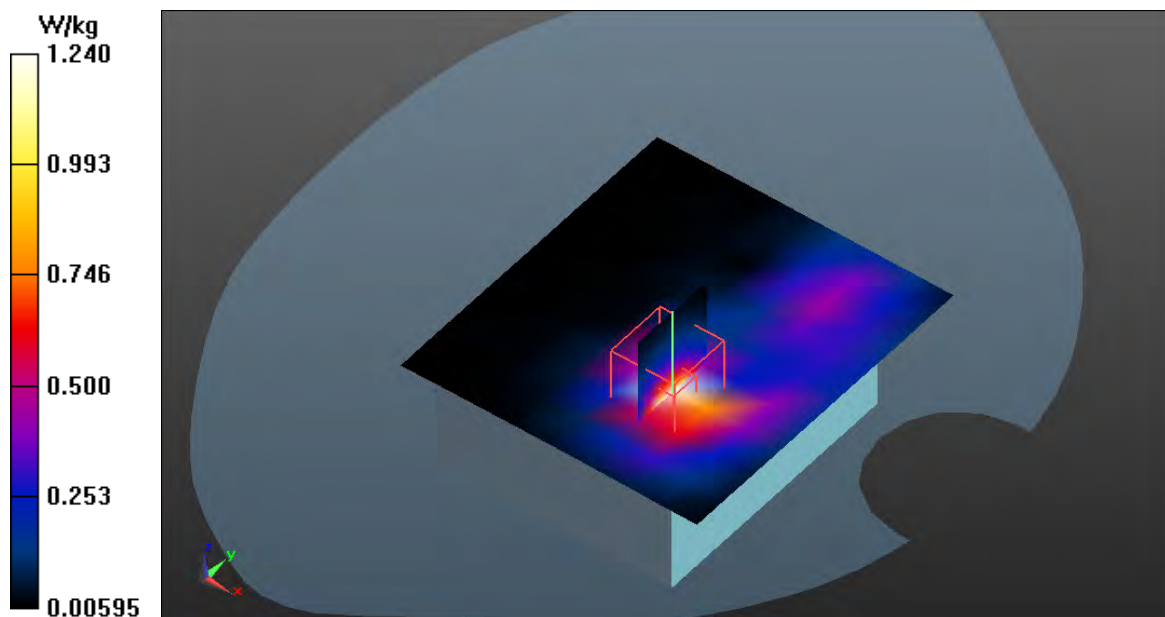

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-661_2xSlot_Gamma3_Flat_mouthpiece_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1880 MHz; Duty Cycle: 1:4.14954

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (7x10x1): Measurement grid: dx=12.5mm, dy=12.5mm

Maximum value of SAR (measured) = 1.79 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.288 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 1.41 W/kg; SAR(10 g) = 0.591 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

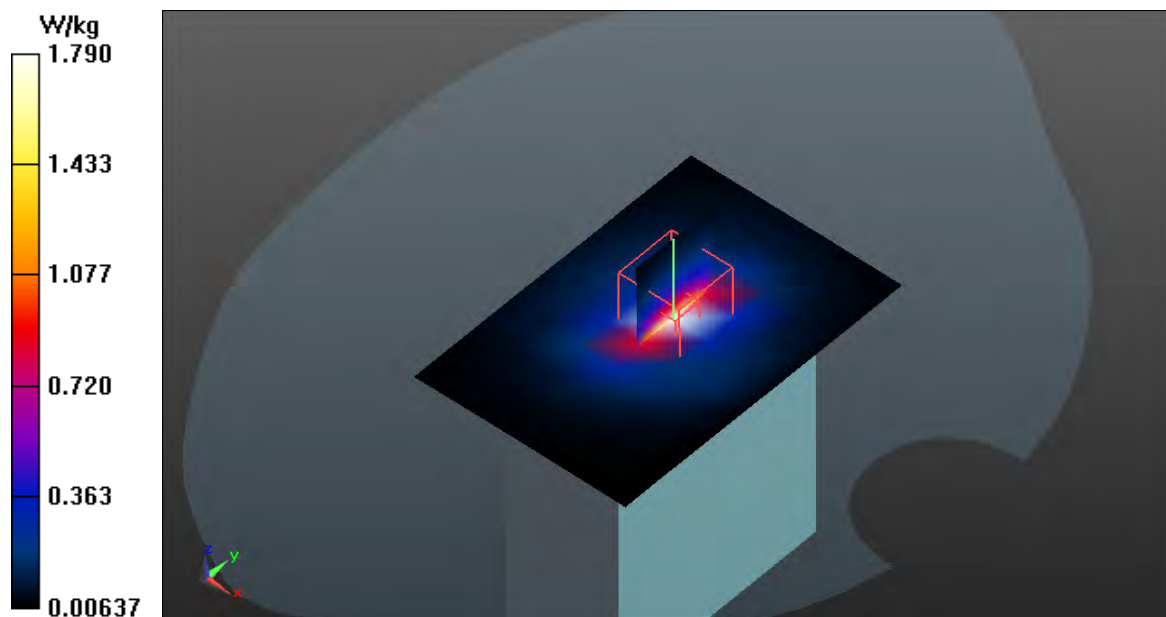

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-810_2xSlot_Gamma3_Flat_front_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1909.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1909.8 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 54.351$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (9x10x1): Measurement grid: $dx=12.5\text{mm}$, $dy=12.5\text{mm}$
Maximum value of SAR (measured) = 0.992 W/kg


Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.509 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.543 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

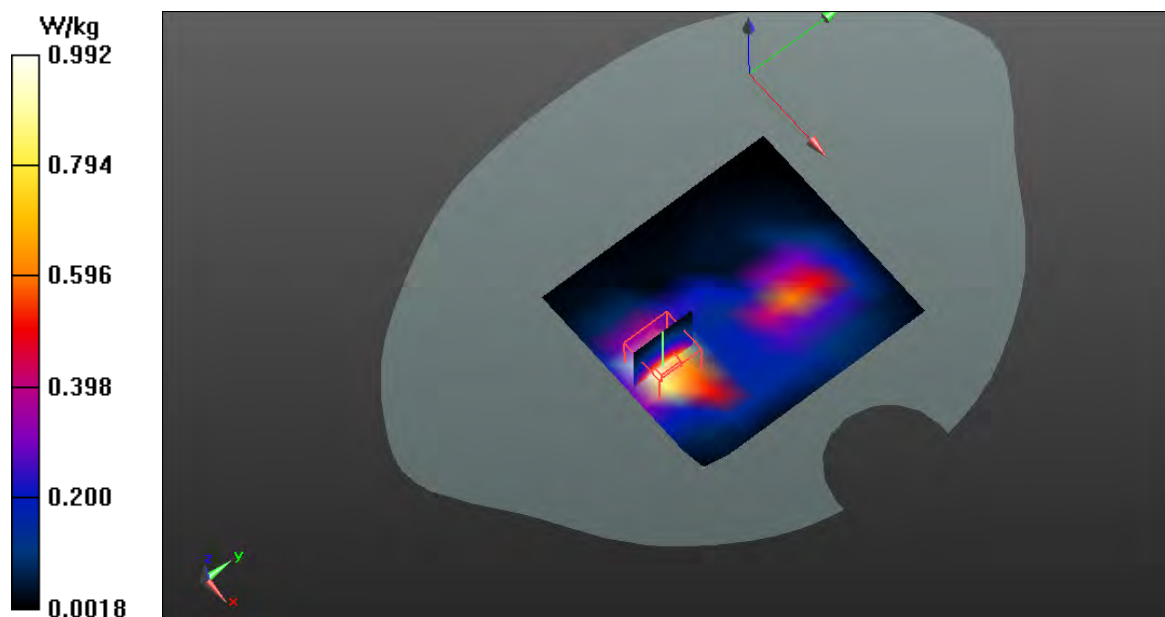

Test Laboratory: Eurofins Product Service GmbH

GPRS 1900-CH-810_2xSlot_Gamma3_Flat_mouthpiece_0mm

DUT: AM3 GSM; Type: Asthma Monitor AM3; Serial: Sample1

Communication System: UID 0 - n/a, GPRS 1900 2xSlot; Frequency: 1909.8 MHz; Duty Cycle: 1:4.14954
Medium: Muscle 1900 MHz Medium parameters used (interpolated): $f = 1909.8 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 54.351$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.69, 4.69, 4.69); Calibrated: 18.09.2013;
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 11.09.2013
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1217
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/AM3 GSM/Area Scan (7x10x1): Measurement grid: $dx=12.5\text{mm}$, $dy=12.5\text{mm}$
Maximum value of SAR (measured) = 1.27 W/kg

Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.074 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 1.03 W/kg ; SAR(10 g) = 0.426 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

