

| <b>SAR TEST REPORT</b><br><b>FCC 47 CFR Part 2.1093</b><br><b>ISED RSS-102</b><br><b>RF-Exposure evaluation of portable equipment</b> |                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Reference No.</b> .....                                                                                                     | G0M-1712-7109-TFC093SR-V02                                                                                                                                                                                                                             |
| <b>Testing Laboratory</b> .....                                                                                                       | Eurofins Product Service GmbH                                                                                                                                                                                                                          |
| <b>Address</b> .....                                                                                                                  | Storkower Str. 38c<br>15526 Reichenwalde<br>Germany                                                                                                                                                                                                    |
| <b>Accreditation</b> .....                                                                                                            |  <br>FCC Test Firm Designation Number: DE0008<br>IC Testing Laboratory site: 3470A-2 |
| <b>Applicant's name</b> .....                                                                                                         | eResearchTechnology GmbH                                                                                                                                                                                                                               |
| <b>Address</b> .....                                                                                                                  | Sieboldstrasse 3<br>97230 Estenfeld<br>Germany                                                                                                                                                                                                         |
| <b>Test specification:</b>                                                                                                            |                                                                                                                                                                                                                                                        |
| <b>Standard</b> .....                                                                                                                 | FCC 47 CFR Part 2 §2.1093<br>447498 D01 General RF Exposure Guidance v06<br>IEEE Std. 1528 - 2013<br>ISED RSS-102 Issue 5                                                                                                                              |
| <b>Non-standard test method</b> .....                                                                                                 | None                                                                                                                                                                                                                                                   |
| <b>Test scope</b> .....                                                                                                               | complete Radio compliance test                                                                                                                                                                                                                         |
| <b>Equipment under test (EUT):</b>                                                                                                    |                                                                                                                                                                                                                                                        |
| Product description                                                                                                                   | Asthma Monitor AM3                                                                                                                                                                                                                                     |
| Model No.                                                                                                                             | AM3 Option BT+                                                                                                                                                                                                                                         |
| Additional Model(s)                                                                                                                   | None                                                                                                                                                                                                                                                   |
| Brand Name(s)                                                                                                                         | None                                                                                                                                                                                                                                                   |
| Hardware version                                                                                                                      | 1.0                                                                                                                                                                                                                                                    |
| Firmware / Software version                                                                                                           | 9.40                                                                                                                                                                                                                                                   |
|                                                                                                                                       | FCC-ID: 2AUUFAM3G03      IC: 11335A-AM3G03                                                                                                                                                                                                             |
| <b>Test result</b>                                                                                                                    | <b>Passed</b>                                                                                                                                                                                                                                          |

**Possible test case verdicts:**

- neither assessed nor tested.....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object.....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item .....: 2018-02-02

Date (s) of performance of tests .....: 2018-02-02 - 2018-02-07

Compiled by .....: Burkhard Pudell

Tested by (+ signature) .....: Matthias Handrik  
(Responsible for Test)



Approved by (+ signature).....: Christian Weber  
(Head of Lab)



Date of issue .....: 2018-03-28

Total number of pages .....: 76

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

| Version | Issue Date | Remarks                                                                                                                                          | Revised by |
|---------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 01      | 2018-03-01 | Initial Release                                                                                                                                  |            |
| 02      | 2018-03-28 | Replaced document: G0M-1712-7109-TFC093SR-V01<br>Replaced by: G0M-1712-7109-TFC093SR-V02<br><br>Changes: Page 6: Contains FCC ID / IC corrected. | M. Handrik |

---

## REPORT INDEX



|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| <b>1</b> | <b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>                 | <b>6</b>  |
| 1.1      | Equipment photos                                         | 7         |
| 1.2      | Equipment setup photos                                   | 10        |
| 1.3      | Reference Documents                                      | 13        |
| 1.4      | Supporting Equipment Used During Testing                 | 13        |
| 1.5      | Supported standalone operating modes                     | 14        |
| 1.6      | Conducted Power Values                                   | 14        |
| 1.7      | Radiated Power Values ISED                               | 14        |
| 1.8      | Standalone Operational Mode Test Exclusion for FCC       | 15        |
| 1.9      | Standalone Operational Mode Exemption limits for ISED    | 16        |
| 1.10     | SAR value estimation for multi-transmitter evaluation    | 16        |
| 1.11     | Supported concurrent (multi-transmitter) operating modes | 16        |
| 1.12     | Supported use cases                                      | 17        |
| 1.13     | Radio Test Modes                                         | 17        |
| 1.14     | Test Positions                                           | 17        |
| 1.15     | Test Equipment Used During Testing                       | 18        |
| <b>2</b> | <b>RESULT SUMMARY</b>                                    | <b>19</b> |
| <b>3</b> | <b>DEFINITIONS</b>                                       | <b>20</b> |
| 3.1      | Controlled Exposure                                      | 20        |
| 3.2      | Uncontrolled Exposure                                    | 20        |
| 3.3      | Localized SAR                                            | 20        |
| <b>4</b> | <b>LOCALIZED SAR MEASUREMENT EQUIPMENT</b>               | <b>21</b> |
| 4.1      | Complete SAR DASY5 Measurement System                    | 21        |
| 4.2      | Robot Arm                                                | 23        |
| 4.3      | Data Acquisition Electronics                             | 23        |
| 4.4      | Isotropic E-Field Probe $\leq 6$ GHz                     | 24        |
| 4.5      | Test phantom and positioner                              | 25        |
| 4.6      | System Validation Dipoles                                | 26        |
| <b>5</b> | <b>SINGLE-BAND SAR MEASUREMENT</b>                       | <b>27</b> |
| 5.1      | General measurement description                          | 27        |
| 5.2      | SAR measurement description                              | 27        |
| 5.3      | Reference lines and points for Handsets                  | 28        |
| 5.4      | Test positions relative to the Head                      | 29        |

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| 5.5      | Test positions relative to the human body                  | 30        |
| 5.6      | Measurement Uncertainty                                    | 31        |
| <b>6</b> | <b>TEST CONDITIONS AND RESULTS</b>                         | <b>34</b> |
| 6.1      | Recipes for Tissue Simulating Liquids                      | 34        |
| 6.2      | Test Conditions and Results – Tissue Validation            | 35        |
| 6.3      | Test Conditions and Results – System Validation            | 37        |
| 6.4      | Test Conditions and Results – Standalone SAR Measurement   | 38        |
| 6.5      | Test Conditions and Results – Multi-transmitter SAR Result | 39        |
| ANNEX A  | Calibration Documents                                      | 40        |
| ANNEX B  | System Validation Reports                                  | 69        |
| ANNEX C  | SAR Measurement Reports                                    | 71        |

## 1 Equipment (Test item) Description


|                                     |                                                                            |                                |
|-------------------------------------|----------------------------------------------------------------------------|--------------------------------|
| <b>Description</b>                  | Asthma Monitor AM3                                                         |                                |
| <b>Model</b>                        | AM3 Option BT+                                                             |                                |
| <b>Additional Model(s)</b>          | None                                                                       |                                |
| <b>Brand Name(s)</b>                | None                                                                       |                                |
| <b>Serial number</b>                | None                                                                       |                                |
| <b>Hardware version</b>             | 1.0                                                                        |                                |
| <b>Software / Firmware version</b>  | 9.40                                                                       |                                |
| <b>FCC ID</b>                       | 2AAUFAM3G03                                                                |                                |
| <b>IC</b>                           | 11335A-AM3G03                                                              |                                |
| <b>PMN</b>                          | AM3                                                                        |                                |
| <b>HVIN</b>                         | AM3 Option BT+                                                             |                                |
| <b>FVIN</b>                         | n/a                                                                        |                                |
| <b>HMN</b>                          | n/a                                                                        |                                |
| <b>Contains FCC-ID</b>              | QQQBT121                                                                   |                                |
| <b>Contains IC</b>                  | 5123A-BGTBT121                                                             |                                |
| <b>Equipment type</b>               | End product                                                                |                                |
| <b>Prototype or production unit</b> | Production Unit                                                            |                                |
| <b>Device category</b>              | Handset                                                                    |                                |
| <b>Environment</b>                  | General public                                                             |                                |
| <b>Radio technologies</b>           | Bluetooth - Classic & Low Energy                                           |                                |
| <b>Operating frequency ranges</b>   | 2402 – 2480 MHz                                                            |                                |
| <b>Modulations</b>                  | GFSK, $\pi/4$ -DQPSK, 8-DPSK                                               |                                |
| <b>Antenna</b>                      | Type                                                                       | integrated                     |
|                                     | Model                                                                      | BT121                          |
|                                     | Manufacturer                                                               | Silicon Labs (former BlueGiga) |
|                                     | Gain                                                                       | 1 dBi                          |
| <b>Power supply</b>                 | V <sub>NOM</sub>                                                           | 3.7 VDC (Lithium Battery)      |
| <b>AC/DC-Adaptor</b>                | Model                                                                      | N/A                            |
|                                     | Vendor                                                                     | N/A                            |
|                                     | Input                                                                      | N/A                            |
|                                     | Output                                                                     | N/A                            |
| <b>Accessories</b>                  | None                                                                       |                                |
| <b>Manufacturer</b>                 | eResearchTechnology GmbH<br>Sieboldstrasse 3<br>97230 Estenfeld<br>Germany |                                |

## 1.1 Equipment photos

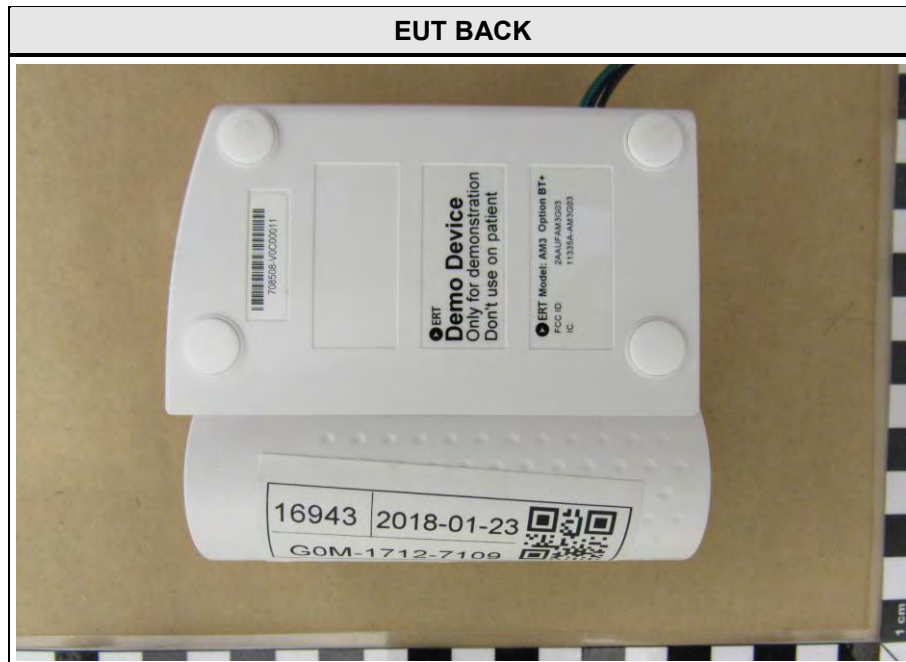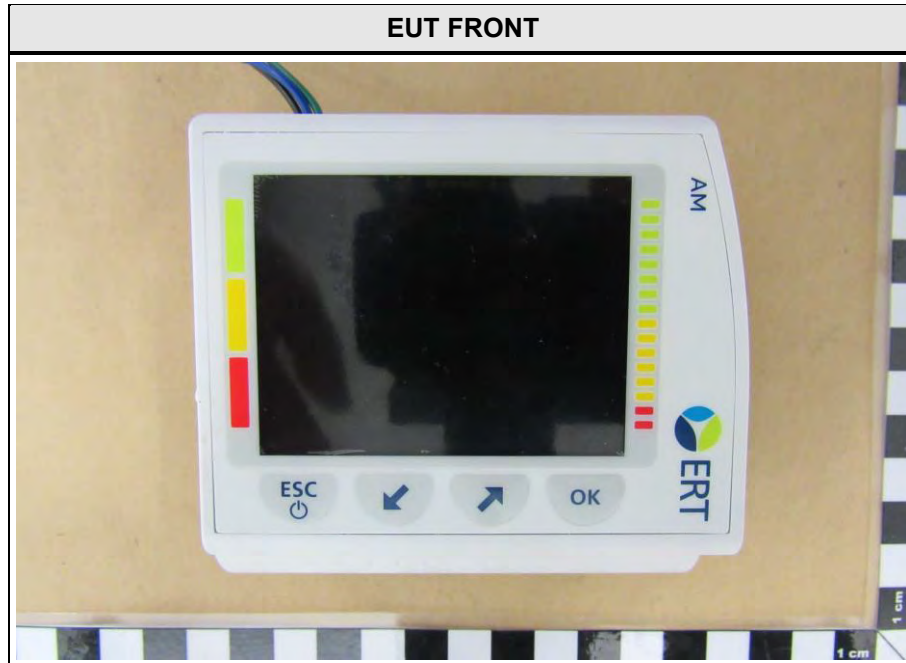




EUT TOP

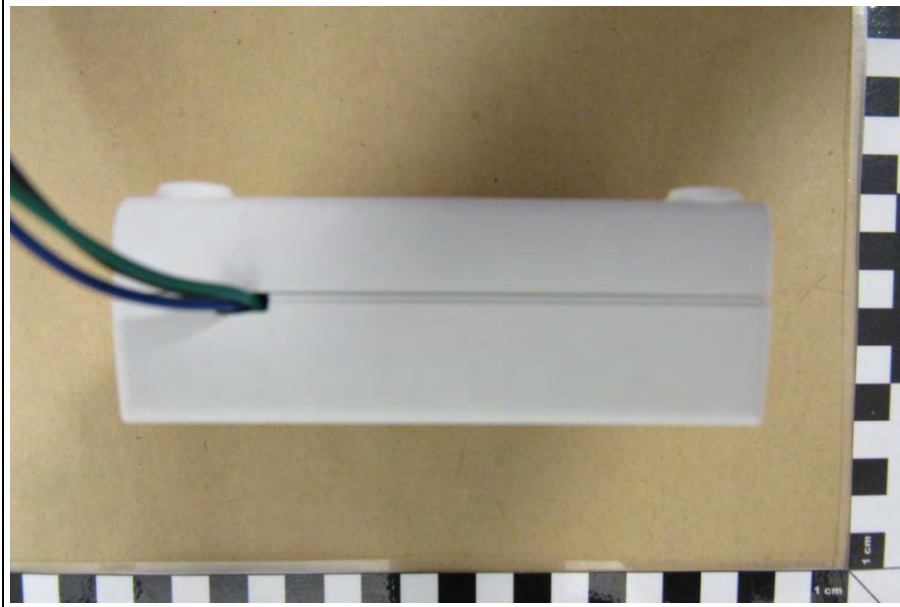

EUT BOTTOM

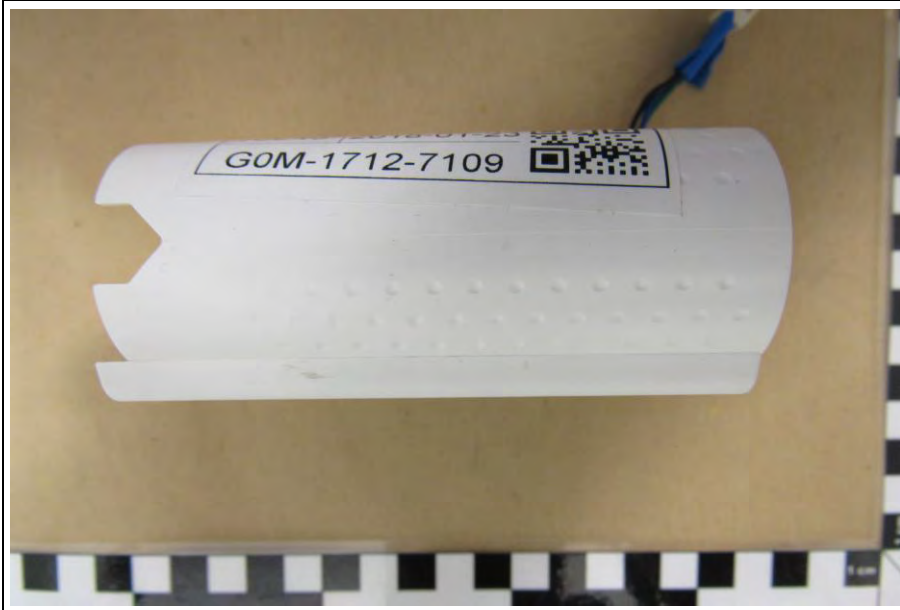




EUT LEFT



EUT RIGHT



## 1.2 Equipment setup photos

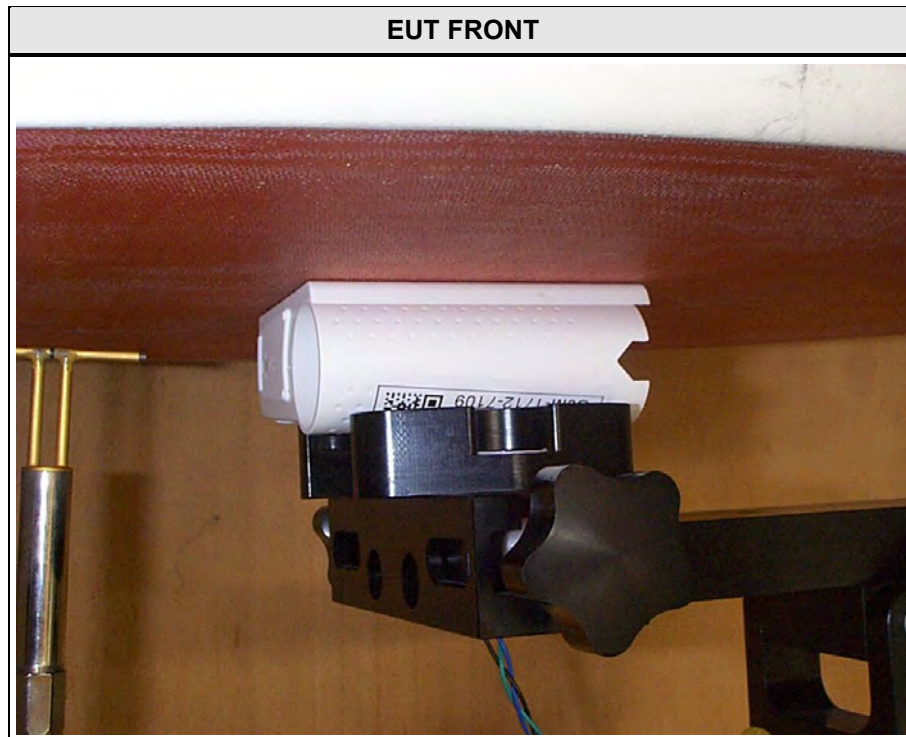


EUT TOP



EUT LEFT





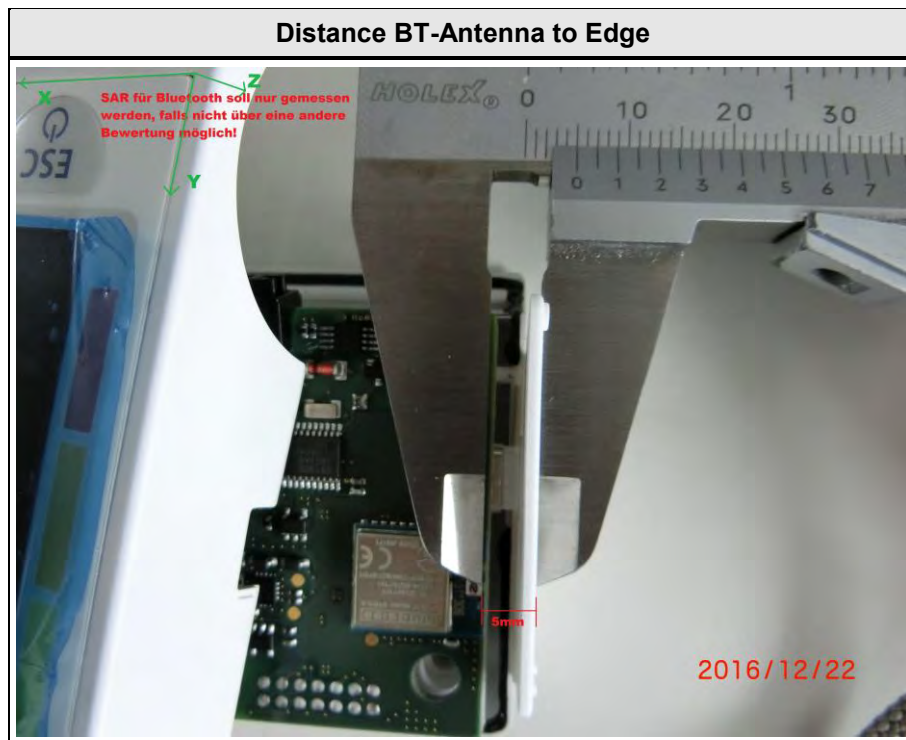

### 1.3 Reference Documents

| Document                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------|
| KDB Publication 447498 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies              |
| KDB Publication 648474 : SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas                  |
| KDB Publication 648474 : Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas |
| KDB Publication 865664 : SAR measurement procedures for devices operating between 100 MHz to 6 GHz                           |
| KDB Publication 941225: SAR Measurement Procedures for 3G Devices                                                            |
| KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance                                                               |
| KDB Publication 941225: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE                                          |
| KDB Publication 941225: SAR Test Consideration for LTE Handsets and Data Modems                                              |
| KDB Publication 447498 : SAR Measurement Procedures for USB Dongle Transmitters                                              |
| KDB Publication 248227 : SAR Measurement Procedures for 802.11 a/b/g Transmitters                                            |
| KDB Publication 450824 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz |

### 1.4 Supporting Equipment Used During Testing

| Product Type*                                                                                                                                                    | Device             | Manufacturer | Model No. | Comments          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------|-----------|-------------------|
| SIM                                                                                                                                                              | communication unit | R&S          | CBT       | Bluetooth Classic |
| <b>*Note:</b> Use the following abbreviations:<br>AE : Auxiliary/Associated Equipment, or<br>SIM : Simulator (Not Subjected to Test)<br>CABL : Connecting cables |                    |              |           |                   |

## 1.5 Supported standalone operating modes

| Mode   | Modulation     | Frequency range     | Duty cycle |
|--------|----------------|---------------------|------------|
| BT-BR  | GFSK           | 2402 MHz – 2480 MHz | 77%        |
| BT-EDR | $\pi/4$ -DQPSK | 2402 MHz – 2480 MHz | 77%        |
| BT-EDR | 8-DPSK         | 2402 MHz – 2480 MHz | 77%        |
| BT-LE  | GFSK           | 2402 MHz – 2480 MHz | 100%       |

## 1.6 Conducted Power Values

| Bluetooth – Average Output Power |                                                                     |                        |             |            |
|----------------------------------|---------------------------------------------------------------------|------------------------|-------------|------------|
| Frequency [MHz]                  | Source-base time-average power [dBm] includes Tune up tolerance 2dB |                        |             |            |
|                                  | BT-BR                                                               | BT-EDR                 |             | BT-LE      |
|                                  | DH5                                                                 | 2-DH5                  | 3-DH5       |            |
| 2402                             | 6.72                                                                | 8.43                   | <b>9.43</b> | 3.2        |
| 2441                             | 6.48                                                                | 7.73                   | 8.36        | <b>3.8</b> |
| 2480                             | 5.61                                                                | 6.47                   | 6.82        | 3.8        |
| Date, Operator:                  |                                                                     | 05.02.2018 , B. Pudell |             |            |

## 1.7 Radiated Power Values ISED

| Bluetooth – Average Output Power |                                                                     |        |              |            |
|----------------------------------|---------------------------------------------------------------------|--------|--------------|------------|
| Frequency<br>[MHz]               | Source-base time-average power [dBm] includes Tune up tolerance 2dB |        |              |            |
|                                  | BT-BR                                                               | BT-EDR |              | BT-LE      |
|                                  | DH5                                                                 | 2-DH5  | 3-DH5        |            |
| 2402                             | 7.72                                                                | 9.43   | <b>10.43</b> | 4.2        |
| 2441                             | 7.48                                                                | 8.73   | 9.36         | <b>4.8</b> |
| 2480                             | 6.61                                                                | 7.47   | 7.82         | 4.8        |
| Date, Operator:                  | 05.02.2018 , B. Pudell                                              |        |              |            |
| *includes antenna gain: +1 dB    |                                                                     |        |              |            |

## 1.8 Standalone Operational Mode Test Exclusion for FCC

According to KDB 447498 D01 v06 for standalone SAR evaluation the test exclusion power condition is given by

$$\frac{\text{max Power, mW}}{\text{test distance, mm}} \cdot \sqrt{f_{\text{GHz}}} \leq 3.0$$

for test separation distance  $\leq 50\text{mm}$ . For test separation distances  $> 50\text{mm}$ , the SAR test exclusion threshold is:

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot \frac{f[\text{MHz}]}{150},$$

$$100 \text{ MHz} < f < 1500 \text{ MHz}$$

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot 10,$$

$$1500 \text{ MHz} < f < 6 \text{ GHz}$$

| SAR Test Exclusion                                                              |           |                        |      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |
|---------------------------------------------------------------------------------|-----------|------------------------|------|----------------------------------|--------------------------------------|----------------------------------|--------------------------------------|----------------------------------|--------------------------------------|----------------------------------|--------------------------------------|----------------------------------|--------------------------------------|----------------------------------|--------------------------------------|
| Mode                                                                            | P<br>[mW] | Ant.                   | Reg. | EUT Edge                         |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |
|                                                                                 |           |                        |      | TOP                              |                                      | BACK                             |                                      | FRONT                            |                                      | BOTTOM                           |                                      | RIGHT                            |                                      | LEFT                             |                                      |
|                                                                                 |           |                        |      | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] | Antenna distance to user<br>[mm] | SAR Test Exclusion<br>Threshold [mW] |
| BT-Classic                                                                      | 8.8       | Intern                 | FCC  | 17                               | 29                                   | 11                               | 19                                   | 19                               | 29                                   | 60                               | 196                                  | 80                               | <396                                 | 5                                | 10                                   |
|                                                                                 | 11        |                        | IC   | 17                               | 15                                   | <b>11</b>                        | <b>7</b>                             | 19                               | 15                                   | 60                               | <309                                 | 80                               | <309                                 | <b>5</b>                         | <b>4</b>                             |
| BT-LE                                                                           | 2.4       | Intern                 | FCC  | 17                               | 29                                   | 11                               | 19                                   | 19                               | 29                                   | 60                               | 196                                  | 80                               | <396                                 | 5                                | 10                                   |
|                                                                                 | 3         |                        | IC   | 17                               | 15                                   | 11                               | 7                                    | 19                               | 15                                   | 60                               | <309                                 | 80                               | <309                                 | 5                                | 4                                    |
| Comments: All bold Threshold values are above the limit and have to be measured |           |                        |      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |
| Date, Operator:                                                                 |           | 05.02.2018 , B. Pudell |      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |                                  |                                      |



### 1.9 Standalone Operational Mode Exemption limits for ISED

| Frequency (MHz) | Exemption Limits (mW)           |                                 |                                 |                                 |                                 |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
|                 | At separation distance of ≤5 mm | At separation distance of 10 mm | At separation distance of 15 mm | At separation distance of 20 mm | At separation distance of 25 mm |
| ≤300            | 71 mW                           | 101 mW                          | 132 mW                          | 162 mW                          | 193 mW                          |
| 450             | 52 mW                           | 70 mW                           | 88 mW                           | 106 mW                          | 123 mW                          |
| 835             | 17 mW                           | 30 mW                           | 42 mW                           | 55 mW                           | 67 mW                           |
| 1900            | 7 mW                            | 10 mW                           | 18 mW                           | 34 mW                           | 60 mW                           |
| 2450            | 4 mW                            | 7 mW                            | 15 mW                           | 30 mW                           | 52 mW                           |
| 3500            | 2 mW                            | 6 mW                            | 16 mW                           | 32 mW                           | 55 mW                           |
| 5800            | 1 mW                            | 6 mW                            | 15 mW                           | 27 mW                           | 41 mW                           |

| Frequency (MHz) | Exemption Limits (mW)           |                                 |                                 |                                 |                                  |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|
|                 | At separation distance of 30 mm | At separation distance of 35 mm | At separation distance of 40 mm | At separation distance of 45 mm | At separation distance of ≥50 mm |
| ≤300            | 223 mW                          | 254 mW                          | 284 mW                          | 315 mW                          | 345 mW                           |
| 450             | 141 mW                          | 159 mW                          | 177 mW                          | 195 mW                          | 213 mW                           |
| 835             | 80 mW                           | 92 mW                           | 105 mW                          | 117 mW                          | 130 mW                           |
| 1900            | 99 mW                           | 153 mW                          | 225 mW                          | 316 mW                          | 431 mW                           |
| 2450            | 83 mW                           | 123 mW                          | 173 mW                          | 235 mW                          | 309 mW                           |
| 3500            | 86 mW                           | 124 mW                          | 170 mW                          | 225 mW                          | 290 mW                           |
| 5800            | 56 mW                           | 71 mW                           | 85 mW                           | 97 mW                           | 106 mW                           |

### 1.10 SAR value estimation for multi-transmitter evaluation

According to KDB 447498 D01 v06 for standalone SAR evaluation the estimated SAR is given by

$$\frac{\max Power (including tune up tolerance), mW}{min. test separation distance, mm} \cdot \sqrt{\frac{f_{GHz}}{x}} \leq 0.4 \frac{W}{kg}$$

x=7.5 for 1-g SAR, and x=18.75 for 10-g SAR, for test separation ≤ 50mm.

For test separation distance > 50mm, the estimated SAR value is 0.4 W/kg

### 1.11 Supported concurrent (multi-transmitter) operating modes

N/A, no multi-transmitter evaluation

### 1.12 Supported use cases

| Use case                                              | Distance to human body | corresponding test configuration |
|-------------------------------------------------------|------------------------|----------------------------------|
| People hold the device in hand or carry on human body | 0 mm (worst case)      | body-worn device                 |
| Comment:                                              |                        |                                  |

### 1.13 Radio Test Modes

| Mode                                                | Settings                                                                                                                                |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| BT-LE                                               | Mode = standalone TX mode<br>Modulation = GFSK<br>Duty cycle = 100%<br>Power level = maximum<br>Antenna = integrated                    |
| BT-EDR                                              | Mode = DUT test mode<br>Modulation = 8-DPSK<br>Packet type = 3-DH5<br>Duty cycle = 77%<br>Power level = maximum<br>Antenna = integrated |
| Comment: BT-LE and BT-BR not activ at the same time |                                                                                                                                         |

### 1.14 Test Positions

| Position  | Description                                   |
|-----------|-----------------------------------------------|
| FRONT-0mm | EUT front side directly touching the phantom. |
| BACK-0mm  | EUT back side directly touching the phantom.  |
| TOP-0mm   | EUT top side directly touching the phantom.   |
| LEFT-0mm  | EUT left side directly touching the phantom.  |

### 1.15 Test Equipment Used During Testing

| SAR Measurement                   |                     |           |            |                         |                         |
|-----------------------------------|---------------------|-----------|------------|-------------------------|-------------------------|
| Description                       | Manufacturer        | Model     | Identifier | Cal. Date               | Cal. Due                |
| Stäubli Robot                     | Stäubli             | RX90B L   | EF00271    | functional test         | functional test         |
| Stäubli Robot Controller          | Stäubli             | CS7MB     | EF00272    | functional test         | functional test         |
| DASY 5 Measurement Server         | Schmid & Partner    |           | EF00273    | functional test         | functional test         |
| Control Pendant                   | Stäubli             |           | EF00274    | functional test         | functional test         |
| Dell Computer                     | Schmid & Partner    | Intel     | EF00275    | functional test         | functional test         |
| Data Acquisition Electronics      | Schmid & Partner    | DAE3V1    | EF00276    | 2017-09                 | 2018-09                 |
| Dosimetric E-Field Probe          | Schmid & Partner    | EX3DV4    | EF00826    | 2017-09                 | 2018-09                 |
| System Validation Kit             | Schmid & Partner    | D900V2    | EF00281    | 2015-09                 | 2018-09                 |
| System Validation Kit             | Schmid & Partner    | D1800V2   | EF00282    | 2015-09                 | 2018-09                 |
| System Validation Kit             | Schmid & Partner    | D1900V2   | EF00283    | 2015-09                 | 2018-09                 |
| System Validation Kit             | Schmid & Partner    | D2450V2   | EF00284    | 2015-09                 | 2018-09                 |
| Flat phantom                      | Schmid & Partner    | V 4.4     | EF00328    | no calibration required | no calibration required |
| Oval flat phantom                 | Schmid & Partner    | ELI 4     | EF00289    | functional test         | functional test         |
| Mounting Device                   | Schmid & Partner    | V 3.1     | EF00287    | functional test         | functional test         |
| Millivoltmeter                    | Rohde & Schwarz     | URV 5     | EF00126    | 2016-08                 | 2019-08                 |
| Power sensor                      | Rohde & Schwarz     | NRV-Z2    | EF00125    | 2017-07                 | 2019-07                 |
| RF signal generator               | Rohde & Schwarz     | SMP 02    | EF00165    | 2017-07                 | 2019-07                 |
| Insertion unit                    | Rohde & Schwarz     | URV5-Z4   | EF00322    | 2017-08                 | 2019-08                 |
| Directional Coupler               | HP                  | HP 87300B | EF00288    | functional test         | functional test         |
| Network Analyzer 300 kHz to 3 GHz | Agilent             | 8752C     | EF00140    | 2017-07                 | 2018-07                 |
| Dielectric Probe Kit              | Agilent             | 85070C    | EF00291    | functional test         | functional test         |
| Dielectric Probe Kit              | SPEAG               | DAK-3.5   | EF00945    | 2017-09                 | 2018-09                 |
| DAK Measurement Software          | SPEAG               | DAKS      | EF00965    | -                       | -                       |
| Thermometer                       | LKM electronic GmbH | DTM3000   | EF00967    | 2017-11                 | 2018-11                 |

## 2 Result Summary

| 447498 D01 General RF Exposure Guidance, RSS-102          |                        |                                                                            |                    |        |                                  |
|-----------------------------------------------------------|------------------------|----------------------------------------------------------------------------|--------------------|--------|----------------------------------|
| Product Specific Standard Section                         | Requirement – Test     | Reference Method                                                           | Maximum SAR [W/kg] | Result | Remarks                          |
| 447498 D01 General RF Exposure Guidance RSS-102 Section 3 | Single-band conformity | KDB Publication 447498<br>KDB Publication 248227<br>KDB Publication 865664 | <b>0.060</b>       | PASS   |                                  |
| 447498 D01 General RF Exposure Guidance RSS-102 Section 3 | Multi-band conformity  | KDB Publication 447498<br>KDB Publication 648474<br>KDB Publication 865664 | N/A                | N/R    | No concurrent transmission modes |
| Remarks:                                                  |                        |                                                                            |                    |        |                                  |

### 3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho_t$ ), expressed in watts per kilogram (W/kg)

$$\text{SAR} = d/dt (dW/dm) = d/dt (dW/\rho_t dV) = \sigma/\rho_t |E_t|^2$$

where

$$dW/dt = \int_V E \cdot J \, dV = \int_V \sigma E^2 \, dV$$

#### 3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

#### 3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

#### 3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

## 4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

### 4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

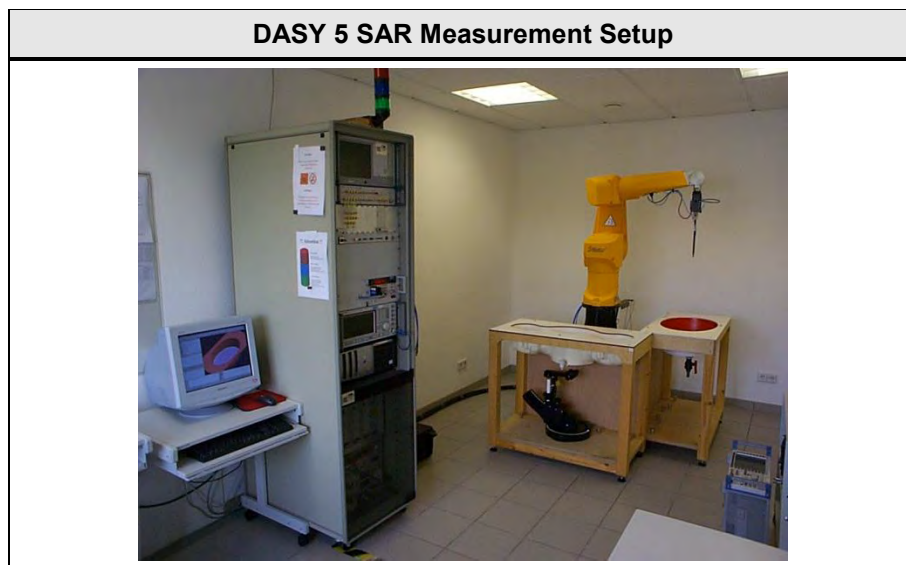

The following Diagram show the elements involved in the measurement setup.

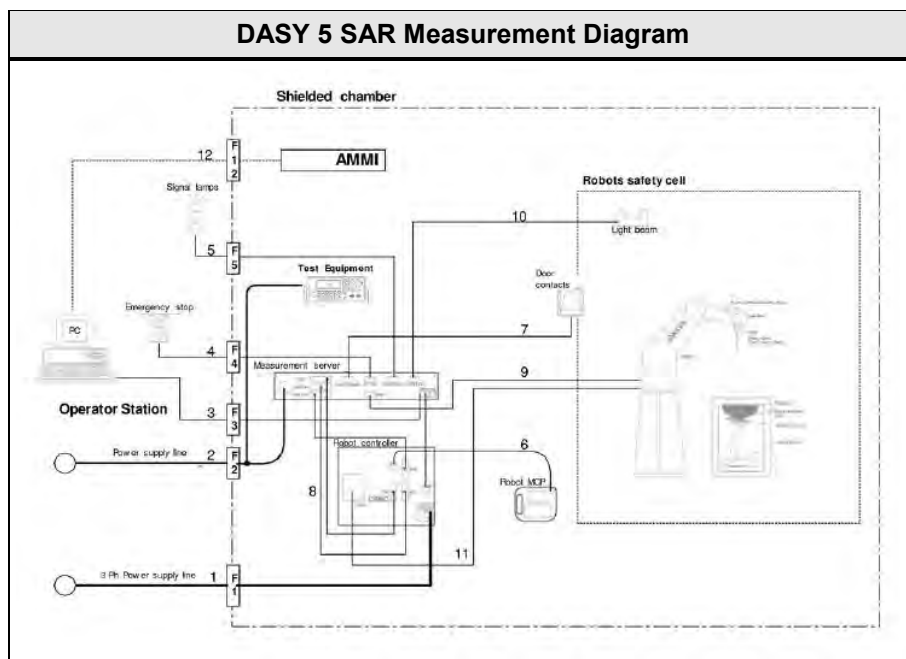



The DASY5 system for performing compliance tests consists of the following items:


| DASY5 SAR Measurement System |                                                                                                                                                                                                                                                                                                                       |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device                       | Description:                                                                                                                                                                                                                                                                                                          |
| RX90BL                       | A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.                                                                                                                                                                                                               |
| Probe Alignment Unit         | A probe alignment unit which improves the (absolute) accuracy of the probe positioning.                                                                                                                                                                                                                               |
| Teach Pendant                | The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures                                                                                                                                         |
| Signal Lamps                 | External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).                                                                                                                                              |
| DAE                          | The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC. |
| E-Field Probes               | Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.                                                                                                                                                                                                                              |
| EOC                          | The electro-optical converter (EOC) performs the conversion between optical and electrical signals                                                                                                                                                                                                                    |
| Measurement Server           | The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.                                                                                                                                                 |
| Control Computer             | A computer operating Windows 2000 or Windows NT with DASY 4 Software.                                                                                                                                                                                                                                                 |
| Control Software             | DASY4 and SEMCAD post processing Software                                                                                                                                                                                                                                                                             |
| SAM Twin Phantom             | The SAM twin phantom enabling testing left-hand and right-hand usage.                                                                                                                                                                                                                                                 |
| Flat Phantom                 | Flat Phantom (only for body-mounted transceivers operating below 800 MHz).                                                                                                                                                                                                                                            |
| Tissue simulating liquid     | Tissue simulating liquid mixed according to the given recipes.                                                                                                                                                                                                                                                        |
| Device Holder                | The device holder for handheld mobile phones.                                                                                                                                                                                                                                                                         |
| System Validation Dipoles    | System validation dipoles allowing to validate the proper functioning of the system.                                                                                                                                                                                                                                  |

## 4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

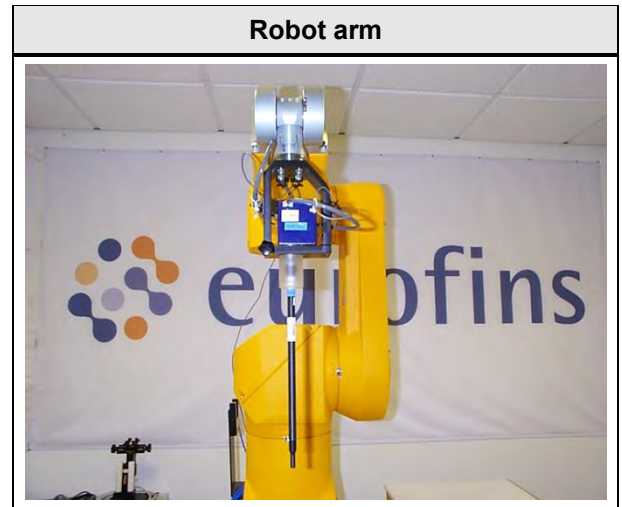

## 4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

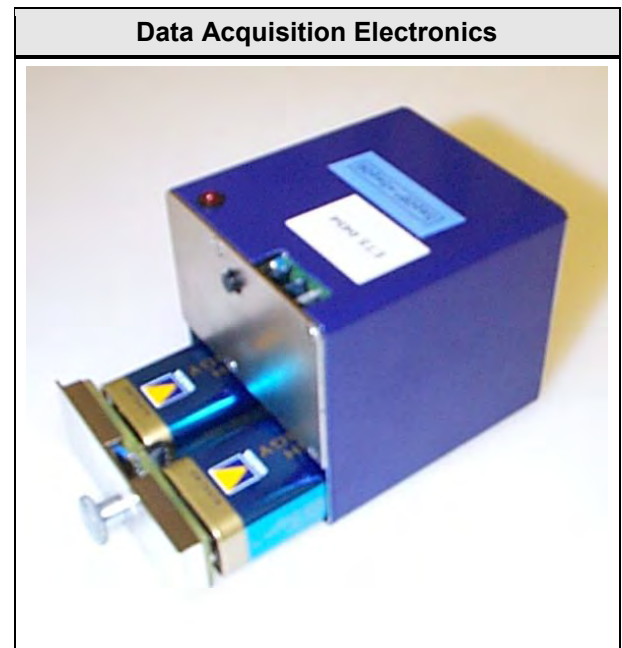

#### 4.4 Isotropic E-Field Probe $\leq 6$ GHz

##### Probe Specifications

###### **Construction:**

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

###### **Calibration:**

In air from 10 MHz to 6 GHz,  
In brain and muscle simulating tissue at  
Frequencies of 5200, 5500, 5800

###### **Frequency:**

10MHz to 6GHz,  
Linearity  $\pm 0.2$ dB (30MHz to 6GHz)

###### **Directivity:**

$\pm 0.3$ dB in HSL (rotation around probe axis)  
 $\pm 0.5$ dB in tissue material (rotation normal to probe axis)

###### **Dynamic Range:**

10 $\mu$ W/g to > 100mW/g

###### **Linearity:**

$\pm 0.2$ dB

###### **Dimensions:**

Overall Length: 337mm (Tip: 20mm),  
Tip Diameter: 2.5mm (Body: 12mm),  
Distance from probe tip to dipole centers: 1mm

###### **Application:**


General dosimetry up to 6 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms



#### 4.5 Test phantom and positioner

The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.


The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.
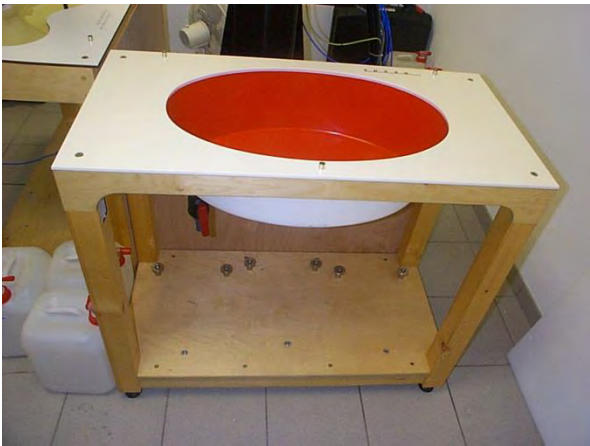
| Probe Positioner                                                                    | SAM Twin Phantom                                                                     |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|   |   |
| ELI4 phantom                                                                        | Flat phantom                                                                         |
|  |  |



#### 4.6 System Validation Dipoles

A set of calibration dipoles (D900V2, D1900V2, D2450V2, D5GHzV2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

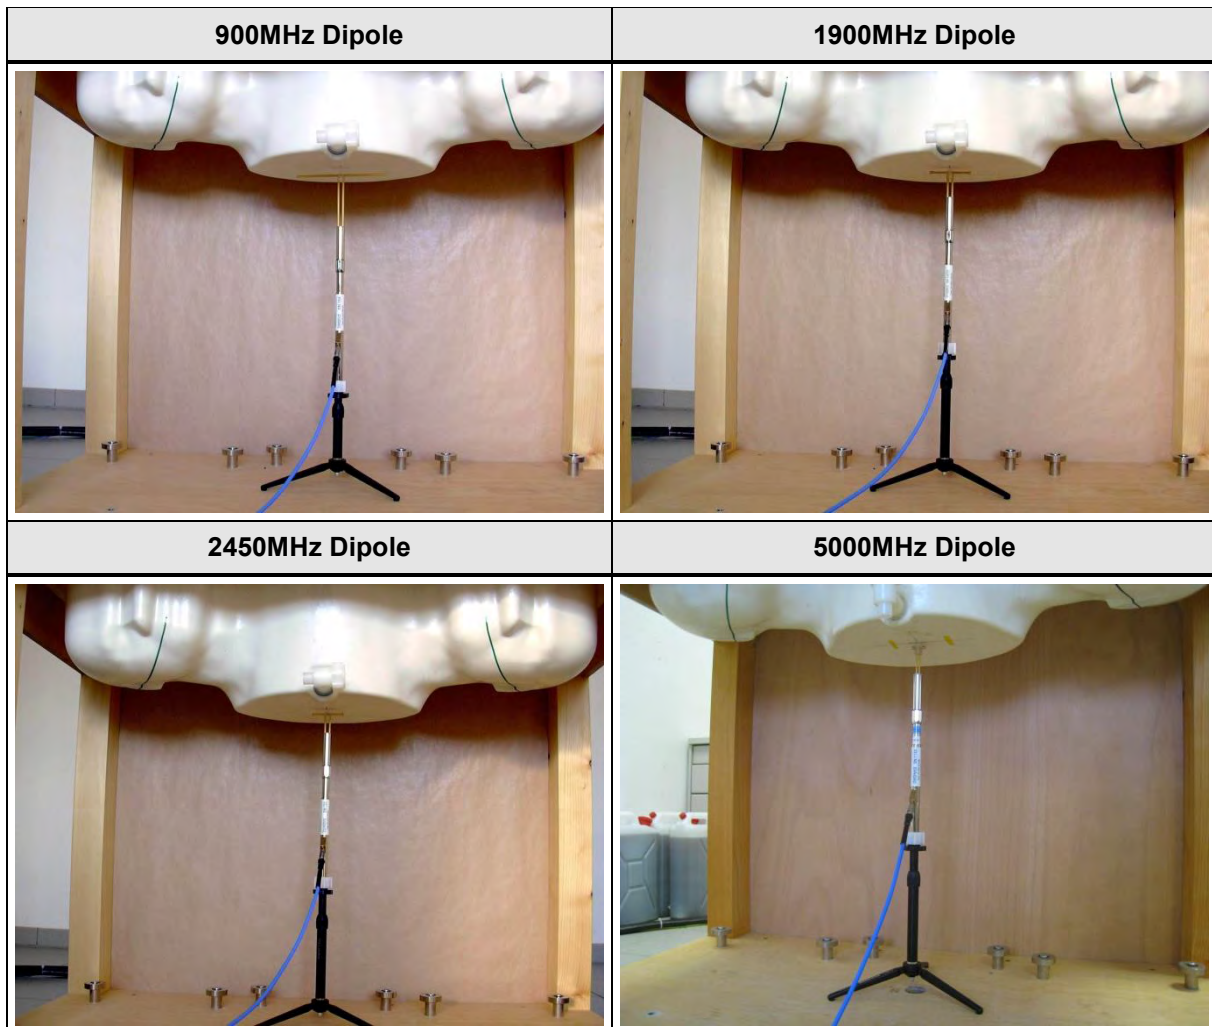

## 5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

### 5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, then the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

### 5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)

The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.



At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.



### 5.3 Reference lines and points for Handsets


For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.

According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

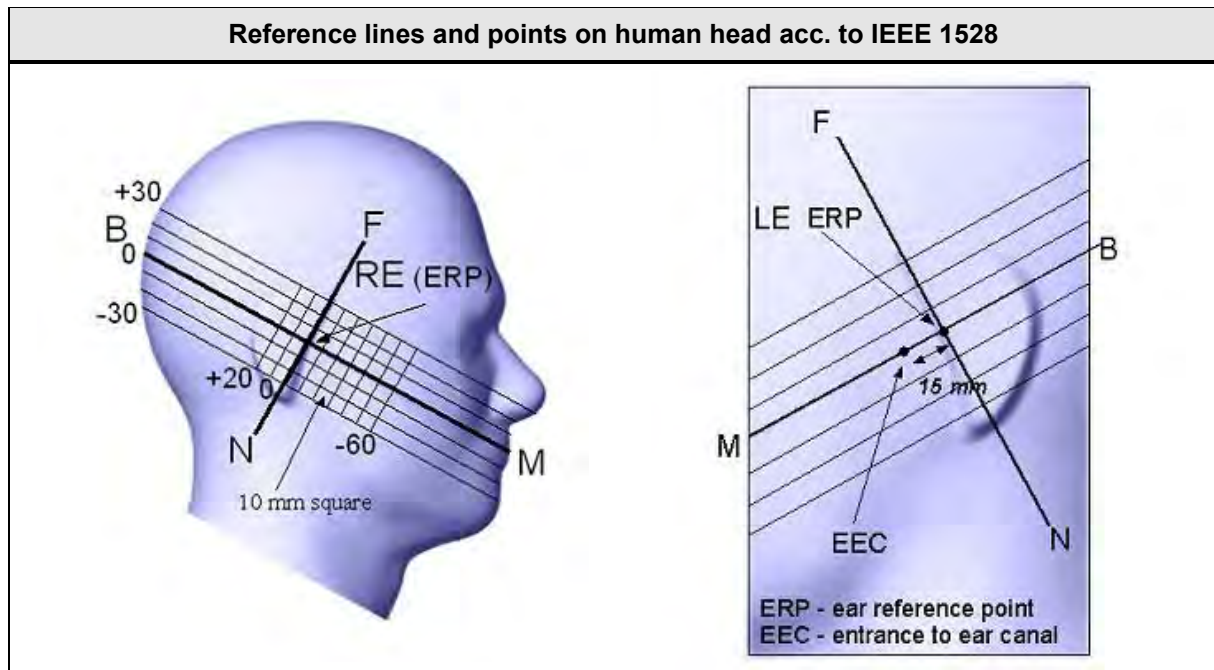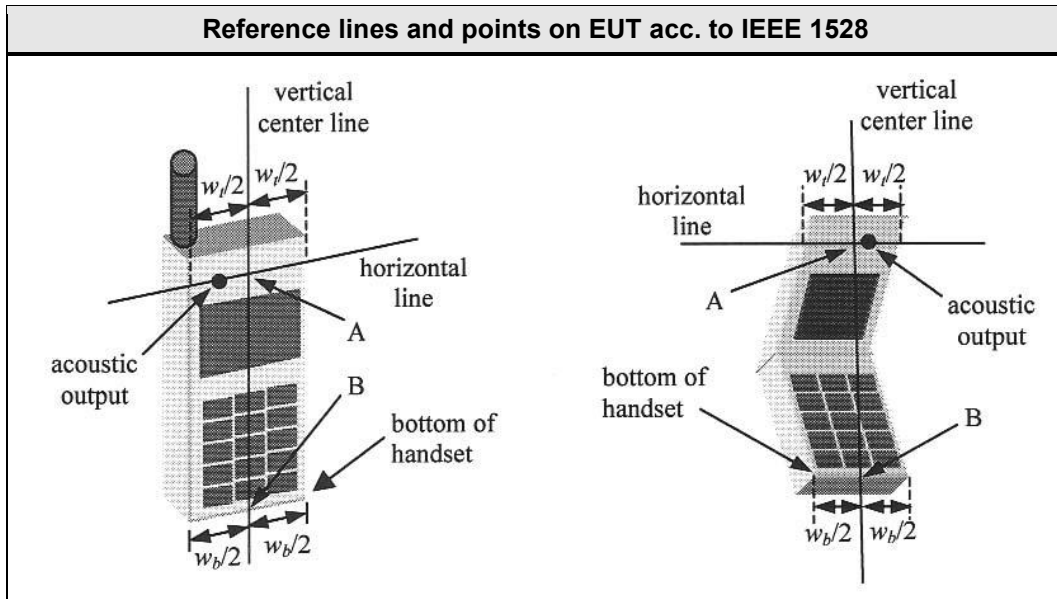

## 5.4 Test positions relative to the Head


### Cheek position

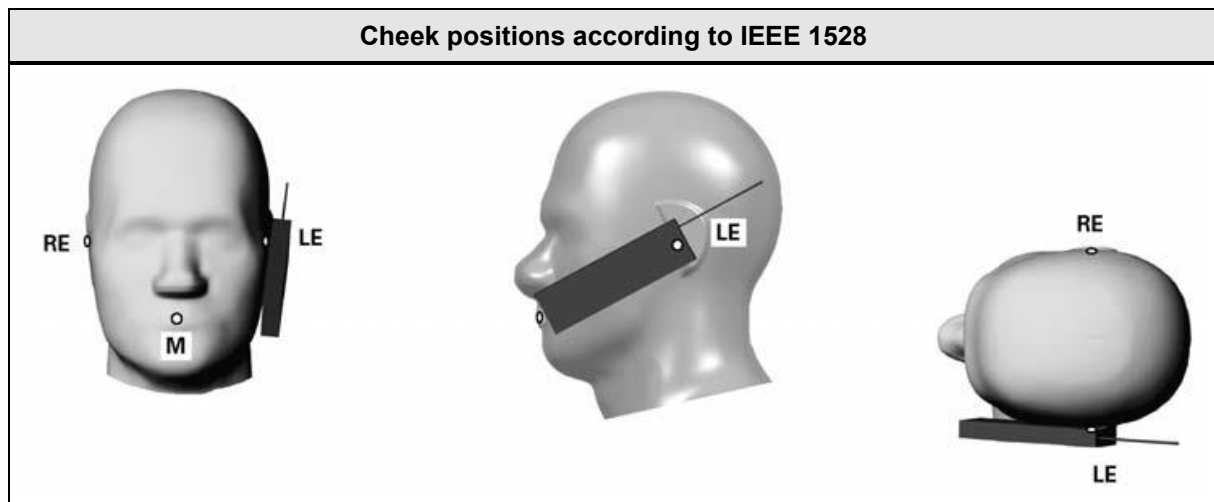

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


### Tilt position

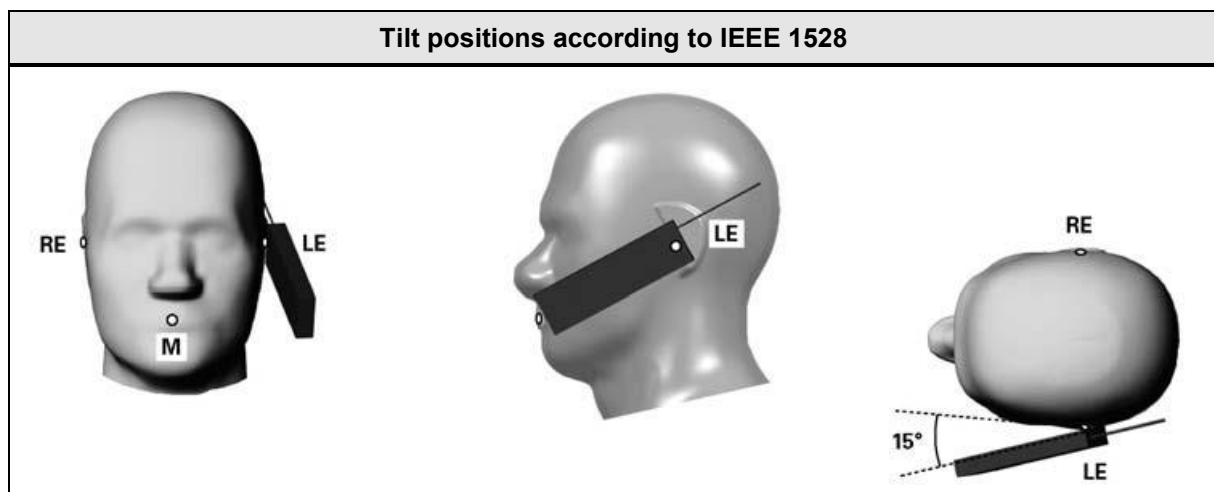

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by  $15^\circ$ . Then the handset is rotated around the horizontal line by  $15^\circ$ .

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head

## 5.5 Test positions relative to the human body

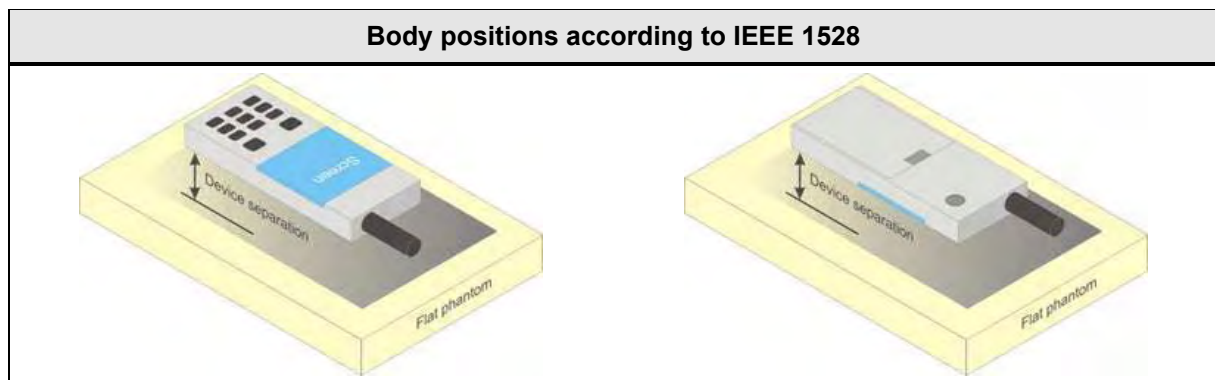

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

## 5.6 Measurement Uncertainty

| Measurement Uncertainty according to IEEE 1528 |                   |                          |            |                     |                      |               |               |
|------------------------------------------------|-------------------|--------------------------|------------|---------------------|----------------------|---------------|---------------|
| Error Description                              | Uncertainty Value | Probability Distribution | Div.       | c <sub>i</sub> (1g) | c <sub>i</sub> (10g) | Std. Unc. 1g  | Std. Unc. 10g |
| <b>Measurement System</b>                      |                   |                          |            |                     |                      |               |               |
| Probe Calibration                              | ±6.55%            | N                        | 1          | 1                   | 1                    | ±6.55%        | ±6.55%        |
| Axial Isotropy                                 | ±4.7%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±1.9%         | ±1.9%         |
| Hemispherical Isotropy                         | ±9.6%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±3.9%         | ±3.9%         |
| Linearity                                      | ±4.7%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.7%         | ±2.7%         |
| Modulation Response                            | ±2.4%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.4%         | ±1.4%         |
| System Detection Limits                        | ±1.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.6%         | ±0.6%         |
| Boundary effects                               | ±2.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.2%         | ±1.2%         |
| Readout Electronics                            | ±0.3%             | N                        | 1          | 1                   | 1                    | ±0.3%         | ±0.3%         |
| Response Time                                  | ±0.8%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.5%         | ±0.5%         |
| Integration Time                               | ±2.6%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.5%         | ±1.5%         |
| RF Ambient Noise                               | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| RF Ambient Reflections                         | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| Probe Positioner                               | ±0.8%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.5%         | ±0.5%         |
| Probe Positioning                              | ±6.7%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±3.9%         | ±3.9%         |
| Post processing                                | ±4.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.3%         | ±2.3%         |
| <b>Test Sample Related</b>                     |                   |                          |            |                     |                      |               |               |
| Device Holder                                  | ±3.6%             | N                        | 1          | 1                   | 1                    | ±3.6%         | ±3.6%         |
| Test Sample Positioning                        | ±2.9%             | N                        | 1          | 1                   | 1                    | ±2.9%         | ±2.9%         |
| Power Scaling                                  | ±0%               | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0%           | ±0%           |
| Power Drift                                    | ±5.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.9%         | ±2.9%         |
| <b>Phantom and Setup Related</b>               |                   |                          |            |                     |                      |               |               |
| Phantom Uncertainty                            | ±7.9%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±4.6%         | ±4.6%         |
| SAR correction                                 | ±1.9%             | R                        | $\sqrt{3}$ | 1                   | 0.84                 | ±1.1%         | ±0.9%         |
| Liquid conductivity (measured)                 | ±2.5%             | N                        | 1          | 0.78                | 0.71                 | ±2.0%         | ±1.8%         |
| Liquid permittivity (measured)                 | ±2.5%             | N                        | 1          | 0.26                | 0.26                 | ±0.1%         | ±0.1%         |
| Temperature uncertainty - Conductivity         | ±5.2%             | R                        | $\sqrt{3}$ | 0.78                | 0.71                 | ±2.3%         | ±2.1%         |
| Temperature uncertainty - Permittivity         | ±0.8%             | R                        | $\sqrt{3}$ | 0.23                | 0.26                 | ±0.1%         | ±0.1%         |
| Combined Standard Uncertainty                  |                   |                          |            |                     |                      | ±12.8%        | ±12.7%        |
| <b>Expanded Standard Uncertainty</b>           |                   |                          |            |                     |                      | <b>±25.6%</b> | <b>±25.4%</b> |

| Measurement Uncertainty according to EN 62209-1 |                   |                          |            |                     |                      |               |               |
|-------------------------------------------------|-------------------|--------------------------|------------|---------------------|----------------------|---------------|---------------|
| Error Description                               | Uncertainty Value | Probability Distribution | Div.       | c <sub>i</sub> (1g) | c <sub>i</sub> (10g) | Std. Unc. 1g  | Std. Unc. 10g |
| <b>Measurement System</b>                       |                   |                          |            |                     |                      |               |               |
| Probe Calibration                               | ±6.0%             | N                        | 1          | 1                   | 1                    | ±6.0%         | ±6.0%         |
| Axial Isotropy                                  | ±4.7%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±1.9%         | ±1.9%         |
| Hemispherical Isotropy                          | ±9.6%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±3.9%         | ±3.9%         |
| Boundary effects                                | ±1.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.6%         | ±0.6%         |
| Linearity                                       | ±4.7%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.7%         | ±2.7%         |
| System Detection Limits                         | ±1.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.6%         | ±0.6%         |
| Readout Electronics                             | ±0.3%             | N                        | 1          | 1                   | 1                    | ±0.3%         | ±0.3%         |
| Response Time                                   | ±0.8%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.5%         | ±0.5%         |
| Integration Time                                | ±2.6%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.5%         | ±1.5%         |
| RF Ambient Noise                                | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| RF Ambient Reflections                          | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| Probe Positioner                                | ±0.4%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.2%         | ±0.2%         |
| Probe Positioning                               | ±2.9%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| Max. SAR Evaluation                             | ±2.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.2%         | ±1.2%         |
| <b>Test Sample Related</b>                      |                   |                          |            |                     |                      |               |               |
| Device Positioning                              | ±2.9%             | N                        | 1          | 1                   | 1                    | ±2.9%         | ±2.9%         |
| Device Holder                                   | ±3.6%             | N                        | 1          | 1                   | 1                    | ±3.6%         | ±3.6%         |
| Power Drift                                     | ±5.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.9%         | ±2.9%         |
| Power Scaling                                   | ±0%               | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.0%         | ±0.0%         |
| <b>Phantom and Setup Related</b>                |                   |                          |            |                     |                      |               |               |
| Phantom Uncertainty                             | ±6.1%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±3.5%         | ±3.5%         |
| SAR correction                                  | ±1.9%             | R                        | $\sqrt{3}$ | 1                   | 0.84                 | ±1.1%         | ±0.9%         |
| Liquid conductivity (measured)                  | ±2.5%             | N                        | 1          | 0.78                | 0.71                 | ±2.0%         | ±1.8%         |
| Liquid permittivity (measured)                  | ±2.5%             | N                        | 1          | 0.26                | 0.26                 | ±0.6%         | ±0.7%         |
| Temperature uncertainty - Conductivity          | ±5.2%             | R                        | $\sqrt{3}$ | 0.78                | 0.71                 | ±2.3%         | ±2.1%         |
| Temperature uncertainty - Permittivity          | ±0.8%             | R                        | $\sqrt{3}$ | 0.23                | 0.26                 | ±0.1%         | ±0.1%         |
| Combined Standard Uncertainty                   |                   |                          |            |                     |                      | ±11.4%        | ±11.3%        |
| <b>Expanded Standard Uncertainty</b>            |                   |                          |            |                     |                      | <b>±22.9%</b> | <b>±22.7%</b> |

| Measurement Uncertainty according to EN 62209-2 |                   |                          |            |                     |                      |               |               |
|-------------------------------------------------|-------------------|--------------------------|------------|---------------------|----------------------|---------------|---------------|
| Error Description                               | Uncertainty Value | Probability Distribution | Div.       | c <sub>i</sub> (1g) | c <sub>i</sub> (10g) | Std. Unc. 1g  | Std. Unc. 10g |
| <b>Measurement System</b>                       |                   |                          |            |                     |                      |               |               |
| Probe Calibration                               | ±6.55%            | N                        | 1          | 1                   | 1                    | ±6.55%        | ±6.55%        |
| Axial Isotropy                                  | ±4.7%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±1.9%         | ±1.9%         |
| Hemispherical Isotropy                          | ±9.6%             | R                        | $\sqrt{3}$ | 0.7                 | 0.7                  | ±3.9%         | ±3.9%         |
| Linearity                                       | ±4.7%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.7%         | ±2.7%         |
| Modulation Response                             | ±2.4%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.4%         | ±1.4%         |
| System Detection Limits                         | ±1.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.6%         | ±0.6%         |
| Boundary effects                                | ±2.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.2%         | ±1.2%         |
| Readout Electronics                             | ±0.3%             | N                        | 1          | 1                   | 1                    | ±0.3%         | ±0.3%         |
| Response Time                                   | ±0.8%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.5%         | ±0.5%         |
| Integration Time                                | ±2.6%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.5%         | ±1.5%         |
| RF Ambient Noise                                | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| RF Ambient Reflections                          | ±3.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±1.7%         | ±1.7%         |
| Probe Positioner                                | ±0.8%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0.5%         | ±0.5%         |
| Probe Positioning                               | ±6.7%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±3.9%         | ±3.9%         |
| Post processing                                 | ±4.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.3%         | ±2.3%         |
| <b>Test Sample Related</b>                      |                   |                          |            |                     |                      |               |               |
| Device Holder                                   | ±3.6%             | N                        | 1          | 1                   | 1                    | ±3.6%         | ±3.6%         |
| Test Sample Positioning                         | ±2.9%             | N                        | 1          | 1                   | 1                    | ±2.9%         | ±2.9%         |
| Power Scaling                                   | ±0%               | R                        | $\sqrt{3}$ | 1                   | 1                    | ±0%           | ±0%           |
| Power Drift                                     | ±5.0%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±2.9%         | ±2.9%         |
| <b>Phantom and Setup Related</b>                |                   |                          |            |                     |                      |               |               |
| Phantom Uncertainty                             | ±7.9%             | R                        | $\sqrt{3}$ | 1                   | 1                    | ±4.6%         | ±4.6%         |
| SAR correction                                  | ±1.9%             | R                        | $\sqrt{3}$ | 1                   | 0.84                 | ±1.1%         | ±0.9%         |
| Liquid conductivity (measured)                  | ±2.5%             | N                        | 1          | 0.78                | 0.71                 | ±2.0%         | ±1.8%         |
| Liquid permittivity (measured)                  | ±2.5%             | N                        | 1          | 0.26                | 0.26                 | ±0.1%         | ±0.1%         |
| Temperature uncertainty - Conductivity          | ±5.2%             | R                        | $\sqrt{3}$ | 0.78                | 0.71                 | ±2.3%         | ±2.1%         |
| Temperature uncertainty - Permittivity          | ±0.8%             | R                        | $\sqrt{3}$ | 0.23                | 0.26                 | ±0.1%         | ±0.1%         |
| Combined Standard Uncertainty                   |                   |                          |            |                     |                      | ±12.8%        | ±12.7%        |
| <b>Expanded Standard Uncertainty</b>            |                   |                          |            |                     |                      | <b>±25.6%</b> | <b>±25.4%</b> |



## 6 Test Conditions and Results

### 6.1 Recipes for Tissue Simulating Liquids

| Body Tissue Simulating Liquids |                         |                         |                          |                          |                          |
|--------------------------------|-------------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| Ingredient                     | M 450-B<br>weight (%)   | M 900-B<br>weight (%)   | M 1800-B<br>weight (%)   | M 1950-A<br>weight (%)   | M 2450-B<br>weight (%)   |
| Water                          | 46.21                   | 50.75                   | 70.17                    | 69.79                    | 68.64                    |
| Sugar                          | 51.17                   | 48.21                   |                          |                          |                          |
| Cellulose                      | 0.18                    |                         |                          |                          |                          |
| Salt                           | 2.34                    |                         | 0.39                     | 0.2                      |                          |
| Preventol                      | 0.08                    | 0.1                     |                          |                          |                          |
| DGBE                           |                         |                         | 29.44                    | 30                       | 31.37                    |
| Head Tissue Simulating Liquids |                         |                         |                          |                          |                          |
| Ingredient                     | HSL 450-A<br>weight (%) | HSL 900-B<br>weight (%) | HSL 1800-F<br>weight (%) | HSL 1950-B<br>weight (%) | HSL 2450-B<br>weight (%) |
| Water                          | 38.91                   | 40.29                   | 55.24                    | 55.41                    | 55                       |
| Sugar                          | 56.93                   | 57.9                    |                          |                          |                          |
| Cellulose                      | 0.25                    | 0.24                    |                          |                          |                          |
| Salt                           | 3.79                    | 1.38                    | 0.31                     | 0.08                     |                          |
| Preventol                      | 0.12                    | 0.18                    |                          |                          |                          |
| DGBE                           |                         |                         | 44.45                    | 44.51                    | 45                       |

Water: deionized water, resistivity  $\geq 16 \text{ M}\Omega$

Sugar: refined white sugar

Salt: pure NaCl

Cellulose: Hydroxyethyl-cellulose

Preservative: Preventol D-7

DGBE: Diethylenglycol-monobuthyl ether


The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., IEEE 1528-2003, IEC 62209-1)

The HBBL3-6GHz and MBBL 3-6 GHz liquids are direct from Speag.

## 6.2 Test Conditions and Results – Tissue Validation

| Tissue Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102 |                                           |                                             |                                           |                             | Verdict: PASS           |
|------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------|-------------------------------------------|-----------------------------|-------------------------|
| Test according to measurement reference                                            |                                           | Reference Method                            |                                           |                             |                         |
|                                                                                    |                                           | 865664 D01 SAR Measurement 100 MHz to 6 GHz |                                           |                             |                         |
| Target Values                                                                      |                                           |                                             |                                           |                             |                         |
| Frequency [MHz]                                                                    | Head                                      |                                             | Body                                      |                             | Permitted tolerance [%] |
|                                                                                    | Relative dielectric constant $\epsilon_r$ | Conductivity $\sigma$ [S/m]                 | Relative dielectric constant $\epsilon_r$ | Conductivity $\sigma$ [S/m] |                         |
| 150                                                                                | 52.3                                      | 0.76                                        | 61.9                                      | 0.80                        | $\leq \pm 5$            |
| 300                                                                                | 45.3                                      | 0.87                                        | 58.2                                      | 0.92                        | $\leq \pm 5$            |
| 450                                                                                | 43.5                                      | 0.87                                        | 56.7                                      | 0.94                        | $\leq \pm 5$            |
| 835                                                                                | 41.5                                      | 0.90                                        | 55.2                                      | 0.97                        | $\leq \pm 5$            |
| 900                                                                                | 41.5                                      | 0.97                                        | 55.0                                      | 1.05                        | $\leq \pm 5$            |
| 915                                                                                | 41.5                                      | 0.98                                        | 55.0                                      | 1.06                        | $\leq \pm 5$            |
| 1450                                                                               | 40.5                                      | 1.20                                        | 54.0                                      | 1.30                        | $\leq \pm 5$            |
| 1610                                                                               | 40.3                                      | 1.29                                        | 53.8                                      | 1.40                        | $\leq \pm 5$            |
| 1800 – 2000                                                                        | 40.0                                      | 1.40                                        | 53.3                                      | 1.52                        | $\leq \pm 5$            |
| 2450                                                                               | 39.2                                      | 1.80                                        | 52.7                                      | 1.95                        | $\leq \pm 5$            |
| 3000                                                                               | 38.5                                      | 2.40                                        | 52.0                                      | 2.73                        | $\leq \pm 5$            |
| 5200                                                                               | 36.0                                      | 4.66                                        | 49.0                                      | 5.30                        | $\leq \pm 5$            |
| 5500                                                                               | 35.6                                      | 4.96                                        | 48.6                                      | 5.65                        | $\leq \pm 5$            |
| 5800                                                                               | 35.3                                      | 5.27                                        | 48.2                                      | 6.00                        | $\leq \pm 5$            |
|                                                                                    |                                           |                                             |                                           |                             |                         |

### Test setup

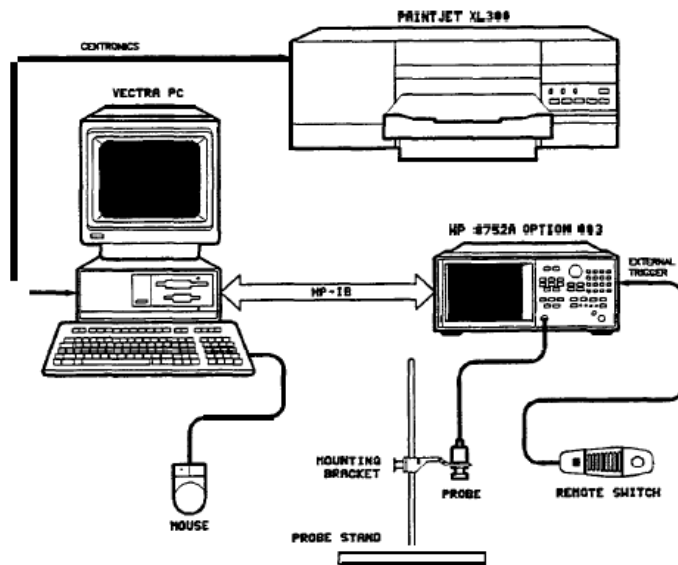

### Test procedure


1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined

### Test results

| Frequency [MHz] | Tissue | Measured $\epsilon_r$ | Target $\epsilon_r$ | Delta $\epsilon_r$ [%] | Measured $\sigma$ [S/m] | Target $\sigma$ [S/m] | Delta $\sigma$ [%] |
|-----------------|--------|-----------------------|---------------------|------------------------|-------------------------|-----------------------|--------------------|
| 2450            | Body   | 50.36                 | 52.7                | -4.44                  | 1.978                   | 1.95                  | 1.44               |
| 2402            | Body   | 50.61                 | 52.7                | -3.97                  | 1.908                   | 1.93                  | -1.14              |
| 2440            | Body   | 50.40                 | 52.7                | -4.36                  | 1.964                   | 1.94                  | 1.24               |
| 2441            | Body   | 50.40                 | 52.7                | -4.36                  | 1.966                   | 1.94                  | 1.34               |
| 2480            | Body   | 50.27                 | 52.3                | -3.88                  | 2.020                   | 1.97                  | 2.54               |

Comments: \* Measured radio frequencies

### 6.3 Test Conditions and Results – System Validation
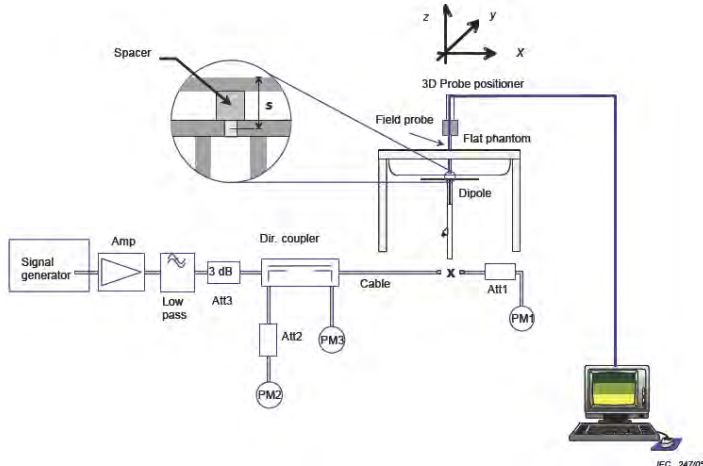
| System Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102                                                                                                                                                                                                  |                                                         |                                |                              | Verdict: PASS |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------------|------------------------------|---------------|
| Test according to measurement reference                                                                                                                                                                                                                                             | Reference Method                                        |                                |                              |               |
|                                                                                                                                                                                                                                                                                     | 865664 D01 SAR Measurement 100 MHz to 6 GHz / IEEE 1528 |                                |                              |               |
| Test frequency range                                                                                                                                                                                                                                                                | Tested frequencies                                      |                                |                              |               |
|                                                                                                                                                                                                                                                                                     | 2450 MHz                                                |                                |                              |               |
| Test mode                                                                                                                                                                                                                                                                           | unmodulated CW                                          |                                |                              |               |
| Target Values                                                                                                                                                                                                                                                                       |                                                         |                                |                              |               |
| Frequency [MHz]                                                                                                                                                                                                                                                                     | Target SAR value [W/kg (1g)]                            |                                | Permitted tolerance [%]      |               |
| 2450                                                                                                                                                                                                                                                                                | 12.5 @ 250mW                                            |                                | ≤ ±10                        |               |
| The target reference values are taken from the calibration sheets (see annex)                                                                                                                                                                                                       |                                                         |                                |                              |               |
| Test setup                                                                                                                                                                                                                                                                          |                                                         |                                |                              |               |
|                                                                                                                                                                                                  |                                                         |                                |                              |               |
| Test procedure                                                                                                                                                                                                                                                                      |                                                         |                                |                              |               |
| <div>1. The dipole antenna input power is set to 250mW</div> <div>2. The reference dipole is positioned under the phantom</div> <div>3. With the dipole antenna powered the SAR value is measured</div> <div>4. The measured SAR values are compared to the target SAR values</div> |                                                         |                                |                              |               |
| Test results                                                                                                                                                                                                                                                                        |                                                         |                                |                              |               |
| Frequency [MHz]                                                                                                                                                                                                                                                                     | Input power [mW]                                        | Measured SAR value [W/kg (1g)] | Target SAR value [W/kg (1g)] | Delta [%]     |
| 2450                                                                                                                                                                                                                                                                                | 250                                                     | 13.1                           | 12.5                         | 4.8           |
| Comments:                                                                                                                                                                                                                                                                           |                                                         |                                |                              |               |

#### 6.4 Test Conditions and Results – Standalone SAR Measurement

| Standalone SAR acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102     |           |         |                                                                    |            |                                  |                          |                             | Verdict: PASS         |  |
|-------------------------------------------------------------------------------------|-----------|---------|--------------------------------------------------------------------|------------|----------------------------------|--------------------------|-----------------------------|-----------------------|--|
| Test according to measurement reference                                             |           |         | Reference Method                                                   |            |                                  |                          |                             |                       |  |
|                                                                                     |           |         | 865664 D01 SAR Measurement 100 MHz to 6 GHz / ISED RSS-102 Issue 5 |            |                                  |                          |                             |                       |  |
| Room temperature                                                                    |           |         | 22.0 – 22.6 °C                                                     |            |                                  |                          |                             |                       |  |
| Liquid depth                                                                        |           |         | 15.5 cm                                                            |            |                                  |                          |                             |                       |  |
| Environment                                                                         |           |         | general public                                                     |            |                                  |                          |                             |                       |  |
| Limits                                                                              |           |         |                                                                    |            |                                  |                          |                             |                       |  |
| Region                                                                              |           |         | Occupational SAR values [W/kg]                                     |            | General public SAR values [W/kg] |                          |                             |                       |  |
| Whole body average SAR                                                              |           |         | 0.4                                                                |            | 0.08                             |                          |                             |                       |  |
| Localized SAR (Head and trunk)<br>SAR averaging mass = 1g                           |           |         | 8                                                                  |            | 1.6                              |                          |                             |                       |  |
| Localized SAR (Limbs)<br>SAR averaging mass = 10g                                   |           |         | 20                                                                 |            | 4                                |                          |                             |                       |  |
| Test results                                                                        |           |         |                                                                    |            |                                  |                          |                             |                       |  |
| Mode                                                                                | Position  | Channel | Frequency [MHz]                                                    | Drift [dB] | Scaling Factor*                  | Measured SAR [W/kg (1g)] | Reported SAR [W/kg (1g)] ** | SAR Limit [W/kg (1g)] |  |
| BT-EDR                                                                              | FRONT 0mm | 39      | 2441                                                               | -0.03      | 1.096                            | 0.013                    | 0.014                       | 1.6                   |  |
| BT-EDR                                                                              | BACK 0mm  | 39      | 2441                                                               | -0.18      | 1.096                            | 0.005                    | 0.006                       | 1.6                   |  |
| BT-EDR                                                                              | LEFT 0mm  | 39      | 2441                                                               | -0.09      | 1.096                            | 0.055                    | 0.060                       | 1.6                   |  |
| BT-LE                                                                               | LEFT 0mm  | 19      | 2440                                                               | -0.13      | 2.111                            | 0.018                    | 0.038                       | 1.6                   |  |
| BT-EDR                                                                              | TOP 1mm   | 39      | 2441                                                               | -0.11      | 1.096                            | 0.042                    | 0.046                       | 1.6                   |  |
| Overall maximum SAR value [W/kg (1g)]                                               |           |         |                                                                    |            |                                  |                          | 0.060                       | 1.6                   |  |
| Comments:*tune up limit power (mW) / measured conducted power (mW) = scaling factor |           |         |                                                                    |            |                                  |                          |                             |                       |  |
| ** attached measurement plot: highest SAR value for the communication system        |           |         |                                                                    |            |                                  |                          |                             |                       |  |

## **6.5 Test Conditions and Results – Multi-transmitter SAR Result**

No concurrent transmission modes



**ANNEX A Calibration Documents**



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **DAE3-522\_Sep17**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 522**

Calibration procedure(s) **QA CAL-06.v29**  
**Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **September 18, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 31-Aug-17 (No:21092)       | Aug-18                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Auto DAE Calibration Unit     | SE UWS 053 AA 1001 | 05-Jan-17 (in house check) | In house check: Jan-18 |
| Calibrator Box V2.1           | SE UMS 006 AA 1002 | 05-Jan-17 (in house check) | In house check: Jan-18 |

Calibrated by: **Dominique Steffen** **Laboratory Technician**

Approved by: **Sven Kühn** **Deputy Manager**

Signature

Issued: September 18, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                         | Y                         | Z                         |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range          | 404.509 $\pm$ 0.02% (k=2) | 404.695 $\pm$ 0.02% (k=2) | 404.120 $\pm$ 0.02% (k=2) |
| Low Range           | 3.92852 $\pm$ 1.50% (k=2) | 3.91800 $\pm$ 1.50% (k=2) | 3.91819 $\pm$ 1.50% (k=2) |

## Connector Angle

|                                           |                                    |
|-------------------------------------------|------------------------------------|
| Connector Angle to be used in DASY system | 57.5 $^{\circ}$ $\pm$ 1 $^{\circ}$ |
|-------------------------------------------|------------------------------------|



## Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

| High Range        | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 199994.82                 | -0.56                        | -0.00     |
| Channel X + Input | 20003.33                  | 1.87                         | 0.01      |
| Channel X - Input | -20000.12                 | 1.10                         | -0.01     |
| Channel Y + Input | 199991.86                 | -3.71                        | -0.00     |
| Channel Y + Input | 20004.92                  | 3.31                         | 0.02      |
| Channel Y - Input | -19993.60                 | 7.50                         | -0.04     |
| Channel Z + Input | 199990.86                 | -4.57                        | -0.00     |
| Channel Z + Input | 20000.33                  | -1.19                        | -0.01     |
| Channel Z - Input | -20002.88                 | -1.70                        | 0.01      |

| Low Range         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2001.30                   | 0.28                         | 0.01      |
| Channel X + Input | 201.10                    | -0.28                        | -0.14     |
| Channel X - Input | -198.17                   | 0.25                         | -0.13     |
| Channel Y + Input | 2000.80                   | -0.32                        | -0.02     |
| Channel Y + Input | 200.72                    | -0.83                        | -0.41     |
| Channel Y - Input | -198.48                   | -0.12                        | 0.06      |
| Channel Z + Input | 2001.19                   | 0.18                         | 0.01      |
| Channel Z + Input | 200.52                    | -0.87                        | -0.43     |
| Channel Z - Input | -199.09                   | -0.55                        | 0.28      |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200                            | 3.13                                         | 1.90                                        |
|           | - 200                          | -0.92                                        | -2.67                                       |
| Channel Y | 200                            | 3.67                                         | 3.47                                        |
|           | - 200                          | -4.61                                        | -4.74                                       |
| Channel Z | 200                            | -6.36                                        | -6.38                                       |
|           | - 200                          | 4.03                                         | 4.15                                        |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | -0.13                       | -3.67                       |
| Channel Y | 200                | 7.29                        | -                           | -0.19                       |
| Channel Z | 200                | 7.08                        | 5.65                        | -                           |

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 16113            | 16236           |
| Channel Y | 16216            | 16793           |
| Channel Z | 16308            | 16730           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 1.18               | -0.73                  | 3.40                   | 0.58                      |
| Channel Y | 0.14               | -1.02                  | 1.30                   | 0.46                      |
| Channel Z | 0.24               | -0.72                  | 1.24                   | 0.45                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Eurofins**

Certificate No: **EX3-3893\_Sep17**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3893**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 25, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-16 (No. ES3-3013_Dec16)    | Dec-17                 |
| DAE4                       | SN: 660          | 7-Dec-16 (No. DAE4-660_Dec16)     | Dec-17                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

|                                                                                                                 |                               |                                          |                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:                                                                                                    | Name<br><b>Katja Pokovic</b>  | Function<br><b>Technical Manager</b>     | Signature<br> |
| Issued: September 25, 2017                                                                                      |                               |                                          |                                                                                                    |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                               |                                          |                                                                                                    |





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below **ConvF**).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of **ConvF**.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:3893

Manufactured: October 9, 2012  
Calibrated: September 25, 2017

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|-----------------------------------------------------------|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.54     | 0.41     | 0.32     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 101.5    | 103.5    | 100.2    |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 145.1    | ±2.5 %                    |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 132.0    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 136.0    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 300                  | 45.3                               | 0.87                            | 12.50   | 12.50   | 12.50   | 0.08               | 1.20                    | ± 13.3 %  |
| 450                  | 43.5                               | 0.87                            | 11.59   | 11.59   | 11.59   | 0.14               | 1.20                    | ± 13.3 %  |
| 750                  | 41.9                               | 0.89                            | 11.04   | 11.04   | 11.04   | 0.48               | 0.81                    | ± 12.0 %  |
| 900                  | 41.5                               | 0.97                            | 10.32   | 10.32   | 10.32   | 0.48               | 0.82                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 9.11    | 9.11    | 9.11    | 0.39               | 0.80                    | ± 12.0 %  |
| 1810                 | 40.0                               | 1.40                            | 8.79    | 8.79    | 8.79    | 0.41               | 0.81                    | ± 12.0 %  |
| 1950                 | 40.0                               | 1.40                            | 8.41    | 8.41    | 8.41    | 0.32               | 0.86                    | ± 12.0 %  |
| 2150                 | 39.7                               | 1.53                            | 8.35    | 8.35    | 8.35    | 0.39               | 0.84                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 7.73    | 7.73    | 7.73    | 0.35               | 0.87                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 7.55    | 7.55    | 7.55    | 0.44               | 0.84                    | ± 12.0 %  |
| 5200                 | 36.0                               | 4.66                            | 5.25    | 5.25    | 5.25    | 0.35               | 1.80                    | ± 13.1 %  |
| 5500                 | 35.6                               | 4.96                            | 5.14    | 5.14    | 5.14    | 0.40               | 1.80                    | ± 13.1 %  |
| 5800                 | 35.3                               | 5.27                            | 4.98    | 4.98    | 4.98    | 0.40               | 1.80                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 300                  | 58.2                               | 0.92                            | 11.86   | 11.86   | 11.86   | 0.05               | 1.20                    | ± 13.3 %  |
| 450                  | 56.7                               | 0.94                            | 11.71   | 11.71   | 11.71   | 0.10               | 1.20                    | ± 13.3 %  |
| 750                  | 55.5                               | 0.96                            | 10.63   | 10.63   | 10.63   | 0.52               | 0.81                    | ± 12.0 %  |
| 900                  | 55.0                               | 1.05                            | 10.31   | 10.31   | 10.31   | 0.48               | 0.80                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 8.76    | 8.76    | 8.76    | 0.38               | 0.80                    | ± 12.0 %  |
| 1810                 | 53.3                               | 1.52                            | 8.51    | 8.51    | 8.51    | 0.33               | 0.90                    | ± 12.0 %  |
| 1950                 | 53.3                               | 1.52                            | 8.57    | 8.57    | 8.57    | 0.31               | 0.98                    | ± 12.0 %  |
| 2150                 | 53.1                               | 1.66                            | 8.36    | 8.36    | 8.36    | 0.39               | 0.81                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 7.96    | 7.96    | 7.96    | 0.35               | 0.86                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 7.73    | 7.73    | 7.73    | 0.27               | 0.95                    | ± 12.0 %  |
| 5200                 | 49.0                               | 5.30                            | 4.88    | 4.88    | 4.88    | 0.40               | 1.90                    | ± 13.1 %  |
| 5500                 | 48.6                               | 5.65                            | 4.32    | 4.32    | 4.32    | 0.45               | 1.90                    | ± 13.1 %  |
| 5800                 | 48.2                               | 6.00                            | 4.41    | 4.41    | 4.41    | 0.45               | 1.90                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

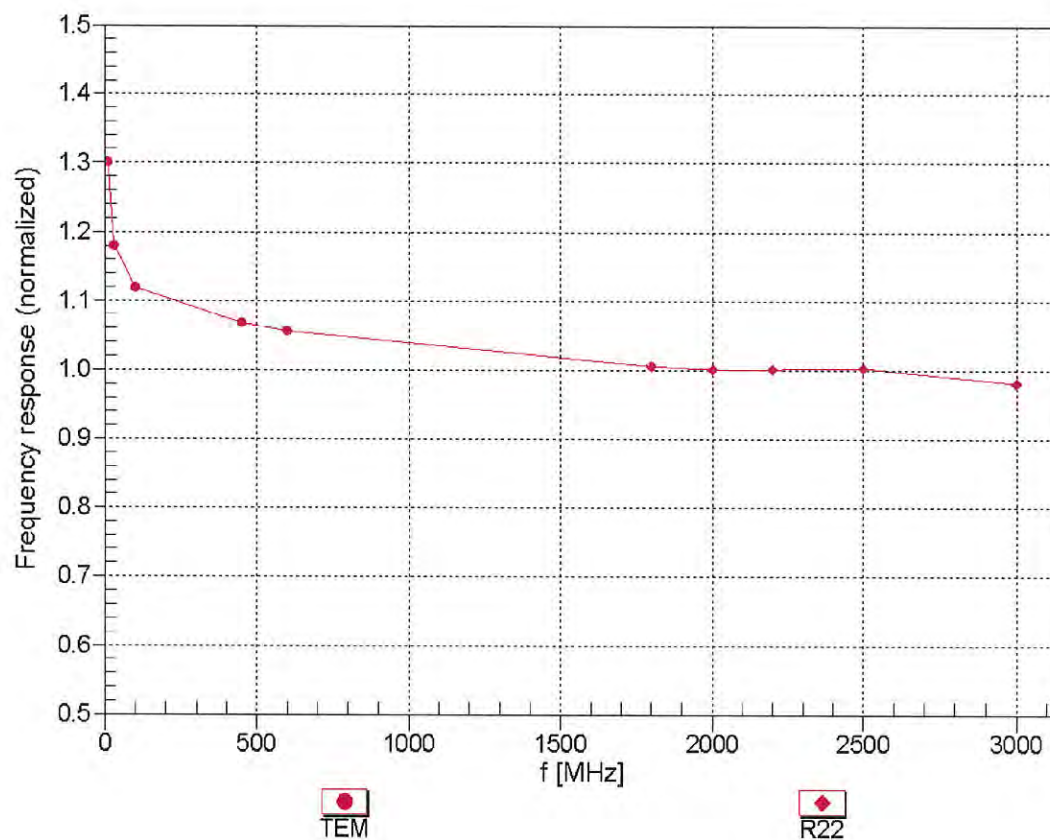



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz, TEM

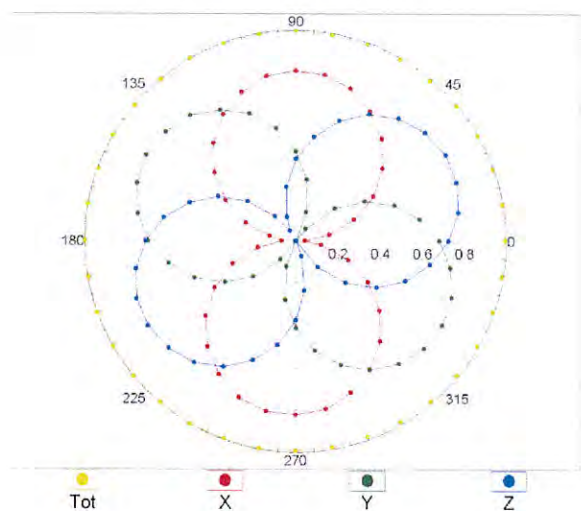


f=1800 MHz, R22

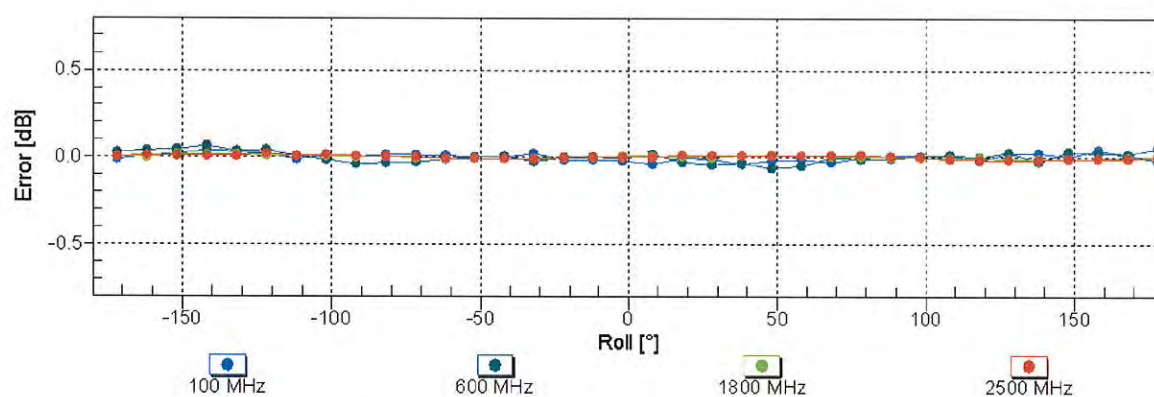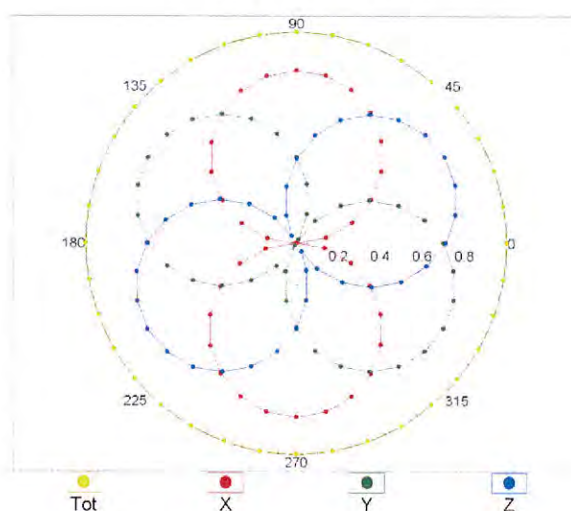

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

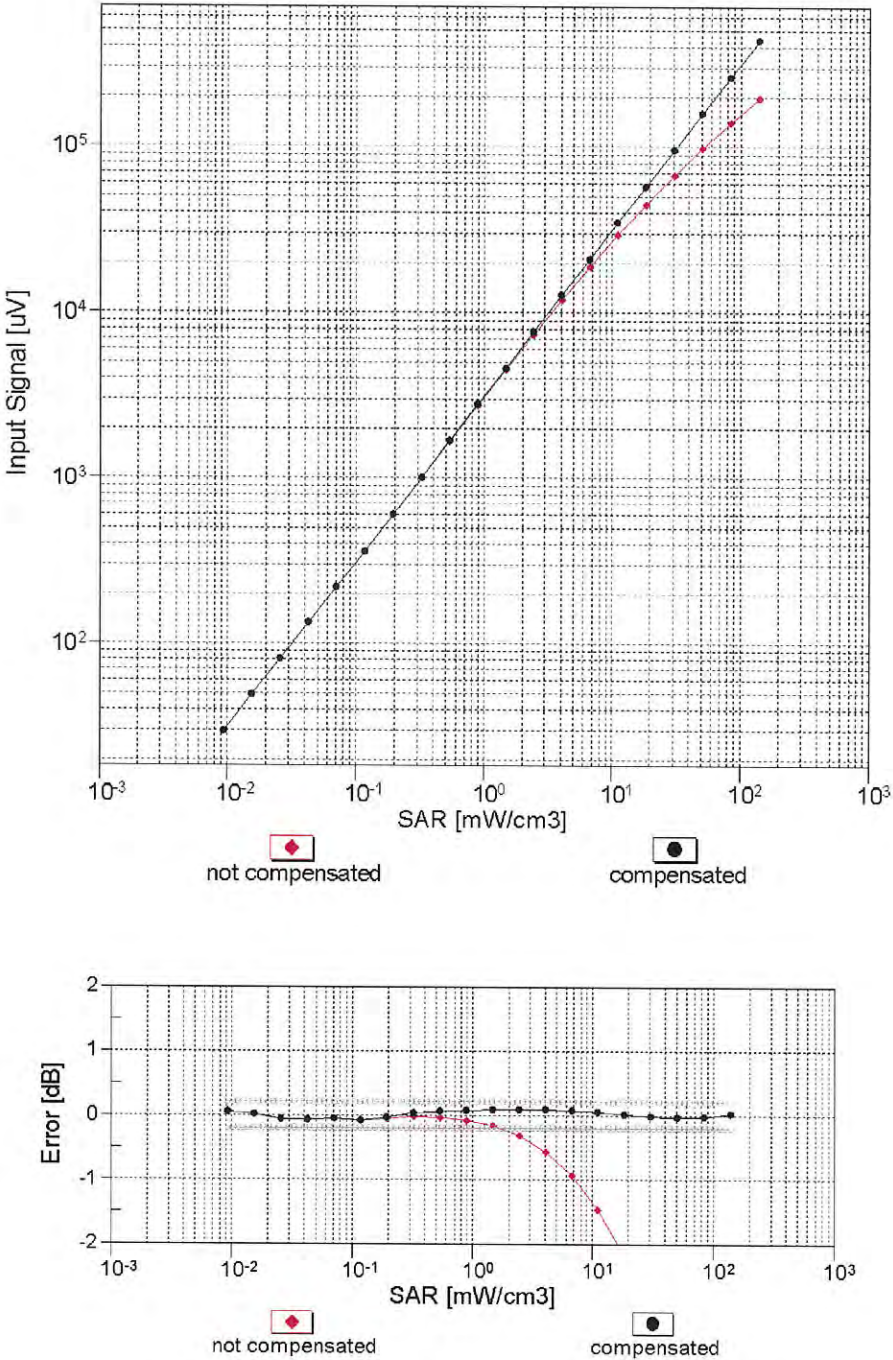

Uncertainty of Linearity Assessment: ± 0.6% (k=2)





## Conversion Factor Assessment

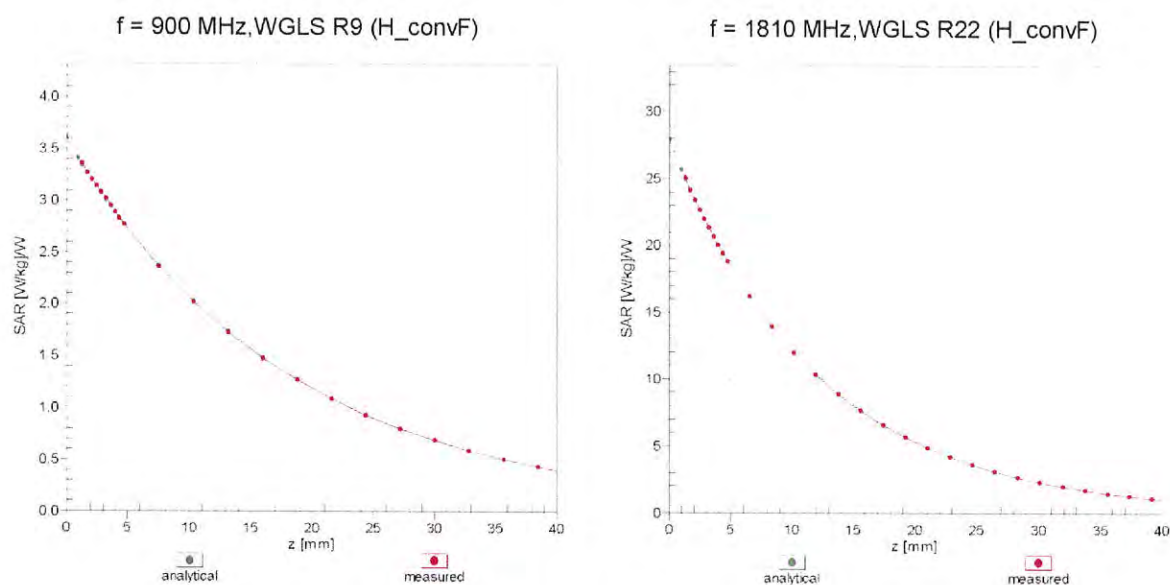

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

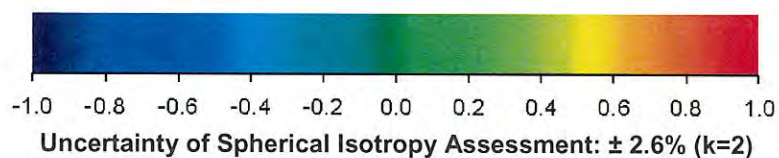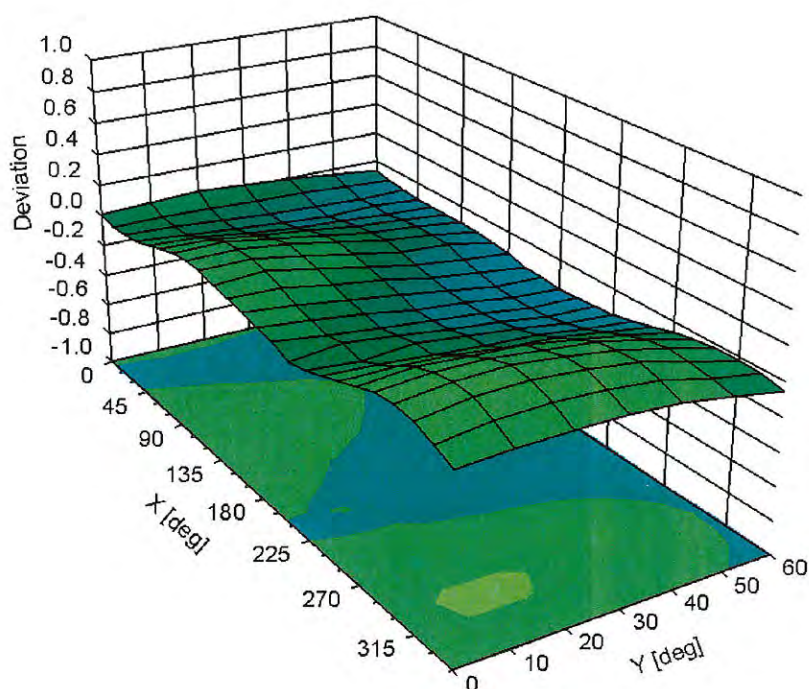

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -21.9      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **D2450V2-722\_Sep15**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 722**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **September 28, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A       | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 01-Apr-15 (No. 217-02131)         | Mar-16                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 01-Apr-15 (No. 217-02134)         | Mar-16                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-14 (No. EX3-7349_Dec14)    | Dec-15                 |
| DAE4                        | SN: 601            | 17-Aug-15 (No. DAE4-601_Aug15)    | Aug-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| RF generator R&S SMT-06     | 100972             | 15-Jun-15 (in house check Jun-15) | In house check: Jun-18 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                |                               |                                          |                                                                                                    |
|----------------|-------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>          | <b>Technical Manager</b>                 |               |

Issued: September 28, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.8.8     |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 39.2 $\pm$ 6 % | 1.86 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 12.7 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>50.0 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.90 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>23.4 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 53.2 $\pm$ 6 % | 2.00 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 12.5 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>49.5 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.88 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>23.4 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.7 \Omega + 9.2 j\Omega$ |
| Return Loss                          | - 20.8 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $46.3 \Omega + 8.6 j\Omega$ |
| Return Loss                          | - 20.2 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.152 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 16, 2002 |



## DASY5 Validation Report for Head TSL

Date: 28.09.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz ; Type: D2450V2; Serial: D2450V2 - SN: 722**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.67, 7.67, 7.67); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 111.4 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 26.1 W/kg


**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.9 W/kg**

Maximum value of SAR (measured) = 21.1 W/kg

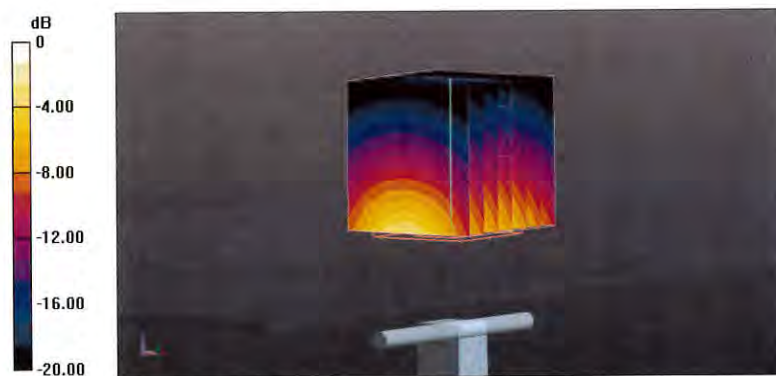

0 dB = 21.1 W/kg = 13.24 dBW/kg

## Impedance Measurement Plot for Head TSL

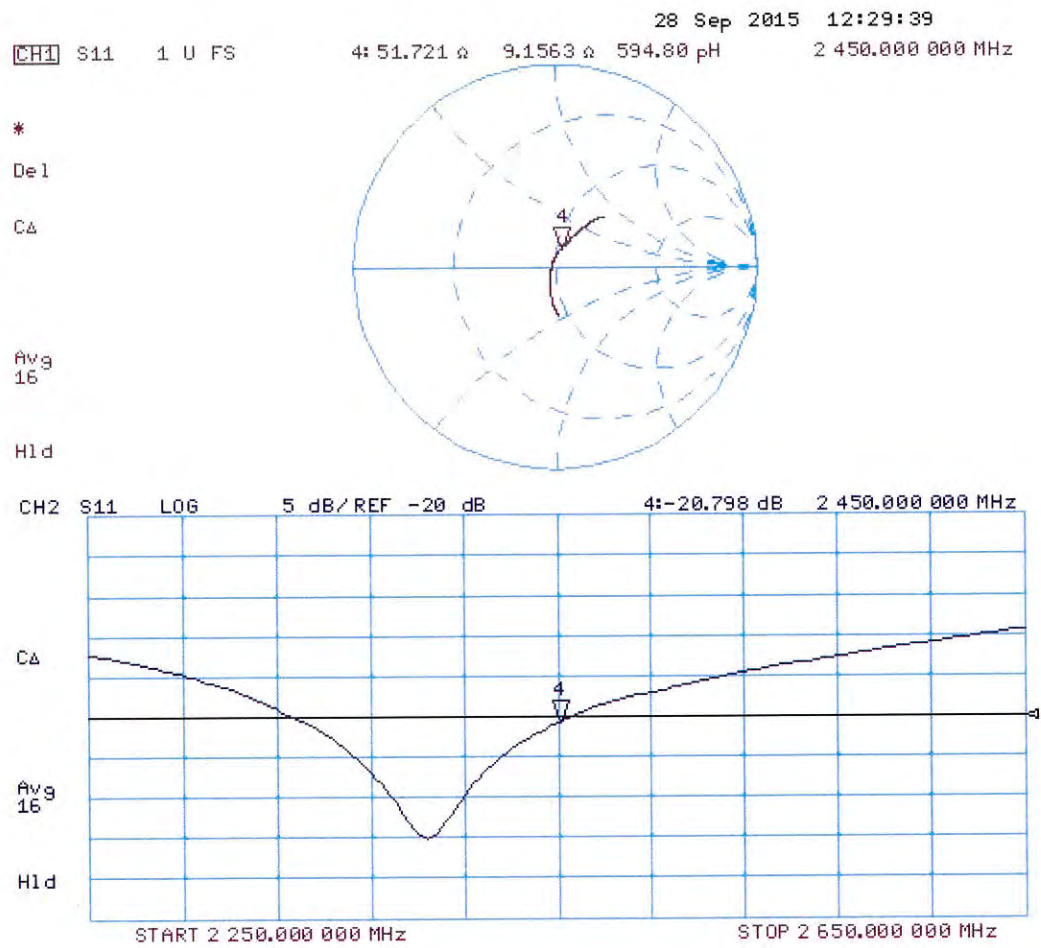



## DASY5 Validation Report for Body TSL

Date: 28.09.2015

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz ; Type: D2450V2; Serial: D2450V2 - SN: 722**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  S/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.53, 7.53, 7.53); Calibrated: 30.12.2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 17.08.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.8 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 24.7 W/kg

**SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.88 W/kg**

Maximum value of SAR (measured) = 20.5 W/kg

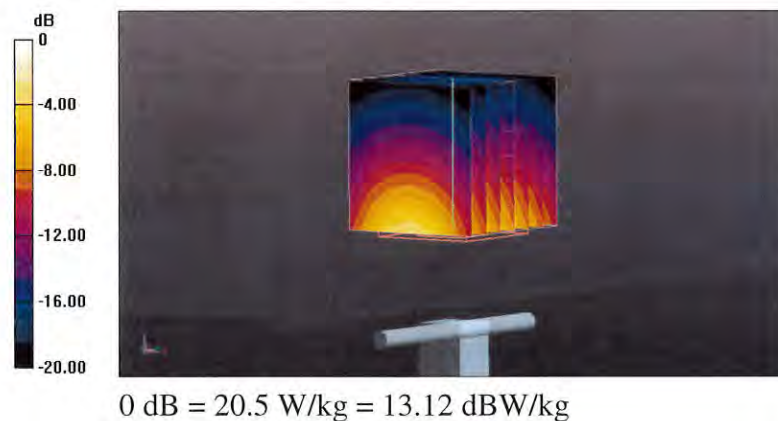

# Impedance Measurement Plot for Body TSL

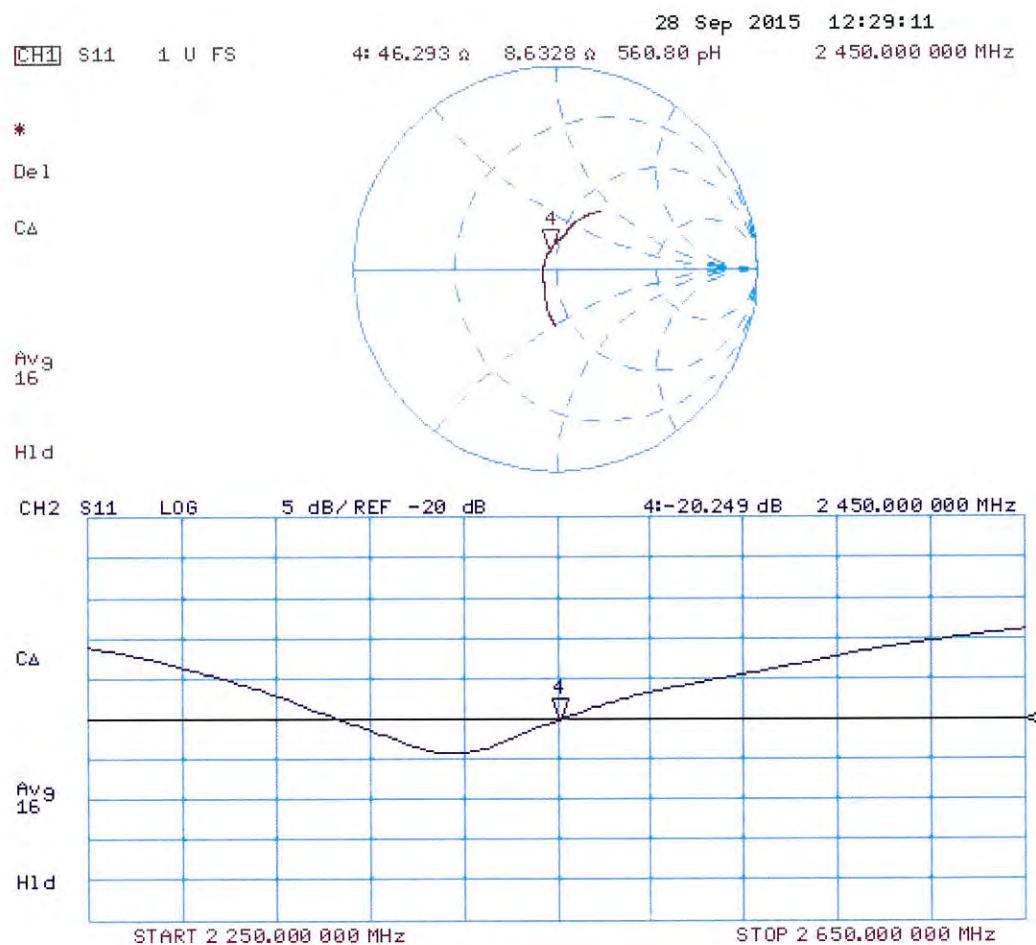

# Validation Report

## No. VAL\_0284\_EF 2017-11

Kind of doc.:  
QM Template

### EUROFINS PRODUCT SERVICE GmbH

Storkower Str. 38c, 15526 Reichenwalde, Germany

#### 1 Customer

Eurofins Product Service GmbH

#### 2 Object

Equipment Number: EF00284  
Equipment Name: System validation dipole  
Equipment Type: D2450V2  
Serial Number: 722  
Manufacturer: Schmid & Partner Engineering AG

#### 3 State of Measurement

Validation: ☒  
Performance Control: ☒  
Other: ☐

#### 4 Performance of Measurement

##### 4.1 Generals

(e.g. object of validation such as specific setup, non-standard method or SW, specification of the requirements, test set-up configuration, risk analysis etc.)

Dipol verification

##### 4.2 Validation procedure / measurement

(e.g. comparison of results achieved with other methods, interlaboratory comparison, systematic assessment of factors influencing the result, assessment of the uncertainty of the results based on scientific understanding of the theoretical principles of the method and practical experience; criteria/requirements for approval/rejection etc.)

According KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 3.2.2 Dipole calibration

Limits for the verification: return loss <20% to the original measurement or >20 dB minimum return-loss  
Impedance <5  $\Omega$  to the original measurement.

##### 4.3 Used reference equipment

| Equipment name      | Equipment type | Manufacturer                              | Equipment number | Cal. Date  | Cal. Due Date |
|---------------------|----------------|-------------------------------------------|------------------|------------|---------------|
| RF Network analyzer | 8752 C         | Hewlett-Packard<br>Company Santa<br>Clara | EF00140          | 2017-07-28 | 2018-07-28    |

- new acquired (incl. calibration) ☐
- new calibrated ☐
- check reference standard ☒

##### 4.4 Environmental conditions

Temperature: \_23\_ °C  $\pm$  2°C  
Relative Air Humidity: \_50\_ rH  $\pm$  5%  
Air Pressure: \_1020\_ hPa  $\pm$  5%

# Validation Report

## No. VAL\_0284\_EF 2017-11

Kind of doc.:  
QM Template

EUROFINS PRODUCT SERVICE GmbH  
Storkower Str. 38c, 15526 Reichenwalde, Germany

### 5 Results

#### 5.1 General:

(e.g. measurement results, user instructions such as handling, transport, storage, preparation; checks to be made before the work started; information about how to install (operations)-, to maintain-, to train and to use; safety measures etc.)

|                                       | Original measurement           | Verification measurement         | Margin            |
|---------------------------------------|--------------------------------|----------------------------------|-------------------|
| Impedance, transformend to feed point | 46.3 $\Omega$ + 8.6 j $\Omega$ | 48.60 $\Omega$ + 9.94 j $\Omega$ | 2.51 $\Omega$     |
| Return Loss                           | -20.2 dB                       | -21.24 dB                        | -5.2 % / -1.24 dB |
| Tissue Validation $\epsilon_r$        | 52.7                           | 50.559                           | -4.06 %           |
| Tissue Validation $\sigma$ [S/m]      | 1.95                           | 2.12                             | 3.18 %            |
| System validation                     | 12.38 W/kg (1g)                | 13.1 W/kg (1g)                   | 5.82 %            |
| Date:                                 | 28.09.2015                     | 27.06.2017                       |                   |

#### 5.2 Measurement uncertainty

The reported expanded uncertainty of measurement is stated as the standard uncertainty multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.  
+/- 2.5 %

#### 5.3 Results of Validation

Validated



Not validated



### 6 Operator

Pudell

Name

  
Signature

Place and Date of Verification: Reichenwalde, 07.11.2017

Attachment:

Impedance, Return Loss, System validierung


# Validation Report

## No. VAL\_0284\_EF 2017-11


Kind of doc.:  
QM Template

EUROFINS PRODUCT SERVICE GmbH

Storkower Str. 38c, 15526 Reichenwalde, Germany

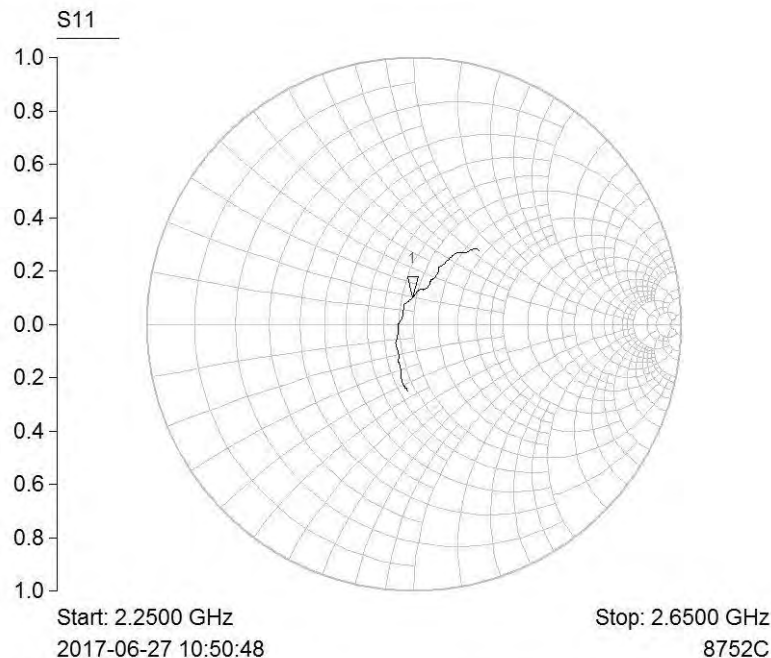

| Mkr | Trace | X-Axis     | Value              | Notes       |
|-----|-------|------------|--------------------|-------------|
| 1 ▽ | S11   | 2.4500 GHz | 48.60 + j9.94 ohms | D2450V2-722 |

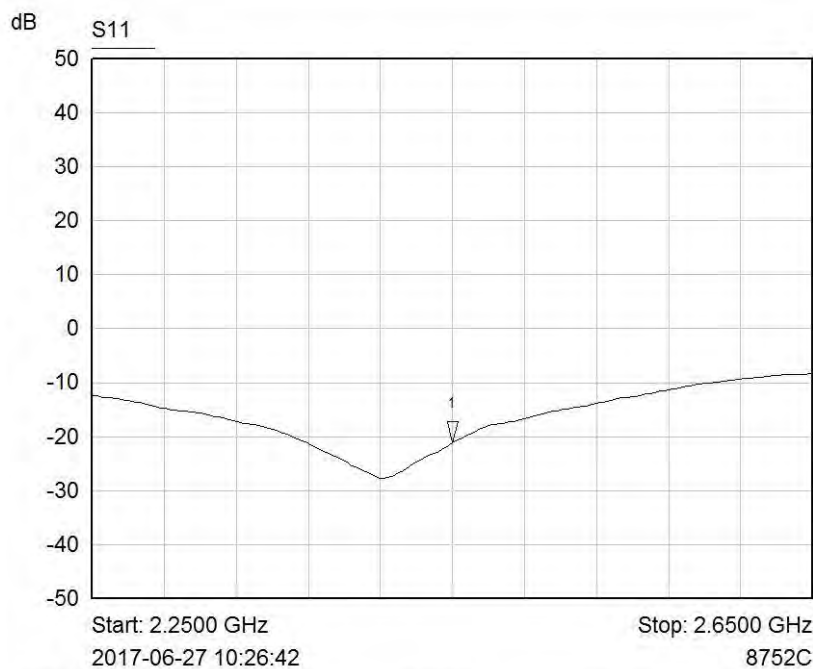

| Mkr | Trace | X-Axis     | Value     | Notes       |
|-----|-------|------------|-----------|-------------|
| 1 ▽ | S11   | 2.4500 GHz | -21.24 dB | D2450V2-722 |



# Validation Report

## No. VAL\_0284\_EF 2017-11

Kind of doc.:  
QM Template

EUROFINS PRODUCT SERVICE GmbH  
Storkower Str. 38c, 15526 Reichenwalde, Germany

Date Time: 2017-11-07 14:09:47

Test Laboratory: Eurofins Product Service GmbH

Dipol Valid.2450 (m)\_250mW ELI4\_07.11.2017

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450 \text{ MHz}$ ;  $\sigma = 2.012 \text{ S/m}$ ;  $\epsilon_r = 50.559$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 15.0 W/kg

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 80.629 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 26.7 W/kg  
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.04 W/kg  
Maximum value of SAR (measured) = 15.2 W/kg

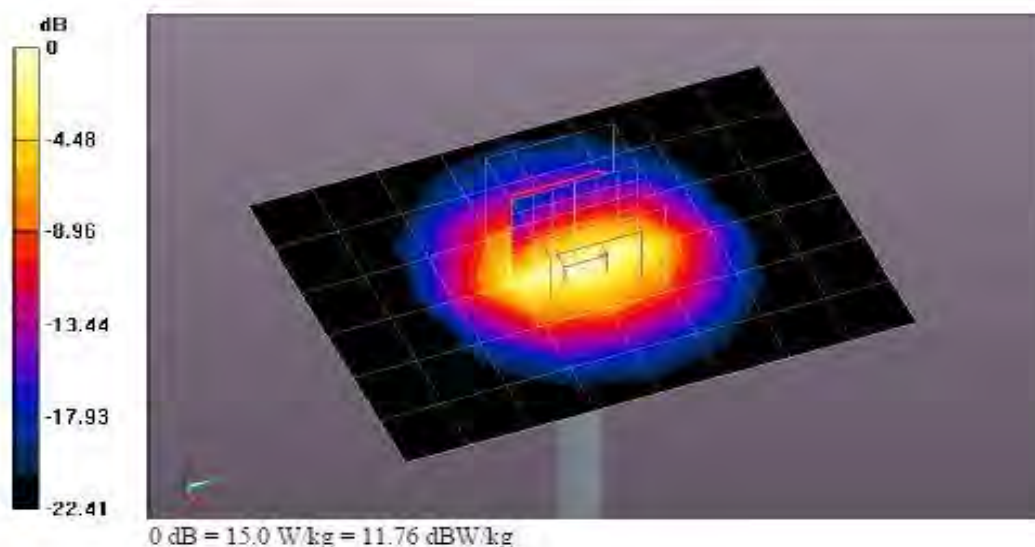

**ANNEX B    System Validation Reports**

**Test Laboratory: Eurofins Product Service GmbH**

**SPC - ELI4 - EX3DV4 - MSL-2450\_05\_02\_2018**

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 722**

Communication System: UID 0 - n/a, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.978$  S/m;  $\epsilon_r =$

50.361;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5.2 Configuration:**

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm**

**(EX-Probe)/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 13.3 W/kg

**System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=4.0mm**


**(EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.598 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 26.5 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.06 W/kg**

Maximum value of SAR (measured) = 14.8 W/kg

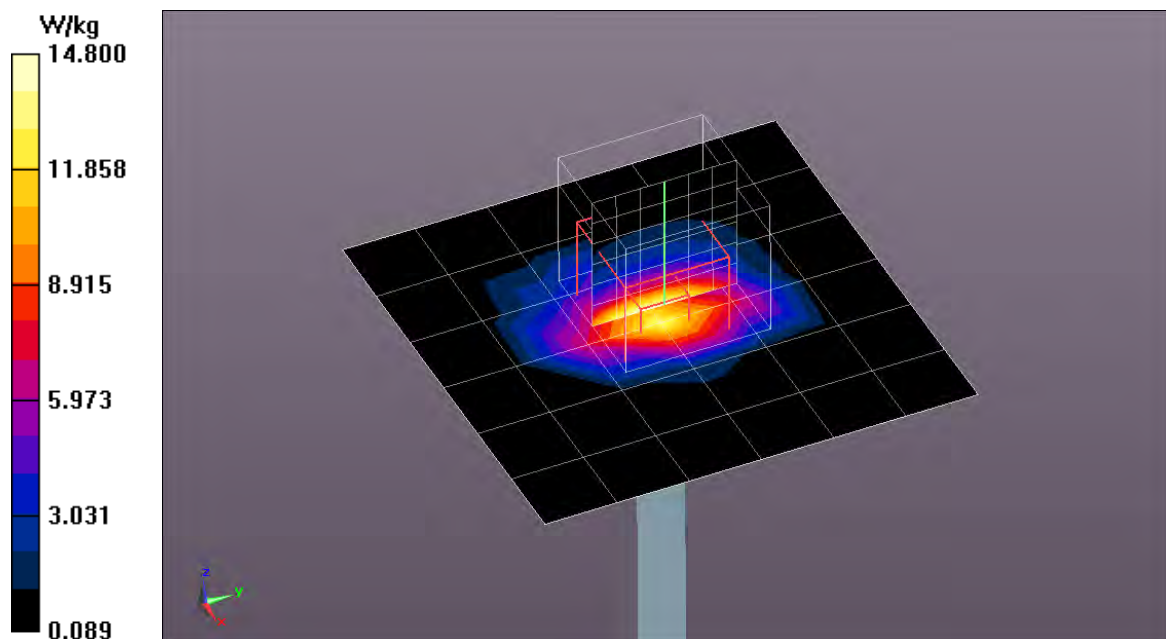

**ANNEX C SAR Measurement Reports**

## Test Laboratory: Eurofins Product Service GmbH

### BT-EDR\_CH-39\_3-DH5\_Flat\_Front\_0mm

**DUT: AM3 Option BT+; Type: Asthma Monitor; Serial: Sample16943**

Communication System: UID 0 - n/a, BT 2.4GHz 3-DH5; Frequency: 2441 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.966$  S/m;  $\epsilon_r = 50.396$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/AM3 GSM/Area Scan (11x11x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.0158 W/kg

**Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.092 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.0220 W/kg  
**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00959 W/kg**  
Maximum value of SAR (measured) = 0.0149 W/kg

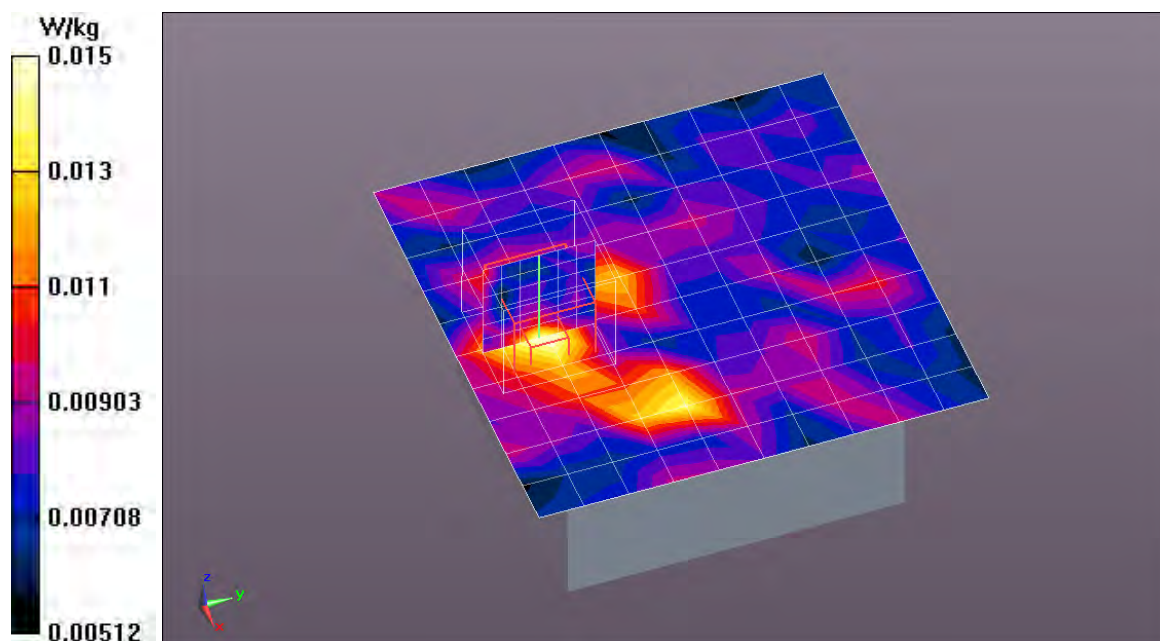



## Test Laboratory: Eurofins Product Service GmbH

### BT-EDR\_CH-39\_3-DH5\_Flat\_Back\_0mm

**DUT: AM3 Option BT+; Type: Asthma Monitor; Serial: Sample16943**

Communication System: UID 0 - n/a, BT 2.4GHz 3-DH5; Frequency: 2441 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.966$  S/m;  $\epsilon_r = 50.396$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/AM3 GSM/Area Scan (11x11x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.00724 W/kg

**Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0.845 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 0.0260 W/kg  
**SAR(1 g) = 0.0054 W/kg; SAR(10 g) = 0.000973 W/kg**  
Maximum value of SAR (measured) = 0.00578 W/kg

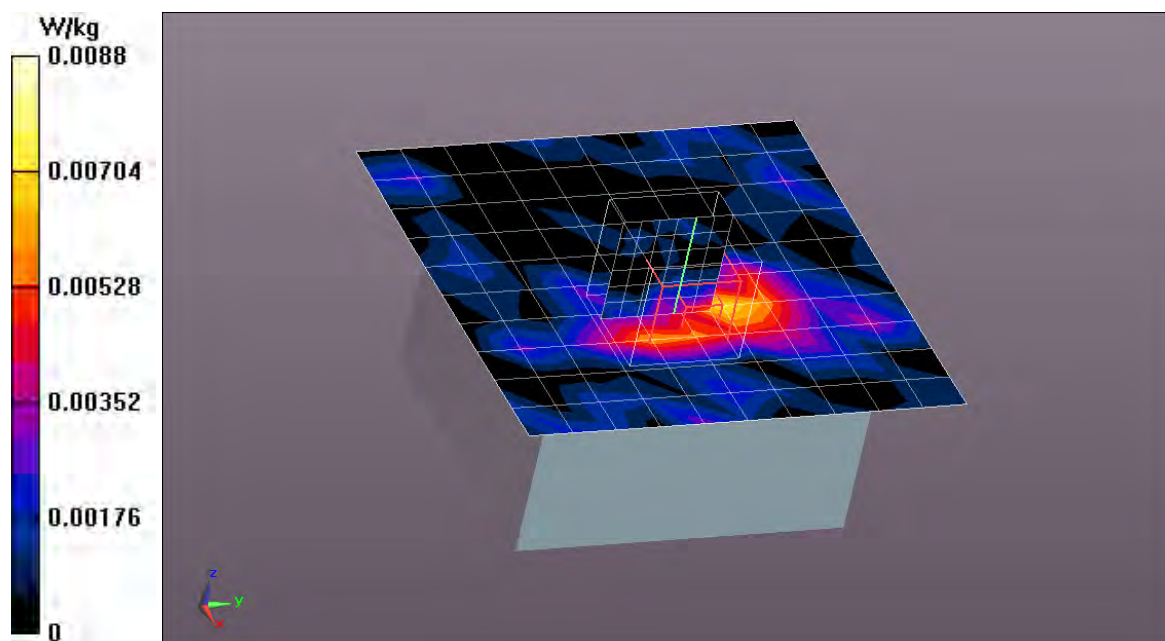

## Test Laboratory: Eurofins Product Service GmbH

### BT-EDR\_CH-39\_3-DH5\_Flat\_Left\_0mm

**DUT: AM3 Option BT+; Type: Asthma Monitor; Serial: Sample16943**

Communication System: UID 0 - n/a, BT 2.4GHz 3-DH5; Frequency: 2441 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.966$  S/m;  $\epsilon_r = 50.396$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/AM3 GSM/Area Scan (9x13x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.0692 W/kg

**Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.725 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 0.136 W/kg  
**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.019 W/kg**  
Maximum value of SAR (measured) = 0.0733 W/kg

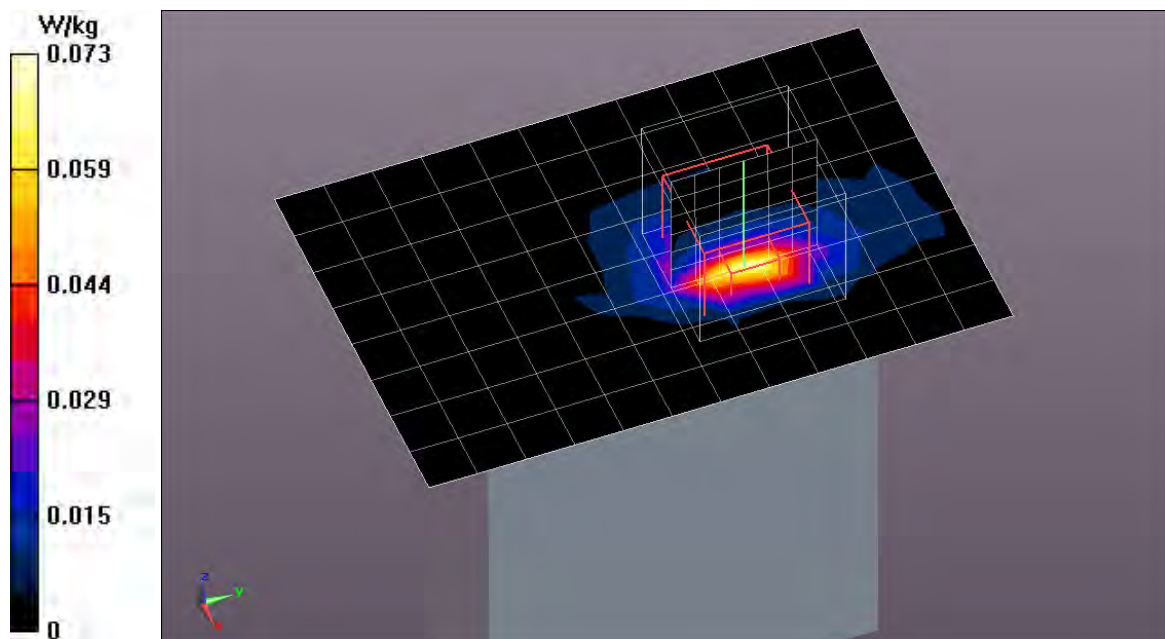

## Test Laboratory: Eurofins Product Service GmbH

### BT-LE\_CH-19\_GFSK\_Flat\_Left\_0mm

**DUT: AM3 Option BT+; Type: Asthma Monitor; Serial: Sample16943**

Communication System: UID 0 - n/a, Bluetooth Low Energy; Frequency: 2440 MHz; Duty Cycle: 1:3.54813  
Medium: Muscle 2450 MHz Medium parameters used:  $f = 2440$  MHz;  $\sigma = 1.964$  S/m;  $\epsilon_r = 50.4$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/AM3 GSM/Area Scan (9x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0255 W/kg


**Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.654 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0340 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00497 W/kg**

Maximum value of SAR (measured) = 0.0241 W/kg

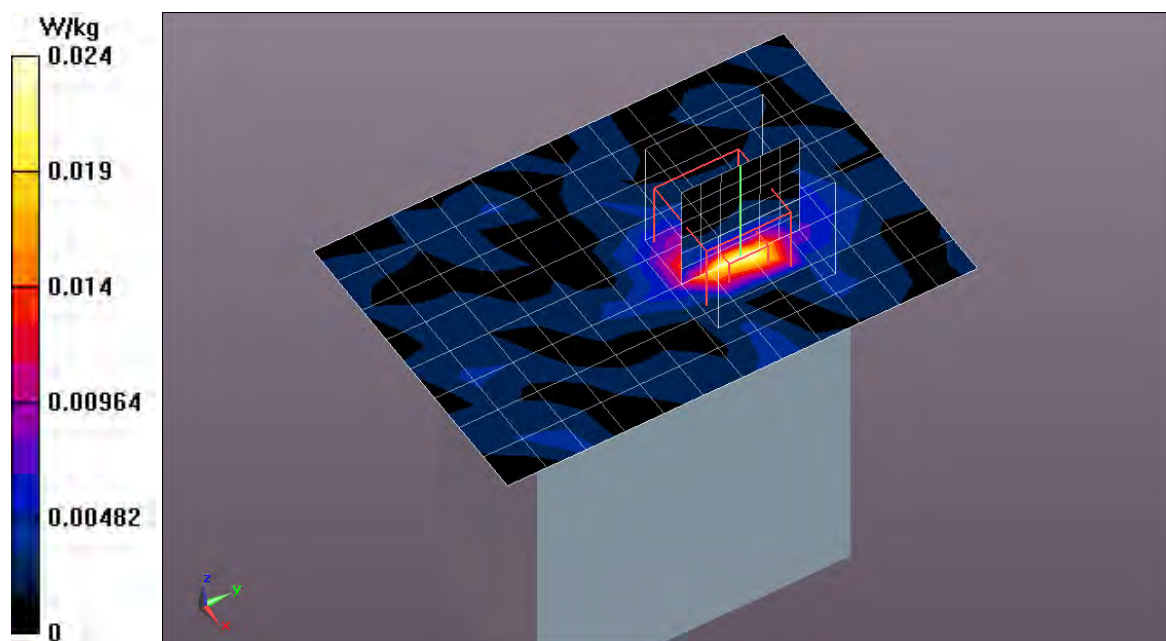

## Test Laboratory: Eurofins Product Service GmbH

### BT-EDR\_CH-39\_3-DH5\_Flat\_Top\_1mm

**DUT: AM3 Option BT+; Type: Asthma Monitor; Serial: Sample16943**

Communication System: UID 0 - n/a, BT 2.4GHz 3-DH5; Frequency: 2441 MHz; Duty Cycle: 1:2.88403  
Medium: Muscle 2450 MHz Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.966$  S/m;  $\epsilon_r = 50.396$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5.2 Configuration:

- Probe: EX3DV4 - SN3893; ConvF(7.96, 7.96, 7.96); Calibrated: 2017-09-25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 2017-09-18
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BB; Serial: SN:1013
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

**Configuration/AM3 GSM/Area Scan (9x13x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.0425 W/kg

**Configuration/AM3 GSM/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.587 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.0810 W/kg  
**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.022 W/kg**  
Maximum value of SAR (measured) = 0.0485 W/kg

