

# Shenzhen Honeycomb Technologies Company Limited

# TEST REPORT

**SCOPE OF WORK**

FCC TESTING—nRF51822 Module V1

**REPORT NUMBER**

191203019SZN-002

**ISSUE DATE**

**[REVISED DATE]**

18 December 2019

[-----]

**PAGES**

25

**DOCUMENT CONTROL NUMBER**

FCC ID 247\_b

© 2017 INTERTEK



## Shenzhen Honeycomb Technologies Company Limited

Application  
For  
Certification

**FCC ID: 2AAUWHBT42A20N**

**BT+2.4G wireless module**

**Model: nRF51822 Module V1**

**2.4GHz Transceiver**

Report No.: 191203019SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-18]

**Prepared and Checked by:**

**Damon Wang**  
**Project Engineer**

**Approved by:**

**Kidd Yang**  
**Technical Supervisor**  
**Date: 18 December 2019**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen.  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

**MEASUREMENT/TECHNICAL REPORT**

This report concerns (check one):      Original Grant       Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date  
of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-18 Edition] provision.

Report prepared by:

Damon Wang  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District, Shenzhen.  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

## Table of Contents

|             |  |    |
|-------------|--|----|
| <b>1.0</b>  | <b><u>Summary of Test Results</u></b>            | 4  |
| <b>2.0</b>  | <b><u>General Description</u></b>                | 5  |
| 2.1         | Product Description .....                        | 5  |
| 2.2         | Related Submittal(s) Grants .....                | 5  |
| 2.3         | Test Methodology.....                            | 5  |
| 2.4         | Test Facility.....                               | 5  |
| <b>3.0</b>  | <b><u>System Test Configuration</u></b>          | 6  |
| 3.1         | Justification .....                              | 6  |
| 3.2         | EUT Exercising Software.....                     | 6  |
| 3.3         | Special Accessories.....                         | 6  |
| 3.4         | Equipment Modification .....                     | 6  |
| 3.5         | Measurement Uncertainty.....                     | 7  |
| 3.6         | Support Equipment List and Description .....     | 7  |
| <b>4.0</b>  | <b><u>Test Results</u></b>                       | 8  |
| 4.1         | Radiated Test Result.....                        | 8  |
| 4.1.1       | Field Strength Calculation.....                  | 8  |
| 4.1.2       | Radiated Emission Configuration Photograph ..... | 9  |
| 4.1.3       | Radiated Emission .....                          | 9  |
| 4.1.4       | Transmitter Spurious Emissions (Radiated).....   | 12 |
| 4.2         | Peak Power .....                                 | 14 |
| 4.3         | 6dB Bandwidth.....                               | 16 |
| 4.4         | Power Density .....                              | 17 |
| 4.5         | Out of Band Conducted Emissions.....             | 18 |
| 4.6         | Dwell Time (Time of Occupancy) .....             | 21 |
| 4.7         | Duty Cycle .....                                 | 22 |
| <b>5.0</b>  | <b><u>Equipment Photographs</u></b>              | 23 |
| <b>6.0</b>  | <b><u>Product Labelling</u></b>                  | 23 |
| <b>7.0</b>  | <b><u>Technical Specifications</u></b>           | 23 |
| <b>8.0</b>  | <b><u>Instruction Manual</u></b>                 | 23 |
| <b>9.0</b>  | <b><u>Miscellaneous Information</u></b>          | 24 |
| 9.1         | Discussion of Pulse Desensitization .....        | 24 |
| 9.2         | Emissions Test Procedures .....                  | 24 |
| <b>10.0</b> | <b><u>Test Equipment List</u></b>                | 25 |

**1.0 Summary of Test Results**

Applicant: Shenzhen Honeycomb Technologies Company Limited

Address: Floor 4th, Building 7, Xinhe Xinxing Industrial Park Block 3A, Fuyong Town, Bao'an District, Shenzhen China

Manufacturer: Shenzhen Honeycomb Technologies Company Limited

Address: Floor 4th, Building 7, Xinhe Xinxing Industrial Park Block 3A, Fuyong Town, Bao'an District, Shenzhen China

**Model: nRF51822 Module V1**

**FCC ID: 2AAUWHBT42A20N**

| TEST                                   | REFERENCE    | RESULTS          |
|--|--------------|------------------|
| Max. Output power                      | 15.247(b)    | Pass             |
| 6 dB Bandwidth                         | 15.247(a)(2) | Pass             |
| Max. Power Density                     | 15.247(e)    | Pass             |
| Out of Band Antenna Conducted Emission | 15.247(d)    | Pass             |
| Radiated Emission in Restricted Bands  | 15.247(d)    | Pass             |
| AC Conducted Emission                  | 15.207       | N/A              |
| Antenna Requirement                    | 15.203       | Pass (See Notes) |

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## 2.0 General Description

### 2.1 Product Description

The equipment under test (EUT) is a BT+2.4G wireless module with Bluetooth and 2.4G transmitter functions operating in 2402-2480MHz. The EUT is powered by DC 3.3V battery. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Antenna Gain: 0 dBi

Modulation Type: GFSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the BT+2.4G wireless module which has 2.4G transmitter function. The Bluetooth transmitter function was reported in the test report: 181205003SZN-001.

### 2.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 v05r02. Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 2.4 Test Facility

The Semi-anechoic chamber used to collect the radiated data is **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

### 3.0 System Test Configuration

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC battery during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The unit was operated standalone and placed at the center of table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 3.2 EUT Exercising Software

There was no special software to exercise the device.

#### 3.3 Special Accessories

No special accessory attached.

#### 3.4 Equipment Modification

Any modifications installed previous to testing by Shenzhen Honeycomb Technologies Company Limited will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.6 Support Equipment List and Description

| Description    | Manufacturer                                    | Model No. |
|----------------|---|-----------|
| Extender board | Shenzhen Honeycomb Technologies Company Limited | N/A       |

## 4.0 Test Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

### 4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where  $FS$  = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

$RA$  = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

$CF$  = Cable Attenuation Factor in dB

$AF$  = Antenna Factor in dB

$AG$  = Amplifier Gain in dB

$PD$  = Pulse Desensitization in dB

$AV$  = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$RA = 62.0 \text{ dB}\mu\text{V}$

$AF = 7.4 \text{ dB}$

$CF = 1.6 \text{ dB}$

$AG = 29.0 \text{ dB}$

$PD = 0 \text{ dB}$

$AV = -10 \text{ dB}$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V}/\text{m}$$

Level in  $\mu\text{V}/\text{m}$  = Common Antilogarithm  $[(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$

#### 4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

#### 4.1.3 Radiated Emissions- FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 891.360000 MHz

Judgement: Passed by 13.3 dB

**TEST PERSONNEL:**

*Sign on file*

Damon Wang, Project Engineer

*Typed/Printed Name*

December 17, 2019

*Date*

Applicant: Shenzhen Honeycomb Technologies Company Limited

Date of Test: December 17, 2019

Model:nRF51822 Module V1


Sample: 1/1

Worst-case operating Mode: Transmit (2450MHz)

Modulation type: GFSK

ANT Polarity: Horizontal

## FCC Part 15

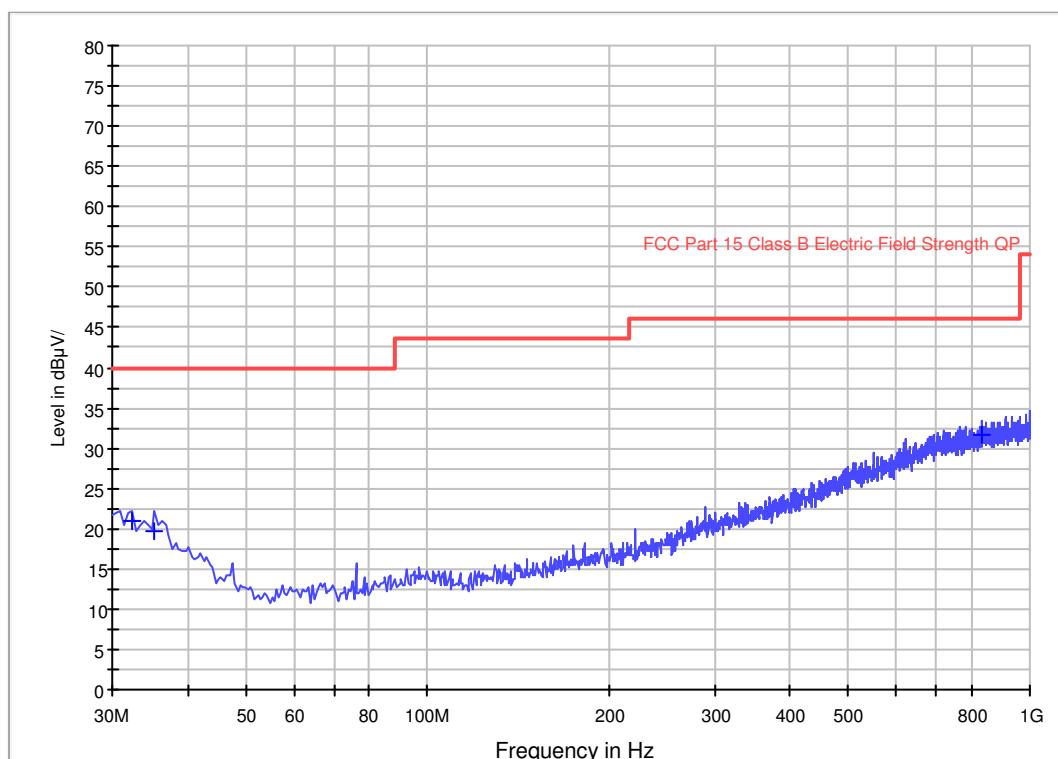

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dB $\mu$ V/m) |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|------------|-------------------|----------------------------|
| 32.425000       | 21.0                     | 1000.0          | 120.000         | 0.0         | H            | 17.0       | 19.0              | 40.0                       |
| 35.335000       | 19.6                     | 1000.0          | 120.000         | 0.0         | H            | 15.6       | 20.4              | 40.0                       |
| 831.705000      | 31.7                     | 1000.0          | 120.000         | 0.0         | H            | 27.1       | 14.3              | 46.0                       |

### Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m)= Corr. (dB/m)+ Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)

Applicant: Shenzhen Honeycomb Technologies Company Limited

Date of Test: December 17, 2019

Model: nRF51822 Module V1


Sample: 1/1

Worst-case operating Mode: Transmit (2450MHz)

Modulation type: GFSK

ANT Polarity: Vertical

## FCC Part 15

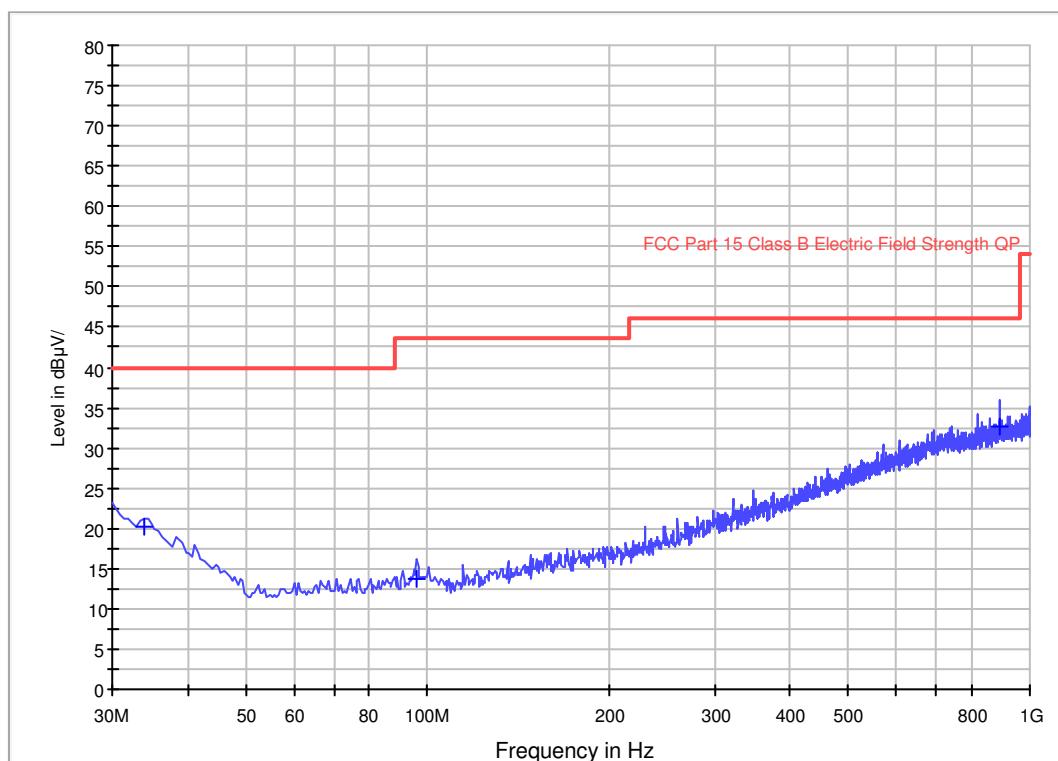

| Frequency (MHz) | QuasiPeak (dB $\mu$ V/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dB $\mu$ V/m) |
|-----------------|--------------------------|-----------------|-----------------|-------------|--------------|------------|-------------------|----------------------------|
| 33.880000       | 20.3                     | 1000.0          | 120.000         | 0.0         | V            | 16.3       | 19.7              | 40.0                       |
| 95.960000       | 13.7                     | 1000.0          | 120.000         | 0.0         | V            | 10.1       | 29.8              | 43.5                       |
| 891.360000      | 32.7                     | 1000.0          | 120.000         | 0.0         | V            | 27.8       | 13.3              | 46.0                       |

## Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m) = Corr. (dB/m) + Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)

#### 4.1.4 Transmitter Spurious Emissions (Radiated) - FCC section 15.209

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission

at 7350.000 MHz

Judgement: Passed by 9.1 dB

**TEST PERSONNEL:**

*Sign on file*

Damon Wang, Project Engineer

*Typed/Printed Name*

December 17, 2019

*Date*

Applicant: Shenzhen Honeycomb Technologies Company Limited

Date of Test: December 17, 2019

Model: nRF51822 Module V1

Sample: 1/1

Worst-case operating Mode: Transmit (2450MHz)

Modulation type: GFSK

Table 1

**Radiated Emissions**

(2450MHz)

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|---------------------------------|-------------|
| Vertical     | *4900.000       | 53.6                 | 36.7              | 35.5                | 52.4                     | 74.0                            | -21.6       |
| Vertical     | *7350.000       | 54.1                 | 36.1              | 36.5                | 54.5                     | 74.0                            | -19.5       |

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|------------------------------------|-------------|
| Vertical     | *4900.000       | 44.0                 | 36.7              | 35.5                | 42.8                     | 54.0                               | -11.2       |
| Vertical     | *7350.000       | 44.5                 | 36.1              | 36.5                | 44.9                     | 54.0                               | -9.1        |

NOTES:

1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

\* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

#### 4.2 Peak Power

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3).


The antenna power of the EUT was connected to the input of a broadband peak RF power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

| Antenna Gain = 0dBi |                 |                                   |                   |
|---------------------|-----------------|-----------------------------------|-------------------|
| Modulation Type     | Frequency (MHz) | Output Power (Peak Reading) (dBm) | Output Power (mW) |
| GFSK                | 2450            | -2.82                             | 0.522             |

Cable loss: 0.5 dB    External Attenuation: 0 dB

Modulation Type: GFSK

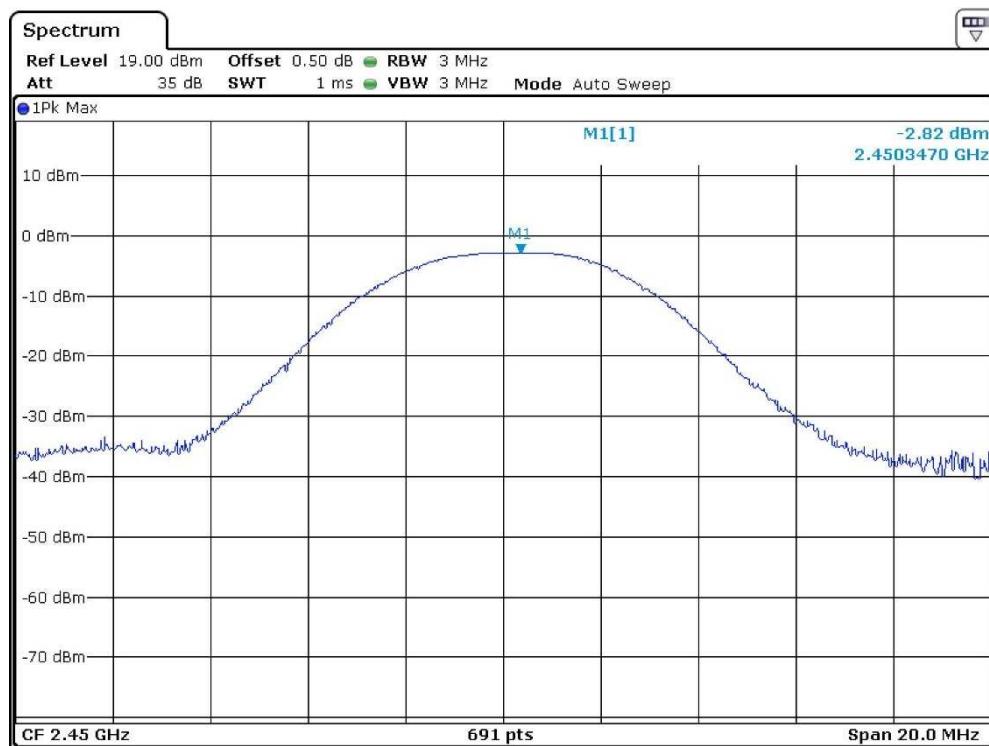

## 4.2 6dB Bandwidth


Minimum 6dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

| Frequency (MHz) | 6 dB Bandwidth (KHz) |
|-----------------|----------------------|
| 2450            | 772.8                |

Modulation Type: 8DPSK

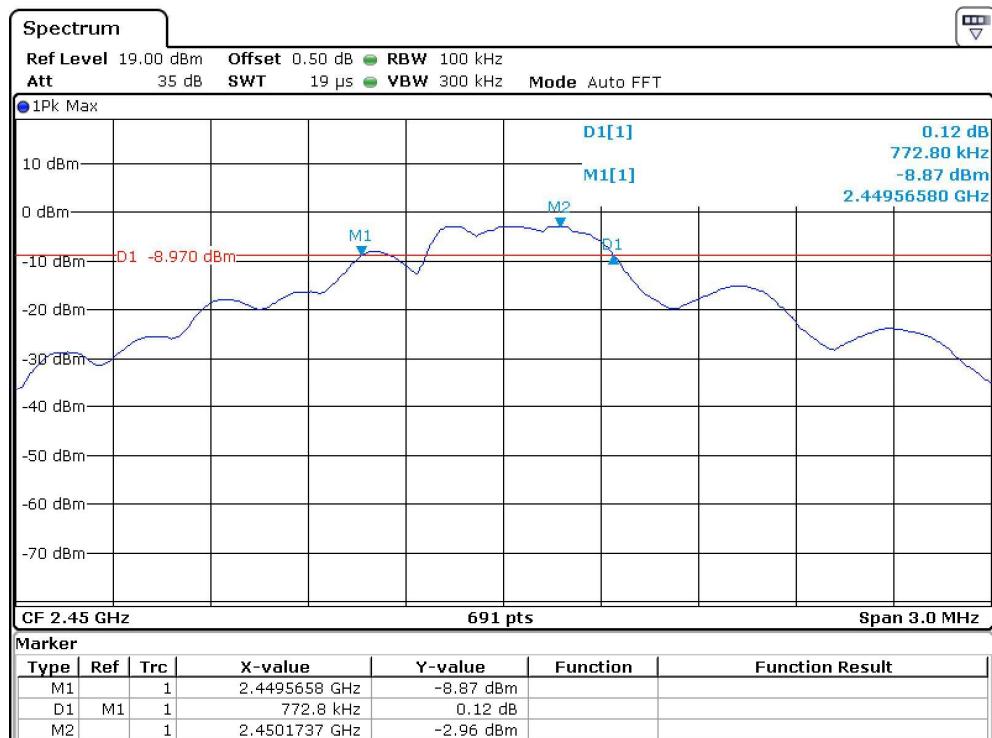

## 4.4 Power Density

Maximum Power Density Reading, FCC Rule 15.247(e).

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/ 3 kHz.

| Frequency (MHz) | Power Density with RBW 100KHz |
|-----------------|-------------------------------|
| 2450            | -2.95                         |




## 4.5 Out of Band Conducted Emissions



In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

The test plots showed all spurious emission and up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Reference Level: -2.95dBm

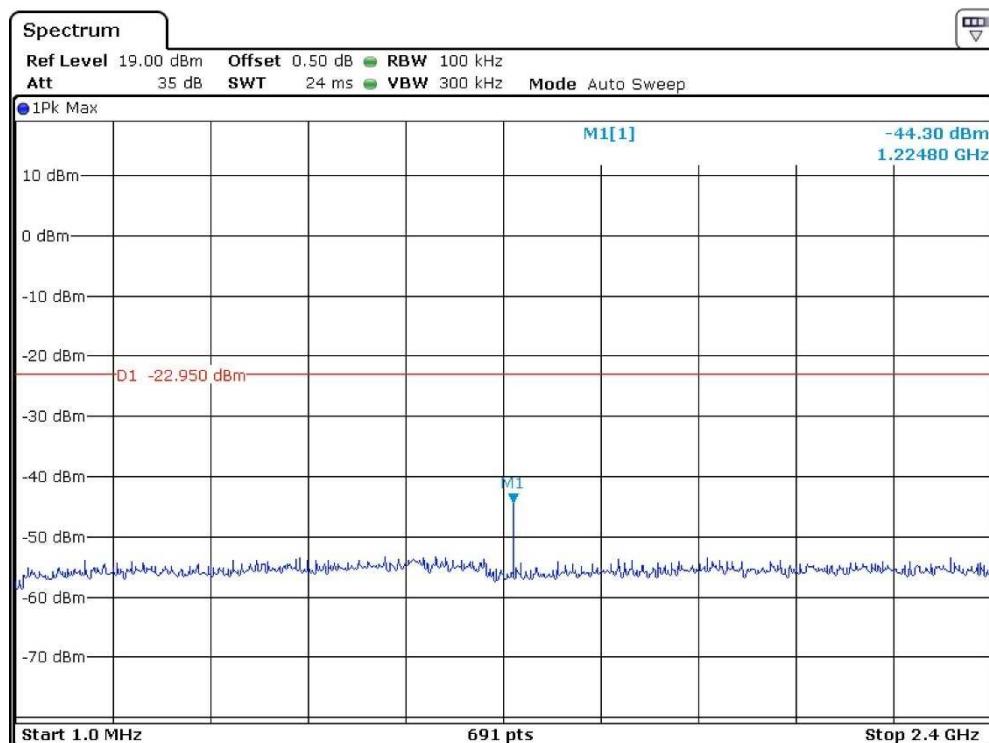

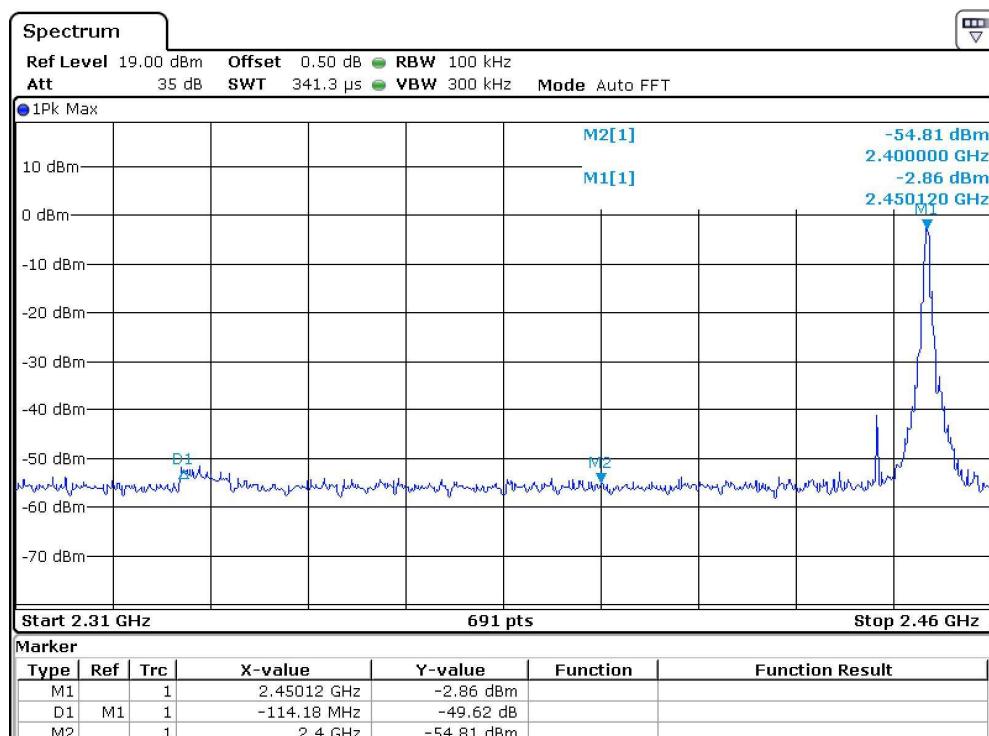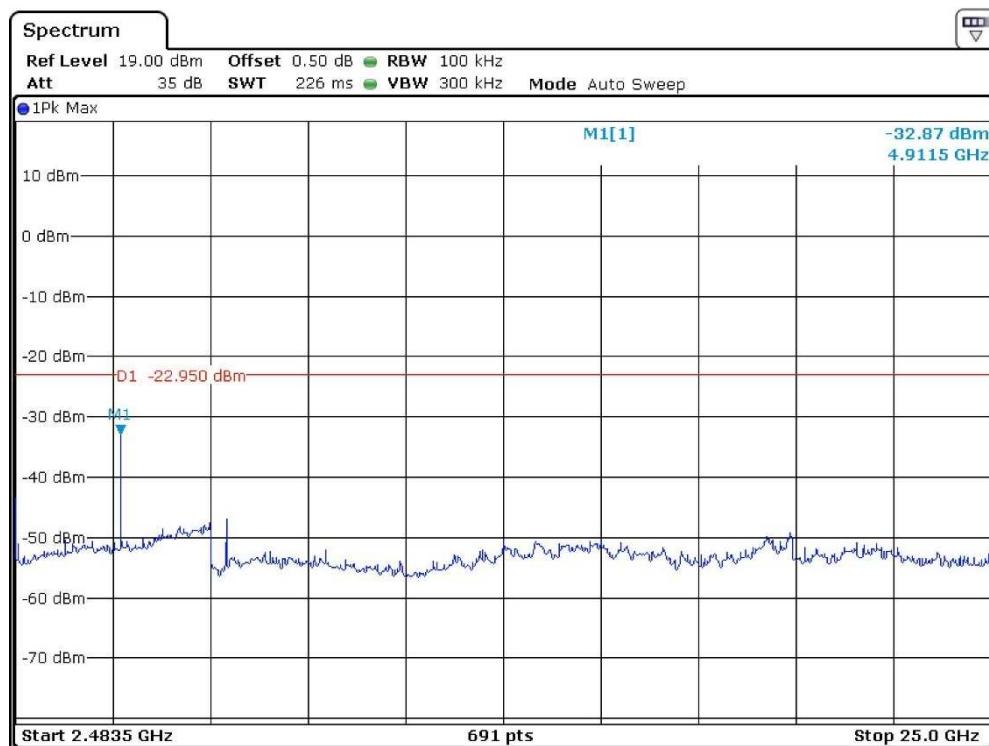

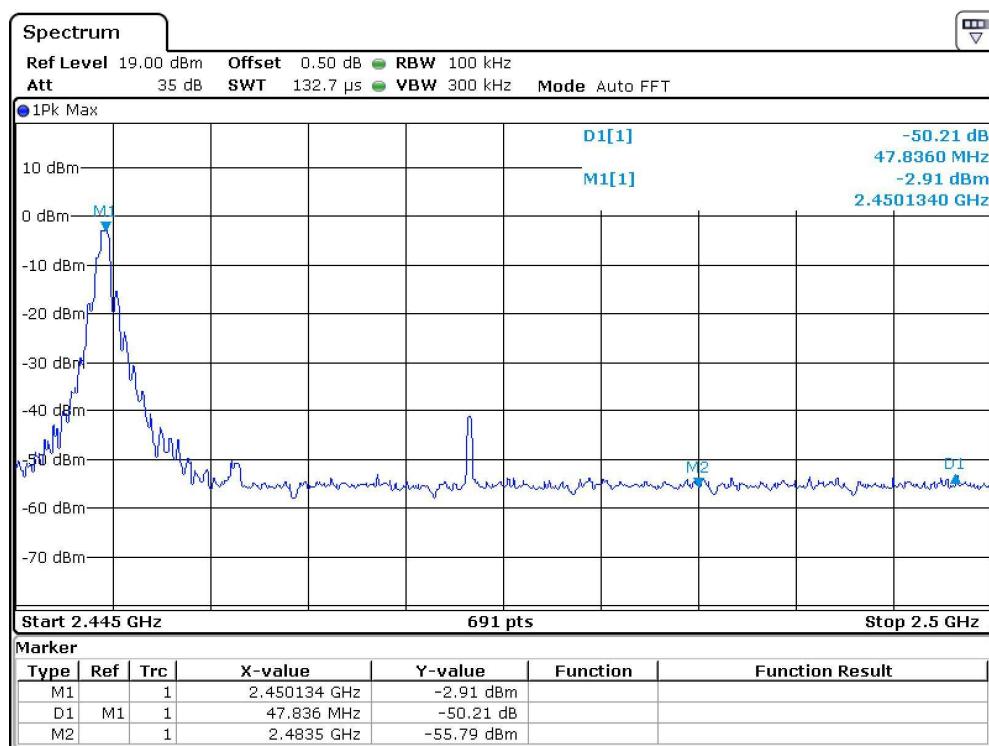

## 4.6 Out of Band Radiated Emissions

Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d).

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

#### 4.7 Duty Cycle

Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c).

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

|   |   |
|---|---|
|   | See attached spectrum analyzer chart (s) for Transmitter timing |
|   | See Transmitter timing diagram provided by manufacturer         |
| x | Not applicable, duty cycle was not used.                        |

## 5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

## 6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## 7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

### 9.1 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, Spectrum Analysis ... Pulsed RF.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

### 9.2 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.2.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz with RBW 9KHz used.

**10 Test Equipment List**

| Equipment No. | Equipment           | Manufacturer    | Model No.    | Serial No. | Cal. Date   | Due Date    |
|---------------|---------------------|-----------------|--------------|------------|-------------|-------------|
| SZ182-02      | RF Power Meter      | Anritsu         | ML2496A      | 1302005    | 28-May-2019 | 28-May-2020 |
| SZ182-02-01   | Power Sensor        | Anritsu         | MA2411B      | 1207429    | 28-May-2019 | 28-May-2020 |
| SZ061-12      | BiConiLog Antenna   | ETS             | 3142E        | 00166158   | 14-Sep-2018 | 14-Sep-2020 |
| SZ185-01      | EMI Receiver        | R&S             | ESCI         | 100547     | 04-Jan-2019 | 04-Jan-2020 |
| SZ061-08      | Horn Antenna        | ETS             | 3115         | 00092346   | 24-Aug-2019 | 24-Aug-2021 |
| SZ061-06      | Active Loop Antenna | Electro-Metrics | EM-6876      | 217        | 24-May-2019 | 24-May-2020 |
| SZ056-03      | Spectrum Analyzer   | R&S             | FSP 30       | 101148     | 28-May-2019 | 28-May-2020 |
| SZ056-06      | Signal Analyzer     | R&S             | FSV 40       | 101101     | 28-May-2019 | 28-May-2020 |
| SZ181-04      | Preamplifier        | Agilent         | 8449B        | 3008A02474 | 05-Jul-2019 | 05-Jul-2020 |
| SZ188-01      | Anechoic Chamber    | ETS             | RFD-F/A-100  | 4102       | 15-Dec-2018 | 15-Dec-2020 |
| SZ062-02      | RF Cable            | RADIALL         | RG 213U      | --         | 10-Jun-2019 | 10-Jun-2020 |
| SZ062-05      | RF Cable            | RADIALL         | 0.04-26.5GHz | --         | 10-Jun-2019 | 10-Jun-2020 |
| SZ062-12      | RF Cable            | RADIALL         | 0.04-26.5GHz | --         | 10-Jun-2019 | 10-Jun-2020 |
| SZ067-04      | Notch Filter        | Micro-Tronics   | BRM50702-02  | --         | 05-Jun-2018 | 05-Jun-2020 |

\*\*\*\*\* End of Report\*\*\*\*\*