


Powerworks™

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A




Intertek
2001124

CONFORMS TO
UL STD. 60065
CERTIFIED TO
CAN/CSA STD.
C22.2 NO.60065



NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

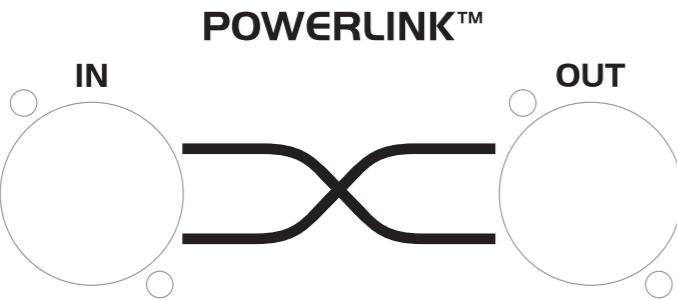

CHARGING


BATTERY LEVEL



POWER
ON



OFF



AC 120V~60Hz 80W
FUSE: T1A L 250V

MODEL: PW40BATBT

Powerworks™

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A




N13839 Z494



NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

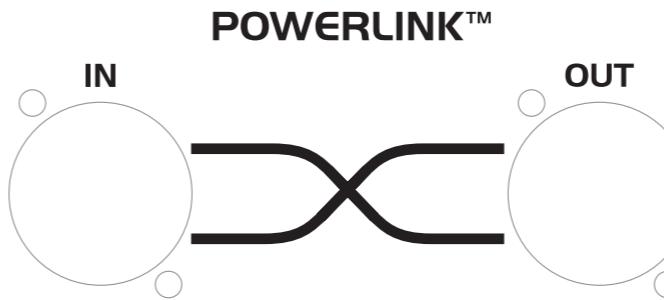

CHARGING

BATTERY LEVEL



POWER
ON



OFF



AC 240V~50Hz 80W
FUSE: T630mA L 250V

MODEL: PW40BATBT

名称: PW40BATBT 后面板丝印
丝印颜色: 白色;
底色: 黑色(喷塑颜色).

KUSTOM®





CONFORMS TO
UL STD. 60065
CERTIFIED TO
CAN/CSA STD.
C22.2 NO.60065



NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID:2AAVGHMG1406A
IC:11349A-HMG1406A

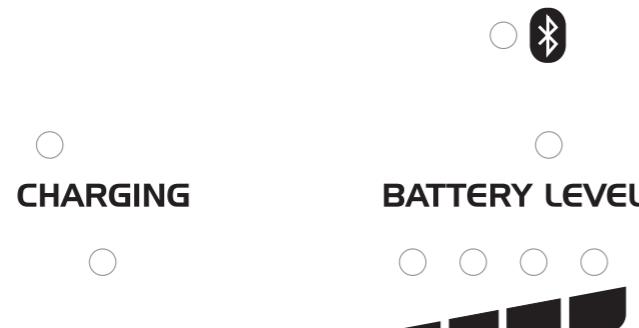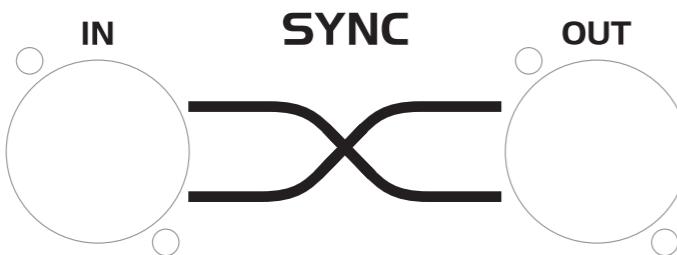

AC 120V~60Hz 80W
FUSE: T1A L 250V

MODEL:PA40BATBT

KUSTOM®

N13839
Z494





NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Apparatet må tilkoples jordet stikkontakt
Apparaten skall anslutas till jordat uttag
Laite on liitetävä suojakoskettimilla varustettuun pistorasiaan

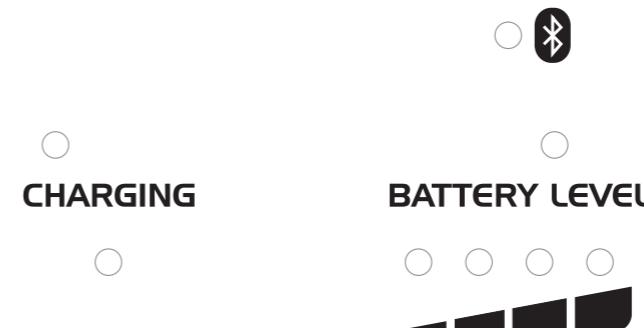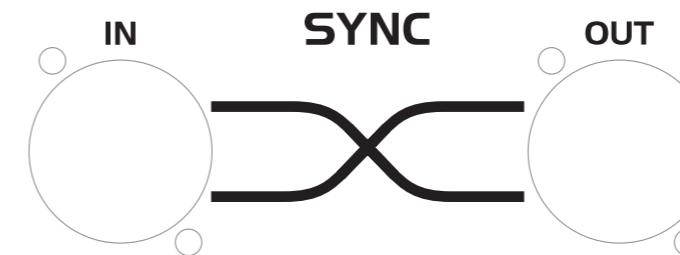

AC 240V~50Hz 80W
FUSE: T630mA L 250V


MODEL:PA40BATBT

名称: PA40BATBT后面板丝印

丝印颜色: 白色;



底色: 黑色(喷塑颜色).

后面板尺寸: 同PW40BATBT后面板

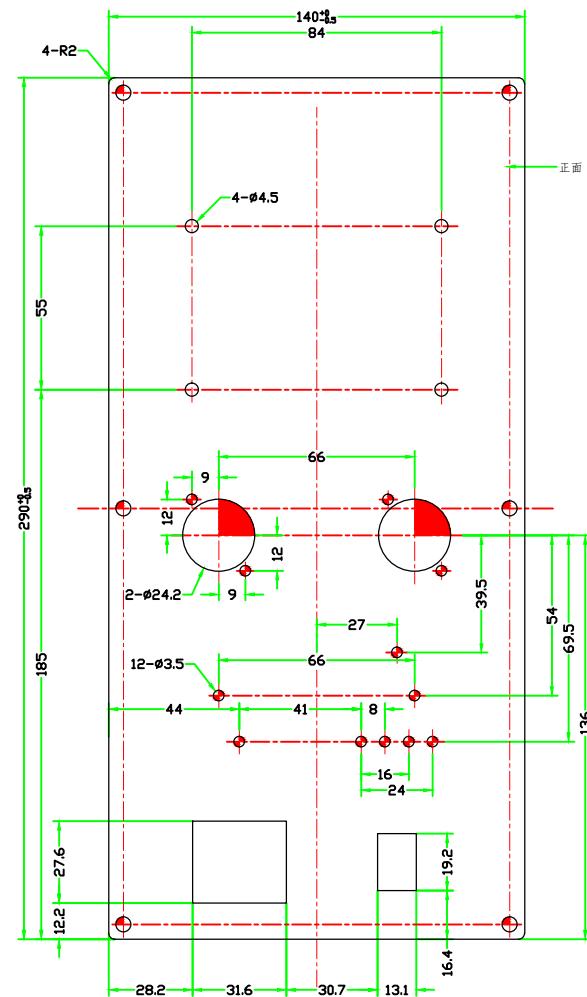

技术要求:

- 1、整体平整不得扭曲;
- 2、毛刺不大于0.1mm, 不允许刮手;
- 3、工艺圆角R0.5mm;
- 4、喷塑表面要均匀、无杂质;
- 5、正面丝印, 丝印内容另附电子文档;
- 6、未注公差按±0.1mm执行。

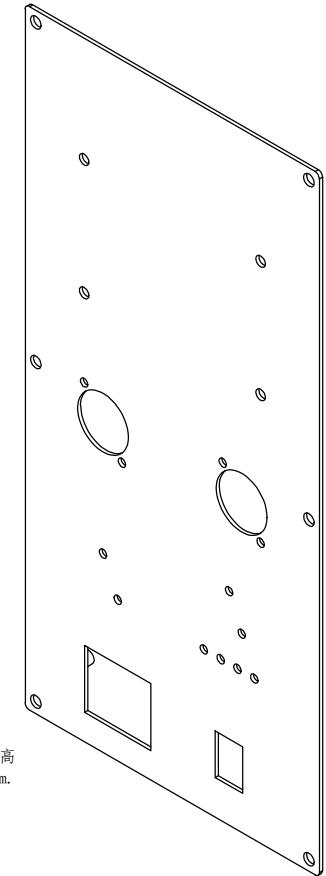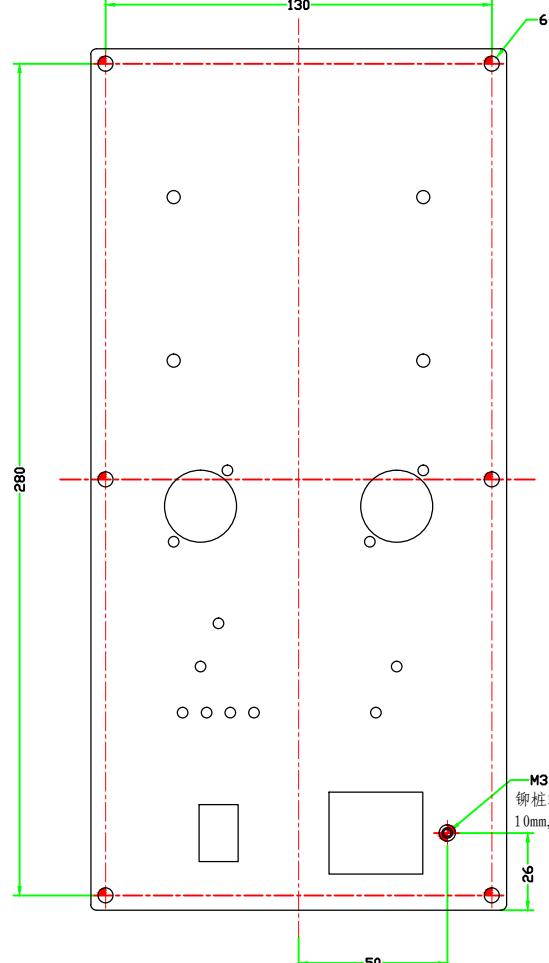

镀涂	内外表面喷黑塑, 但是铆栓端面及螺纹孔内不允许喷塑		
PW40BATBT 后面板			
更改标记	数量	更改单号	签名 日期
设计	张亚林	2013-11-01	
审核			
工艺			
标准化			
批准			
材料: 镀锌板, 厚度为1.5mm			杭州柯斯顿音响有限公司
第	张	共	张

旧底图总号

底图总号

日期 签名

格式 ()

制图:

描图:

幅面: