



CONFORMS TO  
UL STD. 60065  
CERTIFIED TO  
CAN/CSA STD.  
C22.2 NO.60065


FCC ID: 2AAVGHMG1410A IC: 11349A-HMG1410A



NO USER SERVICEABLE PARTS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


## PW150TFXBT

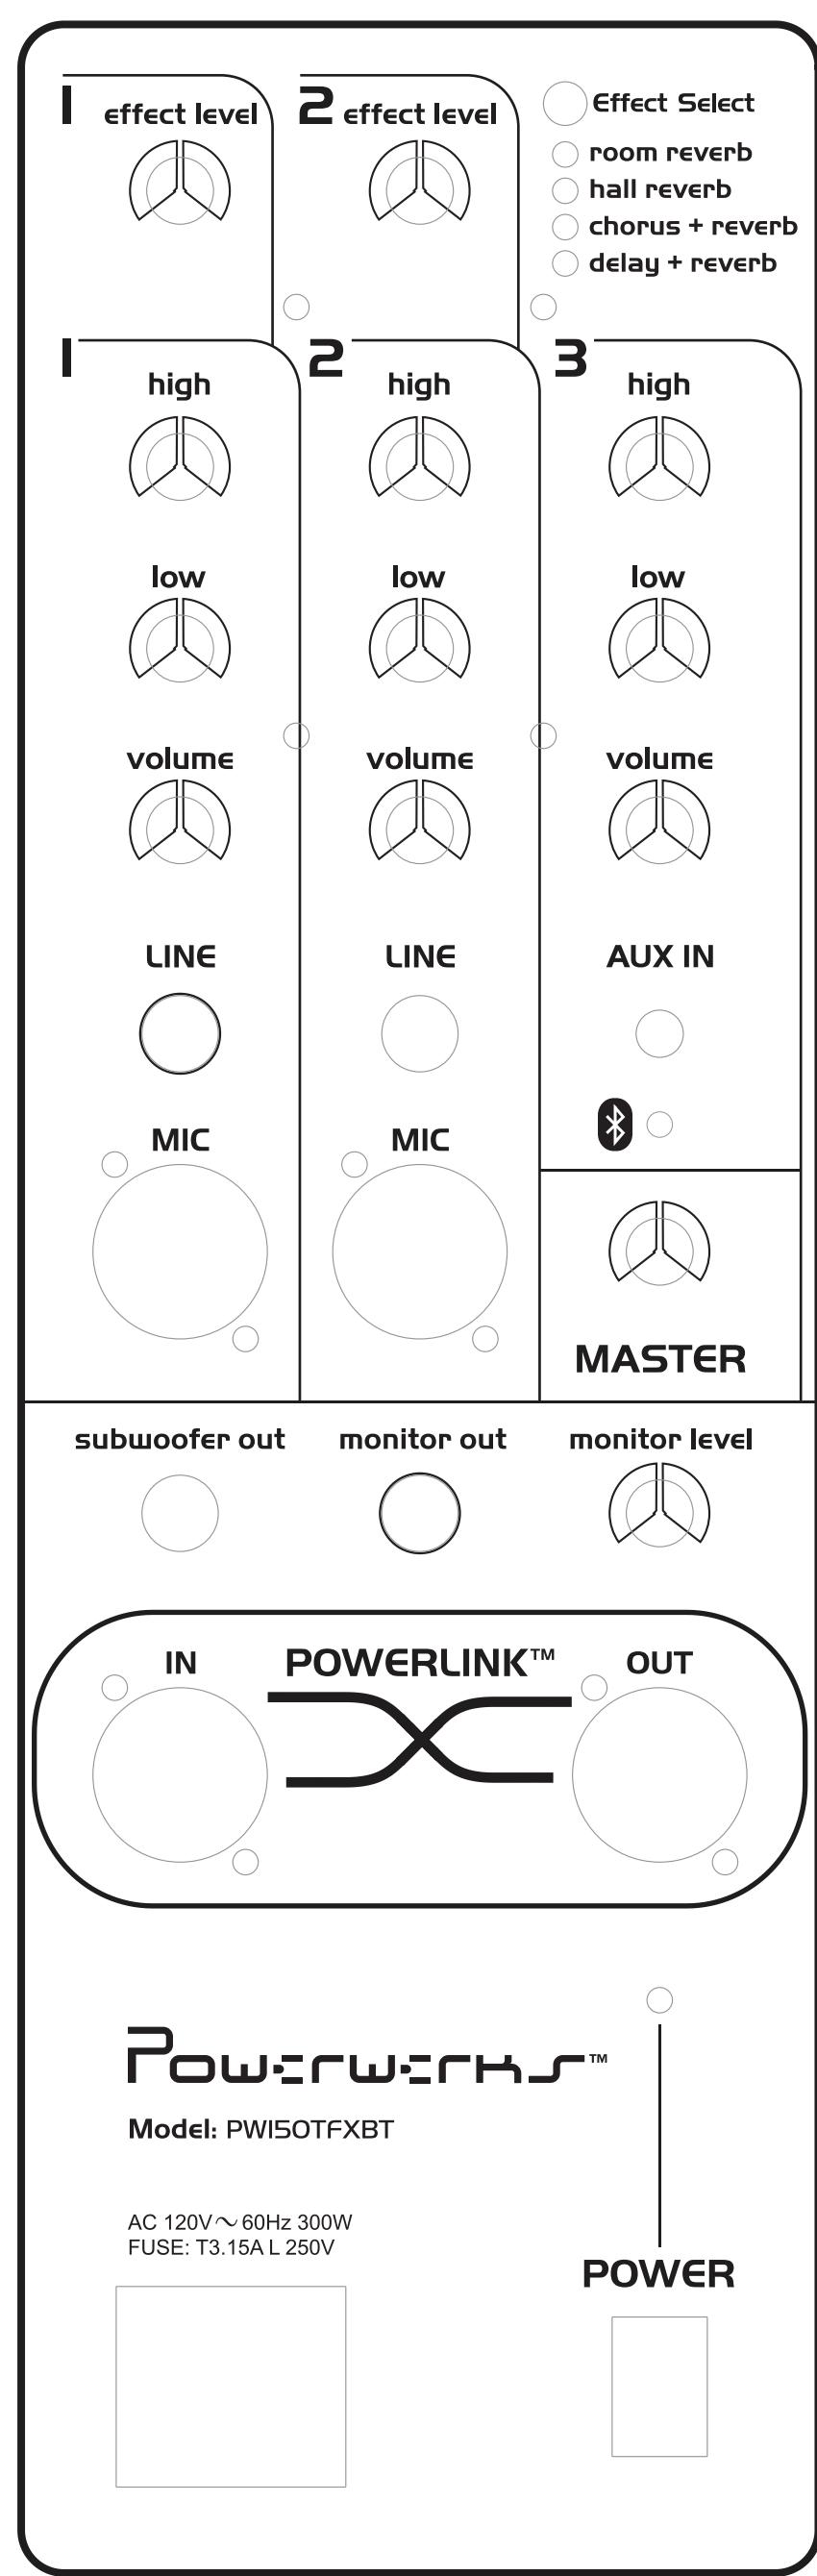



NO USER SERVICEABLE PARTS

Apparaten må tilkoples jordet stikkontakt  
Apparaten skall anslutas till jordat uttag  
Laite on liitetävä suojakoskettimilla varustettuun pistorasiaan


## PW150TFXBT

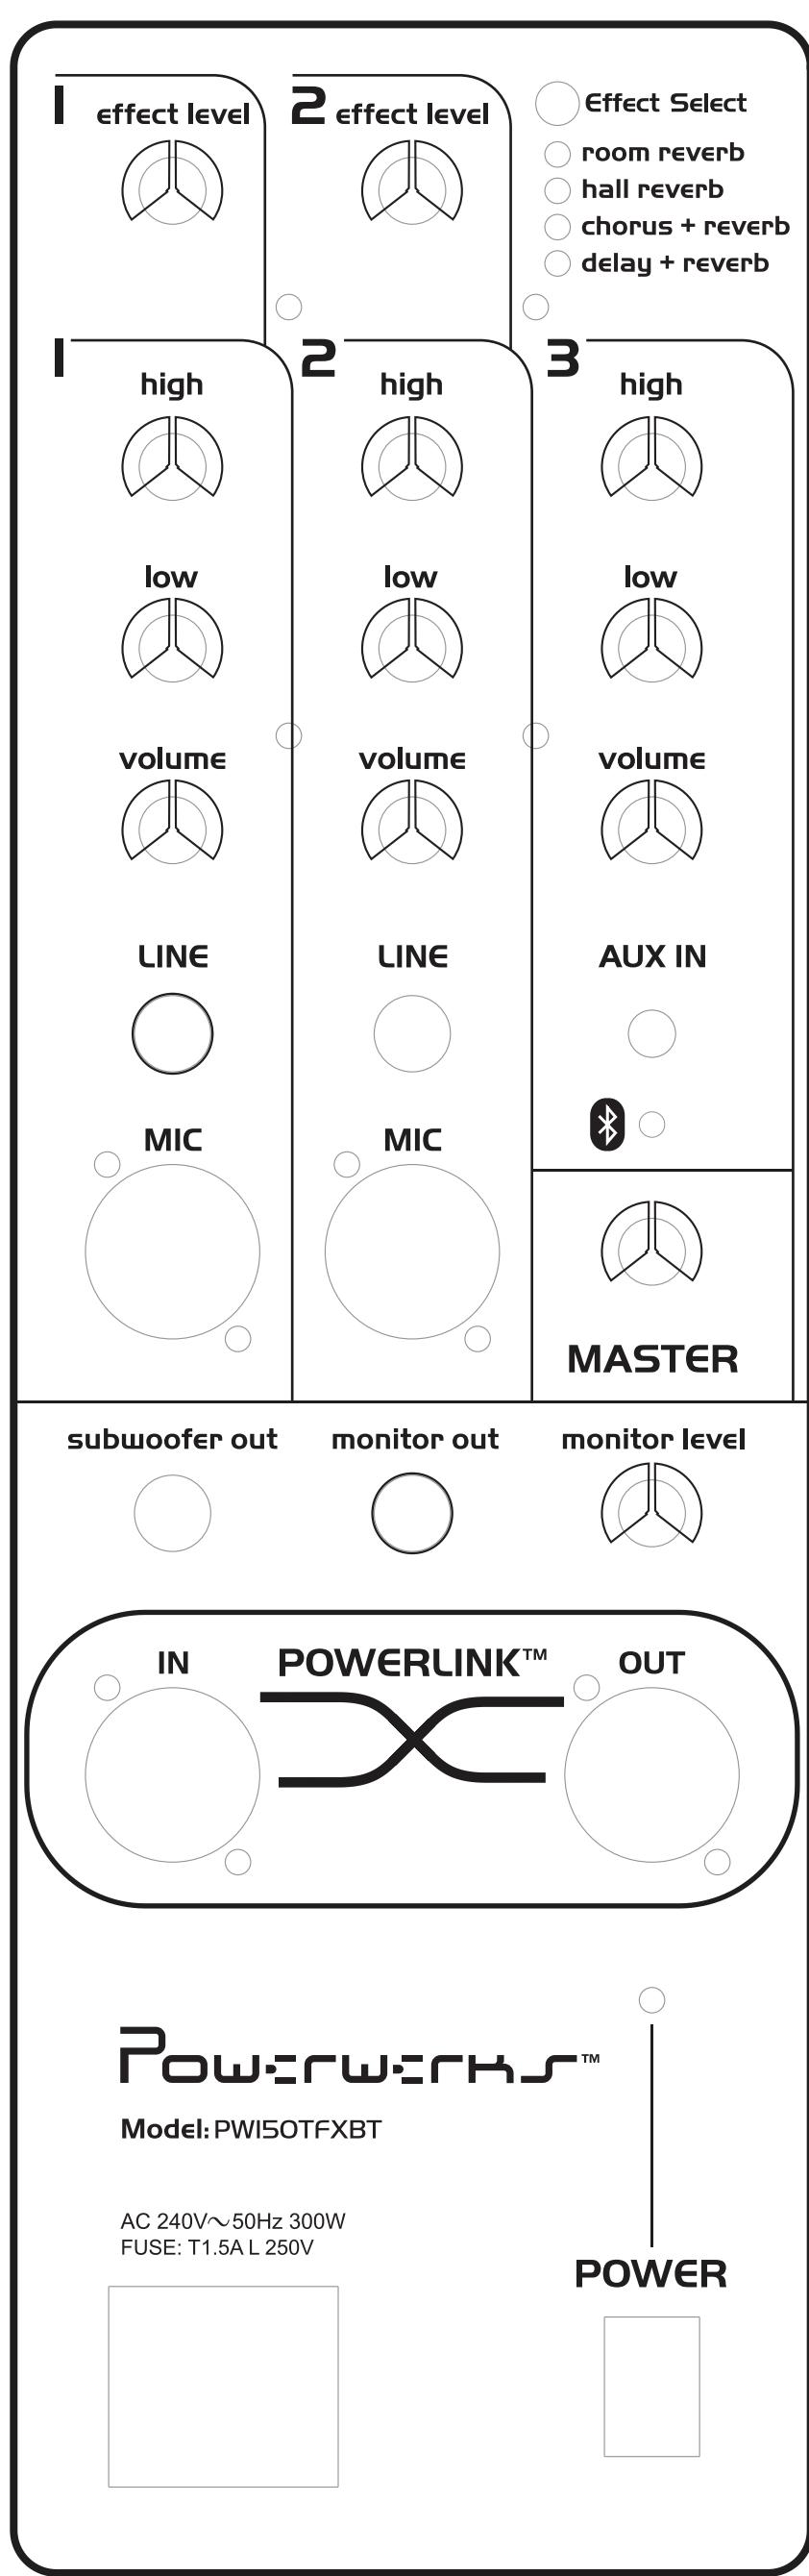

名称: PW150TFXBT输入面板丝印  
丝印颜色: 白色;  
底色: 黑色(喷塑)。

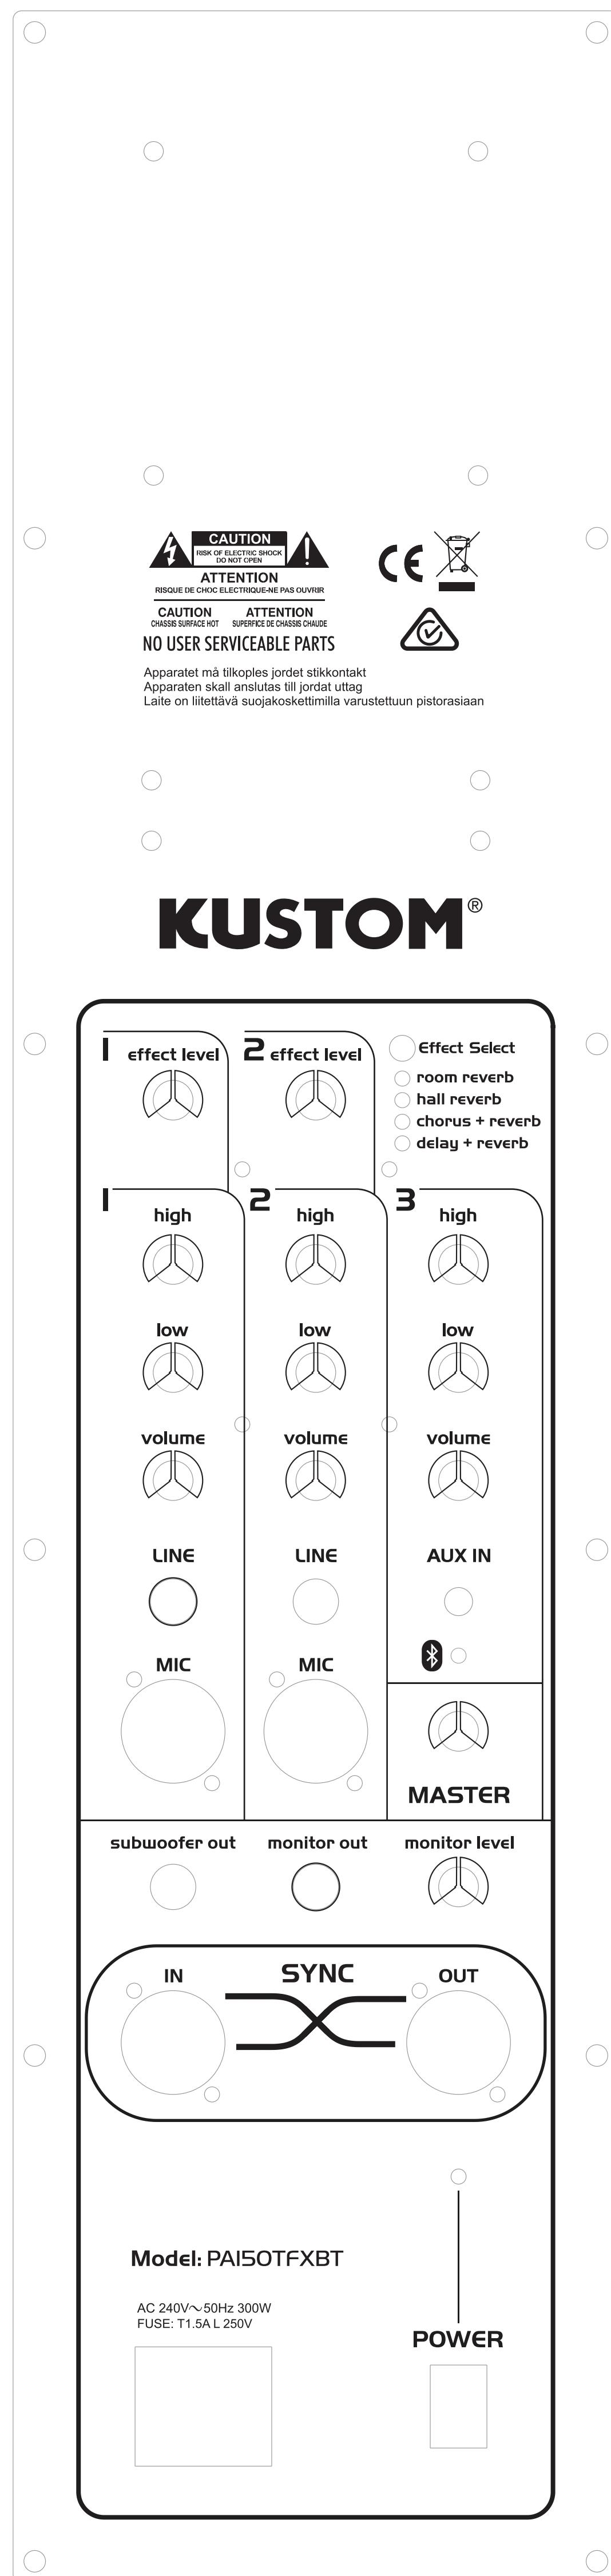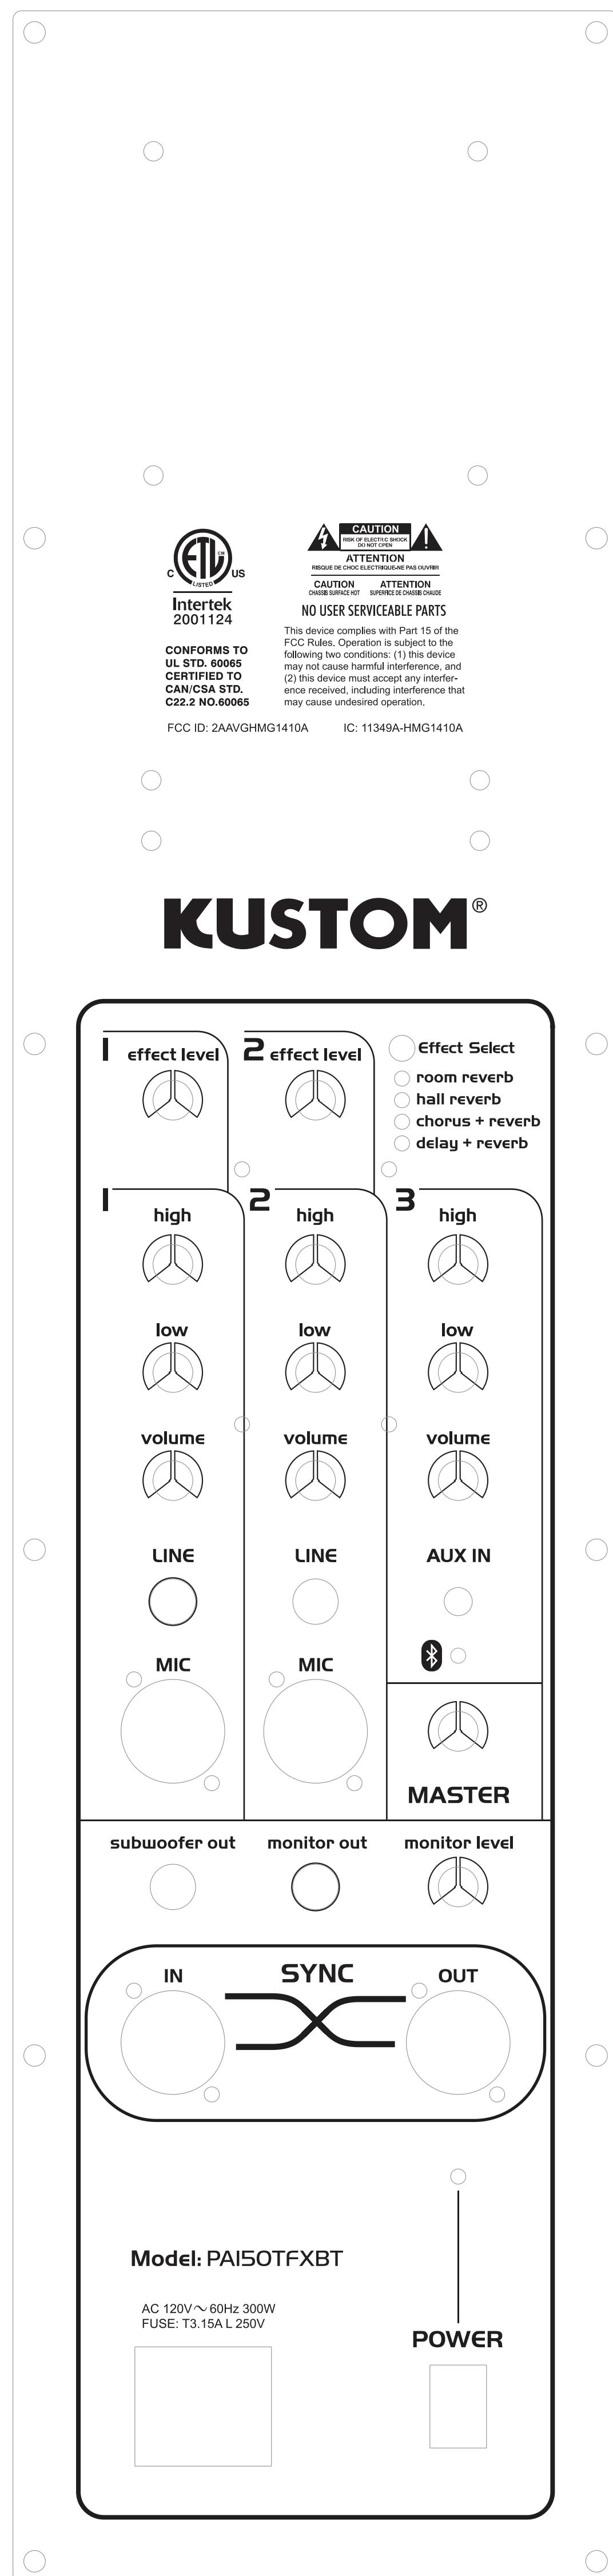


名称: PA150TFXBT输入面板丝印  
丝印颜色: 白色;  
底色: 黑色(喷塑)。  
输入面板尺寸: 同PW150TFXBT输入面板

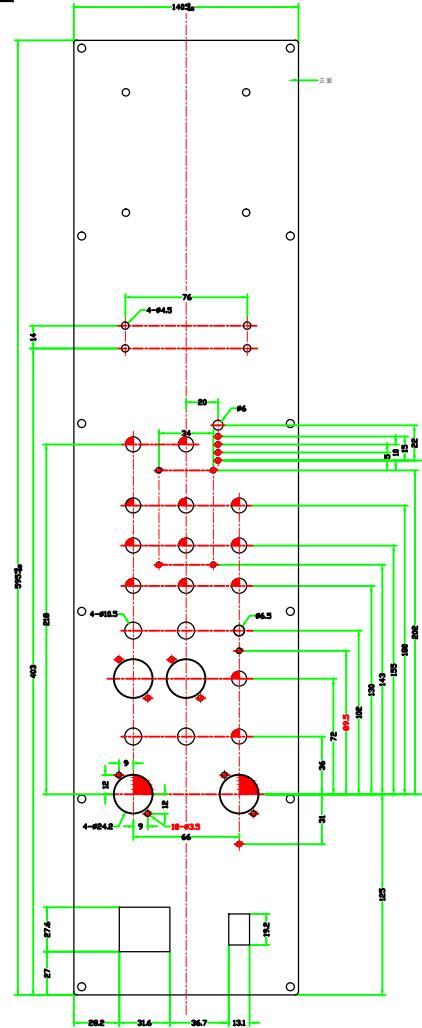

### 技术要求:

- 1、整体平整不得扭曲；
  - 2、毛刺不大于0.1mm, 不允许刮手；
  - 3、工艺圆角R0.5mm；
  - 4、喷塑表面要均匀、无杂质；
  - 5、正面丝印，丝印内容另附电子文档；
  - 6、未注公差按±0.1mm执行。

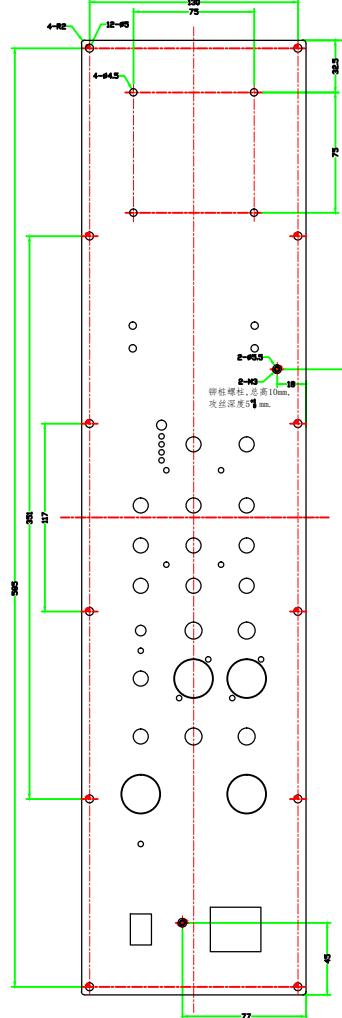

## 镀涂

内外表面喷塑(颜色及效果见丝印文件),但是铁壳反面4-Φ10.5mm孔周围Φ20mm范围内不喷塑,铆栓端面及螺纹孔内不允许喷塑

更改标记	数量	更改单号	签名	日期
设计	张亚林	2013-11-27		
审核				
工艺				
标准化				
批准				

## PW150TFXBT/PA150TFXBT 输入面板

等级标记 质量 比例

--	--	--	--

## 第三章 世 界

材料: 镀锌板, 厚度为1.5mm

杭州柯斯顿音响有限公司