

Shenzhen CTL Testing Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-26636041

## FCC PART 15 SUBPART C TEST REPORT

Report Reference No.: CTL1506181672-WF

Compiled by:

( position+printed name+signature)

Tested by: ( position+printed name+signature)

Approved by: ( position+printed name+signature)

Happy Guo (File administrators)

> Nice Nong (Test Engineer) Tracy Qi (Manager)

Product Name...... bluetooth speaker

Model/Type reference..... E-113

E-112, E-114, E-115, N-051, N-052, N-053, N-054, N-055, N-056, N-057, N-058, N-059, N-060, N-061, N-062, N-063, N-064, N-065, N-066, N-067, N-068, N-069, N-070, N-071, N-072, N-073, N-074, N-075, N-076, N-077, N-078, N-079, N-080, N-081, N-082, N-083,

N-084, N-085, N-086, N-087, N-088, N-089, N-090, N-091, N-092, N-093, N-094, N-095, N-096, N-097, N-098, N-099, N-100

Trade Mark..... N/A

List Model(s).....

FCC ID..... 2AAWDE-113

Applicant's name..... SHENZHEN NOVECO ELECTRONIC&TECHNOLOGY CO.,LTD

Floor 5, No.A5, North of Fenghuang Road, Fenghuang First Industry Address of applicant.....

Zone, Bao'an District, Shenzhen

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan Address of Test Firm.....

District, Shenzhen, China 518055

Test specification.....

FCC Part 15.249: Operation within the bands 920-928 MHz, 2400-Standard.....:

2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator..... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF...... Dated 2011-01

**Date of Receipt.....** June 18, 2015

Date of Test Date...... June 18, 2015 - June 30, 2015

Data of Issue...... June 30, 2015

Result.... Positive

### Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

V1.0

Page 2 of 50

### TEST REPORT

Test Report No. :	CTL1506181672-WF	June 30, 2015	
rest Report No	C1L1300101072-W1	Date of issue	

Equipment under Test : bluetooth speaker

Model /Type : E-113

Listed Models E-112, E-114, E-115, N-051, N-052, N-053, N-054, N-055, N-056,

N-057, N-058, N-059, N-060, N-061, N-062, N-063, N-064, N-065, N-066, N-067, N-068, N-069, N-070, N-071, N-072, N-073, N-074, N-075, N-076, N-077, N-078, N-079, N-080, N-081, N-082, N-083, N-084, N-085, N-086, N-087, N-088, N-089, N-090, N-091, N-092,

Report No.: CTL1506181672-WF

N-093, N-094, N-095, N-096, N-097, N-098, N-099, N-100

Difference Description Only the color and model's name is different

Applicant : SHENZHEN NOVECO ELECTRONIC&TECHNOLOGY CO.,LTD

Address : Floor 5, No.A5, North of Fenghuang Road, Fenghuang First Industry

Zone, Bao'an District, Shenzhen

Manufacturer SHENZHEN NOVECO ELECTRONIC&TECHNOLOGY CO.,LTD

Address Floor 5, No.A5, North of Fenghuang Road, Fenghuang First Industry

Zone, Bao'an District, Shenzhen

<b>Test Result</b> according to the standards on page 4:	Positive	
--	----------	--

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# Report No.: CTL1506181672-WF

# **Contents**

TEST STANDARDS	4
SUMMARY	5
Equipment Under Test	5
Description of the Equipment under Test (EUT)	5
EUT operation mode	6
EUT configuration	6
Related Submittal(s) / Grant (s)	6
Modifications	6
TEST ENVIRONMENT	7
Address of the test laboratory	7
Test Facility	7
Environmental conditions	7
Configuration of Tested System	7
Statement of the measurement uncertainty	8
Equipments Used during the Test	9
KX NO THE	
TEST CONDITIONS AND RESULTS	10
Conducted Emissions Test	10
Fundamental Emissions	13
Transmitter Radiated Unwanted Emissions	14
Band Edge Measurement	30
Occupied Bandwidth Measurement	39
Occupied Bandwidth incasurement	
ANTENNA REQUIREMENT	41
TEST SETUP PHOTOS OF THE EUT	42
esting Tech	
EXTERNAL AND INTERNAL PHOTOS OF THE EUT	4 4

# 1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

**ANSI C63.10-2009** 



V1.0 Page 5 of 50 Report No.: CTL1506181672-WF

# 2. SUMMARY

## 2.1. Equipment Under Test

## Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz o 12 V DC o 24 V DC

Other (specified in blank below)

DC 3.7V from battery

# 2.2. Description of the Equipment under Test (EUT)

The EUT (bluetooth speaker) support Bluetooth function.

Name of EUT	bluetooth speaker
Model Number	E-113
Antenna Type	Internal
BT CE Operation frequency	2402MHz-2480MHz
BT Modulation Type	GFSK,8DPSK,π/4DQPSK(BT V3.0+EDR)
Bluetooth	Supported BT V3.0+EDR

### Channel List:

Orialine List.	F				F
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

V1.0 Page 6 of 50 Report No.: CTL1506181672-WF

### 2.3. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Bottom Channel Transmitting	1
TM2	Middle Channel Transmitting	1
TM3	Top Channel Transmitting	1
TM4	Charging and keeping TX	USB power by PC

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Remark: The worst case mode is TM1(1Mbps) reported for unwanted emission and band edge test.

## 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

o - supplied by the manufacturer

supplied by the lab

● Notebook PC Manufacturer : DELL

Model No.: PP18L

Technolo

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AAWDE-113 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

CZ Testing

### 2.6. Modifications

No modifications were implemented to meet testing criteria.

V1.0 Page 7 of 50 Report No.: CTL1506181672-WF

## 3. TEST ENVIRONMENT

## 3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 22/EN 55022 requirements.

## 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

## FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

### 3.3. Environmental conditions

	vironmental conditions were within	the listed ranges:
Temperature:	15-35 ° C	0
Humidity:	30-60 %	
Atmospheric pressure:	950-1050mbar	0

## 3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

	EUT	

# 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Report No.: CTL1506181672-WF

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



# 3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
ULTRA-ROADBAND ANTENNA	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	Daze	ZN30900A	N/A	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
ISN	FCC	F-071115- 1057-1-09	11229	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750 -O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10- 1375/U12750 -O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

V1.0 Page 10 of 50 Report No.: CTL1506181672-WF

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

### **TEST CONFIGURATION**

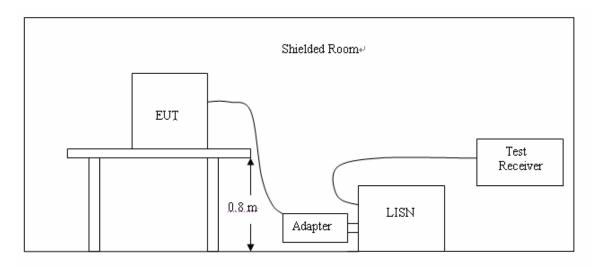

### **TEST PROCEDURE**

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2 Support equipment, if needed, was placed as per ANSI C63.10.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4 If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

The RBW/VBW for 150KHz to 30MHz: 9KHz

V1.0 Page 11 of 50 Report No.: CTL1506181672-WF

### **CONDUCTED POWER LINE EMISSION LIMIT**

For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following:


F=====================================	Maximum RF Line Voltage (dBμV)				
Frequency (MHz)	CLASS A		CLASS B		
(111112)	Q.P.	Ave.	Q.P.	Ave.	
0.15 - 0.50	79	66	66-56*	56-46*	
0.50 - 5.00	73	60	56	46	
5.00 - 30.0	73	60	60	50	

<sup>\*</sup> Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

### **TEST RESULTS**

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

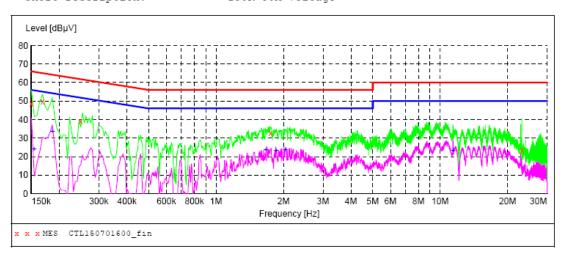

## MEASUREMENT RESULT: "CTL150701600\_fin"


7/1/2015 9:	51AM						
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	48.50	10.2	66	17.5	QP	L1	GND
0.168000	49.60	10.2	65	15.5	QP	L1	GND
0.249000	39.10	10.2	62	22.7	QP	L1	GND
1.747500	32.70	10.3	56	23.3	QP	L1	GND
23.122500	23.50	11.1	60	36.5	QP	L1	GND

### MEASUREMENT RESULT: "CTL150701600\_fin2"

9:51A	M.						
ency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4500	23.90	10.2	56	31.9	AV	L1	GND
6000	33.50	10.2	54	20.7	AV	L1	GND
6500	23.50	10.3	46	22.5	AV	L1	GND
5500	23.40	10.3	46	22.6	AV	L1	GND
0000	23.70	10.4	46	22.3	AV	L1	GND
3000	23.10	10.6	50	26.9	AV	L1	GND
	MHz 4500 6000 5500 5500	MHz dBμV 4500 23.90 6000 33.50 6500 23.50 5500 23.40 0000 23.70	Ency Level Transd dB μV dB 4500 23.90 10.2 6000 33.50 10.2 6500 23.50 10.3 6500 23.40 10.3 0000 23.70 10.4	Ency Level Transd Limit dBμV dB dBμV 4500 23.90 10.2 56 6000 33.50 10.2 54 6500 23.50 10.3 46 6500 23.40 10.3 46 60000 23.70 10.4 46	ency MHz         Level dBμV         Transd dB dBμV         Limit dB dBμV         Margin dB           4500         23.90         10.2         56         31.9           6000         33.50         10.2         54         20.7           6500         23.50         10.3         46         22.5           5500         23.40         10.3         46         22.6           0000         23.70         10.4         46         22.3	ency MHz         Level dBμV         Transd dB dBμV         Limit dB dBμV         Margin dB         Detector dB           4500         23.90         10.2         56         31.9         AV           6000         33.50         10.2         54         20.7         AV           6500         23.50         10.3         46         22.5         AV           5500         23.40         10.3         46         22.6         AV           0000         23.70         10.4         46         22.3         AV	ency MHz         Level dBμV         Transd dB dBμV         Limit dB dBμV         Margin dB         Detector Line dB           4500         23.90         10.2         56         31.9         AV         L1           6000         33.50         10.2         54         20.7         AV         L1           6500         23.50         10.3         46         22.5         AV         L1           5500         23.40         10.3         46         22.6         AV         L1           0000         23.70         10.4         46         22.3         AV         L1

# SCAN TABLE: "Voltage (9K-30M)FIN" Short Description: 150K-30M

150K-30M Voltage

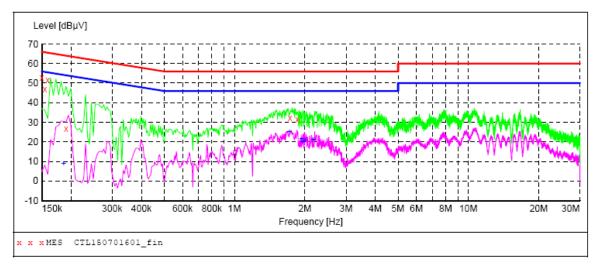

### MEASUREMENT RESULT: "CTL150701601\_fin"

7/1/2015	9:54AM							
Freque	ncy MHz	Level T dBµV	ransd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150	000	52.70	10.2	66	13.3	QP	N	GND
0.154	500	46.80	10.2	66	19.0	QP	N	GND
0.159	000	51.70	10.2	66	13.8	QP	N	GND
0.190	500	26.60	10.2	64	37.4	QP	N	GND
1.729	500	32.40	10.3	56	23.6	QP	N	GND
1.855	500	31.60	10.3	56	24.4	QP	N	GND


### MEASUREMENT RESULT: "CTL150701601 fin2"

-	ncy Lev	el Transd μV dB		Margin dB	Detector	Line	PE
0.186	000 8.	80 10.2	54	45.4	AV	N	GND
1.716	000 25.	10 10.3	46	20.9	AV	N	GND
1.936	500 21.	50 10.3	46	24.5	AV	N	GND
1.954	500 19.	90 10.3	46	26.1	AV	N	GND
2.004	000 20.	60 10.4	46	25.4	AV	N	GND
2.175	000 21.	20 10.4	4.6	24.8	ΔV	N	GND

V1.0 Page 13 of 50 Report No.: CTL1506181672-WF

## 4.2. Fundamental Emissions

### **TEST CONFIGURATION**

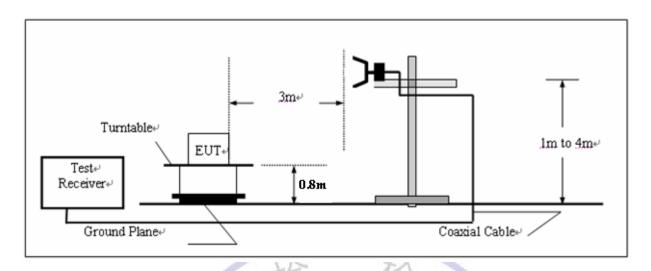

### **Fundamental Emissions Limit**

2400-2483.5 MHz Band: 94 dBuV/m (average)

For the transmitter emissions shall be measured using following options below:

Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a "duty Cycle correction factor", derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).

Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.

## **TEST RESULTS**

	Field Strength of Fundamental Emissions Result											
Modulation	Frequency	Max.Fundamental	Limit	Type								
Mode	(MHz)	(dBuV/m)@3m	(dB)	(dBuV/m)@3m								
GFSK	2402	92.33	21.67	114	peak							
GFSK	2402	75.26	18.74	94	average							
GFSK	2441	91.94	22.06	114	peak							
GFSK	2441	75.10	18.90	94	average							
GFSK	2480	91.72	22.28	114	peak							
GFSK	2480	74.81	19.19	94	average							


Note: Measurement worst emissions of receive antenna polarization: Vertical.

V1.0 Page 14 of 50 Report No.: CTL1506181672-WF


## 4.3. Transmitter Radiated Unwanted Emissions

## **TEST CONFIGURATION**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

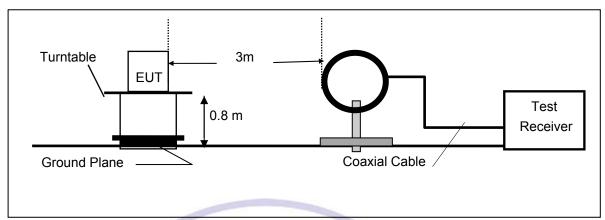

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

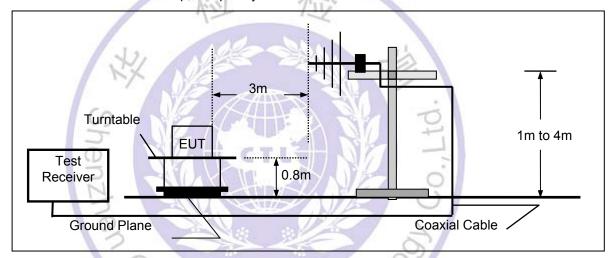

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

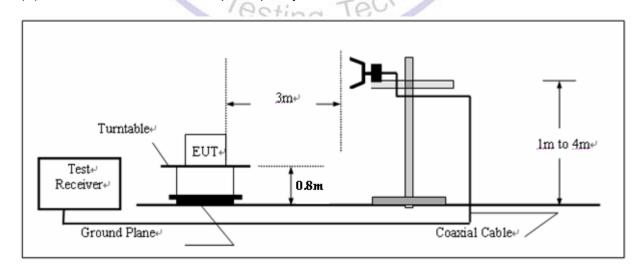

V1.0 Page 15 of 50 Report No.: CTL1506181672-WF

### FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

### **RADIATION LIMIT**

For unintentional device, according to § 15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500
10		100	

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until the measurements for all frequencies are complete.
- 7. Based on the Frequency Generator in the device include 26MHz. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

### Note:


Three axes are chosen for pretest, the Y axis is the worst mode for final test. For battery operated equipment, the equipment tests shall be performed using a new battery.


V1.0 Page 16 of 50 Report No.: CTL1506181672-WF

### **TEST RESULTS**

All the test modes (TM1, TM2, TM3 and TM4) completed for test. The worst case of Radiated Emission is TM1; the test data of this mode was reported.

Below 1GHz Test Results:



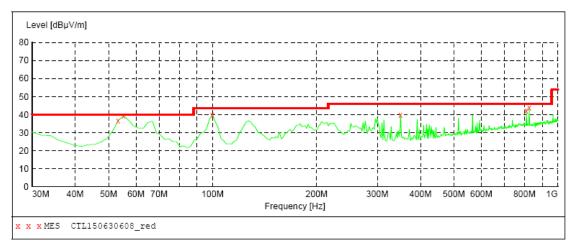

### MEASUREMENT RESULT: "CTL150630608\_red"


6/30/2015 7:2	20PM							
Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	36.70	8.3	40.0	3.3		0.0	0.00	HORIZONTAL
55.220000	39.30	8.3	40.0	0.7		0.0	0.00	HORIZONTAL
99.840000	39.90	11.5	43.5	3.6		0.0	0.00	HORIZONTAL
350.100000	39.80	16.9	46.0	6.2		0.0	0.00	HORIZONTAL
809.880000	42.10	24.9	46.0	3.9		0.0	0.00	HORIZONTAL
825.400000	43.90	25.1	46.0	2.1		0.0	0.00	HORIZONTAL

### Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

#### SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

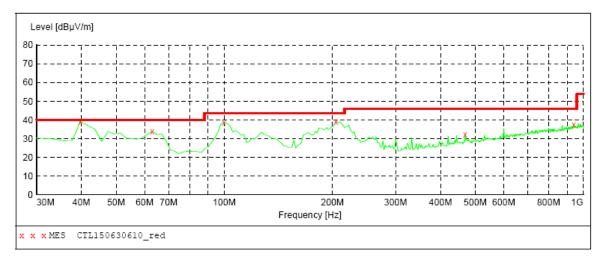

### MEASUREMENT RESULT: "CTL150630610\_red"

6/30/2015 7:3	32PM							
Frequency MHz	Level dBµV/m		Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.700000	39.10	13.9	40.0	0.9		0.0	0.00	VERTICAL
62.980000	33.90	8.4	40.0	6.1		0.0	0.00	VERTICAL
99.840000	38.50	11.5	43.5	5.0		0.0	0.00	VERTICAL
204.600000	38.90	14.4	43.5	4.6		0.0	0.00	VERTICAL
468.440000	32.20	19.8	46.0	13.8		0.0	0.00	VERTICAL
939.860000	37.50	26.5	46.0	8.5		0.0	0.00	VERTICAL

### Remark:


- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Testing Technic

V1.0 Page 18 of 50 Report No.: CTL1506181672-WF

## **Above 1 GHz Test Results:**

## Bottom Channel (2402MHz):

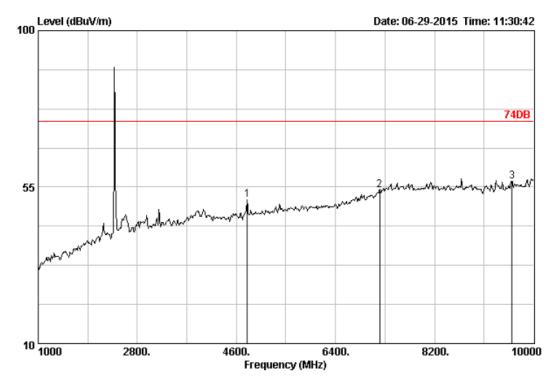

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :


Data no. : 1677

Ant. pol. : HORIZONTAL

		Ant.	Cable	Amp		Emission			
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBu∀/m)	(dBu∀/m)	(dB)	
1	4798.00	33.44	6.90	34.35	45.31	51.30	74.00	22.70	Peak
2	7206.00	36.92	9.18	35.03	42.99	54.06	74.00	19.94	Peak
3	9608.00	38.53	10.97	35.99	43.10	56.61	74.00	17.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.



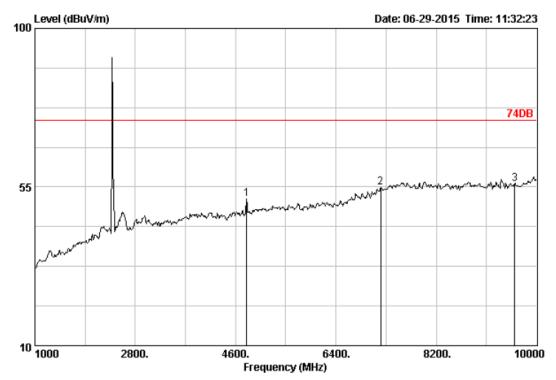

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 1678 Ant. pol. : VERTICAL

		Ant.	Cable	Amp		Emission	n .		
	Freq.	Factor	Loss	Factor	Reading	g Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBu∀/m)	)(dBu∀/m)	(dB)	
1	4798.00	33.44	6.90	34.35	45.68	51.67	74.00	22.33	Peak
2	7206.00	36.92	9.18	35.03	43.72	54.79	74.00	19.21	Peak
3	9608.00	38.53	10.97	35.99	42.35	55.86	74.00	18.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

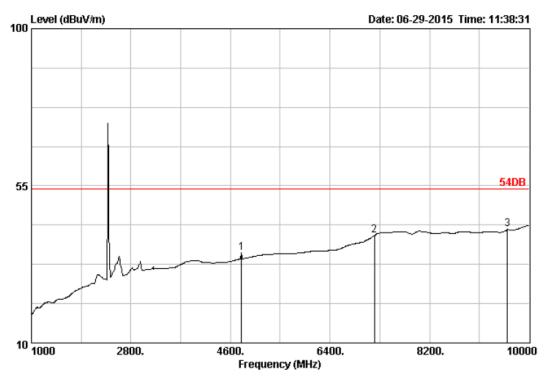

Data no. : 1680

Ant. pol. : HORIZONTAL

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 54DB

Env. / Ins. : 23\*C/54% Engineer :

EUT :
Power :
M/N :
Test Mode :

	Freq. (MHz)	Factor	Cable Loss (dB)	Factor	Reading	Emission g Level (dBu∀/m)	Limits	_	Remark
1 2 3	4798.00 7206.00 9608.00	36.92	9.18	34.35 35.03 35.99	29.77	35.74 40.84 42.50	54.00 54.00 54.00	18.26 13.16 11.50	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

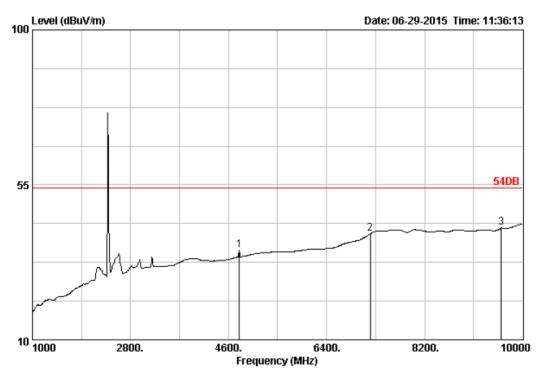

Data no. : 1679

Ant. pol. : VERTICAL

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23\*C/54%


Engineer :
EUT :
Power :
M/N :
Test Mode :

	Freq. (MHz)	Factor			Reading	Emission Level (dBuV/m)		_	Remark
1 2 3	4798.00 7206.00 9608.00	36.92	9.18	34.35 35.03 35.99	29.76	36.07 40.83 42.50	54.00 54.00 54.00	17.93 13.17 11.50	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

V1.0 Page 22 of 50 Report No.: CTL1506181672-WF

## Middle Channel(2441 MHz):

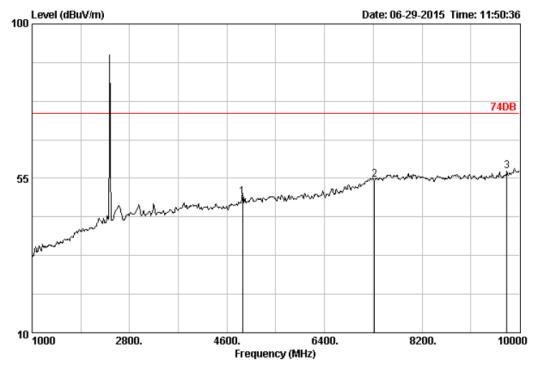

Site no. : 3m Chamber Data no. : 1684


Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

		Ant.	Cable	Amp		Emission	1		
	Freq.	Factor	Loss	Factor	Reading	g Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBu∀/m)	(dBu∀/m)	(dB)	
1	4882.00	33.60	6.95	34.30	43.46	49.71	74.00	24.29	Peak
2	7323.00	37.46	9.23	35.00	42.94	54.63	74.00	19.37	Peak
3	9764.00	38.67	11.04	35.68	43.11	57.14	74.00	16.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

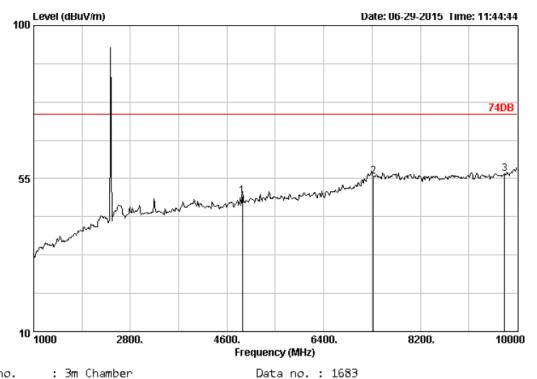

Ant. pol. : VERTICAL

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer : EUT : Power : M/N : Test Mode :

		Ant.	Cable	Amp		Emission	1		
	Freq.	Factor	Loss	Factor	Reading	g Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBu∀/m)	(dBu∀/m)	(dB)	
1	4882.00	33.60	6.95	34.30	43.49	49.74	74.00	24.26	Peak
2	7323.00	37.46	9.23	35.00	43.92	55.61	74.00	18.39	Peak
3	9764.00	38.67	11.04	35.68	42.39	56.42	74.00	17.58	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



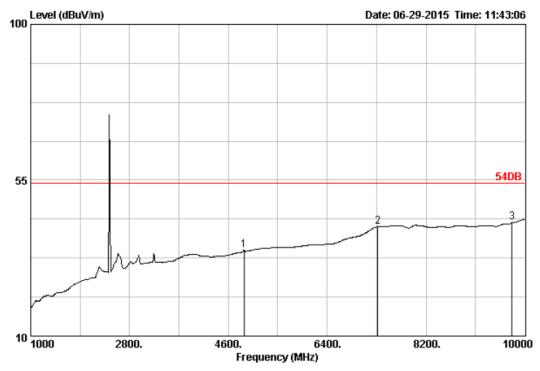

Data no. : 1682


Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

: 54DB Limit Env. / Ins. : 23\*C/54%

Engineer EUT Power MZN Test Mode :

	Freq. (MHz)	Factor		Factor	Reading		Limits (dBuV/m)	_	Remark
_	4882.00 7323.00 9764.00	37.46	9.23	34.30 35.00 35.68	29.86	34.72 41.55 42.83		19.28 12.45 11.17	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

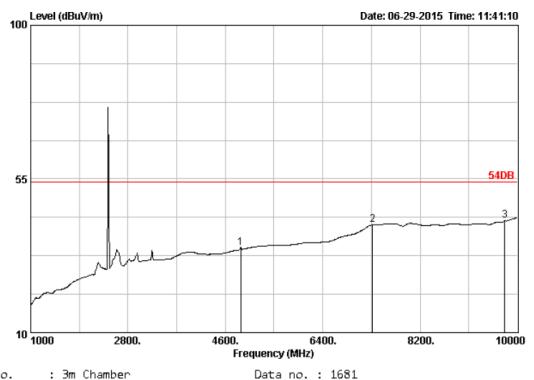

Ant. pol. : VERTICAL

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 54DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

	Freq. (MHz)			Factor	Reading	_	n Limits )(dBuV/m)	_	Remark
1 2 3	4882.00 7323.00 9764.00	37.46	9.23		28.53 29.86 28.80	34.78 41.55 42.83	54.00 54.00 54.00	19.22 12.45 11.17	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

## Top Channel (2480MHz):

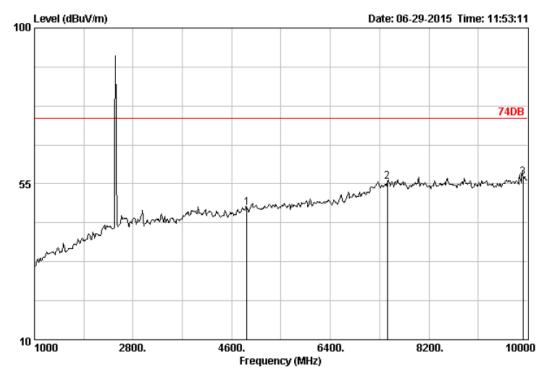

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23\*C/54%


Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 1686

Ant. pol. : HORIZONTAL

	Freq. (MHz)	Factor	Loss	Factor	Reading	_	n Limits )(dBuV/m)	_	Remark
_	4880.00 7440.00 9920.00	37.64	9.28	34.97	43.62			25.82 18.43 17.10	Peak Peak Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

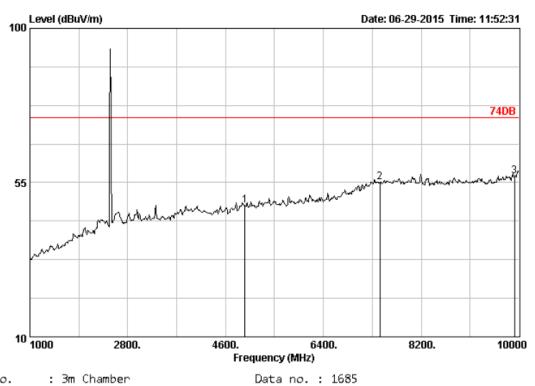

Ant. pol. : VERTICAL


Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Freq. Factor (MHz) (dB/m)			_		_	Remark
1 4960.00 33.86 2 7440.00 37.64 3 9920.00 38.90	9.28	34.97	43.05	55.00	 25.72 19.00 17.11	Peak Peak Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

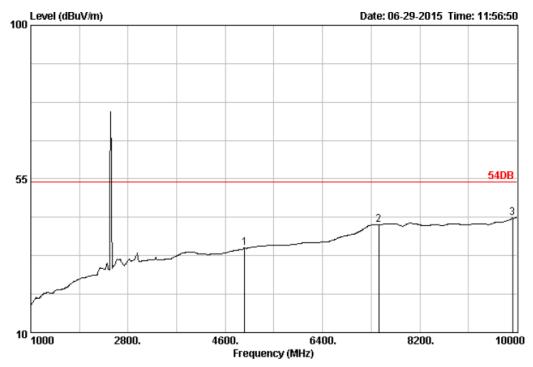

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118


Limit : 54DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 1688 Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)		Factor	Reading	_	limits (dBuV/m)	_	Remark
1 2 3	4960.00 7440.00 9920.00	37.64	9.28		28.21 29.73 28.86	34.83 41.68 43.49		19.17 12.32 10.51	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

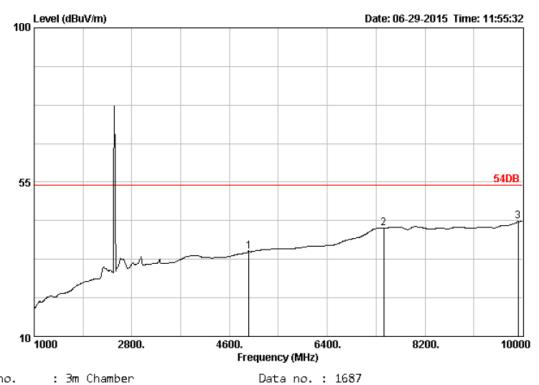

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Ant. pol. : VERTICAL

	Freq. (MHz)	Ant. Factor (dB/m)		Factor	Reading		Limits (dBuV/m)	_	Remark
1 2 3	4960.00 7440.00 9920.00	37.64	7.01 9.28 11.10	34.97	29.72	34.91 41.67 43.48	54.00 54.00 54.00	19.09 12.33 10.52	Average Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. The emission levels that are 20dB below the official limit are not reported.

Note: above 10GHz up to 25GHz was verified, and no any emission was found except system noise floor.

V1.0 Page 30 of 50 Report No.: CTL1506181672-WF

### 4.4. Band Edge Measurement

### **TEST CONFIGURATION**

Same as Section 4.2

### **TEST PROCEDURE**

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1 MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 1 MHz and VBM to 3 MHz, to measure the conducted peak band edge.

### **LIMIT**

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.




V1.0 Page 31 of 50 Report No.: CTL1506181672-WF

### **Radiated Test:**

Operation Mode: TX on Bot Channel

Polarity: Hor.

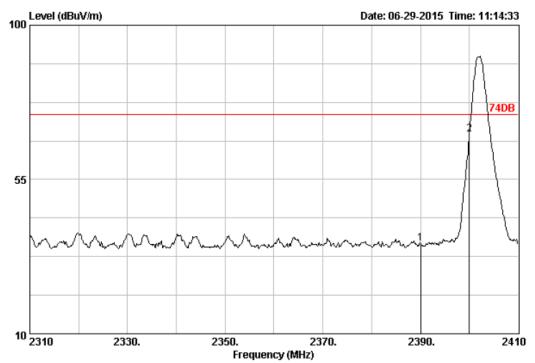

Site no. : 3m Chamber Data no. : 1669


Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

		Ant.	Cable	Amp		Emission			
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.00	28.78	4.61	35.36	38.28	36.31	74.00	37.69	Peak
2	2400.00	28.78	4.61	35.36	70.17	68.20	74.00	5.80	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

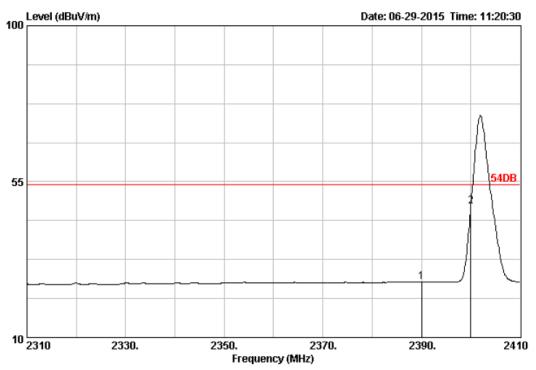

Site no. : 3m Chamber Data no. : 1672

Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL

Limit : 54DB Env. / Ins. : 23\*C/54%


Engineer EUT Power M/N Test Mode :

Freq. (MHz)	Factor	Loss	Factor	Reading	Emission   Level  (dBuV/m)	_	Remark
2390.00 2400.00						 	Average Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

Operation Mode: TX on Bot Channel

Polarity: Ver.

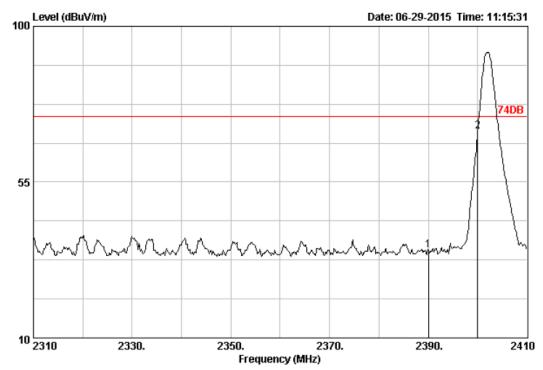

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 1670 Ant. pol. : VERTICAL

Freq. (MHz)	Factor	Loss	Factor	Reading	•	Limits (dBuV/m)	_	Remark
2390.00 2400.00							38.79 4.32	Peak Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

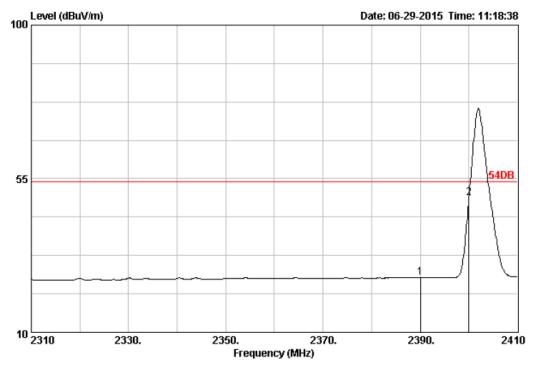

Data no. : 1671

Ant. pol. : VERTICAL

Site no. : 3m Chamber

Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

						Emission			
					_	Level		_	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBu∀)	(dBu∀/m)	(dBu∀/m)	(dB)	
1	2390.00	28.78	4.61	35.36	27.92	25.95	54.00	28.05	Average
2	2400.00	28.78	4.61	35.36	51.25	49.28	54.00	4.72	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. The emission levels that are 20dB below the official limit are not reported.

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Operation Mode: TX on Top Channel

Polarity: Hor.

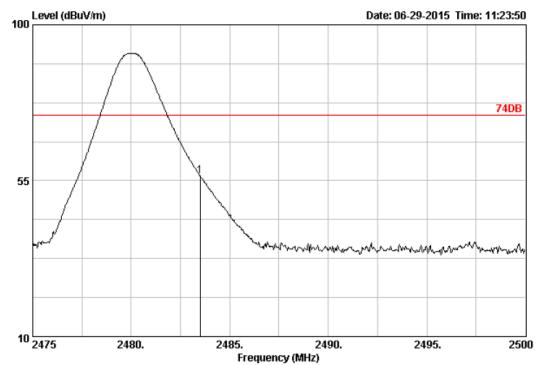

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118


Limit : 74DB

Env. / Ins. : 23\*C/54%

Engineer EUT Power M/N Test Mode Data no. : 1674 Ant. pol. : HORIZONTAL

		Factor	Loss	Factor	Reading	,	Limits (dBuV/m)	_	Remark
1	2483.50	28.93	4.70	35.38	58.04	56.29	74.00	17.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

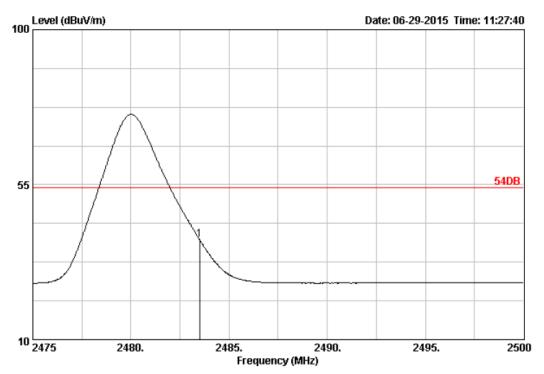

Data no. : 1676

Ant. pol. : HORIZONTAL

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23\*C/54%


Engineer : EUT Power M/N Test Mode :

> Ant. Cable Amp Emission Freq. Factor Loss Factor Reading Level Limits Margin Remark (MHz) (dB/m) (dB) (dB) (dBuV) (dBuV/m) (dBuV/m) (dB) 1 2483.50 28.93 4.70 35.38 40.72 38.97 54.00 15.03 Average

------Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

Operation Mode: TX on Top Channel

Polarity: Ver.

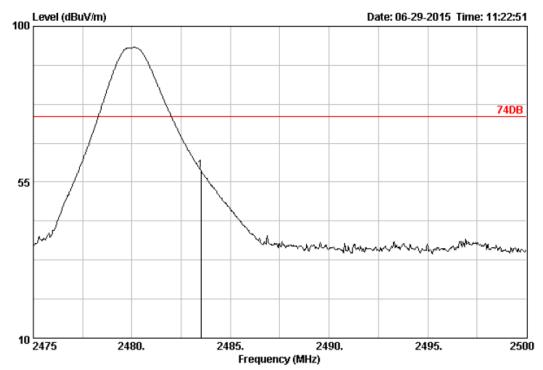

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 74DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :


Data no. : 1673 Ant. pol. : VERTICAL

		Loss	Factor	Reading		Limits		Remark
1 248	3.50 28.93	4.70	35.38	60.19	58.44	74.00	15.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. The emission levels that are 20dB below the official limit are not reported.



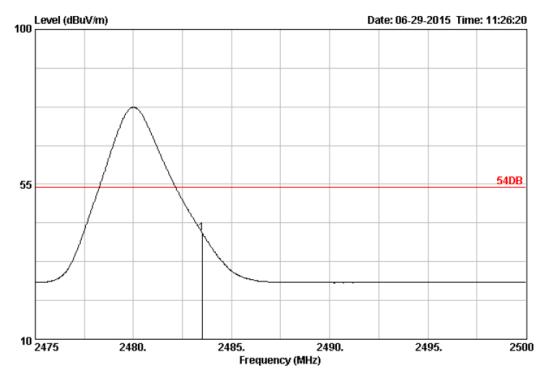

Site no. : 3m Chamber Dis. / Ant. : 3m DRH-118

Limit : 54DB Env. / Ins. : 23\*C/54%

Engineer :
EUT :
Power :
M/N :
Test Mode :

Data no. : 1675 Ant. pol. : VERTICAL

```
Ant. Cable Amp Emission
Freq. Factor Loss Factor Reading Level Limits Margin Remark
(MHz) (dB/m) (dB) (dB) (dBuV) (dBuV/m) (dB)

1 2483.50 28.93 4.70 35.38 42.64 40.89 54.00 13.11 Average
```

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.

2. The emission levels that are 20dB below the official limit are not reported.

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

V1.0 Page 39 of 50 Report No.: CTL1506181672-WF

## 4.5. Occupied Bandwidth Measurement

#### **Measurement Procedure**

- 1. Set EUT as normal operation.
- 2. RBW  $\geq$  1% of the 20 dB bandwidth, VBW $\geq$ RBW.
- 3. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

#### **Test SET-UP (Block Diagram of Configuration)**


Same as 4.2 Radiated Emission Measurement.

#### **Measurement Equipment Used:**

Same as 4.2 Radiated Emission Measurement.


#### **Measurement Results**

#### 2402MHz

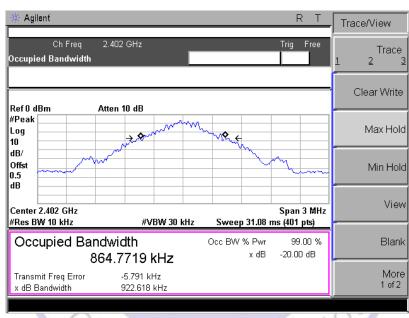


20dB Bandwidth: 922.618 KHz

2441MHz

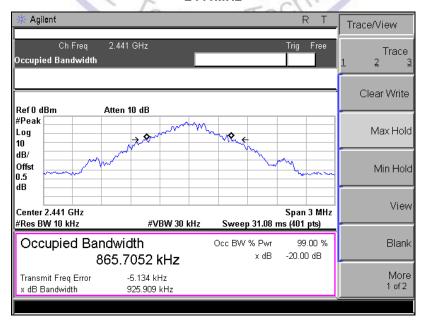

20dB Bandwidth: 925.909 KHz

#### 2480MHz

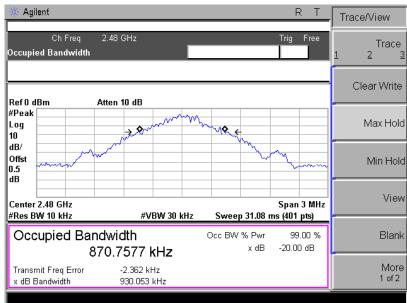



V1.0 Page 41 of 50 Report No.: CTL1506181672-WF

## 5. Antenna Requirement

#### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **Antenna Connected Construction**

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 4 dBi.




V1.0 Page 42 of 50 Report No.: CTL1506181672-WF

# 6. Test Setup Photos of the EUT





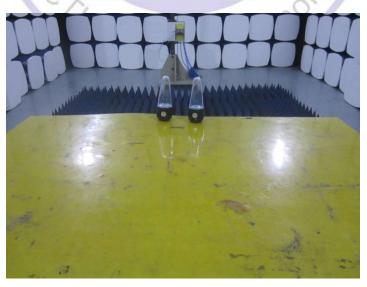





V1.0 Page 44 of 50 Report No.: CTL1506181672-WF


## 7. External and Internal Photos of the EUT

## **External Photos of EUT**








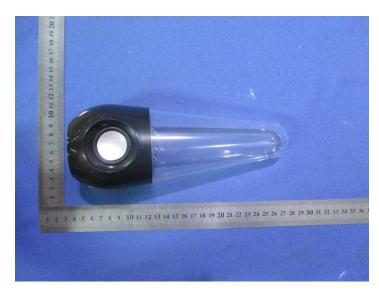





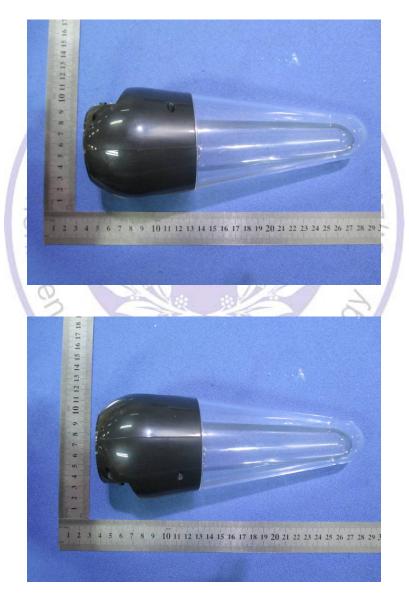

## **Internal Photos of EUT**







