# EMC TEST REPORT



Report No.: 16070974-FCC-E Supersede Report No.: N/A

Applicant	Jethro Trading LTD.				
Product Name	GSM phone				
Model No.	SC213	SC213			
Serial No.	N/A	N/A			
Test Standard	FCC Part 1	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014			
Test Date	August 15 to 31, 2016				
Issue Date	September 01, 2016				
Test Result	Pass Fail				
Equipment complied with the specification					
Equipment did not comply with the specification					
Loven	Tho	David	Huang		
Loren Luo Test Engineer			Huang ked By		

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

#### Issued by:

#### SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16070974-FCC-E
Page	2 of 31

### **Laboratories Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

#### **Accreditations for Conformity Assessment**

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16070974-FCC-E
Page	3 of 31

This page has been left blank intentionally.



Test Report	16070974-FCC-E
Page	4 of 31

# **CONTENTS**

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1	AC POWER LINE CONDUCTED EMISSIONS	9
6.2	RADIATED EMISSIONS	15
ANI	NEX A. TEST INSTRUMENT	20
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	21
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	27
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	30
ΔΝΙ	NEX F DECLARATION OF SIMILARITY	31



Test Report	16070974-FCC-E
Page	5 of 31

# 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070974-FCC-E	NONE	Original	September 01, 2016

# 2. Customer information

Applicant Name	Jethro Trading LTD.
Applicant Add	505 - 8840 210TH STREET, #231 Langley, Canada V1M2Y2
Manufacturer	Shenzhen Bayuda Technologies,co.,ltd
Manufacturer Add	Room A433 A Block, Shenzhen Industrial products exibition procurement center the
	baoyuan road baoan distric

# 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES	
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park	
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China	
	518108	
FCC Test Site No.	718246	
IC Test Site No.	4842E-1	
Test Software	Radiated Emission Program-To Shenzhen v2.0	



Test Report	16070974-FCC-E
Page	6 of 31

### 4. Equipment under Test (EUT) Information

<u>Equipment andor 1</u>	<u> </u>
Description of EUT:	GSM phone
Main Model:	SC213
Serial Model:	N/A
Date EUT received:	August 15, 2016
Test Date(s):	August 15 to 31, 2016
Equipment Category :	JBP
Antenna Gain:	GSM850: 0.4dBi PCS1900: 0.7dBi Bluetooth: 0.5dBi
Antenna Type:	GSM:PIFA antenna BT: Monopole antenna
Type of Modulation:	GSM: GMSK Bluetooth: GFSK, π /4DQPSK, 8DPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz Bluetooth: 2402-2480 MHz(TX/RX)
Number of Channels:	GSM 850: 124CH PCS1900: 299CHH Bluetooth: 79CH
Port:	Power Port, Earphone Port, USB Port



Test Report	16070974-FCC-E
Page	7 of 31

Adapter:

Model: HJ-050050-US

Input: 100-240VAC,50/60Hz,0.15A

Output: DC5V,500mA

Charging Base:

Model:SC213

Input Power: Input: DC5.0V,500mA

Output:DC5.0V,500mA

Battery:

Model: SC213

Spec:3.7V,800mAh/2.96Wh Charging limited voltage: 4.2V

Trade Name : Jethro

FCC ID: 2AAWJSC213



Test Report	16070974-FCC-E
Page	8 of 31

# 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

#### **Measurement Uncertainty**

Emissions		
Test Item Description Uncertainty		
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-



Test Report	16070974-FCC-E
Page	9 of 31

# 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions

Temperature	23°C	
Relative Humidity	54%	
Atmospheric Pressure	1030mbar	
Test date :	August 30, 2016	
Tested By:	Loren Luo	

#### Requirement(s):

Spec	Item	Requirement			Applicable
47CFR§15.	a)	For Low-power radio-freconnected to the public voltage that is conducted frequency or frequencied not exceed the limits in [mu] H/50 ohms line implies at the limit applies at the connected that is the limit applies at the connected that is the connected to the public voltage that is conducted to the public voltage that is the conducted to the public voltage that is the conducted that is th	c utility (AC) power line ed back onto the AC poses, within the band 150 the following table, as appedance stabilization in	the radio frequency ower line on any kHz to 30 MHz, shall measured using a 50 network (LISN). The	₹
107		Frequency ranges	Limit (		
		(MHz)	QP	Average	
		0.15 ~ 0.5	66 – 56	56 – 46	
		0.5 ~ 5	56	46	
		5 ~ 30	60	50	
Test Setup	Vertical Ground Reference Plane  Test Receiver  40cm  Horizontal Ground Reference Plane				
		2.Both of L	units were connected to se ISNs (AMN) are 80cm from runits and other metal pla	EUT and at least 80cm	
Procedure	the	e EUT and supporting ed standard on top of a 1.5 e power supply for the El	im x 1m x 0.8m high, n	on-metallic table.	
	filte	ered mains.			



Test Report	16070974-FCC-E
Page	10 of 31


	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail

Test Data	Yes	□ <sub>N/A</sub>
Test Plot	Yes (See below)	□ <sub>N/A</sub>



Test Report	16070974-FCC-E
Page	11 of 31

Test Mode:	USB Mode

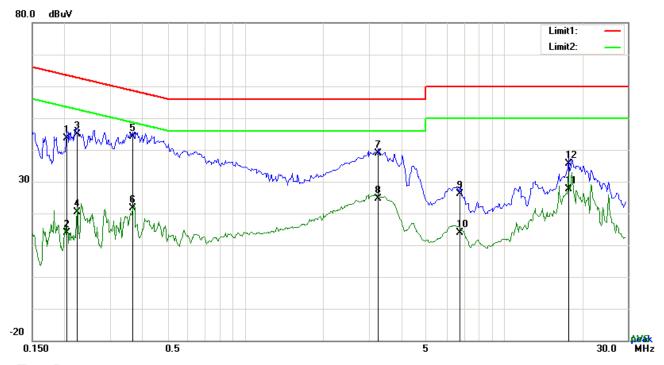

#### Test Data


### Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2046	33.62	QP	10.03	43.65	63.42	-19.77
2	L1	0.2046	3.76	AVG	10.03	13.79	53.42	-39.63
3	L1	0.2241	34.82	QP	10.03	44.85	62.67	-17.82
4	L1	0.2241	10.40	AVG	10.03	20.43	52.67	-32.24
5	L1	0.3653	34.03	QP	10.03	44.06	58.61	-14.55
6	L1	0.3653	11.49	AVG	10.03	21.52	48.61	-27.09
7	L1	3.2691	28.72	QP	10.06	38.78	56.00	-17.22
8	L1	3.2691	14.64	AVG	10.06	24.70	46.00	-21.30
9	L1	6.7362	16.02	QP	10.10	26.12	60.00	-33.88
10	L1	6.7362	3.80	AVG	10.10	13.90	50.00	-36.10
11	L1	17.6952	17.33	QP	10.27	27.60	60.00	-32.40
12	L1	17.6952	25.32	AVG	10.27	35.59	50.00	-14.41



Test Report	16070974-FCC-E
Page	12 of 31

Test Mode: USB Mode
---------------------

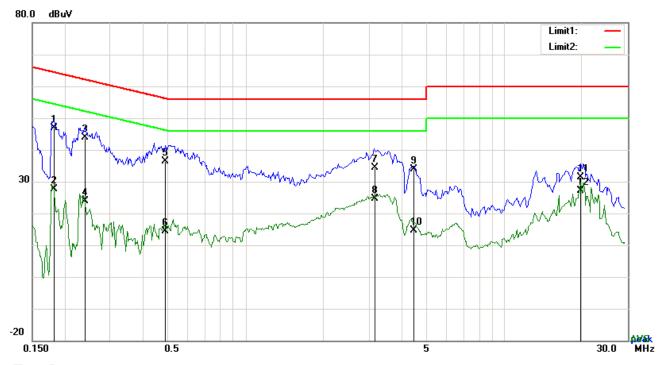

#### Test Data


### Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1825	36.78	QP	10.02	46.80	64.37	-17.57
2	N	0.1825	17.70	AVG	10.02	27.72	54.37	-26.65
3	N	0.2397	33.90	QP	10.02	43.92	62.11	-18.19
4	N	0.2397	13.95	AVG	10.02	23.97	52.11	-28.14
5	N	0.4893	26.35	QP	10.02	36.37	56.18	-19.81
6	N	0.4893	4.27	AVG	10.02	14.29	46.18	-31.89
7	N	3.1563	24.29	QP	10.05	34.34	56.00	-21.66
8	N	3.1563	14.67	AVG	10.05	24.72	46.00	-21.28
9	N	4.4781	23.81	QP	10.06	33.87	56.00	-22.13
10	N	4.4781	4.55	AVG	10.06	14.61	46.00	-31.39
11	N	19.7076	21.00	QP	10.26	31.26	60.00	-28.74
12	N	19.7076	16.93	AVG	10.26	27.19	50.00	-22.81



Test Report	16070974-FCC-E
Page	13 of 31

Test Mode: USB Mode
---------------------

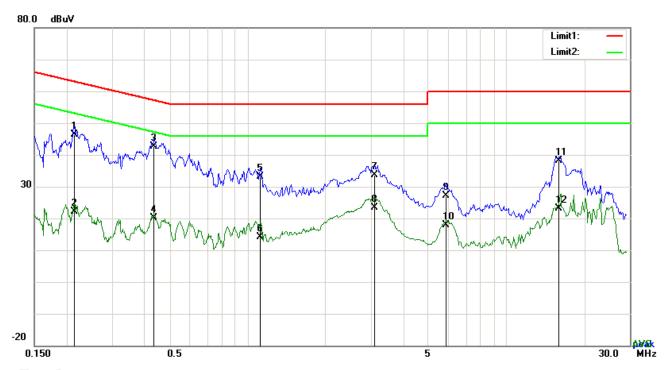

#### Test Data


### Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.2139	36.42	QP	10.02	46.44	63.05	-16.61
2	L1	0.2139	12.04	AVG	10.02	22.06	53.05	-30.99
3	L1	0.4351	32.54	QP	10.02	42.56	57.15	-14.59
4	L1	0.4351	10.22	AVG	10.02	20.24	47.15	-26.91
5	L1	1.1211	23.18	QP	10.03	33.21	56.00	-22.79
6	L1	1.1211	4.16	AVG	10.03	14.19	46.00	-31.81
7	L1	3.1053	23.55	QP	10.05	33.60	56.00	-22.40
8	L1	3.1053	13.27	AVG	10.05	23.32	46.00	-22.68
9	L1	5.8509	17.04	QP	10.08	27.12	60.00	-32.88
10	L1	5.8509	7.82	AVG	10.08	17.90	50.00	-32.10
11	L1	15.9831	28.01	QP	10.21	38.22	60.00	-21.78
12	L1	15.9831	12.92	AVG	10.21	23.13	50.00	-26.87



Test Report	16070974-FCC-E
Page	14 of 31

Test Mode: USB Mode

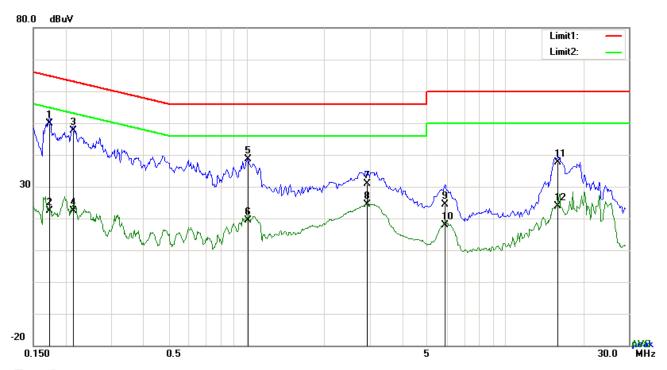

#### Test Data

#### Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1734	39.80	QP	10.02	49.82	64.80	-14.98
2	N	0.1734	12.36	AVG	10.02	22.38	54.80	-32.42
3	N	0.2139	37.68	QP	10.02	47.70	63.05	-15.35
4	N	0.2139	12.29	AVG	10.02	22.31	53.05	-30.74
5	N	1.0119	28.58	QP	10.03	38.61	56.00	-17.39
6	N	1.0119	9.40	AVG	10.03	19.43	46.00	-26.57
7	N	2.9424	20.80	QP	10.05	30.85	56.00	-25.15
8	N	2.9424	14.26	AVG	10.05	24.31	46.00	-21.69
9	N	5.8509	14.36	QP	10.08	24.44	60.00	-35.56
10	N	5.8509	7.82	AVG	10.08	17.90	50.00	-32.10
11	N	15.9831	27.49	QP	10.21	37.70	60.00	-22.30
12	N	15.9831	13.78	AVG	10.21	23.99	50.00	-26.01



Test Report	16070974-FCC-E
Page	15 of 31

### 6.2 Radiated Emissions

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1030mbar
Test date :	August 30, 2016
Tested By:	Loren Luo

#### Requirement(s):

Spec	Item	Requirement		Applicable				
47CFR§15. 107(d)	a)	Except higher limit as specified else emissions from the low-power radio exceed the field strength levels spet the level of any unwanted emission the fundamental emission. The tight edges  Frequency range (MHz)	V					
		30 - 88	Field Strength (μV/m) 100					
		88 – 216	150					
		216 960	200					
		Above 960	500					
Test Setup	Ant. Tower  Support Units  Ground Plane  Test Receiver							
Procedure	1. 2.	, , , ,						



Test Report	16070974-FCC-E
Page	16 of 31

			over a full rotation of the EUT) was chosen.
		b.	The EUT was then rotated to the direction that gave the maximum
			emission.
		C.	Finally, the antenna height was adjusted to the height that gave the maximum
			emission.
	3.	The res	solution bandwidth and video bandwidth of test receiver/spectrum analyzer is
		120 kH	z for Quasiy Peak detection at frequency below 1GHz.
	4.	The res	olution bandwidth of test receiver/spectrum analyzer is 1MHz and video
		bandwi	dth is 3MHz with Peak detection for Peak measurement at frequency above
		1GHz.	
		The re	esolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
		bandw	vidth with Peak detection for Average Measurement as below at frequency
		above	1GHz.
		■ 1 kH	Hz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%)
	5.	Steps 2	2 and 3 were repeated for the next frequency point, until all selected frequency
		points	were measured.
Remark			
Result	<b>☑</b> Pa	ss	☐ Fail
	7		
Test Data	Yes		N/A
Test Plot	Yes (S	ee belo	w) N/A



Test Report	16070974-FCC-E
Page	17 of 31

Test Mode : USB Mode

#### Below 1GHz



#### Test Data


### Horizontal Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m )	(dBuV/m)	(dB)	(cm)	( °)
1	н	64.6594	47.08	peak	-14.00	33.08	40.00	-6.92	100	52
2	Н	158.1123	44.18	peak	-8.30	35.88	43.50	-7.62	100	197
3	Η	248.5519	47.53	peak	-9.17	38.36	46.00	-7.64	100	126
4	Н	270.3748	47.06	peak	-8.25	38.81	46.00	-7.19	100	206
5	Н	366.8231	42.75	peak	-5.07	37.68	46.00	-8.32	100	0
6	Н	480.5276	35.64	peak	-2.23	33.41	46.00	-12.59	100	341



Test Report	16070974-FCC-E
Page	18 of 31

#### Below 1GHz

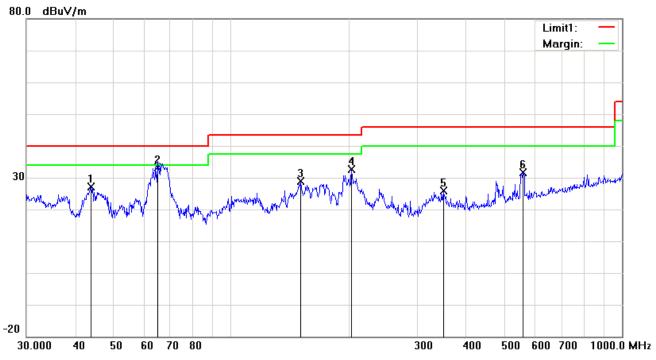

#### Test Data

### Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m )	(dBuV/m)	(dB)	(cm)	( °)
1	٧	43.9658	37.32	peak	-10.25	27.07	40.00	-12.93	100	57
2	>	65.1145	47.08	QP	-13.95	33.13	40.00	-6.87	100	138
3	٧	151.0666	37.29	peak	-8.38	28.91	43.50	-14.59	100	360
4	V	203.5228	41.28	peak	-8.77	32.51	43.50	-10.99	100	91
5	V	349.2500	31.48	peak	-5.48	26.00	46.00	-20.00	100	236
6	V	558.7302	32.29	peak	-0.67	31.62	46.00	-14.38	100	174



Test Report	16070974-FCC-E
Page	19 of 31

#### Above 1GHz

Frequency (MHz)	Amplitude (dΒμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dBµV/m)	Margin (dB)	Detector (PK/AV)
1533.45	49.57	68	120	V	-22.45	74	-24.43	PK
2055.17	49.52	121	130	V	-22.31	74	-24.48	PK
1767.42	49.67	75	142	V	-22.44	74	-24.33	PK
2172.45	50.66	67	175	Н	-22.68	74	-23.34	PK
2888.47	49.82	120	100	Н	-22.74	74	-24.18	PK
1866.25	49.47	77	118	Н	-22.54	74	-24.53	PK

Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5\*2480MHz=12,400MHz.

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3, X-Axis, Y-Axis and -Axis were investigated. The results above show only the worst case.

Note4: The AV measurement performed, more than 20dB below limit so AV test data was not presented.



Test Report	16070974-FCC-E
Page	20 of 31

# Annex A. TEST INSTRUMENT

Instrument	Model	Serial#	Cal Date	Cal Due	In use	
AC Line Conducted Emissions						
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	•	
Line Impedance Stabilization Network	LI-125A	191106	09/25/2015	09/24/2016	<b>&gt;</b>	
Line Impedance Stabilization Network	LI-125A	191107	09/25/2015	09/24/2016	<u>&lt;</u>	
LISN	ISN T800	34373	09/25/2015	09/24/2016	<	
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<	
Radiated Emissions						
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	~	
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<b>&gt;</b>	
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<b>\</b>	
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<b>\</b>	
Double Ridge Horn Antenna	AH-118	71259	09/24/2015	09/23/2016	<b>\(\z\)</b>	



Test Report	16070974-FCC-E
Page	21 of 31

### Annex B. EUT And Test Setup Photographs

#### Annex B.i. Photograph: EUT External Photo





Test Report	16070974-FCC-E
Page	22 of 31



21 21 20 21 39 21 30 cc 11 59 21 50 cc 12 50 cc

EUT - Bottom View

EUT - Left View



EUT - Right View



Charger Base - Lable View




Test Report	16070974-FCC-E
Page	23 of 31

#### Annex B.ii. Photograph: EUT Internal Photo






Cover Off - Top View 1










Battery - Rear View

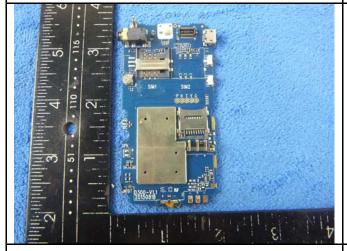


Mainboard with shielding- Front View




Mainboard without shielding- Front View



Test Report	16070974-FCC-E
Page	24 of 31

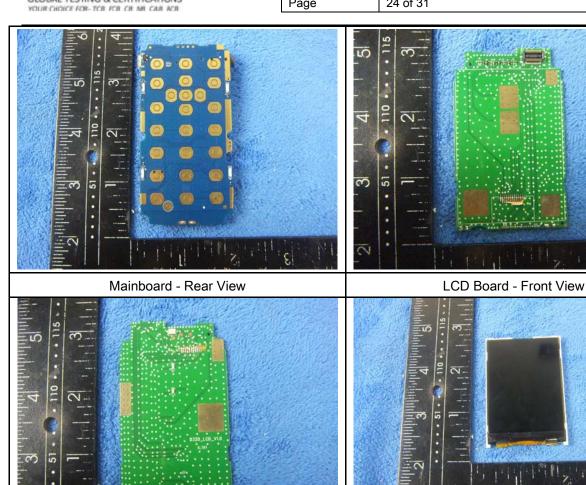

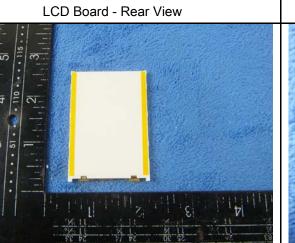

LCD - Rear View




LCD - Front View



GSM/PCS Antenna View



Test Report	16070974-FCC-E	
Page	25 of 31	

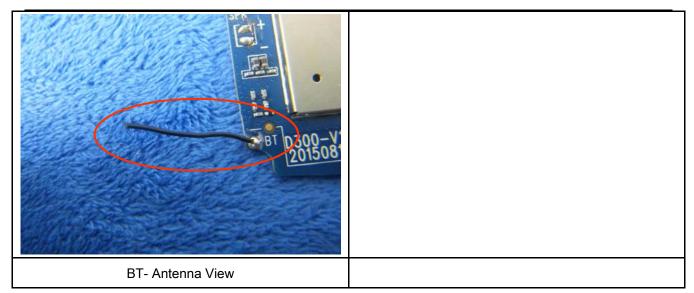



Test Report	16070974-FCC-E
Page	26 of 31


# Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup – TF Card Front View



Conducted Emissions Test Setup – TF Card Side View

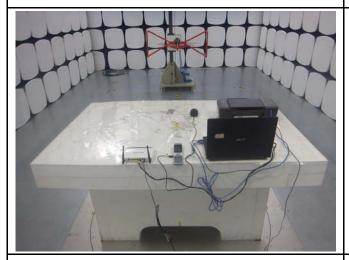

Radiated Emissions Test Setup Below 1GHz - TF

Card Front View



Radiated Emissions Test Setup Above 1GHz - TF


Card Side View



Test Report	16070974-FCC-E
Page	27 of 31

### Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


#### Annex C.ii. TEST SET UP BLOCK

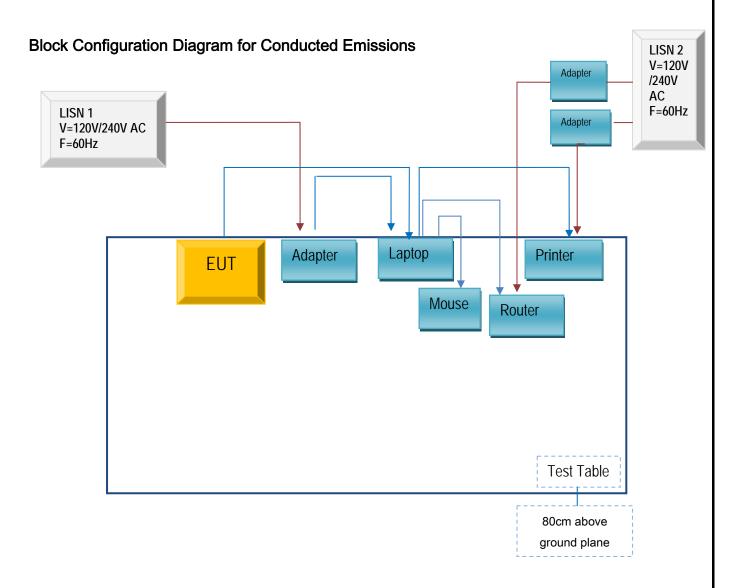



Test Report	16070974-FCC-E
Page	28 of 31

### **Block Configuration Diagram for Radiated Emissions**

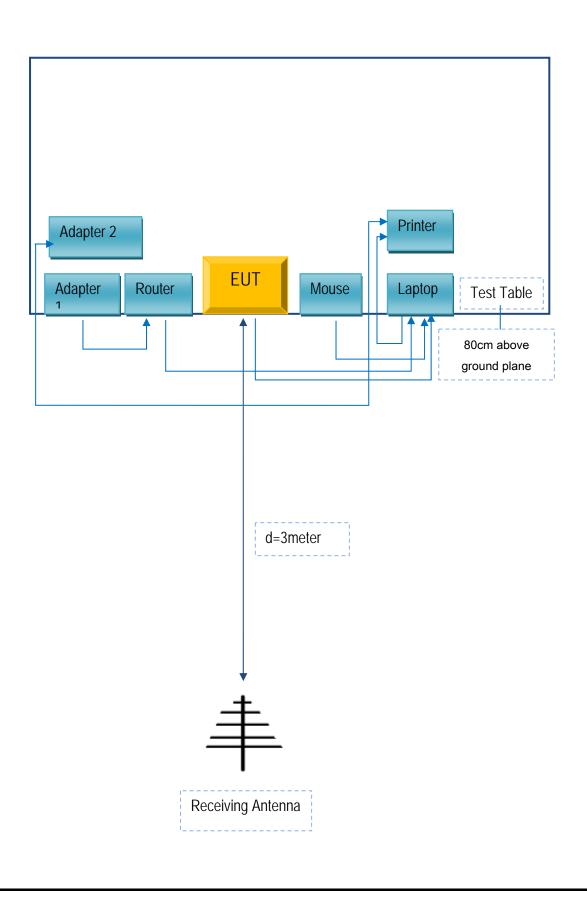



Test Report	16070974-FCC-E
Page	29 of 31

### Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

#### Supporting equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203

#### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	JX110725002
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032



Test Report	16070974-FCC-E
Page	30 of 31

# Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment



Test Report	16070974-FCC-E
Page	31 of 31

### Annex E. DECLARATION OF SIMILARITY

N/A