

Global United Technology Services Co., Ltd.

Report No.: GTSE13080138103

TEST REPORT

Applicant: Shenzhen SHIRATECH electronics co., limited

Address of Applicant: 6th floor, building#4, LongBi industrial Park, Bantian,

LongGang, Shenzhen

Equipment Under Test (EUT)

Product Name: TABLET PC

Model No.: D2-1061G

FCC ID: 2AAWM-D2-1061G

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2012

Date of sample receipt: August 20, 2013

Date of Test: August 20-September 06, 2013

Date of report issue: September 06, 2013

PASS * Test Result:

Authorized Signature:

Robinson Lo **Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

^{*} In the configuration tested, the EUT complied with the standards specified above.



2 Version

Version No.	Date	Description
00	September 06, 2013	Original

Prepared By:	Sam. Gao	Date:	September 06, 2013
	Project Engineer		
Check By:	Hams. Hu	Date:	September 06, 2013
	Reviewer		



3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST MODE	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TES	T INSTRUMENTS LIST	7
7	TES	T RESULTS AND MEASUREMENT DATA	8
	7.1	CONDUCTED EMISSIONS	8
	7.2	RADIATED EMISSION	11
8	TES	T SETUP PHOTO	17
9	EUT	CONSTRUCTIONAL DETAILS	18

Project No.: GTSE130801381RF



4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.

Project No.: GTSE130801381RF



5 General Information

5.1 Client Information

Applicant:	Shenzhen SHIRATECH electronics co.,limited	
Address of Applicant:	6th floor, building#4, LongBi industrial Park, Bantian, LongGang, Shenzhen	
Manufacturer :	Shenzhen SHIRATECH electronics co.,limited	
Address of Manufacturer :	6th floor, building#4, LongBi industrial Park, Bantian, LongGang, Shenzhen	
Factory:	Shenzhen SHIRATECH electronics co.,limited	
Address of Factory:	6th floor, building#4, LongBi industrial Park, Bantian, LongGang, Shenzhen	

5.2 General Description of EUT

Product Name:	TABLET PC
Model No.:	D2-1061G
Power supply:	Adapter:
	Model:YHXH-SW0502500U
	Input: AC 100-240V, 50/60Hz, 0.6A Max.
	Output: DC 5V, 2.5A
	Or
	DC 3.7V Li-ion battery

5.3 Test mode

Test mode:	
Playing mode	Keep the EUT in Playing mode
Video Record mode	Keep the EUT in Video Recording mode
PC mode	Keep the EUT in data exchanging with PC mode.
Test voltage:	
AC 120V/60Hz	



5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HP	Printer	CB495A	05257893	DoC
DELL	PC	OPTIPLEX745	GTS312	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None

5.9 Other Information Requested by the Customer

None.

Global United Technology Services Co., Ltd.

 ${\it 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District,}\\$

Shenzhen, China 518102



Project No.: GTSE130801381RF

6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2013	Mar. 28 2014	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	Jun. 29 2013	Jun. 29 2014	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	Jun. 29 2013	Jun. 29 2014	
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	Jun. 29 2013	Jun. 29 2014	
6	RF Amplifier	HP	8347A	GTS204	Jun. 29 2013	Jun. 29 2014	
7	Preamplifier	HP	8349B	GTS206	Jun. 29 2013	Jun. 29 2014	
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
9	Coaxial cable	GTS	N/A	GTS210	Jul. 07 2013	Jul. 06 2014	
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 07 2013	Jul. 06 2014	
11	Thermo meter	N/A	N/A	GTS256	Jul. 01 2013	Jul. 01 2014	

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Sep. 08 2011	Sep. 07 2013	
2	EMI Test Receiver	R&S	ESCS30	GTS223	Jun. 29 2013	Jun. 29 2014	
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	Jun. 29 2013	Jun. 29 2014	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jun. 29 2013	Jun. 29 2014	
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	Jun. 29 2013	Jun. 29 2014	
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 07 2013	Jul. 06 2014	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	

Gene	General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)	
1	Barometer	ChangChun	DYM3	GTS257	Jul. 27 2013	Jul. 27 2014	



7 Test Results and Measurement Data

7.1 Conducted Emissions


Test Requirement:	FCC Part15 B Section 15.107			
Test Method:	ANSI C63.4:2003			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto		
Limit:	Frequency range (MHz)	Limit (c	dBuV)	
	, , ,	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test setup:	Reference Plane		_	
	AUX Filter AC power Equipment E.U.T EMI Receiver Remark E.U.T Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m			
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 			
Test Instruments:	Refer to section 6 for details			
		E 2 Only the data of	voret esse's (DC	
Test mode:	Pre-scan all modes in section 5.3. Only the data of worst case's (PC mode) is reported.			
Test results:	Pass			

Shenzhen, China 518102



Measurement Data

Line:

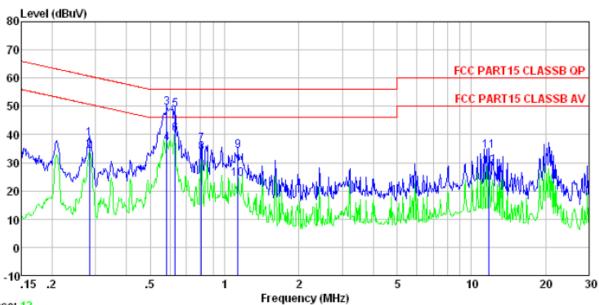

Trace: 12


Condition : FCC PART15 CLASSB QP LISN-2012 LINE

Job No. : 1381RF Test mode : PC mode Test Engineer: ying

1030	Freq	Read Level		Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBu₹	dBuV	dB	
1	0.283	38.46	-0.22	0.10	38.34		-22.38	
2 3	0. 283 0. 582		-0.22 -0.21	0.10 0.10	34.02 49.60	56.00	-6.40	
4 5	0.582 0.630	36.85 49.02	-0. 21 -0. 20	0.10 0.10	36.74 48.92		-9. 26 -7. 08	Average QP
6 7	0.630 0.804	40.37 36.73	-0.20 -0.20	0.10	40.27 36.63	46.00		Average
8	0.804	33.47	-0.20	0.10	33.37	46.00	-12.63	Average
9 10	1.135 1.135	34.16 24.47	-0.21 -0.21	0.10 0.10	34.05 24.36		-21.95 -21.64	QP Average
11 12	11.807 11.807	34. 34 28. 67	-0.44 -0.44	0.20 0.20	34.10 28.43	60.00	-25.90	



Neutral:

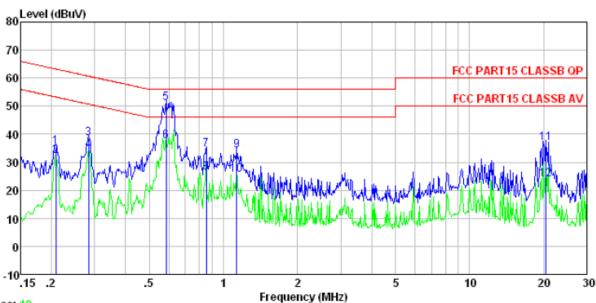

Trace: 10

Condition : FCC PART15 CLASSB QP LISN-2012 NEUTRAL

Job No. : 1381RF Test mode : PC mode Test Engineer: ying

esi	Engineer.	Read	LISN	Cable		Limit	Over		
	Freq	Level	Factor	Loss	Level	Line	Limit	Remark	
	MHz	dBu₹	dB	dB	dBu₹	dBuV	dB		•
1	0.208	35.49	-0.09	0.10	35.50	63.27	-27.77	QP	
2 3	0.208	32.14	-0.09	0.10	32.15	53.27	-21.12	Average	
3	0. 283	38.50	-0.09	0.10	38.51		-22.21		
4 5	0. 283	34.07	-0.09	0.10	34.08	50.72	-16.64	Average	
5	0.585	51.20	-0.08	0.10	51.22	56.00	-4.78		
6	0.585	37.47	-0.08	0.10	37.49	46.00	-8.51	Average	
7	0.853	34.49	-0.09	0.10	34.50		-21.50		
8 9	0.853	26.34	-0.09	0.10	26.35	46.00	-19.65	Average	
	1.135	34.24	-0.09	0.10	34. 25		-21.75		
10	1.135	25.48	-0.09	0.10	25.49			Average	
11	20.486	37.00	-0.54	0.21	36.67		-23.33		
12	20.486	24.18	-0.54	0.21	23.85	50.00	-26.15	Average	

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


Shenzhen, China 518102



7.2 Radiated Emission

	Tadiatea Elliissioli									
	Test Requirement:	FCC Part15 B Section 15.109								
	Test Method:	ANSI C63.4:200	ANSI C63.4:2003							
	Test Frequency Range:	30MHz to 7.5GHz								
	Test site:	Measurement D	Distance: 3m	(Semi-Anecho	ic Chambe	r)				
	Receiver setup:	<u>- </u>								
		Frequency 30MHz-	Detector Quasi-peal	RBW k 120kHz	VBW 300kHz	Remark Quasi-peak Value				
		1GHz	Quasi peai	1201112	300Ki iz	Quasi peak value				
		Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		7.0070 10112	Peak	1MHz	10Hz	Average Value				
	Limit:	 				T 1				
		Freque	-	Limit (dBuV		Remark				
		30MHz-8		40.0		Quasi-peak Value				
		88MHz-2		43.5		Quasi-peak Value				
		216MHz-9		46.0		Quasi-peak Value				
		960MHz-	-1GHz	54.0		Quasi-peak Value				
		Above 1	IGHz	54.0		Average Value				
				74.0	0	Peak Value				
	Test Procedure:	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving.								
						le-height antenna				
		3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.								
		4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.								
		5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.								
		6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.								
	Test setup:	Below 1GHz								
-										



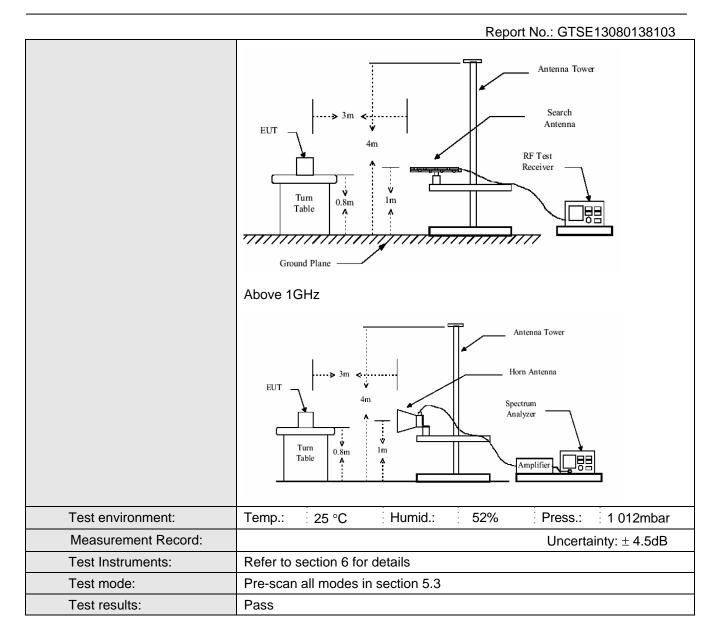

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Measurement Data

Below 1GHz Horizontal:

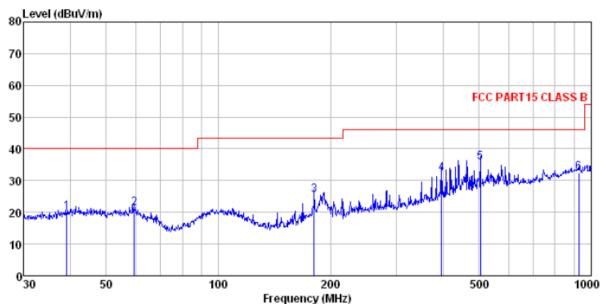


: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M HORIZONTAL Site Condition

Job No. : 1381RF Test Mode : PC m Test Engineer: Bing : PC mode

COSC	THE THOOL.								
		Read	Ant enna	Cable	Preamp		Limit	Over	
	Freq		Factor					Limit	Remark
	1104	20002	1 40 101	2000	. 40.01	20001	22110	DIME (Homari
						75-77-	75-77-		
	MHz	dBu∀	dB/m	dB	ФB	dBuV/m	dβuγ/m	dB	
1	39.162	36.19	15.34	0.65	32.06	20.12	40.00	-19.88	QP
2	59 441	37.46	14.73	0.86	31.94	21 11	40 00	-18 89	ΩP
-									
3	180.649	43.83	11.76	1.74	32.08	25.25	43.50	-18.25	QP
4	396.242	44.36	16.97	2.83	31.90	32, 26	46.00	-13.74	QP
5	504.706				31.53				
6	925.756	35.40	23.28	4.95	31.20	32.43	46.00	-13.57	QP



Vertical:

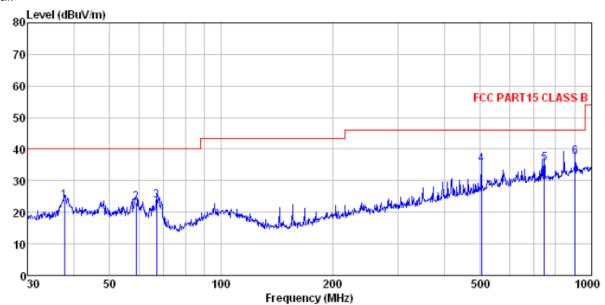

Site


: 3m chamber : FCC PART15 CLASS B 3m VULB9163-2013M VERTICAL Condition

: 1381RF : PC mode Job No. Test Mode Test Engineer: Bing

	Freq				Preamp Factor				Remark
	MHz	dBu∜	dB/m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5 6	504.706 744.866	42.82 44.65 40.96	11.89 18.68 21.39	0.85 0.92 3.33 4.26	32.06 31.94 31.90 31.53 31.25 31.18	23.11 23.73 35.13 35.36	40.00 40.00 46.00 46.00	-16.89 -16.27 -10.87 -10.64	QP QP QP QP



Above 1GHz Horizontal:

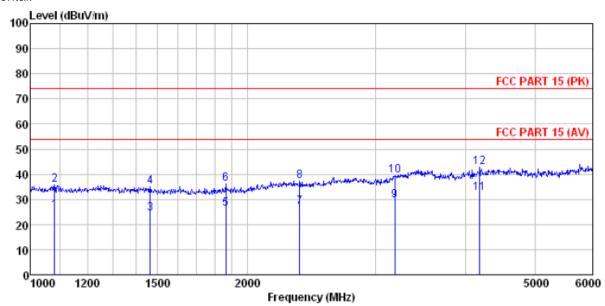

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL Condition


Job No. Test Mode : 1366RF : PC mode Test Engineer: Bing

000	Freq	ReadA	Intenna Factor		Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBu∀	<u>dB</u> /m	dB	dB	dBuV/m	dBuV/m	dB	
1 2 3 4 5 6 7 8 9 10	1080. 091 1080. 091 1464. 692 1464. 692 1865. 506 1865. 506 2359. 035 2359. 035 3193. 317 3193. 317	29. 30 39. 51 28. 01 38. 64 29. 85 39. 89 28. 13 38. 37 27. 60 37. 38	24.70 24.70 25.30 25.30 25.58 25.58 27.69 27.69 28.73 28.73	4.37 4.66 4.66 4.89 4.89 5.35 6.35 6.35	32. 89 32. 89 33. 53 34. 23 34. 23 34. 05 34. 05 33. 10 33. 10	25. 48 35. 69 24. 44 35. 07 26. 09 36. 13 27. 12 37. 36 29. 58 39. 36	74.00 54.00 74.00 54.00 74.00 54.00 74.00 54.00	-38. 31 -29. 56 -38. 93 -27. 91 -37. 87 -26. 88 -36. 64	Average Peak Average Peak Average Peak Average
11 12	4185.457 4185.457	26.14 36.49	30.18 30.18	8.04 8.04	31.98 31.98	32.38 42.73		-21.62 -31.27	Average Peak

Project No.: GTSE130801381RF



Vertical:

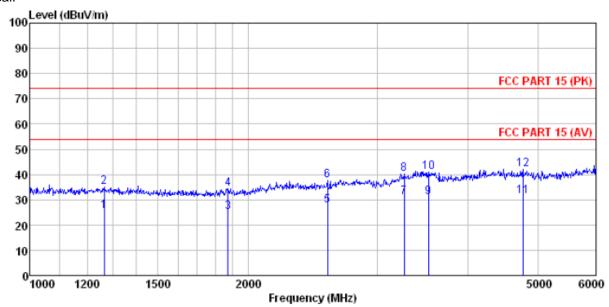

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL Condition

Job No. : 1381RF Test Mode : PC mode Test Engineer: Bing

1650	rugineer.	_		0-1-1-				^	
	_		int enna		Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBu∀	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1266.823	28.61	25.56	4.52	33.21	25.48	54.00	-28.52	Average
2	1266.823	38.07	25.56	4.52	33.21	34.94	74.00	-39.06	Peak
3	1872.203	28.94	25.61	4.90	34.23	25.22	54.00	-28.78	Average
4	1872, 203	38.10	25.61	4.90	34.23	34.38	74.00	-39.62	Peak
5	2566.301	28.10	27.68	5.55		27.51			Average
6	2566.301	38.17	27.68	5.55				-36.42	
ž	3268.571	28.94	28.44	6.51	33.02				Average
8	3268.571	38. 23	28.44	6.51	33.02			-33.84	
9	3530.356	27.50	29.04	7.01	32.71	30.84			Average
10	3530.356	37.66	29.04	7.01	32.71	41.00		-33.00	
11	4761.785	23.13	31.73	8.56	32.06	31.36	54.00	-22.64	Average
12	4761, 785	33, 96	31, 73	8, 56	32, 06	42, 19	74.00	-31.81	Peak