

FCC 47 CFR PART 15 SUBPART C

Product Type : Play-Fi Receiver
Applicant : Phorus, Inc.
Address : 16255 Ventura Boulevard, Suite 310, Encino, United States, 91436
Trade Name : Phorus
Model Number : PR5 Receiver
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4-2009
Receive Date : Apr. 18, 2013
Test Period : Apr. 29~May 03, 2013
Issue Date : Dec. 06, 2013

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Dec. 06, 2013	Initial Issue	

Verification of Compliance

Issued Date: 12/06/2013


Product Type : Play-Fi Receiver
Applicant : Phorus, Inc.
Address : 16255 Ventura Boulevard, Suite 310, Encino, United States, 91436
Trade Name : Phorus
Model Number : PR5 Receiver
FCC ID : 2AAWQ-PR5RECEIVER
IC : 11138A-PR5RECEIVER
EUT Rated Voltage : DC 12V, 2A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
ANSI C63.4-2009
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample identified in this report.

Approved By
(Manager)

: 

(Cran Yang)

Reviewed By
(Testing Engineer)

: 

(Fly Lu)

TABLE OF CONTENTS

1	General Information	6
1.1.	Summary of Test Result	6
1.2.	Measurement Uncertainty	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Maximum Conducted Output Power Measurement	11
4.1.	Limit	11
4.2.	Test Setup	11
4.3.	Test Instruments	11
4.4.	Test Procedure	11
4.5.	Test Result	12
5	Conducted Emission Measurement	14
5.1.	Limit	14
5.2.	Test Instruments	14
5.3.	Test Setup	14
5.4.	Test Procedure	15
5.5.	Test Result	16
6	Radiated Interference Measurement	18
6.1.	Limit	18
6.2.	Test Instruments	18
6.3.	Setup	19
6.4.	Test Procedure	20
6.5.	Test Result	21
7	20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement	26
7.1.	Limit	26
7.2.	Test Setup	26
7.3.	Test Instruments	26
7.4.	Test Procedure	26
7.5.	Test Result	28
7.6.	Test Graphs	29

8	Carrier Frequency Separation Measurement.....	31
8.1.	Limit.....	31
8.2.	Test Setup	31
8.3.	Test Instruments.....	31
8.4.	Test Procedure	31
8.5.	Test Result	32
8.6.	Test Graphs.....	33
9	Number of Hopping Measurement.....	34
9.1.	Limit.....	34
9.2.	Test Setup	34
9.3.	Test Instruments.....	34
9.4.	Test Procedure	34
9.5.	Test Result	35
9.6.	Test Graphs.....	36
10	Time of Occupancy (Dwell Time) Measurement.....	38
10.1.	Limit.....	38
10.2.	Test Setup	38
10.3.	Test Instruments.....	38
10.4.	Test Procedure	38
10.5.	Test Result	39
10.6.	Test Graphs.....	41
11	Out of Band Conducted Emissions Measurement.....	43
11.1.	Limit.....	43
11.2.	Test Setup	43
11.3.	Test Instruments.....	43
11.4.	Test Procedure	43
11.5.	Test Graphs.....	44
12	Band Edges Measurement.....	48
12.1.	Limit.....	48
12.2.	Test Setup	48
12.3.	Test Instruments.....	48
12.4.	Test Procedure	49
12.5.	Test Result	50
13	Antenna Measurement	60
13.1.	Limit.....	60
13.2.	Antenna Connector Construction.....	60

1 General Information

1.1. Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(b)(1)	A8.4 (2)	Max. Output Power	PASS	-----
15.247(c)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	A8.1 (1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)(iii)	A8.1 (2)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	A8.1 (4)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(c)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.24 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.072 dB.



2 EUT Description

Product Type	Play-Fi Receiver
Trade Name	Phorus
Model Number	PR5 Receiver
Applicant	Phorus, Inc. 16255 Ventura Boulevard, Suite 310, Encino, United States, 91436
Manufacturer	Wistron InfoComm (Zhongshan) Corporation Linhai Branch Xiyiwei, Ma'an Cun, Zhongshan Torch Development Zone, Zhongshan City, Guangdong, China
FCC ID	2AAWQ-PR5RECEIVER
IC	11138A-PR5RECEIVER
Frequency Range	2402 ~ 2480 MHz
Modulation Type	GFSK for 1Mbps $\pi/4$ -DQPSK for 2Mbps 8DPSK for 3Mbps
Antenna Type	Printing Type
Antenna Gain	2.52 dBi
RF Output Power (Conducted)	GFSK for 1Mbps 4.66 dBm / 0.003 W $\pi/4$ -DQPSK for 2Mbps 6.78 dBm / 0.005 W 8DPSK for 3Mbps 7.07 dBm / 0.005 W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode
Mode 3: $\pi/4$ -DQPSK Link Mode
Mode 4: 8DPSK Link Mode
Mode 5: Receiver Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

3.2. EUT Exercise Software


1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	EUT run test program.
4	Open Bluetooth function link to CBT.


3.3. Configuration of Test System Details

Conducted Emission

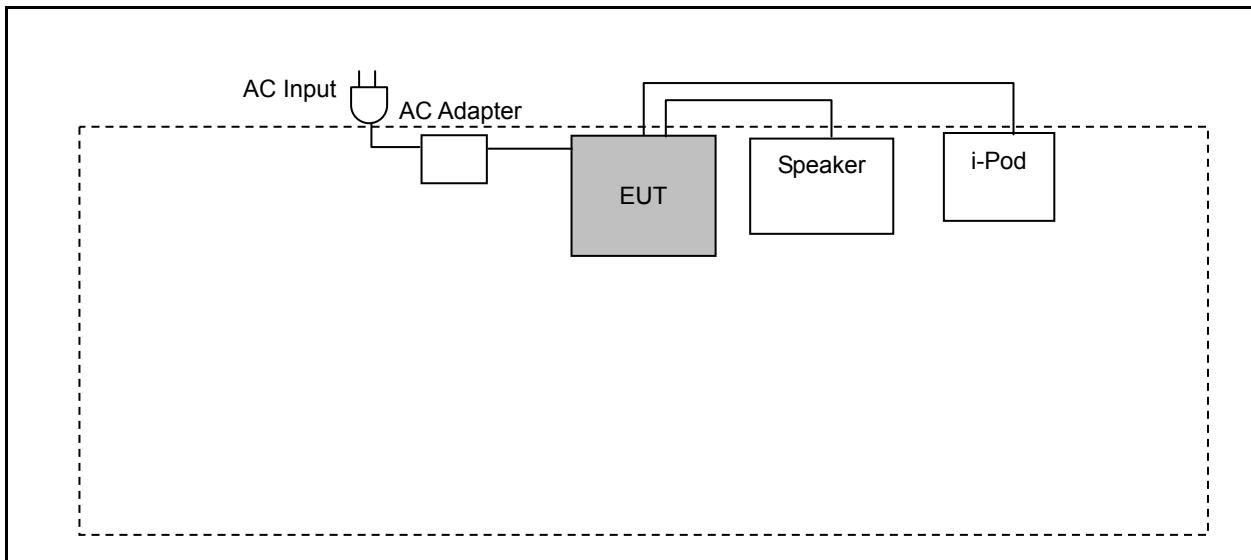

Radiated Emission (Below 1Ghz)

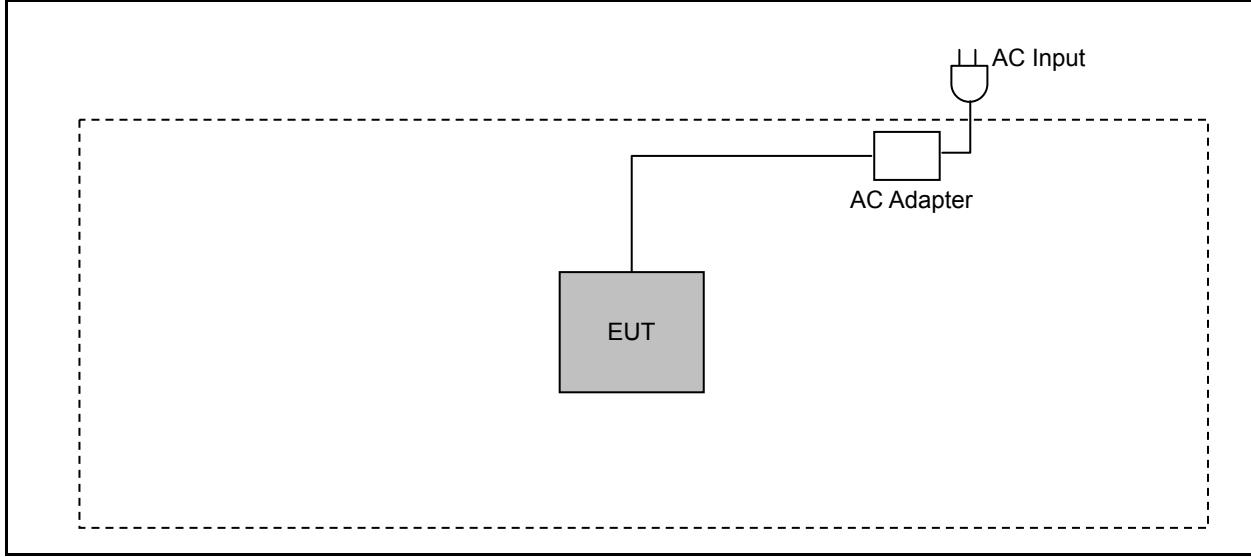

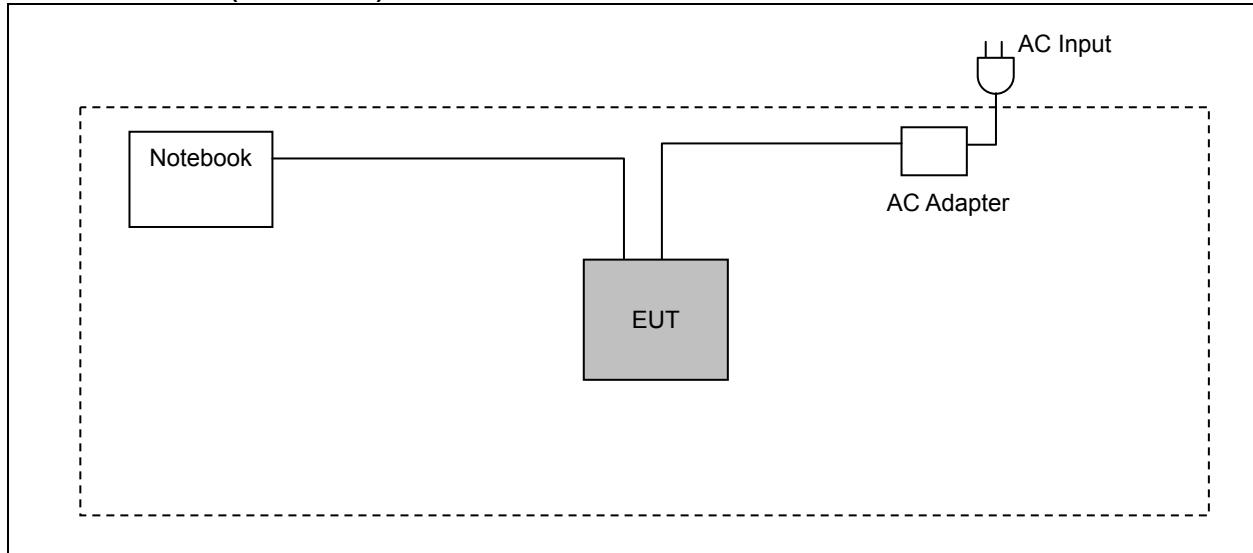Radiated Emission (Above 1Ghz)**3.4. Test Site Environment**


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

4.2. Test Setup

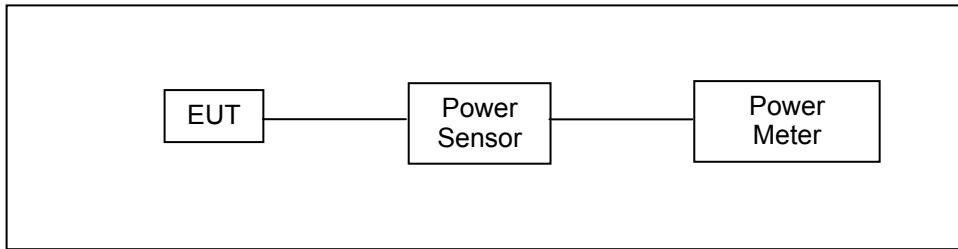

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/19/2012	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/19/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.



4.5. Test Result

Model Number	PR5 Receiver				
Test Item	Maximum Conducted Output Power				
Test Mode	Mode 2: GFSK Link Mode				
Date of Test	04/29/2013			Test Site	TE02
Frequency (MHz)	Packet Type	Average Power		Peak Power	
		(dBm)	(W)	(dBm)	(W)
2402	DH1	-1.11	0.00077	3.92	0.00247
	DH3	2.12	0.00163	3.93	0.00247
	DH5	2.77	0.00189	3.94	0.00248
2441	DH1	-0.84	0.00082	4.29	0.00269
	DH3	2.40	0.00174	4.29	0.00269
	DH5	3.03	0.00201	4.31	0.00270
2480	DH1	-0.55	0.00088	4.63	0.00290
	DH3	2.62	0.00183	4.64	0.00291
	DH5	3.29	0.00213	4.66	0.00292

Model Number	PR5 Receiver				
Test Item	Maximum Conducted Output Power				
Test Mode	Mode 3: $\pi/4$ -DQPSK Mode				
Date of Test	04/29/2013			Test Site	TE02
Frequency (MHz)	Packet Type	Average Power		Peak Power	
		(dBm)	(W)	(dBm)	(W)
2402	DH1	0.26	0.00106	6.76	0.00474
	DH3	2.92	0.00196	6.77	0.00475
	DH5	3.46	0.00222	6.78	0.00476
2441	DH1	0.18	0.00104	6.52	0.00449
	DH3	2.83	0.00192	6.54	0.00451
	DH5	3.40	0.00219	6.55	0.00452
2480	DH1	-0.26	0.00094	6.08	0.00406
	DH3	2.36	0.00172	6.08	0.00406
	DH5	2.83	0.00192	6.10	0.00407



Model Number	PR5 Receiver				
Test Item	Maximum Conducted Output Power				
Test Mode	Mode 4: 8DPSK Link Mode				
Date of Test	04/29/2013			Test Site	TE02
Frequency (MHz)	Packet Type	Average Power		Peak Power	
		(dBm)	(W)	(dBm)	(W)
2402	DH1	0.27	0.00106	7.05	0.00507
	DH3	2.98	0.00199	7.06	0.00508
	DH5	3.49	0.00223	7.07	0.00509
2441	DH1	0.21	0.00105	7.03	0.00505
	DH3	2.86	0.00193	7.04	0.00506
	DH5	3.54	0.00226	7.05	0.00507
2480	DH1	-0.22	0.00095	6.49	0.00446
	DH3	2.39	0.00173	6.50	0.00447
	DH5	2.88	0.00194	6.51	0.00448

5 Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/18/2012	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

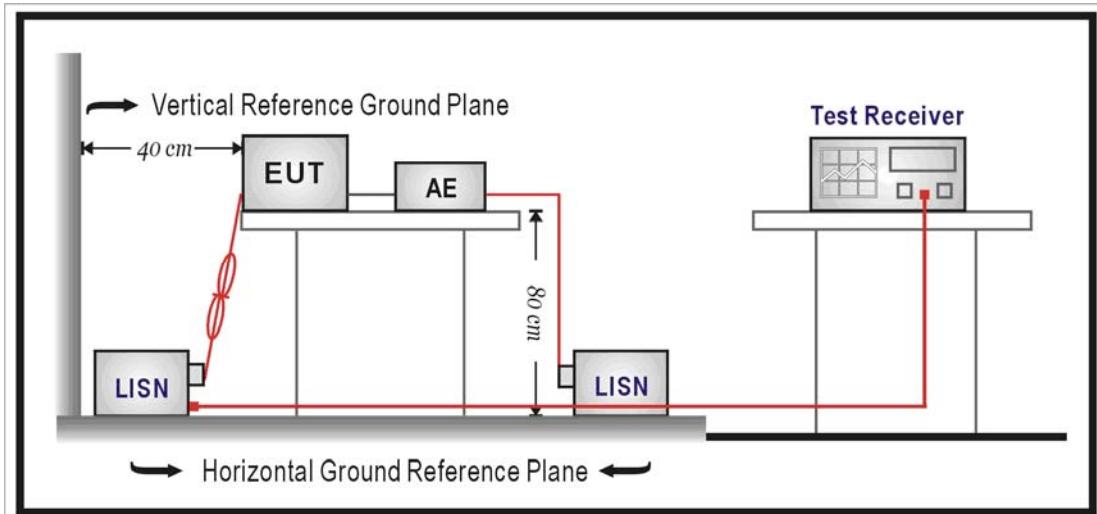

5.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


5.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	05/03/2013
Test By:			Fly Lu
Description:			

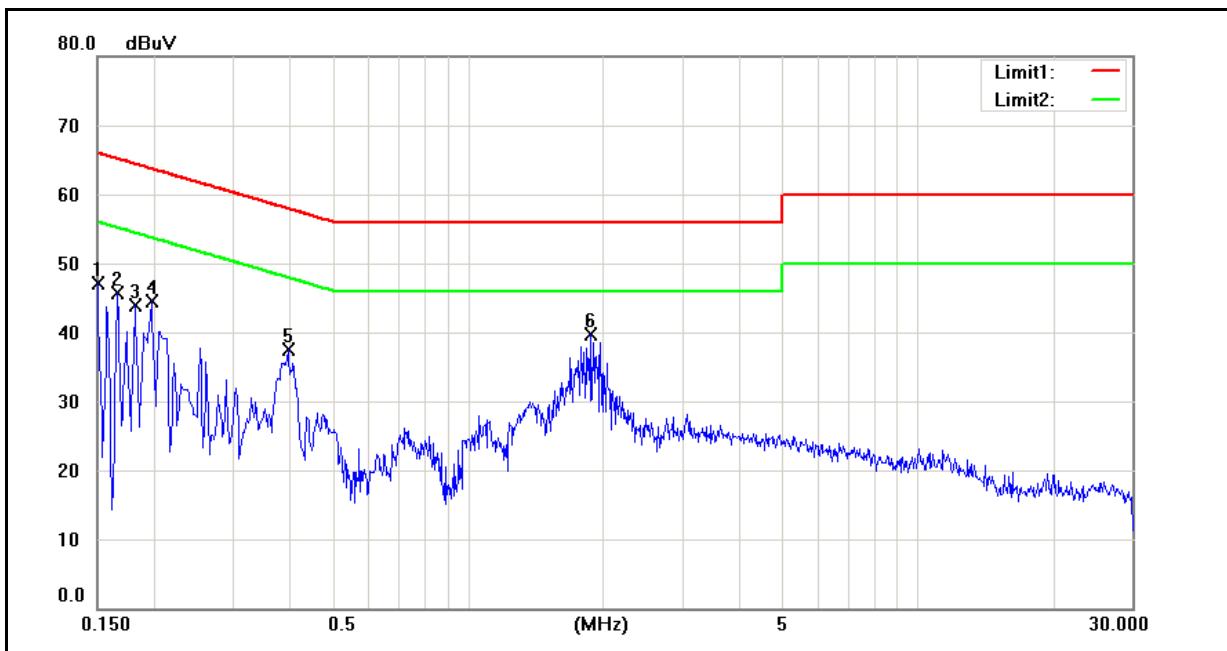

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	34.32	17.71	9.62	43.94	27.33	66.00	56.00	-22.06	-28.67	Pass
2	0.1660	29.71	11.03	9.62	39.33	20.65	65.16	55.16	-25.83	-34.51	Pass
3	0.1820	29.41	11.96	9.62	39.03	21.58	64.39	54.39	-25.36	-32.81	Pass
4	0.1980	28.42	14.16	9.62	38.04	23.78	63.69	53.69	-25.65	-29.91	Pass
5	0.3980	26.00	18.04	9.62	35.62	27.66	57.90	47.90	-22.28	-20.24	Pass
6	1.8820	27.10	17.26	9.70	36.80	26.96	56.00	46.00	-19.20	-19.04	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	05/03/2013
Test By:			Fly Lu
Description:			

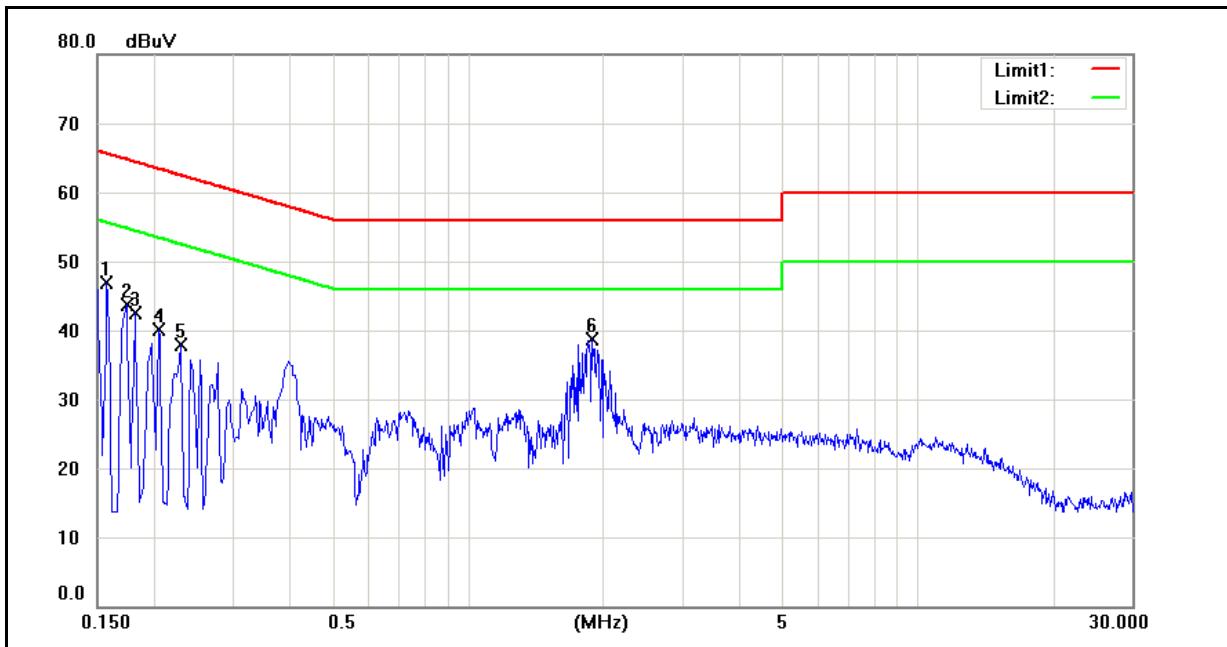

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	31.17	10.45	9.63	40.80	20.08	65.57	55.57	-24.77	-35.49	Pass
2	0.1740	30.39	13.26	9.63	40.02	22.89	64.77	54.77	-24.75	-31.88	Pass
3	0.1820	28.17	9.23	9.63	37.80	18.86	64.39	54.39	-26.59	-35.53	Pass
4	0.2060	25.69	7.75	9.63	35.32	17.38	63.37	53.37	-28.05	-35.99	Pass
5	0.2300	22.22	5.68	9.63	31.85	15.31	62.45	52.45	-30.60	-37.14	Pass
6	1.8940	23.54	14.04	9.70	33.24	23.74	56.00	46.00	-22.76	-22.26	Pass

6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/21/2013	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/29/2012	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/15/2012	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/21/2012	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2012	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup

Below 1GHz

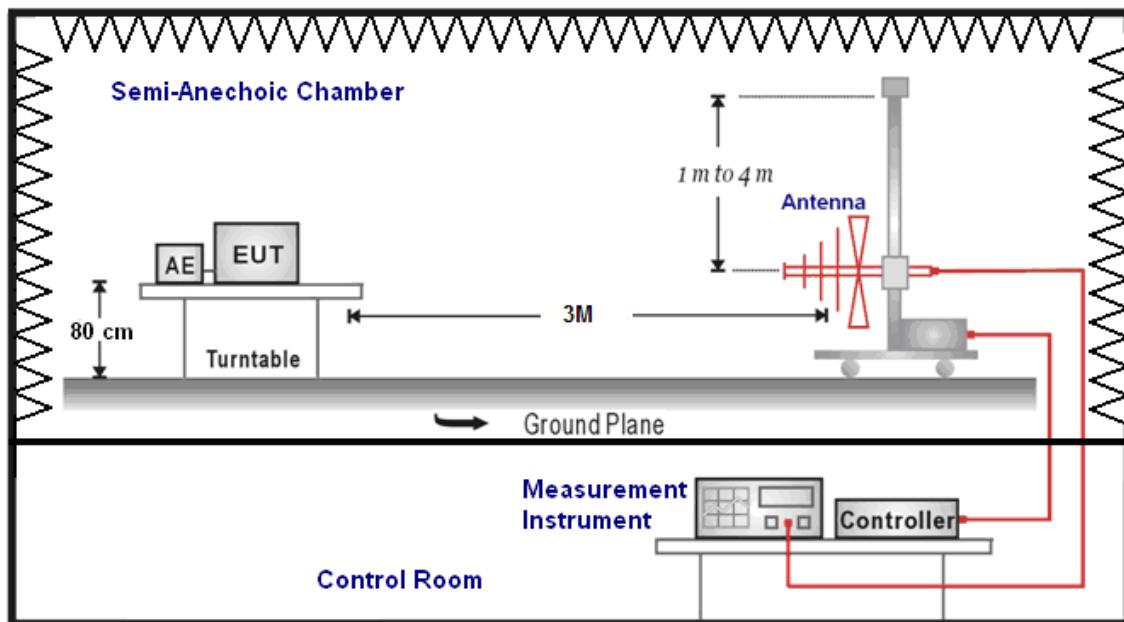

Above 1GHz

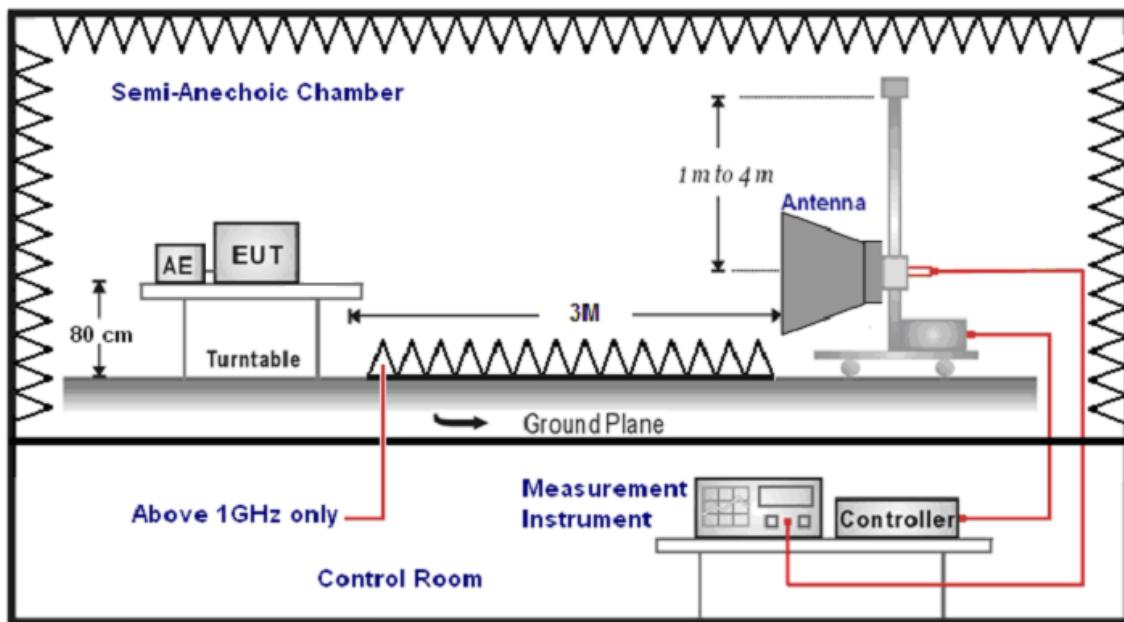

6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



6.5. Test Result

Below 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 1			Date:	04/30/2013		
Test By:						Fly Lu	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
73.0000	35.29	-16.95	18.34	40.00	-21.66	QP	H
239.0000	31.93	-12.29	19.64	46.00	-26.36	QP	H
319.0000	45.75	-9.89	35.86	46.00	-10.14	QP	H
478.0000	28.77	-7.32	21.45	46.00	-24.55	QP	H
676.0000	30.00	-3.89	26.11	46.00	-19.89	QP	H
908.0000	29.89	0.53	30.42	46.00	-15.58	QP	H
92.5000	33.47	-15.48	17.99	43.50	-25.51	QP	V
239.0000	26.61	-12.29	14.32	46.00	-31.68	QP	V
398.5000	32.79	-8.61	24.18	46.00	-21.82	QP	V
602.0000	28.73	-5.00	23.73	46.00	-22.27	QP	V
762.5000	26.42	-2.24	24.18	46.00	-21.82	QP	V
933.0000	26.53	0.85	27.38	46.00	-18.62	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	04/30/2013		
Frequency:	2402 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
2995.000	38.07	5.90	43.97	74.00	-30.03	peak	H
4514.000	34.64	10.92	45.56	74.00	-28.44	peak	H
6215.000	32.82	16.54	49.36	74.00	-24.64	peak	H
2911.000	37.18	5.68	42.86	74.00	-31.14	peak	V
4521.000	33.93	10.93	44.86	74.00	-29.14	peak	V
6089.000	32.39	16.15	48.54	74.00	-25.46	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	04/30/2013		
Frequency:	2441 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
3058.000	37.79	6.04	43.83	74.00	-30.17	peak	H
4486.000	34.60	10.83	45.43	74.00	-28.57	peak	H
6257.000	33.27	16.66	49.93	74.00	-24.07	peak	H
2855.000	37.41	5.54	42.95	74.00	-31.05	peak	V
4570.000	35.23	11.06	46.29	74.00	-27.71	peak	V
5970.000	34.71	15.78	50.49	74.00	-23.51	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	04/30/2013		
Frequency:	2480 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
3030.000	37.11	5.97	43.08	74.00	-30.92	peak	H
4465.000	35.11	10.75	45.86	74.00	-28.14	peak	H
5949.000	33.85	15.73	49.58	74.00	-24.42	peak	H
2939.000	37.19	5.75	42.94	74.00	-31.06	peak	V
4528.000	35.64	10.95	46.59	74.00	-27.41	peak	V
5998.000	34.35	15.88	50.23	74.00	-23.77	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	04/30/2013		
Frequency:	2402 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
2995.000	38.70	5.90	44.60	74.00	-29.40	peak	H
4437.000	36.01	10.66	46.67	74.00	-27.33	peak	H
6117.000	33.49	16.23	49.72	74.00	-24.28	peak	H
2911.000	37.62	5.68	43.30	74.00	-30.70	peak	V
4535.000	34.61	10.97	45.58	74.00	-28.42	peak	V
6033.000	33.69	15.98	49.67	74.00	-24.33	peak	V



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	04/30/2013		
Frequency:	2441 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
2953.000	37.14	5.79	42.93	74.00	-31.07	peak	H
4493.000	34.96	10.86	45.82	74.00	-28.18	peak	H
5809.000	34.66	15.29	49.95	74.00	-24.05	peak	H
3100.000	38.05	6.13	44.18	74.00	-29.82	peak	V
4514.000	35.54	10.92	46.46	74.00	-27.54	peak	V
5949.000	34.45	15.73	50.18	74.00	-23.82	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	04/30/2013		
Frequency:	2480 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
2995.000	39.13	5.90	45.03	74.00	-28.97	peak	H
4409.000	35.37	10.55	45.92	74.00	-28.08	peak	H
5984.000	34.42	15.83	50.25	74.00	-23.75	peak	H
2974.000	37.65	5.84	43.49	74.00	-30.51	peak	V
4444.000	35.52	10.68	46.20	74.00	-27.80	peak	V
5998.000	34.18	15.88	50.06	74.00	-23.94	peak	V




Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	PR5 Receiver			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	04/30/2013		
Frequency:	2441 MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar.
2932.000	37.85	5.74	43.59	74.00	-30.41	peak	H
4514.000	35.09	10.92	46.01	74.00	-27.99	peak	H
5998.000	33.31	15.88	49.19	74.00	-24.81	peak	H
3100.000	38.82	6.13	44.95	74.00	-29.05	peak	V
4556.000	35.39	11.02	46.41	74.00	-27.59	peak	V
5914.000	34.33	15.61	49.94	74.00	-24.06	peak	V

7 20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

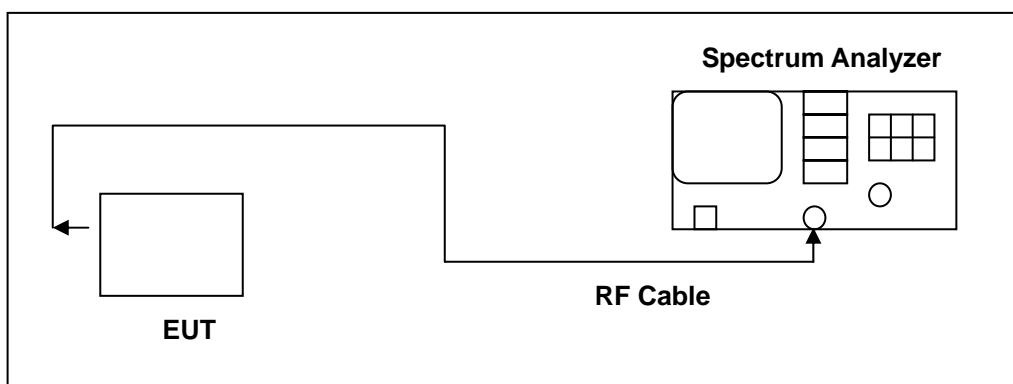

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

99 % Occupied Bandwidth

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.


7.5. Test Result

Model Number	PR5 Receiver		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	04/30/2013	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	0962	0.8731970	-----
2441	0.931	0.8736181	-----
2480	0.928	0.8577661	-----

Model Number	PR5 Receiver		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 4: 8DPSK Link Mode		
Date of Test	04/30/2013	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	1.276	1.1635	-----
2441	1.264	1.1797	-----
2480	1.274	1.1861	-----

7.6. Test Graphs

Mode 2: GFSK Link Mode

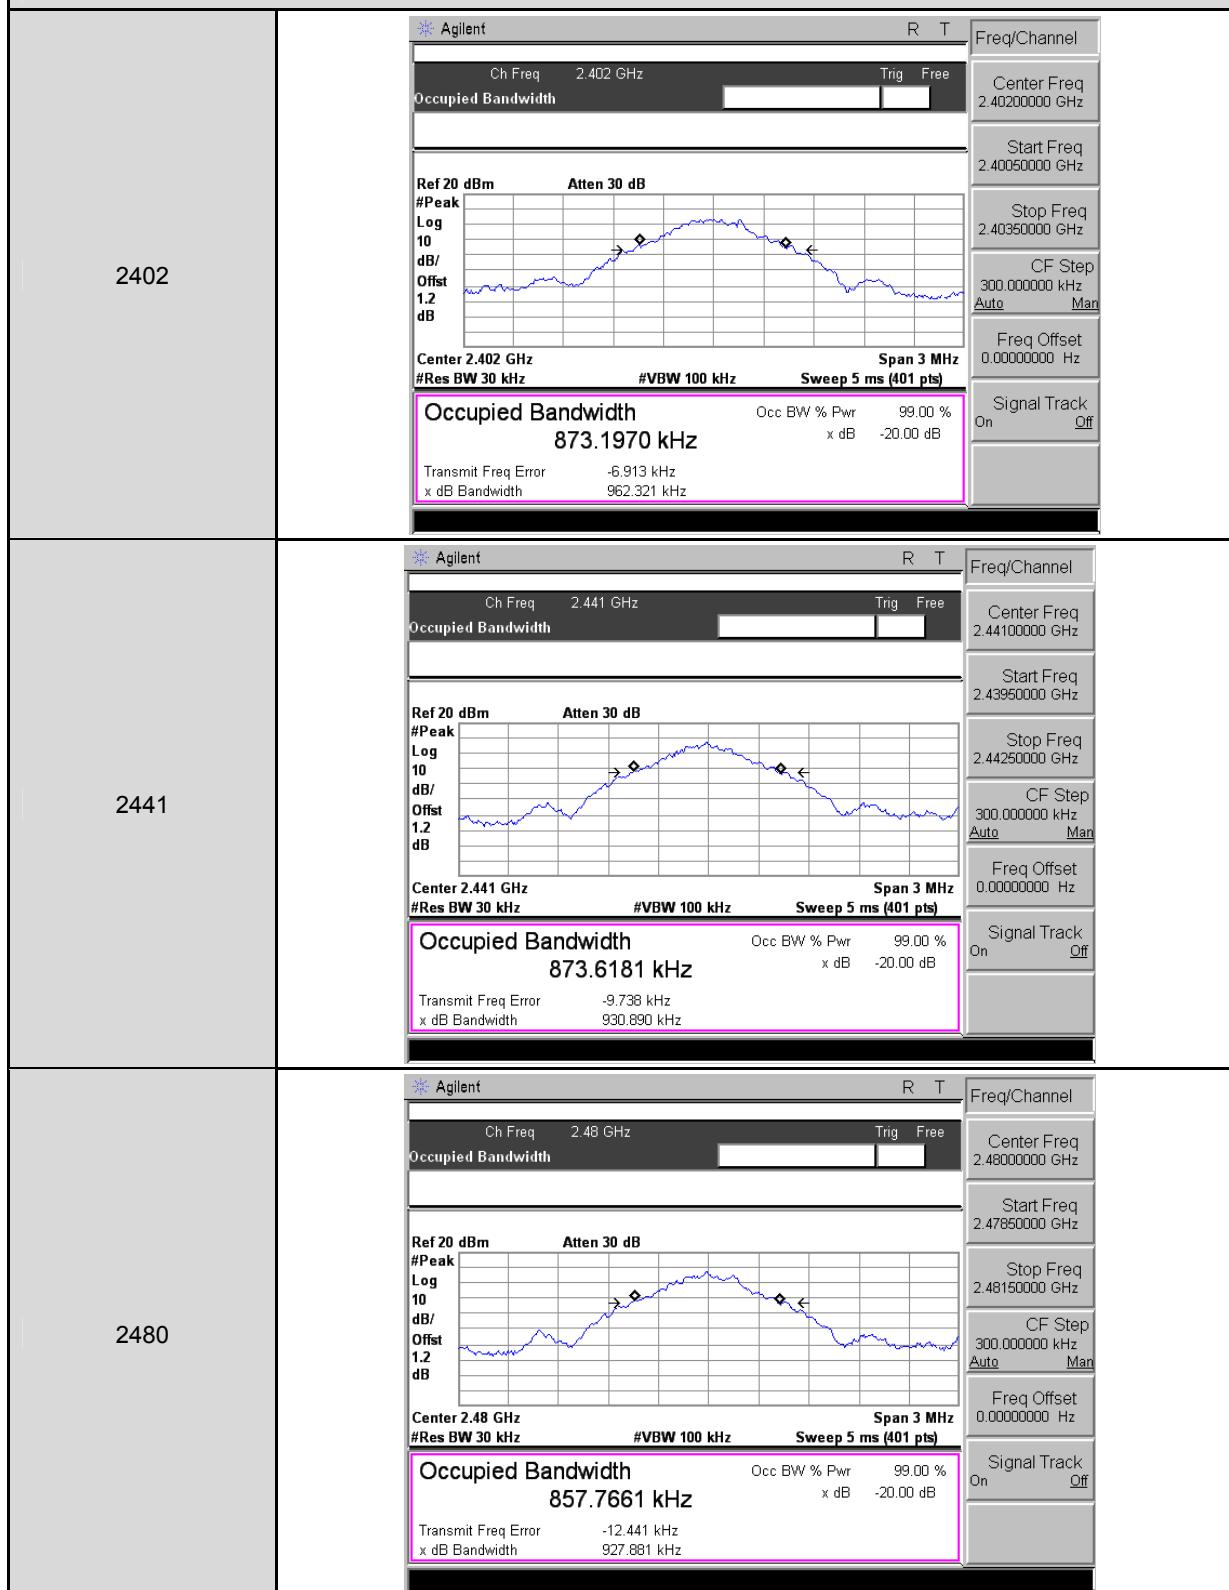

Mode 4: 8DPSK Link Mode


2402	<p>Occupied Bandwidth 1.1635 MHz</p>
2441	<p>Occupied Bandwidth 1.1797 MHz</p>
2480	<p>Occupied Bandwidth 1.1861 MHz</p>

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth.

8.2. Test Setup

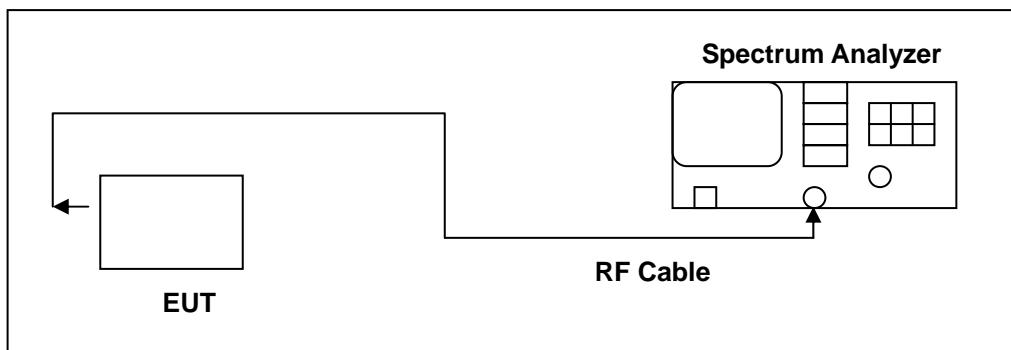

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

**8.5. Test Result**


Model Number	PR5 Receiver		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	04/30/2013	Test Site	TE02
Frequency (MHz)		Measurement (MHz)	Limit (MHz)
2441		1	> 0.641

Model Number	PR5 Receiver		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 4: 8DPSK Link Mode		
Date of Test	04/30/2013	Test Site	TE02
Frequency (MHz)		Measurement (MHz)	Limit (MHz)
2441		1	> 0.850

8.6. Test Graphs


Mode 2: GFSK Link Mode

2441

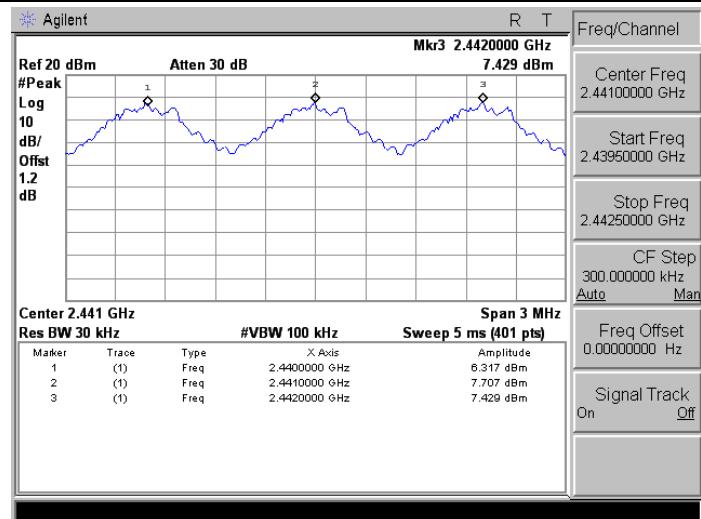

Mode 4: 8DPSK Link Mode

2441

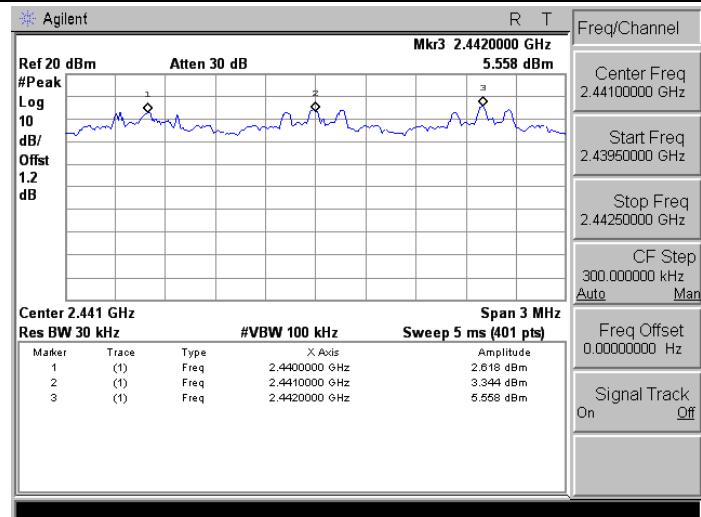


9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

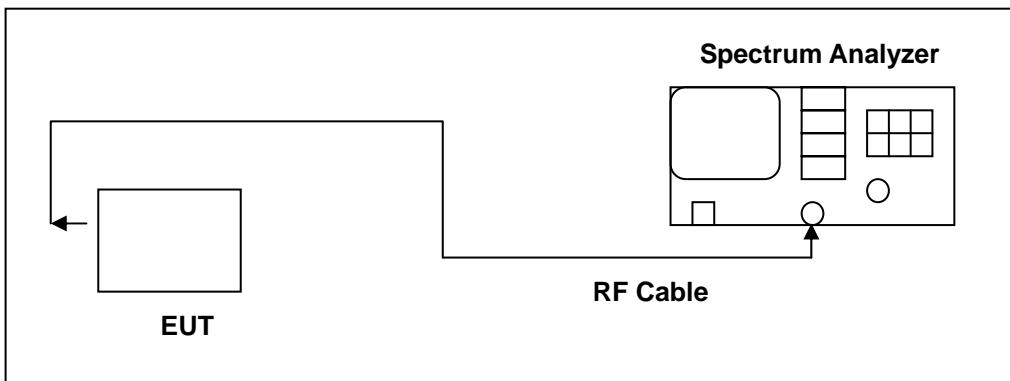

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.

**9.5. Test Result**


Model Number	PR5 Receiver		
Test Item	Number of Hopping		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	05/02/2013	Test Site	TE02
Frequency Range (MHz)		Measurement (ch)	Limit (ch)
2402 - 2480		79	> 15

Model Number	PR5 Receiver		
Test Item	Number of Hopping		
Test Mode	Mode 3: $\pi/4$ -DQPSK Link Mode		
Date of Test	05/02/2013	Test Site	TE02
Frequency Range (MHz)		Measurement (ch)	Limit (ch)
2402 - 2480		79	> 15

Model Number	PR5 Receiver		
Test Item	Number of Hopping		
Test Mode	Mode 4: 8DPSK Link Mode		
Date of Test	05/02/2013	Test Site	TE02
Frequency Range (MHz)		Measurement (ch)	Limit (ch)
2402 - 2480		79	> 15


9.6. Test Graphs

Mode 2: GFSK Link Mode

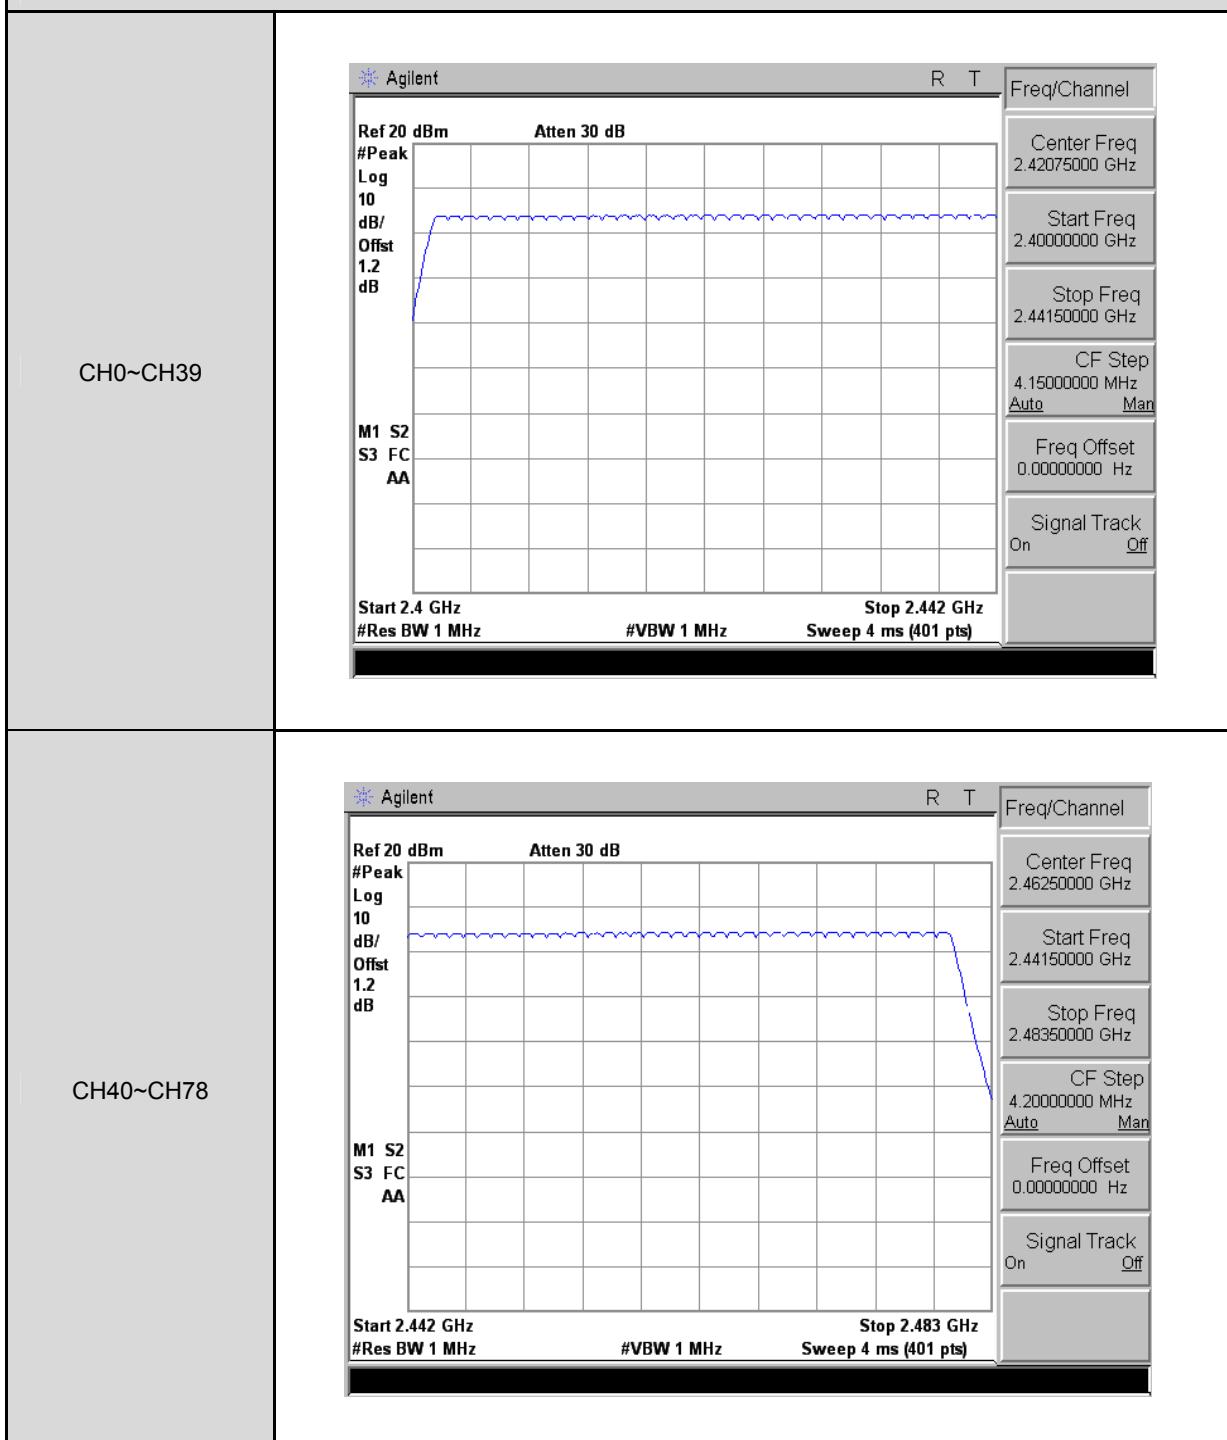


Mode 4: 8DPSK Link Mode

CH0~CH39

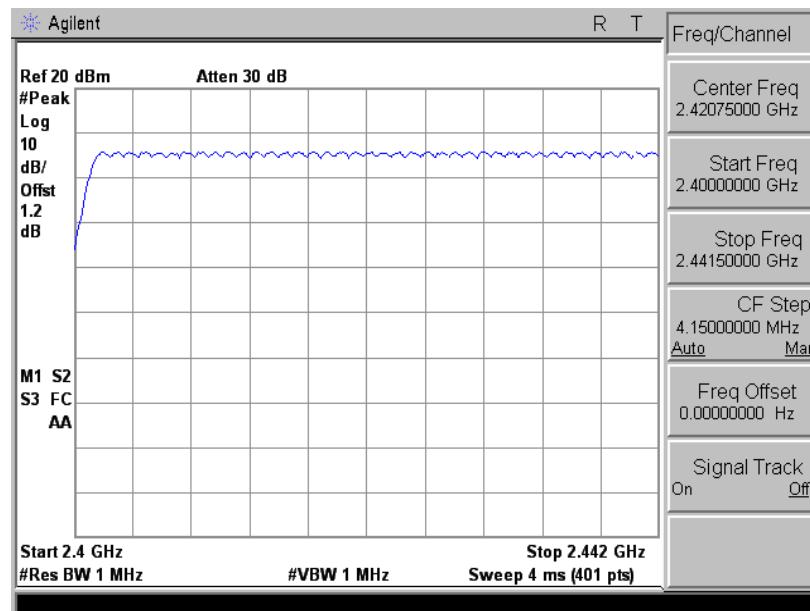

CH40~CH78

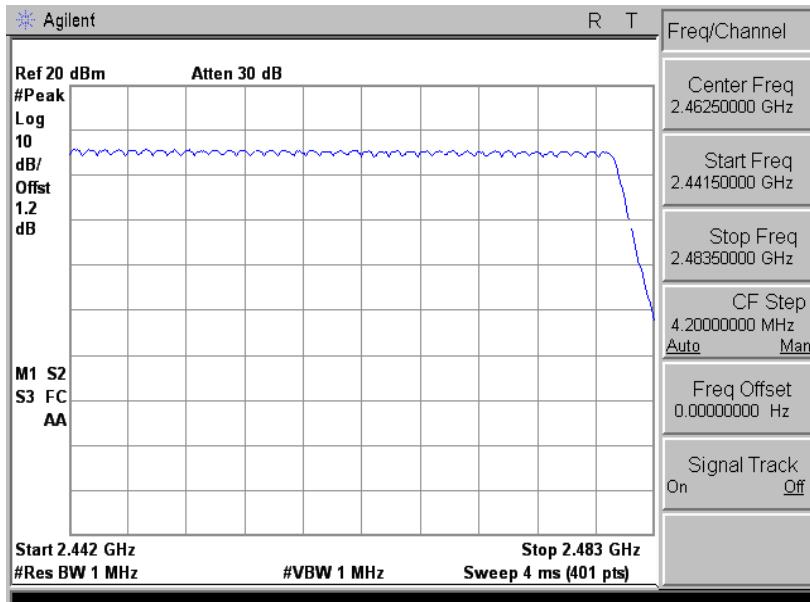


10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

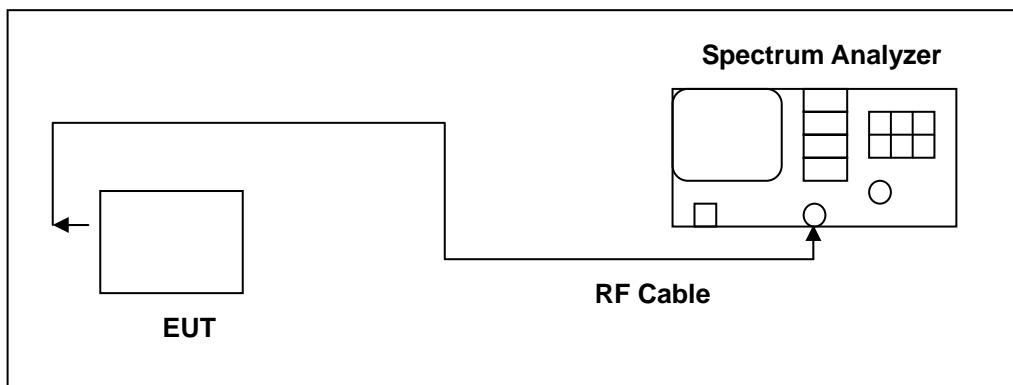

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.


10.5. Test Result


Model Number	PR5 Receiver		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	04/29/2013	Test Site	TE02
DH1			
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$		
Each Channel Dwell Times (1)	0.475 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 10.13 = 320.108(\text{times})$		
Dwell Times on Cycle (1) * (2)	152.0513 ms (sec)		
LIMIT(msc)	< = 400		
DH3			
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$		
Each Channel Dwell Times (1)	1.750 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 5.1 = 161.16(\text{times})$		
Dwell Times on Cycle (1) * (2)	282.0300 ms (sec)		
LIMIT(msc)	< = 400		
DH5			
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$		
Each Channel Dwell Times (1)	2.975 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 3.37 = 106.492(\text{times})$		
Dwell Times on Cycle (1) * (2)	316.8137 ms (sec)		
LIMIT(msc)	< = 400		



Model Number	PR5 Receiver		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 4: 8DPSK Link Mode		
Date of Test	04/29/2013	Test Site	TE02
3DH1			
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$800/79CH = 10.13$ (times/sec)		
Each Channel Dwell Times (1)	0.475 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 10.13 = 320.108$ (times)		
Dwell Times on Cycle (1) * (2)	152.0513 ms (sec)		
LIMIT(msc)	< = 400		
3DH3			
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$400/79CH = 5.1$ (times/sec)		
Each Channel Dwell Times (1)	1.750 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 5.1 = 161.16$ (times)		
Dwell Times on Cycle (1) * (2)	282.0300 ms (sec)		
LIMIT(msc)	< = 400		
3DH5			
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37$ (times/sec)		
Each Channel Dwell Times (1)	2.975 ms (sec)		
Each Channel Dwell Times on Cycle(2)	$31.6 * 3.37 = 106.492$ (times)		
Dwell Times on Cycle (1) * (2)	316.8137 ms (sec)		
LIMIT(msc)	< = 400		

10.6. Test Graphs

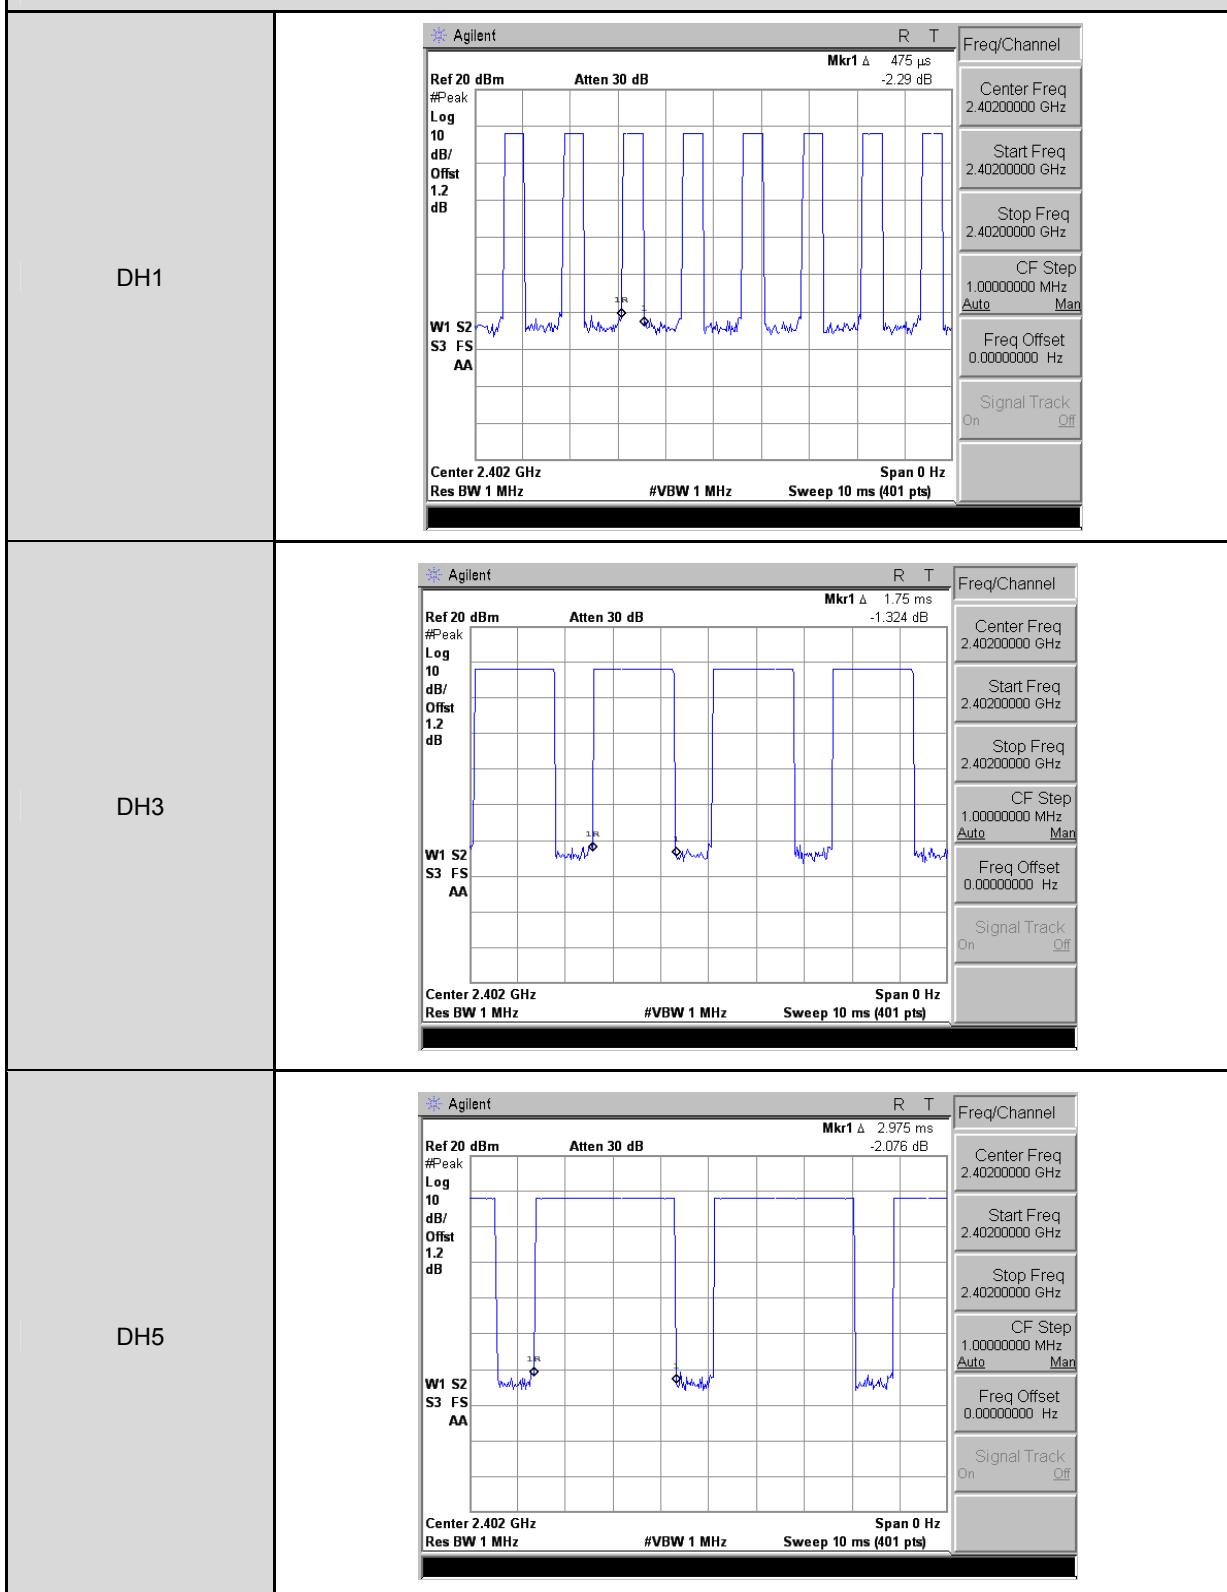Mode 2: GFSK Link Mode

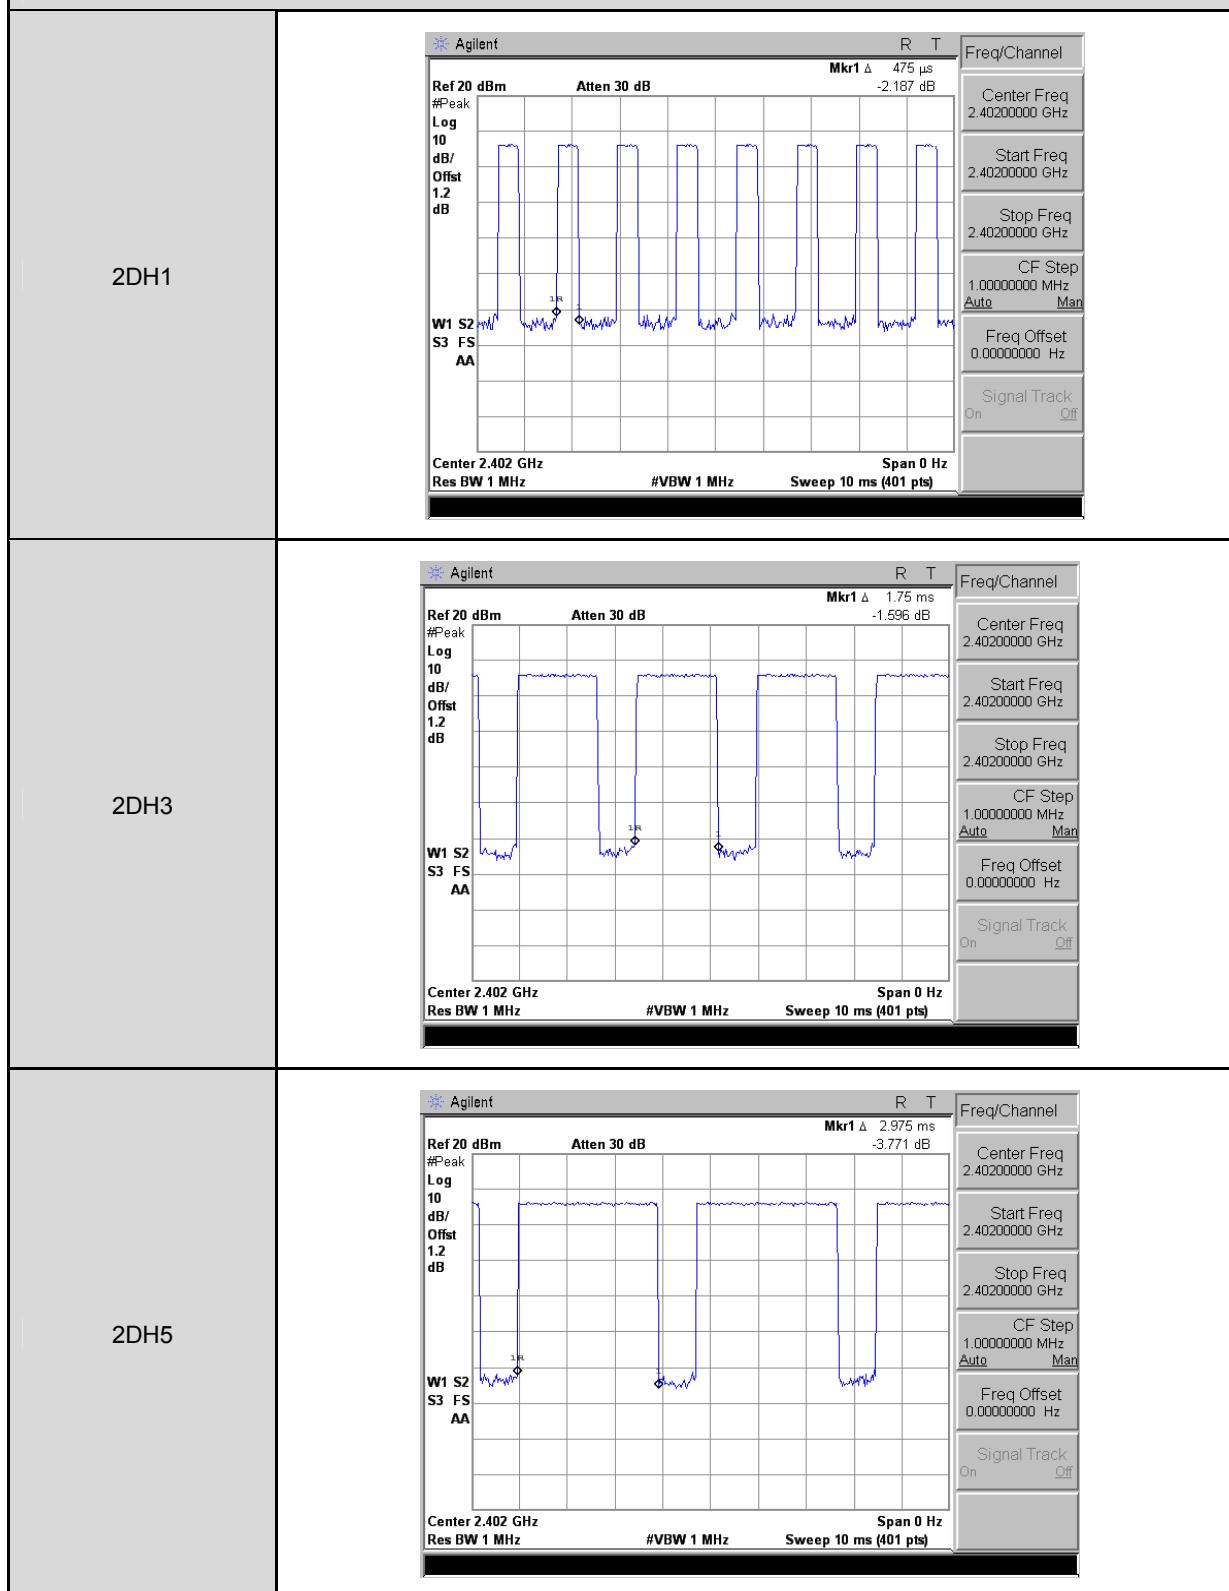
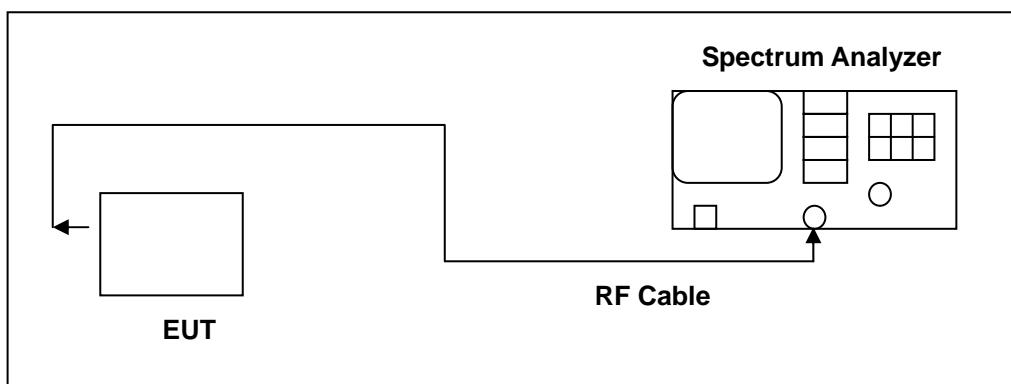
Mode 4: 8DPSK Link Mode


11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup



11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2012	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/09/2012	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)


11.5. Test Graphs

Mode 2: GFSK Link Mode

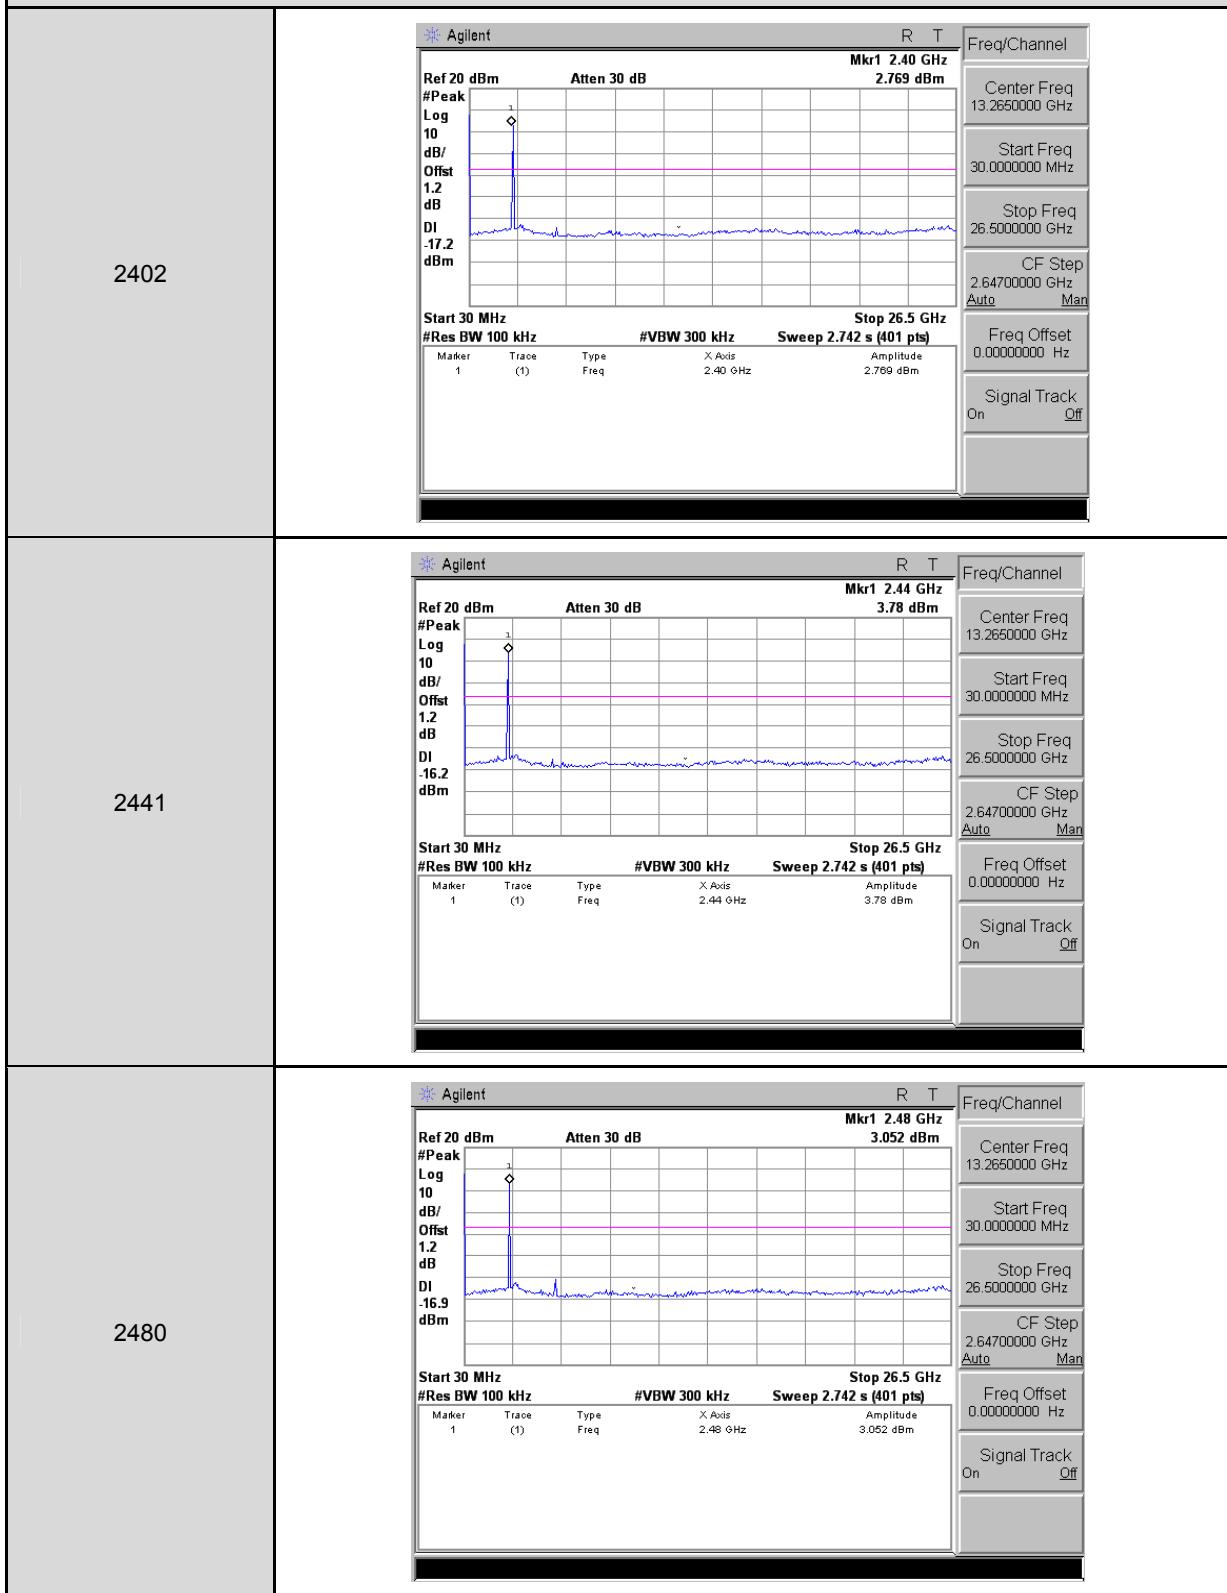


Mode 2: GFSK Link Mode _ Un-hopping


2402

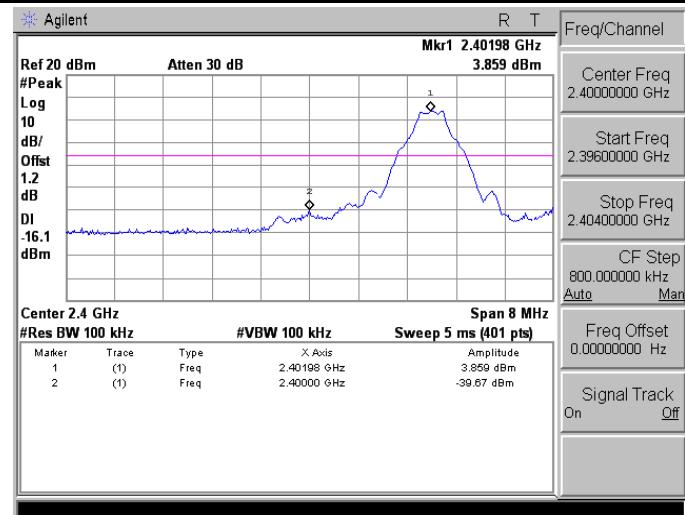


2480

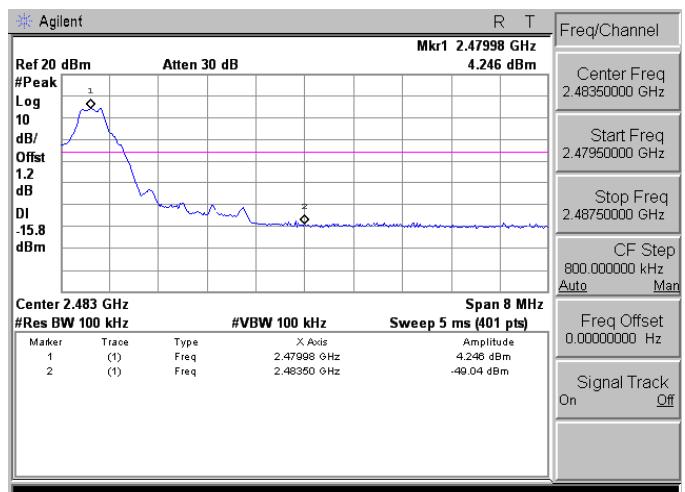
Mode 2: GFSK Link Mode _ Hopping


2402 ~ 2480

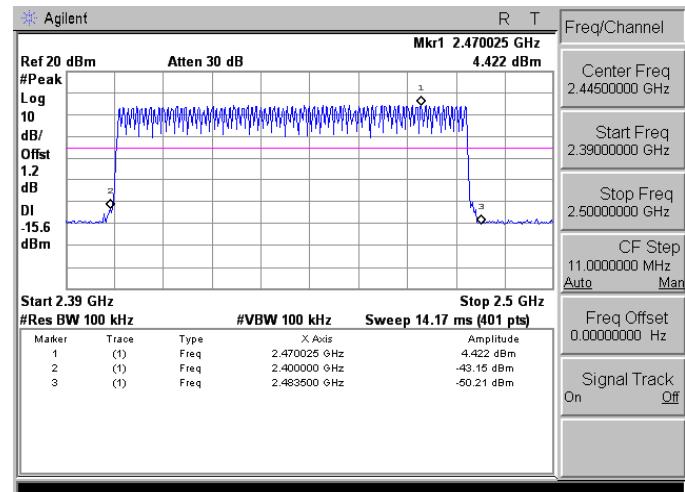

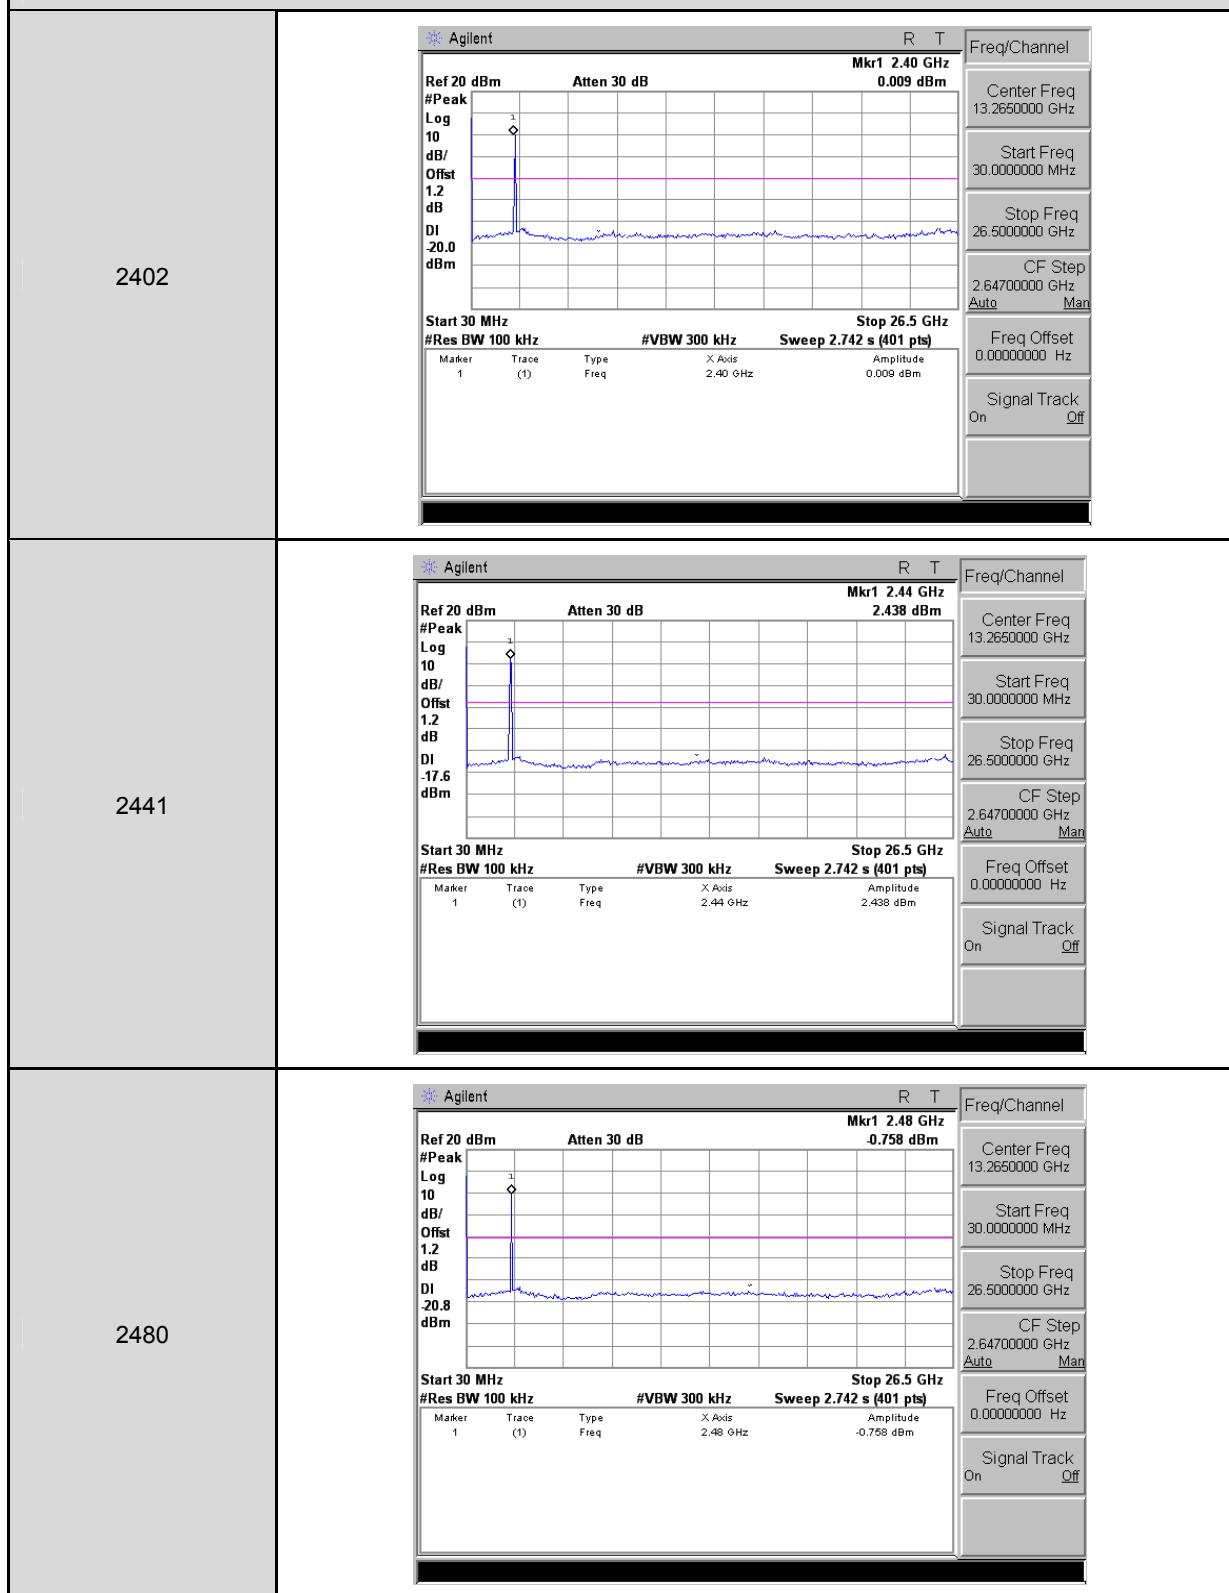
Mode 4: 8DPSK Link Mode


Mode 4: 8DPSK Link Mode _ Un-hopping


2402

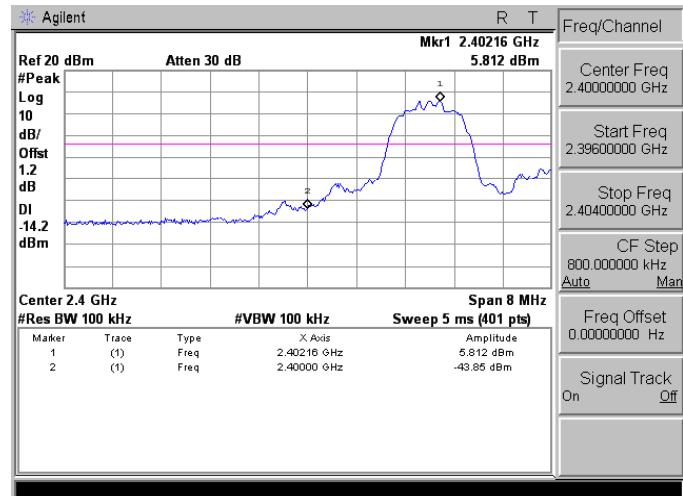

2480

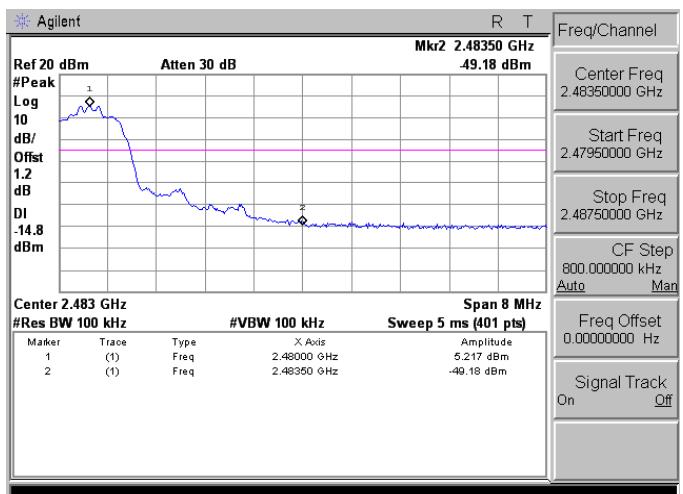
Mode 4: 8DPSK Link Mode _ Hopping

2402 ~ 2480

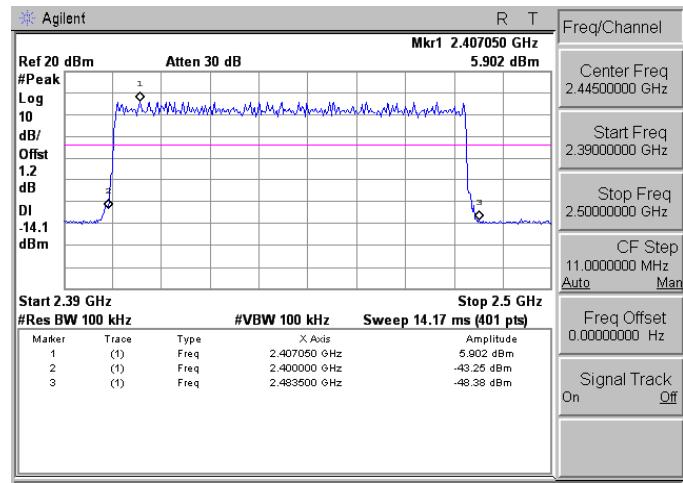


12 Band Edges Measurement

12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.2. Test Setup

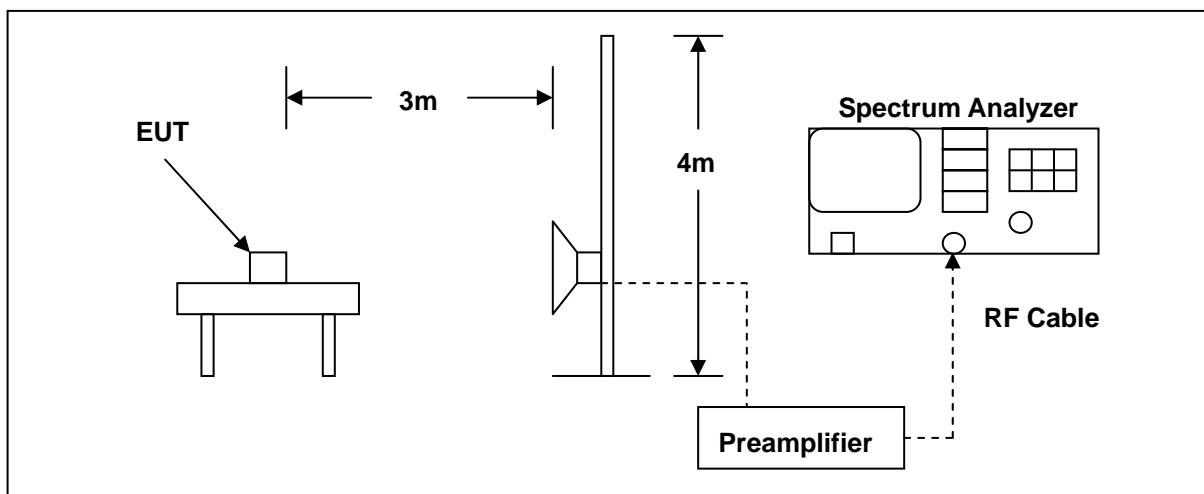

12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/09/2012	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/15/2012	(1)
Test Site	ATL	TE01	888001	08/28/2012	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.



12.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


12.5. Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	04/30/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

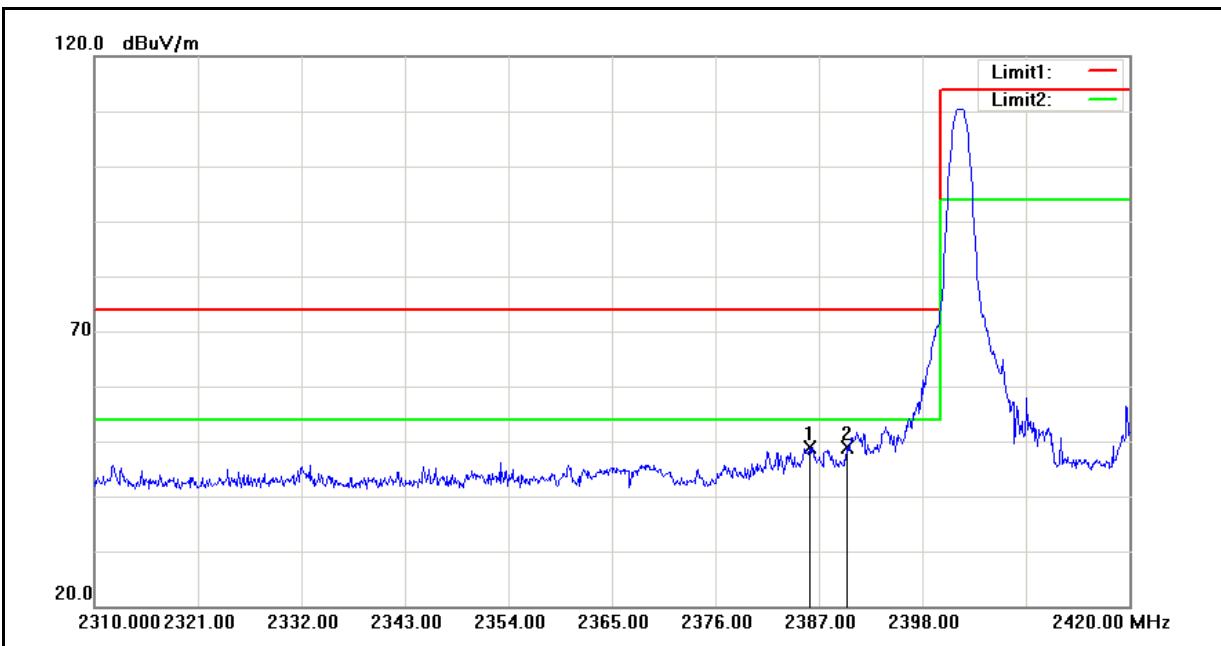


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.010	45.11	3.85	48.96	74.00	-25.04	peak
2	2390.000	45.10	3.88	48.98	74.00	-25.02	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	04/30/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

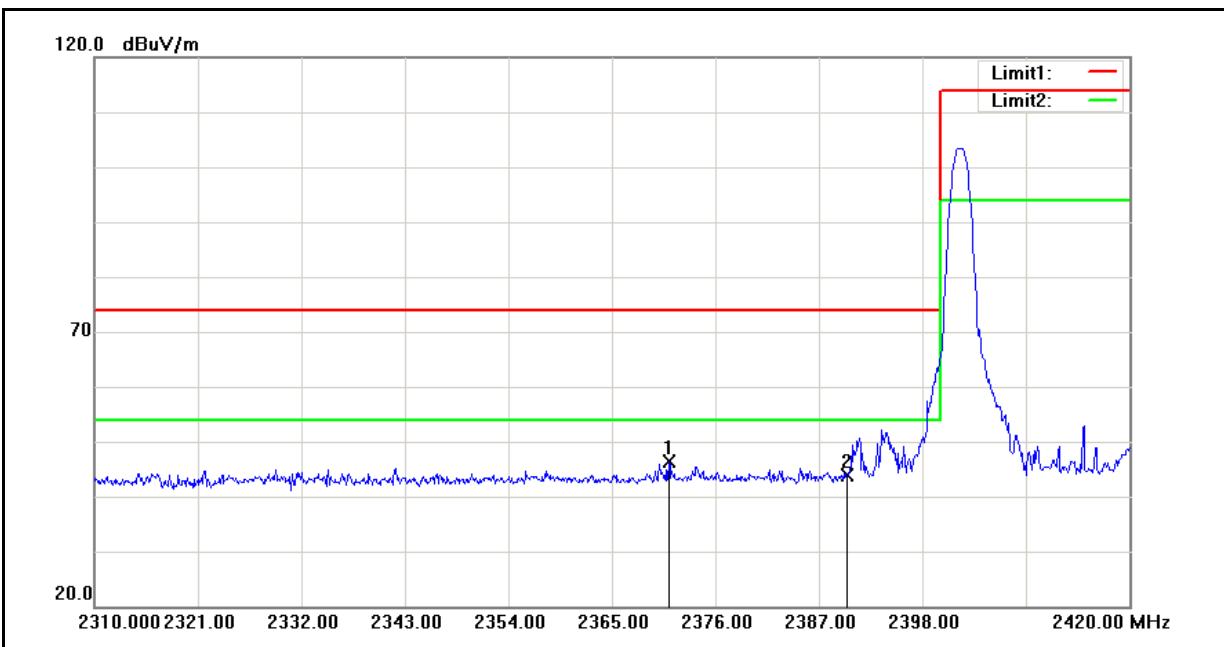


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.050	42.72	3.75	46.47	74.00	-27.53	peak
2	2390.000	40.02	3.88	43.90	74.00	-30.10	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	04/30/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

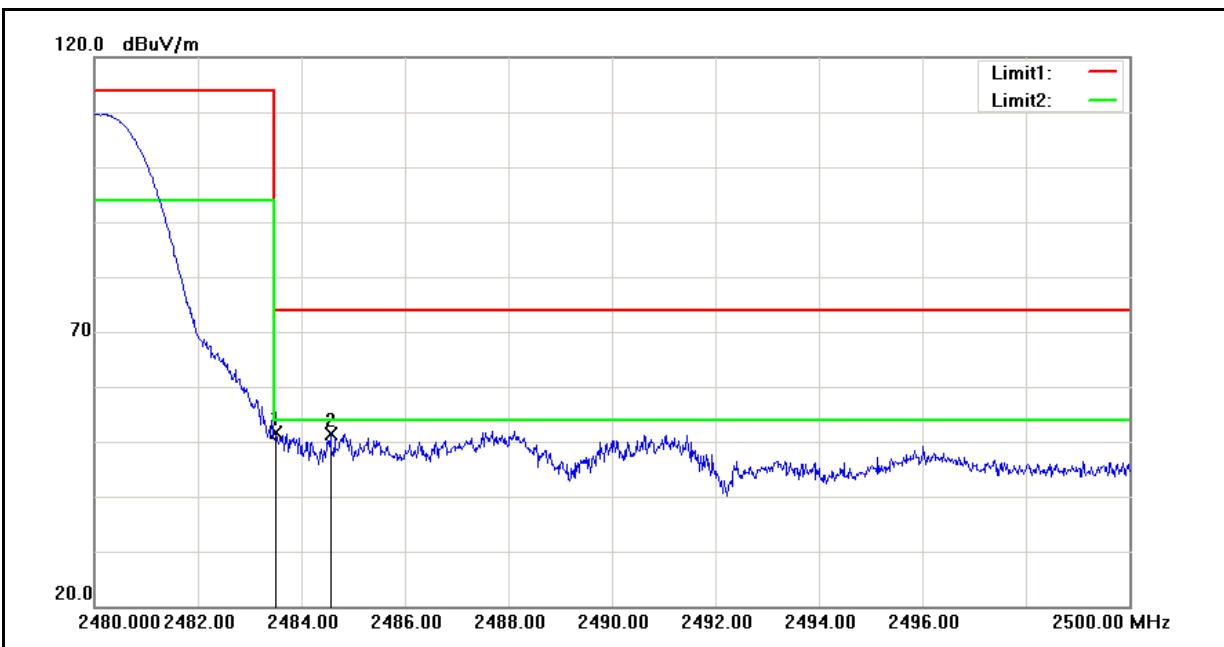


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.11	4.50	51.61	74.00	-22.39	peak
2	2484.560	46.99	4.51	51.50	74.00	-22.50	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	04/30/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

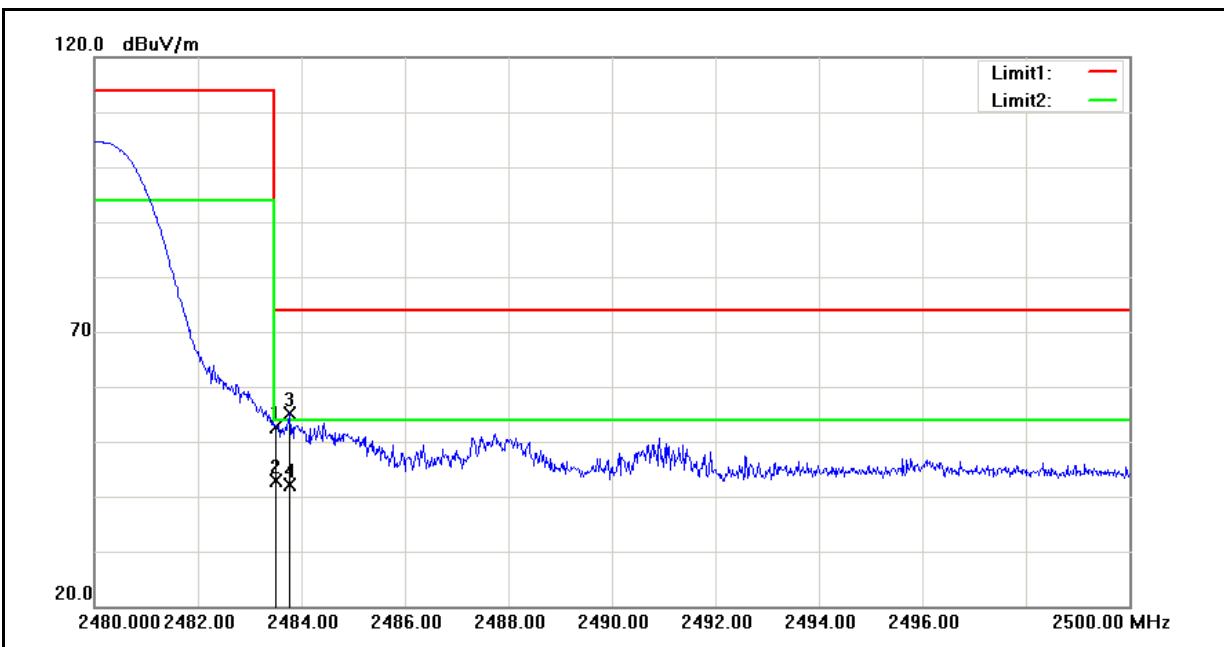


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.11	4.50	52.61	74.00	-21.39	peak
2	2483.500	38.48	4.50	42.98	54.00	-11.02	AVG
3	2483.780	50.50	4.51	55.01	74.00	-18.99	peak
4	2483.780	37.54	4.51	42.05	54.00	-11.95	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/30/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

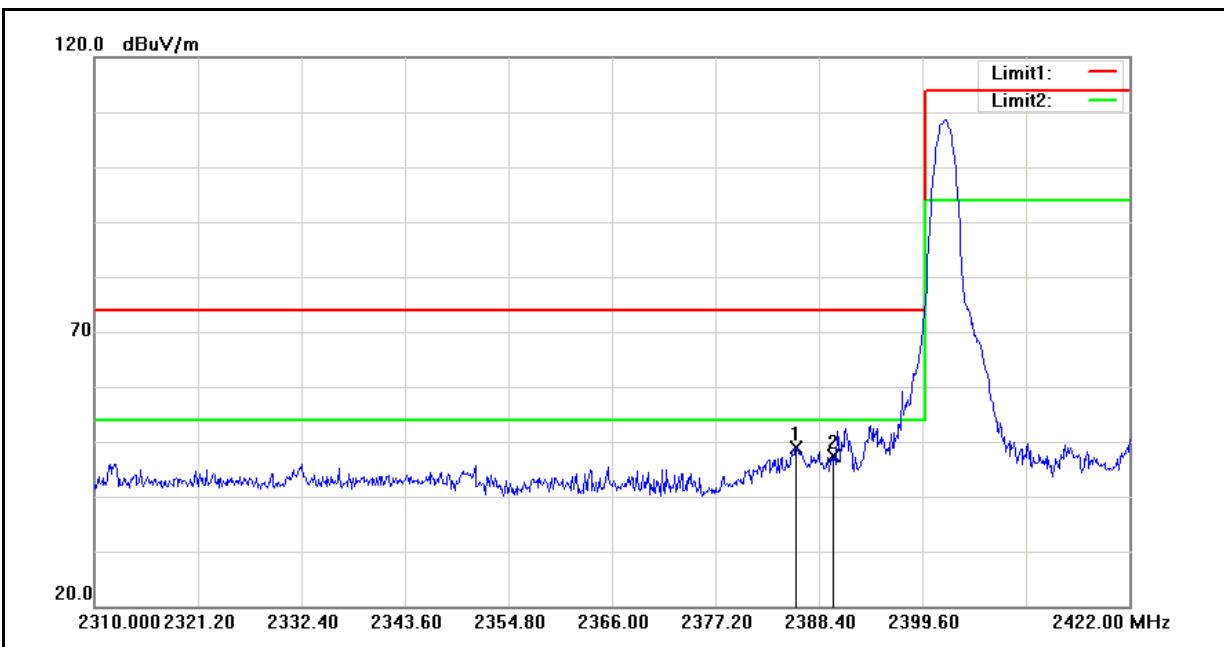


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.936	45.10	3.85	48.95	74.00	-25.05	peak
2	2390.000	43.60	3.88	47.48	74.00	-26.52	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/30/2013
Frequency:	2402 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

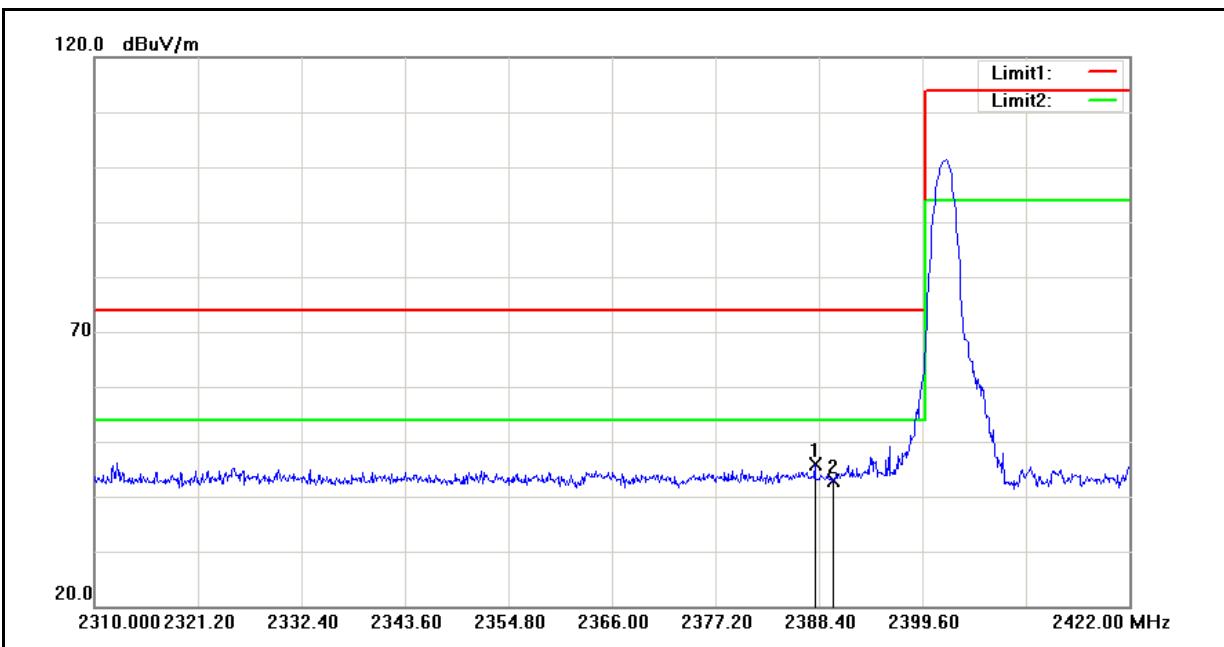


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.952	41.92	3.86	45.78	74.00	-28.22	peak
2	2390.000	39.02	3.88	42.90	74.00	-31.10	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/30/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Horizontal		

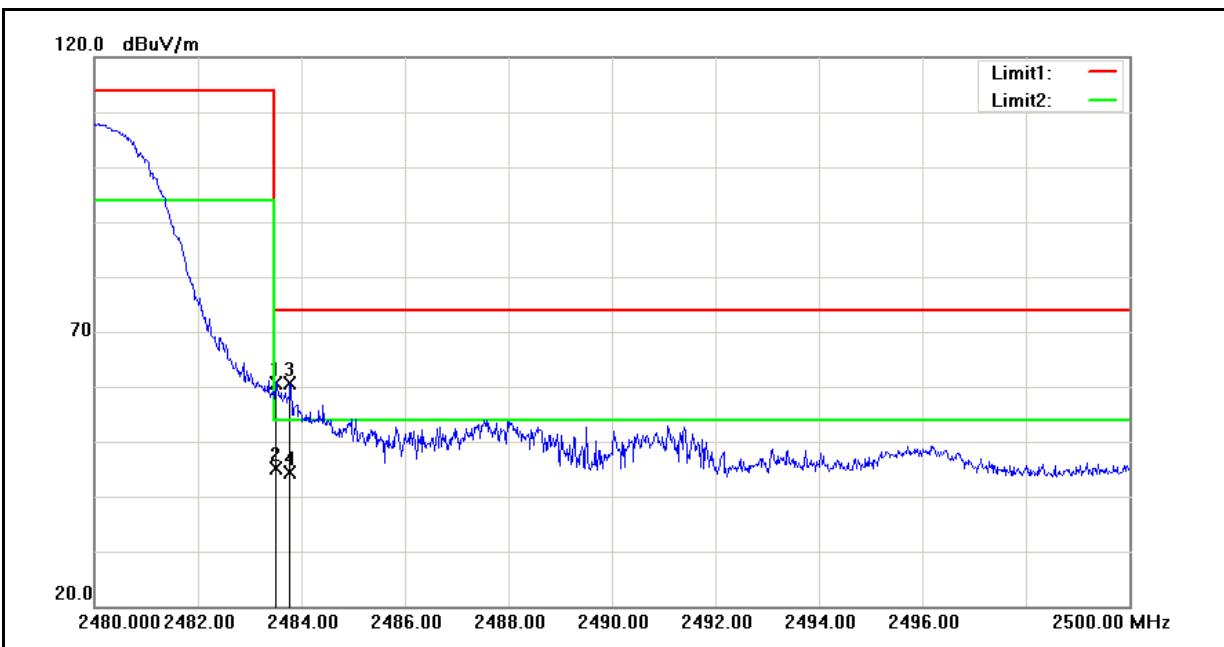


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.15	4.50	60.65	74.00	-13.35	peak
2	2483.500	40.60	4.50	45.10	54.00	-8.90	AVG
3	2483.780	56.01	4.51	60.52	74.00	-13.48	peak
4	2483.780	39.89	4.51	44.40	54.00	-9.60	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	04/30/2013
Frequency:	2480 MHz	Test By:	Fly Lu
Ant.Polar.:	Vertical		

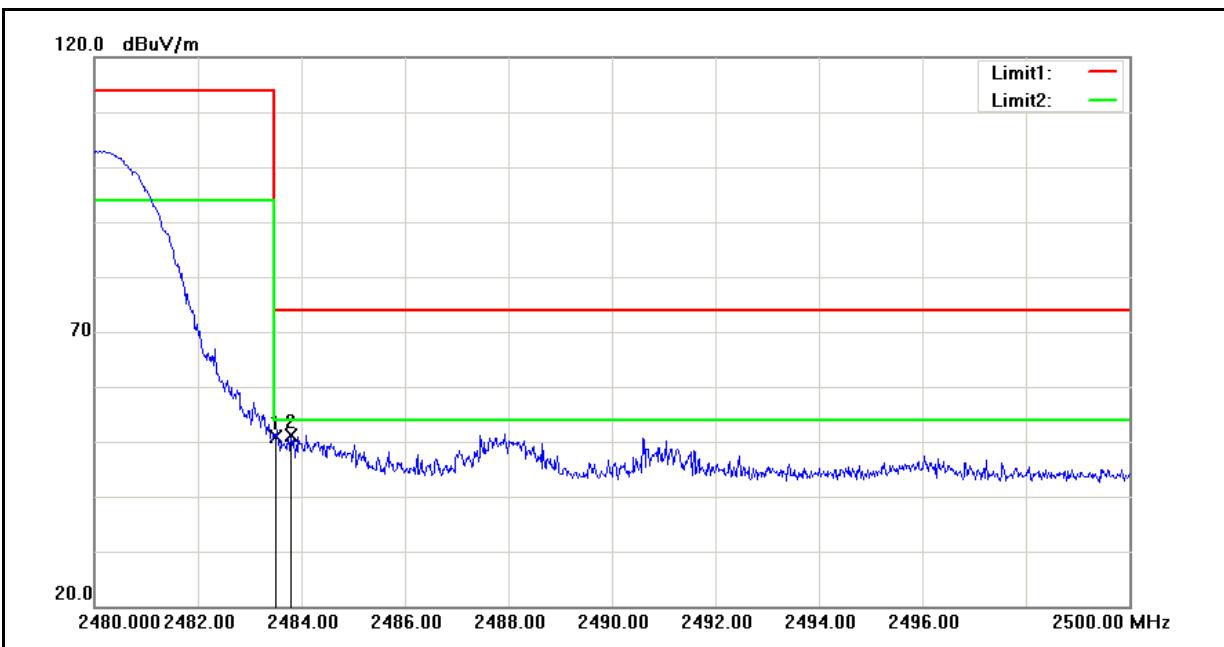


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.48	4.50	50.98	74.00	-23.02	peak
2	2483.800	46.57	4.51	51.08	74.00	-22.92	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Hopping	Date:	04/30/2013
Ant.Polar.:	Horizontal	Test By:	Fly Lu

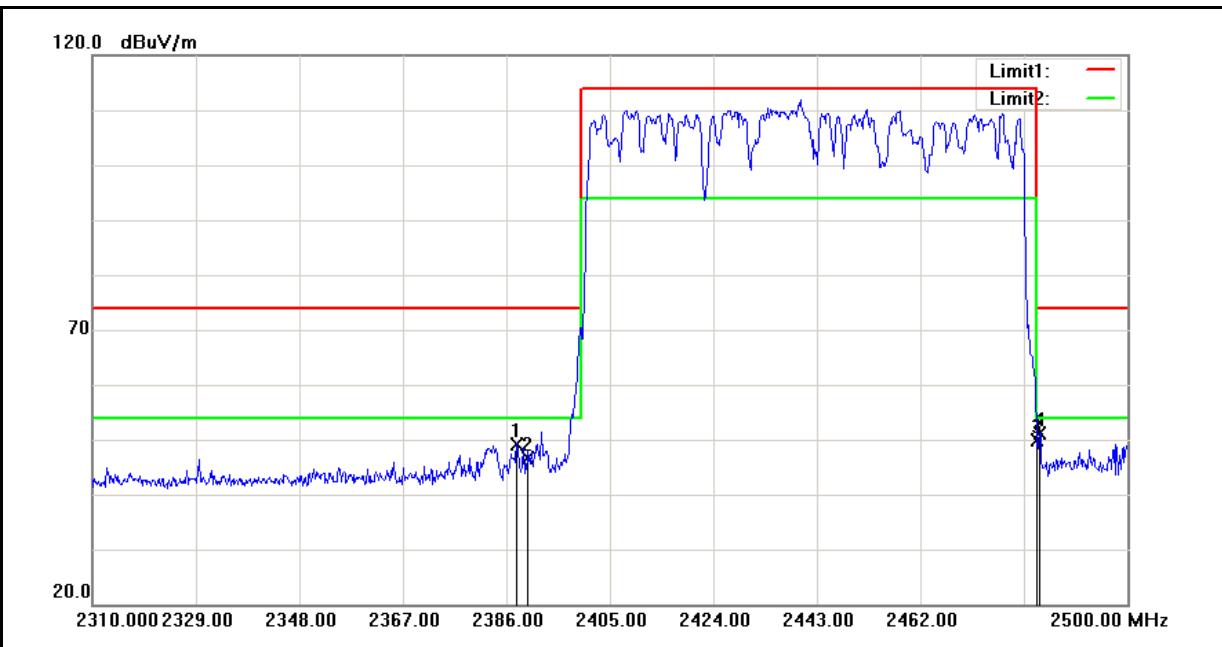

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.900	45.39	3.86	49.25	74.00	-24.75	peak
2	2390.000	42.82	3.88	46.70	74.00	-27.30	peak
3	2483.500	45.26	4.50	49.76	74.00	-24.24	peak
4	2483.850	46.65	4.51	51.16	74.00	-22.84	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	PR5 Receiver	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Hopping	Date:	04/30/2013
Ant.Polar.:	Vertical	Test By:	Fly Lu

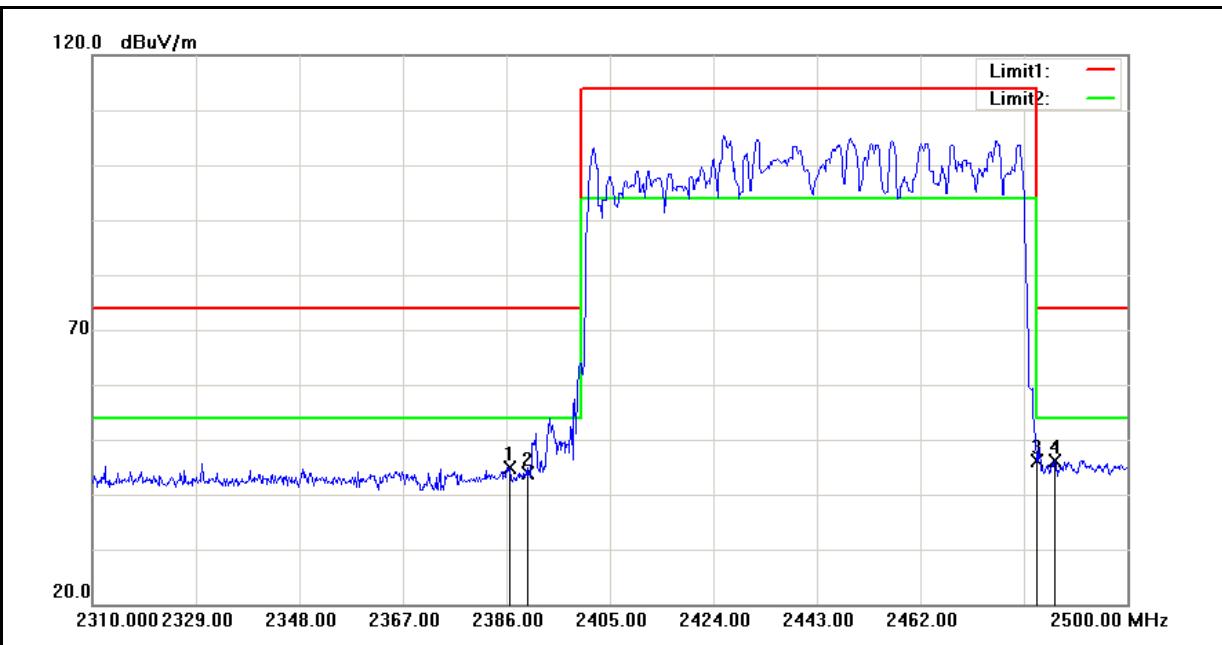

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.570	40.97	3.86	44.83	74.00	-29.17	peak
2	2390.000	40.00	3.88	43.88	74.00	-30.12	peak
3	2483.500	41.54	4.50	46.04	74.00	-27.96	peak
4	2486.700	41.67	4.53	46.20	74.00	-27.80	peak



13 Antenna Measurement

13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Antenna Connector Construction

The antenna used in this product is Printing antenna. And the maximum Gain of this antenna is only 2.52 dBi.