

# TEST REPORT

Report Number		RAPA13-O-624
Type of Equipment		Singing Machine Home
Model Name		SMC HOME
FCC ID		2AAXO-SMCHOME
IC Number		11387A-SMCHOME
Applicant	Name	The Singing Machine Company, Inc.
	Logo	
	Address	6301 NW 5 <sup>th</sup> Way, Suite 2900, Fort Lauderdale FL 33309
Manufacturer	Name	VisionScape
	Address	404, 60-19, Gasan-dong, Geumcheon-gu, Seoul, Korea
Test period		August 20, 2013 to September 10, 2013
Issuing date of report		September 16, 2013
Total page		63 pages (including this page)


## SUMMARY

The equipment complies with FCC Part 15.247: Operation within the bands 902 MHz to 928 MHz, 2 400 MHz to 2 483.5 MHz, and 5 725 MHz to 5 850 MHz and IC RSS-210 Issue8 Annex 1-2010.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Date : March 16, 2013

Date : March 16, 2013

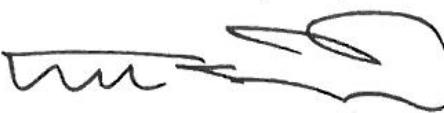Prepared and tested by Tae Yang Yoon  
Manager /TCL of RAPA

Reviewed by Sukil Park  
Executive Managing Director/TCL of RAPA

## CONTENTS

<b>1. GENERAL DESCRIPTION .....</b>	<b>3</b>
1.1 Applicant .....	3
1.2 Manufacturer .....	3
1.3 Basic description of EUT .....	3
1.4 Electrical specification .....	4
<b>2. General information of test.....</b>	<b>5</b>
2.1 Standard for measurement methods .....	5
2.2 Description of EUT modification .....	5
2.3 Description of test system configuration .....	5
<b>3. Measurement data.....</b>	<b>6</b>
3.1 6 dB and 99% bandwidth .....	6
3.2 Maximum peak output power .....	25
3.3 Power spectral density .....	27
3.4 Conducted band edges and spurious emission .....	37
3.6 Power line conducted emission .....	60
<b>4. Test equipment list .....</b>	<b>63</b>

## 1. GENERAL DESCRIPTION

### 1.1 Applicant

- Company name : The Singing Machine Company, Inc.
- Address : 6301 NW 5<sup>th</sup> Way, Suite 2900, Fort Lauderdale FL 33309
- Contact person : Gary Atkinson / CEO
- Phone/Fax : +1-954-596-1000 / +1-954-596-2000

### 1.2 Manufacturer

- Company name : VisionScape
- Address : 404, 60-19, Gasan-dong, Geumcheon-gu, Seoul, Korea
- Contact person : Hun Pil Lim / CEO
- Phone/Fax : 82-2-856-8150 / 82-2-856-2828

### 1.3 Basic description of EUT

- Product name : Singing Machine Home
- Model name : SMC HOME
- Serial number : N/A
- Frequency : 2 400 MHz to 2 483.5 MHz
- Number of channel(s) : 802.11 b/g/n-HT20 : 11 ch, 802.11 n-HT-40 : 7 ch
- Modulation method : CCK, BPSK, QPSK, DSSS, OFDM,
- FCC Rule Part(s) : FCC CFR47 Part 15 Subpart C Section 15.247
- IC Rule Part(s) : IC RSS-210 Issue8 Annex 8-2010
- FCC classification : DTS / Digital Transmission System
- IC classification : Annex 8 / Frequency Hopping and Digital Modulation Systems Operating in the bands 902 - 928 MHz, 2 400 - 2 483.5 MHz and 5 725 - 5 850 MHz
- Test period : August 26, 2013 to September 10, 2013
- Issuing date of report : September 16, 2013
- Place of test : Head office  
824 & B104, Anyang Megavalley, 799, Gwanyang-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do 431-767, Korea

#### Open area test site

80, Jeil-ri, Yangji-myun, Cheoin-gu, Yongin-si, Gyeonggi-do  
449-825, Korea

(FCC Registration Number : 337229)

(IC Submission Number : 143881)

(KCC Designation Number : KR0027)

## 1.4 Electrical specification

Item	Specifications
Input power	DC15V/3A(Adapter : 100~240V, 50~60Hz, 1.2A)
Internal clock	CPU Main OSC : 24MHz CPU RTC : 32.768KHz 2.4G Wireless Audio : 48MHz
RF frequency	WiFi : 2.4GHz Bluetooth : 2.4GHz Wireless Audio : 2.4GHz
Transmitter frequency	WiFi : 2.4GHz Bluetooth : 2.4GHz Wireless Audio : 2.4GHz
Number of layer	8 layer PCB
External connector	DC Jack x 1, HDMI x 1
Working temperature	0 ~ 50
Storage temperature	-20 ~ 60
Battery	x
Relative humidity	60%
Dimensions (W x H x D)	293.6 x 293.6 x 140.4
Sound	Internal Speaker
RF method	WLAN Bluetooth 2.1 EDR Wireless Audio

## 2. General information of test

### 2.1 Standard for measurement methods

Applied Standard : 47 CFR Part 15, Subpart C 15.247				
FCC	IC	Description of test	Limit	Result
15.247(a)(2)	A8.2(1)	6 dB and 99 % bandwidth	$\geq 500$ kHz	Pass
15.247(b)(3), 15.31(e)	A8.4(4)	Maximum peak output power	$\leq 30$ dBm	
15.247(e)	A8.2	Power spectral density	$\leq 8$ dBm	
15.247(d) / 15.209 / 15.205	A8.5	Conducted band edges and spurious emission	$\leq 20$ dBc	
15.247(d) / 15.209 / 15.205	A8.5	Radiated band edges and spurious emission	See 15.209	
15.207	-	Power line conducted emission	See 15.207	Pass

### 2.2 Description of EUT modification

During the test, there was no mechanical or circuitry modification to improve any RF specification including spurious characteristic, and any RF and spurious suppression device(s) were not added against the device tested.

### 2.3 Description of test system configuration

- Peripheral equipment used;

Description	Model name	Serial No.	Manufacturer	FCC ID
EUT	SMC HOME	Proto Type	VisionScape	2AAXO-SMCHOME
Test fixer (JIG)	CC Debugger	Proto Type	TEXAS INSTRUMENTS	-
Control PC	E655X-8FA	JT0802G100530031	JOOYONTECH	-

- Cables used

Device from	Device to	Type of cable	Type of connector	Length
EUT	Test fixer (JIG)	Non-shielded	Wire	0.30 m
Test fixer (JIG)	Control PC	Non-shielded	USB to USB	2.00 m
Control PC	Test fixer (JIG)	Non-shielded	USB to USB	2.00 m
Spectrum analyzer	Spectrum analyzer	Shielded	SMA to SMA	1.00 m

### 3. Measurement data

#### 3.1 6 dB and 99% bandwidth

##### 3.1.1 Specification

- FCC Rules Part 15 Section 15.247(a)(2)
- IC RSS-210 A8.2(1)

##### 3.1.2 Measurement method

- 558074 D01 DTS Meas Guidance v03r01, Section 7.0

##### 3.1.3 Set-up



##### 3.1.4 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Spectrum analyzer	FSV30	Rohde & Schwarz
Power supply	E3633A	Agilent
Control PC	E655X-8FA	JOYONTECH
Test fixer	CC Debugger	TEXAS INSTRUMENTS

##### 3.1.5 Test condition

- Test place : Test room
- Test environment : 19 °C, 35 % R.H.
- Test mode : Operation at single channel

### 3.1.6 Test Result

#### 3.1.6.1 6 dB bandwidth

##### 3.1.6.1.1 802.11 b

Channel number	Frequency [MHz]	Measured bandwidth [kHz]	Minimum Limit [kHz]
Channel Low	2 412	10 134	500.00
Channel Middle	2 442	10 139	
Channel High	2 462	10 988	

##### 3.1.6.1.2 802.11 g

Channel number	Frequency [MHz]	Measured bandwidth [kHz]	Minimum Limit [kHz]
Channel Low	2 412	16 488	500.00
Channel Middle	2 442	16 488	
Channel High	2 462	16 093	

##### 3.1.6.1.3 802.11 n – HT20

Channel number	Frequency [MHz]	Measured bandwidth [kHz]	Minimum Limit [kHz]
Channel Low	2 412	17.583	500.00
Channel Middle	2 442	17.598	
Channel High	2 462	17.568	

##### 3.1.6.1.4 802.11 n – HT40

Channel number	Frequency [MHz]	Measured bandwidth [kHz]	Minimum Limit [kHz]
Channel Low	2 422	36 396	500.00
Channel Middle	2 442	36 426	
Channel High	2 452	35 876	

### 3.1.6.2 99 % bandwidth

#### 3.1.6.2.1 802.11 b

Channel number	Frequency [MHz]	Measured bandwidth [kHz]
Channel Low	2 412	14 373
Channel Middle	2 442	14 378
Channel High	2 462	14 388

#### 3.1.6.2.2 802.11 g

Channel number	Frequency [MHz]	Measured bandwidth [kHz]
Channel Low	2 412	16 343
Channel Middle	2 442	16 383
Channel High	2 462	16 373

#### 3.1.6.2.3 802.11 n-HT20

Channel number	Frequency [MHz]	Measured bandwidth [kHz]
Channel Low	2 412	17 493
Channel Middle	2 442	17 508
Channel High	2 462	17 493


#### 3.1.6.2.4 802.11 n-HT40

Channel number	Frequency [MHz]	Measured bandwidth [kHz]
Channel Low	2 422	35 746
Channel Middle	2 442	35 746
Channel High	2 452	35 756


### 3.1.7 Plots of 6 dB bandwidth

#### 3.1.7.1 802.11 b – 20 MHz bandwidth


##### 3.1.7.1.1 Low frequency

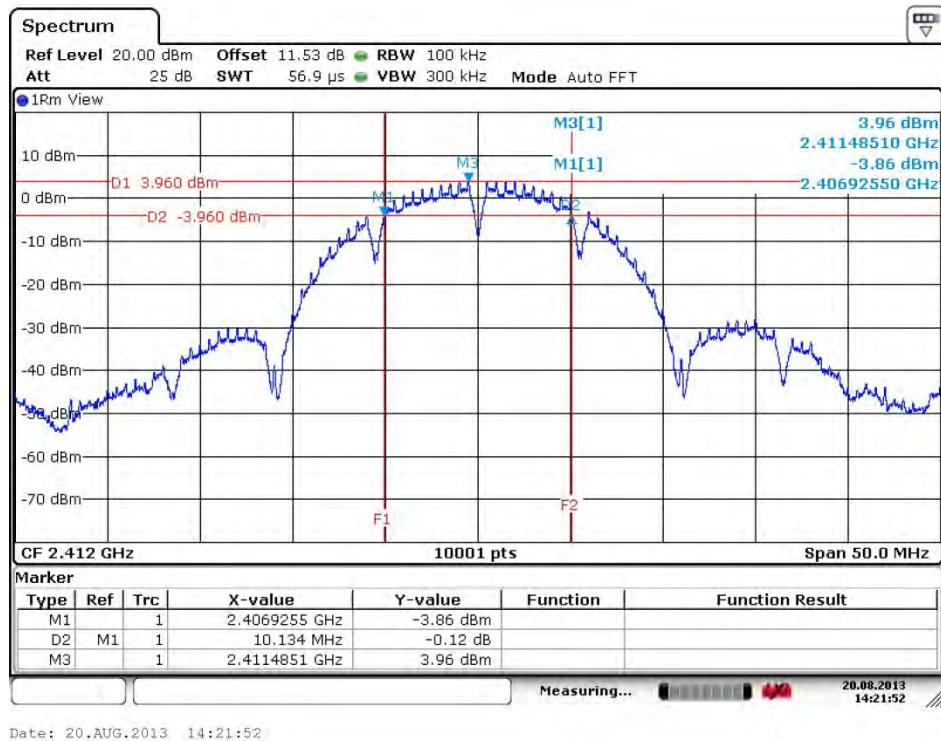

##### 3.1.7.1.2 Middle frequency

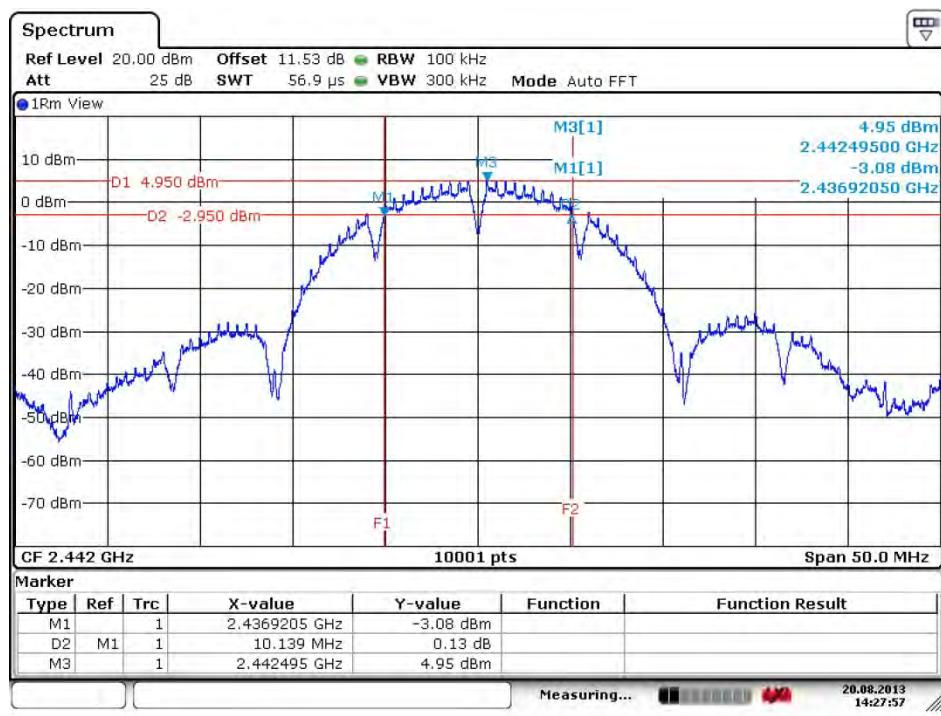


### 3.1.7.1.3 High frequency

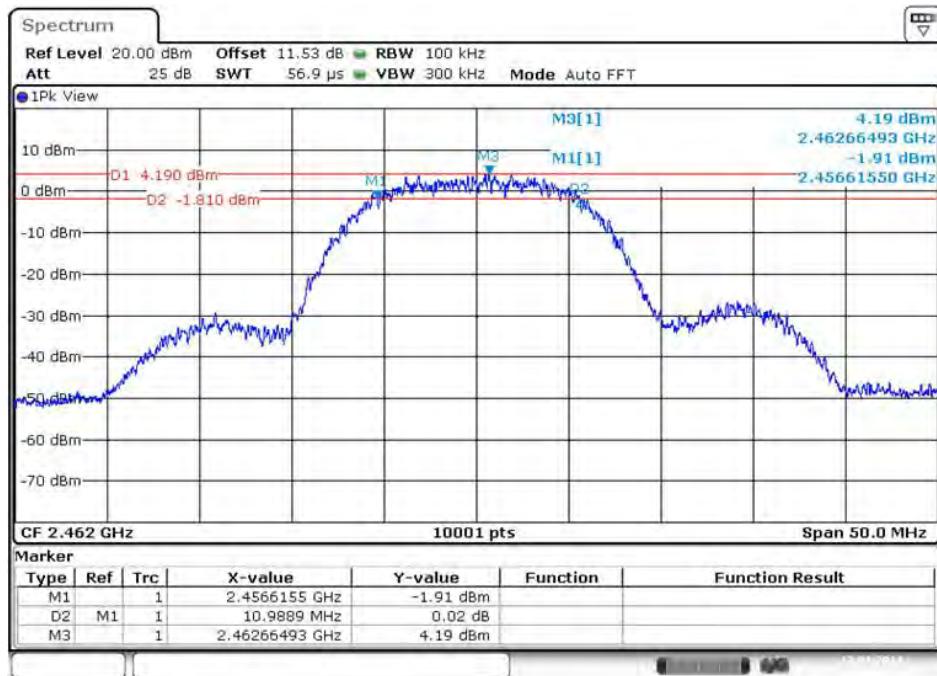


### 3.1.7.2 802.11 g – 20 MHz bandwidth

#### 3.1.7.2.1 Low frequency

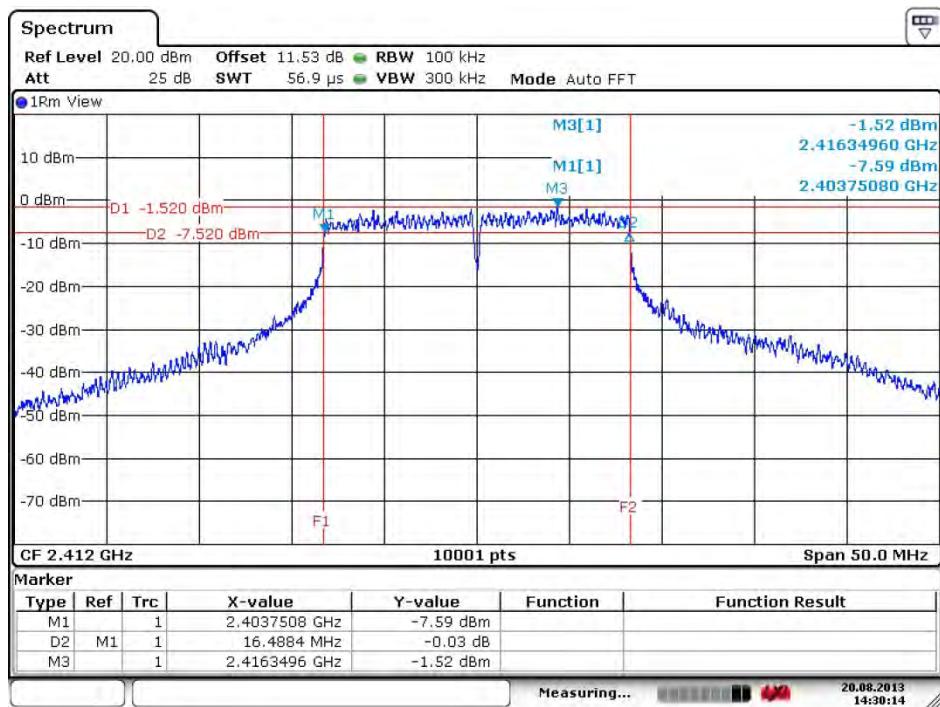


Date: 20.AUG.2013 14:30:14

#### 3.1.7.2.2 Middle frequency

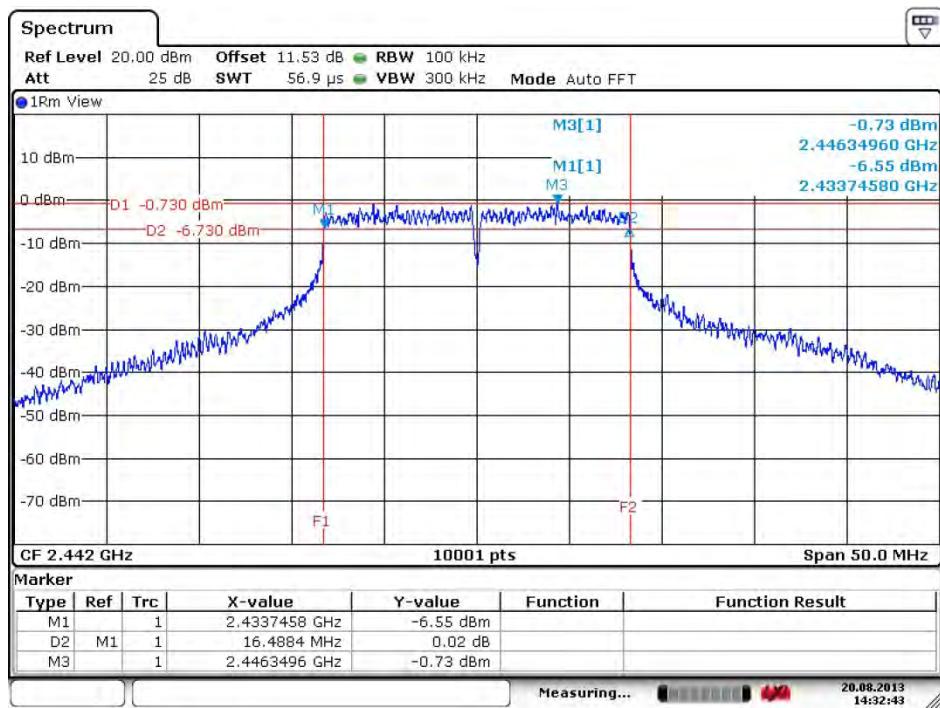


Date: 20.AUG.2013 14:32:43

### 3.1.7.2.3 High frequency

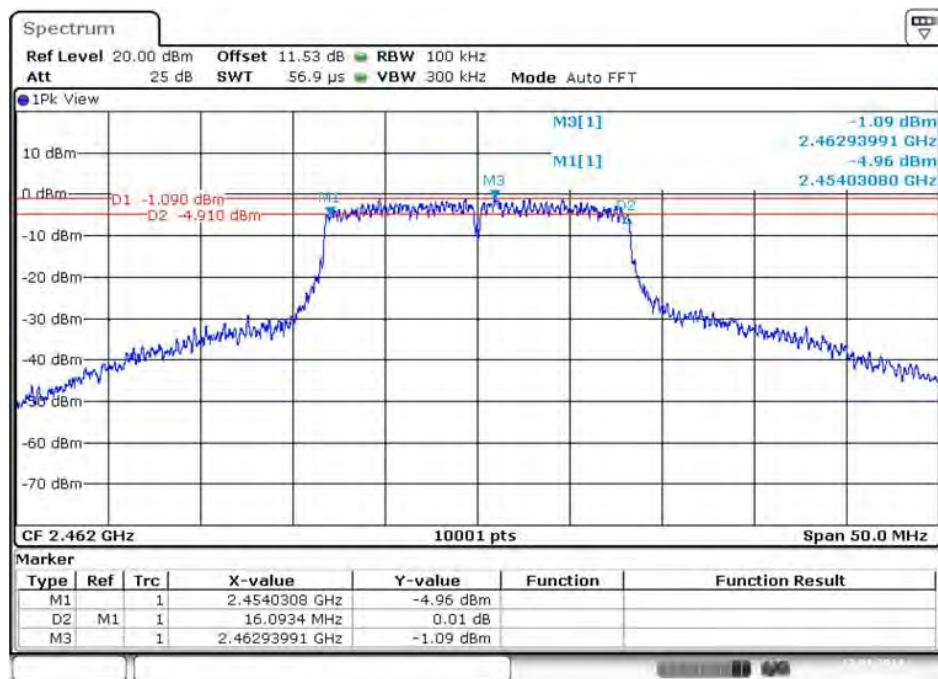


### 3.1.7.3 802.11 n – 20 MHz bandwidth


#### 3.1.7.3.1 Low frequency

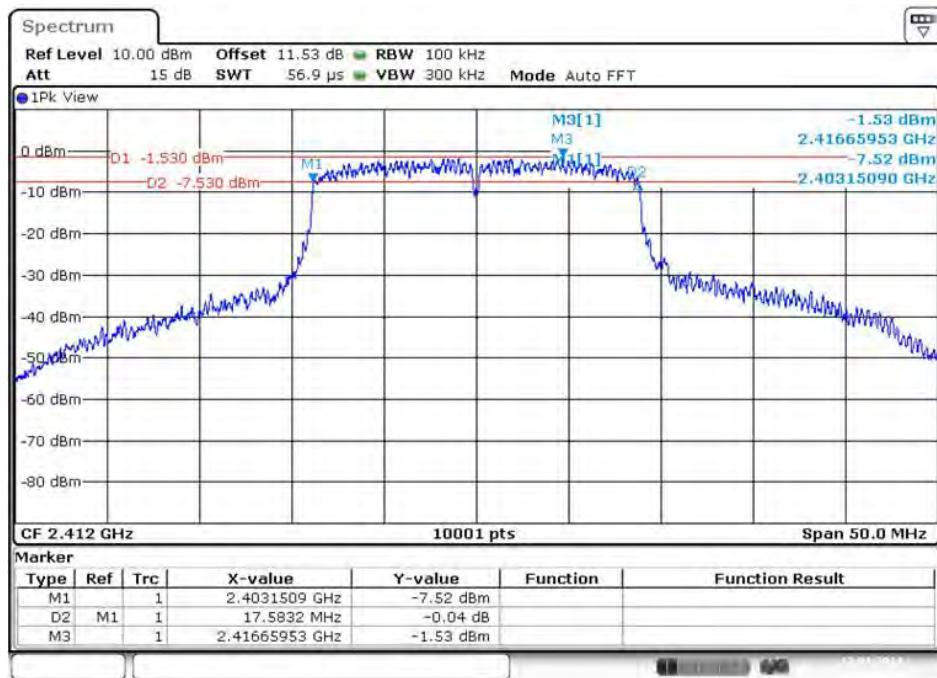

#### 3.1.7.3.2 Middle frequency

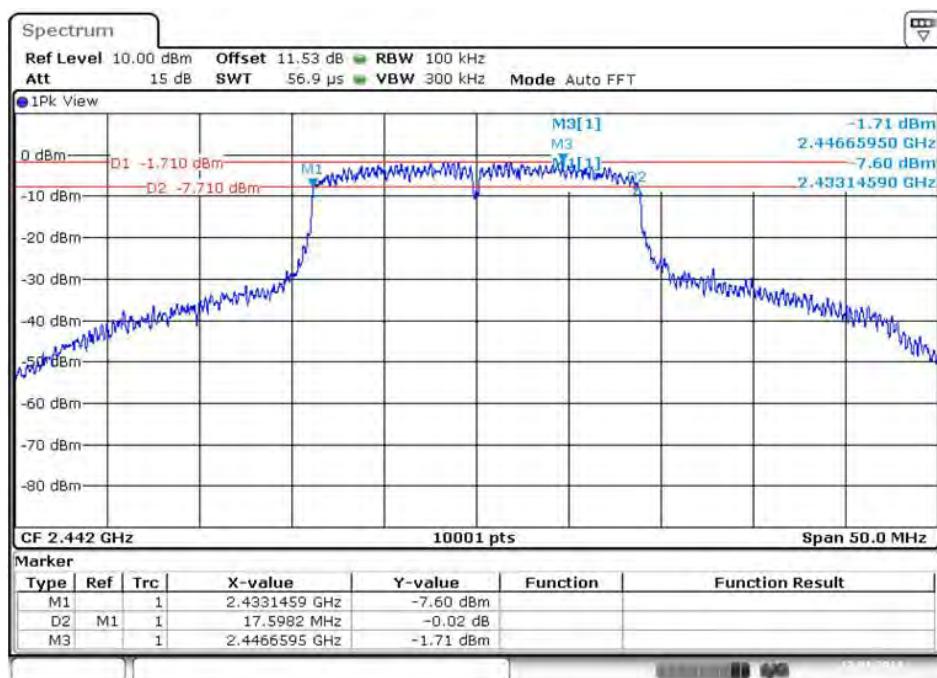


### 3.1.7.3.3 High frequency

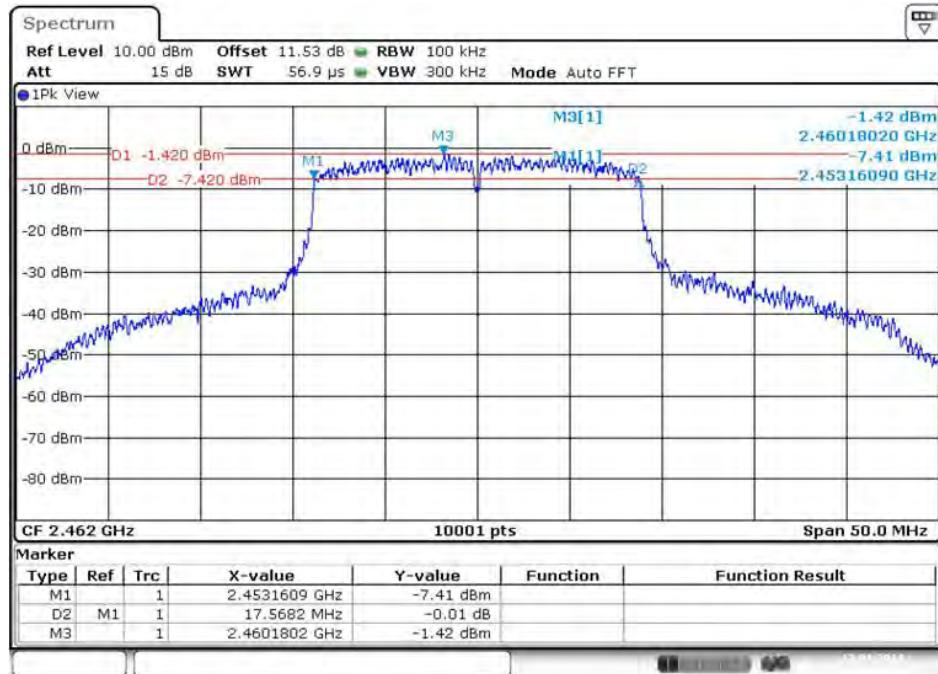


### 3.1.7.4 802.11 n – 40 MHz bandwidth


#### 3.1.7.4.1 Low frequency

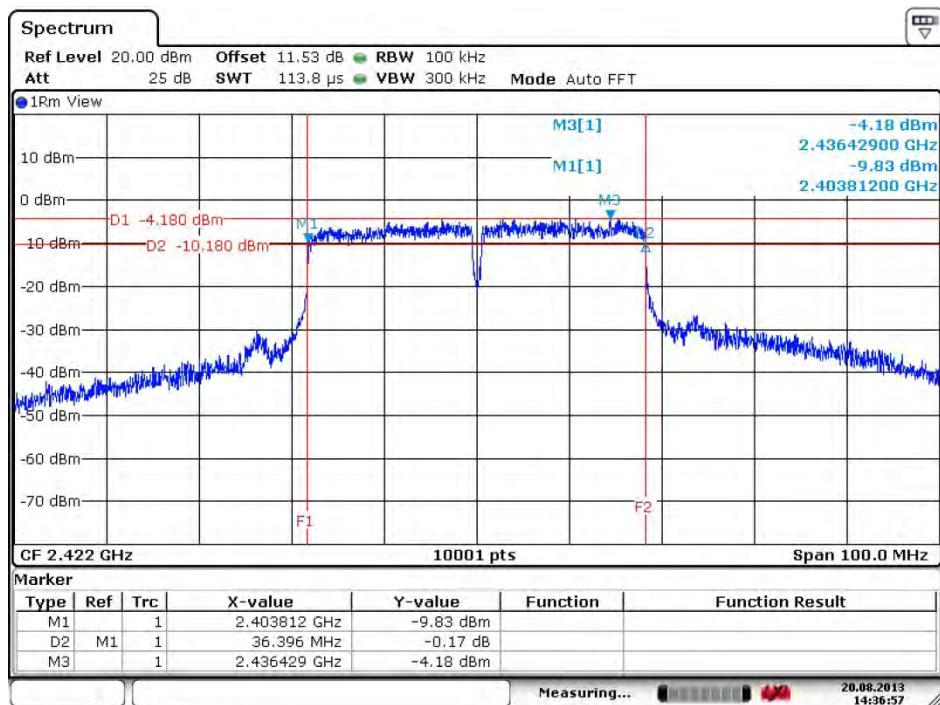

#### 3.1.7.4.2 Middle frequency

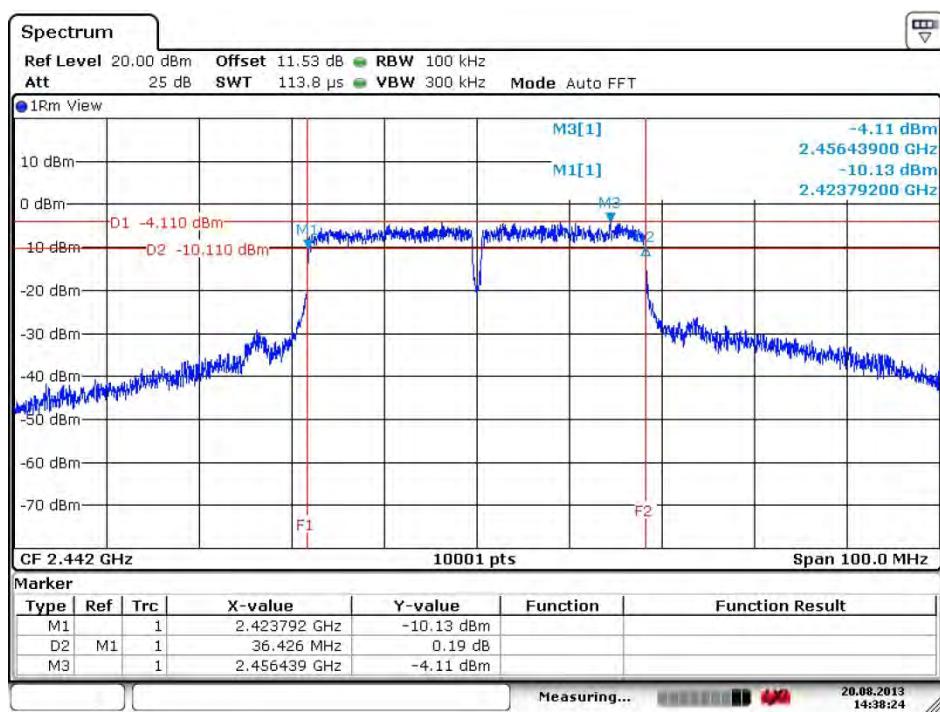


### 3.1.7.4.3 High frequency

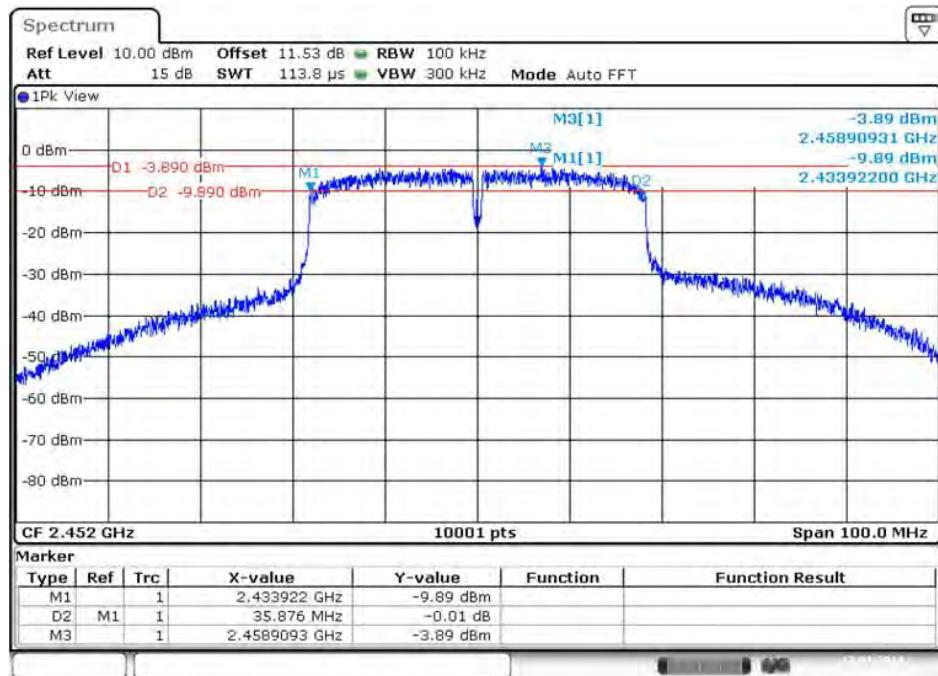

### 3.1.8 Plots of 99 % bandwidth

#### 3.1.8.1 802.11 b – 20 MHz bandwidth

##### 3.1.8.1.1 Low frequency

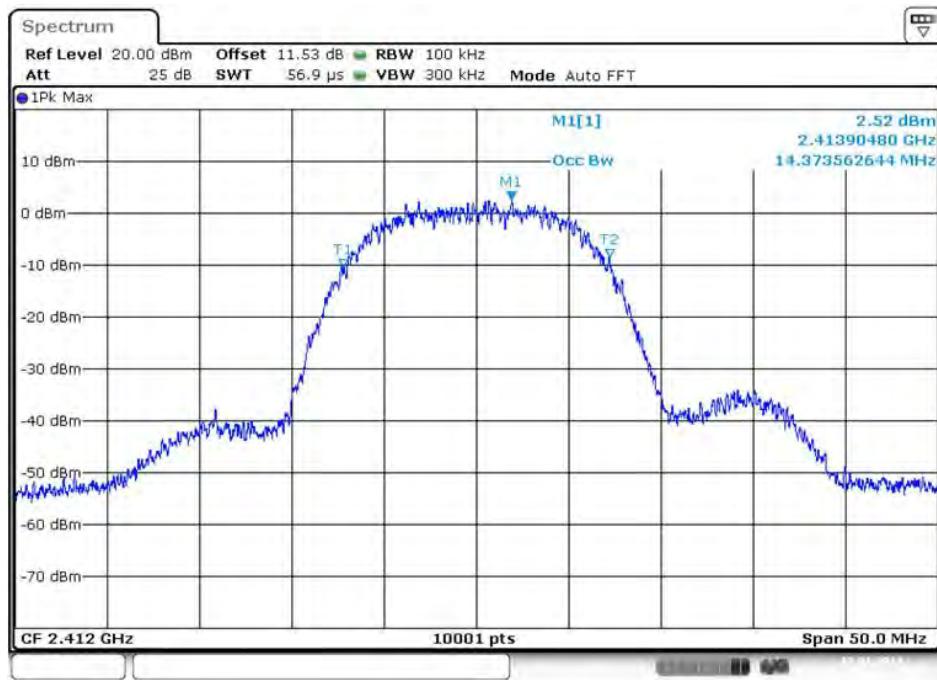

##### 3.1.8.1.2 Middle frequency




### 3.1.8.1.3 High frequency




### 3.1.8.2 802.11 g – 20 MHz bandwidth


#### 3.1.8.2.1 Low frequency

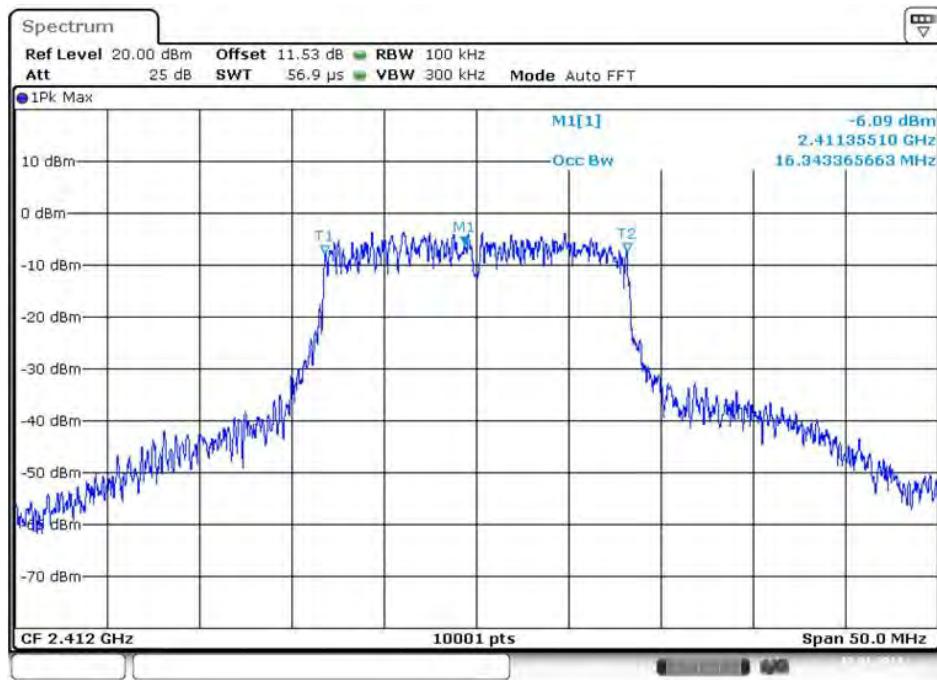

#### 3.1.8.2.2 Middle frequency

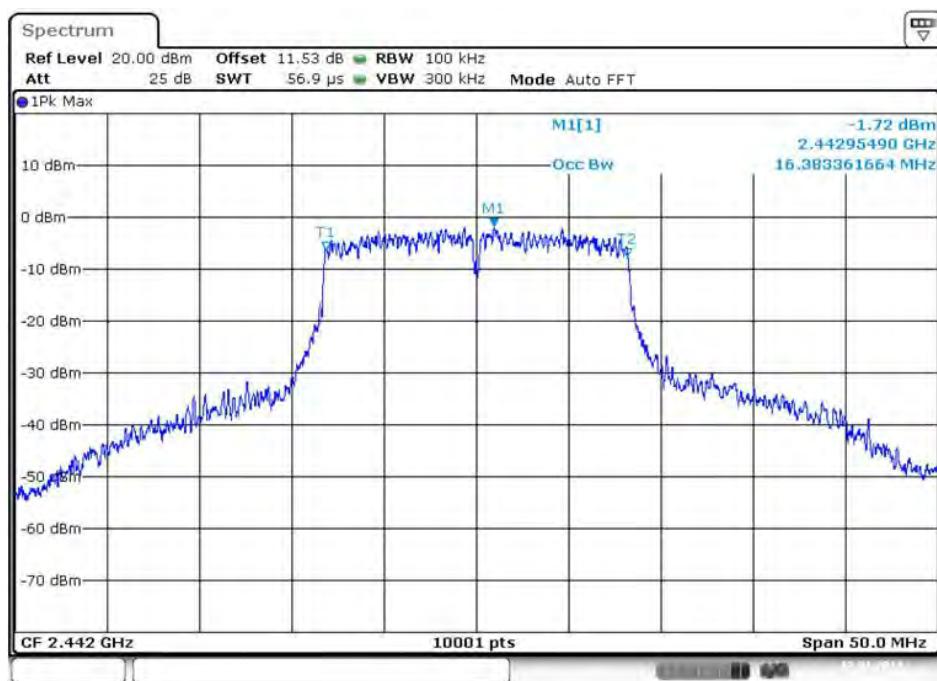


### 3.1.8.2.3 High frequency

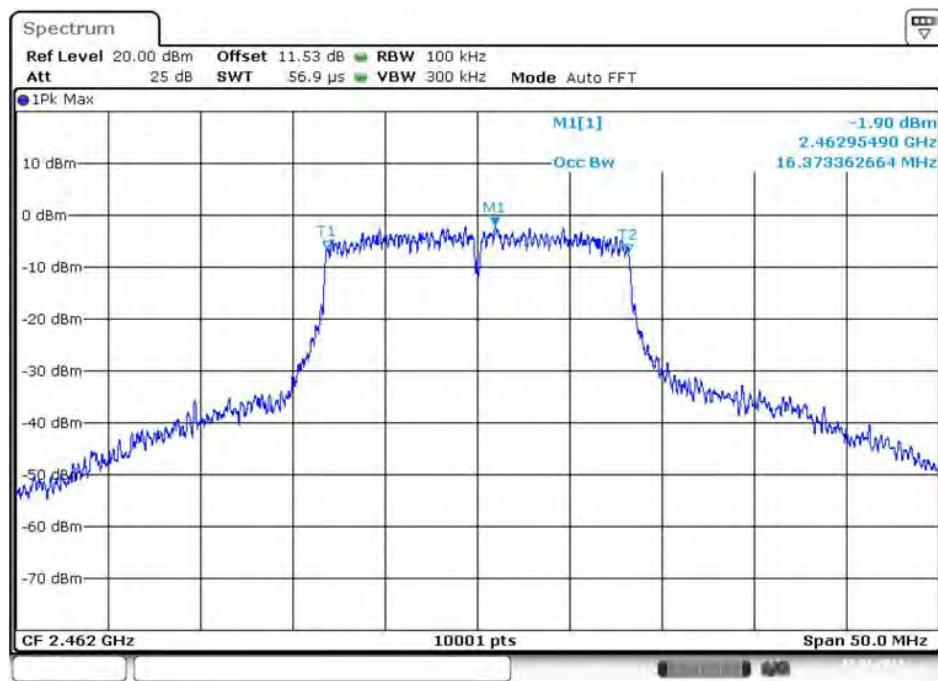


### 3.1.8.3 802.11 n – 20 MHz bandwidth


#### 3.1.8.3.1 Low frequency

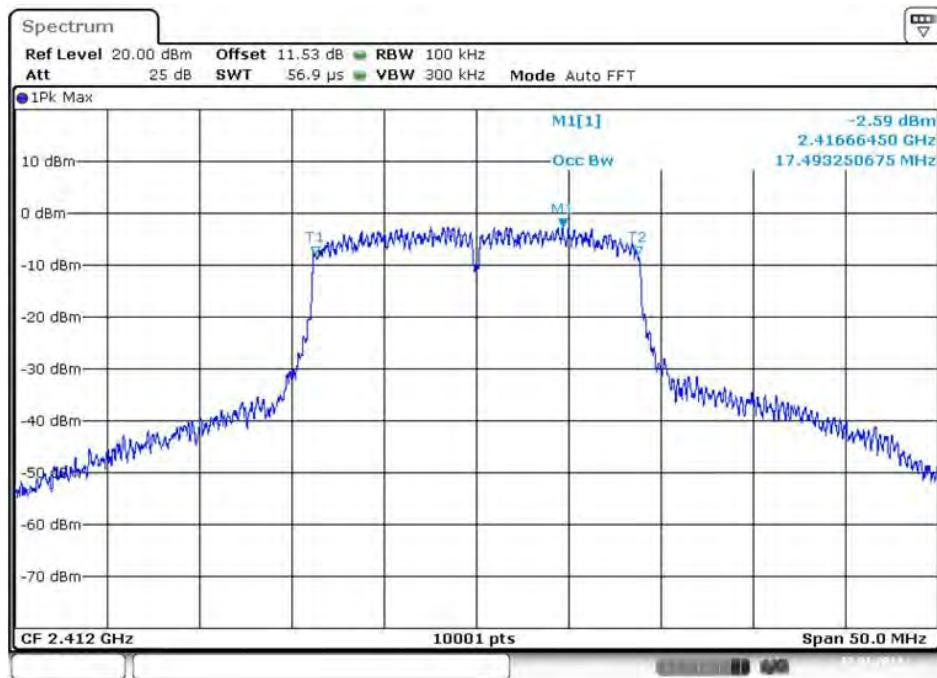

#### 3.1.8.3.2 Middle frequency

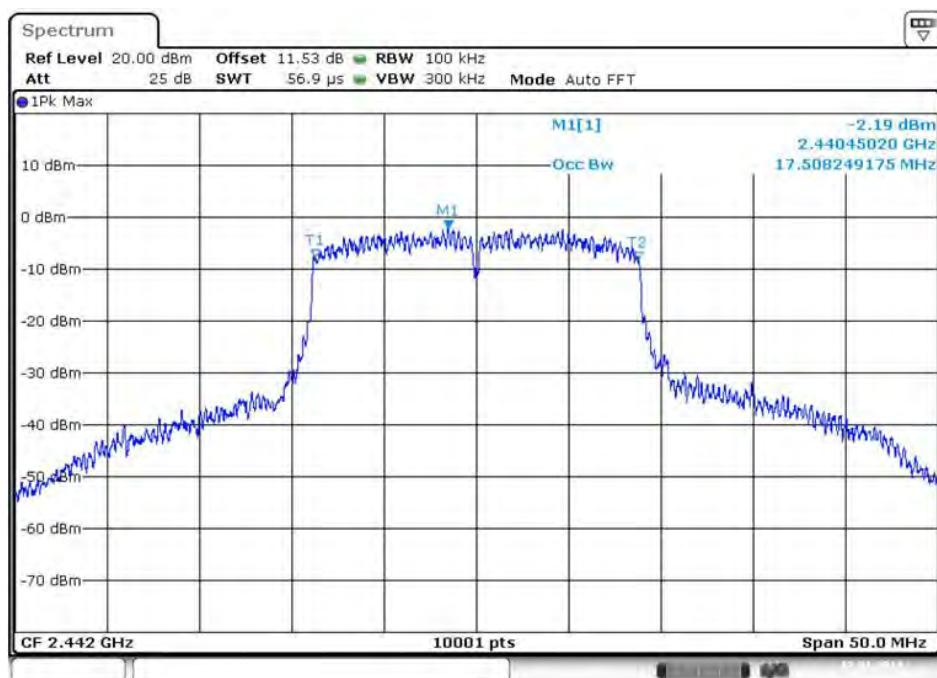


### 3.1.8.3.3 High frequency

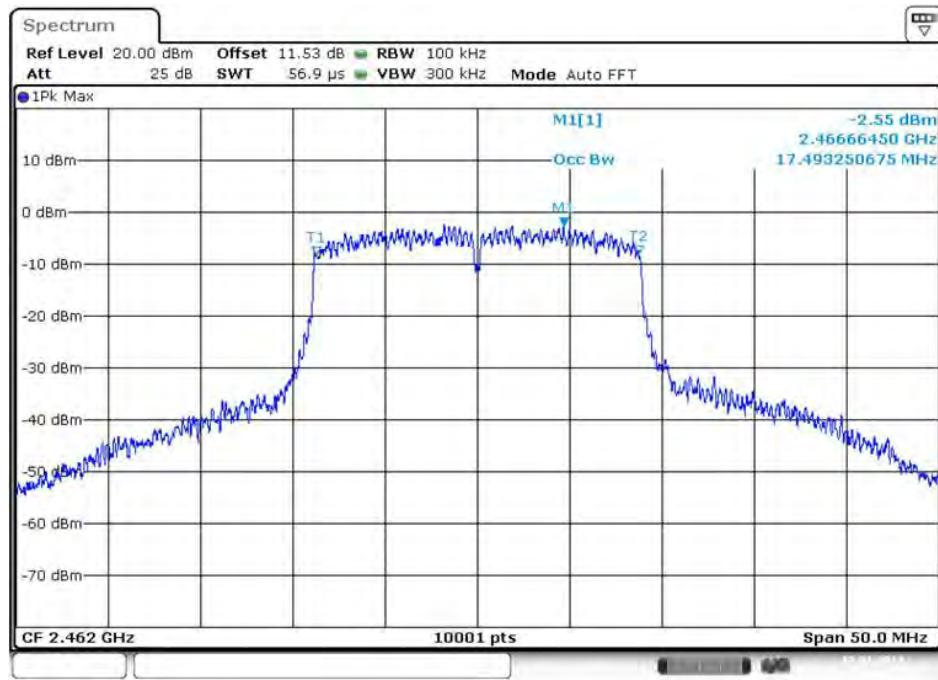



### 3.1.8.4 802.11 n – 40 MHz bandwidth

#### 3.1.8.4.1 Low frequency

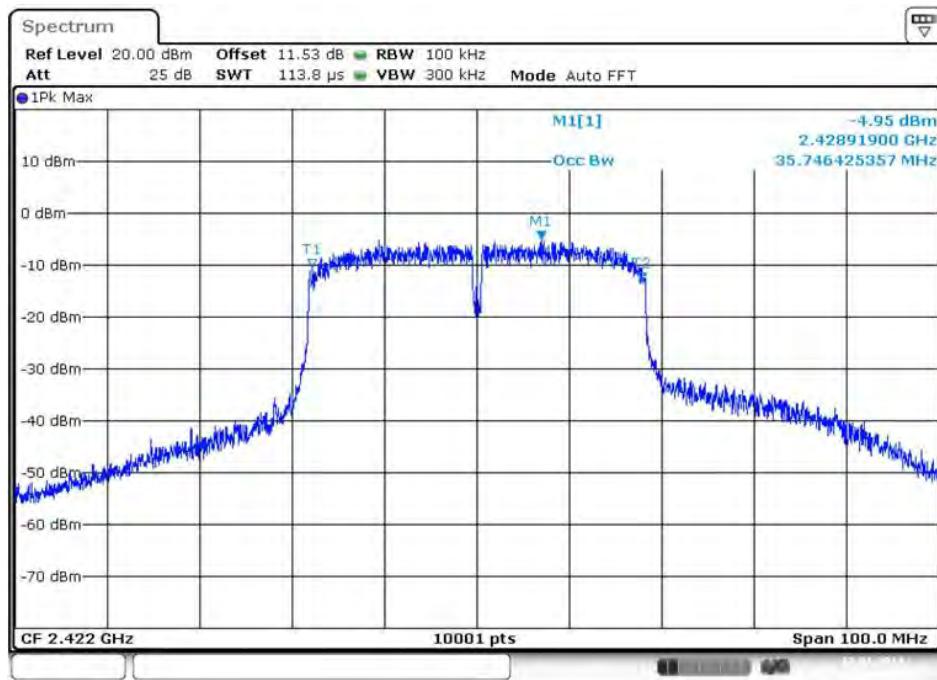

#### 3.1.8.4.2 Middle frequency

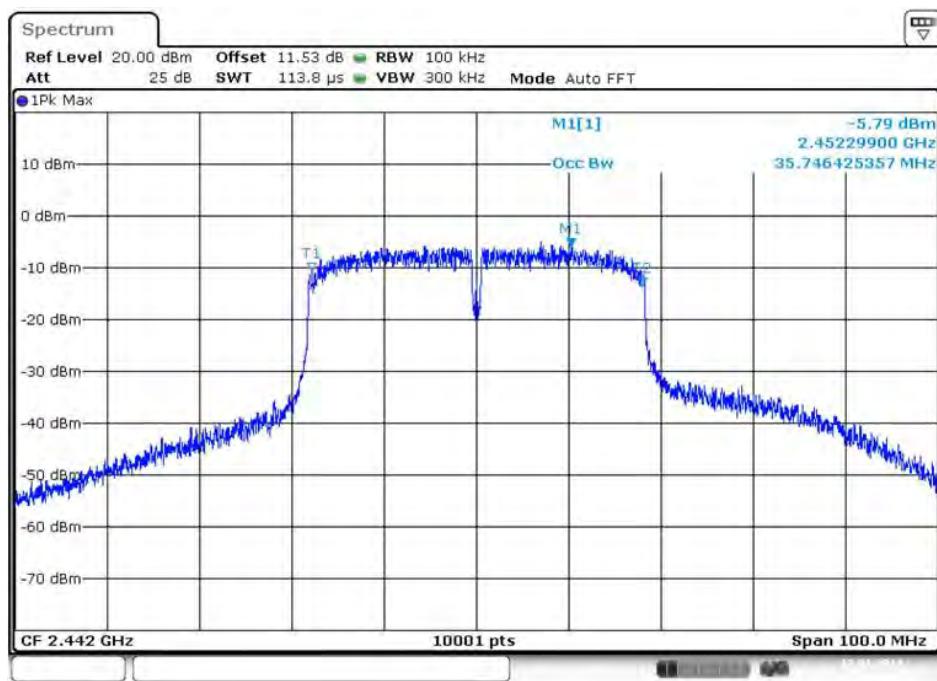

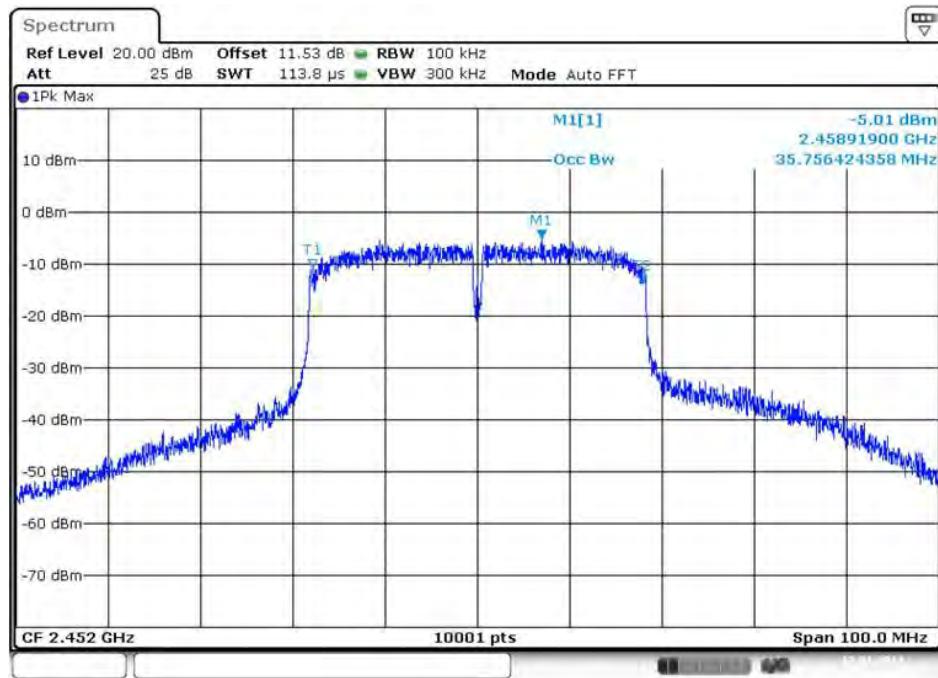**3.1.8.4.3 High frequency**

### 3.2 Maximum peak output power

#### 3.2.1 Specification

- FCC Rules Part 15 Section 15.247(b)(3)
- IC RSS-210 A8.4(4)

#### 3.2.2 Measurement method

- 558074 D01 DTS Meas Guidance v03r01, Section 8.0

#### 3.2.3 Set-up



#### 3.2.4 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Power Meter	E4416A	Agilent
Power supply	E3633A	Agilent
Control PC	E655X-8FA	JOYONTECH
Test fixer	CC Debugger	TEXAS INSTRUMENTS

#### 3.2.5 Test condition

- Test place : Test room
- Test environment : 19 °C, 35 % R.H.
- Test mode : Operation at single channel

### 3.2.6 Test result

#### 3.2.6.1 802.11 b

Channel number	Frequency [MHz]	Measured power [dBm]	Limit [dBm]
Channel Low	2 412	10.62	30.00
Channel Middle	2 442	10.34	
Channel High	2 462	10.87	

#### 3.2.6.2 802.11 g

Channel number	Frequency [MHz]	Measured power [dBm]	Limit [dBm]
Channel Low	2 412	8.47	30.00
Channel Middle	2 442	8.55	
Channel High	2 462	8.18	

#### 3.2.6.3 802.11 n - HT20

Channel number	Frequency [MHz]	Measured power [dBm]	Limit [dBm]
Channel Low	2 412	8.22	30.00
Channel Middle	2 442	8.15	
Channel High	2 462	8.74	

#### 3.2.6.4 802.11 n - HT40

Channel number	Frequency [MHz]	Measured power [dBm]	Limit [dBm]
Channel Low	2 422	5.20	30.00
Channel Middle	2 442	5.63	
Channel High	2 452	5.12	

### 3.3 Power spectral density

#### 3.3.1 Specification

- FCC Rules Part 15 Section 15.247(e)
- IC RSS-210 A8.2

#### 3.3.2 Measurement method

- 558074 D01 DTS Meas Guidance v03r01, Section 9.0

#### 3.3.3 Set-up



#### 3.3.4 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Spectrum analyzer	FSV30	Rohde & Schwarz
Power supply	E3633A	Agilent
Control PC	E655X-8FA	JOOYONTECH
Test fixer	CC Debugger	TEXAS INSTRUMENTS

#### 3.3.5 Test condition

- Test place : Test room
- Test environment : 19 °C, 35 % R.H.
- Test mode : Operation at single channel

### 3.3.6 Test result

#### 3.3.6.1 802.11 b

Channel number	Frequency [MHz]	Measured power density [dBm]	Limit [dBm]
Channel Low	2 412	-1.24	8.00
Channel Middle	2 442	-0.41	
Channel High	2 462	-1.04	

#### 3.3.6.2 802.11 g

Channel number	Frequency [MHz]	Measured power density [dBm]	Limit [dBm]
Channel Low	2 412	-6.40	8.00
Channel Middle	2 442	-5.19	
Channel High	2 462	-6.10	

#### 3.3.6.3 802.11 n – HT20

Channel number	Frequency [MHz]	Measured power density [dBm]	Limit [dBm]
Channel Low	2 412	-5.68	8.00
Channel Middle	2 442	-5.44	
Channel High	2 462	-5.82	


#### 3.3.6.4 802.11 n – HT40

Channel number	Frequency [MHz]	Measured power density [dBm]	Limit [dBm]
Channel Low	2 422	-8.10	8.00
Channel Middle	2 442	-7.57	
Channel High	2 452	-7.62	


### 3.3.7 Plots of power spectral density


#### 3.3.7.1 802.11 b - 20 MHz bandwidth

##### 3.3.7.1.1 Low frequency

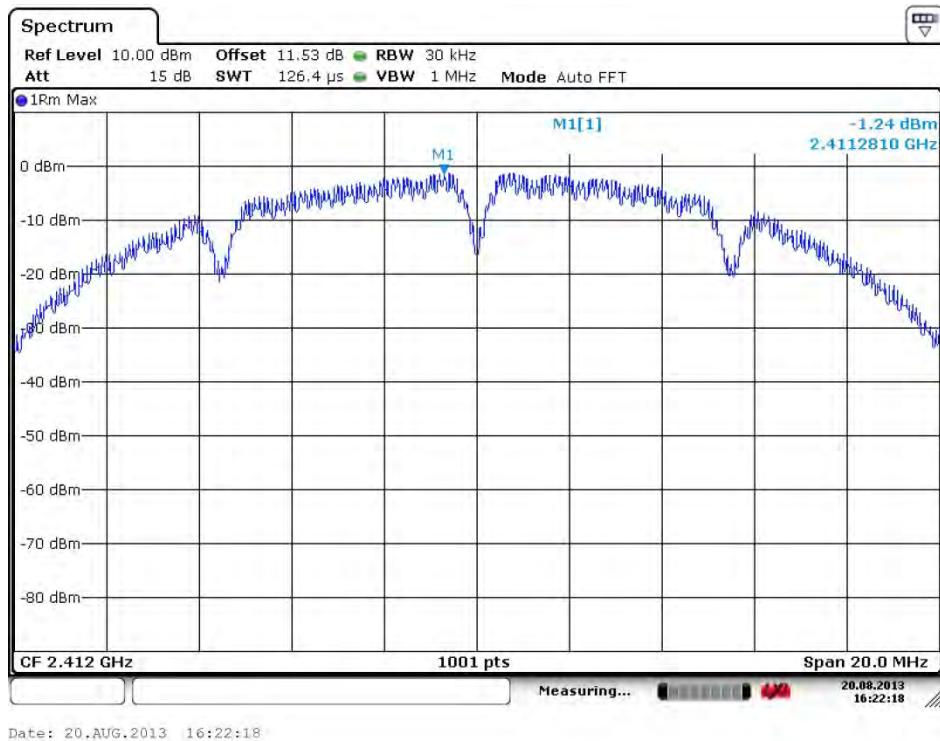


##### 3.3.7.1.2 Middle frequency

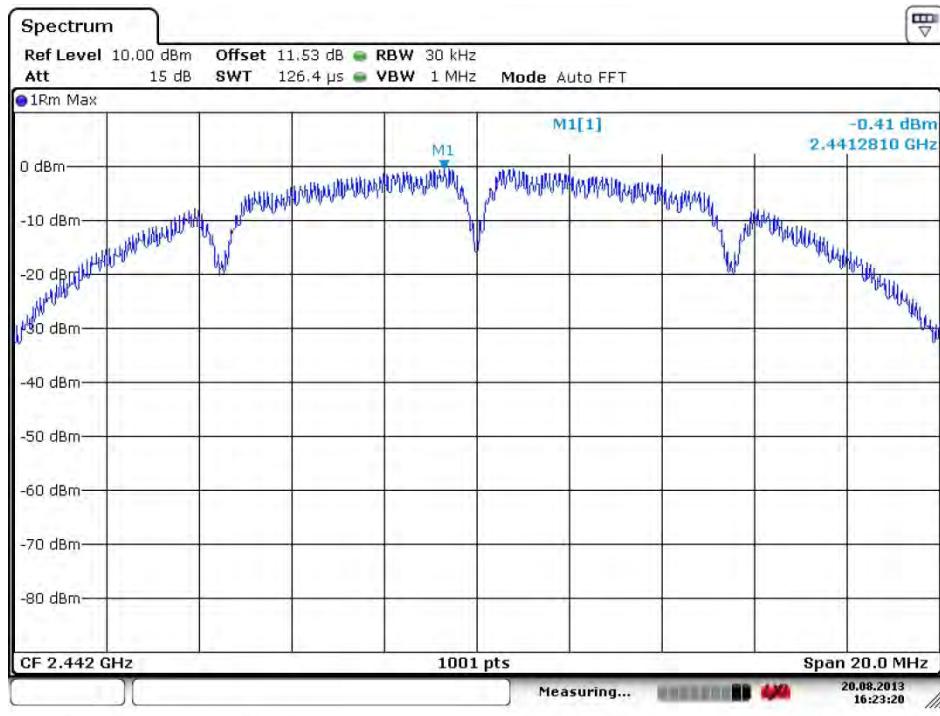

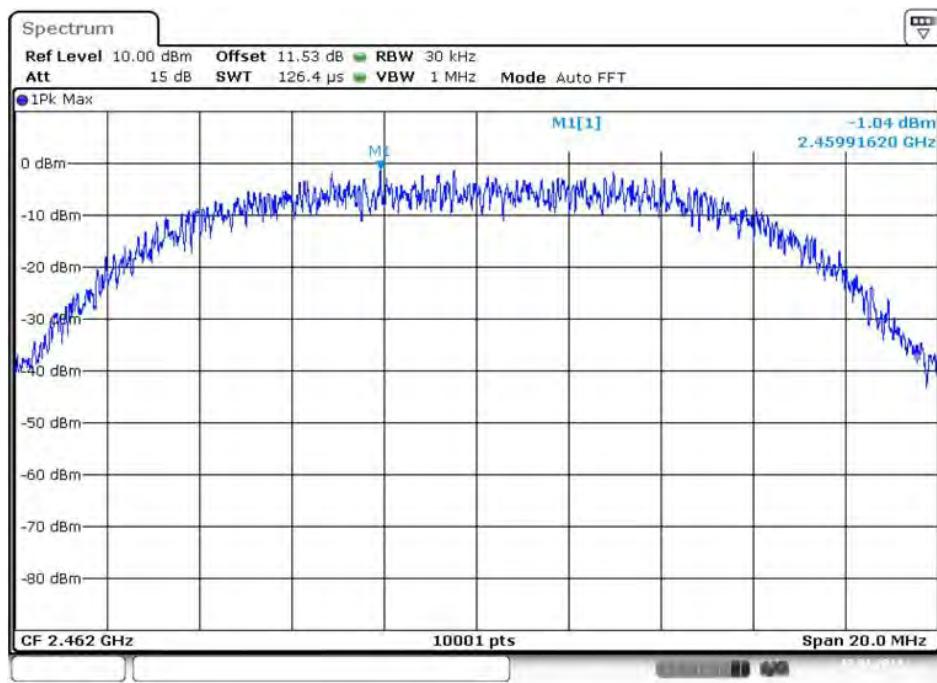
**3.3.7.1.3 High frequency**


### 3.3.7.2 802.11 G - 20 MHz bandwidth

#### 3.3.7.2.1 Low frequency

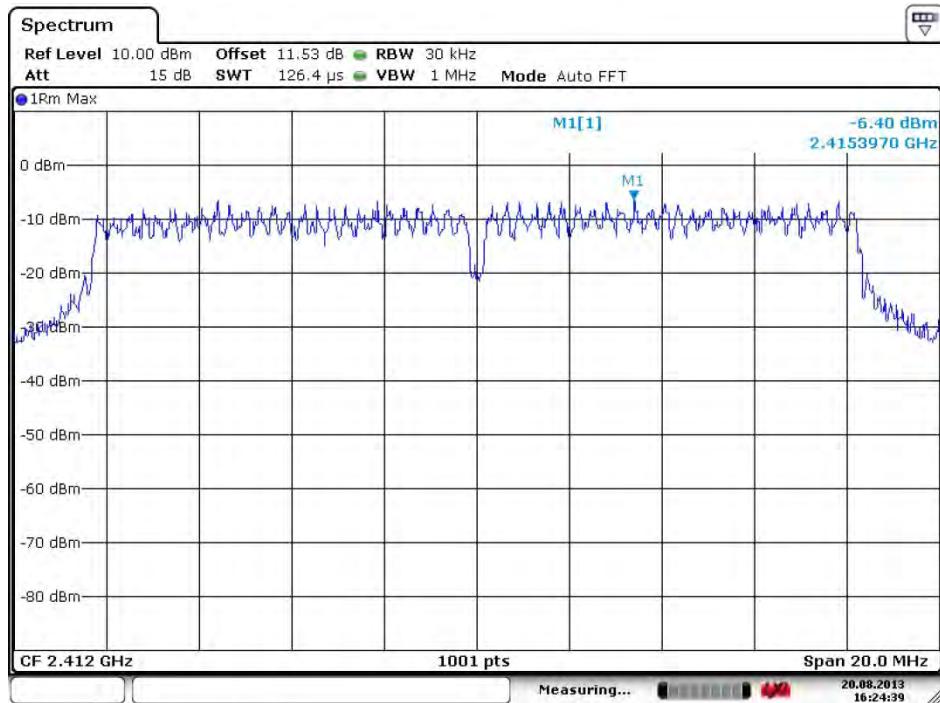


#### 3.3.7.2.2 Middle frequency

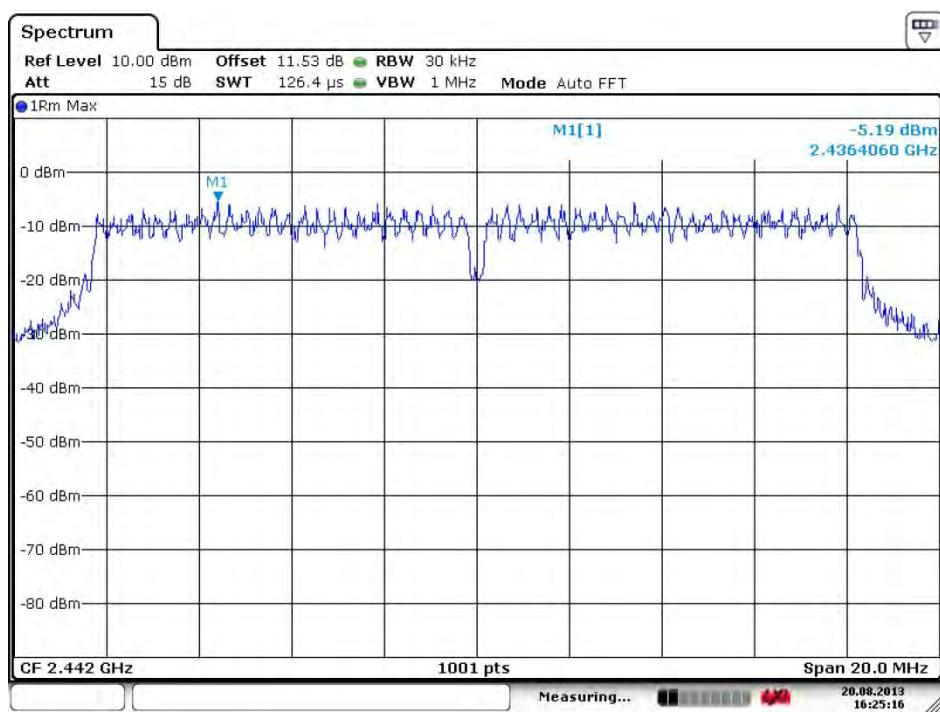

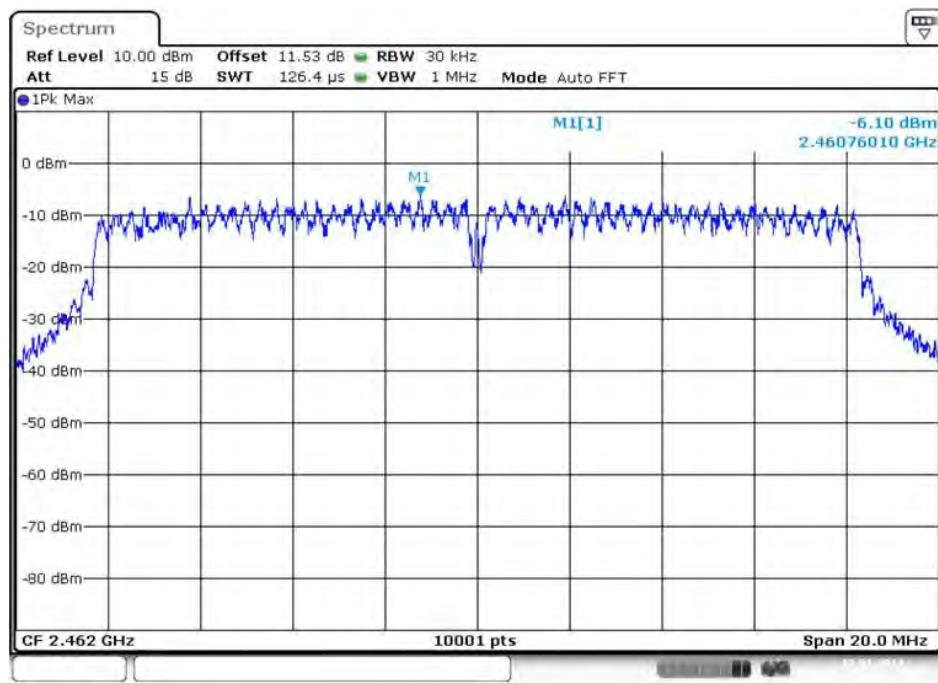
**3.3.7.2.3 High frequency**


### 3.3.7.3 802.11 n - 20 MHz bandwidth

#### 3.3.7.3.1 Low frequency

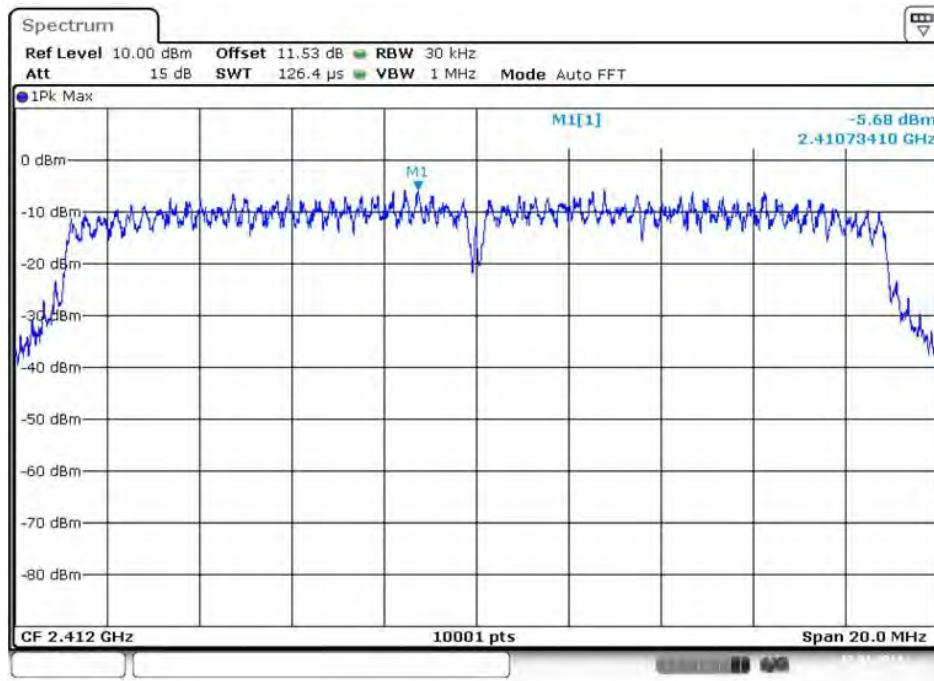


#### 3.3.7.3.2 Middle frequency

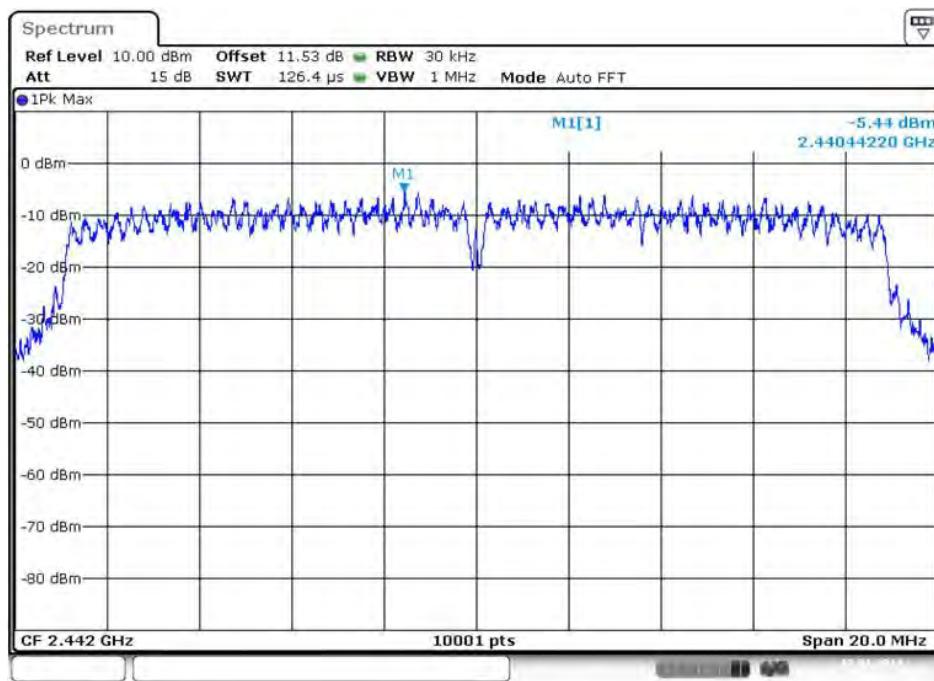

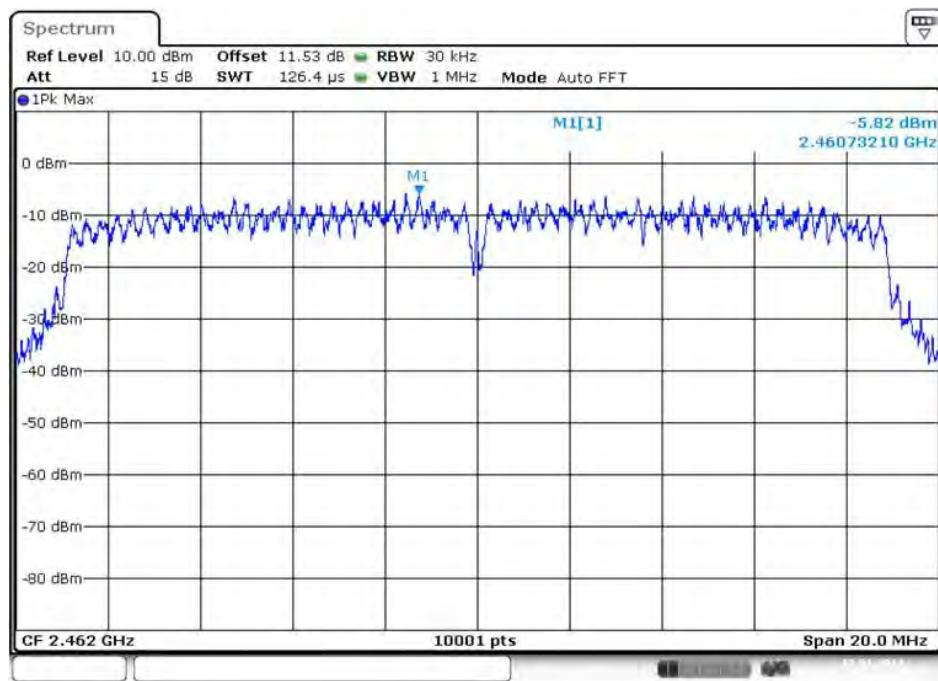**3.3.7.3.3 High frequency**


### 3.3.7.4 802.11 n - 40 MHz bandwidth

#### 3.3.7.4.1 Low frequency

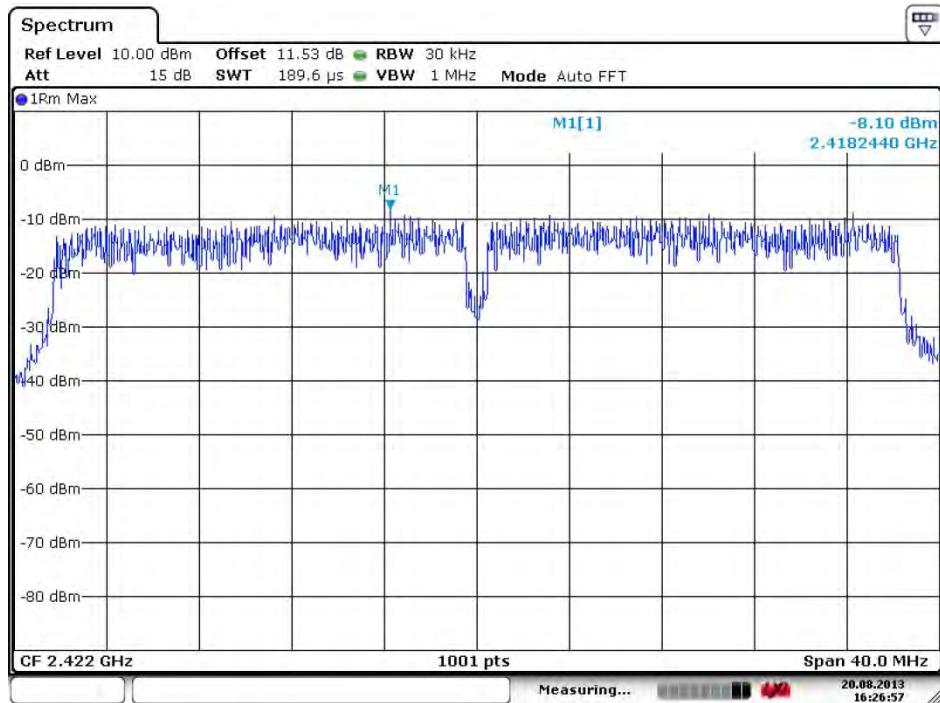


Date: 20.AUG.2013 16:26:58

#### 3.3.7.4.2 Middle frequency

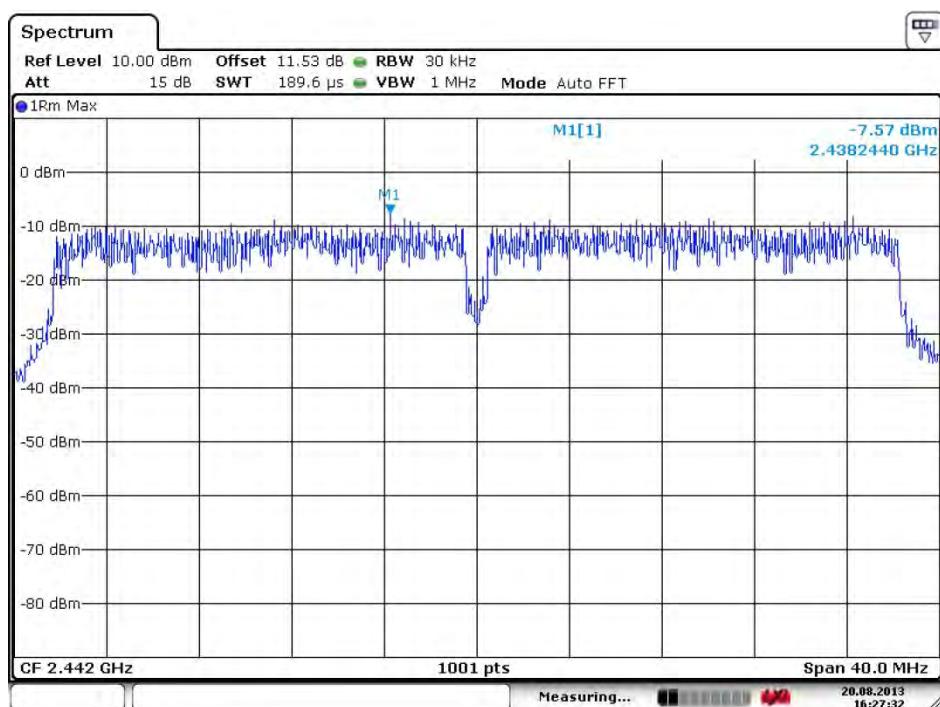

Date: 20.AUG.2013 16:27:32

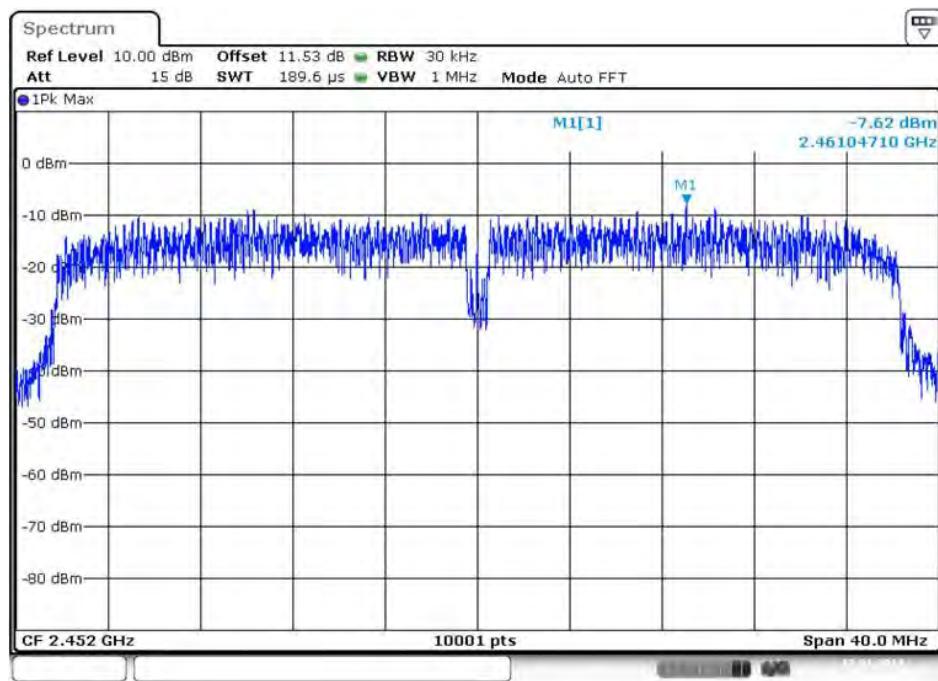**3.3.7.4.3 High frequency**

### 3.4 Conducted band edges and spurious emission

#### 3.4.1 Specification

- FCC Rules Part 15 Section 15.247(d)
- IC RSS-210 A8.5

#### 3.4.2 Measurement method

- 558074 D01 DTS Meas Guidance v03r01, Section 10.0

#### 3.4.3 Set-up



#### 3.4.4 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Spectrum analyzer	FSV30	Rohde & Schwarz
Power supply	E3633A	Agilent
Control PC	E655X-8FA	JOYONTECH
Test fixer	CC Debugger	TEXAS INSTRUMENTS

#### 3.4.5 Test condition

- Test place : Test room
- Test environment : 19 °C, 35 % R.H.
- Test mode : Operation at single channel

### 3.4.6 Test result

#### 3.4.6.1 Test result at low frequency(802.11 b)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
745	-48.32	55.08	20.00	35.08
2 412	6.76	-	-	
3 218	-48.85	55.61	20.00	35.61
4 882	-50.03	56.79	20.00	36.79

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

#### 3.4.6.2 Test result at middle frequency(802.11 b)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
745	-48.69	54.32	20	34.32
2442	5.63	-	-	-
3261	-50.40	56.03	20	36.03
4866	-49.44	55.07	20	35.07

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

#### 3.4.6.3 Test result at high frequency(802.11 b)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
746	-48.45	54.19	20.00	34.19
2 462	5.74		-	
3262	-53.41	59.15	20.00	39.15
4910	-53.32	59.06	20.00	39.06

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

#### 3.4.6.4 Test result at low frequency(802.11 g)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
716	<b>-49.98</b>	<b>51.71</b>	<b>20</b>	<b>31.71</b>
2412	1.73			
3218	-50.33	52.06	20	32.06

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

#### 3.4.6.5 Test result at middle frequency(802.11 g)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
745	<b>-50.91</b>	<b>51.56</b>	<b>20</b>	<b>31.56</b>
2442	0.65			
3261	-52.44	53.09	20	33.09

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

#### 3.4.6.6 Test result at high frequency(802.11 g)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
745	<b>-49.85</b>	<b>49.03</b>	<b>20</b>	<b>29.03</b>
2462	<b>-0.82</b>			
3261	-53.97	53.15	20	33.15

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.6.7 Test result at low frequency(802.11 n-HT20)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
746	-50.92	52.75	20	32.75
2412	-1.83			
3218	<b>-50.54</b>	<b>52.37</b>	<b>20</b>	<b>32.37</b>

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.6.8 Test result at middle frequency(802.11 n-HT20)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
615	<b>-48.54</b>	<b>47.73</b>	<b>20</b>	<b>27.73</b>
2442	-0.81			
3261	-52.86	52.05	20	32.05

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.6.9 Test result at high frequency(802.11 n-HT20)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
746	<b>-50.11</b>	<b>49.93</b>	<b>20</b>	<b>29.93</b>
2462	<b>-0.18</b>			
3262	-55.48	55.30	20	35.30

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.6.10 Test result at low frequency(802.11 n-HT40)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
832	-46.87	44.39	20	24.39
2422	-2.48			
3218	-51.92	49.44	20	29.44

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.6.11 Test result at middle frequency(802.11 n-HT40)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
832	-47.06	43.29	20	23.29
2442	-3.77			
3261	-52.59	48.82	20	28.82

**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]


### 3.4.6.12 Test result at high frequency(802.11 n-HT40)

Frequency [MHz]	Level [dBm]	Deviation [dBc]	Limit [dBc]	Margin [dB]
832	-46.83	43.44	20	23.44
2452	-3.39			
3261	-52.52	49.13	20	29.13


**Calculation formula** [Deviation = Level of fundamental frequency - Level of unwanted emission frequency]

### 3.4.9 Plots of Unwanted Emission


#### 3.4.9.1 Spurious Emission at Low Frequency(802.11 b)

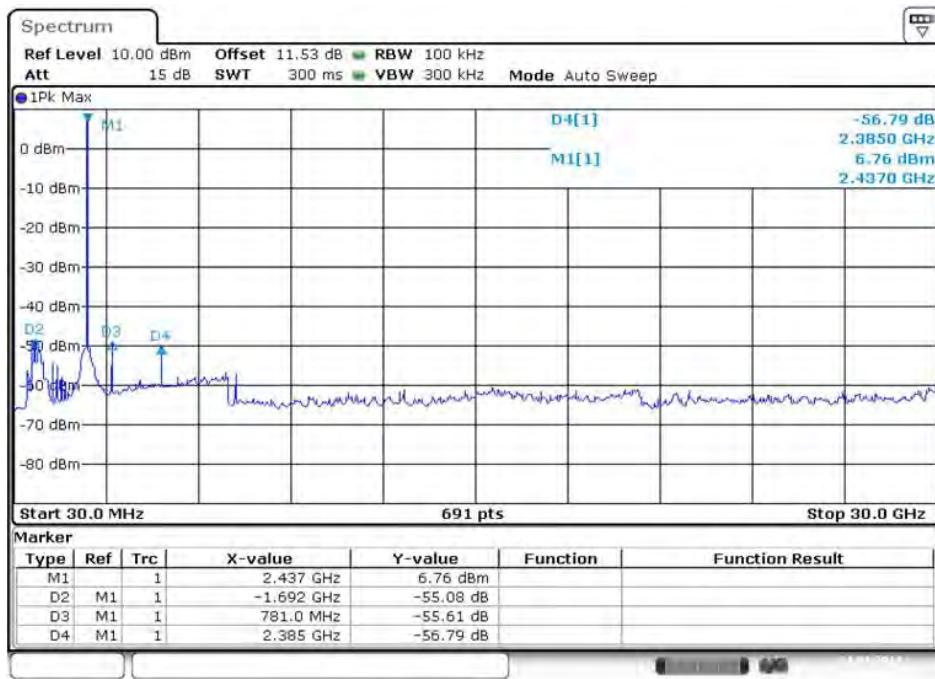


#### 3.4.9.2 Spurious Emission at Middle Frequency(802.11 b)

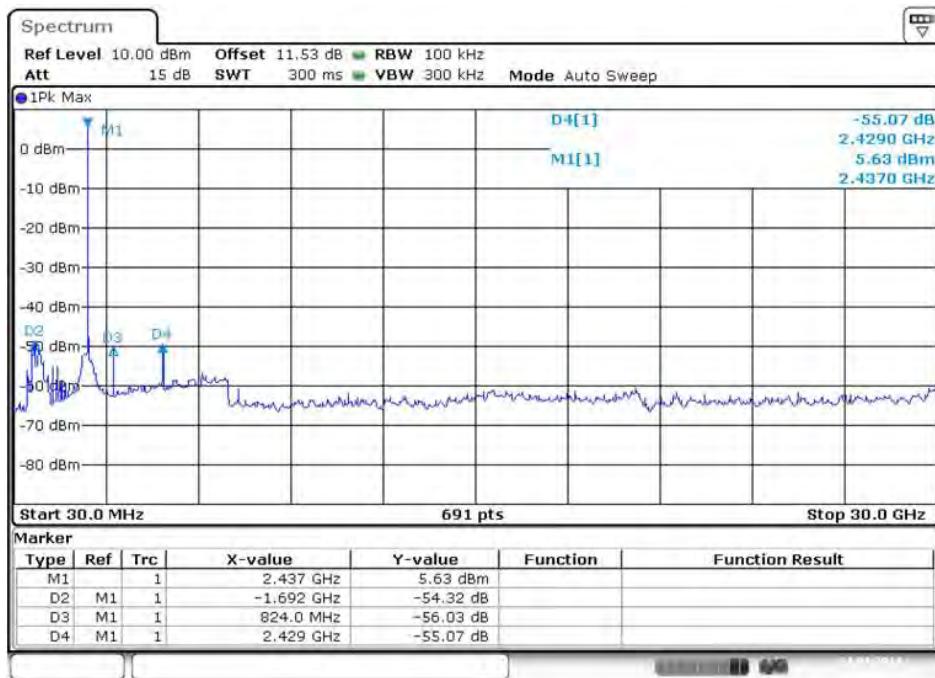


### 3.4.9.3 Spurious Emission at High Frequency(802.11 b)

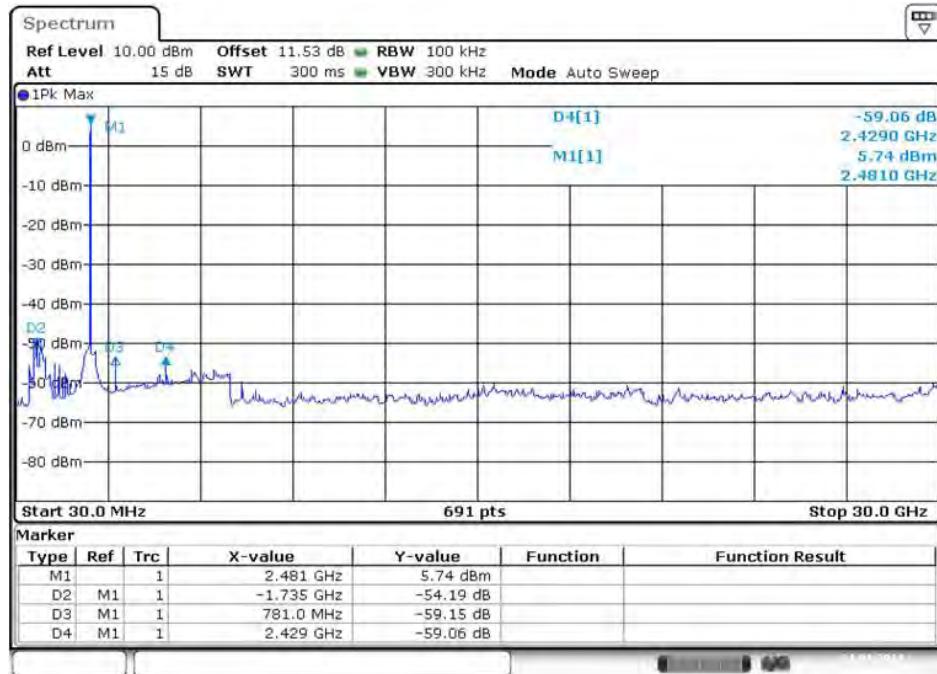


### 3.4.9.4 Spurious Emission at Low Frequency(802.11 g)

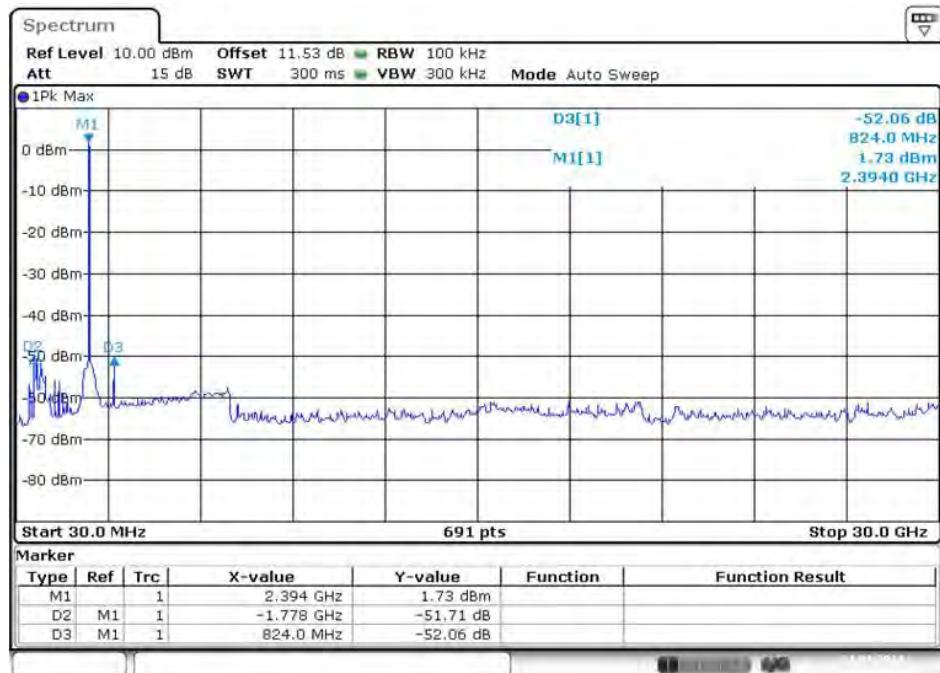


### 3.4.9.5 Spurious Emission at Middle Frequency(802.11 g)

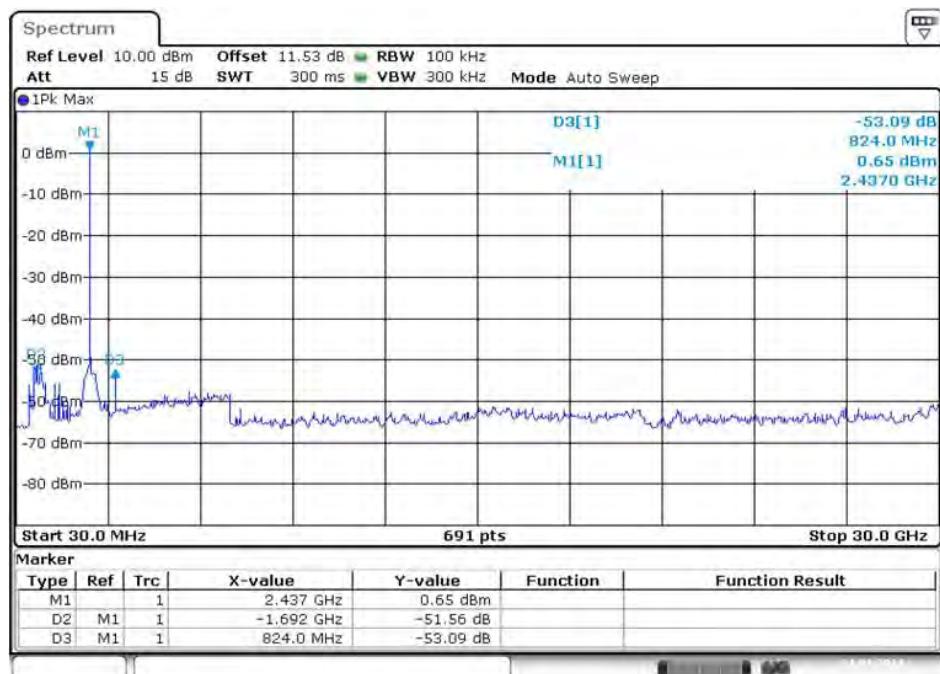


### 3.4.9.6 Spurious Emission at High Frequency(802.11 g)

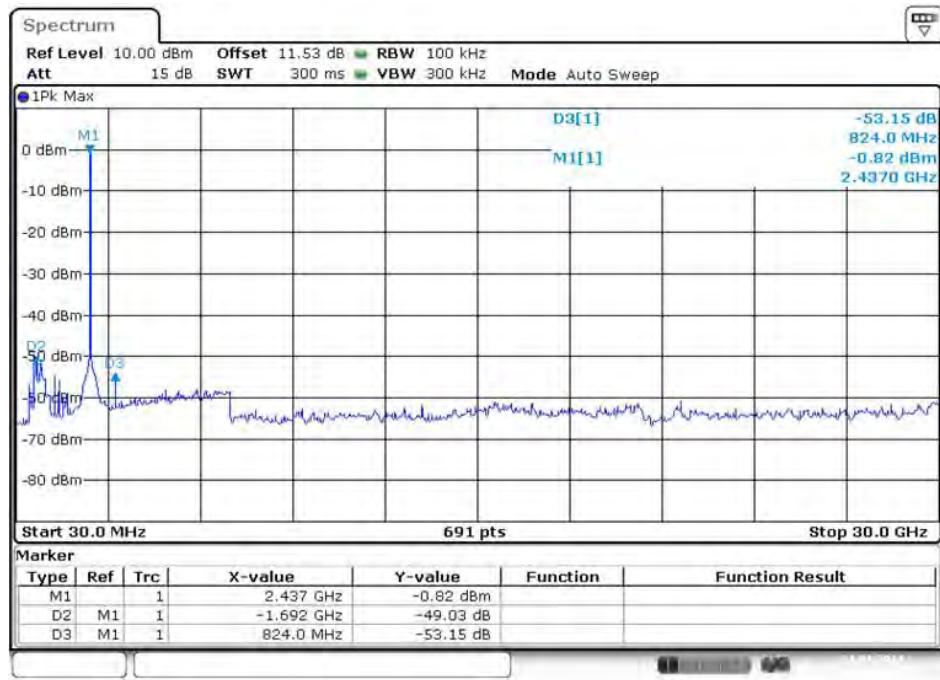


### 3.4.9.7 Spurious Emission at Low Frequency(802.11 n-HT20)

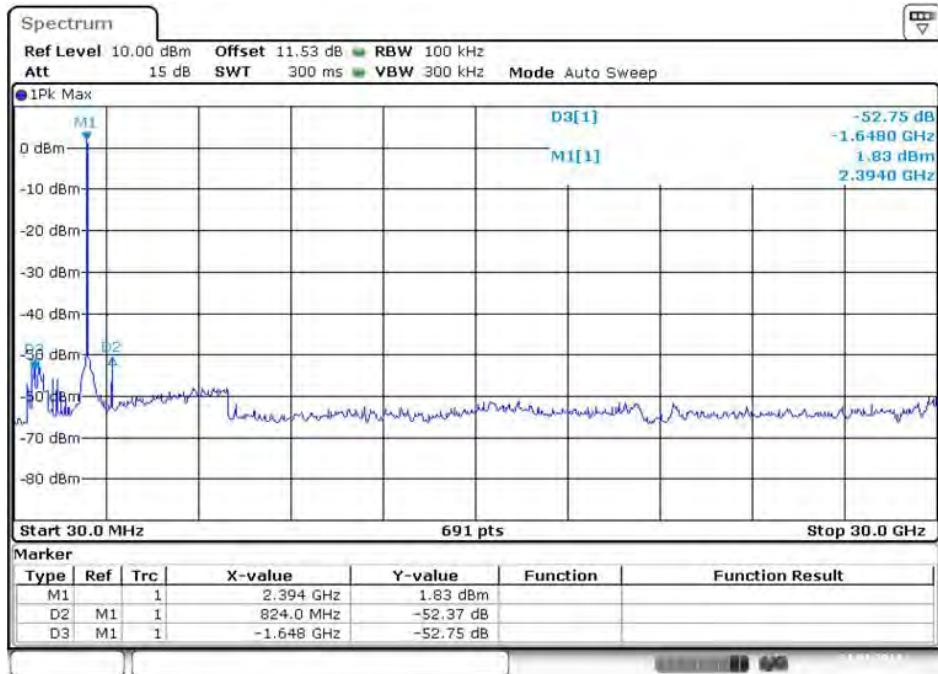


### 3.4.9.8 Spurious Emission at Middle Frequency(802.11 n-HT20)

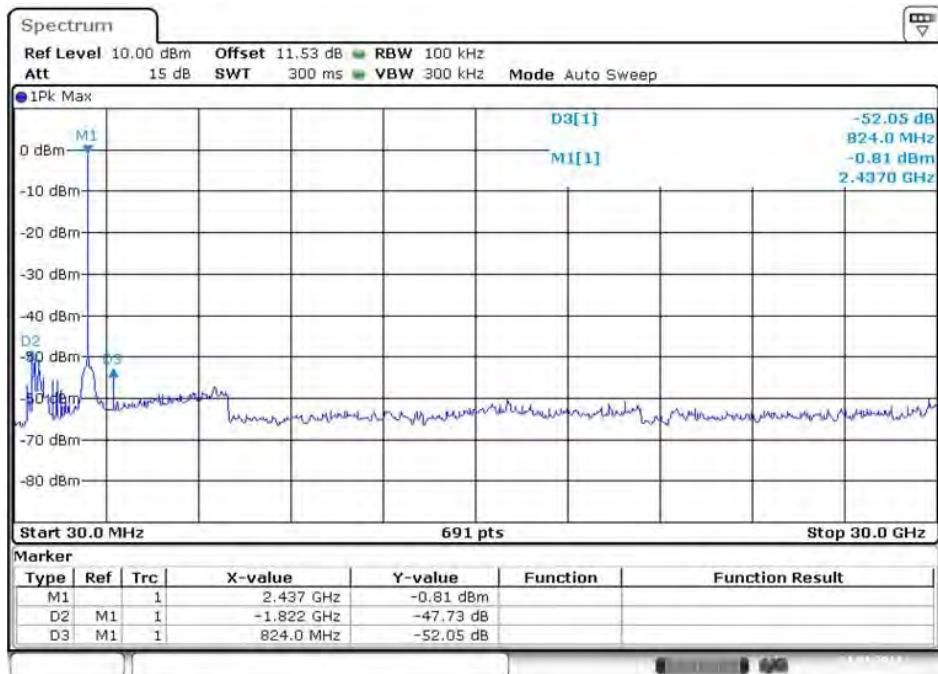


### 3.4.9.9 Spurious Emission at High Frequency(802.11 n-HT20)

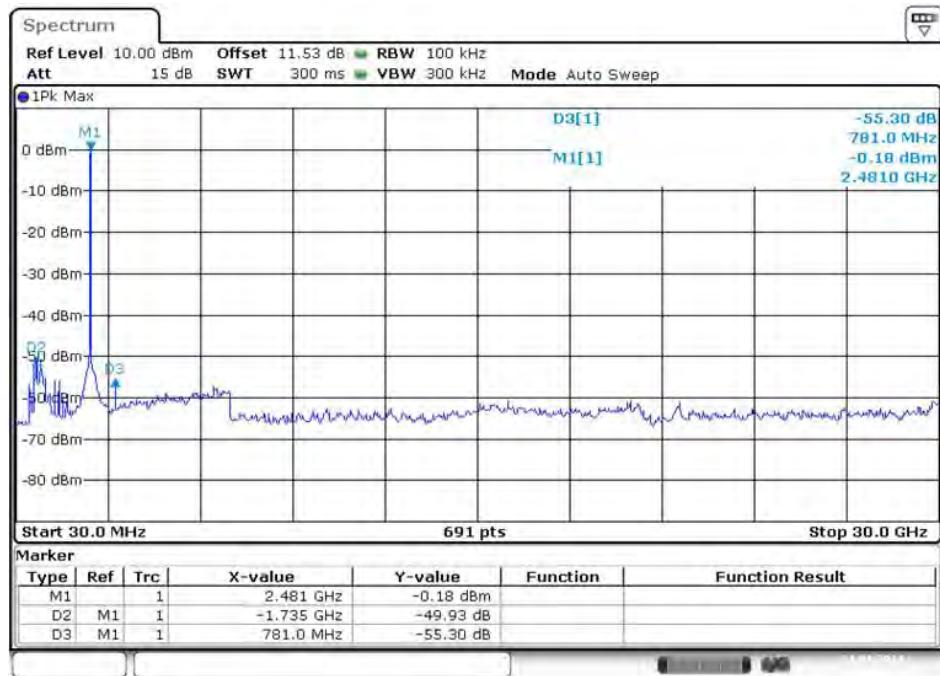


### 3.4.9.10 Spurious Emission at Low Frequency(802.11 n-HT40)

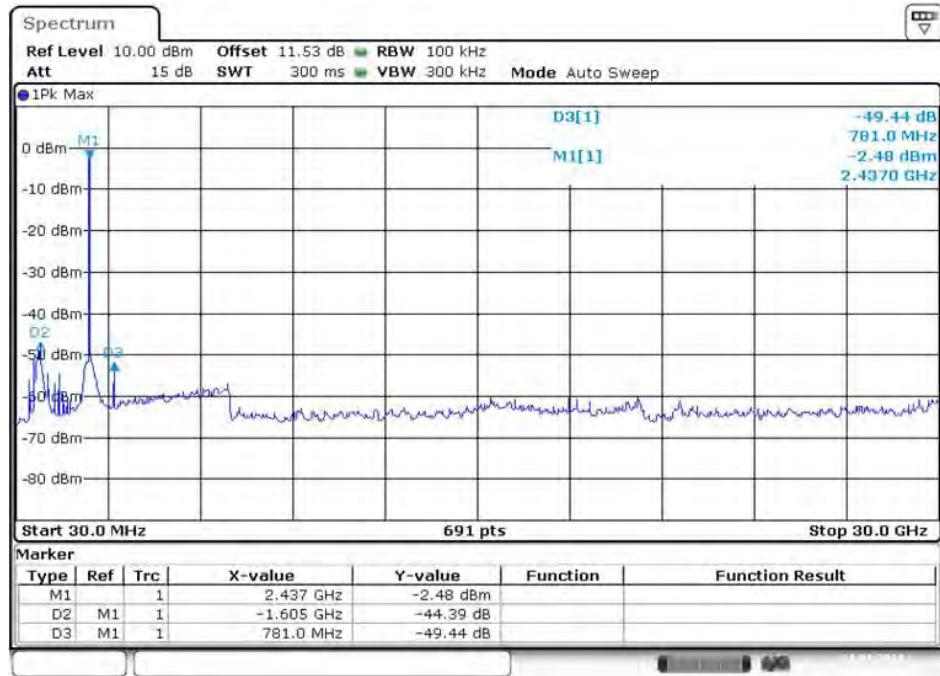

### 3.4.9.11 Spurious Emission at Middle Frequency(802.11 n-HT40)

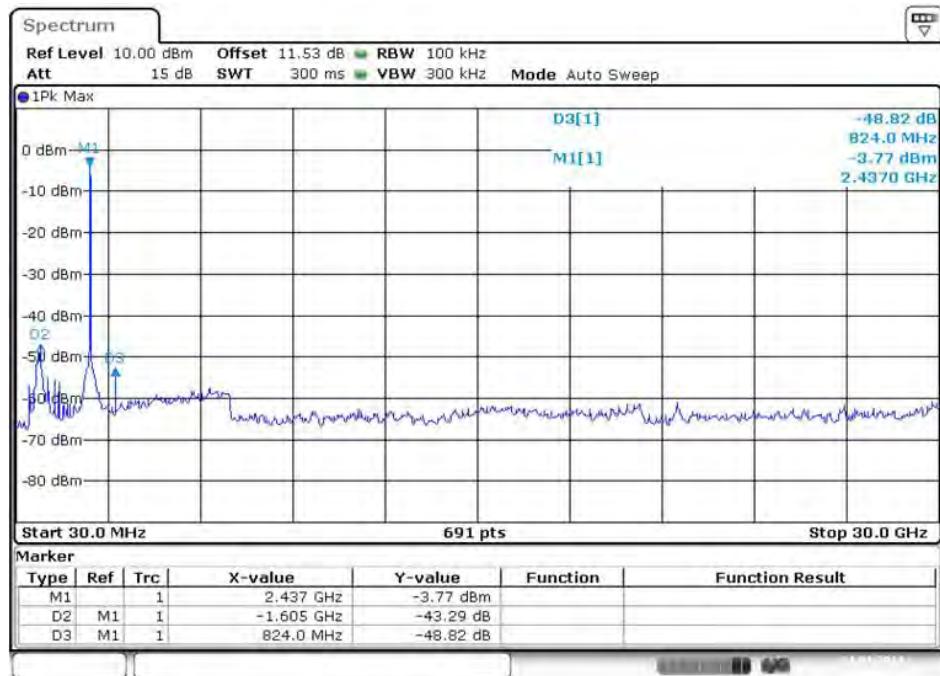


### 3.4.9.12 Spurious Emission at High Frequency(802.11 n-HT40)

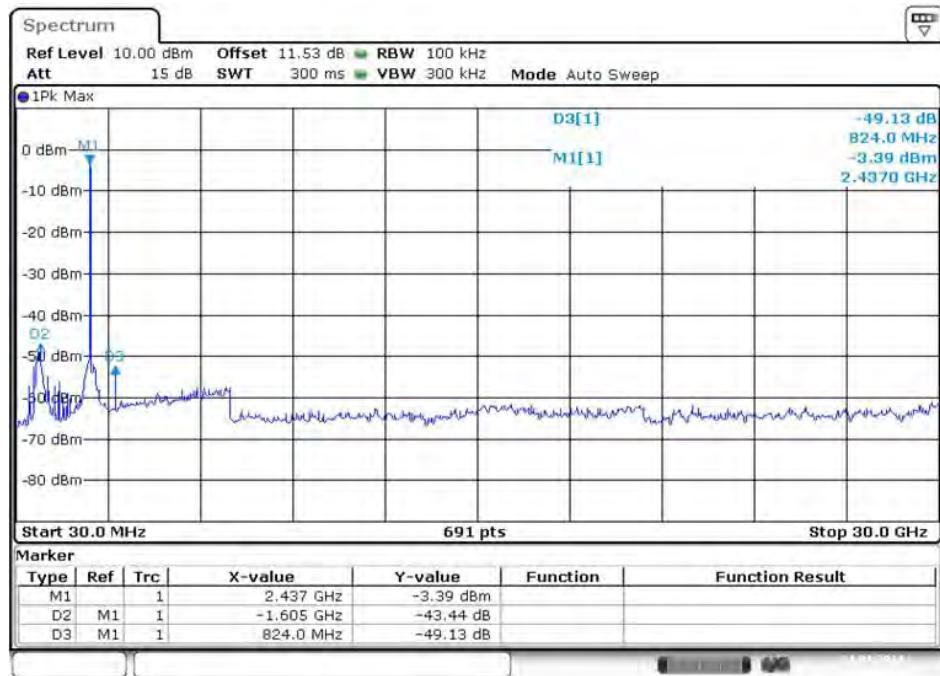


### 3.4.10 Plots of Band Edge Emission


#### 3.4.10.1 Band Edge Emission at Low Frequency – 802.11 b

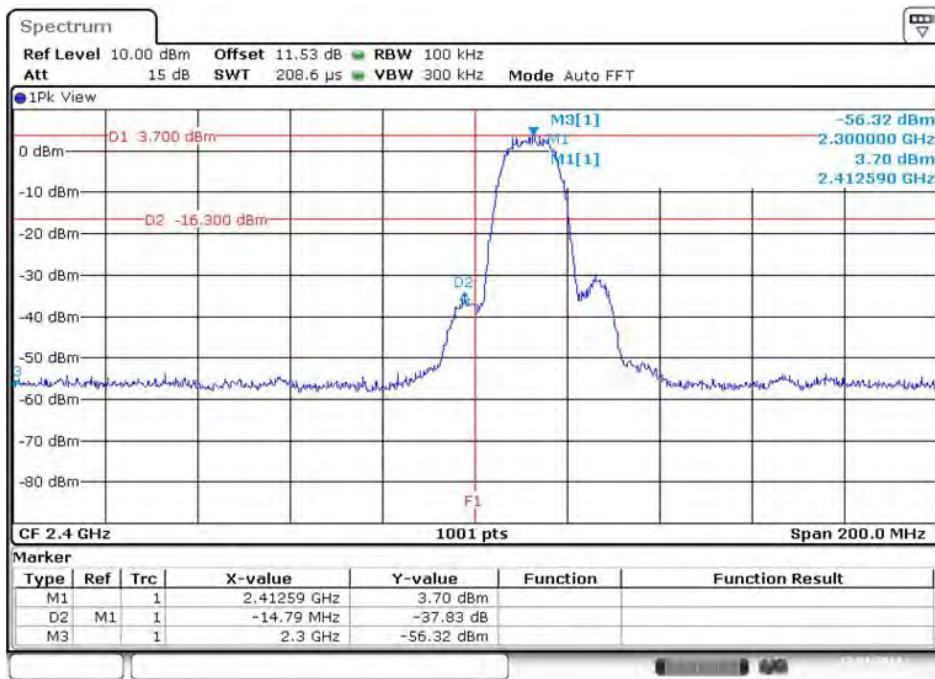


#### 3.4.10.2 Band Edge Emission at High Frequency - 802.11 b

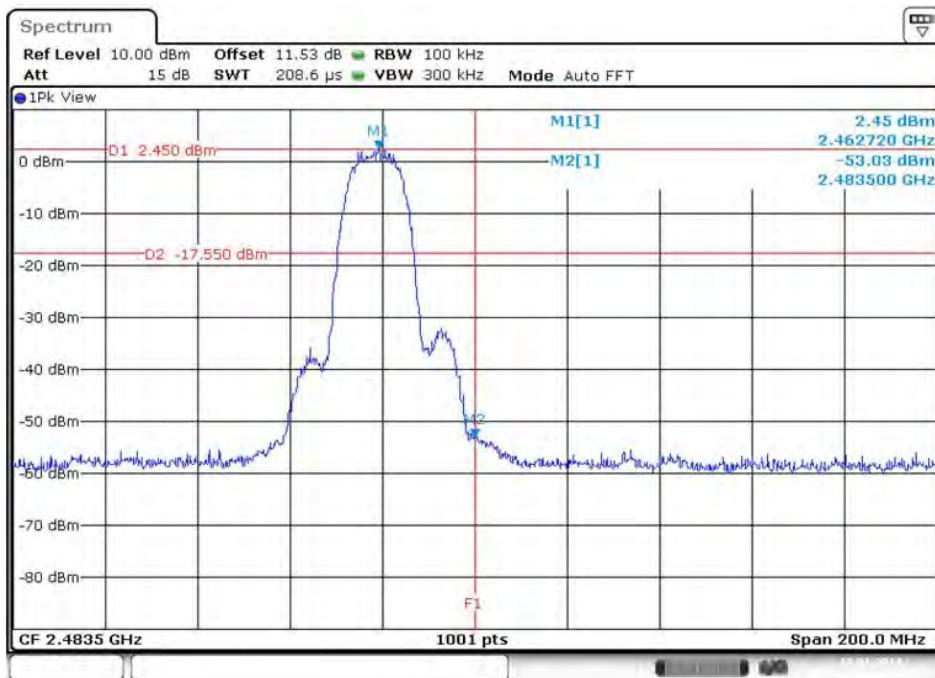


### 3.4.10.3 Band Edge Emission at Low Frequency – 802.11 g

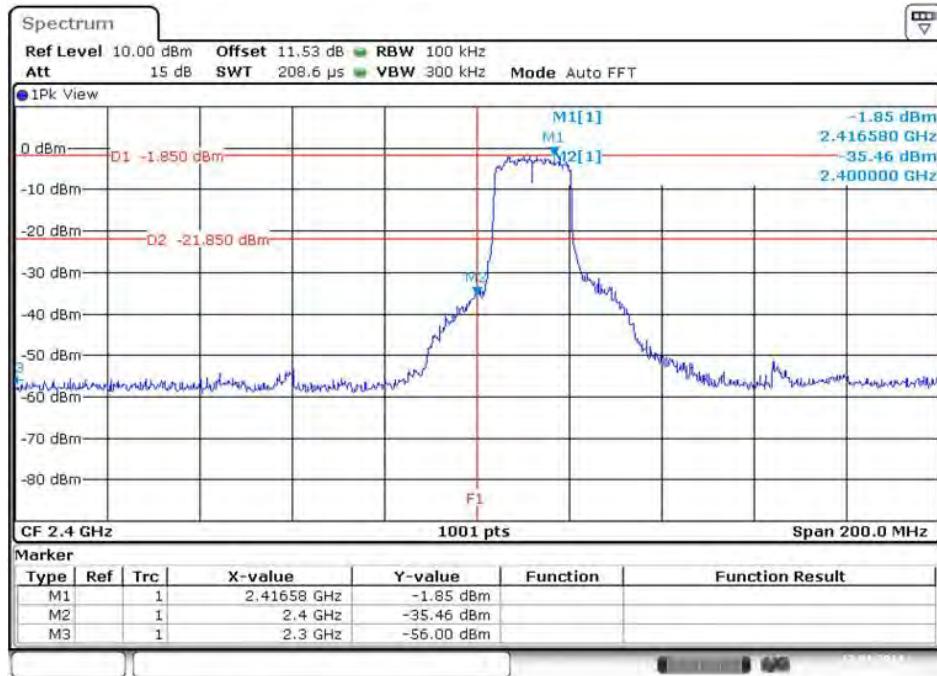


### 3.4.10.4 Band Edge Emission at High Frequency – 802.11 g

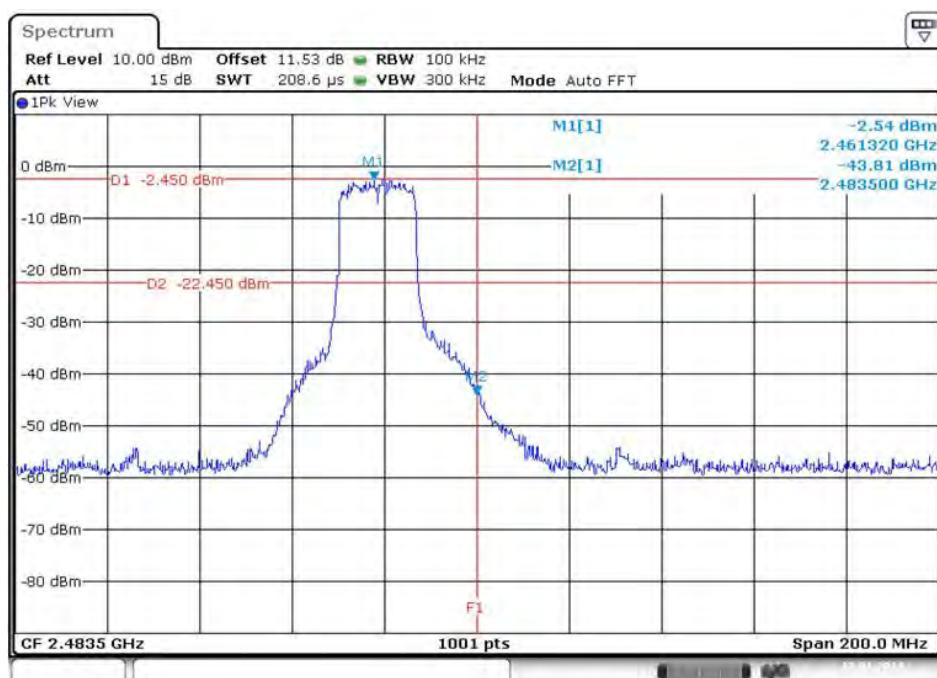


### 3.4.10.5 Band Edge Emission at Low Frequency – 802.11 n(HT20)

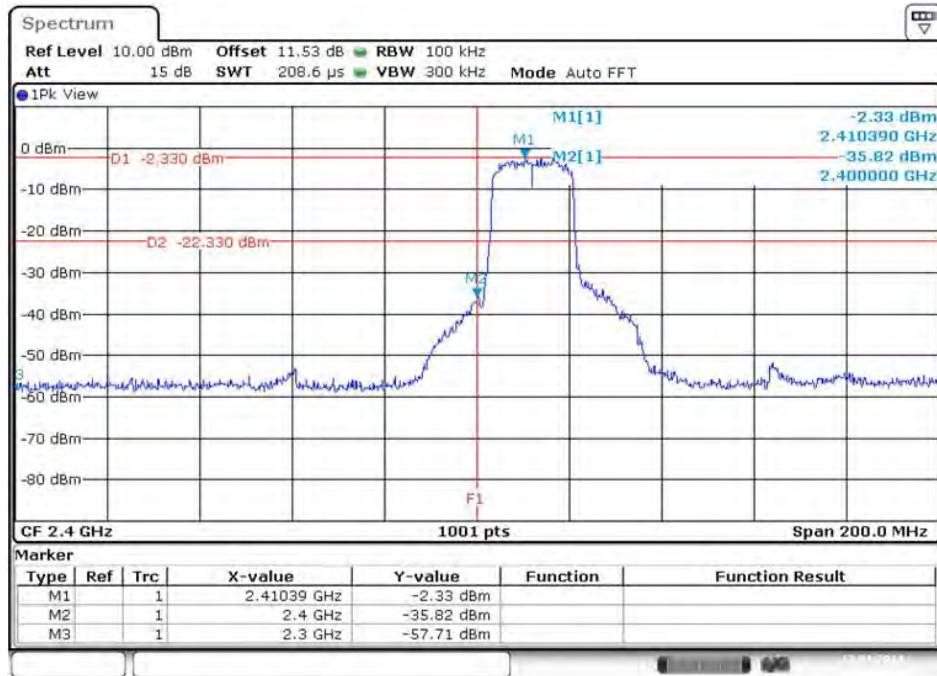


### 3.4.10.6 Band Edge Emission at High Frequency – 802.11 n(HT20)

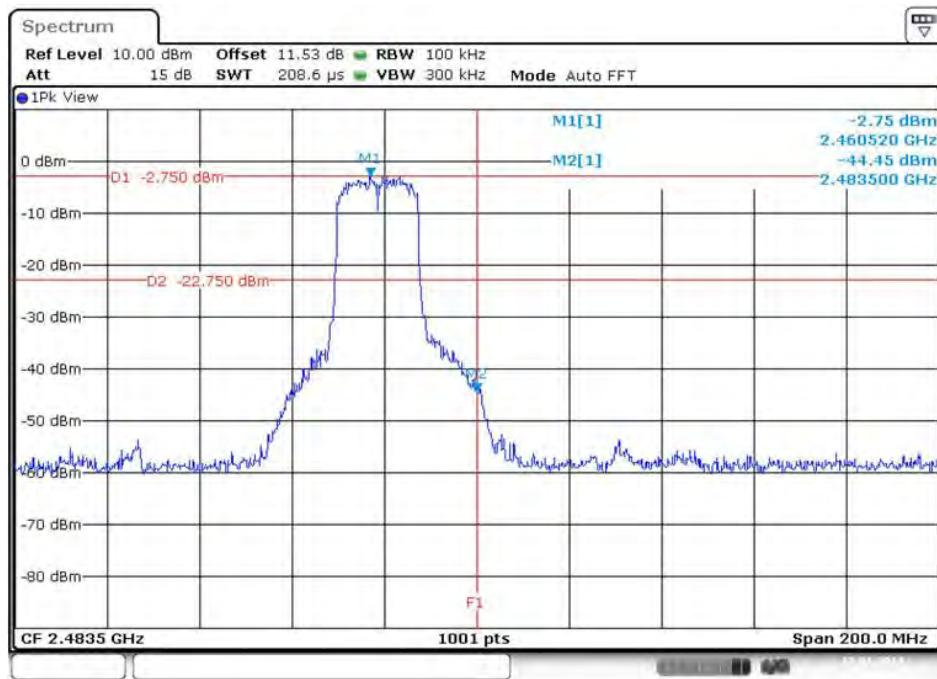

### 3.4.10.7 Band Edge Emission at Low Frequency – 802.11 n(HT40)

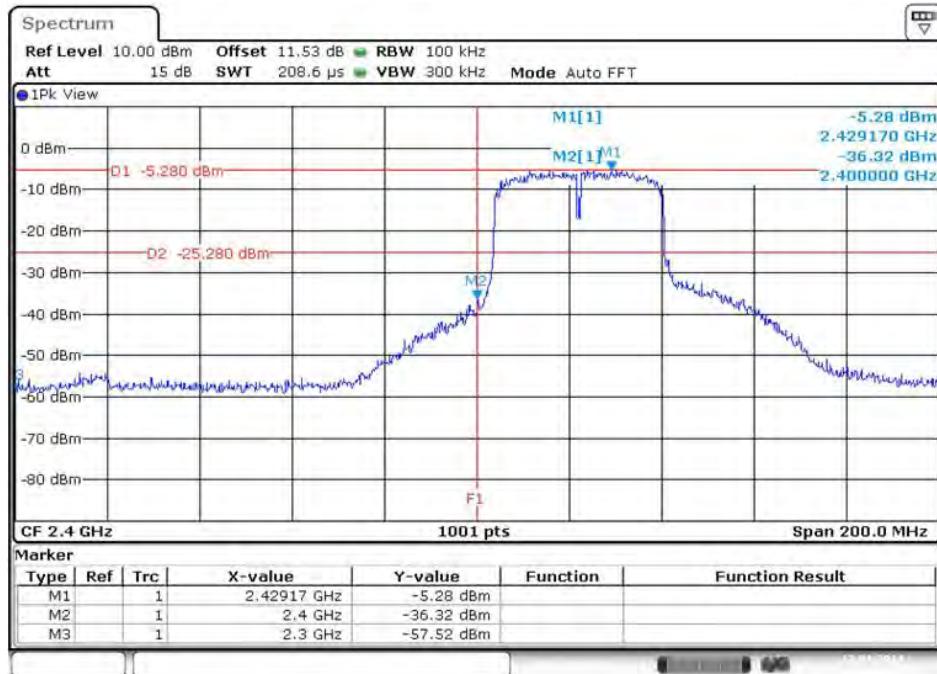

### 3.4.10.8 Band Edge Emission at High Frequency – 802.11 n(HT40)

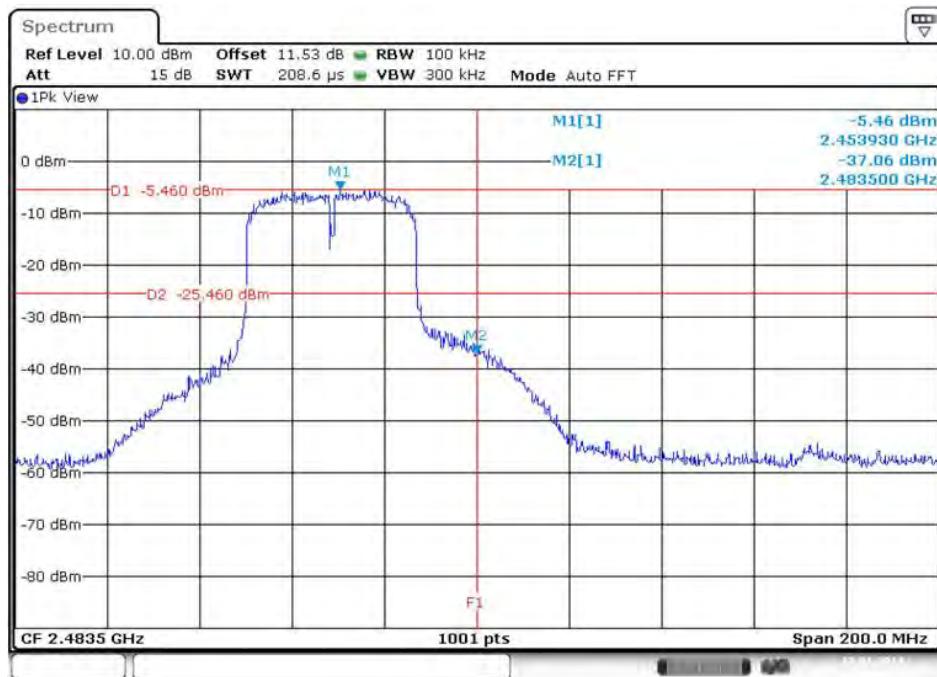

### 3.5 Radiated Band Edges and Spurious Emission


#### 3.5.1 Specification

- FCC Rules Part 15 Section 15.247(d)
- IC RSS-210 Clause 2.6 (Transmitter)
- IC RSS-GEN Clause 6 (Receiver)

#### 3.5.2 Measurement method

- 558074 D01 DTS Meas Guidance v03r01, Section 10.0
- ANSI C63.4-2003 Section 7

#### 3.5.3 Set-up

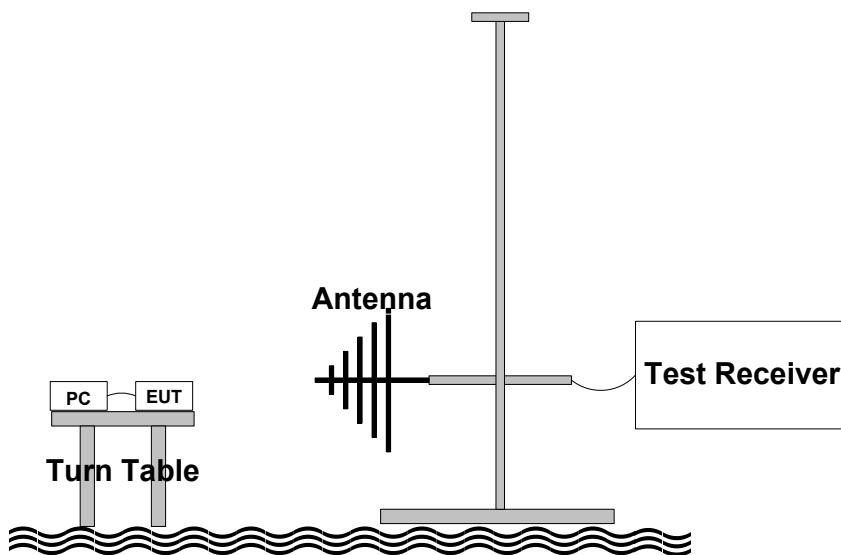

#### 3.5.4 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Test Receiver	ESCI 7	Rohde & Schwarz
Power supply	E3633A	Agilent
Control PC	HP6560b	HP
Test fixer	RS232	WaveShare
Loop antenna	EMCO 6502	EMCO
Bi-conical antenna	VHA9103	Schwarzbeck
Log periodic antenna	VULP9118A	Schwarzbeck
Horn Antenna	BBHA-9120D	Schwarzbeck
Horn Antenna	FR6517	ORBIT

### 3.5.5 Test procedure

The EUT is placed on a turntable, which is 0.8 meter high above ground.

The turntable rotates 360 degrees to determine the position of the maximum emission level.

EUT is set 3.0 meters away from the receiving antenna, broadband antenna, which is mounted on an antenna mast. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level from the EUT. Both horizontal and vertical polarizations of the antenna are set on measurement.

In order to find out the maximum emission levels, all of the EUT location were manipulated according to ANSI 63.4 during the radiated emission measurement. The EUT was tested to 3 orthogonal planes.

The RBW of test receiver is 120 kHz between 30 to 1 000 MHz, and 1 MHz above 1 GHz.

For measurement peak mode, VBW is set to 3 times of RBW.

For measurement average mode, VBW is set to 10 Hz.

### 3.5.6 Test condition

- Test place : Open area test site
- Test environment : 5 °C, 34 % R.H.
- Test mode : Operation at single channel

### 3.5.7 Limit

Frequency [MHz]	Field Strength [ $\mu$ V/m]	Field Strength [dB $\mu$ V/m]	Measurement Distance [m]
0.009 – 0.490	2 400 / F(kHz)	48.52 to 13.80	300
0.490 – 1.705	2 4000 / F(kHz)	33.80 to 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 – 960	200	46.02	3
Above 960	500	53.98	3

§15.205 and RSS-210(2.7 Table 1) : Restrict Band of Operation : Only spurious emissions are permitted in any of the frequency bands listed below ;

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1) 0.495 - 0.505**	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	Above 38.6

1) Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

### 3.5.8 Test result

#### 3.5.8.1 802.11 b

- Operation frequency Low

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2302	H	Y	Peak	27.96	28.05	2.68	0	58.69	74.0	15.31
			Average	14.38	28.05	2.68	0	45.11	54.0	8.89
2 412	H	Y	Peak	63.91	28.77	2.74	0	95.42	-	-
			Average	56.89	28.77	2.74	0	88.40	-	-
*4 820	H	Y	Peak	25.98	32.78	4.80	0	63.56	74.0	10.44
			Average	13.08	32.78	4.80	0	50.66	54.0	3.34

- Operation frequency Middle

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 442	H	Y	Peak	62.11	28.80	2.75	0	93.66	-	-
			Average	56.04	28.80	2.75	0	87.59	-	-
*4 880	H	Y	Peak	23.68	32.87	4.86	0	61.41	74.0	12.59
			Average	13.29	32.87	4.86	0	51.02	54.0	2.98

- Operation frequency High

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 462	H	Y	Peak	61.91	28.88	2.72	0	93.51	-	-
			Average	54.81	28.88	2.72	0	86.41	-	-
2 498	H	Y	Peak	26.96	29.51	2.96	0	59.43	74.0	14.57
			Average	13.35	29.51	2.96	0	45.82	54.0	8.18
*4 925	H	Y	Peak	23.47	32.91	4.89	0	61.27	74.0	12.73
			Average	9.42	32.91	4.89	0	47.22	54.0	6.78

Remark: The other emissions were not detected.

Here. \* is restricted frequency.

### 3.5.8.2 802.11 g

- Operation frequency Low

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2325	H	Y	Peak	27.84	28.05	2.68	0	58.57	74.0	15.43
			Average	14.32	28.05	2.68	0	45.05	54.0	8.95
2 412	H	Y	Peak	60.60	28.77	2.74	0	92.11	-	-
			Average	51.43	28.77	2.74	0	82.94	-	-
*4 820	H	Y	Peak	19.44	32.78	4.80	0	57.02	74.0	16.98
			Average	9.20	32.78	4.80	0	46.78	54.0	7.22

- Operation frequency Middle

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 442	H	Y	Peak	59.29	28.80	2.75	0	90.84	-	-
			Average	51.10	28.80	2.75	0	82.65	-	-
*4 880	H	Y	Peak	20.56	32.87	4.86	0	58.29	74.0	15.71
			Average	8.37	32.87	4.86	0	46.10	54.0	7.90

- Operation frequency High

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 462	H	Y	Peak	58.21	28.88	2.72	0	89.81	-	-
			Average	50.21	28.88	2.72	0	81.81	-	-
2494	H	Y	Peak	27.59	29.51	2.96	0	60.06	74.0	13.94
			Average	13.24	29.51	2.96	0	45.71	54.0	8.29
*4 925	H	Y	Peak	15.54	32.91	4.89	0	53.34	74.0	20.66
			Average	5.67	32.91	4.89	0	43.47	54.0	10.53

Remark: The other emissions were not detected.

Here. \* is restricted frequency.

### 3.5.8.3 802.11 n – HT20

- Operation frequency Low

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2338	H	Y	Peak	28.00	28.05	2.68	0	58.73	74.0	15.27
			Average	14.52	28.05	2.68	0	45.25	54.0	8.75
2 412	H	Y	Peak	60.99	28.77	2.74	0	92.50	-	-
			Average	51.94	28.77	2.74	0	83.45	-	-
*4 820	H	Y	Peak	19.75	32.78	4.80	0	57.33	74.0	16.67
			Average	10.57	32.78	4.80	0	48.15	54.0	5.85

- Operation frequency Middle

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 442	H	Y	Peak	58.55	28.80	2.75	0	90.10	-	-
			Average	51.00	28.80	2.75	0	82.55	-	-
*4 880	H	Y	Peak	16.94	32.87	4.86	0	54.67	74.0	19.33
			Average	7.99	32.87	4.86	0	45.72	54.0	8.28

- Operation frequency High

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 462	H	Y	Peak	59.06	28.88	2.72	0	90.66	-	-
			Average	50.20	28.88	2.72	0	81.80	-	-
2490	H	Y	Peak	27.29	29.51	2.96	0	59.76	74.0	14.24
			Average	13.72	29.51	2.96	0	46.19	54.0	7.81
*4 925	H	Y	Peak	15.84	32.91	4.89	0	53.64	74.0	20.36
			Average	4.76	32.91	4.89	0	42.56	54.0	11.44

Remark: The other emissions were not detected.

Here. \* is restricted frequency.

### 3.5.8.4 802.11 n – HT40

- Operation frequency Low

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2325	H	Y	Peak	28.17	28.05	2.68	0	58.90	74.0	15.10
			Average	14.47	28.05	2.68	0	45.20	54.0	8.80
2 422	H	Y	Peak	56.98	28.77	2.74	0	88.49	-	-
			Average	49.56	28.77	2.74	0	81.07	-	-
*4 820	H	Y	Peak	16.79	32.78	4.80	0	54.37	74.0	19.63
			Average	8.30	32.78	4.80	0	45.88	54.0	8.12

- Operation frequency Middle

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 442	H	Y	Peak	56.36	28.80	2.75	0	87.91	-	-
			Average	48.77	28.80	2.75	0	80.32	-	-
*4 880	H	Y	Peak	14.95	32.87	4.86	0	52.68	74.0	21.32
			Average	6.61	32.87	4.86	0	44.34	54.0	9.66

- Operation frequency High

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
2 452	H	Y	Peak	55.43	28.88	2.72	0	87.03	-	-
			Average	47.99	28.88	2.72	0	79.59	-	-
2494	H	Y	Peak	28.15	29.51	2.96	0	60.62	74.0	13.38
			Average	13.05	29.51	2.96	0	45.52	54.0	8.48
*4 925	H	Y	Peak	13.63	32.91	4.89	0	51.43	74.0	22.57
			Average	3.51	32.91	4.89	0	41.31	54.0	12.69

Remark: The other emissions were not detected.

Here. \* is restricted frequency.

### 3.5.9 Receiver

Frequency [MHz]	Pol. [H/V]	Plane [X/Y/Z]	Detect mode [Peak/AVG]	Reading [dB $\mu$ V]	Antenna factor [dB/m]	Cable loss [dB]	Pre-amp gain [dB]	Emission level [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
No Receiver Emissions within 6 dB of limit										

### 3.6 Power line conducted emission

#### 3.6.1 Specification

- FCC Rules Part 15 Section 15.207

#### 3.6.2 Measurement method

- ANSI C63.4-2003

#### 3.6.3 Test equipment list

Equipment	Model name	Manufacturer
EUT	SMC HOME	VisionScape
Test Receiver	ESS	Rohde & Schwarz
Power supply	E3633A	Agilent
Control PC	HP6560b	HP
Test fixer	RS232	WaveShare
LISN	ENV216	Rohde & Schwarz
LISN	NNBM 8125	Schwarzbeck
LISN	NNBM 8125	Schwarzbeck

#### 3.6.4 Test procedure

The EUT was placed on a wooden table with 0.8 m height above the floor. The EUT was connected to AC power supply and the input power was supplied through a  $50 \Omega / 50 \mu\text{H} \pm 5 \Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

#### 3.6.5 Test condition

- Test place : Shield room
- Test environment : 19 °C, 34 % R.H.
- Test mode : Operation at single channel

#### 3.6.6 Limit

Frequency of emission [MHz]	Conducted limit [dB $\mu$ V]	
	Quasi-peak	Average
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

### 3.6.7 Test result

- Test mode : WLAN mode / Continuous Transmit mode


Frequency (MHz)	Line	Quasi Peak (dB $\mu$ V)			Average (dB $\mu$ V)		
		Emission Level	Limits	Margin (dB)	Emission Level	Q.P Limits	Margin (dB)
0.16	H	50.06	65.21	15.15	39.42	55.21	15.79
2.89	H	46.10	56.00	9.90	31.92	46.00	14.08
3.30	H	47.41	56.00	8.59	30.96	46.00	15.04
5.74	H	46.93	60.00	13.07	34.38	50.00	15.62
8.85	N	47.37	60.00	12.63	33.76	50.00	16.24
20.42	N	45.08	60.00	14.92	30.06	50.00	19.94

#### Tabulated test data for Mains Terminal Continuous Disturbance Voltage

Here, H: Hot Line, N: Neutral line

See next page for an overview sweep performed with quasi peak and average detector.

- Test mode : WLAN mode / Continuous Transmit mode

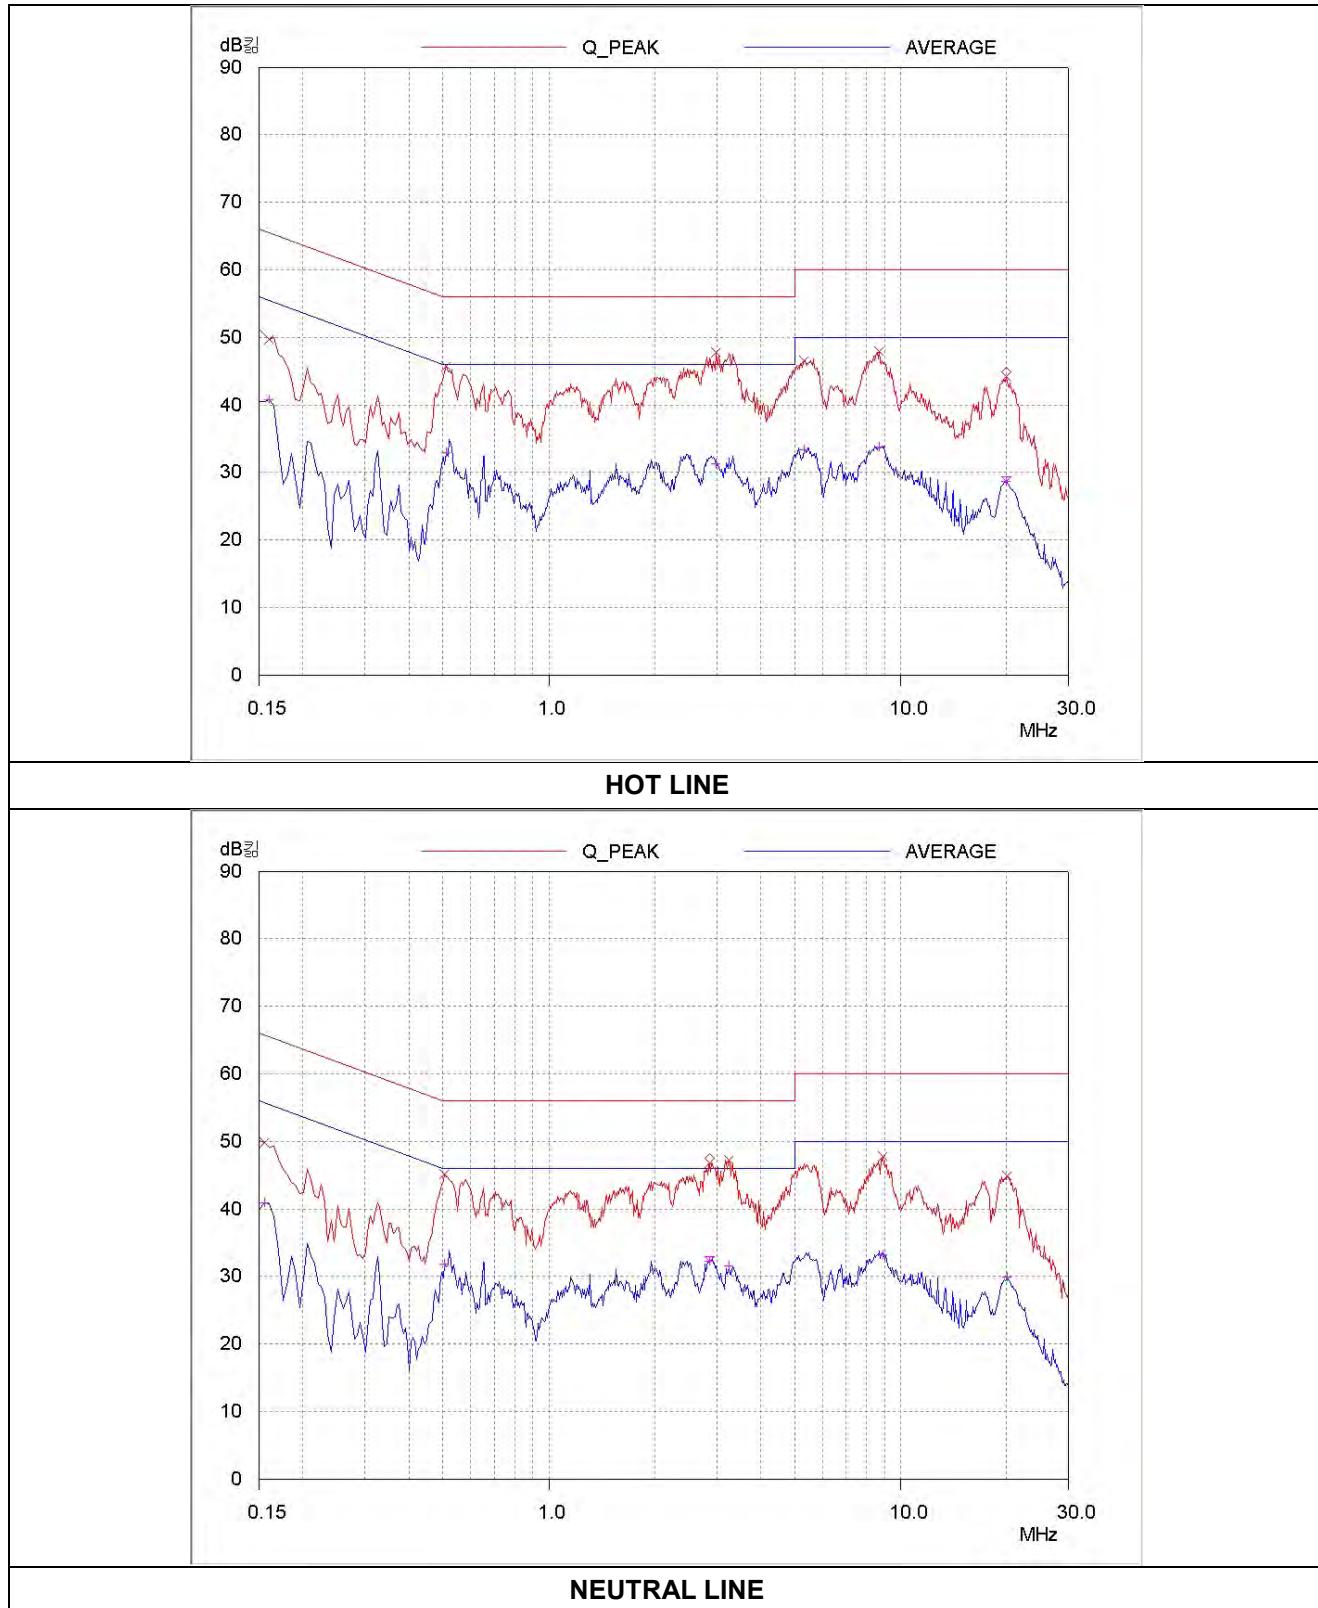

#### 4. Test equipment list

The listing below denotes the test equipment for the test(s).

No.	Equipment	Model	Manufacturer	Serial Number	Calibration Due date
1	Spectrum analyzer	FSV	Rohde & Schwarz	101673	02/04/14
2	Test receiver	ESCI 7	Rohde & Schwarz	1166.5950.07	01/30/14
3	Power supply	E3633A	Agilent	SG40002272	01/28/14
4	Loop antenna	6502	EMCO	9609-9087	03/03/14
5	Biconical antenna	VHA9103	Schwarzbeck	2217	11/23/13
6	Log-Periodic antenna	VULP9118A	Schwarzbeck	382	11/23/13
7	Horn antenna	BBHA 9120 D	Schwarzbeck	395	08/07/14
8	Horn antenna	FR6517	ORBIT	0511106	08/07/14
9	Turn table	N/A	Daeil EMC	N/A	N/A
10	Antenna mast	EAM4.5	Daeil EMC	N/A	N/A
11	Controller	DE200	Daeil EMC	AAA69813111	N/A