

F690501/RF-RTL009174-2 Report Number:

Page: 1

9

TEST REPORT

OF

FCC CFR 47 part 1, 1.1307(b), 1.1310

FCC ID: 2AAZ7-S120

: Wireless Charger Equipment Under Test

Model Name : S120

: SNPowercom Co., Ltd. **Applicant**

Manufacturer : SNPowercom Co., Ltd. : 2015.10.06 ~ 2015.10.07

Date of Issue : 2015.11.02

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

Date of Test(s)

Date:

2015.11.02

Hyunchae You

report cannot be reproduced, except in full, without prior written permission of the Company.

Approved By:

Date:

2015.11.02

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test



Report Number: F690501/RF-RTL009174-2 Page: 2 of 9

INDEX

TABLE OF CONTENTS	Page
1. General Information	3
2. Test Result	7



Report Number: F690501/RF-RTL009174-2 Page: 3 of 9

1. General information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.

Phone No. : +82 31 688 0901 Fax No. : +82 31 688 0921

1.2. Details of applicant

Applicant : SNPowercom Co., Ltd.

Address : #805 Anyang K-Center, 25 Simin-daero 248beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, Korea, 431-815

Contact Person : Lee, Sang-Gon Phone No. : +82 10 2705 6805

1.3. Description of EUT

Kind of Product	Wireless Charger
Model Name	S120
Power Supply	DC 5.0 V (Used AC 220 V adaptor)
Frequency Range	110 kHz ~ 205 kHz
Operating Conditions	0 ℃ ~ 35 ℃
Antenna Type	Inductive loop coil antenna

1.4. Declarations by the manufacturer

- Operation temperature : 0 °C ~ 35 °C



Report Number: F690501/RF-RTL009174-2 Page: 4 of 9

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
E-Field Probe	D.A.R.E!! Instruments	RadiSense 4	13I00444SNO04	Aug. 05, 2015	Annual	Aug. 05, 2016
Magnetic Field Sensor	HIOKI	0850-B1	3471	Jul. 16, 2015	Annual	Jul. 16, 2016
Magnetic Field Hitester	HIOKI	FT3470-50	140430999	Jul. 16, 2015	Annual	Jul. 16, 2016
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.

1.6. Test report revision

Revision	Report number	Date of Issue	Description
0	F690501/RF-RTL009174	2015.10.08	Initial
1	F690501/RF-RTL009174-1	2015.10.16	Modified frequency range (typographical error)
2	F690501/RF-RTL009174-2	2015.11.02	Modified frequency range (typographical error)

1.7. Worst case of test configurations

In order to check all kinds of possible configurations, EUT was evaluated with appropriate load and under each charging condition as below table.


EUT configuration	Description
Charging Mode with load	load 1 %
	load 50 %
	load 100 %



Report Number: F690501/RF-RTL009174-2 Page: 5 of 9

2. Test Result

2.1. Test Setup

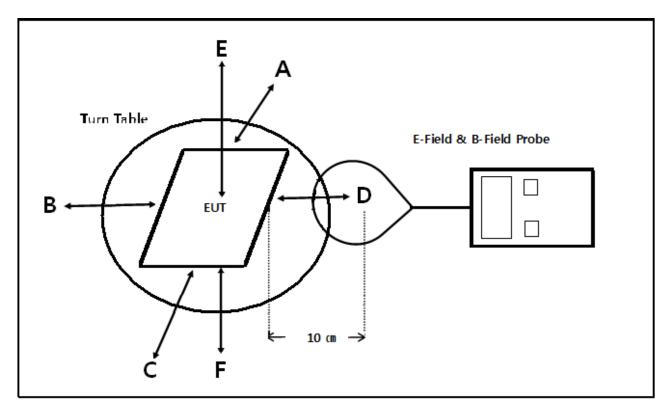

2.2. Measurement procedure

- a) The RF exposure test was performed in anechoic chamber.
- b) The measurement probe was placed at test distance (10 cm) which is between the edge of the charger and the geometric center of probe.
- c) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- d) The EUT were measured according to the dictates of KDB 680106 D01v02.



Report Number: F690501/RF-RTL009174-2 Page: 6 of 9

2.3. Equipment Approval Considerations.

The EUT does comply with item 5.2 of KDB 680106 D01v02.

- a) Power transfer frequency is less that 1 MHz.
 - The device operates in the frequency range from 110 kHz to 205 kHz.
- b) Output power from each primary coil is less than 5 watts.
 - DC 5 V condition → Output power from each primary coil : 5 W (Max.)
- c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
 - The transfer system includes only single primary and secondary coils.
- d) Client device is inserted in or placed directly in contact with the transmitter.
 - Load is placed directly in contact with the transmitter.
- e) The maximum coupling surface area of the transmit (charging) device:
 - The EUT coupling surface area : 7.4 cm (W) \times 8.0 cm (H) = 59.2 cm 2 , 59.2 cm 2 < 60 cm 2
- f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30 % of the MPE limit.
- Aggregate Leakage Fields at 10 cm surrounding the EUT < 30 % of the MPE limit. Refer to following test results. 0.494 A/m (Max.) > 0.489 A/m.



Report Number: F690501/RF-RTL009174-2 Page: 7 of 9

2.4. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter

TABLE 1 - LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (쌘)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Average Time (minutes)							
(A) Limits for Occupational /Control Exposures											
0.3 – 3.0	614	1.63	*(100)	6							
3.0 – 30	1842/f	4.89/f	*(900/f ²)	6							
30 – 300	61.4	0.163	1.0	6							
300 – 1 500			f/300	6							
1 500 – 100 000			5	6							
	(B) Limits for Gen	eral Population / Un	control Exposures								
<u>0.3 – 1.34</u>	<u>614</u>	<u>1.63</u>	*(100)	30							
1.34 – 30	824/f	2.19/f	*(180/f²)	30							
30 – 300	27.5	0.073	0.2	30							
300 – 1 500			f/1 500	30							
1 500 – 100 000			1.0	30							

f = frequency in Mbz

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

^{* =} Plane wave equivalent power density



Report Number: F690501/RF-RTL009174-2 9 Page: 8 of

2.5. E and H field strength

Ambient temperature : (24 ± 1) ℃ Relative humidity % R.H. : 47

2.5.1. E-Field Strength at 10 cm from the edges surrounding the EUT

Test Mode: Charging mode with load

Test condition: Charging mode with load 1 %

Frequency Range (紀)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 205	7.62	7.46	7.48	7.54	9.11	8.74	614.00

Test condition: Charging mode with load 50 %

Frequency Range (妣)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 205	7.56	7.50	7.57	7.60	10.50	8.86	614.00

Test condition: Charging mode with load 100 %

Frequency Range (朏)	Probe Position A (V/m)	Probe Position B (V/m)	Probe Position C (V/m)	Probe Position D (V/m)	Probe Position E (V/m)	Probe Position F (V/m)	Limits (V/m)
110 ~ 205	7.96	7.94	7.99	7.93	12.90	8.94	614.00



Report Number: F690501/RF-RTL009174-2 Page: 9 of 9

2.5.2. H-Field Strength at 10 cm from the edges surrounding the EUT

Test Mode : Charging mode with load

Test condition: Charging mode with load 1 %

Frequency Range (朏)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 205	0.123	0.118	0.121	0.121	0.368	0.204	1.630

Test condition: Charging mode with load 50 %

Frequency Range (朏)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 205	0.090	0.088	0.092	0.089	0.309	0.181	1.630

Test condition: Charging mode with load 100 %

Frequency Range (朏)	Probe Position A (A/m)	Probe Position B (A/m)	Probe Position C (A/m)	Probe Position D (A/m)	Probe Position E (A/m)	Probe Position F (A/m)	Limits (A/m)
110 ~ 205	0.140	0.138	0.144	0.146	0.494	0.234	1.630