RF TEST REPORT



Report No.: 16071212-FCC-R2
Supersede Report No.: N/A

Applicant	NEG TECHNOLOGY CO., LIMITED			
Product Name	Mobile Phone			
Model No.	F1015			
Serial No.	N/A			
Test Standard	FCC Part 1	5.247: 201	5, ANSI C63.10	: 2013
Test Date	December	December 15 to December 31, 2015		
Issue Date	October 19, 2016			
Test Result	Pass Fail			
Equipment complied with the specification				
Equipment did not comply with the specification				
Winnie Zheng David Huang				
Winnie Zhang Test Engineer			vid Huang necked By	

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16071212-FCC-R2
Page	2 of 59

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16071212-FCC-R2
Page	3 of 59

This page has been left blank intentionally.



Test Report	16071212-FCC-R2
Page	4 of 59

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1	ANTENNA REQUIREMENT	9
6.2	CHANNEL SEPARATION	10
6.3	20DB BANDWIDTH	14
6.4	PEAK OUTPUT POWER	18
6.5	NUMBER OF HOPPING CHANNEL	22
6.6	TIME OF OCCUPANCY (DWELL TIME)	24
6.7	BAND EDGE	28
8.6	AC POWER LINE CONDUCTED EMISSIONS	36
6.9	RADIATED EMISSIONS	42
ANI	NEX A. TEST INSTRUMENT	47
ANI	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	48
ANI	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	54
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANI	NEX E. DECLARATION OF SIMILARITY	59



Test Report	16071212-FCC-R2
Page	5 of 59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071212-FCC-R2	NONE	Original	October 19, 2016

2. Customer information

Applicant Name	NEG TECHNOLOGY CO., LIMITED	
Applicant Add	Rm 1406, Block B, Jinsejiari, Jingtian south road, Futian district, Shenzhen, China	
Manufacturer	NEG TECHNOLOGY CO., LIMITED	
Manufacturer Add	Rm 1406, Block B, Jinsejiari, Jingtian south road, Futian district, Shenzhen, China	

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES		
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park		
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong		
	China 518108		
FCC Test Site No.	718246		
IC Test Site No.	4842E-1		
Test Software	Radiated Emission Program-To Shenzhen v2.0		



Test Report	16071212-FCC-R2
Page	6 of 59

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Phone

Main Model: F1015

Serial Model: N/A

Date EUT received: December 14,2015

Test Date(s): December 15 to December 31, 2015

Equipment Category : DSS

GSM850: 0dBi

Antenna Gain: PCS1900: 0dBi

Bluetooth: 0dBi

GSM / GPRS: GMSK Type of Modulation:

Bluetooth: GFSK, π /4DQPSK, 8DPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

RF Operating Frequency (ies): PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

Bluetooth: 2402-2480 MHz

Max. Output Power: 5.061dBm

GSM 850: 124CH

Number of Channels: PCS1900: 299CH

Bluetooth: 79CH



Input Power:

Test Report	16071212-FCC-R2
Page	7 of 59

Battery:

Model : F1015

Sepc:DC3.7V, 650mAh,2.41Wh

Voltage limited of charging:4.2V

Adapter:

Model:F1015

Input: AC100-240V,50/60Hz,150mA

Output: DC 5.0V,500mA

Port: Power Port, Earphone Port, USB Port

Trade Name : OWN

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2AAZ8-F1015



Test Report	16071212-FCC-R2
Page	8 of 59

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions			
Test Item Description Uncertainty			
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB	
-	-	-	



Test Report	16071212-FCC-R2
Page	9 of 59

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth, the gain is 0dBi.

A permanently attached PIFA antenna for GSM, the gain is 0dBi.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.



Test Report	16071212-FCC-R2
Page	10 of 59

6.2 Channel Separation

Temperature	25°C
Relative Humidity	52%
Atmospheric Pressure	1028mbar
Test date :	December 28, 2015
Tested By :	Winnie Zhang

Requirement(s):	1		,		
Spec	Item Requirement		Applicable		
\$ 45 047()(4)		Channel Separation < 20dB BW and 20dB BW <			
	۵)	25KHz ; Channel Separation Limit=25KHz	V		
§ 15.247(a)(1)	(a)	Chanel Separation < 20dB BW and 20dB BW >			
		25kHz; Channel Separation Limit=2/3 20dB BW			
Test Setup		Spectrum Analyzer EUT			
	The to	est follows FCC Public Notice DA 00-705 Measurement	Guidelines.		
	Use the following spectrum analyzer settings:				
	- The EUT must have its hopping function enabled				
	- Span = wide enough to capture the peaks of two adjacent				
	channels				
	- Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span				
Test Procedure	- Video (or Average) Bandwidth (VBW) ≥ RBW				
100t1 1000daile	- Sweep = auto				
	- Detector function = peak				
	- Trace = max hold				
	- Allow the trace to stabilize. Use the marker-delta function to				
	determine the separation between the peaks of the adjacent				
		channels. The limit is specified in one of the subparagraphs of this			
	Section. Submit this plot.				



Test Report	16071212-FCC-R2
Page	11 of 59

Rema	rk				
Resu	lt	Pass	Fail		
Test Data	Yes	.	□ _{N/A}		
Test Plot	Ye	s (See below)	□ _{N/A}		

Channel Separation measurement result


Type/ Modulation	СН	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
	Low Channel	2402	1.005	0.687	Desc
	Adjacency Channel	2403	1.005	0.087	Pass
CH Separation	Mid Channel	2440	1.005	0.600	Desc
GFSK	Adjacency Channel	2441	1.005	0.688	Pass
	High Channel	2480	1.005	0.600	Desc
	Adjacency Channel	2479	1.005	0.688	Pass
	Low Channel	2402	1.005	0.901	Desc
	Adjacency Channel	2403	1.005	0.901	Pass
CH Separation	Mid Channel	2440	1.005	0.899	Door
π /4 DQPSK	Adjacency Channel	2441	1.005	0.099	Pass
	High Channel	2480	1.005	0.898	Door
	Adjacency Channel	2479	1.005	0.090	Pass
	Low Channel	2402	1.005	0.887	Door
	Adjacency Channel	2403	1.005	0.007	Pass
CH Separation	Mid Channel	2440	1.005	0.004	Desc
8DPSK	Adjacency Channel	2441	1.005	0.891	Pass
	High Channel	2480	1.005	0.888	Door
	Adjacency Channel	2479	1.005	0.000	Pass



Test Report	16071212-FCC-R2
Page	12 of 59


Test Plots

Channel Separation measurement result

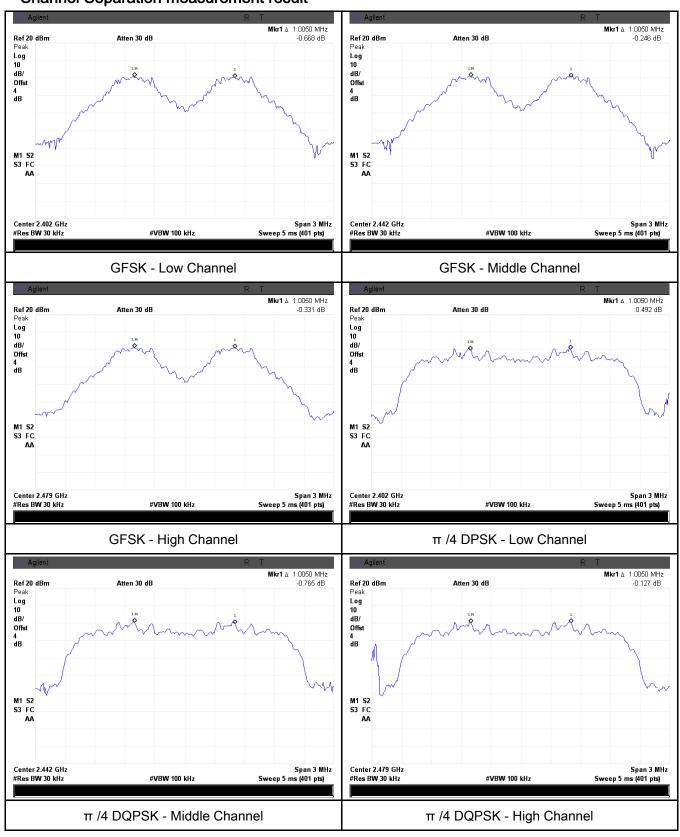



Test Report	16071212-FCC-R2
Page	13 of 59

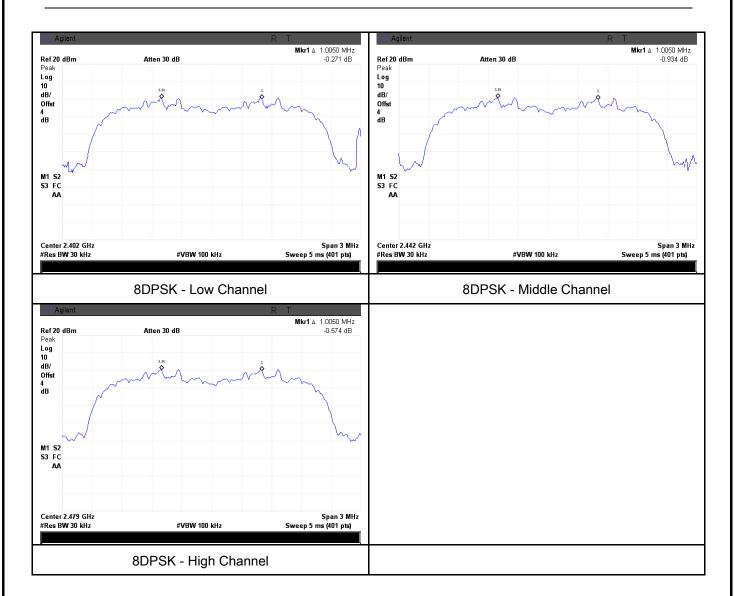



Test Report	16071212-FCC-R2
Page	14 of 59

6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	December 24, 2015
Tested By :	Winnie Zhang

Requirement(s):			
Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	V
Test Setup		Spectrum Analyzer EUT	
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: Span = approximately 2 to 3 times the 20 dB bandwidth, centered or a hopping channel RBW ≥ 1% of the 20 dB bandwidth VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold. The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference		e. Allow the the marker in to e marker-he



Test Report	16071212-FCC-R2
Page	15 of 59

_			
		marker l	evel. The marker-delta reading at this point is the 20 dB
		bandwid	Ith of the emission. If this value varies with different modes of
		operatio	n (e.g., data rate, modulation format, etc.), repeat this test for
		each va	riation. The limit is specified in one of the subparagraphs of
		this Sec	tion. Submit this plot(s).
Remark			
Result		Pass	Fail
Test Data	V	'es	□ _{N/A}
Test Plot	Y	es (See below)	N/A

Measurement result


Modulation	СН	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
	Low	2402	1.030	0.8969
GFSK	Mid	2441	1.032	0.8935
	High	2480	1.032	0.8948
	Low	2402	1.352	1.1937
π /4 DQPSK	Mid	2441	1.349	1.1948
	High	2480	1.347	1.1963
	Low	2402	1.330	1.1978
8-DPSK	Mid	2441	1.337	1.2060
	High	2480	1.332	1.2064



Test Report	16071212-FCC-R2
Page	16 of 59


Test Plots

20dB Bandwidth measurement result

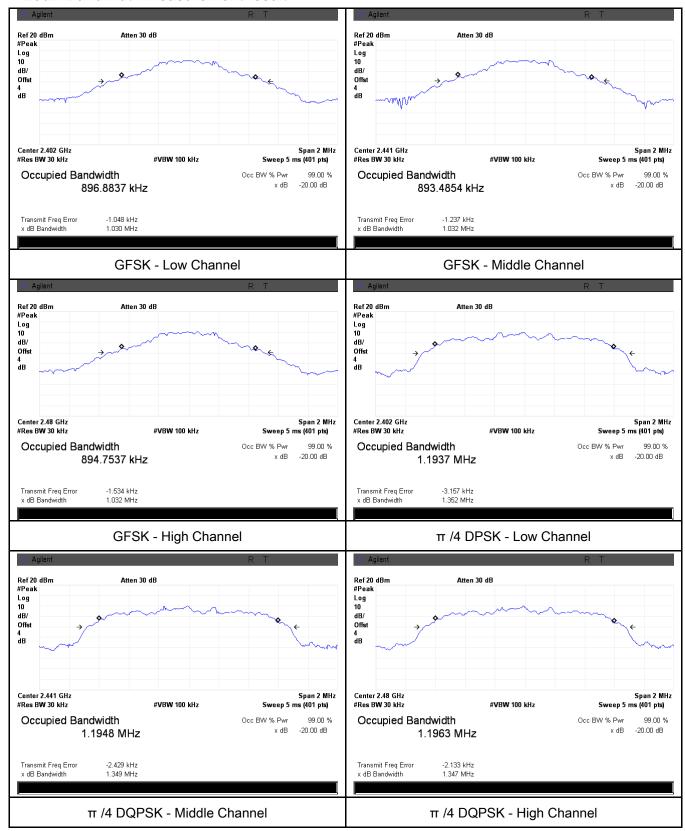



Test Report	16071212-FCC-R2
Page	17 of 59

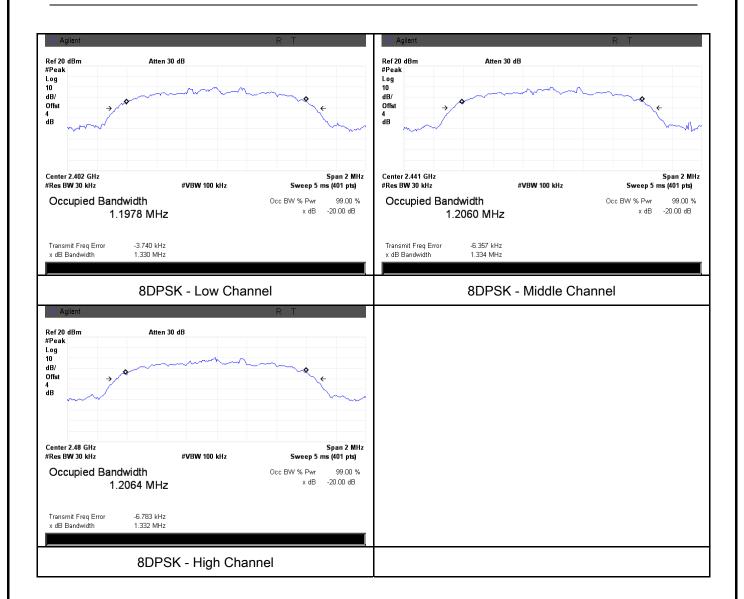



Test Report	16071212-FCC-R2
Page	18 of 59

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	December 24, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable	
	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1		
		Watt		
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt		
§15.247(b)	c)	For all other FHSS in the 2400-2483.5MHz band:		
(3),RSS210	C)	≤ 0.125 Watt.	>	
(A8.4)	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt		
	٥)	FHSS in 902-928MHz with ≥ 25 & <50 channels:		
	e)	≤ 0.25 Watt		
	f)	DTS in 902-928MHz, 2400-2483.5MHz,≤ 1 Watt		
Test Setup	Spectrum Analyzer EUT			
	The test follows FCC Public Notice DA 00-705 Measurement Guidelines.			
	Use the following spectrum analyzer settings:			
	- Span = approximately 5 times the 20 dB bandwidth, centered on a			
		hopping channel		
Test	-	- RBW > the 20 dB bandwidth of the emission being measured		
Procedure	-	- VBW≥ RBW		
	-	Sweep = auto		
	- Detector function = peak			
	- Trace = max hold			
		Allow the trace to stabilize.		



Test Report	16071212-FCC-R2
Page	19 of 59

		- Use the	marker-to-peak function to set the marker to the peak of the		
		emission. The indicated level is the peak output power (see the note			
		above re	egarding external attenuation and cable loss). The limit is		
		specified	d in one of the subparagraphs of this Section. Submit this		
		plot. A p	eak responding power meter may be used instead of a		
		spectrur	m analyzer.		
Remark					
Result		Pass	Fail		
Test Data	Y	es	□ _{N/A}		
Test Plot	Y	es (See below)	N/A		

Peak Output Power measurement result


Туре	Modulation	СН	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
	GFSK	Low	2402	3.007	125	Pass
		Mid	2441	3.225	125	Pass
		High	2480	3.195	125	Pass
Out to ut	π /4 DQPSK 8-DPSK	Low	2402	4.607	125	Pass
Output		Mid	2441	4.845	125	Pass
power		High	2480	4.765	125	Pass
		Low	2402	4.867	125	Pass
		Mid	2441	5.061	125	Pass
		High	2480	4.914	125	Pass



Test Report	16071212-FCC-R2
Page	20 of 59


Test Plots

Output Power measurement result

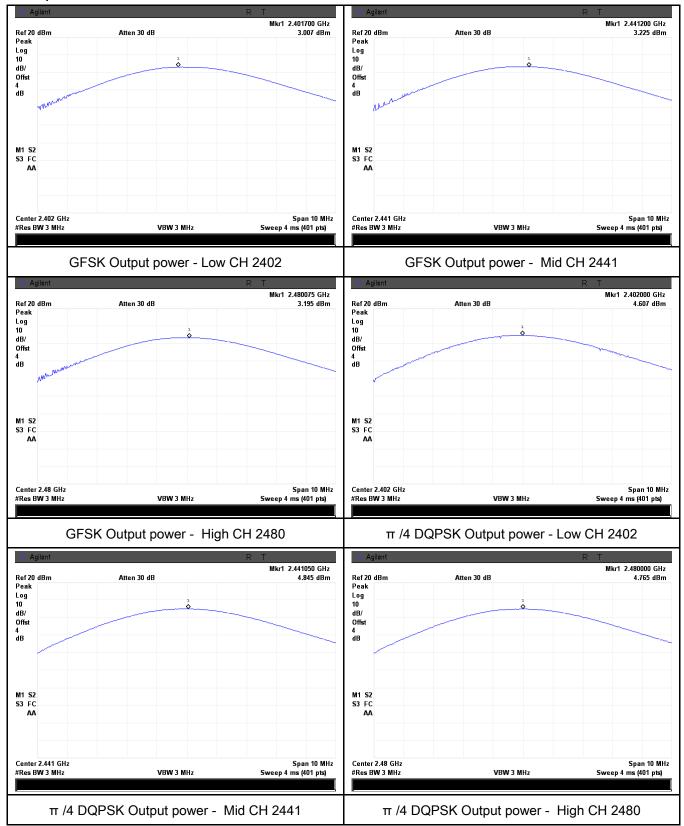



Test Report	16071212-FCC-R2
Page	21 of 59

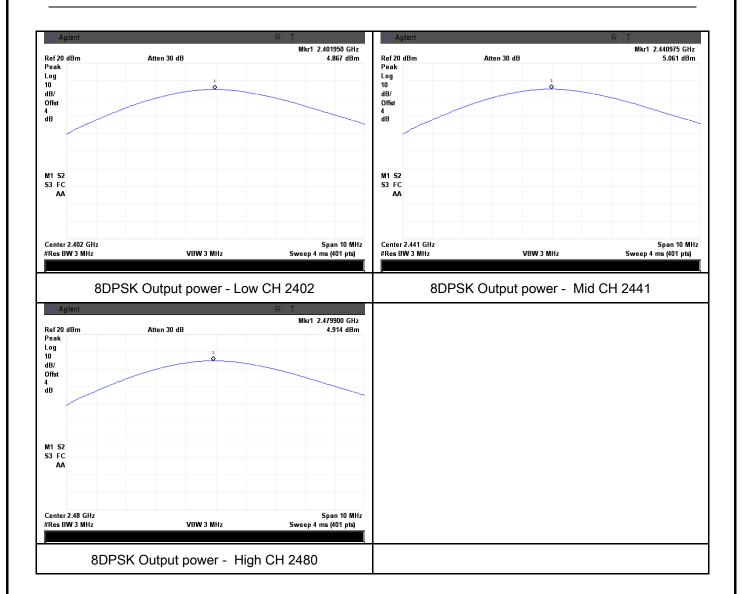



Test Report	16071212-FCC-R2
Page	22 of 59

6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	December 24, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	V
Test Setup		Spectrum Analyzer EUT	
Test Procedure	Use the	st follows FCC Public Notice DA 00-705 Measurement Gue following spectrum analyzer settings: JT must have its hopping function enabled. Span = the frequency band of operation RBW ≥ 1% of the span VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow trace to fully stabilize. It may prove necessary to break the span up to sections, clearly show all of the hopping frequencies. The limit is spone of the subparagraphs of this Section. Submit this plot	in order to pecified in
Remark			
Result	Pas	Fail	
	Yes Yes (See	below)	




Test Report	16071212-FCC-R2
Page	23 of 59

Number of Hopping Channel measurement result

Туре	Modulation	Frequency Range	Number of Hopping Channel	Limit
Nivershow of	GFSK	2400-2483.5	79	15
Number of	π /4 DQPSK	2400-2483.5	79	15
Hopping Channel	8-DPSK	2400-2483.5	79	15

Test Plots

Number of Hopping Channels measurement result

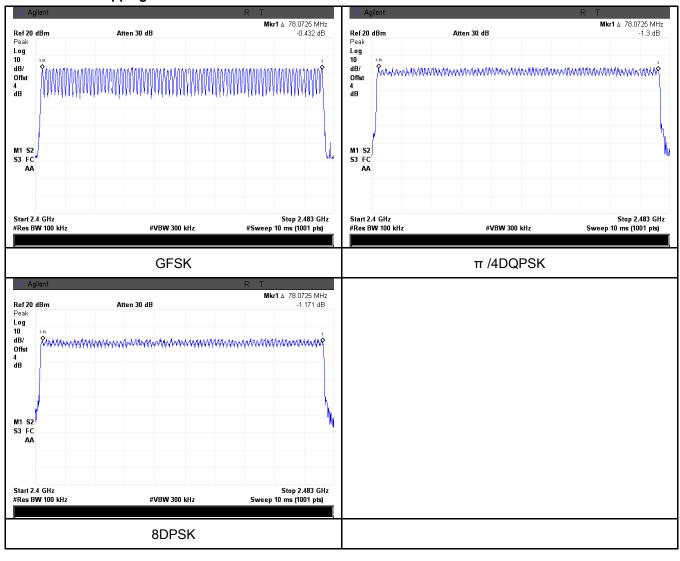



Test Report	16071212-FCC-R2
Page	24 of 59

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	December 24, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable		
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	V		
Test Setup		Spectrum Analyzer EUT			
		st follows FCC Public Notice DA 00-705 Measurement G	Guidelines.		
	Use the	e following spectrum analyzer			
	Span = zero span, centered on a hopping channelRBW = 1 MHz				
Test	- VBW≥ RBW				
Procedure	- Sweep = as necessary to capture the entire dwell time per hopping				
	channel				
	- Detector function = peak				
	- Trace = max hold				
	- use the marker-delta function to determine the dwell time				
Remark					
Result	Pas	s Fail			

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16071212-FCC-R2
Page	25 of 59

Dwell Time measurement result

Туре	Modulation	СН	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
		Low	2.91	310.400	400	Pass
	GFSK	Mid	2.91	310.400	400	Pass
		High	2.93	312.533	400	Pass
	vell Time π /4 DQPSK	Low	2.90	309.333	400	Pass
Dwell Time		Mid	2.91	310.400	400	Pass
		High	2.90	309.333	400	Pass
		Low	2.91	310.400	400	Pass
	8-DPSK	Mid	2.92	311.467	400	Pass
		High	2.90	309.333	400	Pass
	8-DPSK			309.333	400	


Note: Dwell time=Pulse Time (ms) × (1600 \div 6 \div 79) ×31.6



Test Report	16071212-FCC-R2
Page	26 of 59


Test Plots

Dwell Time measurement result

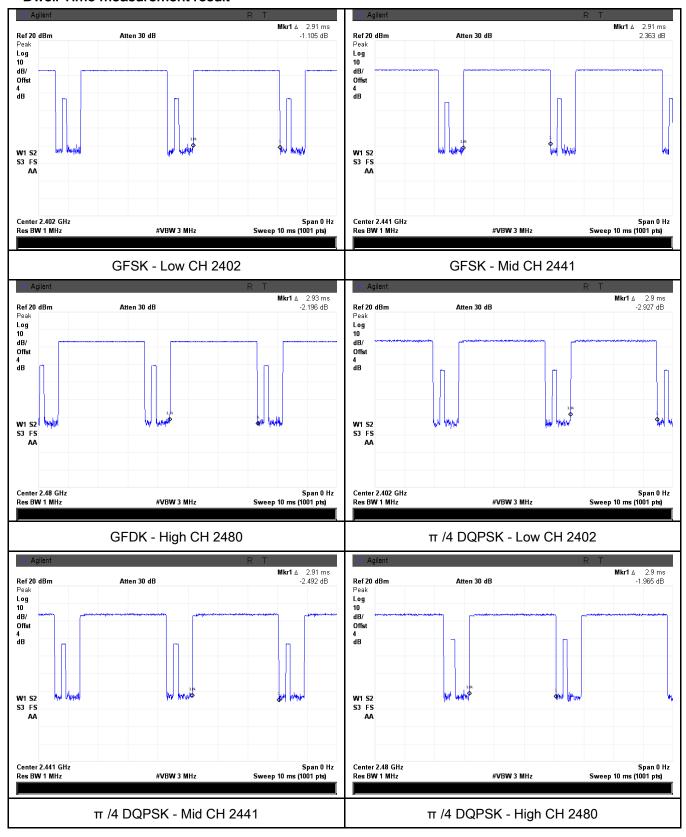



Test Report	16071212-FCC-R2
Page	27 of 59

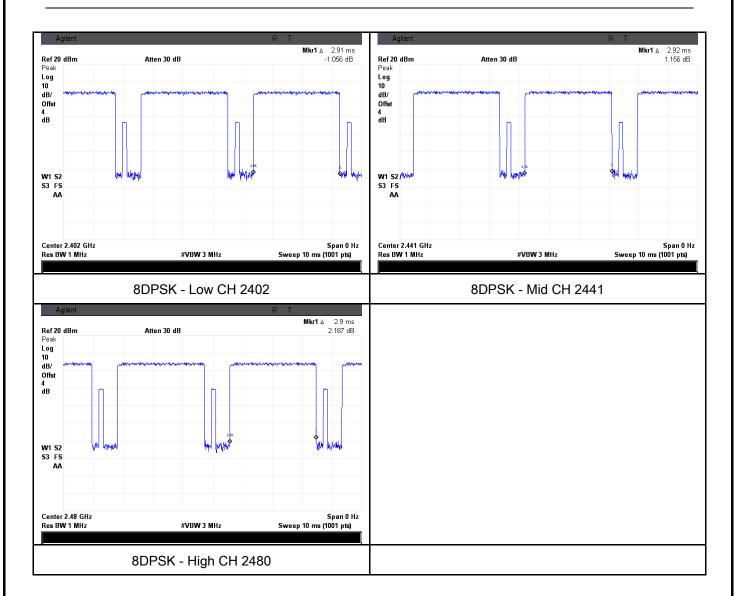



Test Report	16071212-FCC-R2
Page	28 of 59

6.7 Band Edge

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	December 29, 2015
Tested By :	Winnie Zhang

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	\
Test Setup	Ant. Tower Support Units Ground Plane Test Receiver		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,		



Test Report	16071212-FCC-R2
Page	29 of 59


	and make sure the instrument is operated in its linear range.
	- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a
	convenient frequency span including 100kHz bandwidth from band edge, check
	the emission of EUT, if pass then set Spectrum Analyzer as below:
	a. The resolution bandwidth and video bandwidth of test receiver/spectrum
	analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
	b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and
	video bandwidth is 3MHz with Peak detection for Peak measurement at
	frequency above 1GHz.
	c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the
	video bandwidth is 10Hz with Peak detection for Average Measurement as
	below at frequency above 1GHz.
	- 4. Measure the highest amplitude appearing on spectral display and set it as a
	reference level. Plot the graph with marking the highest point and edge
	frequency.
	- 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	Pass Fail
Test Data	Yes N/A
Test Plot	Yes (See below)



Test Report	16071212-FCC-R2
Page	30 of 59


Test Plots

GFSK Mode:

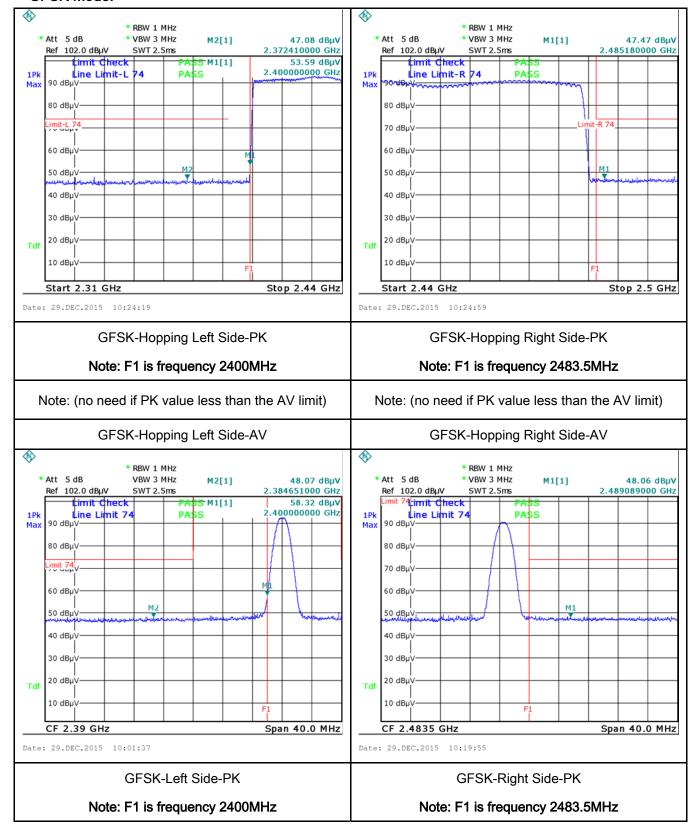




Test Report	16071212-FCC-R2
Page	31 of 59

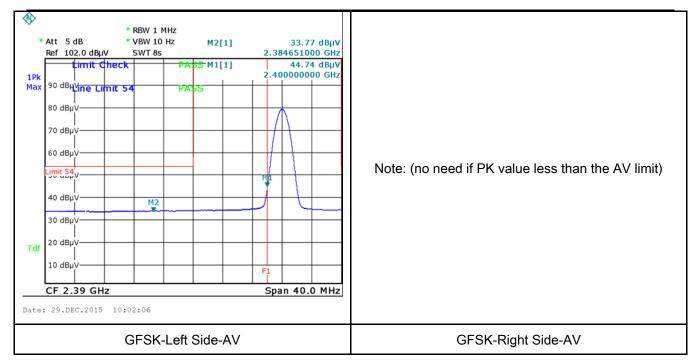




Test Report	16071212-FCC-R2	
Page	32 of 59	

π /4 DQPSK Mode:

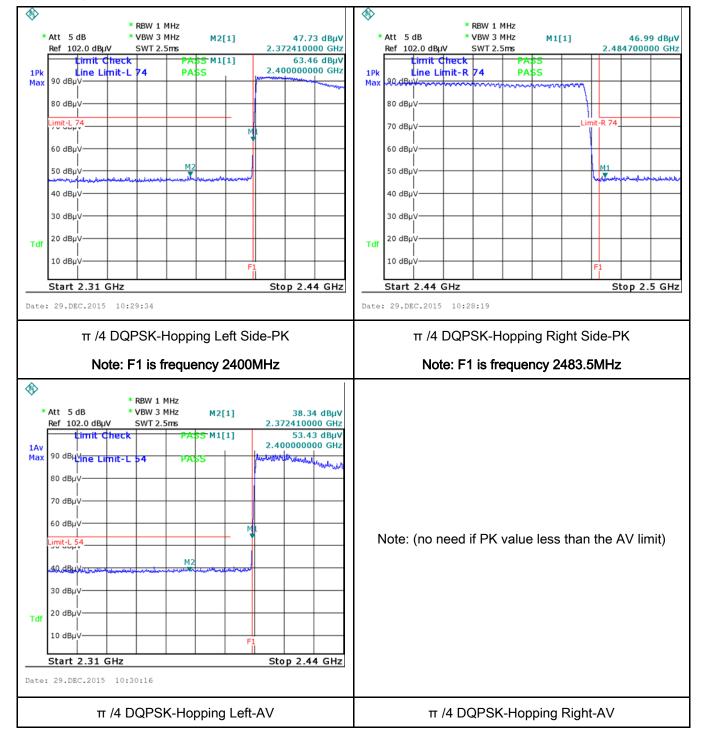




Test Report	16071212-FCC-R2	
Page	33 of 59	

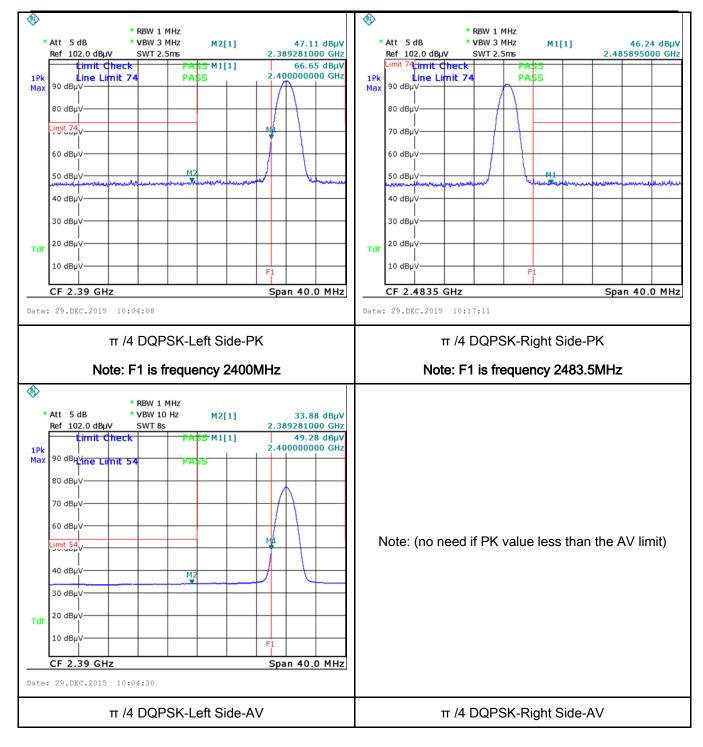




Test Report	16071212-FCC-R2	
Page	34 of 59	

8-DPSK Mode:

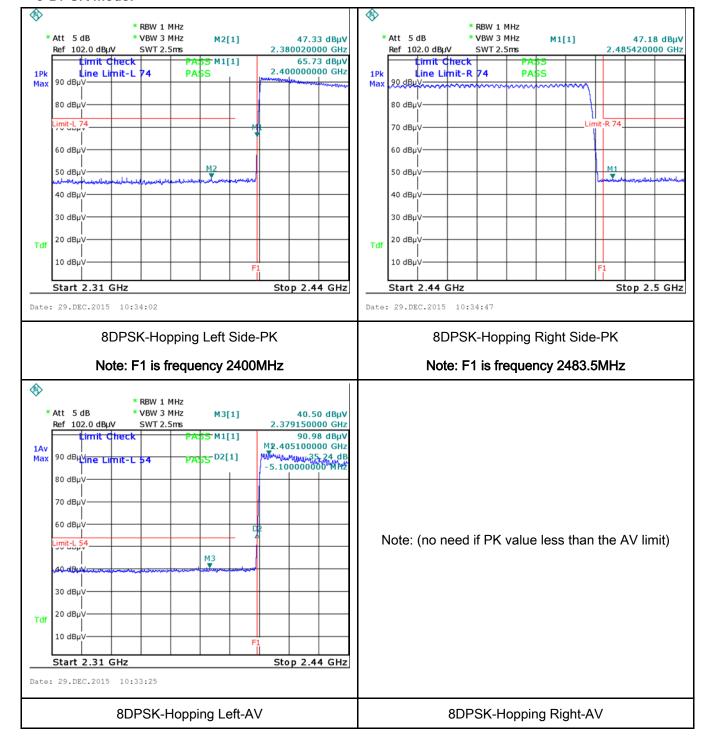



Test Report	16071212-FCC-R2	
Page	35 of 59	

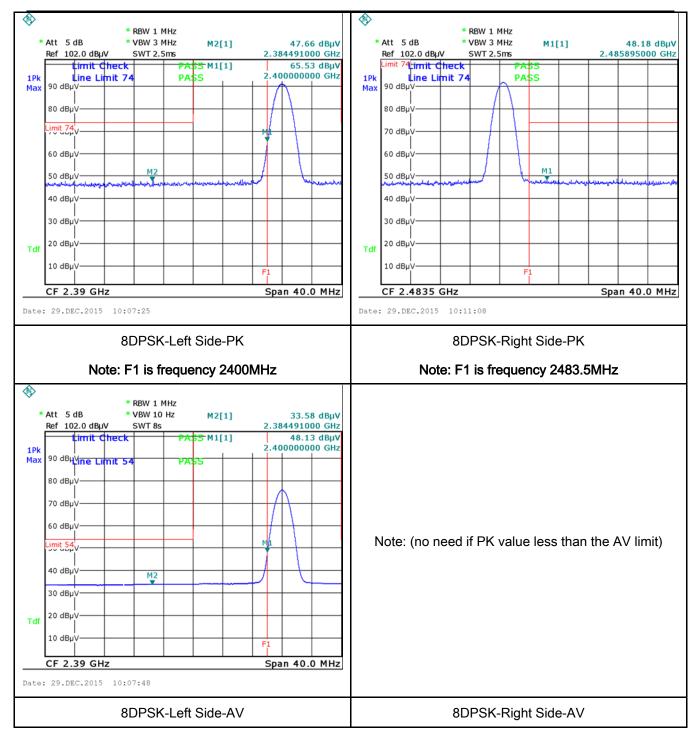



Test Report	16071212-FCC-R2	
Page	36 of 59	

6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	December 22, 2015
Tested By :	Winnie Zhang

	For Low-power radio-from connected to the public		s designed to be		
a)	[mu]H/50 ohms line implower limit applies at the Frequency ranges (MHz)				
	0.13 ~ 0.3	56	46		
	5 ~ 30	60	50		
Test Setup Vertical Ground Reference Plane Test Receiver Horizontal Ground Reference Plane					
Note: 1.5 upport units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.					
 The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 					
	1. The the 2. The filte	a) [mu]H/50 ohms line implower limit applies at the Frequency ranges (MHz) 0.15 ~ 0.5 0.5 ~ 5 5 ~ 30 Note: 1.Support to 2.Both of L from othe 1. The EUT and supporting equation to point a 1.5 The power supply for the EU filtered mains.	[mu]H/50 ohms line impedance stabilization n lower limit applies at the boundary between the Frequency ranges	Frequency ranges (MHz) QP Average 0.15 ~ 0.5 66 - 56 56 - 46 0.5 ~ 5 60 - 50 Vertical Ground Reference Plane Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units. 1. The EUT and supporting equipment were set up in accordance with the rethe standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, c filtered mains.	



Test Plot
✓ Yes (See below)
✓ N/A


Test Report	16071212-FCC-R2
Page	37 of 59

	coaxial cable.
	4. All other supporting equipment were powered separately from another main supply.
	5. The EUT was switched on and allowed to warm up to its normal operating condition.
	6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power)
	over the required frequency range using an EMI test receiver.
	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the
	selected frequencies and the necessary measurements made with a receiver bandwidth
	setting of 10 kHz.
	8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	Pass Fail
Test Data	Yes N/A



Test Report	16071212-FCC-R2
Page	38 of 59

Test Mode: Bluetooth Mode	
---------------------------	--

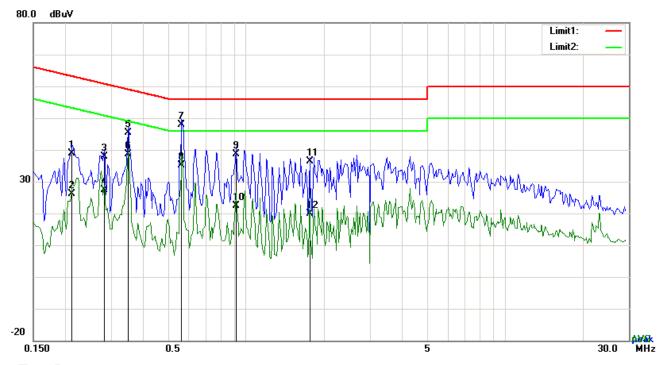


Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2124	28.91	QP	10.03	38.94	63.11	-24.17
2	L1	0.2124	15.99	AVG	10.03	26.02	53.11	-27.09
3	L1	0.2826	27.79	QP	10.03	37.82	60.74	-22.92
4	L1	0.2826	17.31	AVG	10.03	27.34	50.74	-23.40
5	L1	0.3489	35.29	QP	10.03	45.32	58.99	-13.67
6	L1	0.3489	28.54	AVG	10.03	38.57	48.99	-10.42
7	L1	0.5634	37.94	QP	10.03	47.97	56.00	-8.03
8	L1	0.5634	25.19	AVG	10.03	35.22	46.00	-10.78
9	L1	0.9105	28.64	QP	10.03	38.67	56.00	-17.33
10	L1	0.9105	12.41	AVG	10.03	22.44	46.00	-23.56
11	L1	1.7529	26.25	QP	10.04	36.29	56.00	-19.71
12	L1	1.7529	9.79	AVG	10.04	19.83	46.00	-26.17



Test Report	16071212-FCC-R2
Page	39 of 59

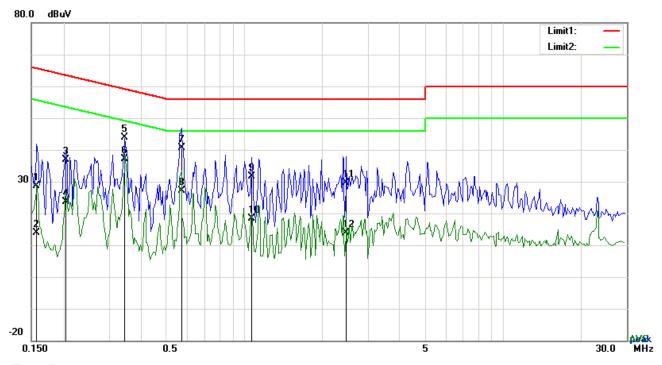


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1578	18.56	QP	10.02	28.58	65.58	-37.00
2	N	0.1578	3.91	AVG	10.02	13.93	55.58	-41.65
3	N	0.2046	26.92	QP	10.02	36.94	63.42	-26.48
4	N	0.2046	13.51	AVG	10.02	23.53	53.42	-29.89
5	N	0.3450	33.96	QP	10.02	43.98	59.08	-15.10
6	N	0.3450	27.22	AVG	10.02	37.24	49.08	-11.84
7	N	0.5712	30.60	QP	10.02	40.62	56.00	-15.38
8	N	0.5712	17.03	AVG	10.02	27.05	46.00	-18.95
9	N	1.0665	21.49	QP	10.03	31.52	56.00	-24.48
10	N	1.0665	8.41	AVG	10.03	18.44	46.00	-27.56
11	N	2.4822	19.57	QP	10.04	29.61	56.00	-26.39
12	N	2.4822	3.81	AVG	10.04	13.85	46.00	-32.15



Test Report	16071212-FCC-R2
Page	40 of 59

|--|

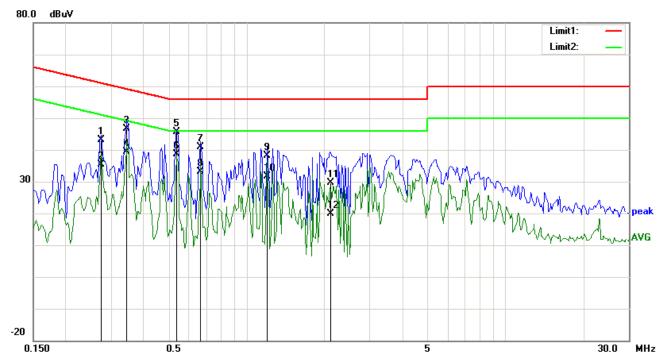


Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2748	33.14	QP	10.03	43.17	60.97	-17.80
2	L1	0.2748	25.31	AVG	10.03	35.34	50.97	-15.63
3	L1	0.3450	36.55	QP	10.03	46.58	59.08	-12.50
4	L1	0.3450	29.37	AVG	10.03	39.40	49.08	-9.68
5	L1	0.5361	35.66	QP	10.03	45.69	56.00	-10.31
6	L1	0.5361	28.48	AVG	10.03	38.51	46.00	-7.49
7	L1	0.6648	30.91	QP	10.03	40.94	56.00	-15.06
8	L1	0.6648	23.11	AVG	10.03	33.14	46.00	-12.86
9	L1	1.2030	28.00	QP	10.03	38.03	56.00	-17.97
10	L1	1.2030	21.50	AVG	10.03	31.53	46.00	-14.47
11	L1	2.1101	19.53	QP	10.04	29.57	56.00	-26.43
12	L1	2.1101	9.73	AVG	10.04	19.77	46.00	-26.23



Test Report	16071212-FCC-R2
Page	41 of 59

Test Mode:

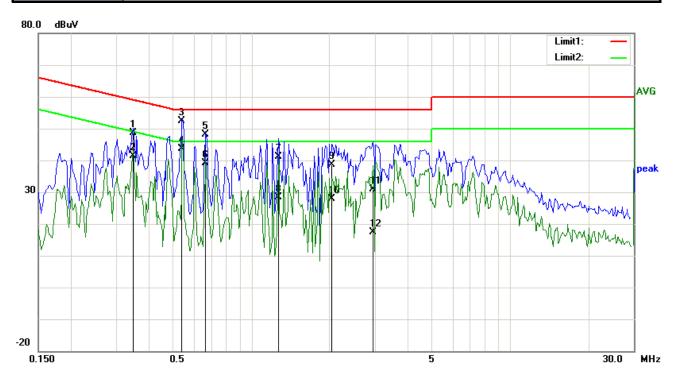

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.3489	38.62	QP	10.02	48.64	58.99	-10.35
2	N	0.3489	31.31	AVG	10.02	41.33	48.99	-7.66
3	N	0.5400	42.25	QP	10.02	52.27	56.00	-3.73
4	N	0.5400	33.58	AVG	10.02	43.60	46.00	-2.40
5	N	0.6648	38.03	QP	10.02	48.05	56.00	-7.95
6	N	0.6648	29.01	AVG	10.02	39.03	46.00	-6.97
7	N	1.2732	31.06	QP	10.03	41.09	56.00	-14.91
8	N	1.2732	18.30	AVG	10.03	28.33	46.00	-17.67
9	N	2.0532	28.67	QP	10.04	38.71	56.00	-17.29
10	N	2.0532	17.80	AVG	10.04	27.84	46.00	-18.16
11	N	2.9580	20.72	QP	10.05	30.77	56.00	-25.23
12	N	2.9580	7.40	AVG	10.05	17.45	46.00	-28.55



Test Report	16071212-FCC-R2
Page	42 of 59

6.9 Radiated Emissions

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	December 29, 2015
Tested By :	Winnie Zhang

Requirement(s):

Requirement(s)) .			7						
Spec	Item	Requirement								
47CFR§15. 205, §15.209, §15.247(d)	a)	Except higher limit as specified else emissions from the low-power radio exceed the field strength levels specified the level of any unwanted emissions the fundamental emission. The tight edges Frequency range (MHz) 30 – 88 88 – 216 216 960 Above 960	\\							
Test Setup	Above 960 Ant. Tower Variable Support Units Ground Plane Test Receiver									
Procedure	 The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. 									



Test Report	16071212-FCC-R2
Page	43 of 59


		b.	The EUT was then rotated to the direction that gave the maximum
			emission.
		C.	Finally, the antenna height was adjusted to the height that gave the
			maximum emission.
	3.	The res	solution bandwidth and video bandwidth of test receiver/spectrum analyzer is
		120 kH	z for Quasiy Peak detection at frequency below 1GHz.
	4.	The res	olution bandwidth of test receiver/spectrum analyzer is 1MHz and video
		bandwi	dth is 3MHz with Peak detection for Peak measurement at frequency above
		1GHz.	
		The res	solution bandwidth of test receiver/spectrum analyzer is 1MHz and the video
		bandwi	dth is 10Hz with Peak detection for Average Measurement as below at
		frequer	ncy above 1GHz.
	5.	Steps	2 and 3 were repeated for the next frequency point, until all selected
		freque	ncy points were measured.
Remark			
			F
Result	☑ Pa	ass	└─ Fail
	7		
Test Data	Yes		III N/A
Test Plot	Yes (S	See belo	w) N/A
	(-		<i>'</i>



Test Report	16071212-FCC-R2
Page	44 of 59

Test Mode: Bluetooth Mode

Below 1GHz

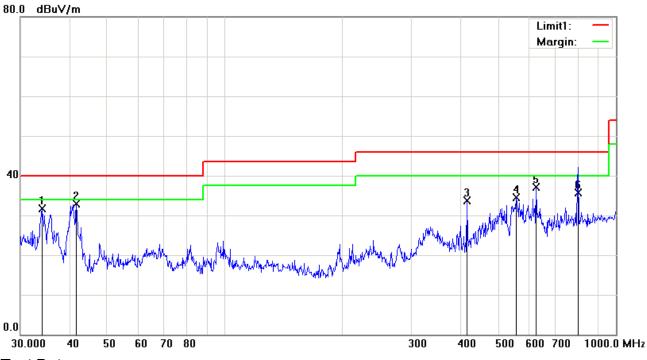

Test Data


Horizontal Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	Н	34.0365	34.92	peak	-3.24	31.68	40.00	-8.32	100	206
2	Н	41.7130	41.59	peak	-8.73	32.86	40.00	-7.14	100	0
3	Н	416.1791	37.63	peak	-3.91	33.72	46.00	-12.28	100	202
4	Н	556.7744	35.31	peak	-0.71	34.60	46.00	-11.40	100	209
5	Н	625.0780	36.76	peak	0.42	37.18	46.00	-8.82	100	0
6	Н	798.6867	32.46	QP	3.19	35.65	46.00	-10.35	100	6



Test Report	16071212-FCC-R2
Page	45 of 59

Below 1GHz

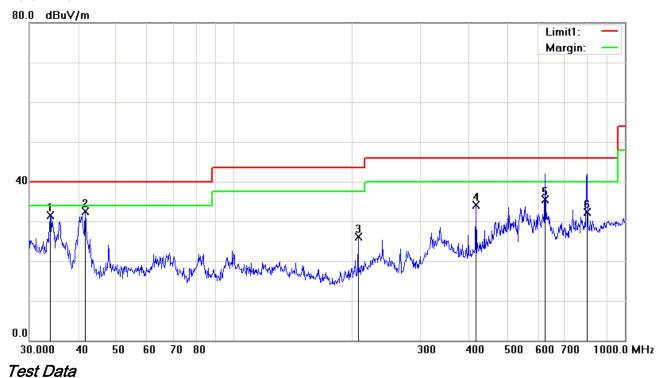

Vertical Polarity Plot @3m

No.	P/L	Frequency	Readin g	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/ m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	V	33.9174	34.65	peak	-3.15	31.50	40.00	-8.50	100	192
2	٧	41.7130	41.21	peak	-8.73	32.48	40.00	-7.52	100	162
3	٧	207.8501	34.84	peak	-8.81	26.03	43.50	-17.47	100	162
4	٧	416.1791	38.10	peak	-3.91	34.19	46.00	-11.81	100	23
5	V	624.0890	35.11	QP	0.39	35.50	46.00	-10.50	100	338
6	V	799.6670	29.11	QP	3.21	32.32	46.00	-13.68	100	348



Test Report	16071212-FCC-R2
Page	46 of 59

Above 1GHz

Test Mode: Transmitting Mode

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	38.75	AV	V	33.83	6.86	31.72	47.72	54	-6.28
4804	38.58	AV	Н	33.83	6.86	31.72	47.55	54	-6.45
4804	46.66	PK	V	33.83	6.86	31.72	55.63	74	-18.37
4804	46.51	PK	Н	33.83	6.86	31.72	55.48	74	-18.52

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	38.69	AV	V	33.86	6.82	31.82	47.55	54	-6.45
4882	38.52	AV	Н	33.86	6.82	31.82	47.38	54	-6.62
4882	46.57	PK	٧	33.86	6.82	31.82	55.43	74	-18.57
4882	46.43	PK	Н	33.86	6.82	31.82	55.29	74	-18.71

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4960	38.68	AV	V	33.9	6.76	31.92	47.42	54	-6.58
4960	38.55	AV	Η	33.9	6.76	31.92	47.29	54	-6.71
4960	46.74	PK	٧	33.9	6.76	31.92	55.48	74	-18.52
4960	46.62	PK	Н	33.9	6.76	31.92	55.36	74	-18.64

Note:

- 1, The testing has been conformed to 10*2480MHz=24,800MHz
- 2, All other emissions more than 30 dB below the limit



Test Report	16071212-FCC-R2
Page	47 of 59


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	•
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	~
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	~
LISN	ISN T800	34373	09/25/2015	09/24/2016	~
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	•
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	✓
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	•
Power Splitter	1#	1#	09/01/2015	08/31/2016	~
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	~
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	•
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	V
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	•
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	\
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	\
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<u>S</u>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/23/2016	V



Test Report	16071212-FCC-R2
Page	48 of 59

Annex B. EUT And Test Setup Photographs

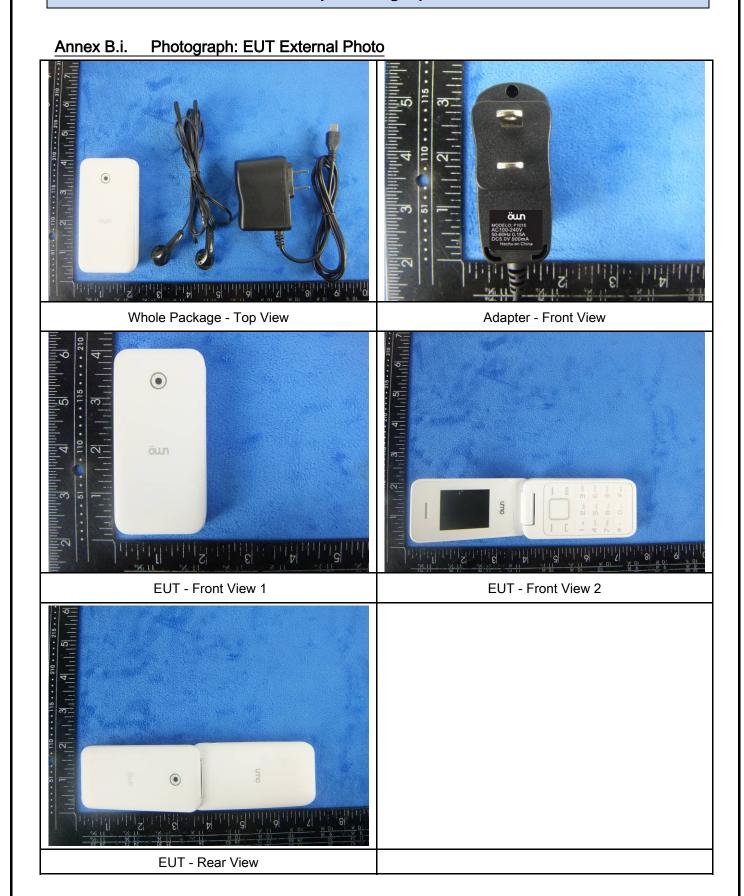



Test Report	16071212-FCC-R2
Page	49 of 59



EUT - Top View

EUT - Bottom View



EUT - Left View



EUT - Right View



Test Report	16071212-FCC-R2
Page	50 of 59

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1

Cover Off - Top View 2






Battery - Front View

Battery - Rear View




Mainbard with Shielding - Front View



Mainbard with Shielding - Rear View




Test Report	16071212-FCC-R2
Page	51 of 59




A325-KB-V0.2(F62) © B L

Mainboard without shielding - Front View


Small Mainbard - Front View





Small Mainbard - Rear View

LCD - Front View






LCD - Rear View

GSM/PCS - Antenna View



Test Report	16071212-FCC-R2
Page	52 of 59

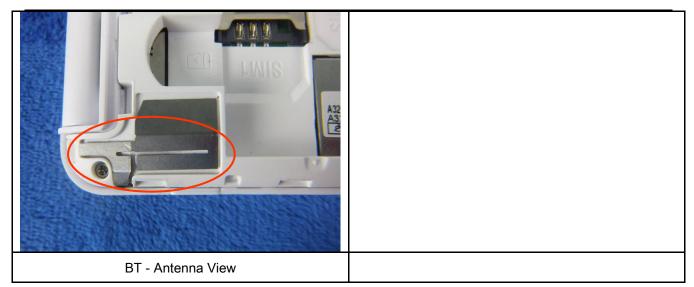




Test Report	16071212-FCC-R2
Page	53 of 59


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz



Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	16071212-FCC-R2
Page	54 of 59

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

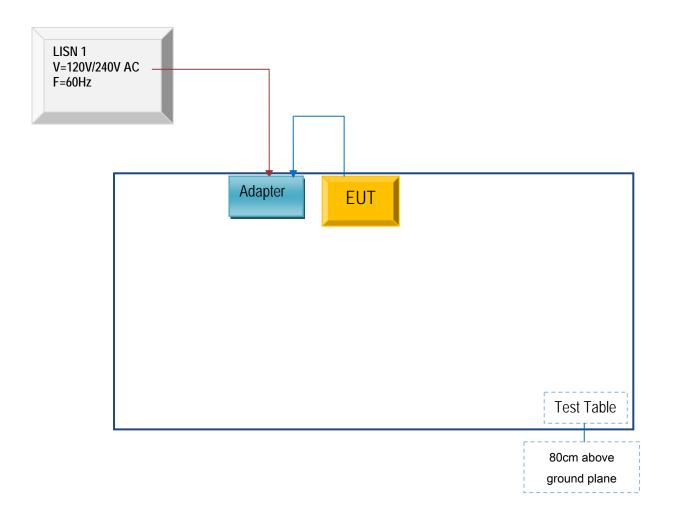



Test Report	16071212-FCC-R2
Page	55 of 59


Block Configuration Diagram for Radiated Emissions (Below 1GHz).

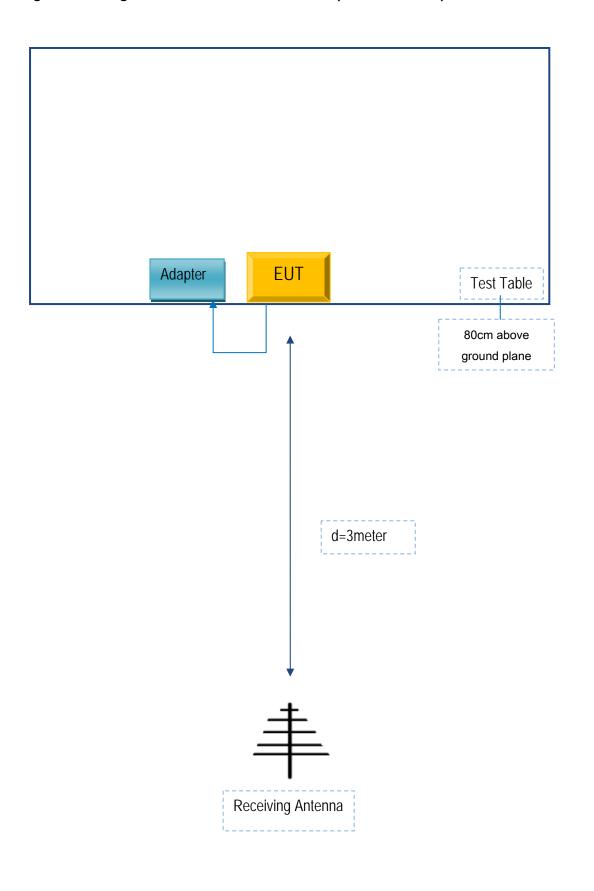



Test Report	16071212-FCC-R2
Page	56 of 59

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

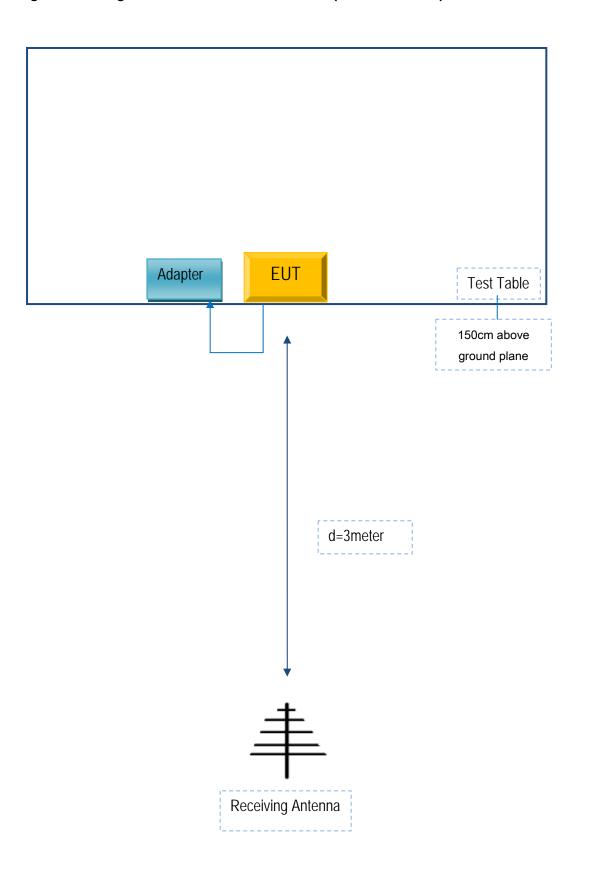



Test Report	16071212-FCC-R2
Page	57 of 59

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Serial No
NEG TECHNOLOGY CO.,LIMITED	Adapter	F1015	C0705



Test Report	16071212-FCC-R2
Page	58 of 59

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment



Test Report	16071212-FCC-R2
Page	59 of 59

Annex E. DECLARATION OF SIMILARITY

N/A