

TEST REPORT

Reference No..... : WTX22X03052237W
FCC ID : 2AAZN-INSTADOSE
Applicant : Mirion Technologies, Inc.
Address..... : 3000 Executive Parkway Suite 222, San Ramon, CA 94583
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : Instadose+
Model No..... : v1.2
Standards : FCC Part 15.247
Date of Receipt sample : 2022-03-26
Date of Test..... : 2022-03-26 to 2022-04-08
Date of Issue : 2022-04-08
Test Report Form No. : WTX_Part 15_247W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.


Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS	25
9. CONDUCTED EMISSIONS	30
9.1 TEST PROCEDURE	30
9.2 BASIC TEST SETUP BLOCK DIAGRAM	30
9.3 TEST RECEIVER SETUP	30
9.4 SUMMARY OF TEST RESULTS/PLOTS	30
APPENDIX SUMMARY	31
APPENDIX A	32
APPENDIX B	35
APPENDIX C	38
APPENDIX D	40
APPENDIX PHOTOGRAPHS	45

Report version

Version No.	Date of issue	Description
Rev.00	2022-04-08	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Instadose+
Trade Name	/
Model No.:	v1.2
Adding Model(s):	/
Rated Voltage:	Battery:DC3V
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0(BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps: 3.856dBm (Conducted) 2Mbps: 3.851dBm (Conducted)
Data Rate:	1Mbps, 2Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	2dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Texas Instrument testing board	Texas Instrument	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction	PAP-2640	14145-1415	2021-04-27	2022-04-26

		Systems Inc.		3		
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has a PCB antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

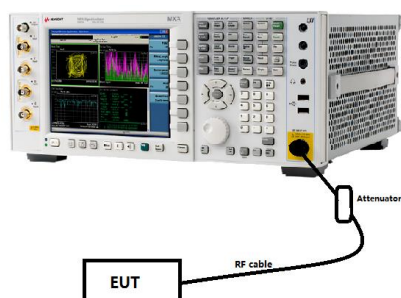

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

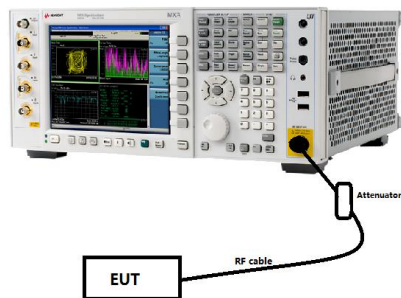

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

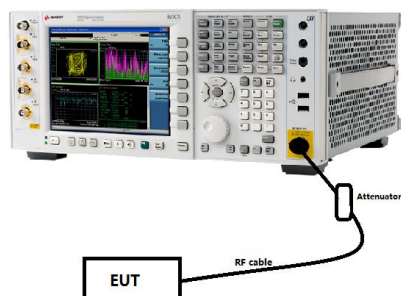

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the $RBW \geq$ DTS bandwidth.
- Set $VBW \geq 3 \times RBW$.
- Set $span \geq 3 \times RBW$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

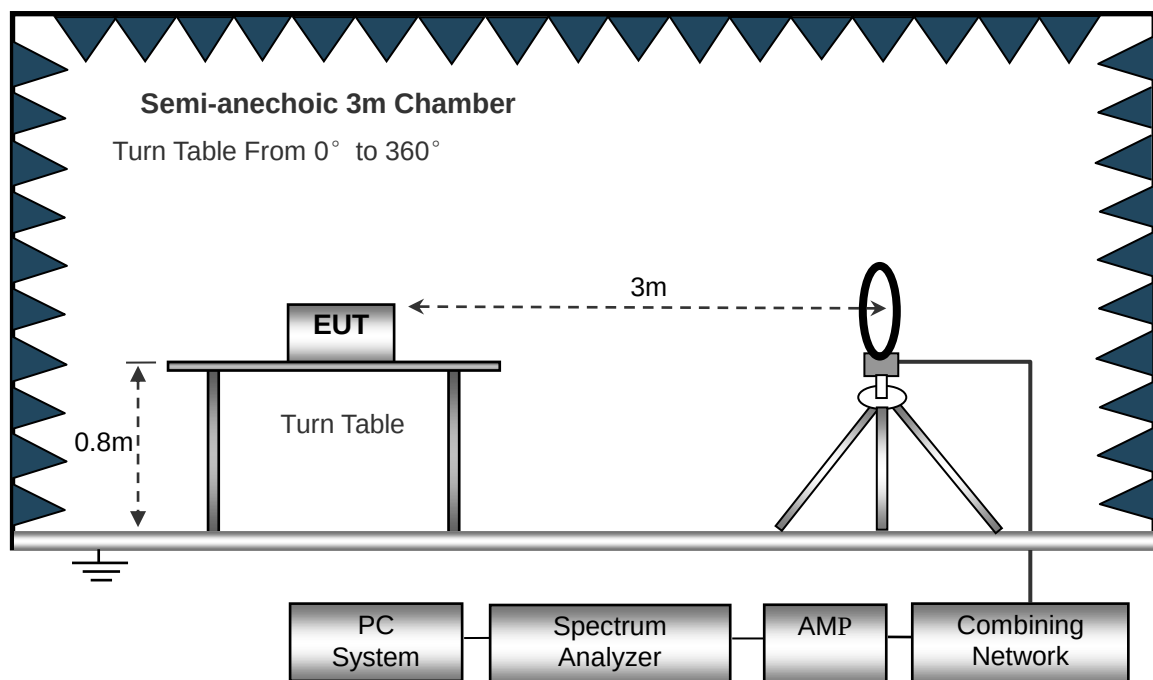

The test setup for emission measurement from 30MHz to 1GHz.

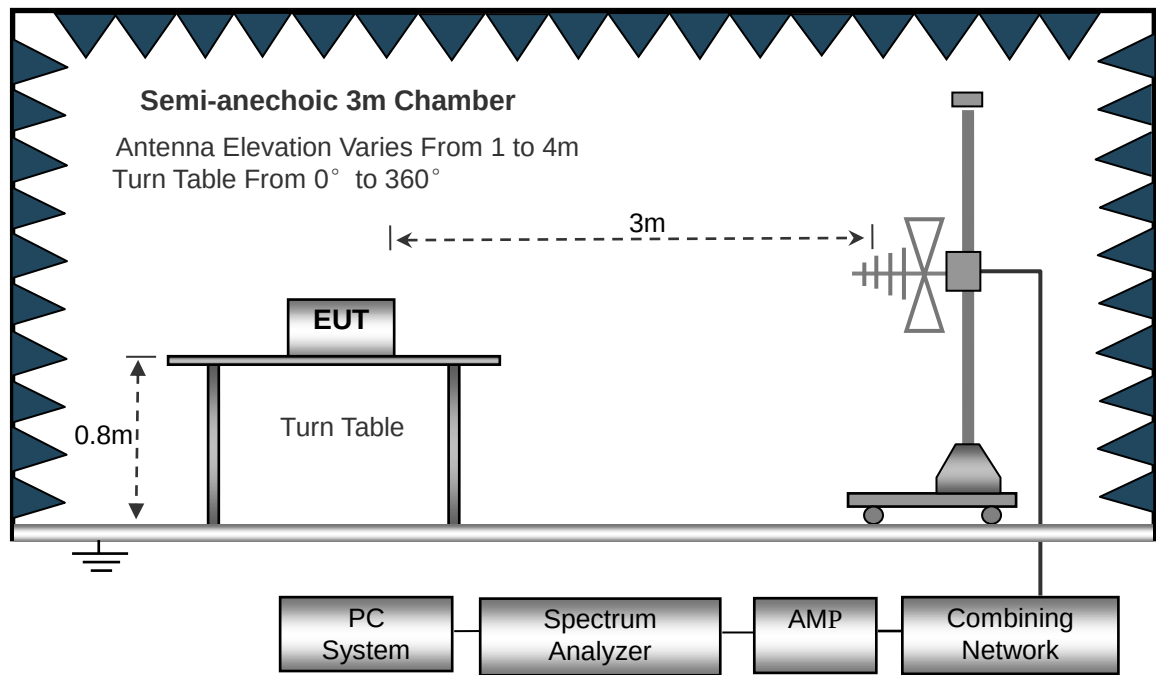

The test setup for emission measurement above 1GHz.

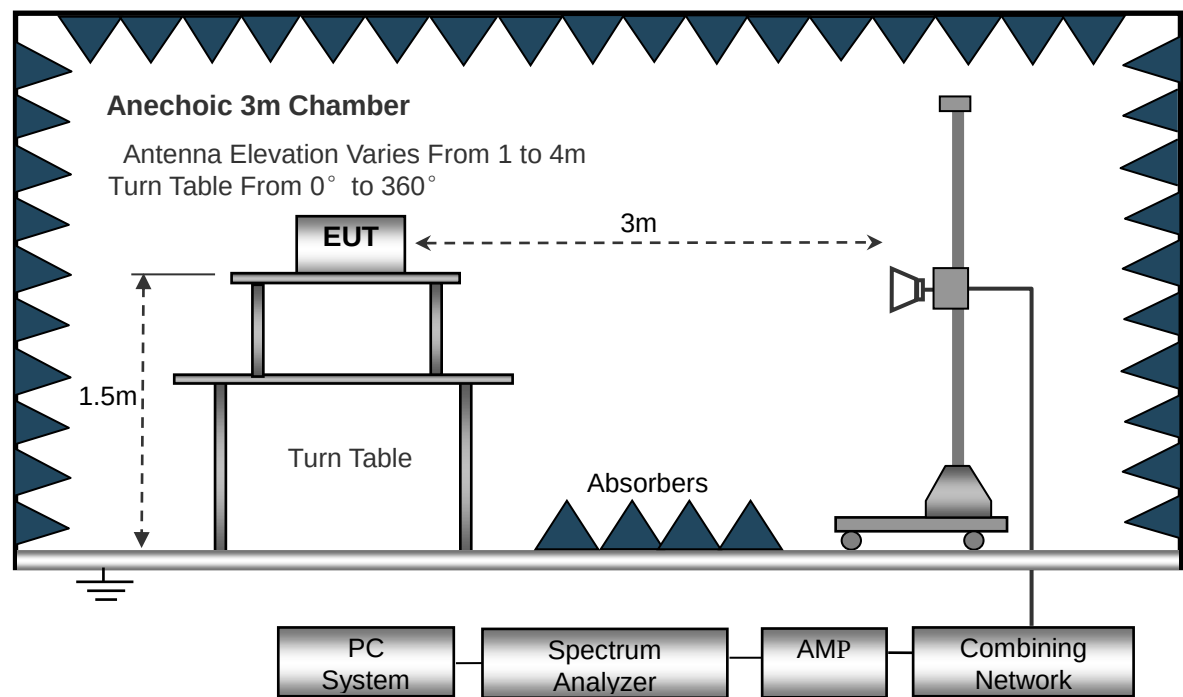

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

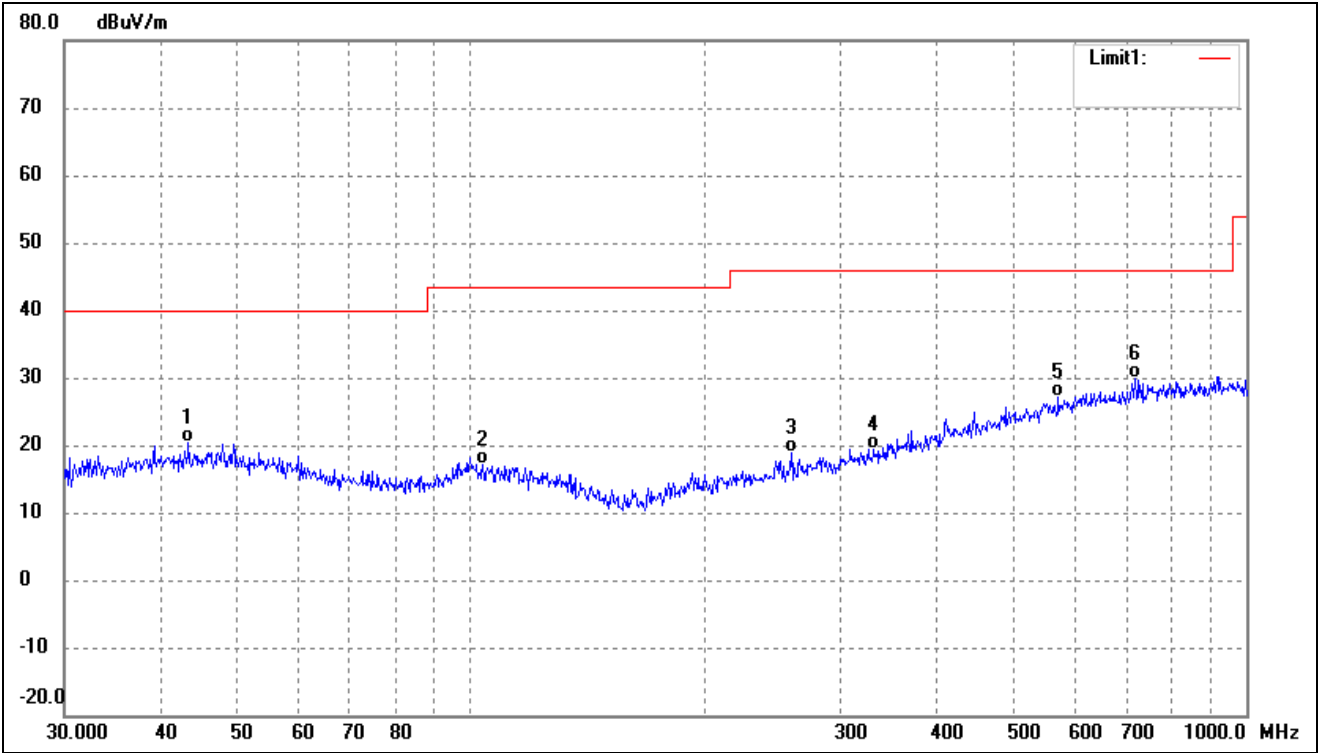

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	43.3534	27.30	-6.98	20.32	40.00	-19.68	-	-	QP
2	103.8055	25.87	-8.79	17.08	43.50	-26.42	-	-	QP
3	259.2338	26.90	-8.06	18.84	46.00	-27.16	-	-	QP
4	331.3547	25.29	-5.98	19.31	46.00	-26.69	-	-	QP
5	572.6144	27.16	-0.09	27.07	46.00	-18.93	-	-	QP
6	719.1995	28.24	1.55	29.79	46.00	-16.21	-	-	QP


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

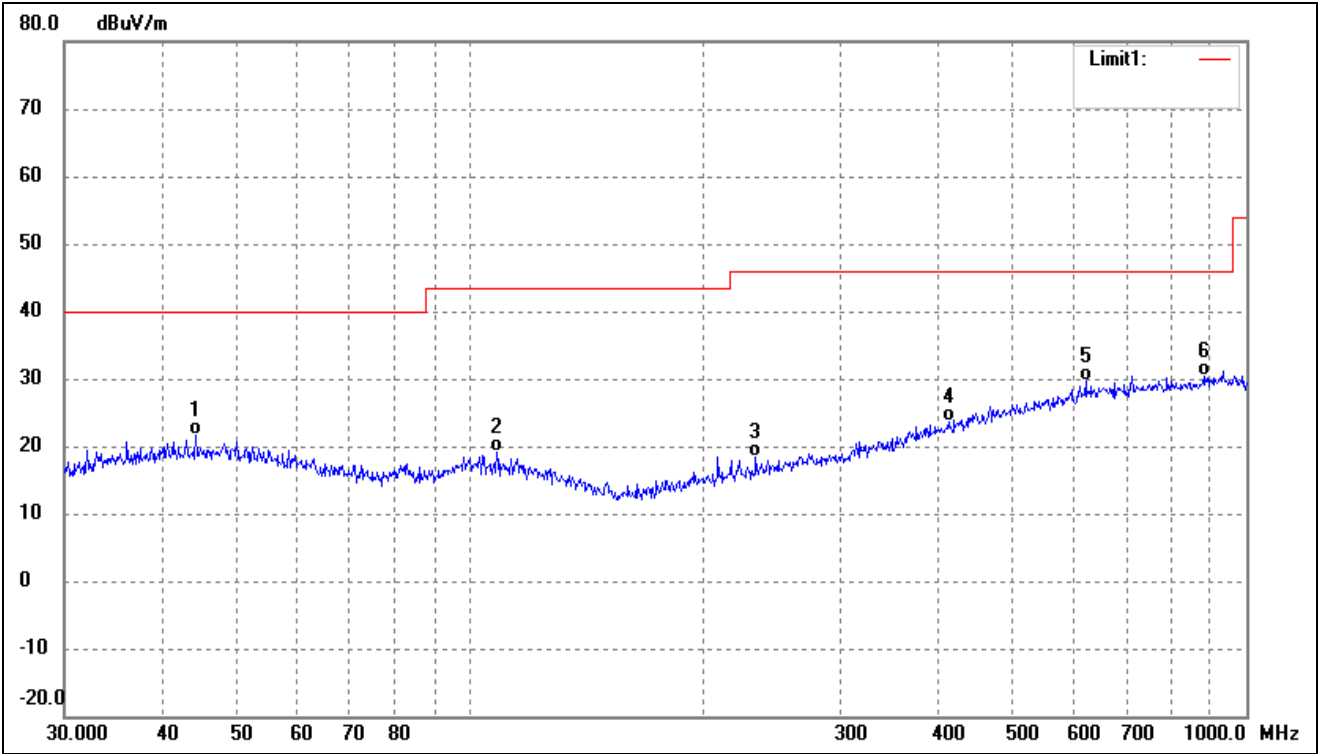

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.2752	28.52	-6.98	21.54	40.00	-18.46	-	-	QP
2	108.2667	27.88	-8.85	19.03	43.50	-24.47	-	-	QP
3	233.3487	27.11	-8.78	18.33	46.00	-27.67	-	-	QP
4	413.2706	27.07	-3.54	23.53	46.00	-22.47	-	-	QP
5	620.7096	29.09	0.60	29.69	46.00	-16.31	-	-	QP
6	881.4067	27.86	2.62	30.48	46.00	-15.52	-	-	QP


➤ 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

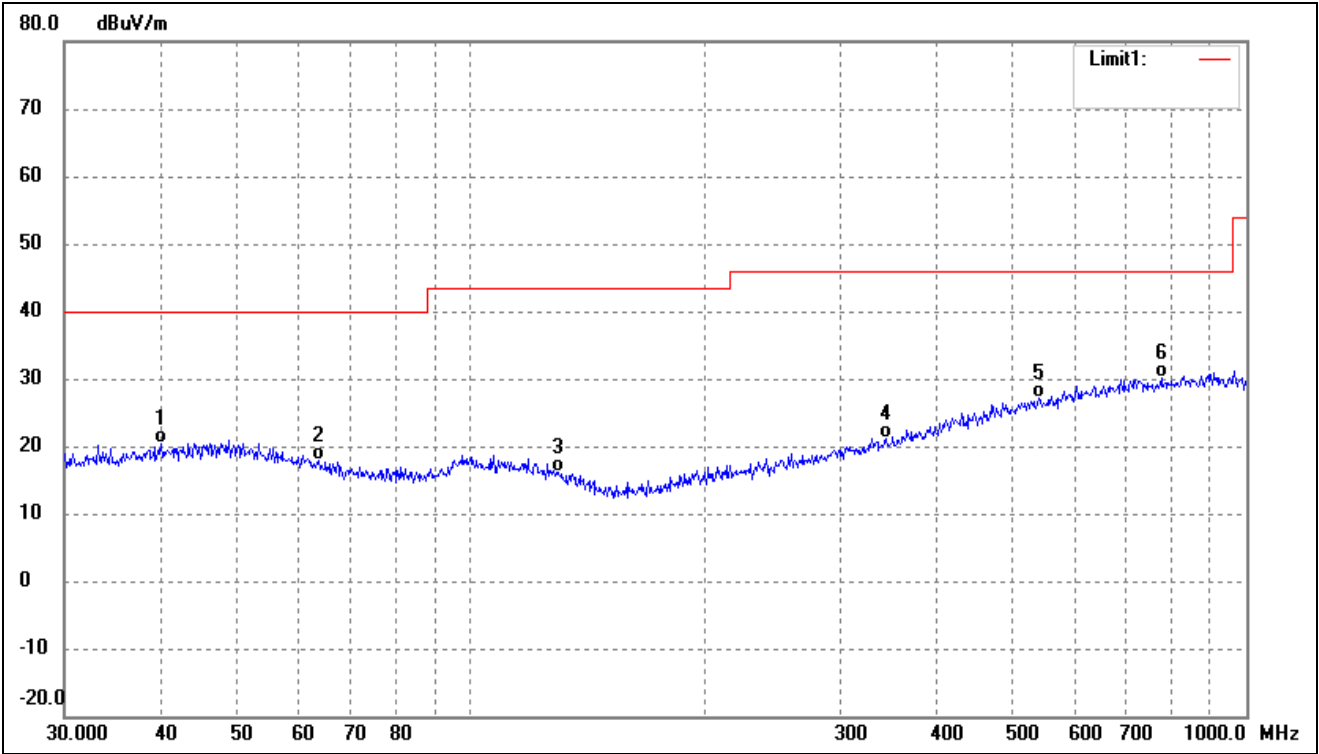

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	39.9942	27.28	-7.00	20.28	40.00	-19.72	-	-	QP
2	63.7588	26.94	-9.08	17.86	40.00	-22.14	-	-	QP
3	129.9226	27.53	-11.42	16.11	43.50	-27.39	-	-	QP
4	343.1800	26.85	-5.62	21.23	46.00	-24.77	-	-	QP
5	539.4775	27.70	-0.65	27.05	46.00	-18.95	-	-	QP
6	776.8778	28.18	1.94	30.12	46.00	-15.88	-	-	QP

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

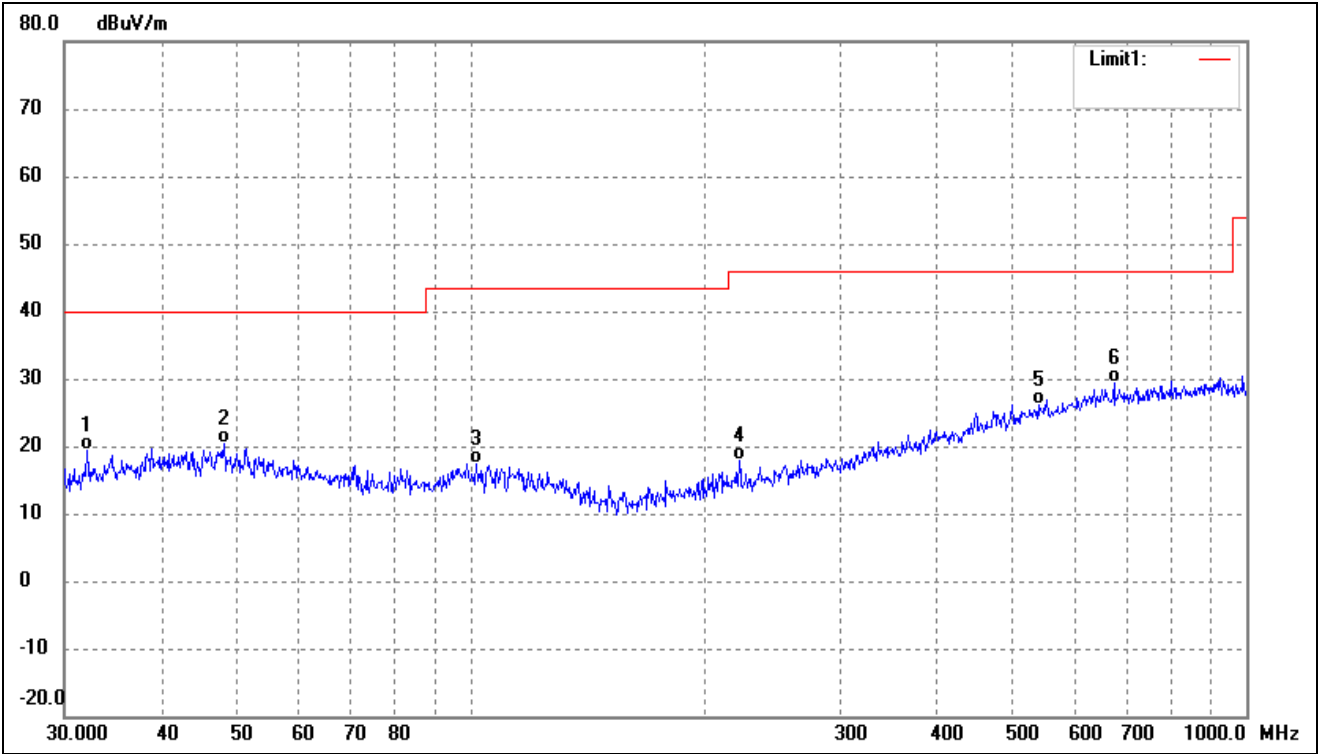

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.0668	28.28	-8.95	19.33	40.00	-20.67	-	-	QP
2	48.1626	27.46	-6.97	20.49	40.00	-19.51	-	-	QP
3	102.0014	26.21	-8.76	17.45	43.50	-26.05	-	-	QP
4	222.1698	27.02	-9.10	17.92	46.00	-28.08	-	-	QP
5	539.4775	26.83	-0.65	26.18	46.00	-19.82	-	-	QP
6	675.2080	28.10	1.18	29.28	46.00	-16.72	-	-	QP

Remark: ‘-’ Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	54.73	-3.59	51.14	74	-22.86	H	PK
4804	50.78	-3.59	47.19	54	-6.81	H	AV
7206	54.18	-0.52	53.66	74	-20.34	H	PK
7206	44.89	-0.52	44.37	54	-9.63	H	AV
4804	54.12	-3.59	50.53	74	-23.47	V	PK
4804	49.56	-3.59	45.97	54	-8.03	V	AV
7206	45.67	-0.52	45.15	74	-28.85	V	PK
7206	43.40	-0.52	42.88	54	-11.12	V	AV
Middle Channel-2440MHz							
4880	52.57	-3.49	49.08	74	-24.92	H	PK
4880	48.99	-3.49	45.50	54	-8.50	H	AV
7320	55.95	-0.47	55.48	74	-18.52	H	PK
7320	44.38	-0.47	43.91	54	-10.09	H	AV
4880	55.66	-3.49	52.17	74	-21.83	V	PK
4880	48.28	-3.49	44.79	54	-9.21	V	AV
7320	46.56	-0.47	46.09	74	-27.91	V	PK
7320	42.83	-0.47	42.36	54	-11.64	V	AV
High Channel-2480MHz							
4960	53.05	-3.41	49.64	74	-24.36	H	PK
4960	49.64	-3.41	46.23	54	-7.77	H	AV
7440	55.64	-0.42	55.22	74	-18.78	H	PK
7440	45.37	-0.42	44.95	54	-9.05	H	AV
4960	53.82	-3.41	50.41	74	-23.59	V	PK
4960	47.34	-3.41	43.93	54	-10.07	V	AV
7440	45.24	-0.42	44.82	74	-29.18	V	PK
7440	43.16	-0.42	42.74	54	-11.26	V	AV

➤ 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	52.50	-3.59	48.91	74	-25.09	H	PK
4804	49.74	-3.59	46.15	54	-7.85	H	AV
7206	55.13	-0.52	54.61	74	-19.39	H	PK
7206	45.43	-0.52	44.91	54	-9.09	H	AV
4804	55.65	-3.59	52.06	74	-21.94	V	PK
4804	48.12	-3.59	44.53	54	-9.47	V	AV
7206	46.21	-0.52	45.69	74	-28.31	V	PK
7206	43.84	-0.52	43.32	54	-10.68	V	AV
Middle Channel-2440MHz							
4880	54.69	-3.49	51.20	74	-22.80	H	PK
4880	48.06	-3.49	44.57	54	-9.43	H	AV
7320	54.64	-0.47	54.17	74	-19.83	H	PK
7320	45.63	-0.47	45.16	54	-8.84	H	AV
4880	55.14	-3.49	51.65	74	-22.35	V	PK
4880	45.66	-3.49	42.17	54	-11.83	V	AV
7320	46.07	-0.47	45.60	74	-28.40	V	PK
7320	43.12	-0.47	42.65	54	-11.35	V	AV
High Channel-2480MHz							
4960	54.04	-3.41	50.63	74	-23.37	H	PK
4960	49.49	-3.41	46.08	54	-7.92	H	AV
7440	54.40	-0.42	53.98	74	-20.02	H	PK
7440	45.56	-0.42	45.14	54	-8.86	H	AV
4960	53.35	-3.41	49.94	74	-24.06	V	PK
4960	47.46	-3.41	44.05	54	-9.95	V	AV
7440	45.33	-0.42	44.91	74	-29.09	V	PK
7440	43.40	-0.42	42.98	54	-11.02	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

➤ Radiated test


1Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

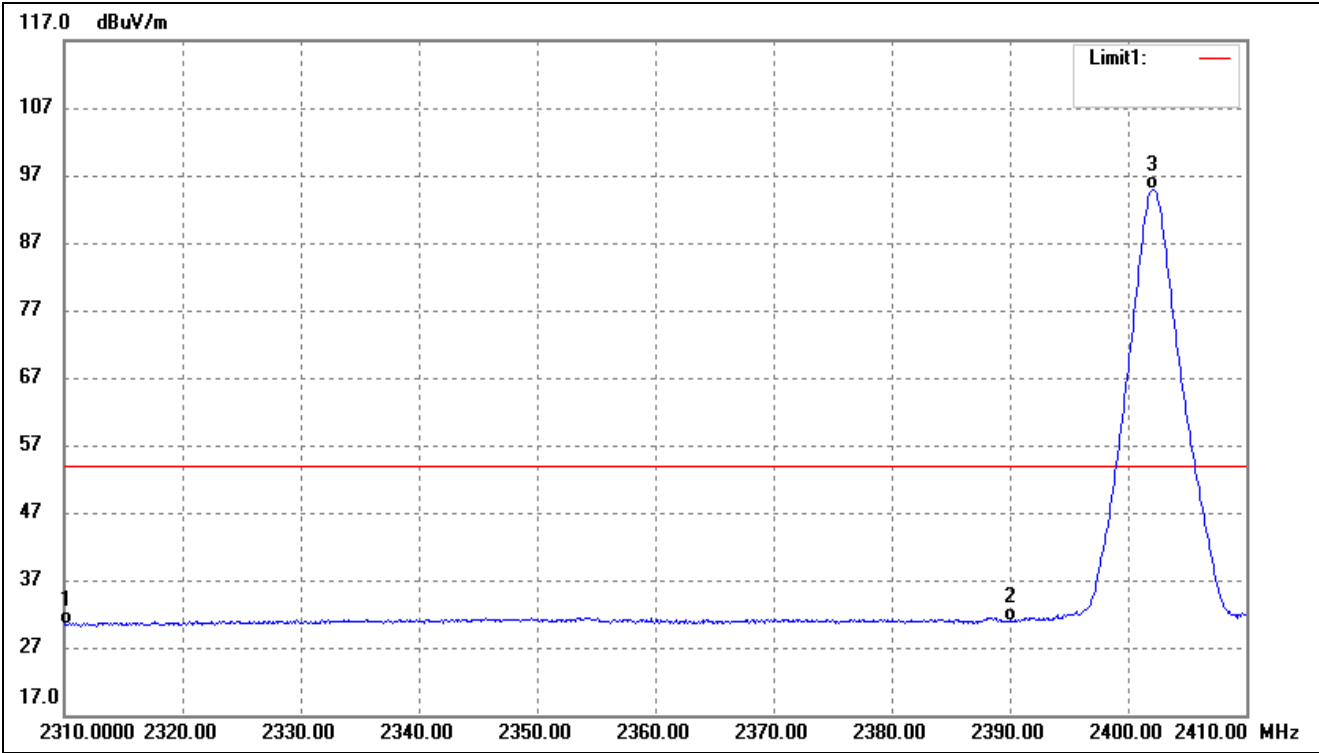

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.13	-10.82	30.31	54.00	-23.69	Average Detector
	2310.000	53.45	-10.82	42.63	74.00	-31.37	Peak Detector
2	2390.000	41.66	-10.70	30.96	54.00	-23.04	Average Detector
	2390.000	54.16	-10.70	43.46	74.00	-30.54	Peak Detector
3	2402.100	105.62	-10.69	94.93	/	/	Average Detector
	2401.900	106.25	-10.69	95.56	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

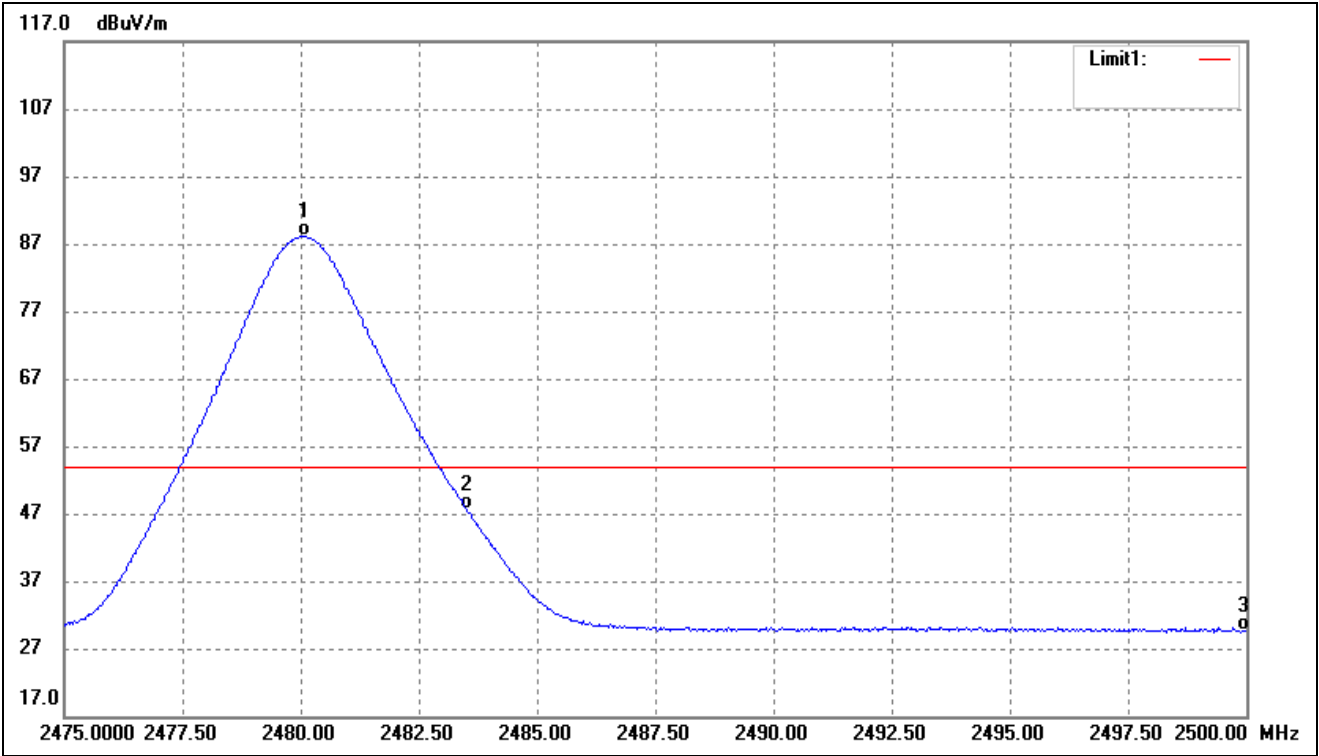

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.075	98.68	-10.58	88.10	/	/	Average Detector
	2480.300	99.85	-10.58	89.27	/	/	Peak Detector
2	2483.500	58.27	-10.58	47.69	54.00	-6.31	Average Detector
	2483.500	63.31	-10.58	52.73	74.00	-21.27	Peak Detector
3	2500.000	40.18	-10.55	29.63	54.00	-24.37	Average Detector
	2500.000	52.91	-10.55	42.36	74.00	-31.64	Peak Detector


2Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

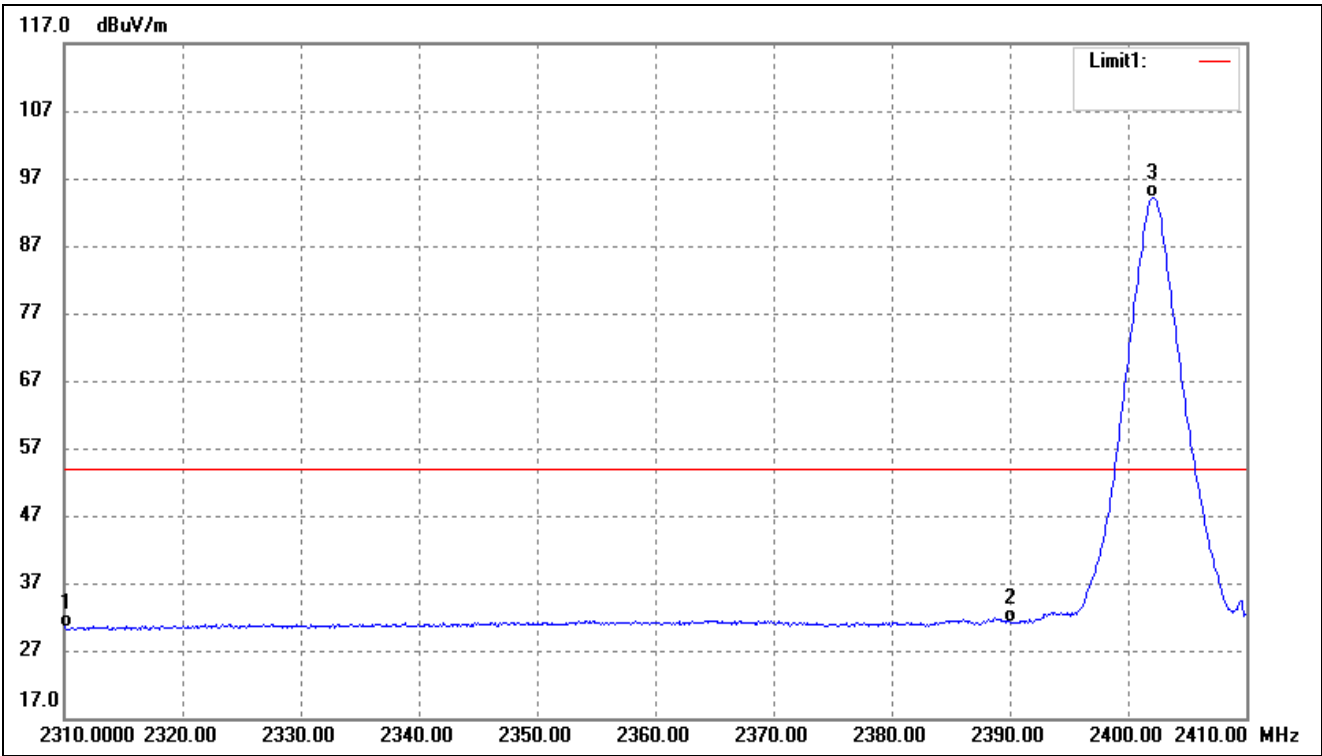

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.32	-10.82	30.50	54.00	-23.50	Average Detector
	2310.000	53.20	-10.82	42.38	74.00	-31.62	Peak Detector
2	2390.000	41.88	-10.70	31.18	54.00	-22.82	Average Detector
	2390.000	53.91	-10.70	43.21	74.00	-30.79	Peak Detector
3	2402.100	104.78	-10.69	94.09	/	/	Average Detector
	2401.600	106.71	-10.69	96.02	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

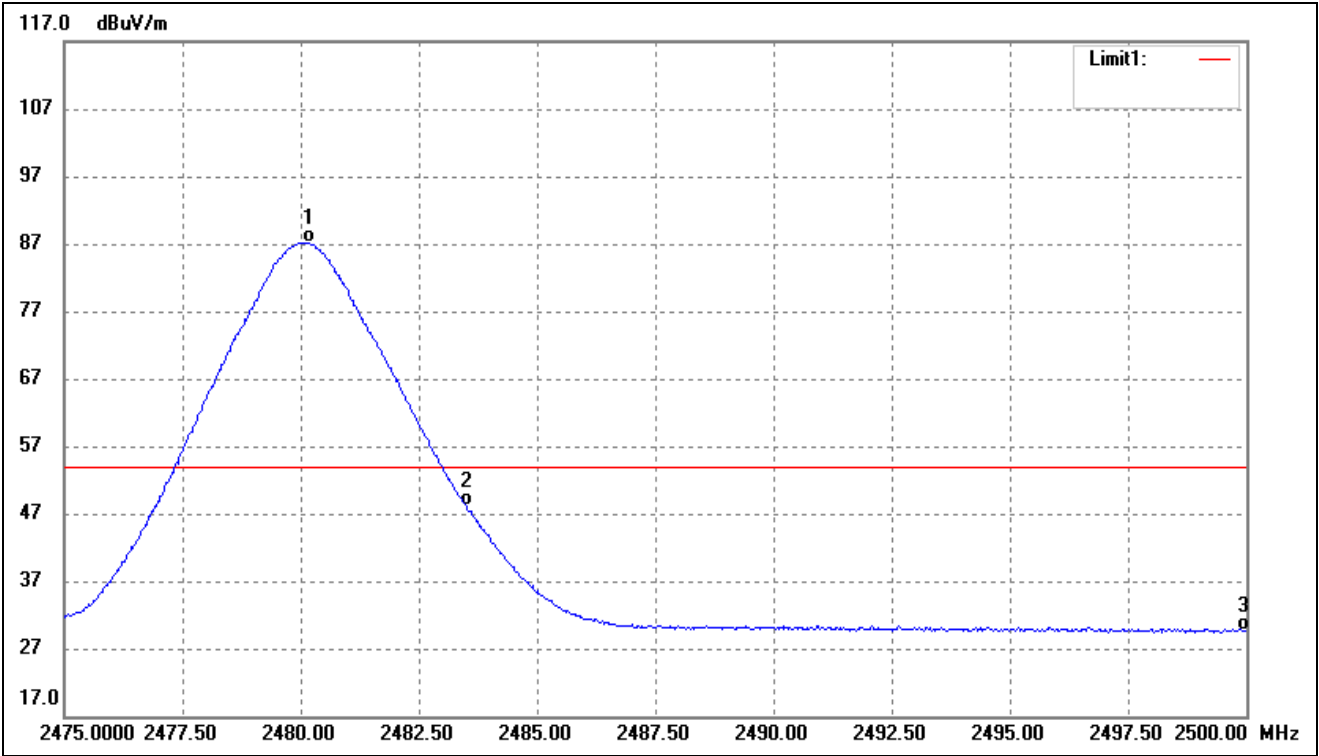

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.175	97.77	-10.58	87.19	/	/	Average Detector
	2480.550	99.48	-10.58	88.90	/	/	Peak Detector
2	2483.500	58.62	-10.58	48.04	54.00	-5.96	Average Detector
	2483.500	66.05	-10.58	55.47	74.00	-18.53	Peak Detector
3	2500.000	40.26	-10.55	29.71	54.00	-24.29	Average Detector
	2500.000	51.81	-10.55	41.26	74.00	-32.74	Peak Detector

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

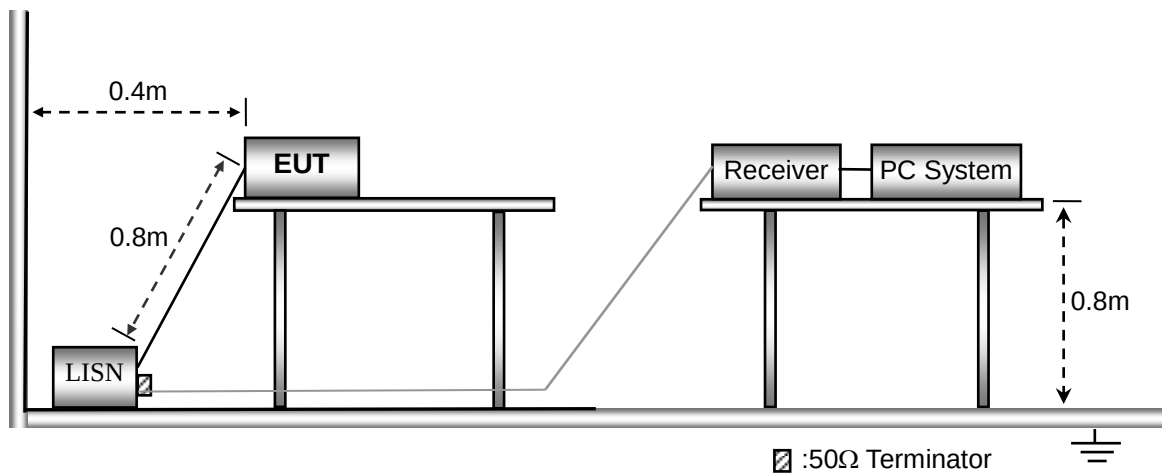

9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots

Not applicable




APPENDIX SUMMARY



Project No.	WTX22X03052237W	Test Engineer	BAIdi
Start date	2022/4/7	Finish date	2022/4/7
Temperature	24℃	Humidity	45%
RF specifications	BT-BLE		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A



Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE(1Mbps)	Low	-5.930	8
	Middle	-5.662	8
	High	-6.902	8
BLE(2Mbps)	Low	-11.445	8
	Middle	-11.159	8
	High	-9.989	8

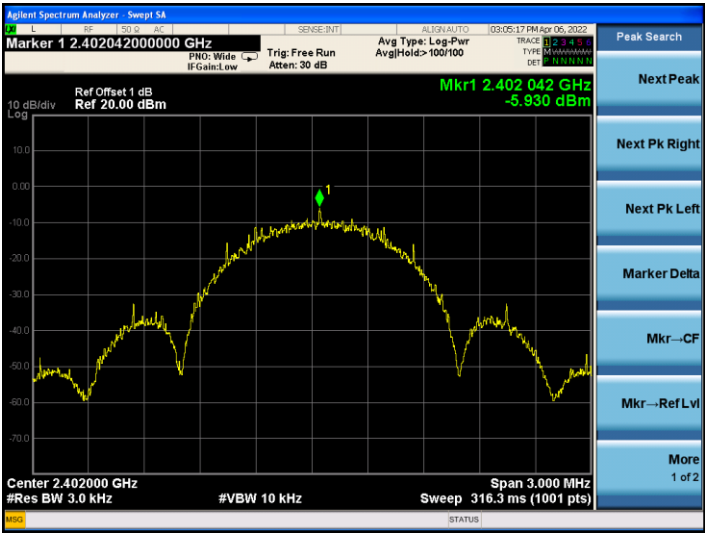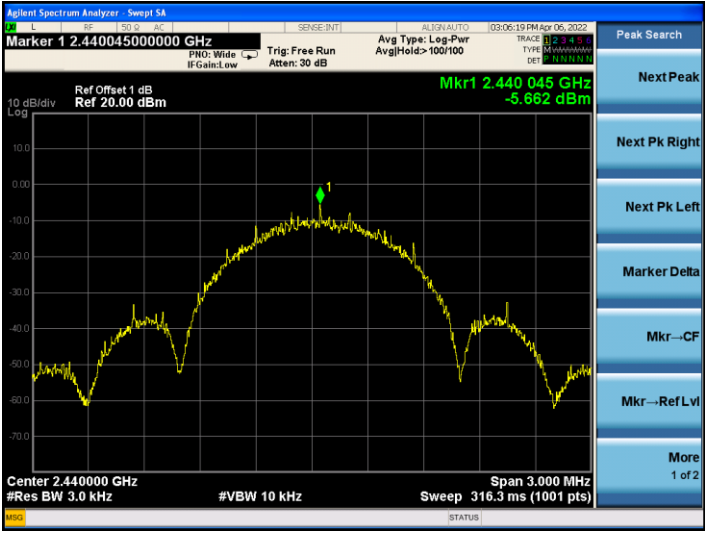
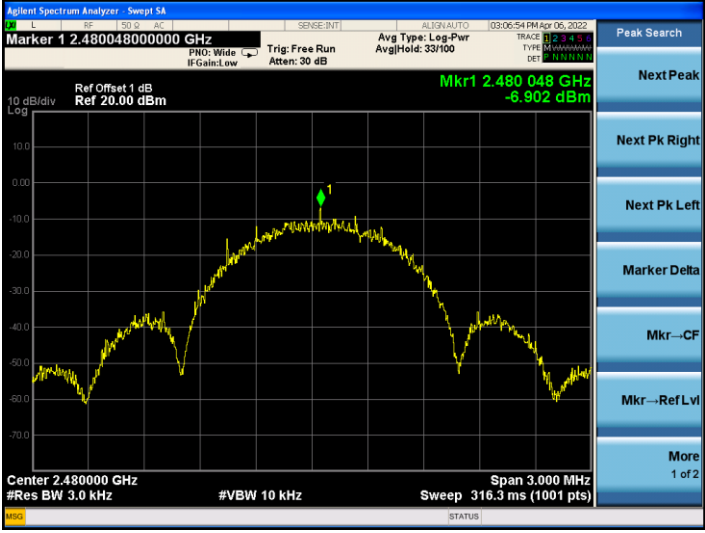
BLE(1Mbps)	
Low	
Middle	
High	

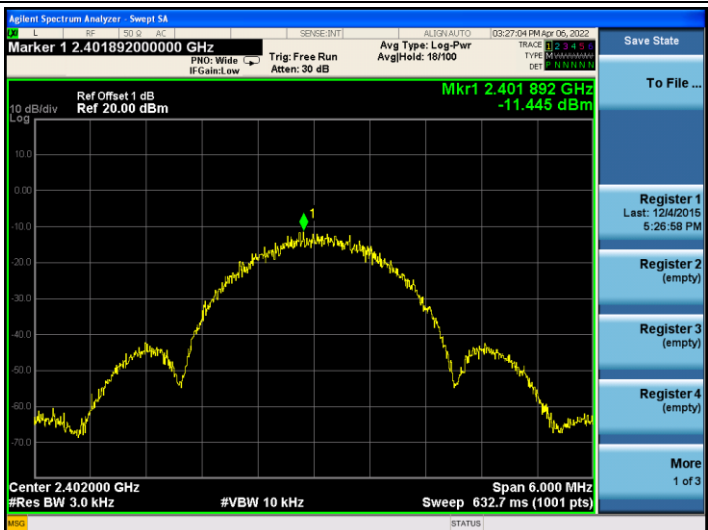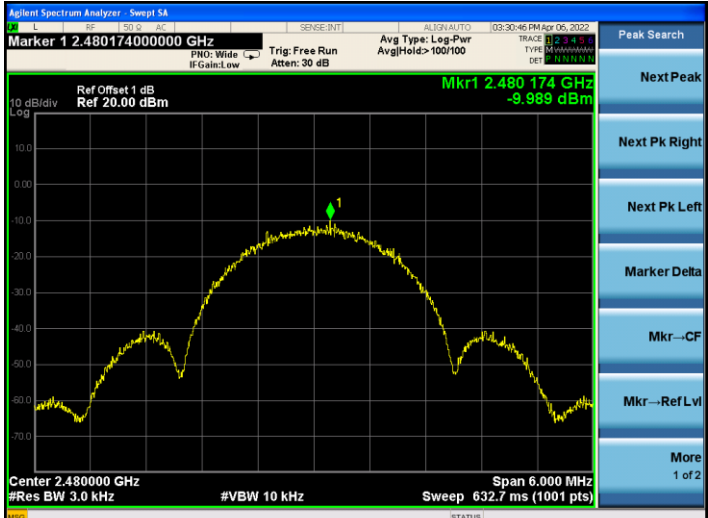BLE(2Mbps) Low	 Agilent Spectrum Analyzer - Sweep SA Marker 1 2.401892000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.401 892 GHz -11.445 dBm Center 2.402000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 6.000 MHz Sweep 632.7 ms (1001 pts) Save State To File ... Register 1 Last: 12/4/2015 5:26:58 PM Register 2 (empty) Register 3 (empty) Register 4 (empty) More 1 of 3
Middle	 Agilent Spectrum Analyzer - Sweep SA Marker 1 2.440228000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.440 228 GHz -11.159 dBm Center 2.440000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 6.000 MHz Sweep 632.7 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2
High	 Agilent Spectrum Analyzer - Sweep SA Marker 1 2.480174000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.480 174 GHz -9.989 dBm Center 2.480000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 6.000 MHz Sweep 632.7 ms (1001 pts) Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2

APPENDIX B




DTS Bandwidth			
Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE(1Mbps)	Low	695.3	≥500
	Middle	705.7	≥500
	High	719.6	≥500
BLE(2Mbps)	Low	1453	≥500
	Middle	1429	≥500
	High	1403	≥500

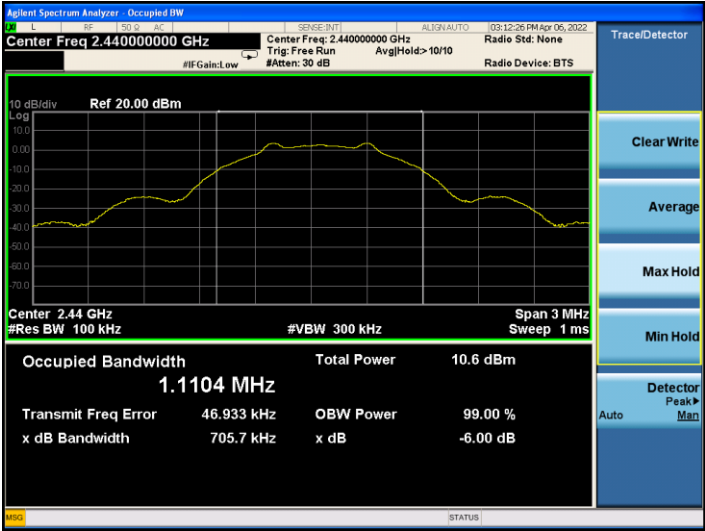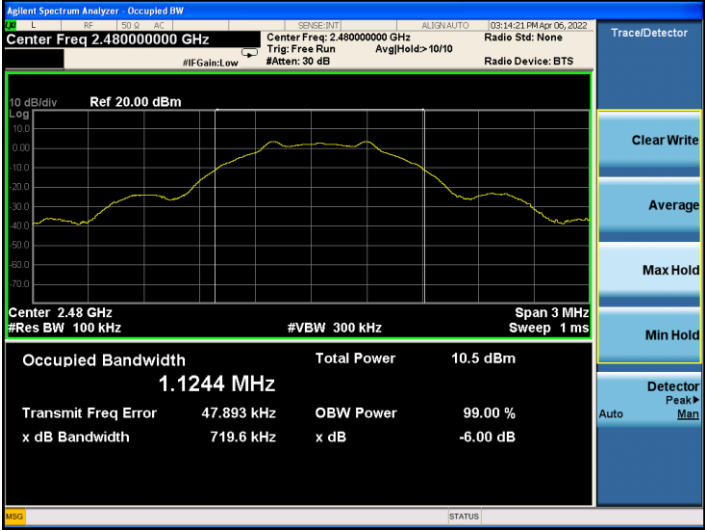
DTS Bandwidth: BLE(1Mbps)	
Low	
Middle	
High	

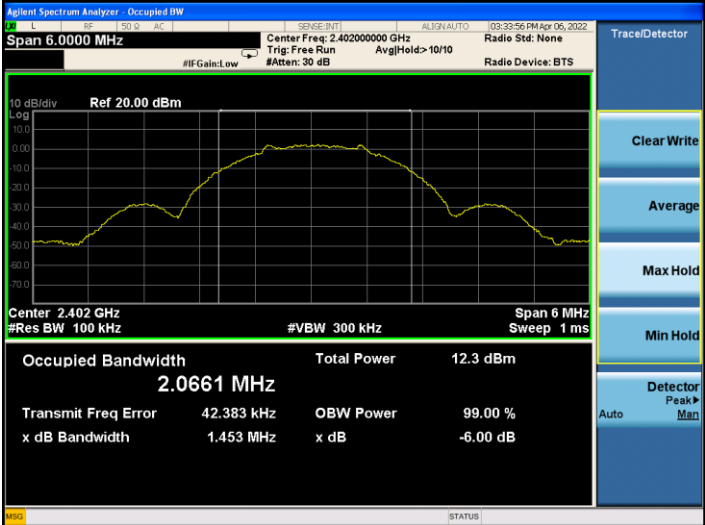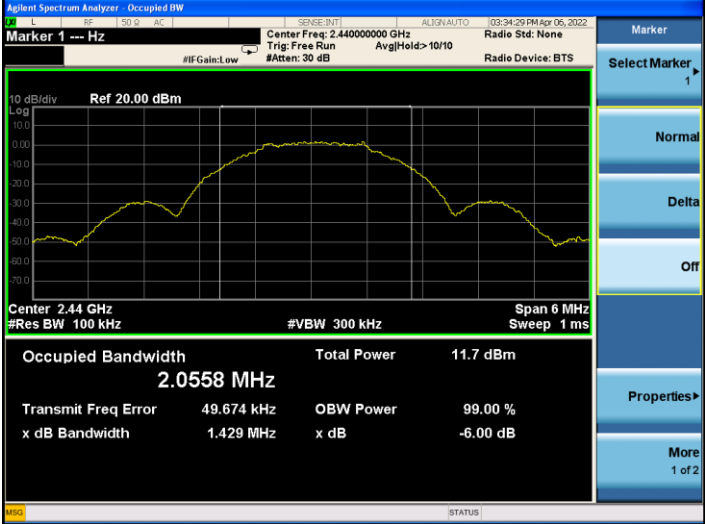DTS Bandwidth: BLE(2Mbps)	
Low	
Middle	
High	

APPENDIX C

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE(1Mbps)	Low	3.856	30.00
	Middle	3.600	30.00
	High	3.538	30.00
BLE(2Mbps)	Low	3.851	30.00
	Middle	3.580	30.00
	High	3.526	30.00

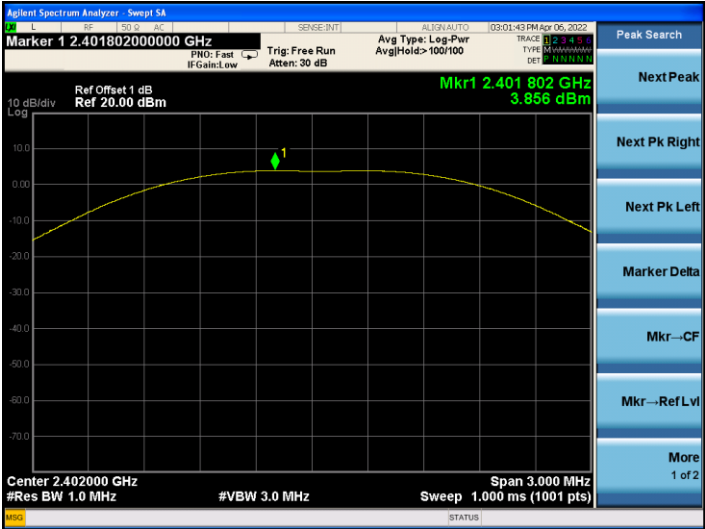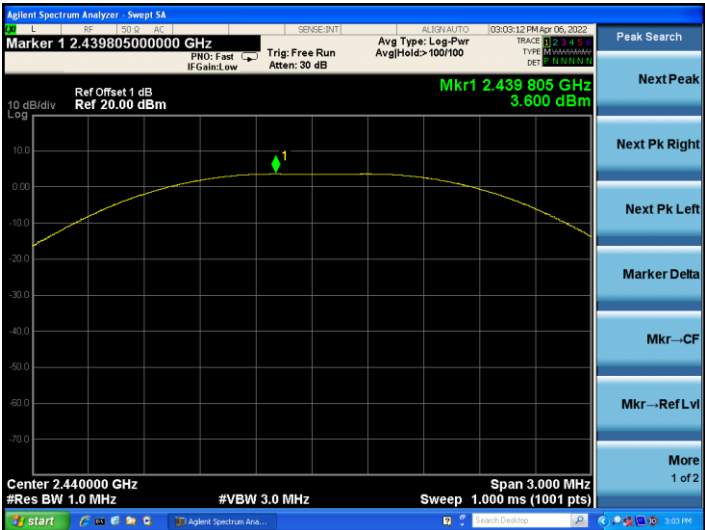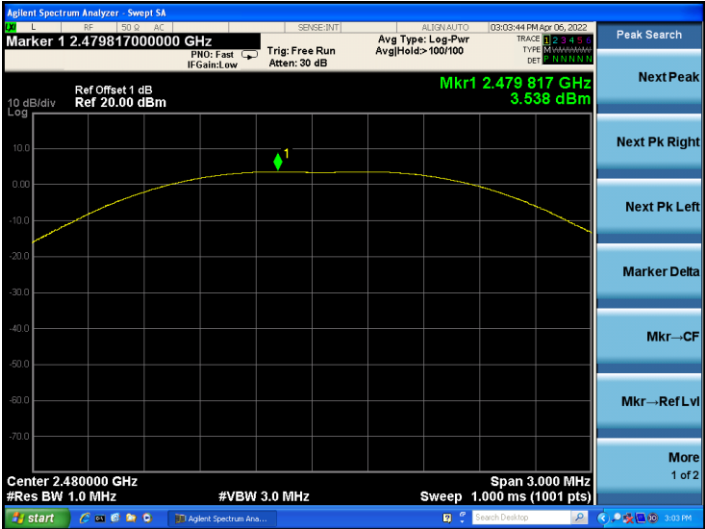BLE(1Mbps) Low	
Middle	
High	

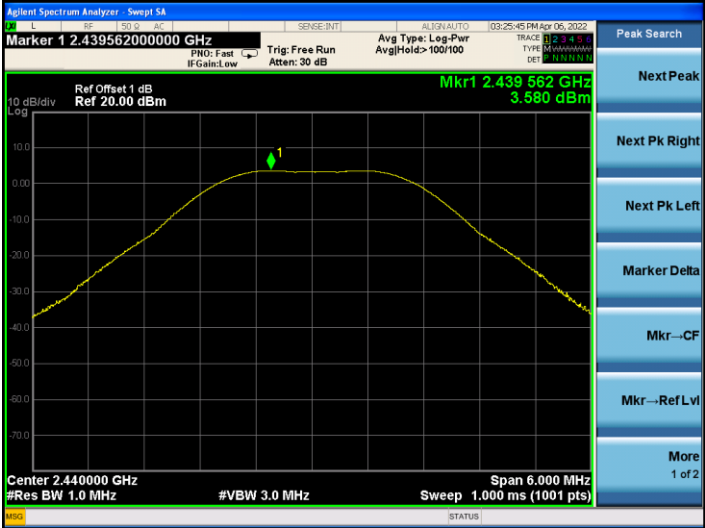
BLE(2Mbps) Low	
Middle	
High	

APPENDIX D


Conducted Out of Band Emissions

BLE(1Mbps)

Low

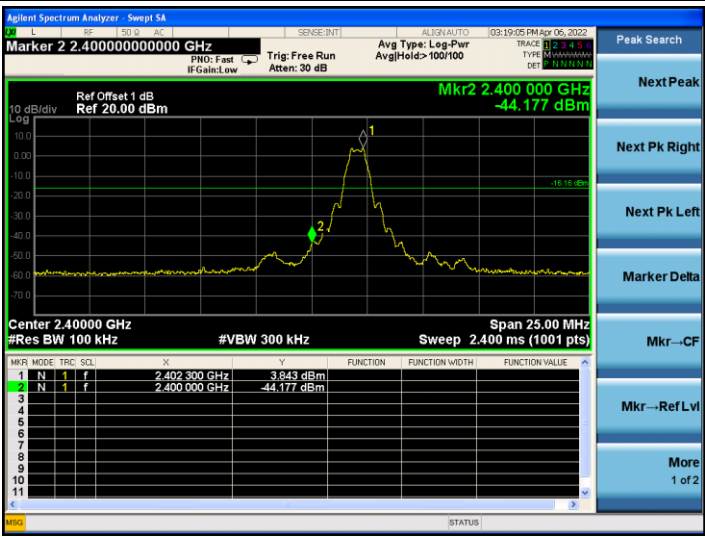


Middle

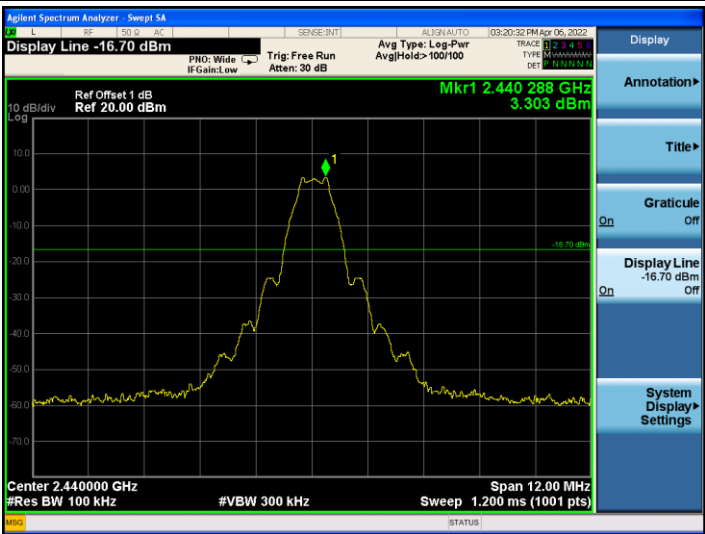



High

BLE(2Mbps)	Agilent Spectrum Analyzer - Swept SA Display Line -17.37 dBm Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.402 525 GHz 2.627 dBm Center 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Span 25.00 MHz Sweep 2.400 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 525 GHz</td><td>2.627 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-29.634 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Display Annotation> Title> Graticule On Display Line -17.37 dBm On System Display> Settings	MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 525 GHz	2.627 dBm				2	N	1	f	2.400 000 GHz	-29.634 dBm				3									4									5									6									7									8									9									10									11								
MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.402 525 GHz	2.627 dBm																																																																																																								
2	N	1	f	2.400 000 GHz	-29.634 dBm																																																																																																								
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
Low	Agilent Spectrum Analyzer - Swept SA Marker 1 4.808480000000 GHz Ref Offset 1 dB Ref 20.00 dBm Mkr1 4.808 GHz -45.626 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.00 GHz Sweep 2.482 s (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>4.80848 GHz</td><td>-45.626 dBm</td><td></td><td></td><td></td></tr></table> Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2	MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	4.80848 GHz	-45.626 dBm																																																																																													
MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	4.80848 GHz	-45.626 dBm																																																																																																								
Middle	Agilent Spectrum Analyzer - Swept SA Display Line -17.57 dBm Ref Offset 1 dB Ref 20.00 dBm Mkr1 2.440 072 GHz 2.434 dBm Center 2.440000 GHz #Res BW 100 kHz #VBW 300 kHz Span 12.00 MHz Sweep 1.200 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 072 GHz</td><td>2.434 dBm</td><td></td><td></td><td></td></tr></table> Display Annotation> Title> Graticule On Display Line -17.57 dBm On System Display> Settings	MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 072 GHz	2.434 dBm																																																																																													
MNR	MODE	TRG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.440 072 GHz	2.434 dBm																																																																																																								

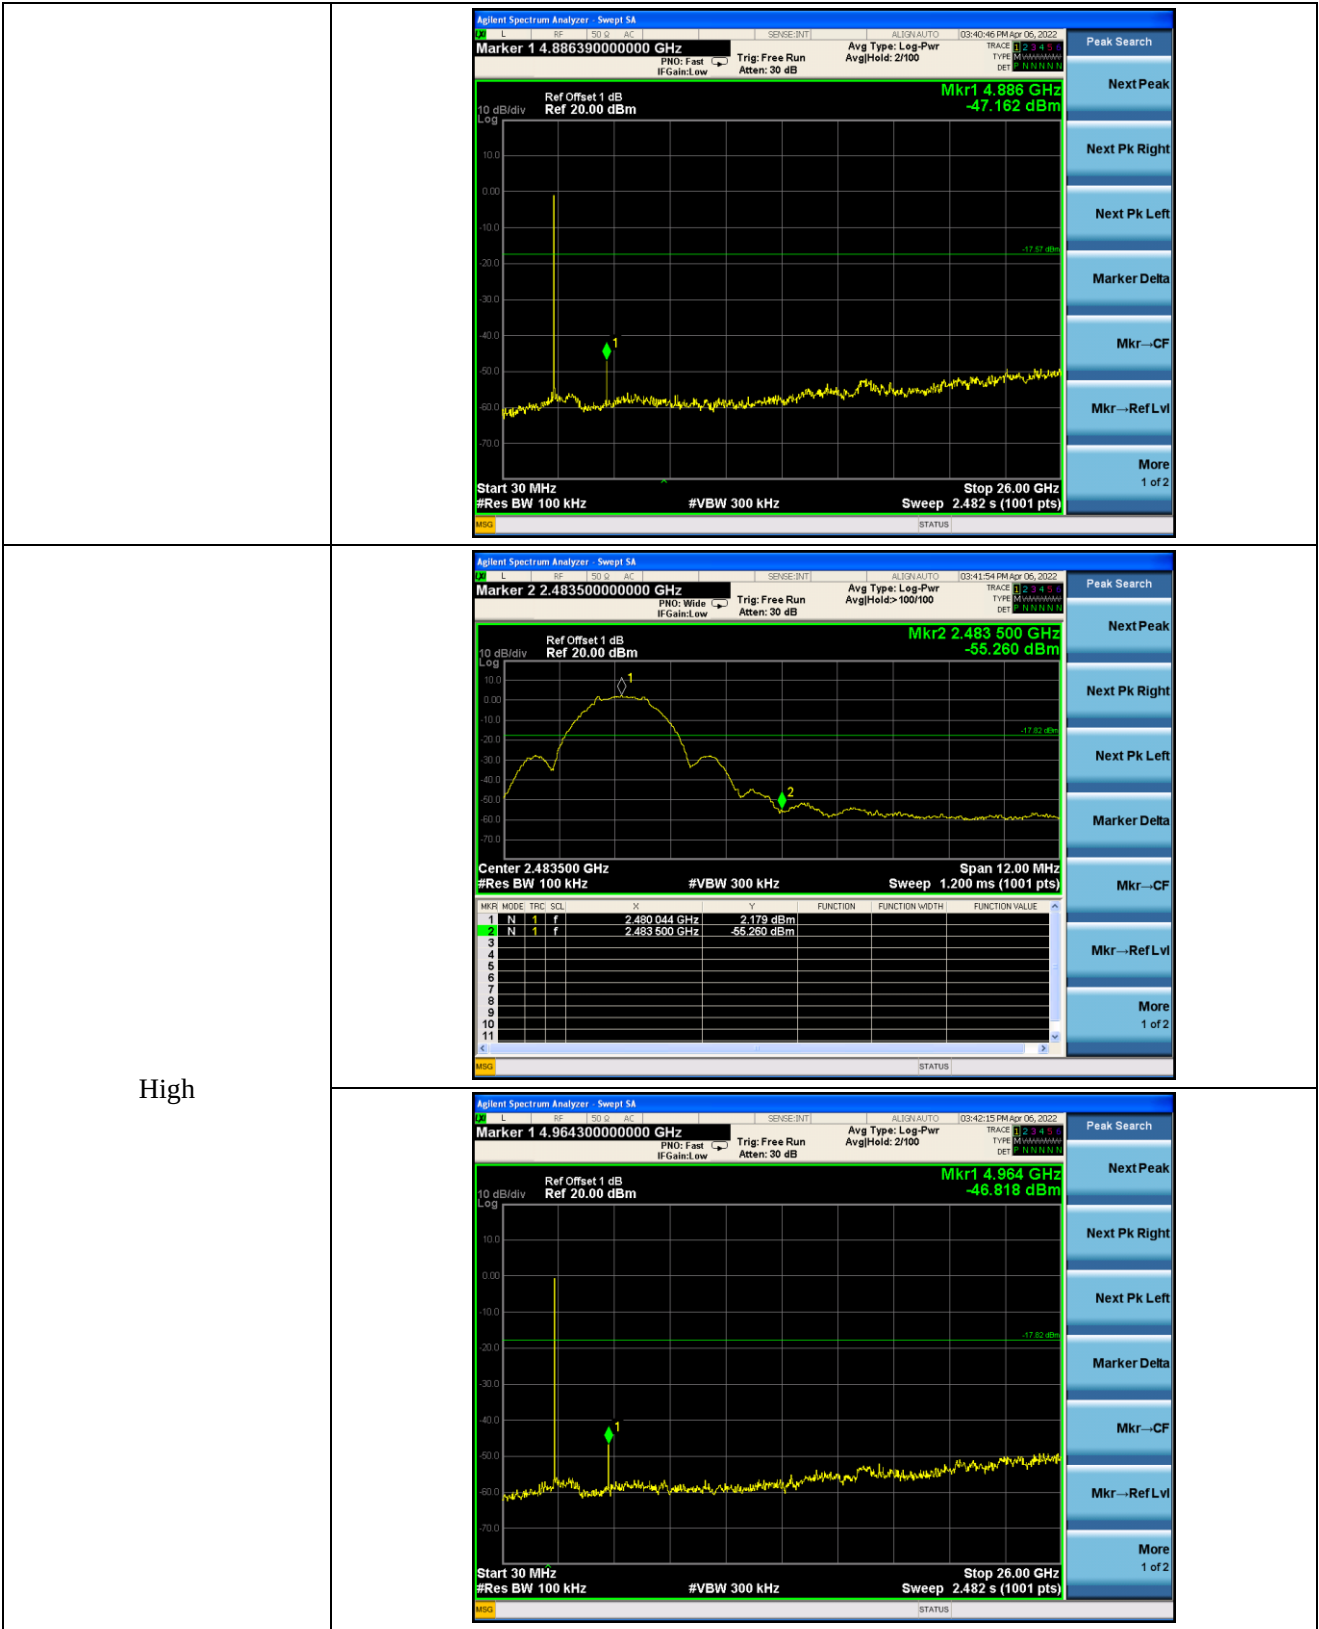

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******