



## CFR 47 FCC PART 15 SUBPART C ISED RSS-247 ISSUE 3

### CERTIFICATION TEST REPORT

*For*

**CC1312PSIP SimpleLink™ Sub-1-GHz Wireless System-in-Package**

**MODEL NUMBER: CC1312PSIPMOT2**

**FCC ID: 2AB2Q-1312PSIP**

**IC: 10256A-1312PSIP**

**HVIN: P-SP-A5-01B-A, P-SP-A6-01-A, P-SP-A7-01-A, P-SD-A12-01-A, P-SWC-A5-01-A**

**REPORT NUMBER: 4791354481-1**

**ISSUE DATE: April 17, 2025**

*Prepared for*

**LEEDARSON LIGHTING CO., LTD.  
Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd., Song Shan Lake Branch  
Room 101, Building 2, Zihui City Phase I, No.4, Information Road, Songshan  
Lake, Dongguan, Guangdong, China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 17, 2025	Initial Issue	

Note: This report is based on FR341305-01C which is issued by Sporton International Inc. Wensan Laboratory. The EUT had already applied for the FCC ID & IC ID, the customer updates the antenna designed. The RF technical construction including circuit diagram, PCB Layout, components, component layout and performance does not change except for the antenna designed. All the data have been tested in this report.

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a)(1) (i) RSS-247 Clause 5.1 (c) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (2) RSS-247 Clause 5.4 (a)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (c)	Pass
4	Number of Hopping Frequency	15.247 (a) (i) RSS-247 Clause 5.1 (c)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (i) RSS-247 Clause 5.1 (c)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

**Note:**

1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Simple Acceptance> decision rule is applied.

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>8</b>
<b>2. TEST METHODOLOGY .....</b>	<b>9</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>9</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>10</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	10
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	10
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>11</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	11
5.2. <i>MAXIMUM PEAK OUTPUT POWER .....</i>	11
5.3. <i>CHANNEL LIST.....</i>	12
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	12
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	12
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	13
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	14
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>15</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
7.1. <i>ON TIME AND DUTY CYCLE .....</i>	17
7.2. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH.....</i>	18
7.3. <i>CONDUCTED OUTPUT POWER .....</i>	20
7.4. <i>CARRIER FREQUENCY SEPARATION .....</i>	21
7.5. <i>NUMBER OF HOPPING FREQUENCIES .....</i>	23
7.6. <i>TIME OF OCCUPANCY (DWELL TIME) .....</i>	25
7.7. <i>CONDUCTED BANDEdge AND SPURIOUS EMISSION .....</i>	27
<b>8. RADIATED TEST RESULTS .....</b>	<b>29</b>
8.1. <i>SPURIOUS EMISSIONS (1 GHz ~ 10 GHz).....</i>	36
8.2. <i>SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....</i>	66
8.3. <i>SPURIOUS EMISSIONS BELOW 30 MHz .....</i>	68
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>71</b>
<b>10. ANTENNA REQUIREMENTS .....</b>	<b>74</b>
TEST DATA.....	75
<b>11. GFSK.50 kbps Condition 1 .....</b>	<b>75</b>

11.1.	<i>Appendix A1: DUTY CYCLE</i> .....	75
11.1.1.	Test Result.....	75
11.2.	<i>Appendix B1: 20DB BANDWIDTH &amp; OCCUPIED CHANNEL BANDWIDTH</i> .....	77
11.2.1.	Test Result.....	77
11.2.2.	Test Graphs .....	78
11.3.	<i>Appendix C1: CONDUCTED OUTPUT POWER</i> .....	79
11.3.1.	Test Result.....	79
11.4.	<i>Appendix D1: CARRIER FREQUENCY SEPARATION</i> .....	80
11.4.1.	Test Result.....	80
11.4.2.	Test Graphs .....	80
11.5.	<i>Appendix E1: NUMBER OF HOPPING FREQUENCIES</i> .....	81
11.5.1.	Test Result.....	81
11.5.2.	Test Graphs .....	81
11.6.	<i>Appendix F1: TIME OF OCCUPANCY (DWELL TIME)</i> .....	82
11.6.1.	Test Result.....	82
11.6.2.	Test Graphs .....	83
11.7.	<i>Appendix G1: CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i> .....	84
11.7.1.	Test Result.....	84
11.7.2.	Test Graphs .....	85
<b>12.</b>	<b>GFSK.50 kbps Condition 2</b> .....	<b>89</b>
12.1.	<i>Appendix A2: DUTY CYCLE</i> .....	89
12.1.1.	Test Result.....	89
12.2.	<i>Appendix B2: 20DB BANDWIDTH &amp; OCCUPIED CHANNEL BANDWIDTH</i> .....	91
12.2.1.	Test Result.....	91
12.2.2.	Test Graphs .....	92
12.3.	<i>Appendix C2: CONDUCTED OUTPUT POWER</i> .....	93
12.3.1.	Test Result.....	93
12.4.	<i>Appendix D2: CARRIER FREQUENCY SEPARATION</i> .....	94
12.4.1.	Test Result.....	94
12.4.2.	Test Graphs .....	94
12.5.	<i>Appendix E2: NUMBER OF HOPPING FREQUENCIES</i> .....	95
12.5.1.	Test Result.....	95
12.5.2.	Test Graphs .....	95
12.6.	<i>Appendix F2: TIME OF OCCUPANCY (DWELL TIME)</i> .....	96
12.6.1.	Test Result.....	96
12.6.2.	Test Graphs .....	97
12.7.	<i>Appendix G2: CONDUCTED SPURIOUS EMISSION</i> .....	98
12.7.1.	Test Result.....	98
12.7.2.	Test Graphs .....	99
<b>13.</b>	<b>GFSK.50 kbps Condition 3</b> .....	<b>102</b>
13.1.	<i>Appendix A3: DUTY CYCLE</i> .....	102
13.1.1.	Test Result.....	102
13.2.	<i>Appendix B3: 20DB BANDWIDTH &amp; OCCUPIED CHANNEL BANDWIDTH</i> .....	104

13.2.1.	Test Result.....	104
13.2.2.	Test Graphs .....	105
13.3.	<i>Appendix C3: CONDUCTED OUTPUT POWER</i> .....	106
13.3.1.	Test Result.....	106
13.4.	<i>Appendix D3: CARRIER FREQUENCY SEPARATION</i> .....	107
13.4.1.	Test Result.....	107
13.4.2.	Test Graphs .....	107
13.5.	<i>Appendix E3: NUMBER OF HOPPING FREQUENCIES</i> .....	108
13.5.1.	Test Result.....	108
13.5.2.	Test Graphs .....	108
13.6.	<i>Appendix F3: TIME OF OCCUPANCY (DWELL TIME)</i> .....	109
13.6.1.	Test Result.....	109
13.6.2.	Test Graphs .....	110
13.7.	<i>Appendix G3: CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i> .....	111
13.7.1.	Test Result.....	111
13.7.2.	Test Graphs .....	112
<b>14.</b>	<b>GFSK.50 kbps Condition 4 .....</b>	<b>115</b>
14.1.	<i>Appendix A4: DUTY CYCLE</i> .....	115
14.1.1.	Test Result.....	115
14.2.	<i>Appendix B4: 20DB BANDWIDTH &amp; OCCUPIED CHANNEL BANDWIDTH</i> .....	117
14.2.1.	Test Result.....	117
14.2.2.	Test Graphs .....	118
14.3.	<i>Appendix C4: CONDUCTED OUTPUT POWER</i> .....	119
14.3.1.	Test Result.....	119
14.4.	<i>Appendix D4: CARRIER FREQUENCY SEPARATION</i> .....	120
14.4.1.	Test Result.....	120
14.4.2.	Test Graphs .....	120
14.5.	<i>Appendix E4: NUMBER OF HOPPING FREQUENCIES</i> .....	121
14.5.1.	Test Result.....	121
14.5.2.	Test Graphs .....	121
14.6.	<i>Appendix F4: TIME OF OCCUPANCY (DWELL TIME)</i> .....	122
14.6.1.	Test Result.....	122
14.6.2.	Test Graphs .....	123
14.7.	<i>Appendix G4: CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i> .....	124
14.7.1.	Test Result.....	124
14.7.2.	Test Graphs .....	125
<b>15.</b>	<b>GFSK.50 kbps Condition 5 .....</b>	<b>128</b>
15.1.	<i>Appendix A5: DUTY CYCLE</i> .....	128
15.1.1.	Test Result.....	128
15.2.	<i>Appendix B5: 20DB BANDWIDTH &amp; OCCUPIED CHANNEL BANDWIDTH</i> .....	130
15.2.1.	Test Result.....	130
15.2.2.	Test Graphs .....	131
15.3.	<i>Appendix C5: CONDUCTED OUTPUT POWER</i> .....	132

15.3.1.	Test Result.....	132
15.4.	<i>Appendix D5: CARRIER FREQUENCY SEPARATION</i> .....	133
15.4.1.	Test Result.....	133
15.4.2.	Test Graphs .....	133
15.5.	<i>Appendix E5: NUMBER OF HOPPING FREQUENCIES</i> .....	134
15.5.1.	Test Result.....	134
15.5.2.	Test Graphs .....	134
15.6.	<i>Appendix F5: TIME OF OCCUPANCY (DWELL TIME)</i> .....	135
15.6.1.	Test Result.....	135
15.6.2.	Test Graphs .....	136
15.7.	<i>Appendix G5: CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i> .....	137
15.7.1.	Test Result.....	137
15.7.2.	Test Graphs .....	138

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

### Manufacturer Information


Company Name: LEEDARSON LIGHTING CO., LTD.  
Address: Xingda Road, Xingtai Industrial Zone, Changtai County, Zhangzhou, Fujian, China

### EUT Information

EUT Name: CC1312PSIP SimpleLink™ Sub-1-GHz Wireless System-in-Package  
Model: CC1312PSIPMOT2  
HVIN: P-SP-A5-01B-A, P-SP-A6-01-A, P-SP-A7-01-A, P-SD-A12-01-A, P-SWC-A5-01-A  
Sample Received Date: June 6, 2024  
Sample Status: Normal  
Sample ID: 7291060  
Date of Tested: June 6, 2024~ April 17, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 3	PASS
ISED RSS-GEN Issue 5	PASS


Prepared By:



Fanny Huang

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 3 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, Zihui City Phase I, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz ~ 18 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
20dB Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Carrier Frequency Separation	±1.9%
Maximum Conducted Output Power	±0.743 dB
Number of Hopping Channel	±1.9%
Time of Occupancy	±0.028%
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz) ±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	CC1312PSIP SimpleLink™ Sub-1-GHz Wireless System-in-Package
Model	CC1312PSIPMOT2
HVIN:	P-SP-A5-01B-A, P-SP-A6-01-A, P-SP-A7-01-A, P-SD-A12-01-A, P-SWC-A5-01-A
Frequency Range:	912.75 MHz to 919.12 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK
Data Rates:	50 kbps
Normal Test Voltage:	DC 3.3 V

### 5.2. MAXIMUM PEAK OUTPUT POWER

Test Mode	Bit Rate	Operation Frequency	Condition	Maximum Conducted PEAK Output Power (dBm)
GFSK	50 kbps	912.75 MHz to 919.12 MHz	1	18.95
			2	18.97
			3	18.96
			4	18.59
			5	18.27

### 5.3. CHANNEL LIST

Channel List									
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	912.75	11	914.05	21	915.35	31	916.65	41	917.95
2	912.88	12	914.18	22	915.48	32	916.78	42	918.08
3	913.01	13	914.31	23	915.61	33	916.91	43	918.21
4	913.14	14	914.44	24	915.74	34	917.04	44	918.34
5	913.27	15	914.57	25	915.87	35	917.17	45	918.47
6	913.4	16	914.7	26	916	36	917.3	46	918.6
7	913.53	17	914.83	27	916.13	37	917.43	47	918.73
8	913.66	18	914.96	28	916.26	38	917.56	48	918.86
9	913.79	19	915.09	29	916.39	39	917.69	49	918.99
10	913.92	20	915.22	30	916.52	40	917.82	50	919.12

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 1(Low Channel), CH 25(MID Channel), CH50(High Channel)	912.75 MHz, 915.87 MHz, 919.12 MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 902 ~ 928MHz Band					
Test Software		SmartRF Studio 7			
Modulation Mode	Transmit Antenna Number	Test Channel			
		LCH	MCH	HCH	
GFSK Condition 1	1	20	20	20	
GFSK Condition 2	1	20	20	20	
GFSK Condition 3	1	20	20	20	
GFSK Condition 4	1	19	19	19	
GFSK Condition 5	1	19	19	19	

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Condition 1

Antenna	Frequency Band (MHz)	Model Name	Antenna Type	MAX Antenna Gain (dBi)
1	912-920	Outdoor Plug Antenna	PCB IFA antenna	-0.91

Condition 2

Antenna	Frequency Band (MHz)	Model Name	Antenna Type	MAX Antenna Gain (dBi)
1	912-920	Indoor Plug Antenna	Metal IFA Antenna	-4.08

Condition 3

Antenna	Frequency Band (MHz)	Model Name	Antenna Type	MAX Antenna Gain (dBi)
1	912-920	Socket Antenna	Metal Monopole antenna	-4.09

Condition 4

Antenna	Frequency Band (MHz)	Model Name	Antenna Type	MAX Antenna Gain (dBi)
1	912-920	3way Dimmer Antenna	PCB IFA antenna	-2.48

Condition 5

Antenna	Frequency Band (MHz)	Model Name	Antenna Type	MAX Antenna Gain (dBi)
1	912-920	3way Switch Antenna	Metal Monopole antenna	-0.73

Modulation	Transmit and Receive Mode	Description
GFSK Condition 1	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
GFSK Condition 2	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
GFSK Condition 3	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
GFSK Condition 4	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
GFSK Condition 5	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/
2	AC Adaptor	Lenovo	ADLX65YCC3D	Input: AC 100-240V, 1.8A, 50-60Hz Output: DC 20V, 3.25A, 65.0W Max

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

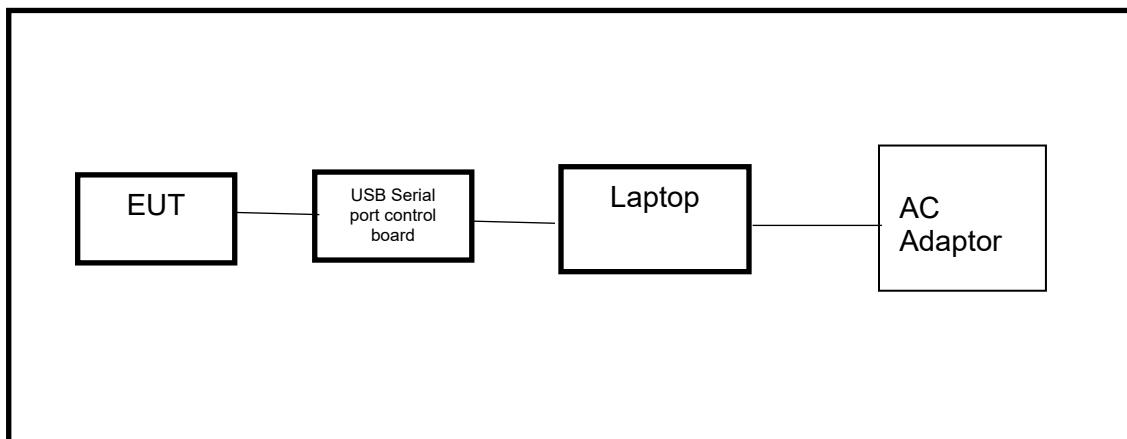

Note: AC Adaptor only use for AC POWER LINE CONDUCTED EMISSION test.

## 6. MEASURING INSTRUMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Software						
Description	Manufacturer	Name		Version		
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10		
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due. Date
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Sep.13, 2024	Sep.12, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonsend	JS0806-2	23B80620666	Mar.25,2024	Sep.28, 2024	Sep.27, 2025
Software						
Description	Manufacturer	Name		Version		
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.3.10		

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Sep.28, 2024	Sep.27, 2025
Software						
Description		Manufacturer		Name		Version
Test Software for Conducted Emissions		Farad		EZ-EMC		Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	/	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec. 09, 2024	Dec.08, 2027
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	23	Oct.12, 2023	Sep.28, 2024	Sep.27, 2025
Software						
Description		Manufacturer		Name		Version
Test Software for Radiated Emissions		Farad		EZ-EMC		Ver. UL-3A1


## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### TEST SETUP

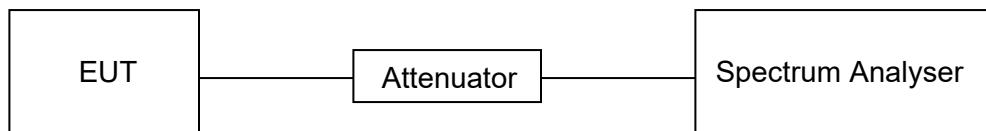

#### TEST ENVIRONMENT

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### RESULTS

Please refer to appendix A1-A5.

## 7.2. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a)(1) (i) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	500 kHz	902 - 928
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	None; for reporting purposes only.	902 - 928


### TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99 % occupied bandwidth and 20 dB Bandwidth.

### TEST SETUP

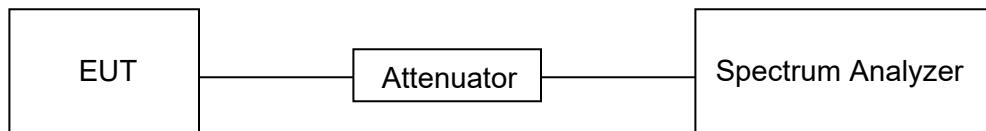

**TEST ENVIRONMENT**

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix B1-B5.

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS


CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (2) ISED RSS-247 Clause 5.4 (a)	Peak Conducted Output Power	1 watt for systems employing at least 50 hopping channels	902 - 928

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

#### RESULTS

Please refer to appendix C1-C5.

Note: Reported average power is for information only.

## 7.4. CARRIER FREQUENCY SEPARATION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	902 - 928

### TEST PROCEDURE


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

### TEST SETUP

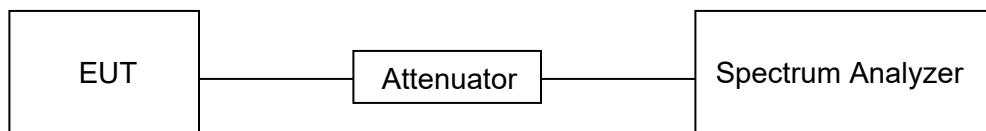

**TEST ENVIRONMENT**

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to Appendix D1-D5.

## 7.5. NUMBER OF HOPPING FREQUENCIES

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (i) ISED RSS-247 Clause 5.1 (c)	Number of Hopping Frequency	1. if the 20 dB bandwidth of the hopping channel is less than 250 kHz, at least 50 hopping channels 2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, at least 25 hopping channels


### TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP

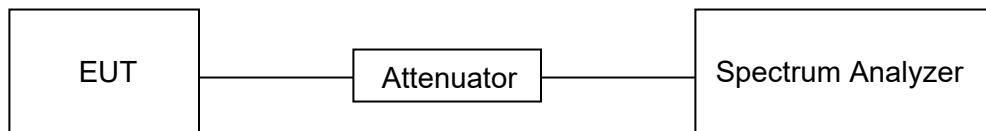

**TEST ENVIRONMENT**

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix E1-E5.

## 7.6. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (i) ISED RSS-247 Clause 5.1 (c)	Time of Occupancy (Dwell Time)	<p>1. If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.</p> <p>2. if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.</p>

### TEST PROCEDURE


Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$ , where T is the expected dwell time per channel.
VBW	$\geq$ RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.

A Period Time = (channel number)\*0.4

### TEST SETUP

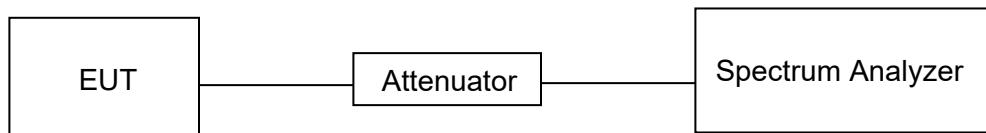

**TEST ENVIRONMENT**

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix F1-F5.

## 7.7. CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.

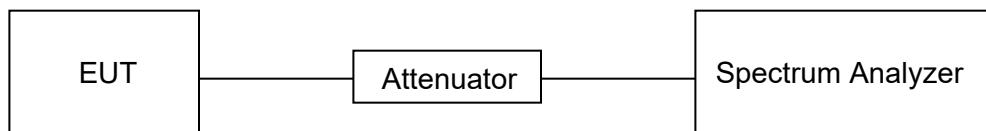**TEST SETUP****TEST ENVIRONMENT**

Temperature	24.9 °C	Relative Humidity	61.7 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**

Please refer to appendix G1-G5.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3287	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3287	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30 MHz

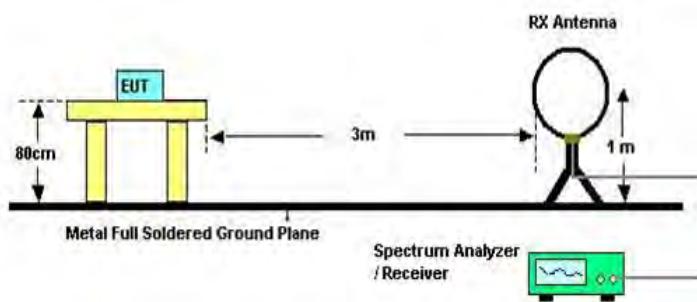


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency  $X$  KHz resulted in a level of  $Y$  dB<sub>uV/m</sub>, which is equivalent to  $Y-51.5 = Z$  dB<sub>uA/m</sub>, which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

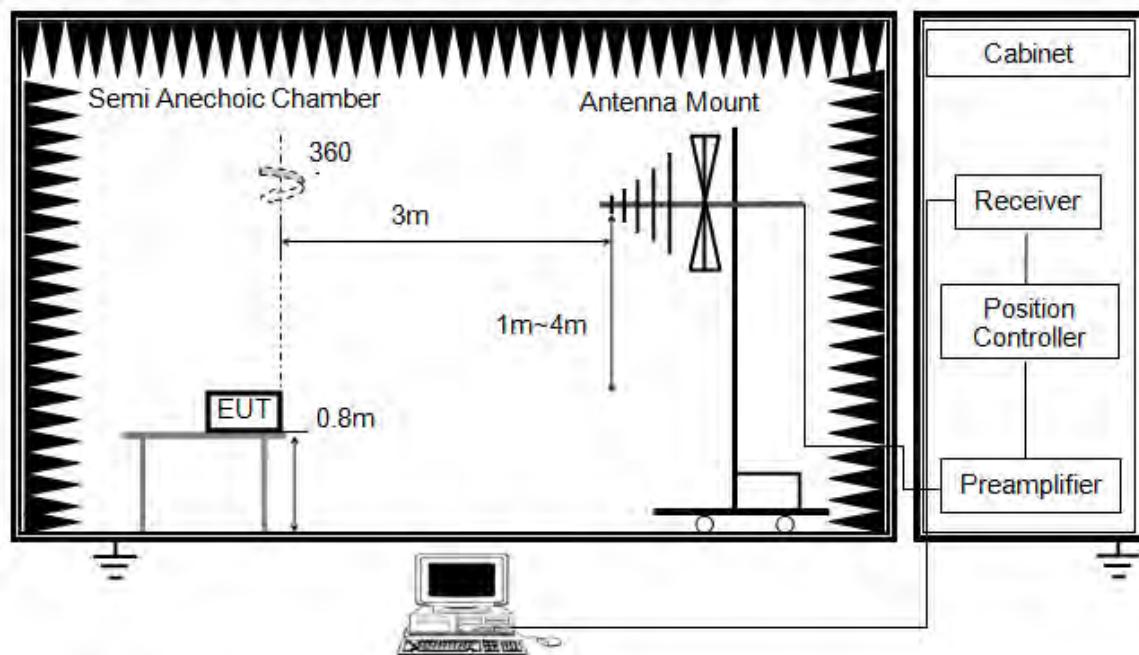


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

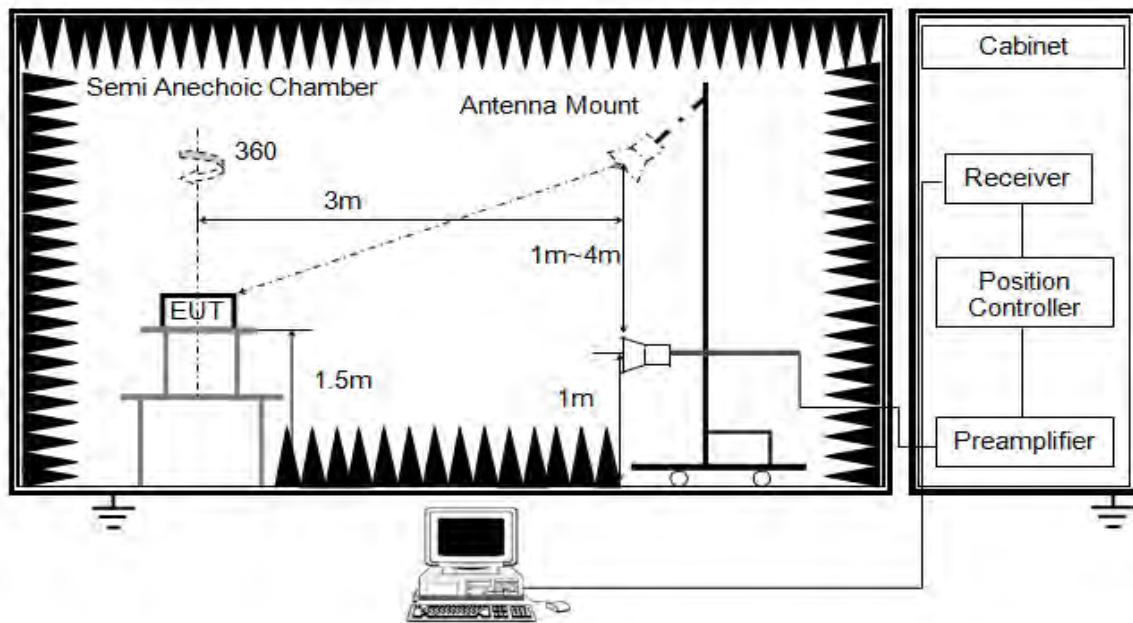


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

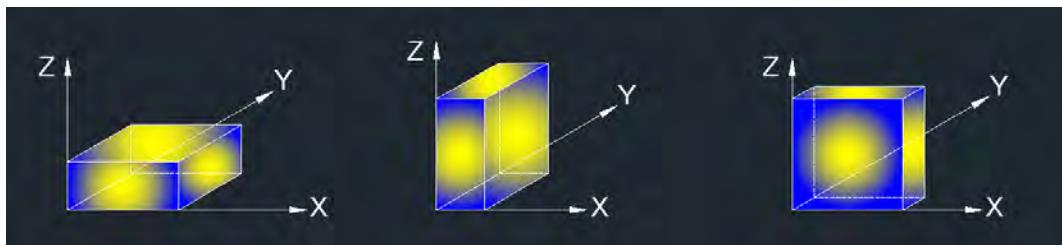

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 10 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG:  $\text{VBW} = 1/\text{Ton}$ , where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.


**TEST ENVIRONMENT**

Temperature	24.2 °C	Relative Humidity	55 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.3 V

**RESULTS**


## 8.1. SPURIOUS EMISSIONS (1 GHz ~ 10 GHz)

Test Mode:	GFSK Condition 1	Frequency(MHz):	912.75
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

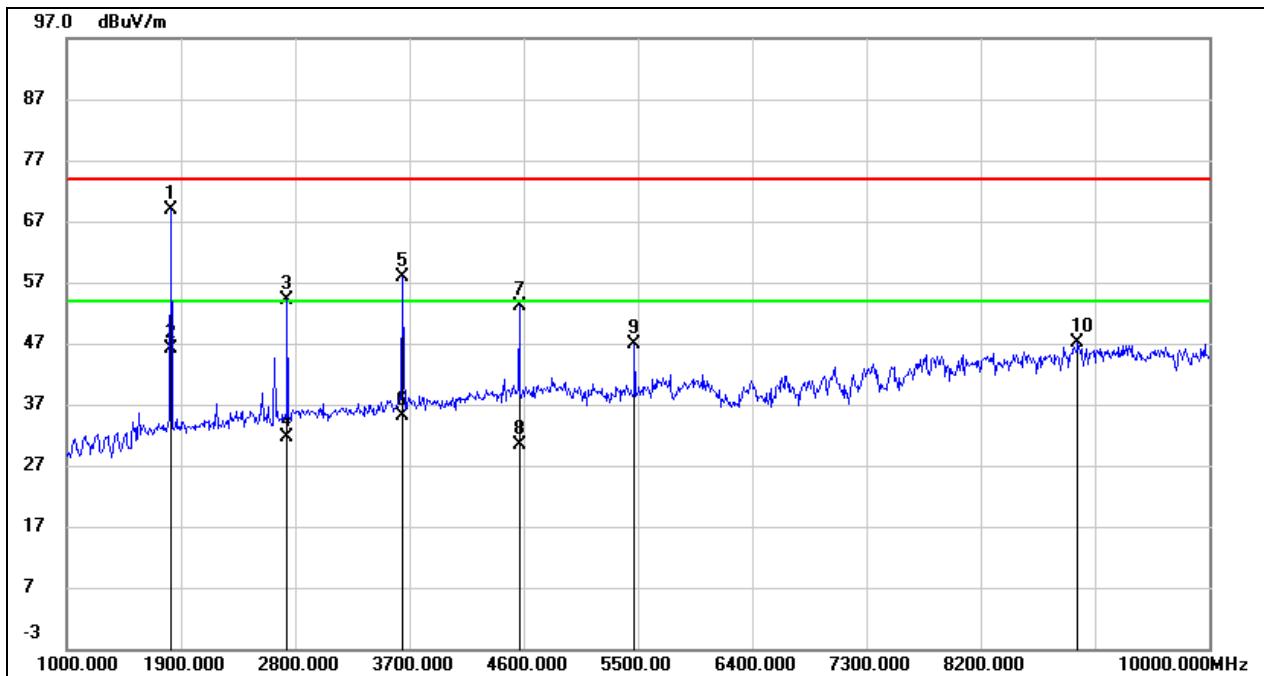


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	79.15	-10.35	68.80	74.00	-5.20	peak
2	1819.000	/	/	46.13	54.00	-7.87	AVG
3	2737.000	61.45	-7.24	54.21	74.00	-19.79	peak
4	2737.000	/	/	31.54	54.00	-22.46	AVG
5	3646.000	61.77	-3.94	57.83	74.00	-16.17	peak
6	3646.000	/	/	35.16	54.00	-18.84	AVG
7	4564.000	54.45	-1.31	53.14	74.00	-20.86	peak
8	4564.000	/	/	30.47	54.00	-23.53	AVG
9	5473.000	45.57	1.40	46.97	74.00	-27.03	peak
10	8965.000	36.97	10.06	47.03	74.00	-26.97	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	912.75
Polarity:	Vertical	Test Voltage:	DC 3.3 V

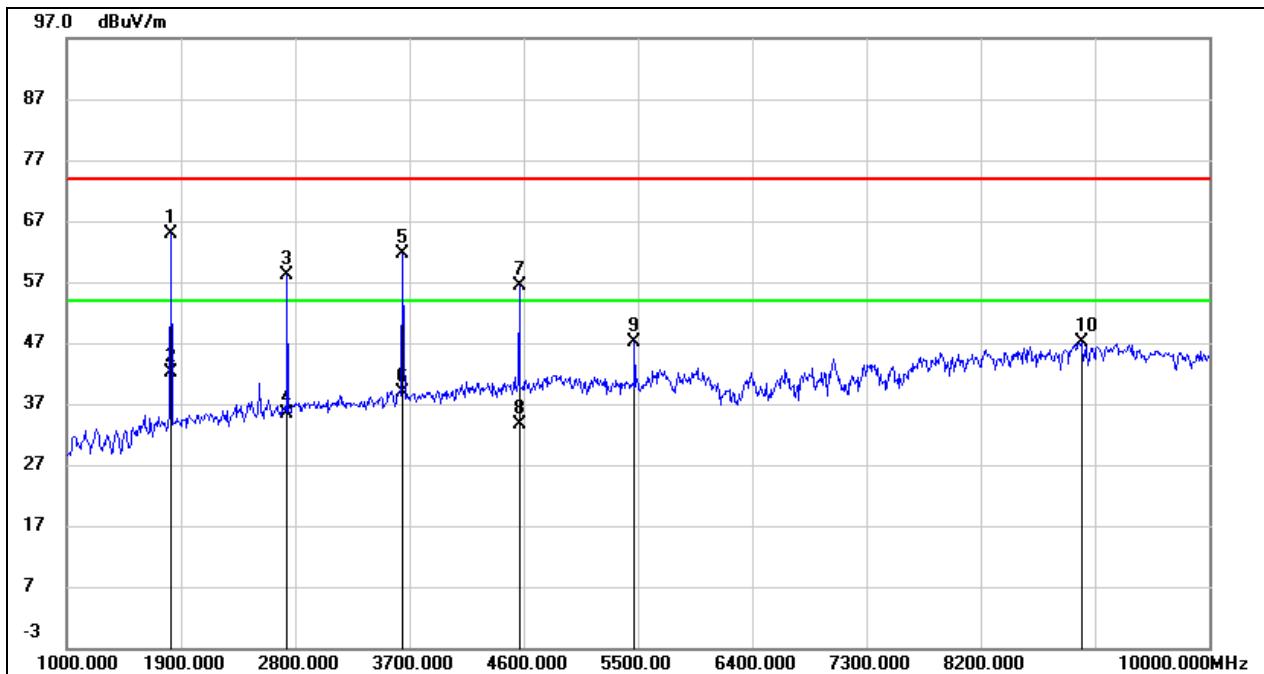


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	74.66	-9.74	64.92	74.00	-9.08	peak
2	1819.000	/	/	42.25	54.00	-11.75	AVG
3	2737.000	64.36	-6.21	58.15	74.00	-15.85	peak
4	2737.000	/	/	35.48	54.00	-18.52	AVG
5	3646.000	64.54	-2.91	61.63	74.00	-12.37	peak
6	3646.000	/	/	38.96	54.00	-15.04	AVG
7	4564.000	56.65	-0.37	56.28	74.00	-17.72	peak
8	4564.000	/	/	33.61	54.00	-20.39	AVG
9	5473.000	44.46	2.60	47.06	74.00	-26.94	peak
10	8992.000	36.23	10.78	47.01	74.00	-26.99	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	915.87
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

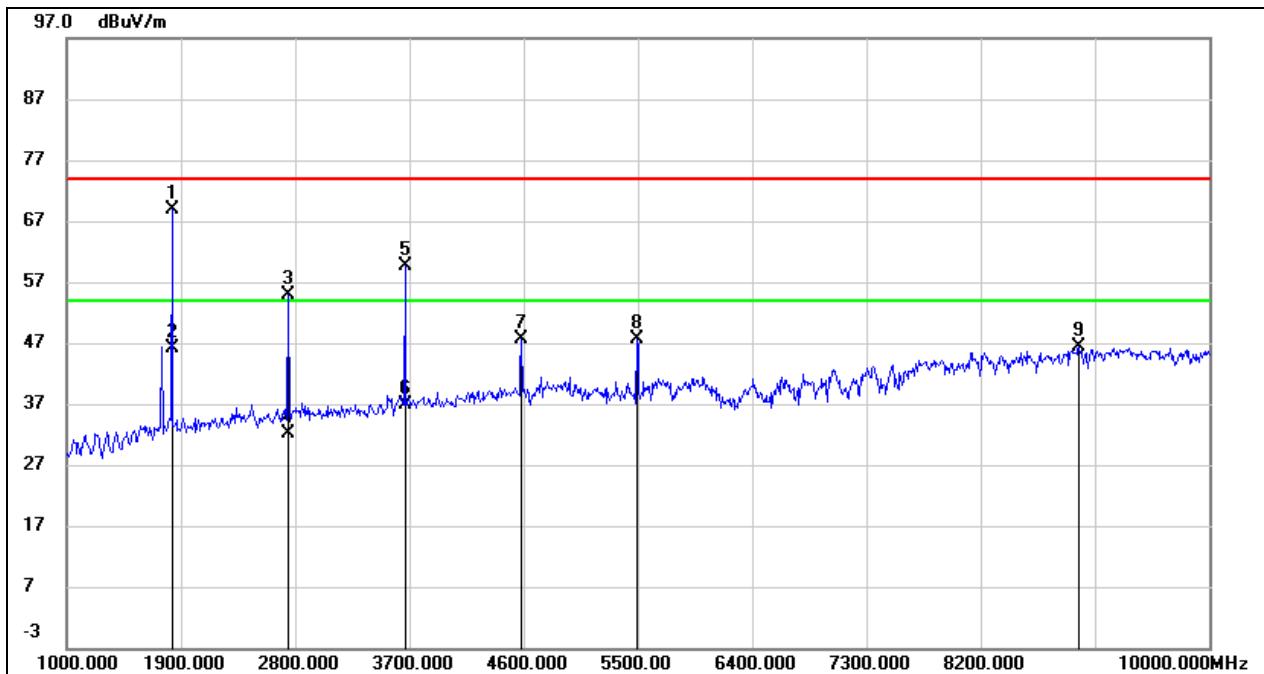


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	79.26	-10.34	68.92	74.00	-5.08	peak
2	1828.000	/	/	46.25	54.00	-7.75	AVG
3	2746.000	62.02	-7.20	54.82	74.00	-19.18	peak
4	2746.000	/	/	32.15	54.00	-21.85	AVG
5	3664.000	63.48	-3.89	59.59	74.00	-14.41	peak
6	3664.000	/	/	36.92	54.00	-17.08	AVG
7	4582.000	48.85	-1.27	47.58	74.00	-26.42	peak
8	5491.000	46.19	1.48	47.67	74.00	-26.33	peak
9	8974.000	36.17	10.16	46.33	74.00	-27.67	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	915.87
Polarity:	Vertical	Test Voltage:	DC 3.3 V

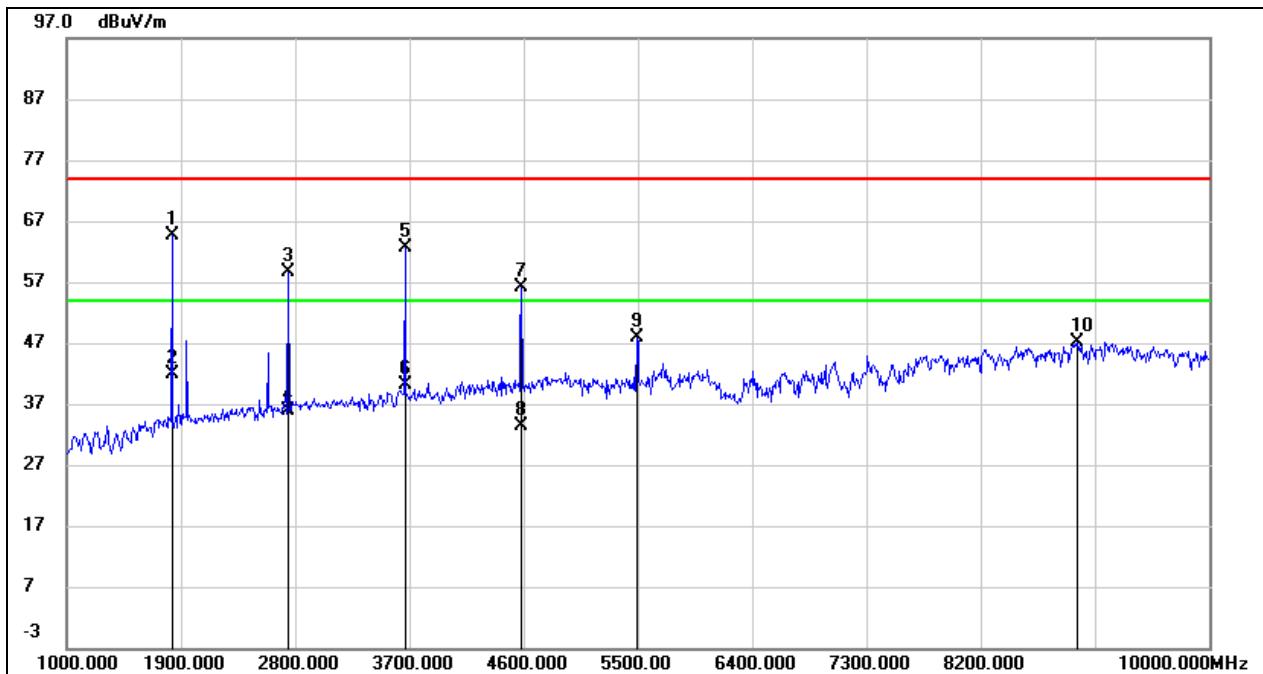


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	74.29	-9.71	64.58	74.00	-9.42	peak
2	1828.000	/	/	41.91	54.00	-12.09	AVG
3	2746.000	64.78	-6.15	58.63	74.00	-15.37	peak
4	2746.000	/	/	35.96	54.00	-18.04	AVG
5	3664.000	65.55	-2.86	62.69	74.00	-11.31	peak
6	3664.000	/	/	40.02	54.00	-13.98	AVG
7	4582.000	56.41	-0.32	56.09	74.00	-17.91	peak
8	4582.000	/	/	33.42	54.00	-20.58	AVG
9	5491.000	45.14	2.68	47.82	74.00	-26.18	peak
10	8965.000	36.76	10.47	47.23	74.00	-26.77	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

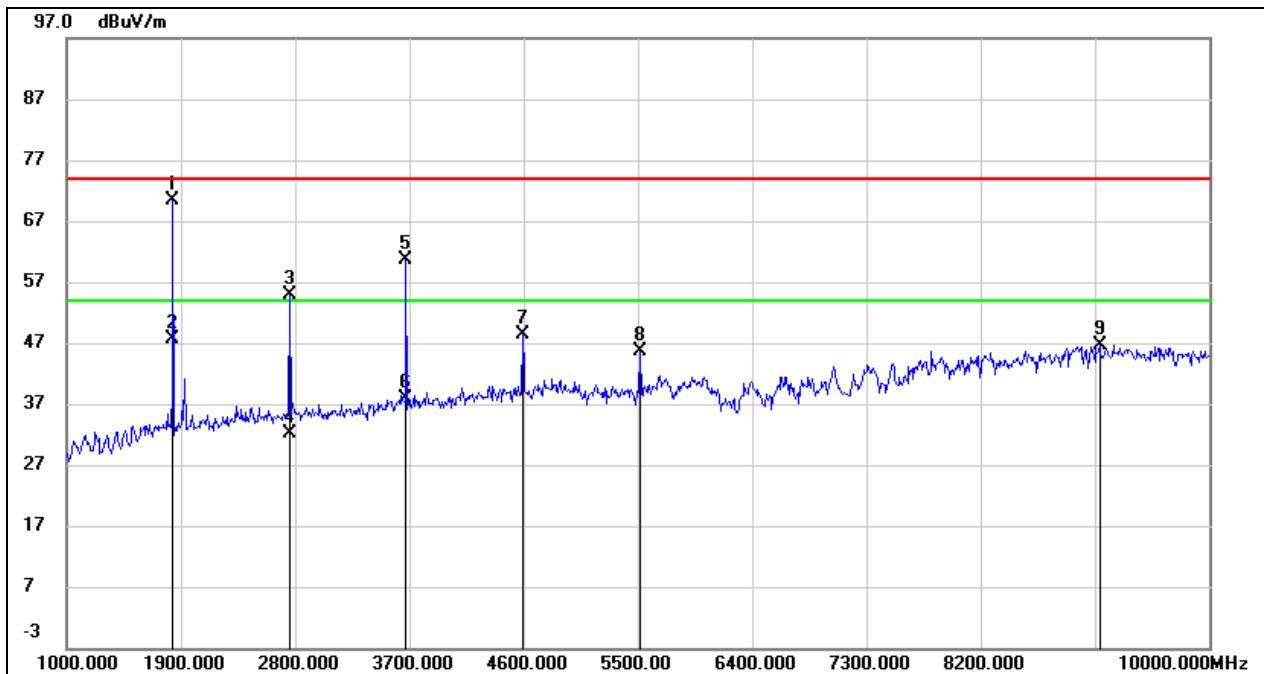


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	80.63	-10.34	70.29	74.00	-3.71	peak
2	1837.000	/	/	47.62	54.00	-6.38	AVG
3	2755.000	62.05	-7.15	54.90	74.00	-19.10	peak
4	2755.000	/	/	32.23	54.00	-21.77	AVG
5	3673.000	64.45	-3.87	60.58	74.00	-13.42	peak
6	3673.000	/	/	37.91	54.00	-16.09	AVG
7	4591.000	49.50	-1.23	48.27	74.00	-25.73	peak
8	5518.000	43.94	1.61	45.55	74.00	-28.45	peak
9	9136.000	36.83	9.87	46.70	74.00	-27.30	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

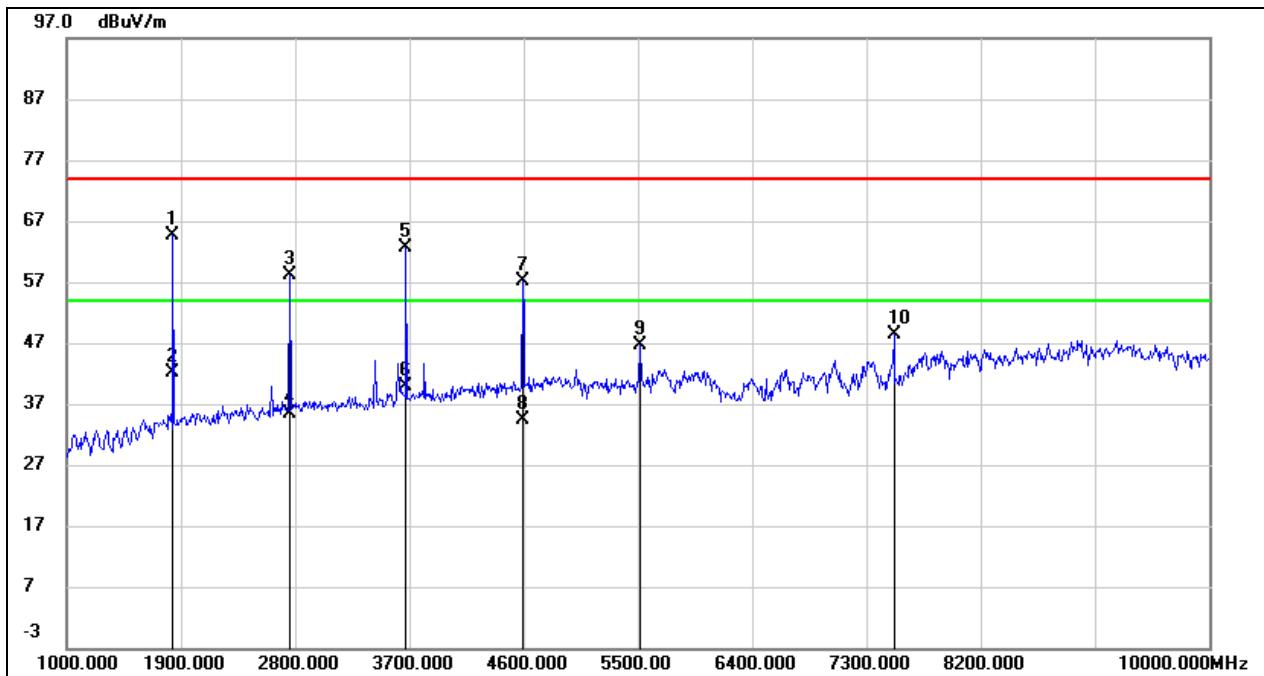


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	74.39	-9.70	64.69	74.00	-9.31	peak
2	1837.000	/	/	42.02	54.00	-11.98	AVG
3	2755.000	64.15	-6.09	58.06	74.00	-15.94	peak
4	2755.000	/	/	35.39	54.00	-18.61	AVG
5	3673.000	65.50	-2.83	62.67	74.00	-11.33	peak
6	3673.000	/	/	40.00	54.00	-14.00	AVG
7	4591.000	57.33	-0.28	57.05	74.00	-16.95	peak
8	4591.000	/	/	34.38	54.00	-19.62	AVG
9	5518.000	43.90	2.80	46.70	74.00	-27.30	peak
10	7516.000	40.87	7.41	48.28	74.00	-25.72	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	912.75
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

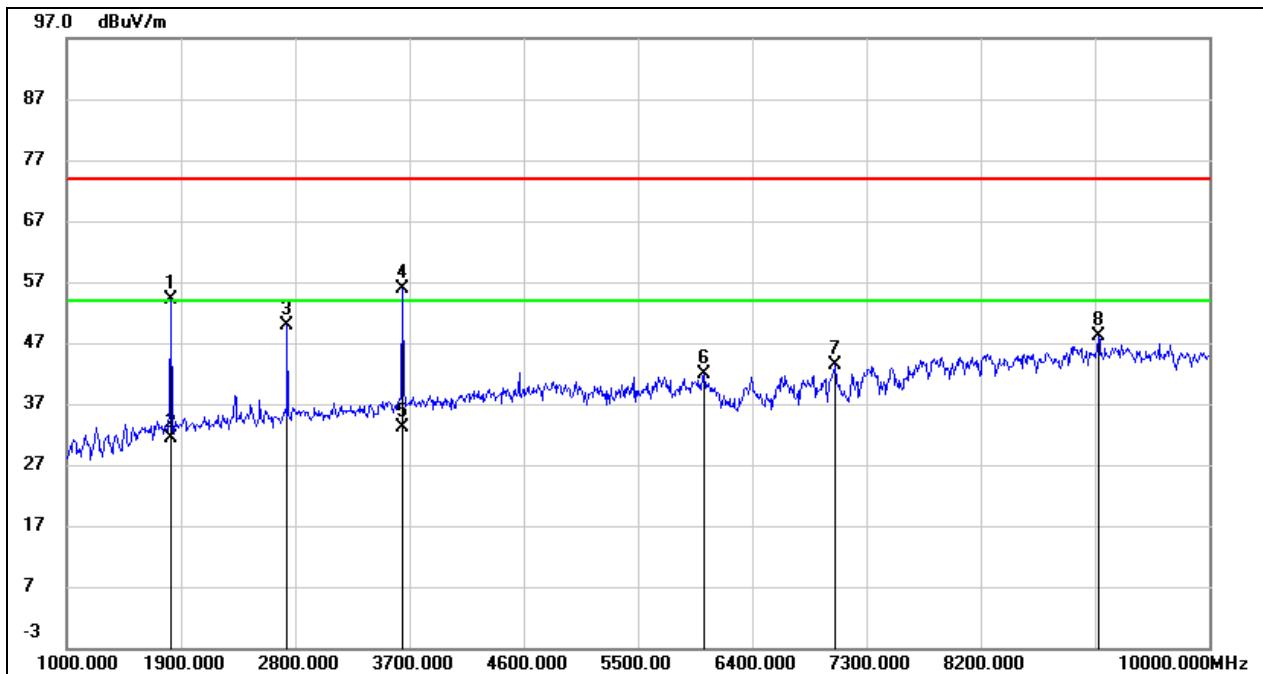


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	64.38	-10.35	54.03	74.00	-19.97	peak
2	1819.000	/	/	31.36	54.00	-22.64	AVG
3	2737.000	57.24	-7.24	50.00	74.00	-24.00	peak
4	3646.000	59.78	-3.94	55.84	74.00	-18.16	peak
5	3646.000	/	/	33.17	54.00	-20.83	AVG
6	6022.000	38.89	2.87	41.76	74.00	-32.24	peak
7	7057.000	36.76	6.64	43.40	74.00	-30.60	peak
8	9127.000	38.24	9.91	48.15	74.00	-25.85	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	912.75
Polarity:	Vertical	Test Voltage:	DC 3.3 V

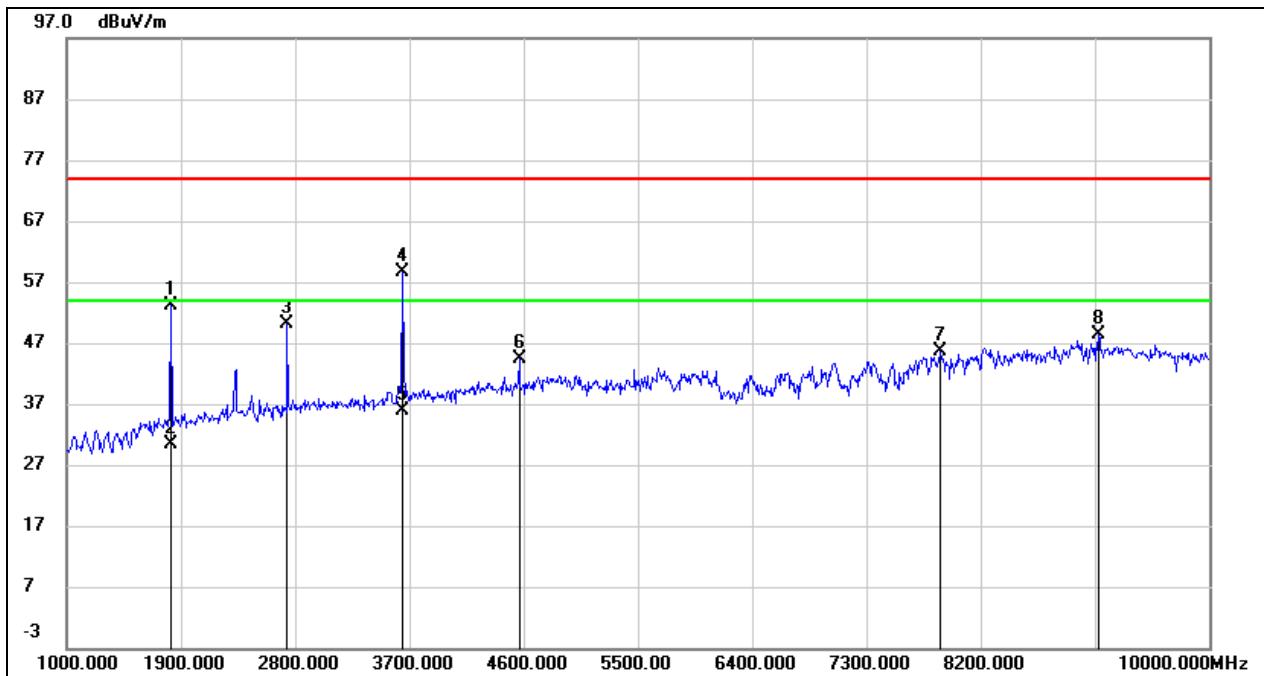


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	62.85	-9.74	53.11	74.00	-20.89	peak
2	1819.000	/	/	30.44	54.00	-23.56	AVG
3	2737.000	56.33	-6.21	50.12	74.00	-23.88	peak
4	3646.000	61.56	-2.91	58.65	74.00	-15.35	peak
5	3646.000	/	/	35.98	54.00	-18.02	AVG
6	4564.000	44.82	-0.37	44.45	74.00	-29.55	peak
7	7885.000	38.19	7.34	45.53	74.00	-28.47	peak
8	9127.000	38.23	10.21	48.44	74.00	-25.56	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	915.87
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

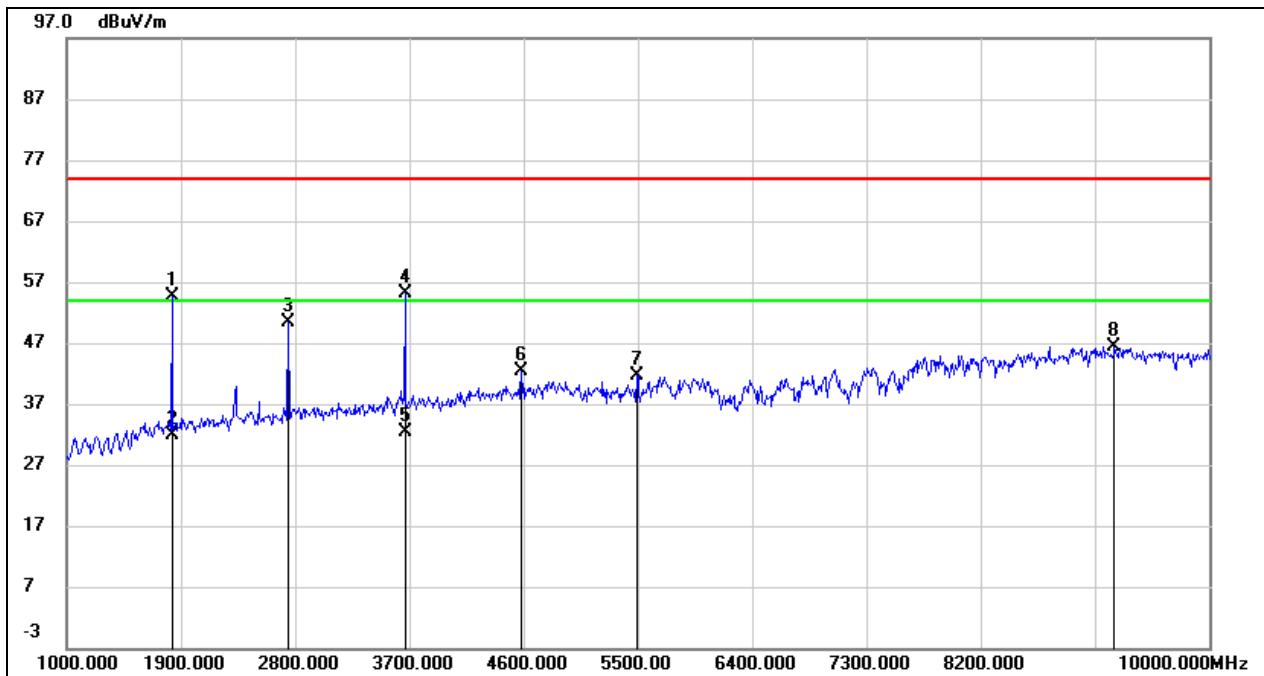


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	64.85	-10.34	54.51	74.00	-19.49	peak
2	1828.000	/	/	31.84	54.00	-22.16	AVG
3	2746.000	57.46	-7.20	50.26	74.00	-23.74	peak
4	3664.000	59.02	-3.89	55.13	74.00	-18.87	peak
5	3664.000	/	/	32.46	54.00	-21.54	AVG
6	4582.000	43.63	-1.27	42.36	74.00	-31.64	peak
7	5491.000	40.18	1.48	41.66	74.00	-32.34	peak
8	9253.000	36.69	9.70	46.39	74.00	-27.61	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	915.87
Polarity:	Vertical	Test Voltage:	DC 3.3 V

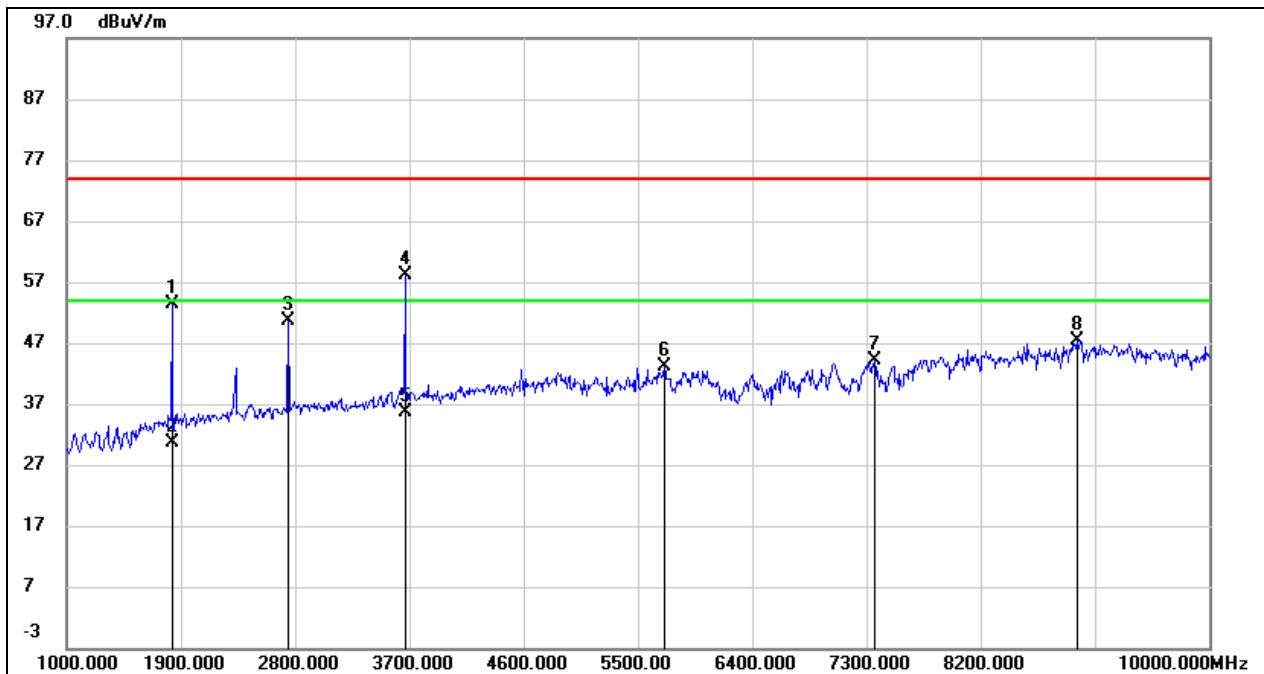


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	63.06	-9.71	53.35	74.00	-20.65	peak
2	1828.000	/	/	30.68	54.00	-23.32	AVG
3	2746.000	56.67	-6.15	50.52	74.00	-23.48	peak
4	3664.000	61.06	-2.86	58.20	74.00	-15.80	peak
5	3664.000	/	/	35.53	54.00	-18.47	AVG
6	5707.000	39.99	3.09	43.08	74.00	-30.92	peak
7	7363.000	36.51	7.64	44.15	74.00	-29.85	peak
8	8956.000	36.91	10.36	47.27	74.00	-26.73	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

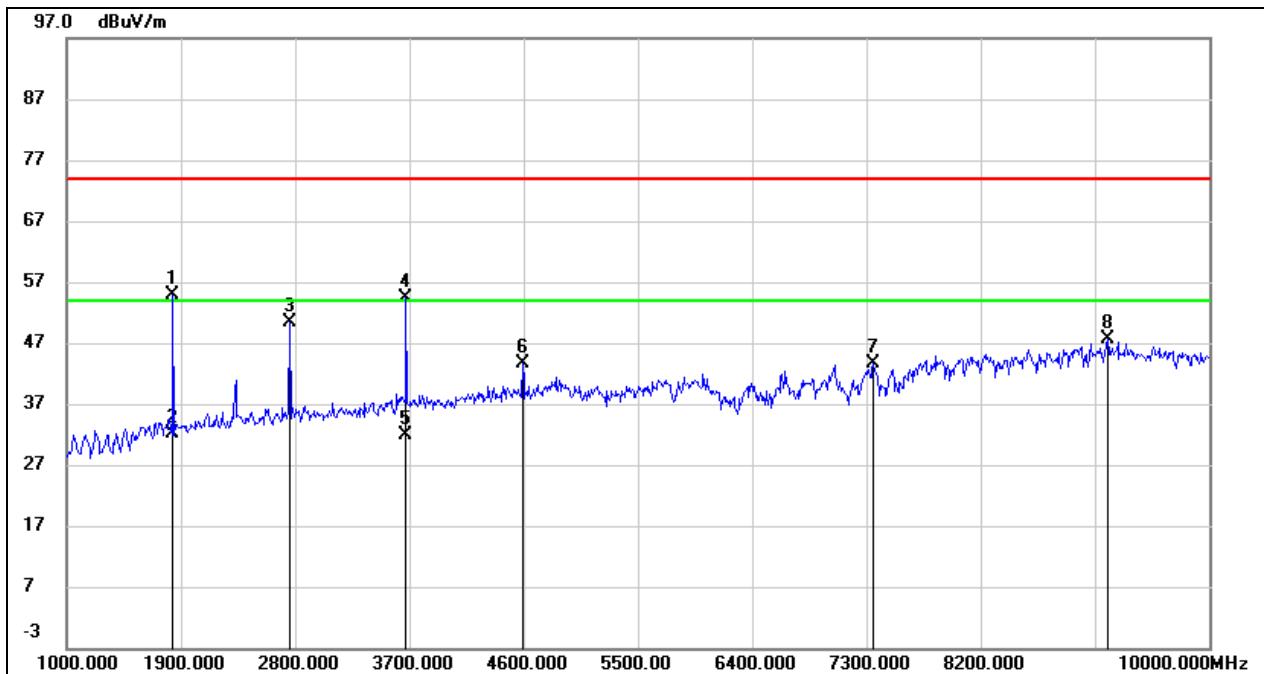


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	65.22	-10.34	54.88	74.00	-19.12	peak
2	1837.000	/	/	32.21	54.00	-21.79	AVG
3	2755.000	57.57	-7.15	50.42	74.00	-23.58	peak
4	3673.000	58.35	-3.87	54.48	74.00	-19.52	peak
5	3673.000	/	/	31.81	54.00	-22.19	AVG
6	4591.000	44.80	-1.23	43.57	74.00	-30.43	peak
7	7354.000	36.62	6.97	43.59	74.00	-30.41	peak
8	9199.000	38.07	9.59	47.66	74.00	-26.34	peak

Test Mode:	GFSK Condition 2	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

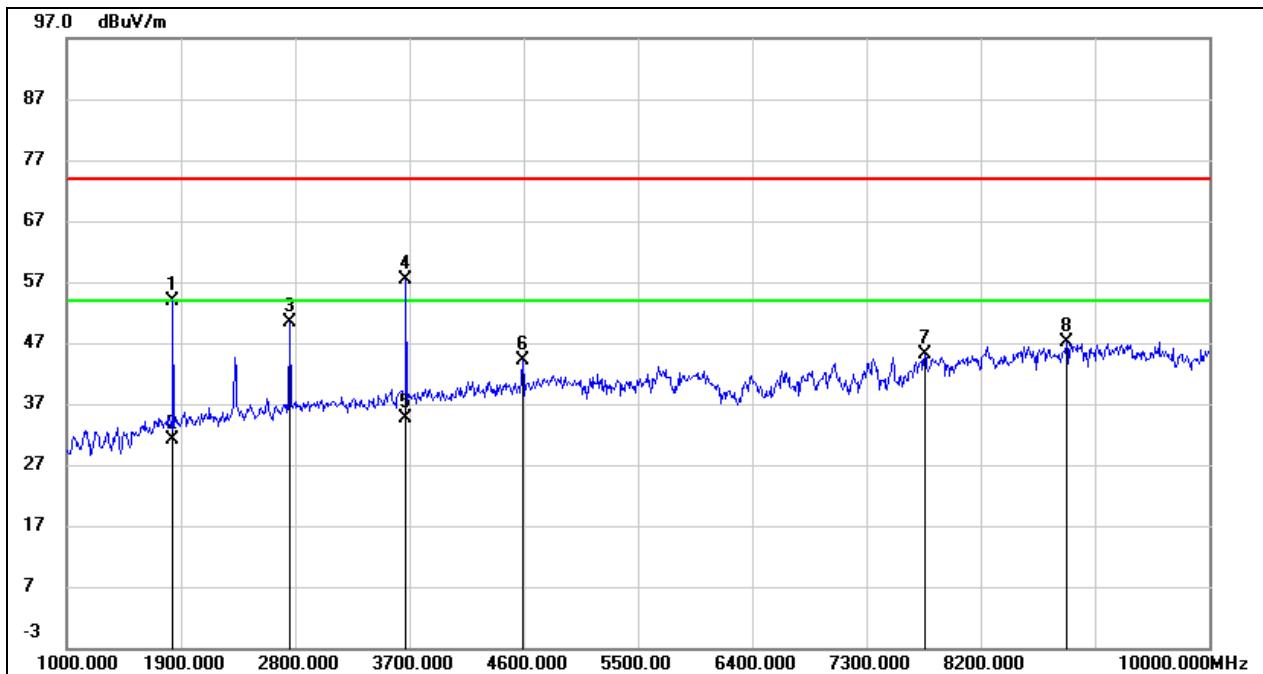


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	63.55	-9.70	53.85	74.00	-20.15	peak
2	1837.000	/	/	31.18	54.00	-22.82	AVG
3	2755.000	56.42	-6.09	50.33	74.00	-23.67	peak
4	3673.000	60.13	-2.83	57.30	74.00	-16.70	peak
5	3673.000	/	/	34.63	54.00	-19.37	AVG
6	4591.000	44.52	-0.28	44.24	74.00	-29.76	peak
7	7759.000	37.73	7.46	45.19	74.00	-28.81	peak
8	8875.000	37.75	9.42	47.17	74.00	-26.83	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	912.75
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

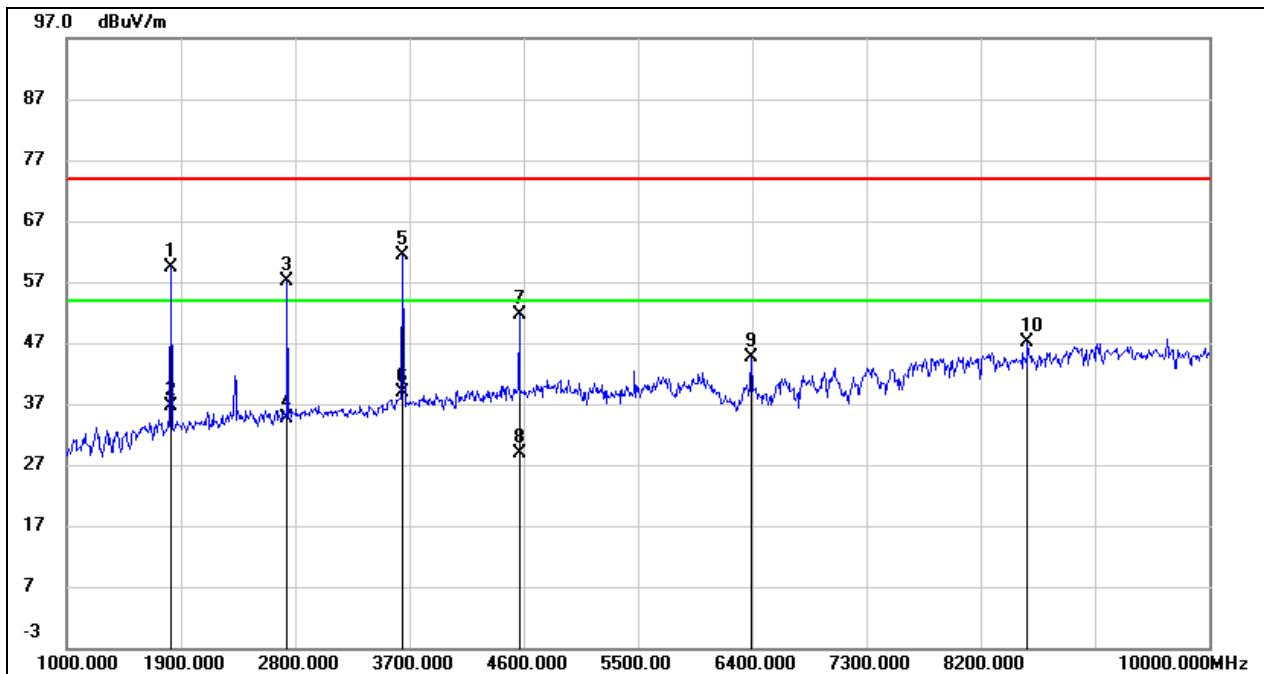


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	69.64	-10.35	59.29	74.00	-14.71	peak
2	1819.000	/	/	36.62	54.00	-17.38	AVG
3	2737.000	64.48	-7.24	57.24	74.00	-16.76	peak
4	2737.000	/	/	34.57	54.00	-19.43	AVG
5	3646.000	65.43	-3.94	61.49	74.00	-12.51	peak
6	3646.000	/	/	38.82	54.00	-15.18	AVG
7	4564.000	52.86	-1.31	51.55	74.00	-22.45	peak
8	4564.000	/	/	28.88	54.00	-25.12	AVG
9	6391.000	40.90	3.61	44.51	74.00	-29.49	peak
10	8569.000	38.97	8.15	47.12	74.00	-26.88	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	912.75
Polarity:	Vertical	Test Voltage:	DC 3.3 V

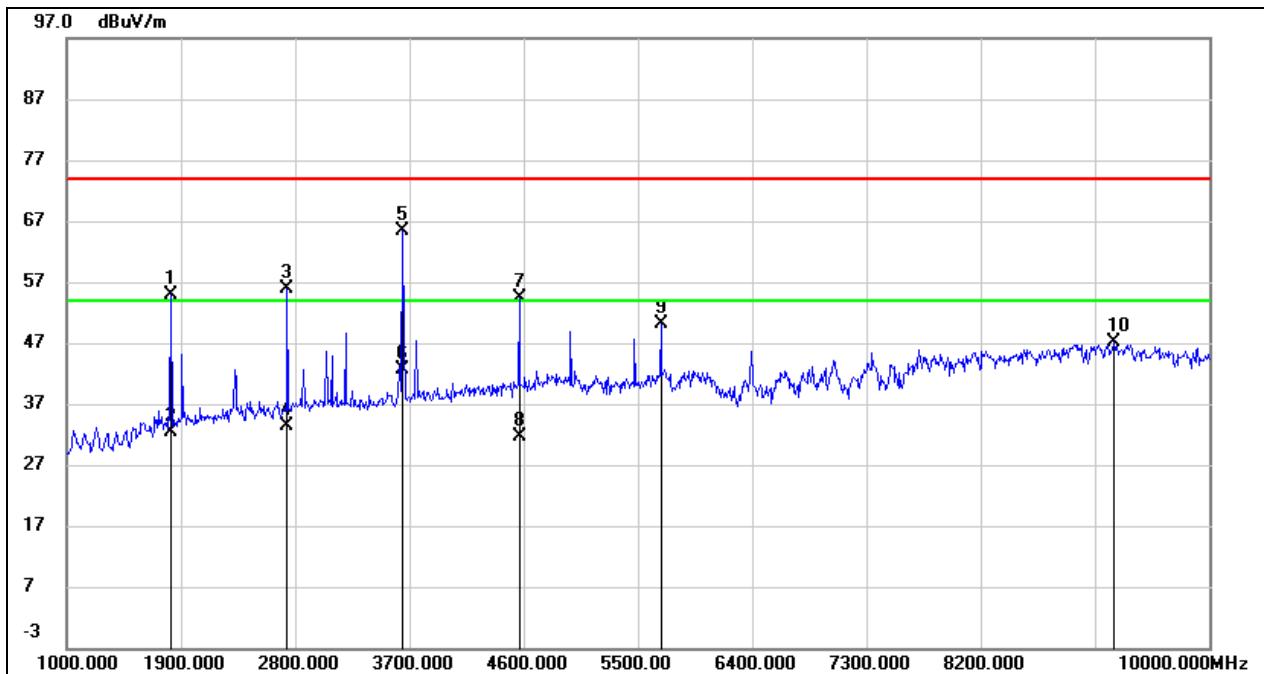


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	64.68	-9.74	54.94	74.00	-19.06	peak
2	1819.000	/	/	32.27	54.00	-21.73	AVG
3	2737.000	62.19	-6.21	55.98	74.00	-18.02	peak
4	2737.000	/	/	33.31	54.00	-20.69	AVG
5	3646.000	68.17	-2.91	65.26	74.00	-8.74	peak
6	3646.000	/	/	42.59	54.00	-11.41	AVG
7	4564.000	54.64	-0.37	54.27	74.00	-19.73	peak
8	4564.000	/	/	31.60	54.00	-22.40	AVG
9	5680.000	46.89	3.12	50.01	74.00	-23.99	peak
10	9253.000	37.18	9.90	47.08	74.00	-26.92	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	915.87
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

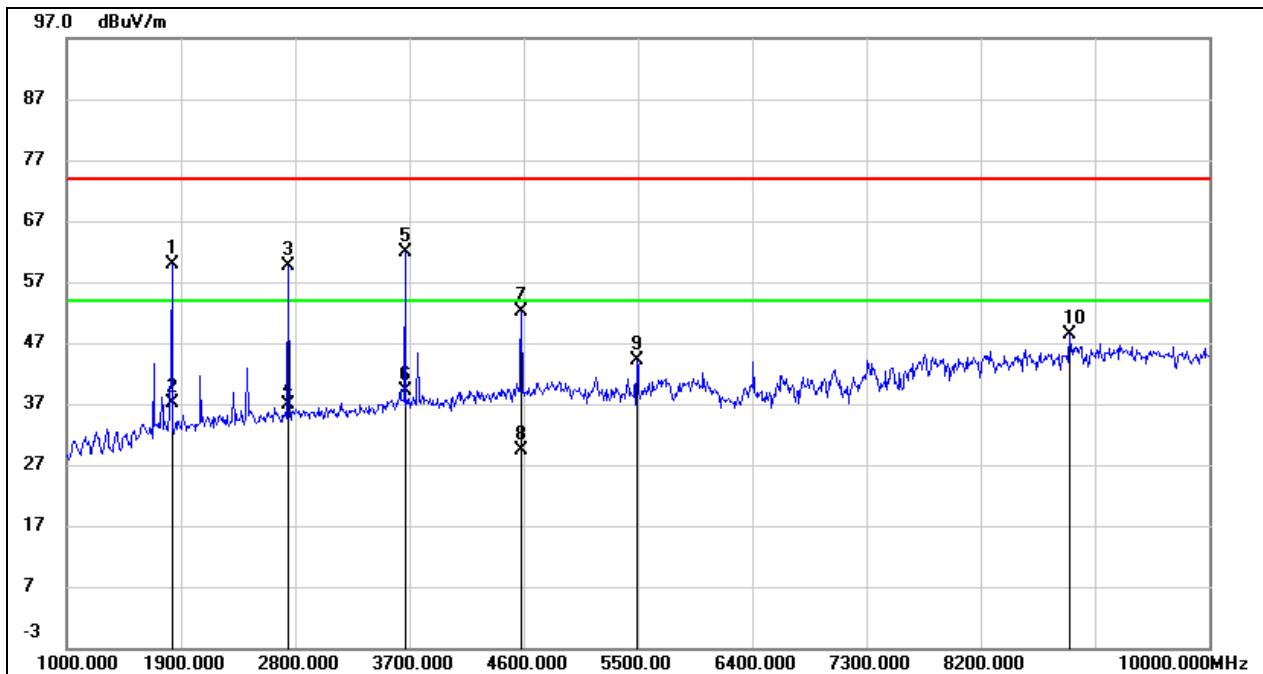


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	70.18	-10.34	59.84	74.00	-14.16	peak
2	1828.000	/	/	37.17	54.00	-16.83	AVG
3	2746.000	66.83	-7.20	59.63	74.00	-14.37	peak
4	2746.000	/	/	36.96	54.00	-17.04	AVG
5	3664.000	65.76	-3.89	61.87	74.00	-12.13	peak
6	3664.000	/	/	39.20	54.00	-14.80	AVG
7	4582.000	53.37	-1.27	52.10	74.00	-21.90	peak
8	4582.000	/	/	29.43	54.00	-24.57	AVG
9	5491.000	42.68	1.48	44.16	74.00	-29.84	peak
10	8902.000	39.00	9.29	48.29	74.00	-25.71	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	915.87
Polarity:	Vertical	Test Voltage:	DC 3.3 V

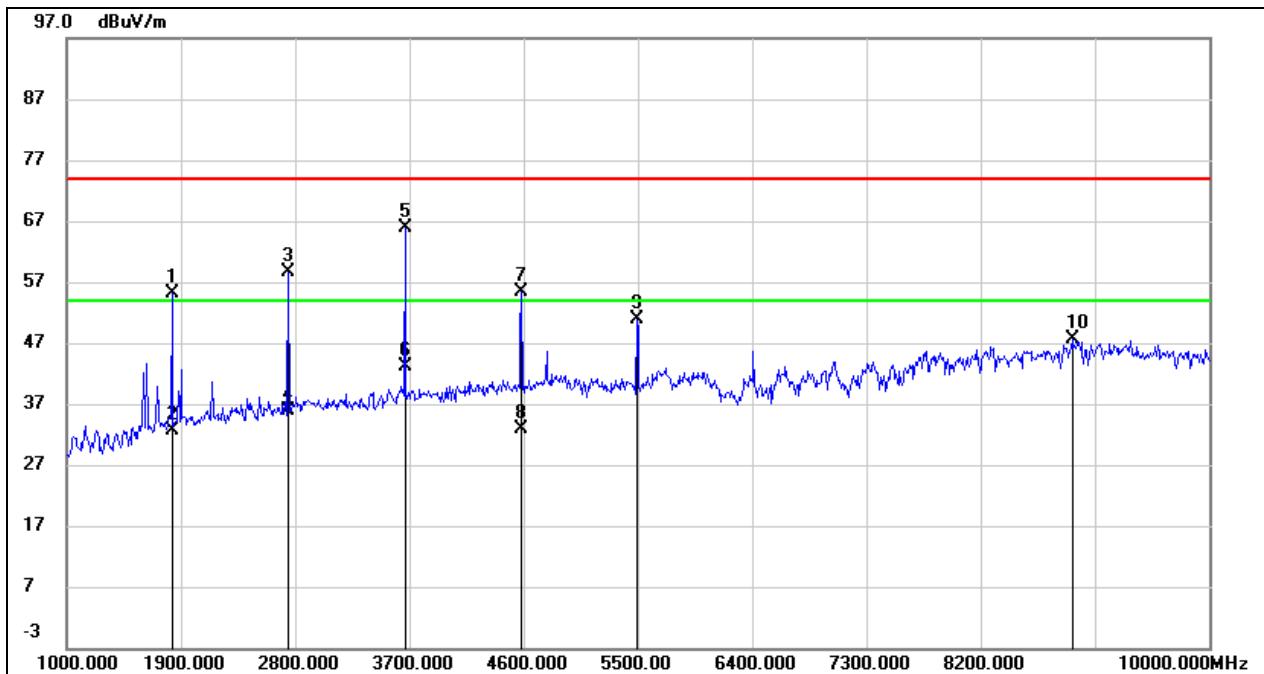


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	64.91	-9.71	55.20	74.00	-18.80	peak
2	1828.000	/	/	32.53	54.00	-21.47	AVG
3	2746.000	64.82	-6.15	58.67	74.00	-15.33	peak
4	2746.000	/	/	36.00	54.00	-18.00	AVG
5	3664.000	68.63	-2.86	65.77	74.00	-8.23	peak
6	3664.000	/	/	43.10	54.00	-10.90	AVG
7	4582.000	55.76	-0.32	55.44	74.00	-18.56	peak
8	4582.000	/	/	32.77	54.00	-21.23	AVG
9	5491.000	48.12	2.68	50.80	74.00	-23.20	peak
10	8920.000	37.76	9.95	47.71	74.00	-26.29	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

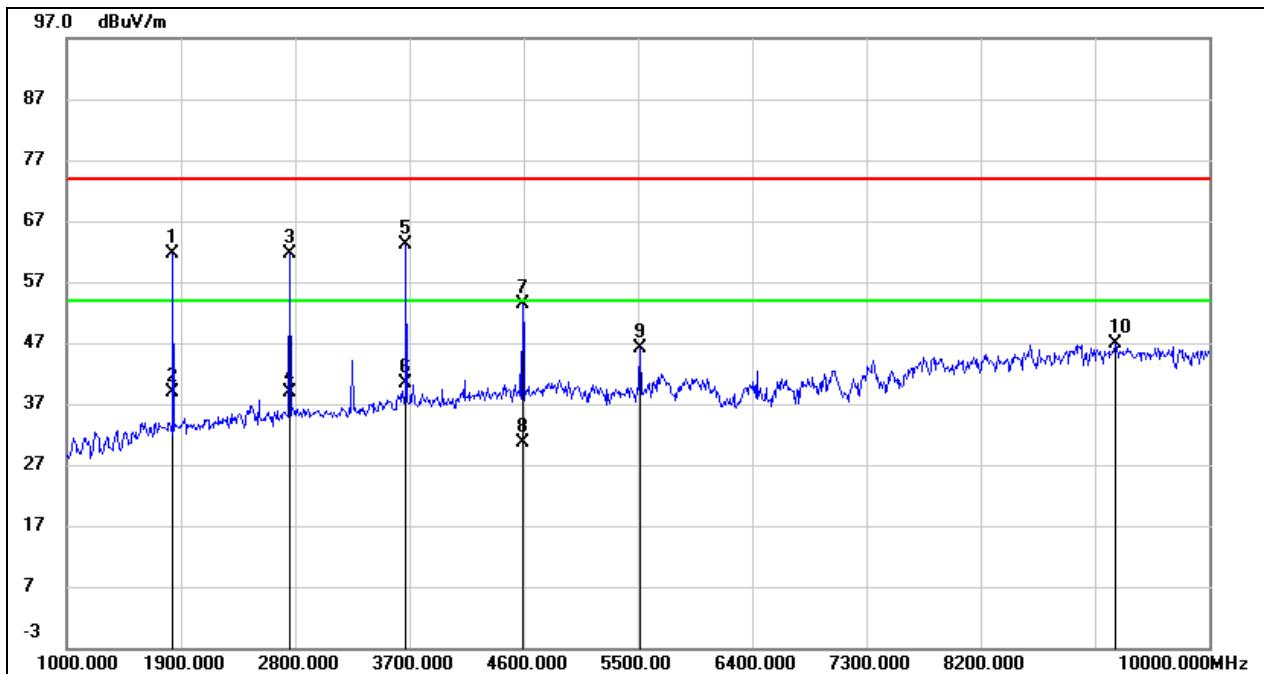


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	71.95	-10.34	61.61	74.00	-12.39	peak
2	1837.000	/	-/	38.94	54.00	-15.06	AVG
3	2755.000	68.70	-7.15	61.55	74.00	-12.45	peak
4	2755.000	/	/	38.88	54.00	-15.12	AVG
5	3673.000	66.92	-3.87	63.05	74.00	-10.95	peak
6	3673.000	/	/	40.38	54.00	-13.62	AVG
7	4591.000	54.51	-1.23	53.28	74.00	-20.72	peak
8	4591.000	/	/	30.61	54.00	-23.39	AVG
9	5518.000	44.43	1.61	46.04	74.00	-27.96	peak
10	9262.000	37.02	9.74	46.76	74.00	-27.24	peak

Test Mode:	GFSK Condition 3	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

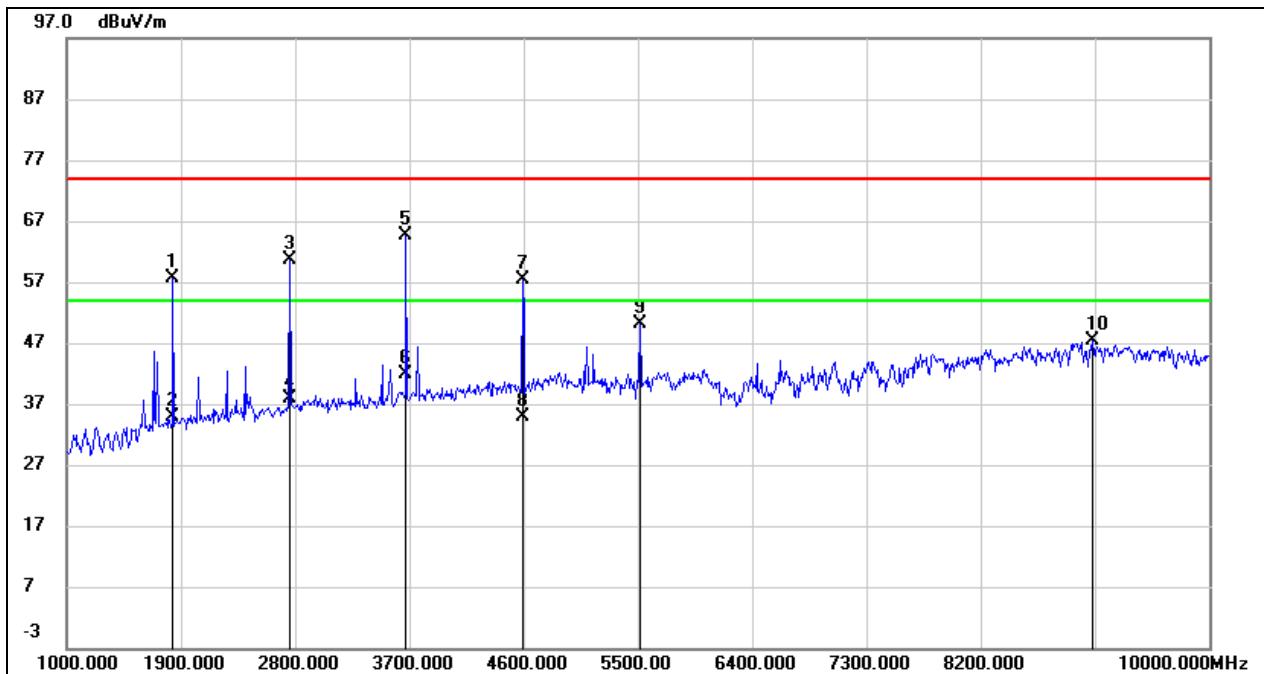


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	67.35	-9.70	57.65	74.00	-16.35	peak
2	1837.000	/	/	34.98	54.00	-19.02	AVG
3	2755.000	66.64	-6.09	60.55	74.00	-13.45	peak
4	2755.000	/	/	37.88	54.00	-16.12	AVG
5	3673.000	67.45	-2.83	64.62	74.00	-9.38	peak
6	3673.000	/	/	41.95	54.00	-12.05	AVG
7	4591.000	57.78	-0.28	57.50	74.00	-16.50	peak
8	4591.000	/	/	34.83	54.00	-19.17	AVG
9	5518.000	47.31	2.80	50.11	74.00	-23.89	peak
10	9082.000	36.84	10.45	47.29	74.00	-26.71	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	912.75
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

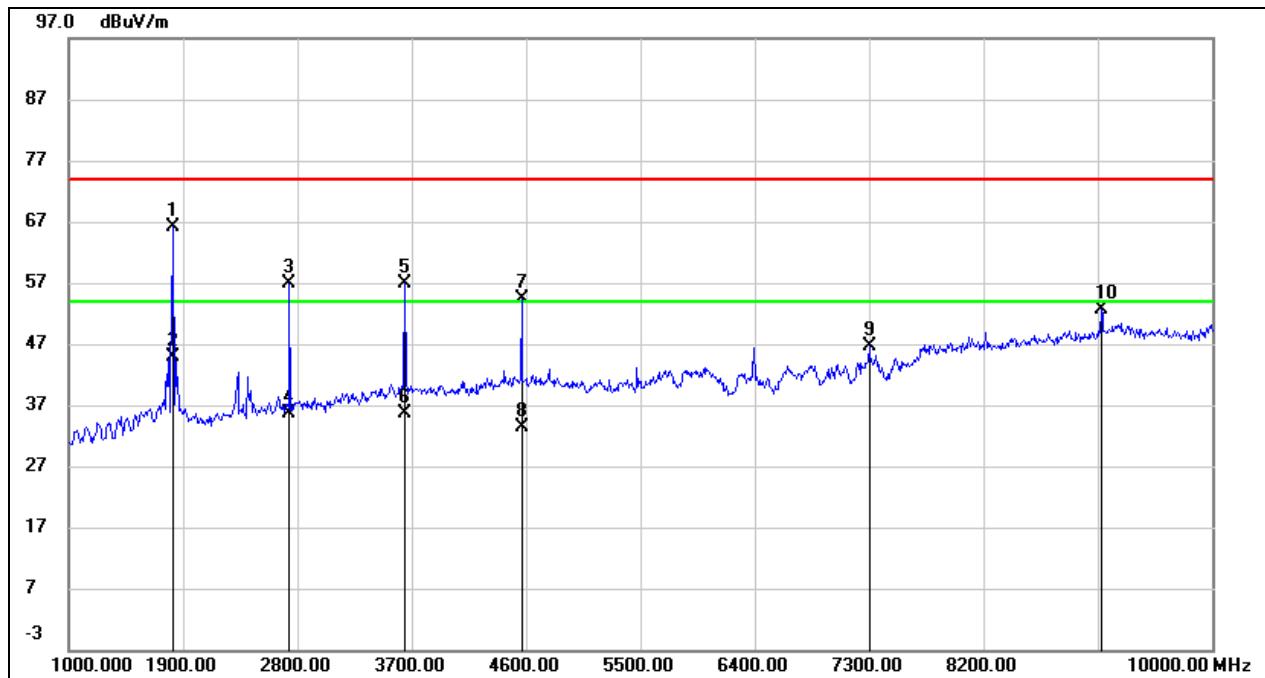


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	75.68	-9.58	66.10	74.00	-7.90	peak
2	1819.000	/	/	44.97	54.00	-9.03	AVG
3	2737.000	64.05	-7.17	56.88	74.00	-17.12	peak
4	2737.000	/	/	35.75	54.00	-18.25	AVG
5	3646.000	60.17	-3.29	56.88	74.00	-17.12	peak
6	3646.000	/	/	35.75	54.00	-18.25	AVG
7	4564.000	55.73	-1.31	54.42	74.00	-19.58	peak
8	4564.000	/	/	33.29	54.00	-20.71	AVG
9	7300.000	39.79	6.83	46.62	74.00	-27.38	peak
10	9127.000	41.76	10.91	52.67	74.00	-21.33	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	912.75
Polarity:	Vertical	Test Voltage:	DC 3.3 V

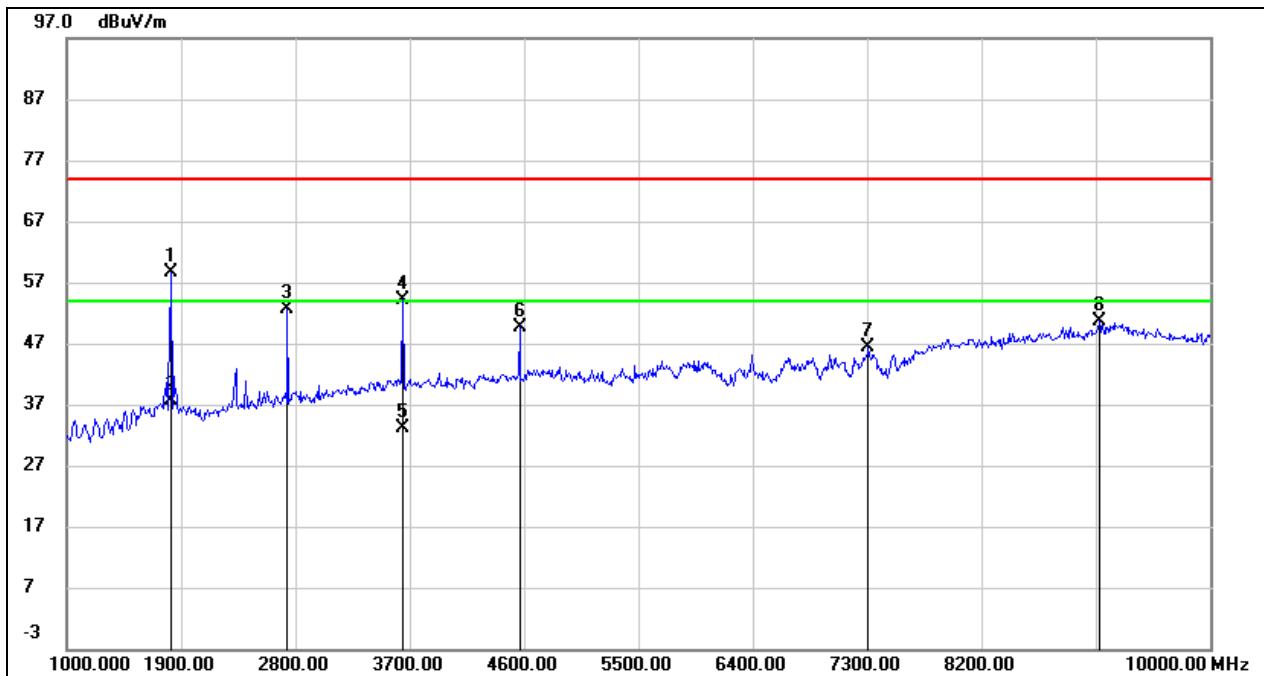


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	67.67	-8.97	58.70	74.00	-15.30	peak
2	1819.000	/	/	37.57	54.00	-16.43	AVG
3	2737.000	58.79	-6.14	52.65	74.00	-21.35	peak
4	3646.000	56.41	-2.26	54.15	74.00	-19.85	peak
5	3646.000	/	/	33.20	54.00	-20.80	AVG
6	4564.000	50.00	-0.37	49.63	74.00	-24.37	peak
7	7309.000	38.79	7.50	46.29	74.00	-27.71	peak
8	9127.000	39.33	11.21	50.54	74.00	-23.46	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	915.87
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

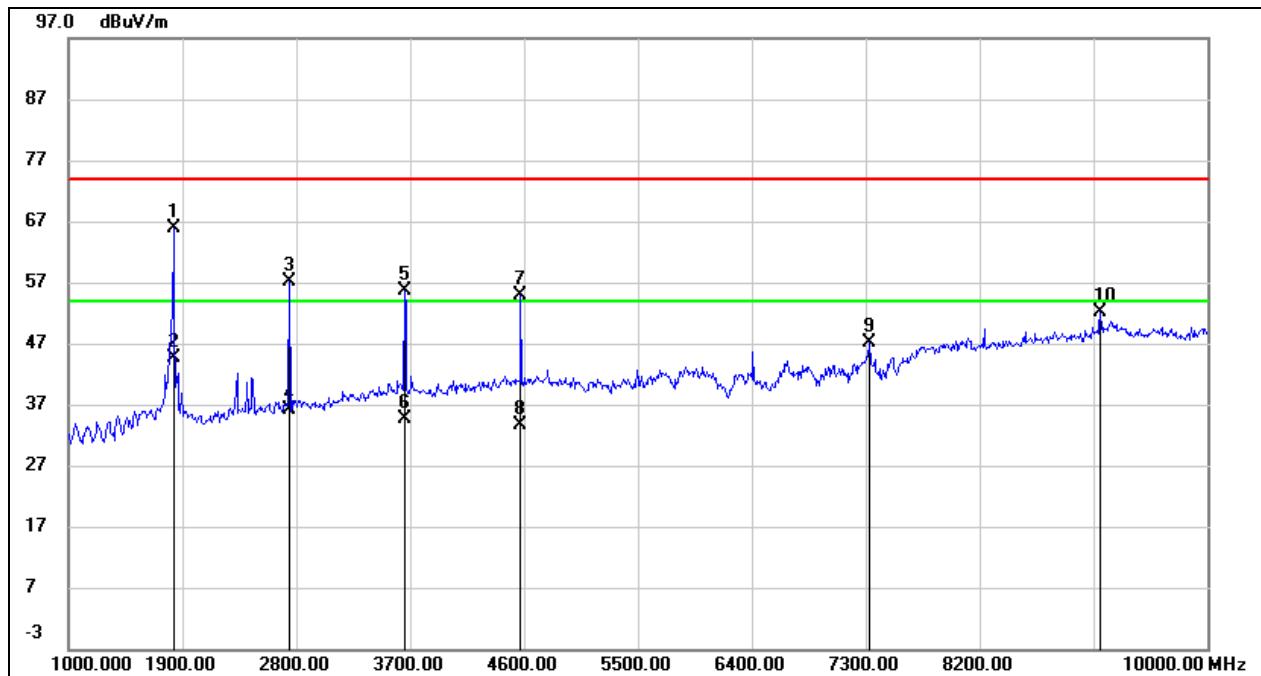


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	75.45	-9.59	65.86	74.00	-8.14	peak
2	1828.000	/	/	44.72	54.00	-9.28	AVG
3	2746.000	64.34	-7.13	57.21	74.00	-16.79	peak
4	2746.000	/	/	36.08	54.00	-17.92	AVG
5	3664.000	58.93	-3.29	55.64	74.00	-18.36	peak
6	3664.000	/	/	34.51	54.00	-19.49	AVG
7	4579.000	56.08	-1.28	54.80	74.00	-19.20	peak
8	4579.000	/	/	33.67	54.00	-20.33	AVG
9	7327.000	40.35	6.86	47.21	74.00	-26.79	peak
10	9154.000	41.09	11.04	52.13	74.00	-21.87	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	915.87
Polarity:	Vertical	Test Voltage:	DC 3.3 V

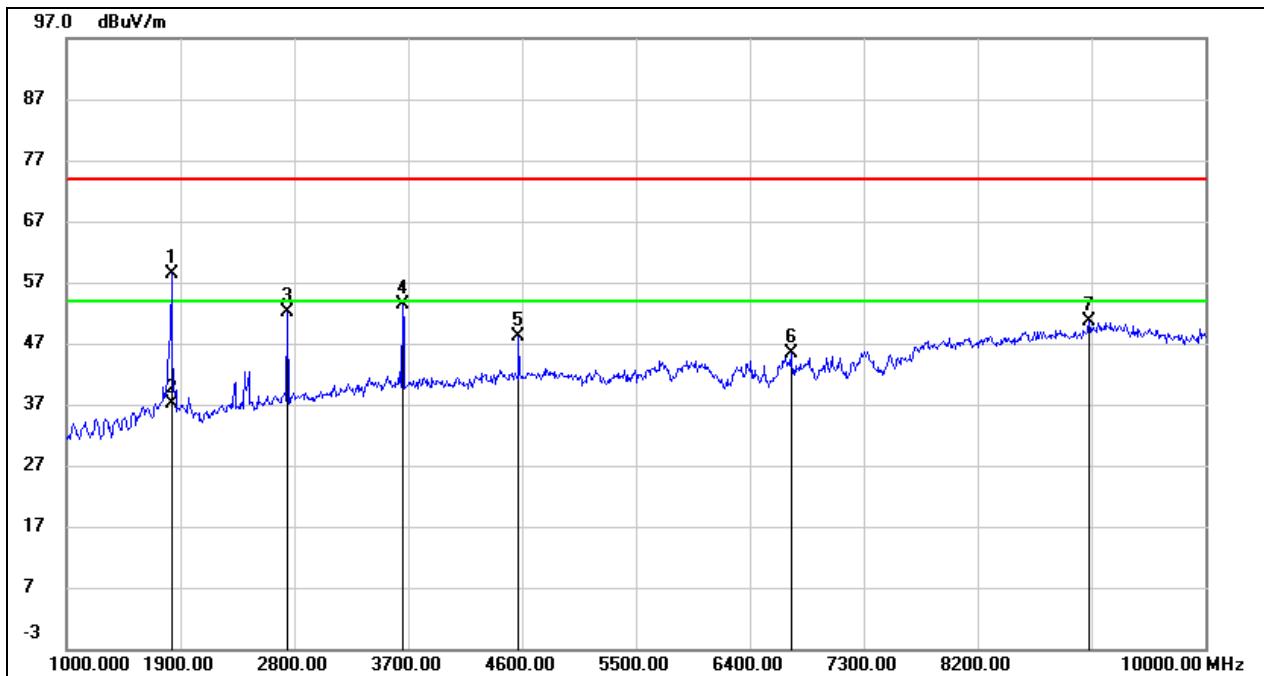


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	67.33	-8.96	58.37	74.00	-15.63	peak
2	1828.000	/	/	37.24	54.00	-16.76	AVG
3	2746.000	58.20	-6.08	52.12	74.00	-21.88	peak
4	3655.000	55.54	-2.26	53.28	74.00	-20.72	peak
5	4573.000	48.58	-0.34	48.24	74.00	-25.76	peak
6	6724.000	39.52	5.90	45.42	74.00	-28.58	peak
7	9082.000	39.57	11.03	50.60	74.00	-23.40	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

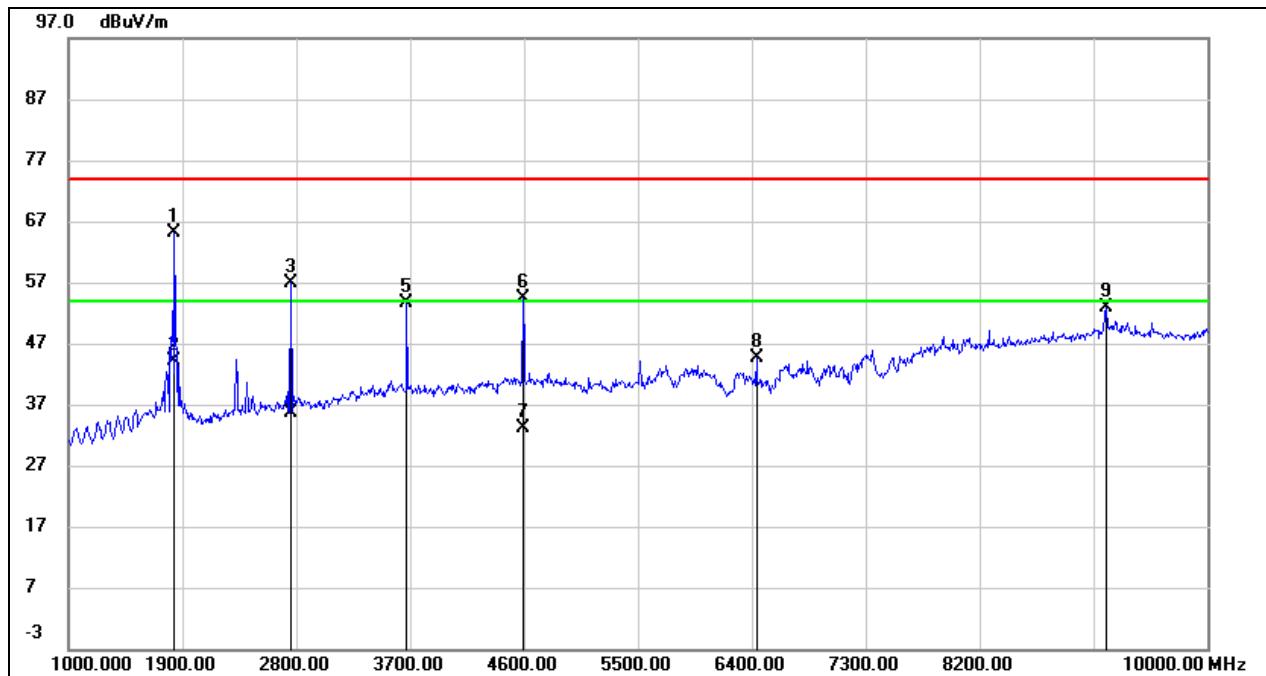


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	74.79	-9.61	65.18	74.00	-8.82	peak
2	1837.000	/	/	44.05	54.00	-9.95	AVG
3	2755.000	63.91	-7.10	56.81	74.00	-17.19	peak
4	2755.000	/	/	35.68	54.00	-18.32	AVG
5	3673.000	57.01	-3.30	53.71	74.00	-20.29	peak
6	4591.000	55.61	-1.24	54.37	74.00	-19.63	peak
7	4591.000	/	/	33.24	54.00	-20.76	AVG
8	6436.000	40.65	4.08	44.73	74.00	-29.27	peak
9	9199.000	41.72	11.26	52.98	74.00	-21.02	peak

Test Mode:	GFSK Condition 4	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

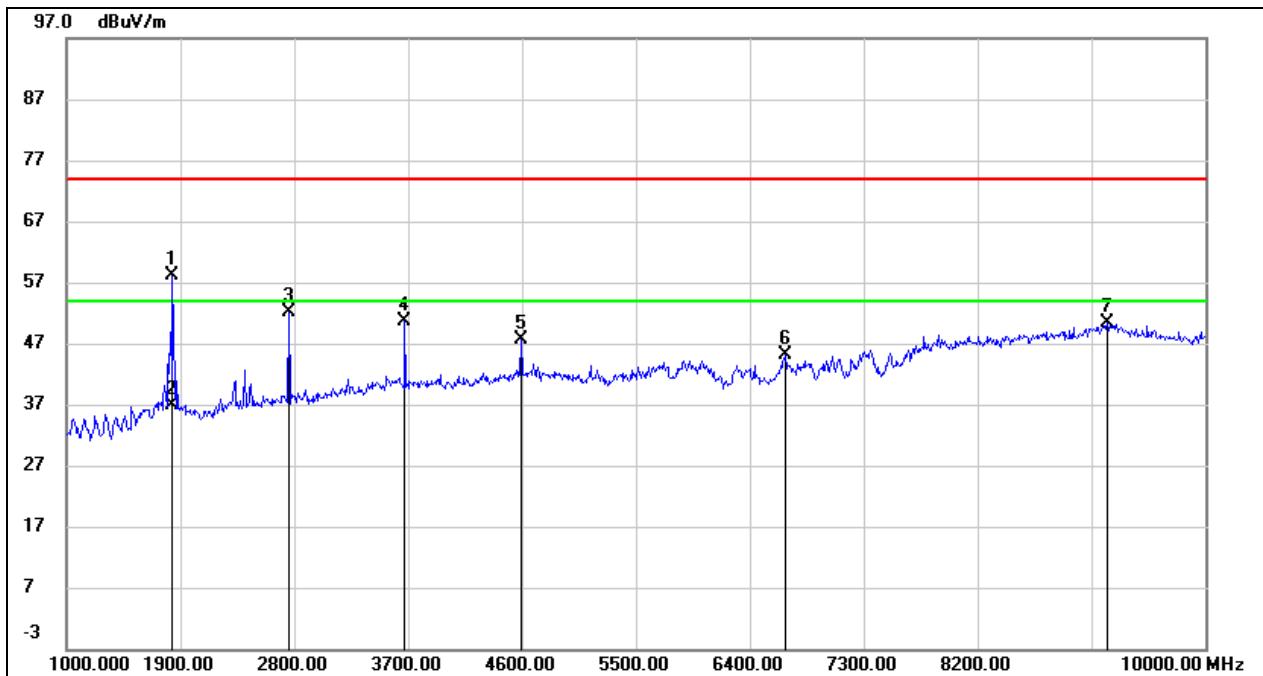


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	67.03	-8.97	58.06	74.00	-15.94	peak
2	1837.000	/	/	36.93	54.00	-17.07	AVG
3	2755.000	58.11	-6.04	52.07	74.00	-21.93	peak
4	3673.000	52.91	-2.26	50.65	74.00	-23.35	peak
5	4591.000	47.93	-0.29	47.64	74.00	-26.36	peak
6	6679.000	39.41	5.72	45.13	74.00	-28.87	peak
7	9226.000	38.83	11.53	50.36	74.00	-23.64	peak

Test Mode:	GFSK Condition 5	Frequency(MHz):	912.75
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

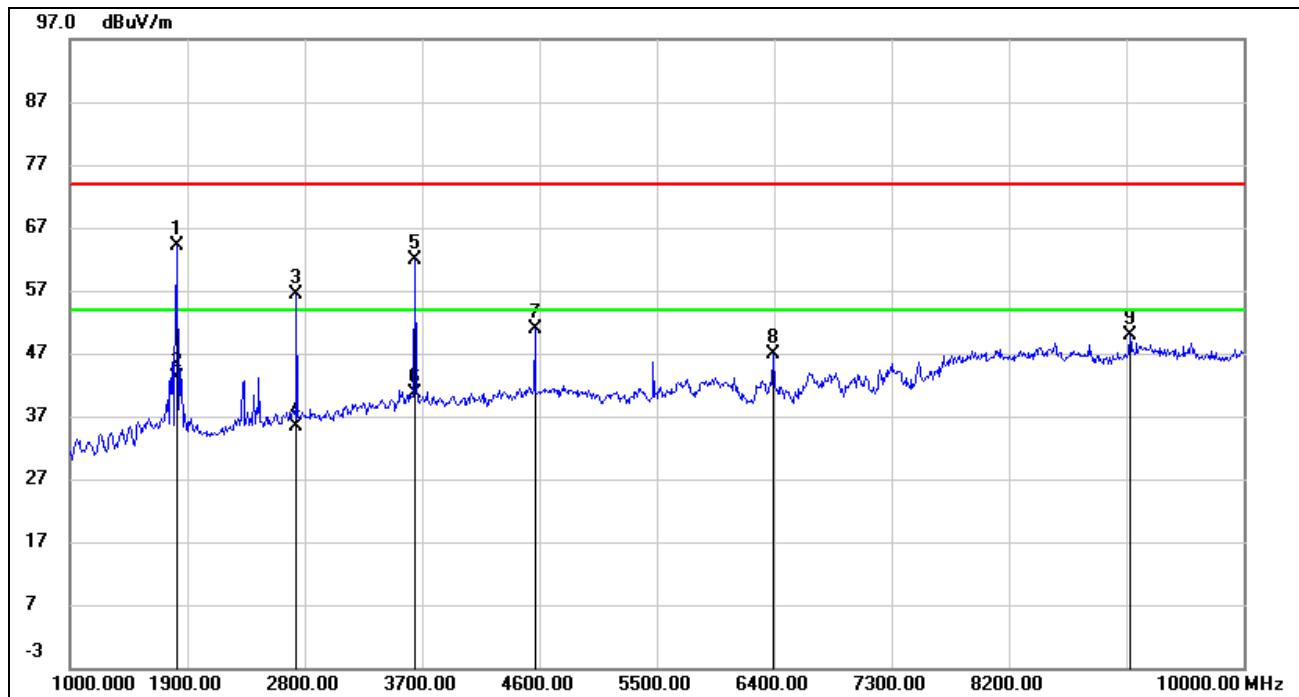


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	73.79	-9.58	64.21	74.00	-9.79	peak
2	1819.000	/	/	43.08	54.00	-10.92	AVG
3	2737.000	63.59	-7.17	56.42	74.00	-17.58	peak
4	2737.000	/	/	35.29	54.00	-18.71	AVG
5	3646.000	65.16	-3.29	61.87	74.00	-12.13	peak
6	3646.000	/	/	40.74	54.00	-13.26	AVG
7	4564.000	52.12	-1.31	50.81	74.00	-23.19	peak
8	6391.000	42.90	3.95	46.85	74.00	-27.15	peak
9	9127.000	38.98	10.91	49.89	74.00	-24.11	peak

Test Mode:	GFSK Condition 5	Frequency(MHz):	912.75
Polarity:	Vertical	Test Voltage:	DC 3.3 V

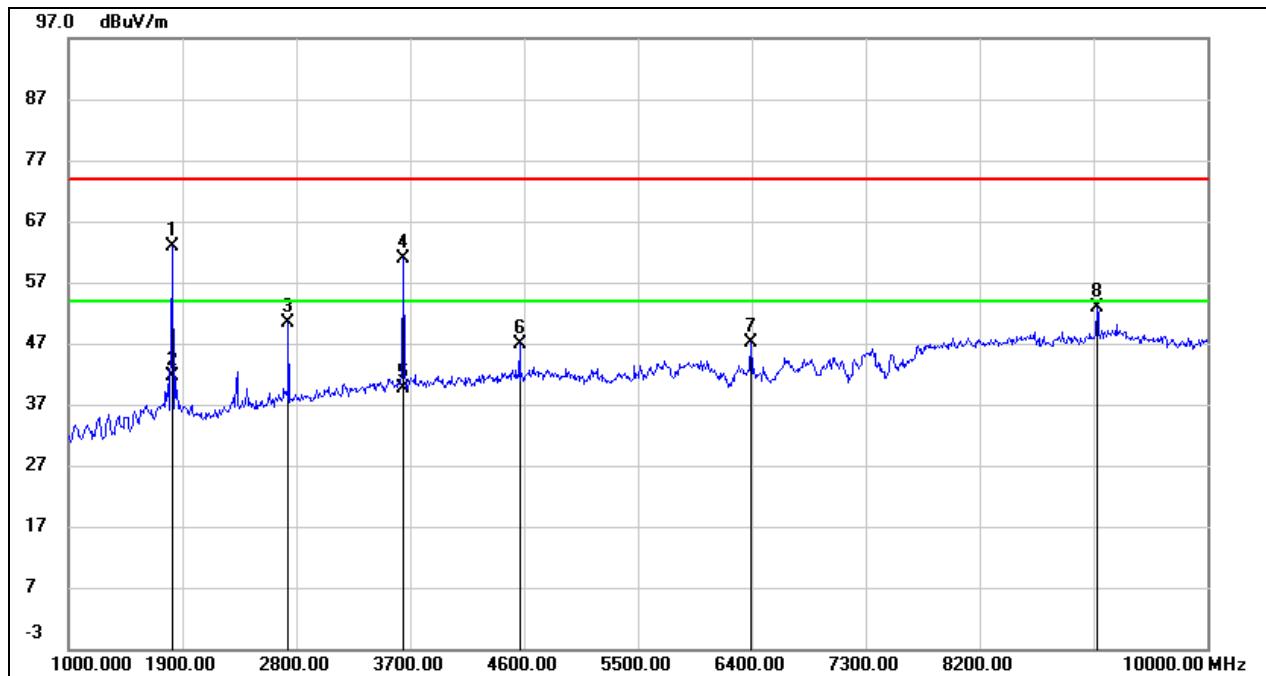


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1819.000	71.83	-8.97	62.86	74.00	-11.14	peak
2	1819.000	/	/	41.73	54.00	-12.27	AVG
3	2737.000	56.40	-6.14	50.26	74.00	-23.74	peak
4	3646.000	63.02	-2.26	60.76	74.00	-13.24	peak
5	3646.000	/	/	39.63	54.00	-14.37	AVG
6	4564.000	47.19	-0.37	46.82	74.00	-27.18	peak
7	6391.000	42.25	4.80	47.05	74.00	-26.95	peak
8	9127.000	41.56	11.21	52.77	74.00	-21.23	peak

Test Mode:	GFSK Condition 5	Frequency(MHz):	915.87
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

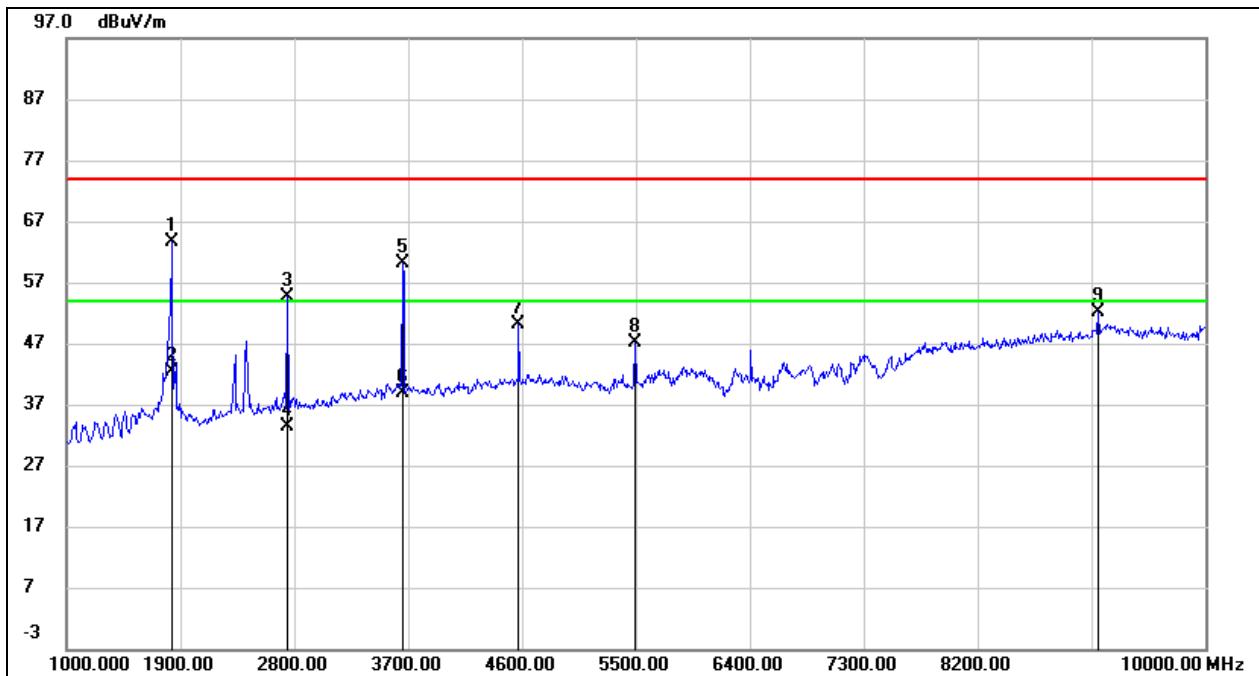


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	73.10	-9.59	63.51	74.00	-10.49	peak
2	1828.000	/	/	42.40	54.00	-11.60	AVG
3	2746.000	61.66	-7.13	54.53	74.00	-19.47	peak
4	2746.000	/	/	33.40	54.00	-20.60	AVG
5	3664.000	63.37	-3.29	60.08	74.00	-13.92	peak
6	3664.000	/	/	38.95	54.00	-15.05	AVG
7	4579.000	51.38	-1.28	50.10	74.00	-23.90	peak
8	5491.000	45.93	1.10	47.03	74.00	-26.97	peak
9	9154.000	41.19	11.04	52.23	74.00	-21.77	peak

Test Mode:	GFSK Condition 5	Frequency(MHz):	915.87
Polarity:	Vertical	Test Voltage:	DC 3.3 V

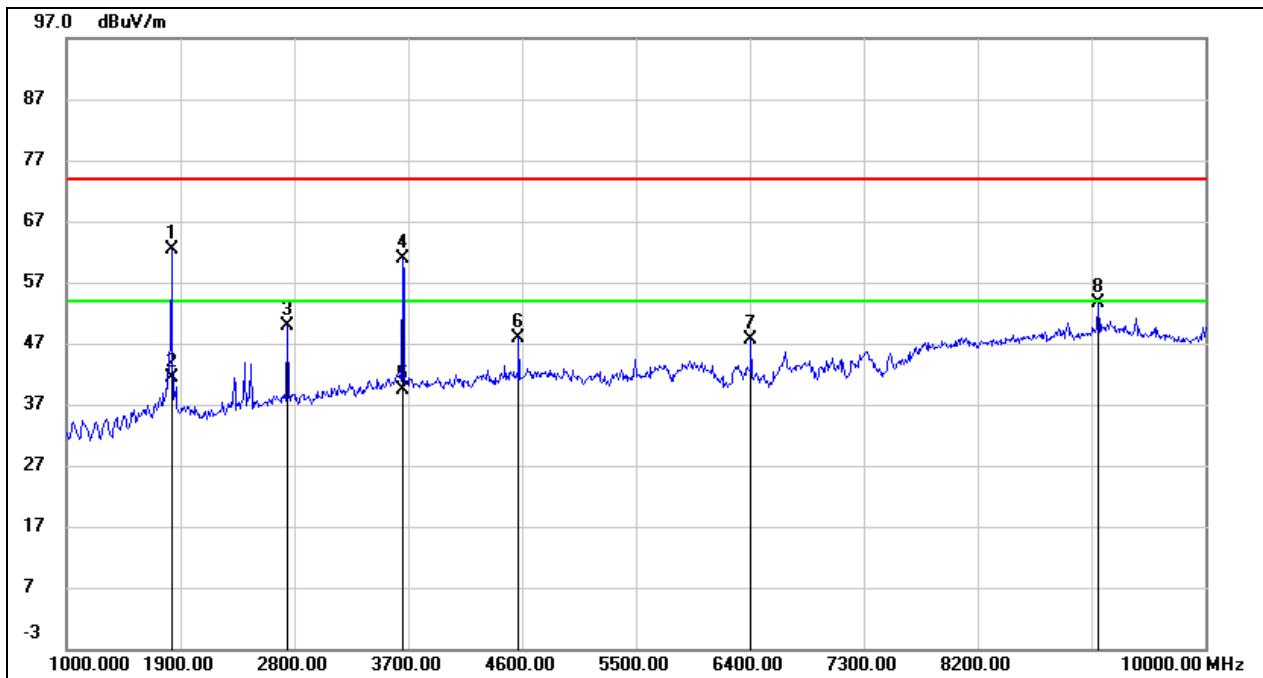


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1828.000	71.35	-8.96	62.39	74.00	-11.61	peak
2	1828.000	/	/	41.26	54.00	-12.74	AVG
3	2746.000	55.93	-6.08	49.85	74.00	-24.15	peak
4	3664.000	63.12	-2.26	60.86	74.00	-13.14	peak
5	3664.000	/	/	39.37	54.00	-14.63	AVG
6	4579.000	48.22	-0.34	47.88	74.00	-26.12	peak
7	6409.000	42.80	4.84	47.64	74.00	-26.36	peak
8	9154.000	42.30	11.31	53.61	74.00	-20.39	peak

Test Mode:	GFSK Condition 5	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

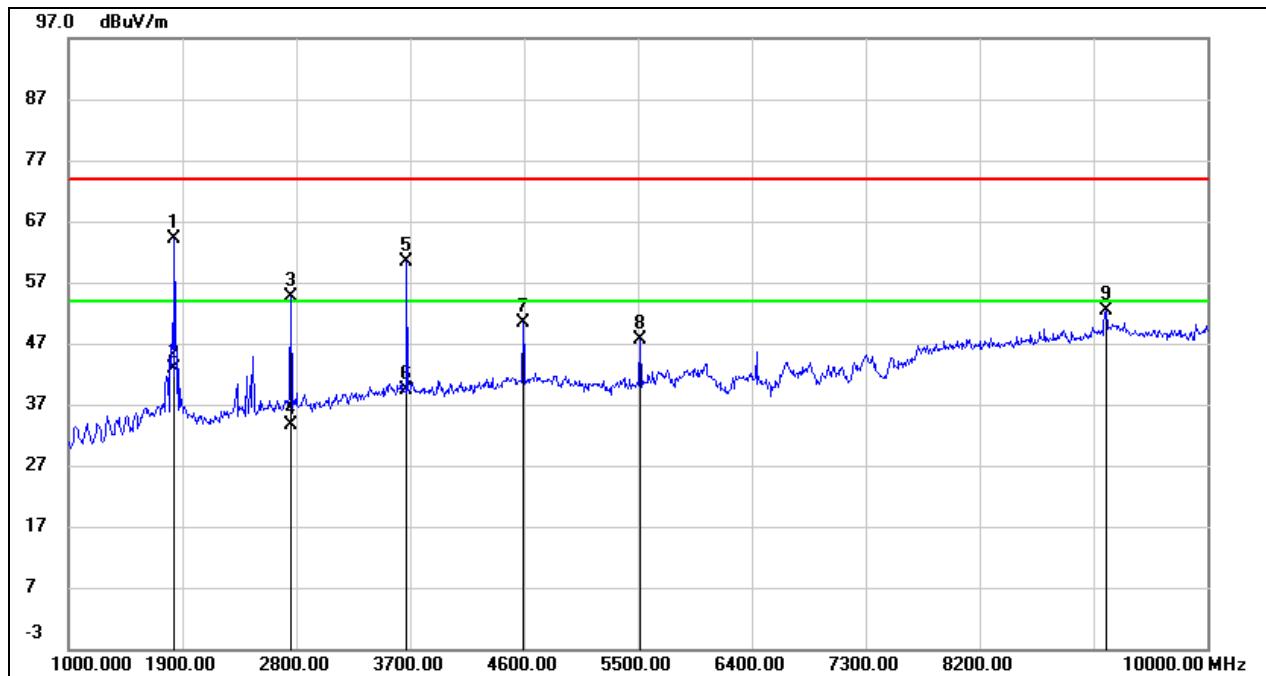

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	73.70	-9.61	64.09	74.00	-9.91	peak
2	1837.000	/	/	42.96	54.00	-11.04	AVG
3	2755.000	61.80	-7.10	54.70	74.00	-19.30	peak
4	2755.000	/	/	33.57	54.00	-20.43	AVG
5	3673.000	63.78	-3.30	60.48	74.00	-13.52	peak
6	3673.000	/	/	39.35	54.00	-14.65	AVG
7	4591.000	51.69	-1.24	50.45	74.00	-23.55	peak
8	5518.000	46.38	1.18	47.56	74.00	-26.44	peak
9	9199.000	41.01	11.26	52.27	74.00	-21.73	peak


Test Mode:	GFSK Condition 5	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

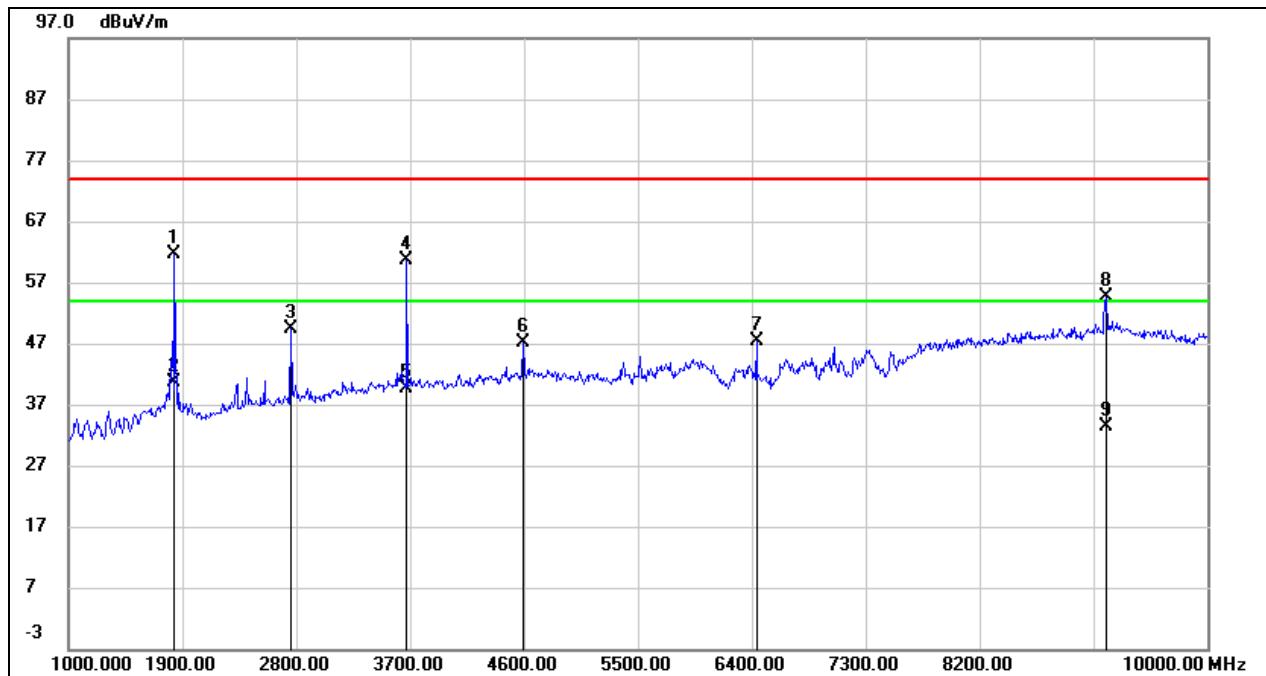

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1837.000	70.63	-8.97	61.66	74.00	-12.34	peak
2	1837.000	/	/	40.53	54.00	-13.47	AVG
3	2755.000	55.36	-6.04	49.32	74.00	-24.68	peak
4	3673.000	63.01	-2.26	60.75	74.00	-13.25	peak
5	3673.000	/	/	39.62	54.00	-14.38	AVG
6	4591.000	47.47	-0.29	47.18	74.00	-26.82	peak
7	6436.000	42.35	4.91	47.26	74.00	-26.74	peak
8	9199.000	43.12	11.50	54.62	74.00	-19.38	peak
9	9199.000	/	/	33.47	54.00	-20.53	AVG


## 8.2. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

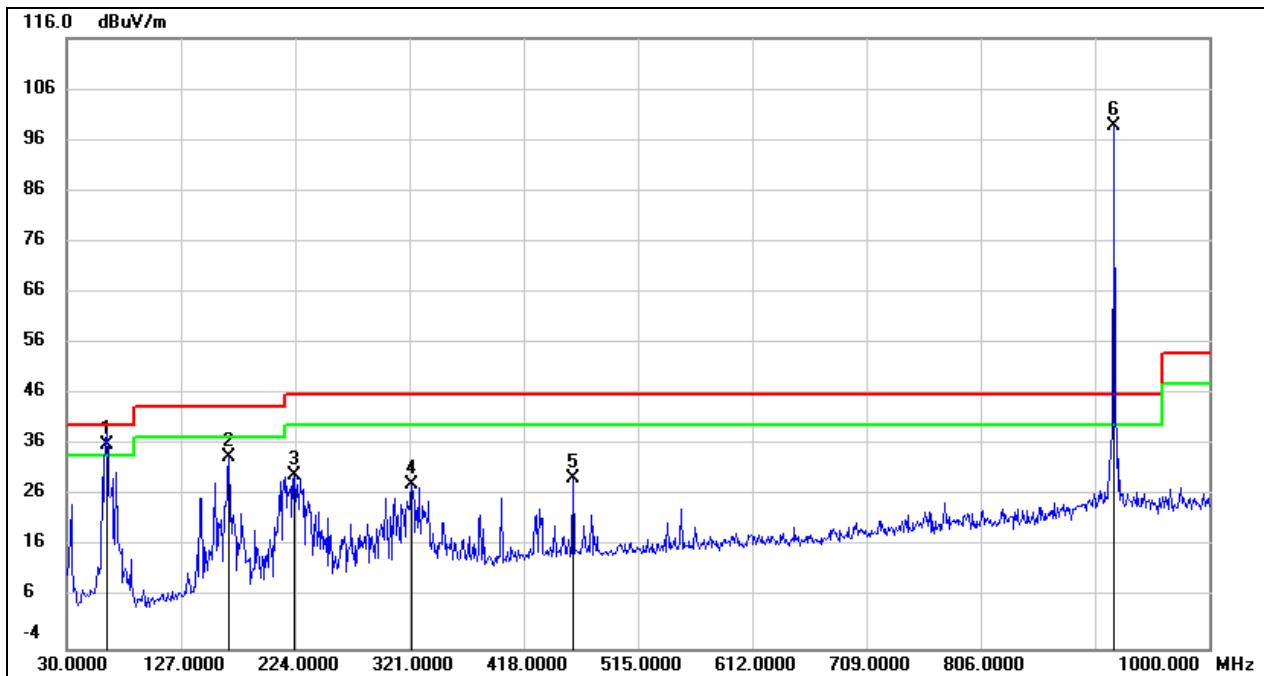

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	63.9500	51.37	-15.27	36.10	40.00	-3.90	QP
2	167.7400	46.02	-12.29	33.73	43.50	-9.77	QP
3	223.0300	43.24	-13.19	30.05	46.00	-15.95	QP
4	322.9400	38.98	-10.62	28.36	46.00	-17.64	QP
5	459.7100	37.96	-8.44	29.52	46.00	-16.48	QP
6	919.4900	100.12	-1.43	98.69	/	/	fundamental


Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Vertical	Test Voltage:	DC 3.3 V

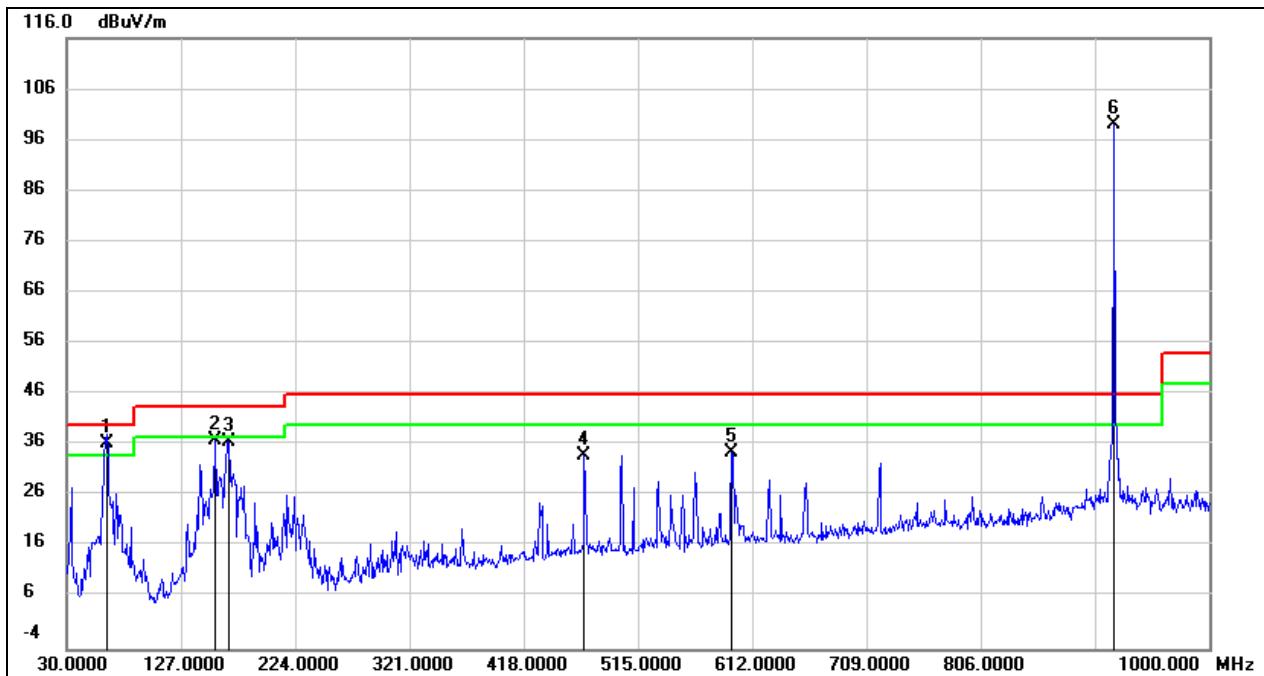

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	63.9500	51.50	-15.27	36.23	40.00	-3.77	QP
2	156.1000	49.93	-13.05	36.88	43.50	-6.62	QP
3	167.7400	48.84	-12.29	36.55	43.50	-6.95	QP
4	469.4100	42.21	-8.36	33.85	46.00	-12.15	QP
5	594.5400	40.89	-6.34	34.55	46.00	-11.45	QP
6	919.2200	100.57	-1.43	99.14	/	/	fundamental


### 8.3. SPURIOUS EMISSIONS BELOW 30 MHz

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

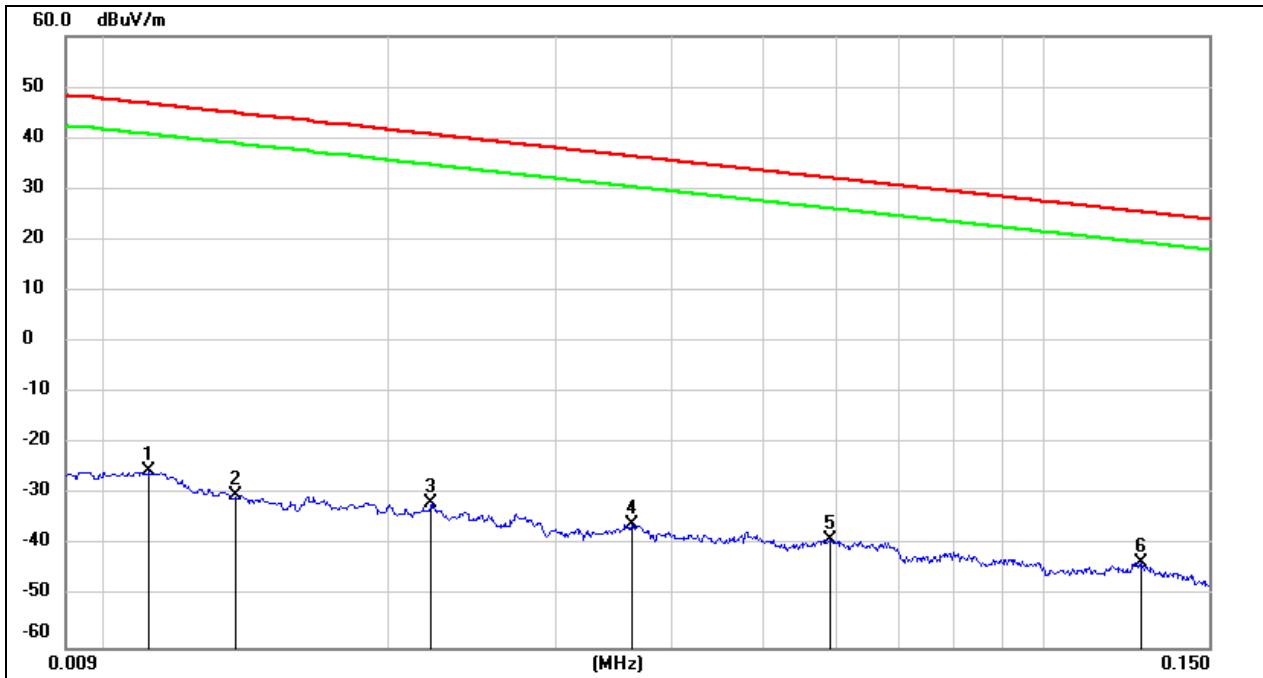


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0111	75.95	-101.39	-25.44	46.69	-76.94	-4.81	-72.13	peak
2	0.0137	71.30	-101.38	-30.08	44.87	-81.58	-6.63	-74.95	peak
3	0.0221	69.63	-101.35	-31.72	40.71	-83.22	-10.79	-72.43	peak
4	0.0362	65.51	-101.42	-35.91	36.43	-87.41	-15.07	-72.34	peak
5	0.0589	62.81	-101.52	-38.71	32.20	-90.21	-19.30	-70.91	peak
6	0.1272	58.35	-101.71	-43.36	25.52	-94.86	-25.98	-68.88	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

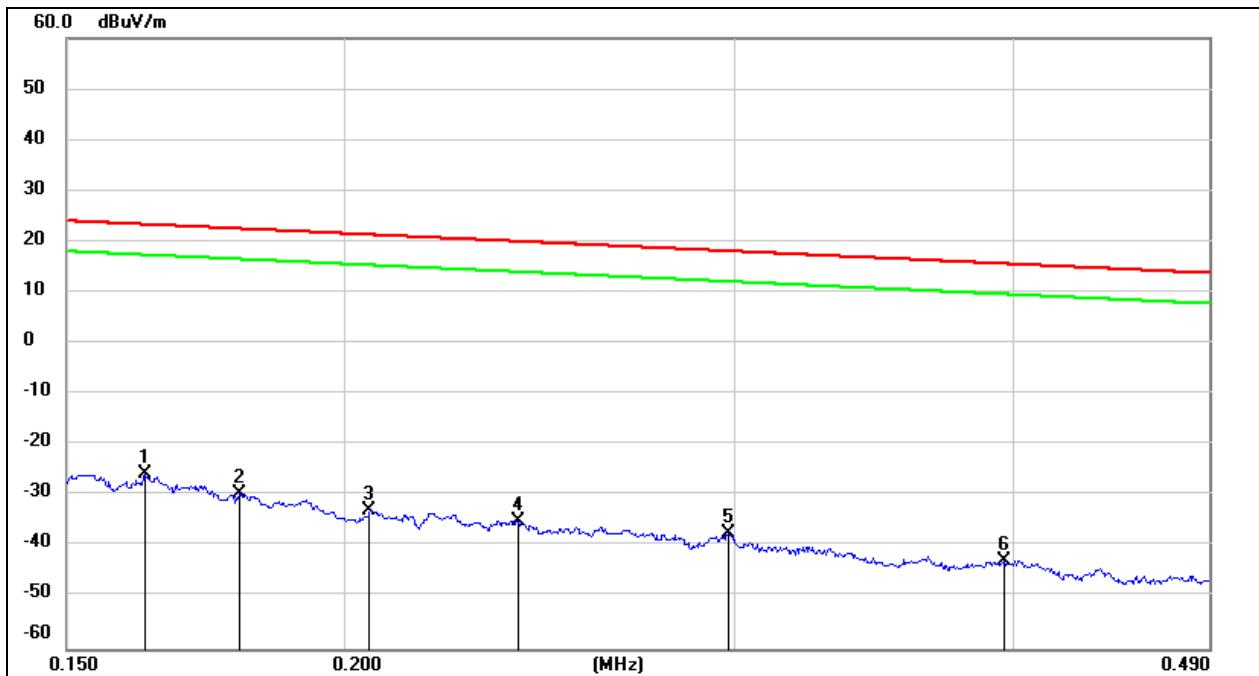

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1625	75.89	-101.65	-25.76	23.39	-77.26	-28.11	-49.15	peak
2	0.1794	72.27	-101.68	-29.41	22.53	-80.91	-28.97	-51.94	peak
3	0.2053	68.79	-101.73	-32.94	21.35	-84.44	-30.15	-54.29	peak
4	0.2394	66.97	-101.78	-34.81	20.02	-86.31	-31.48	-54.83	peak
5	0.2977	64.41	-101.85	-37.44	18.13	-88.94	-33.37	-55.57	peak
6	0.3966	59.18	-101.96	-42.78	15.63	-94.28	-35.87	-58.41	peak

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

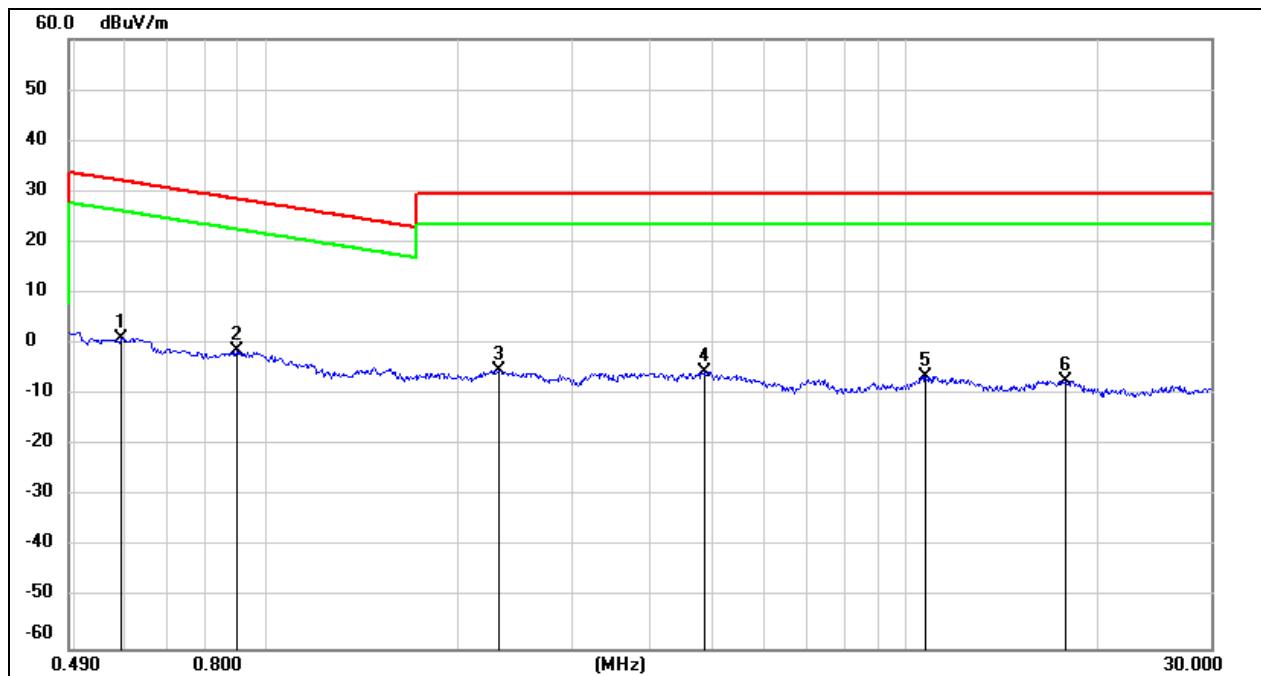

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.5917	63.24	-62.08	1.16	32.16	-50.34	-19.34	-31.00	peak
2	0.8971	60.72	-62.20	-1.48	28.55	-52.98	-22.95	-30.03	peak
3	2.3195	56.54	-61.75	-5.21	29.54	-56.71	-21.96	-34.75	peak
4	4.8573	56.00	-61.47	-5.47	29.54	-56.97	-21.96	-35.01	peak
5	10.7299	54.48	-60.83	-6.35	29.54	-57.85	-21.96	-35.89	peak
6	17.8124	53.62	-60.92	-7.30	29.54	-58.80	-21.96	-36.84	peak

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

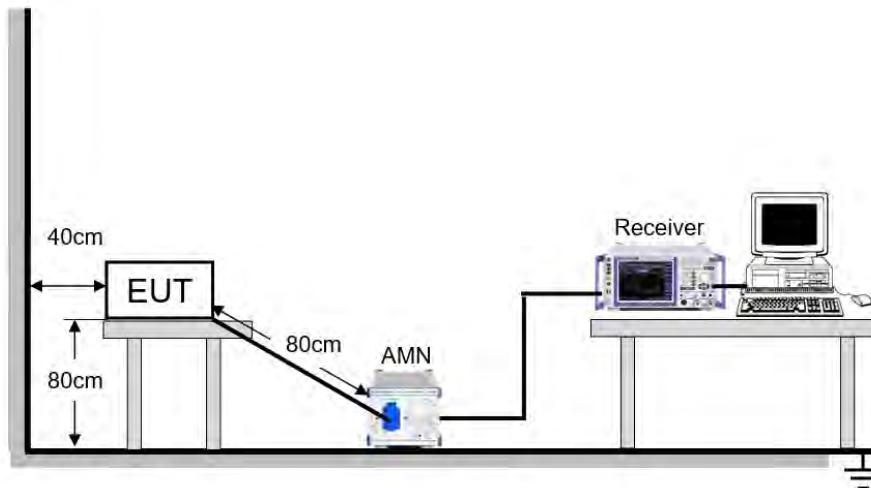

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT

Temperature	21.7 °C	Relative Humidity	53.8 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V/60 Hz

## RESULTS

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Line:	Line		

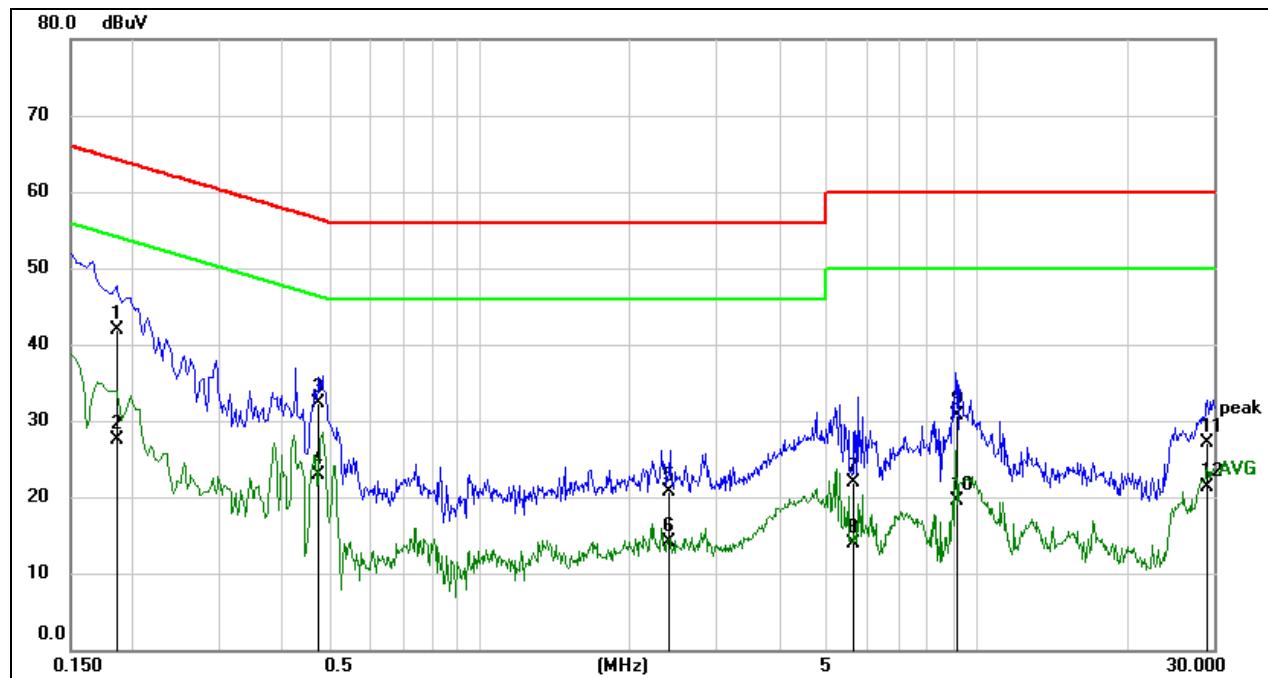


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1869	31.80	10.17	41.97	64.17	-22.20	QP
2	0.1869	17.34	10.17	27.51	54.17	-26.66	AVG
3	0.4775	22.32	10.05	32.37	56.38	-24.01	QP
4	0.4775	12.83	10.05	22.88	46.38	-23.50	AVG
5	2.3995	10.64	10.10	20.74	56.00	-35.26	QP
6	2.3995	3.93	10.10	14.03	46.00	-31.97	AVG
7	5.6610	11.55	10.39	21.94	60.00	-38.06	QP
8	5.6610	3.56	10.39	13.95	50.00	-36.05	AVG
9	9.1858	20.32	10.43	30.75	60.00	-29.25	QP
10	9.1858	9.03	10.43	19.46	50.00	-30.54	AVG
11	29.1217	16.05	11.12	27.17	60.00	-32.83	QP
12	29.1217	10.27	11.12	21.39	50.00	-28.61	AVG

### Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	GFSK Condition 1	Frequency(MHz):	919.12
Line:	Neutral		

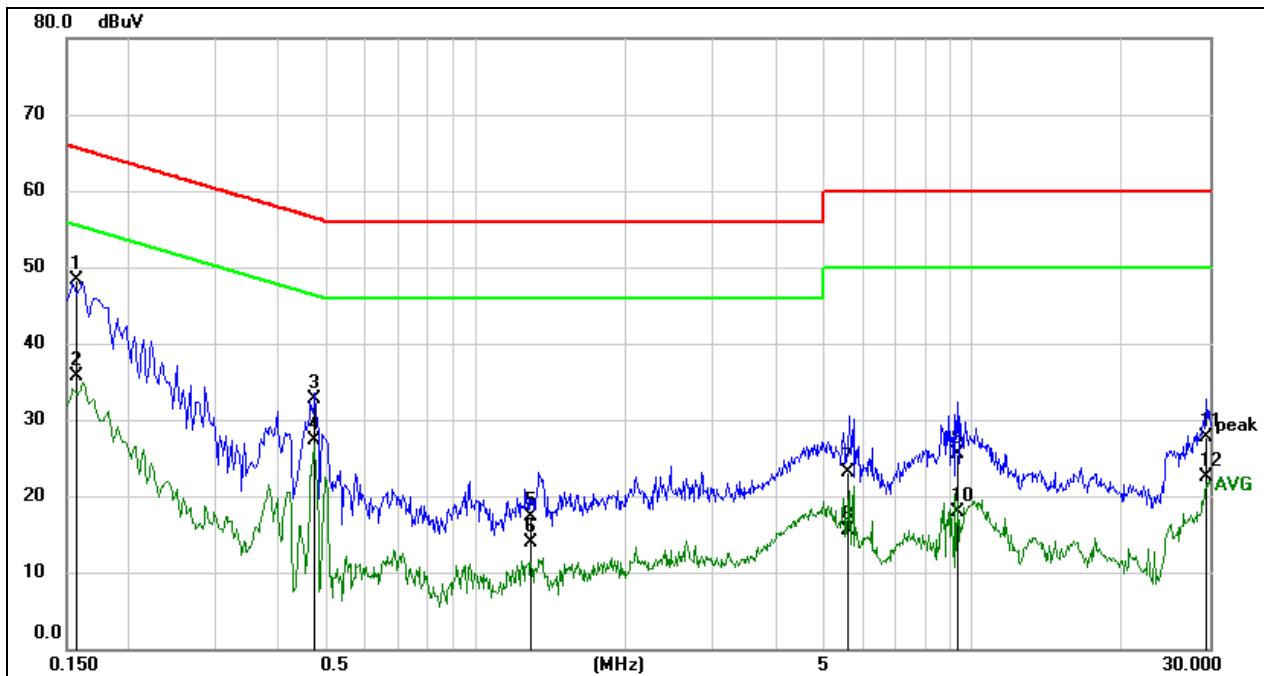

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1578	38.12	10.22	48.34	65.58	-17.24	QP
2	0.1578	25.52	10.22	35.74	55.58	-19.84	AVG
3	0.4722	22.61	10.05	32.66	56.48	-23.82	QP
4	0.4722	17.26	10.05	27.31	46.48	-19.17	AVG
5	1.2894	7.48	9.89	17.37	56.00	-38.63	QP
6	1.2894	4.04	9.89	13.93	46.00	-32.07	AVG
7	5.6030	12.74	10.38	23.12	60.00	-36.88	QP
8	5.6030	5.14	10.38	15.52	50.00	-34.48	AVG
9	9.3543	15.08	10.43	25.51	60.00	-34.49	QP
10	9.3543	7.51	10.43	17.94	50.00	-32.06	AVG
11	29.6715	16.48	11.13	27.61	60.00	-32.39	QP
12	29.6715	11.45	11.13	22.58	50.00	-27.42	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

## TEST DATA

### 11. GFSK.50 kbps Condition 1

#### 11.1. Appendix A1: DUTY CYCLE

##### 11.1.1. Test Result


Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK.50 kbps Condition 1	7.35	100	0.0735	7.35	-22.67

Note:

Duty Cycle Correction Factor=20log (1/x).

Where: x is Duty Cycle (Linear)

## Test Graphs

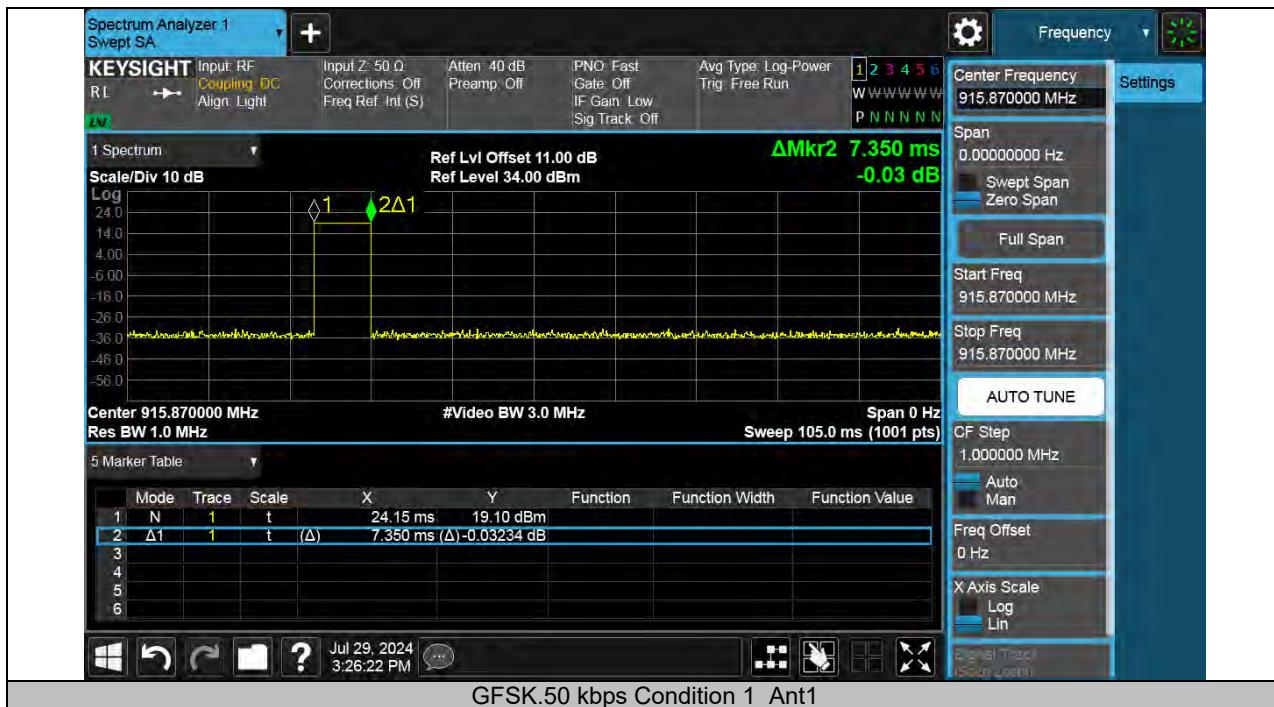


## 11.2. Appendix B1: 20DB BANDWIDTH & OCCUPIED CHANNEL BANDWIDTH

### 11.2.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
GFSK.50 kbps Condition 1	Ant1	LCH	0.09071	0.090496	PASS
		MCH	0.09027	0.090723	PASS
		HCH	0.08979	0.090733	PASS

## 11.2.2. Test Graphs

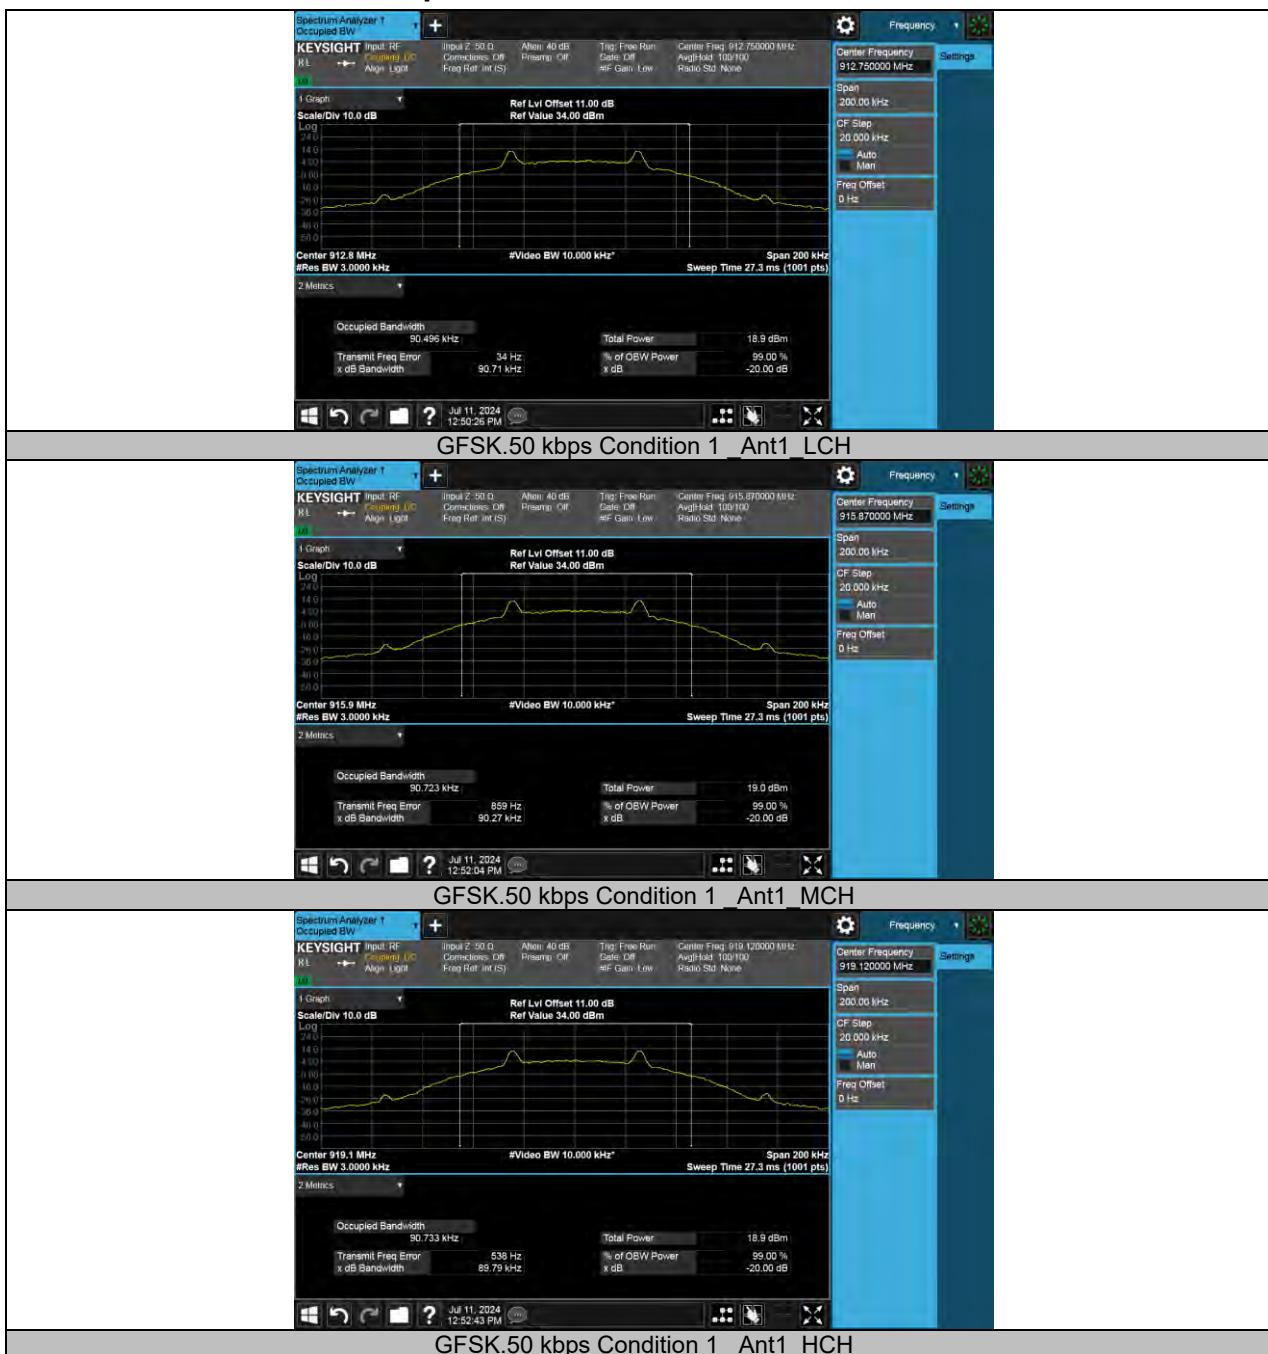

## 11.3. Appendix C1: CONDUCTED OUTPUT POWER

### 11.3.1. Test Result

Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
GFSK.50 kbps Condition 1	Ant1	LCH	18.92	≤30	PASS
		MCH	18.94	≤30	PASS
		HCH	18.95	≤30	PASS

## 11.4. Appendix D1: CARRIER FREQUENCY SEPARATION

### 11.4.1. Test Result

Test Mode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
GFSK.50 kbps Condition 1	Ant1	Hop	0.131	≥0.09071	PASS

### 11.4.2. Test Graphs




## 11.5. Appendix E1: NUMBER OF HOPPING FREQUENCIES

### 11.5.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
GFSK.50 kbps Condition 1	Ant1	Hop	50	≥50	PASS

### 11.5.2. Test Graphs

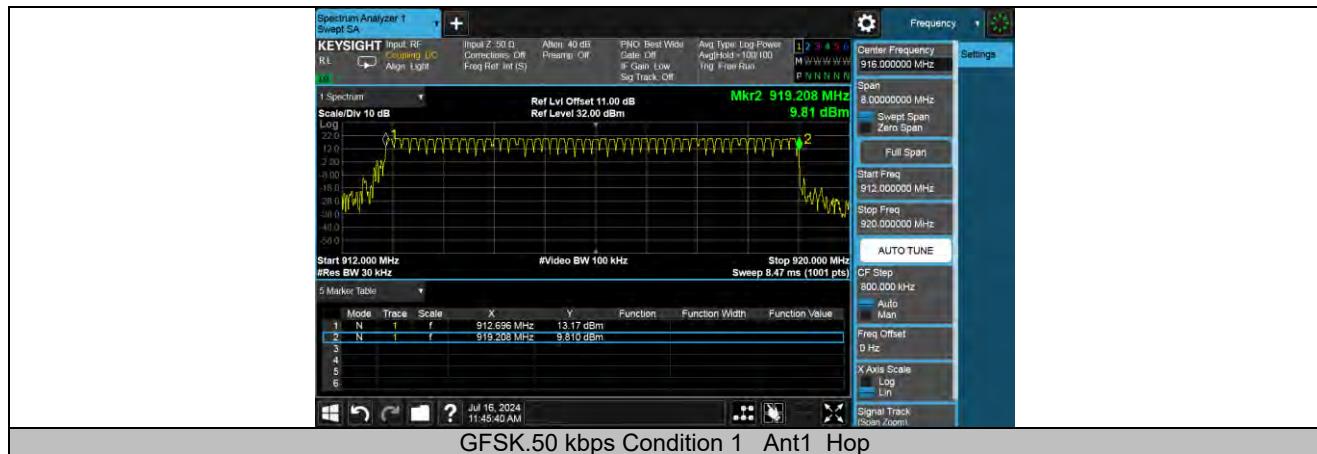

## 11.6. Appendix F1: TIME OF OCCUPANCY (DWELL TIME)

### 11.6.1. Test Result

Test Mode	Antenna	Channel	Time of single slot 1 [ms]	The number of hop channel appear	Burst Width 1 [ms/hop/ch]
GFSK.50 kbps Condition 1	Ant1	Hop	5.58	28	156.24

Test Mode	Antenna	Channel	Dwell Time [ms]	Limit [ms]	Results
GFSK.50 kbps Condition 1	Ant1	Hop	156.34	400	PASS

Note:

GFSK.50 kbps Condition 1: The dwell time = Time of single slot \* The number of hop channel appear within 20s  
 BurstWidth =Time of single slot\*number of single slot

## 11.6.2. Test Graphs



## 11.7. Appendix G1: CONDUCTED BAND EDGE AND SPURIOUS EMISSION


### 11.7.1. Test Result


Test Mode	Antenna	ChName	Result [dBm]	Verdict
GFSK.50 kbps Condition 1	Ant1	LCH	See the below graphs	PASS
		MCH		PASS
		HCH		PASS
		Hop_LCH		PASS
		Hop_HCH		PASS

## 11.7.2. Test Graphs





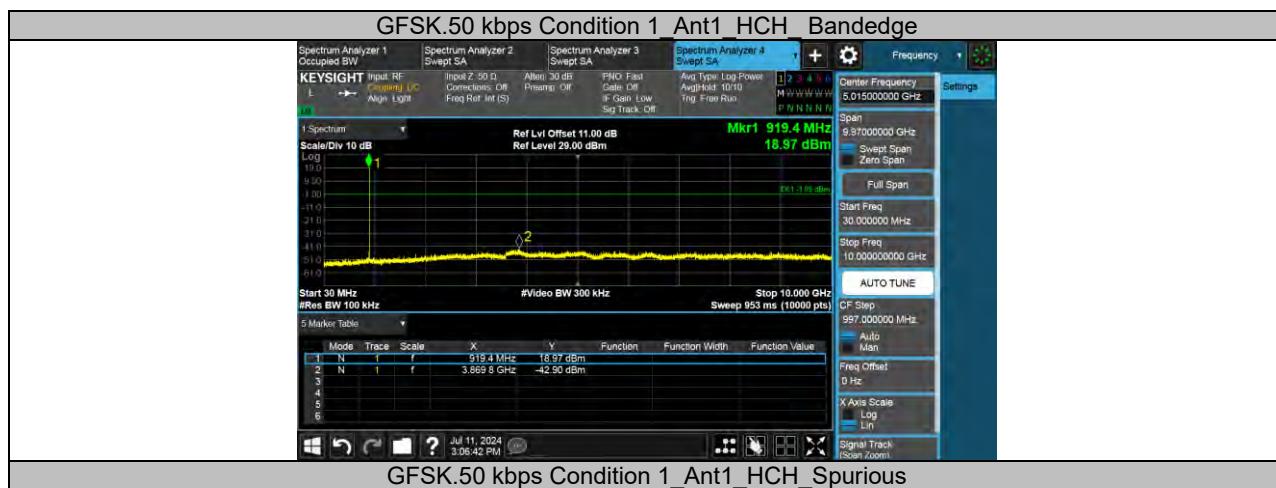

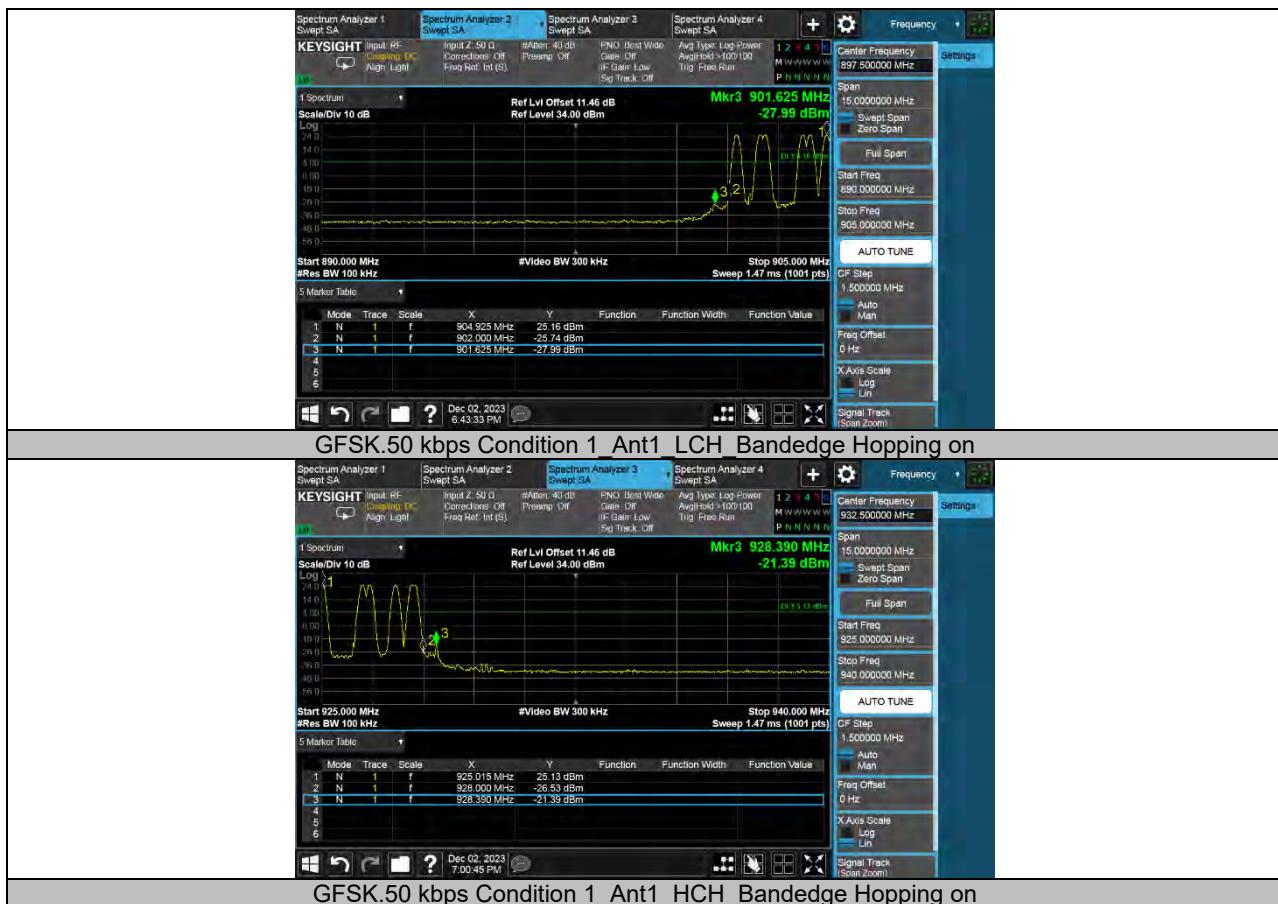

## 12. GFSK.50 kbps Condition 2

### 12.1. Appendix A2: DUTY CYCLE

#### 12.1.1. Test Result


Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK.50 kbps Condition 2	7.35	100	0.0735	7.35	-22.67

Note:

Duty Cycle Correction Factor=20log (1/x).

Where: x is Duty Cycle (Linear)

## Test Graphs

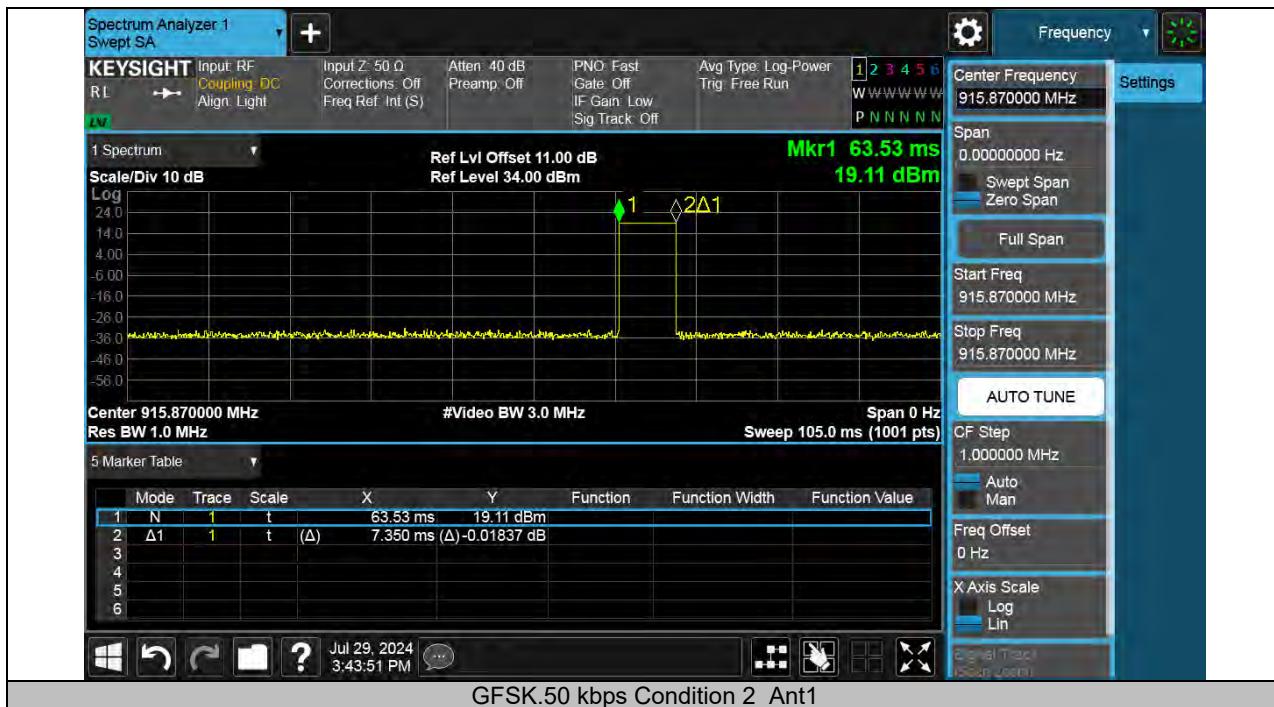


## 12.2. Appendix B2: 20DB BANDWIDTH & OCCUPIED CHANNEL BANDWIDTH

### 12.2.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
GFSK.50 kbps Condition 2	Ant1	LCH	0.09337	0.090776	PASS
		MCH	0.09084	0.089665	PASS
		HCH	0.09017	0.090238	PASS

## 12.2.2. Test Graphs

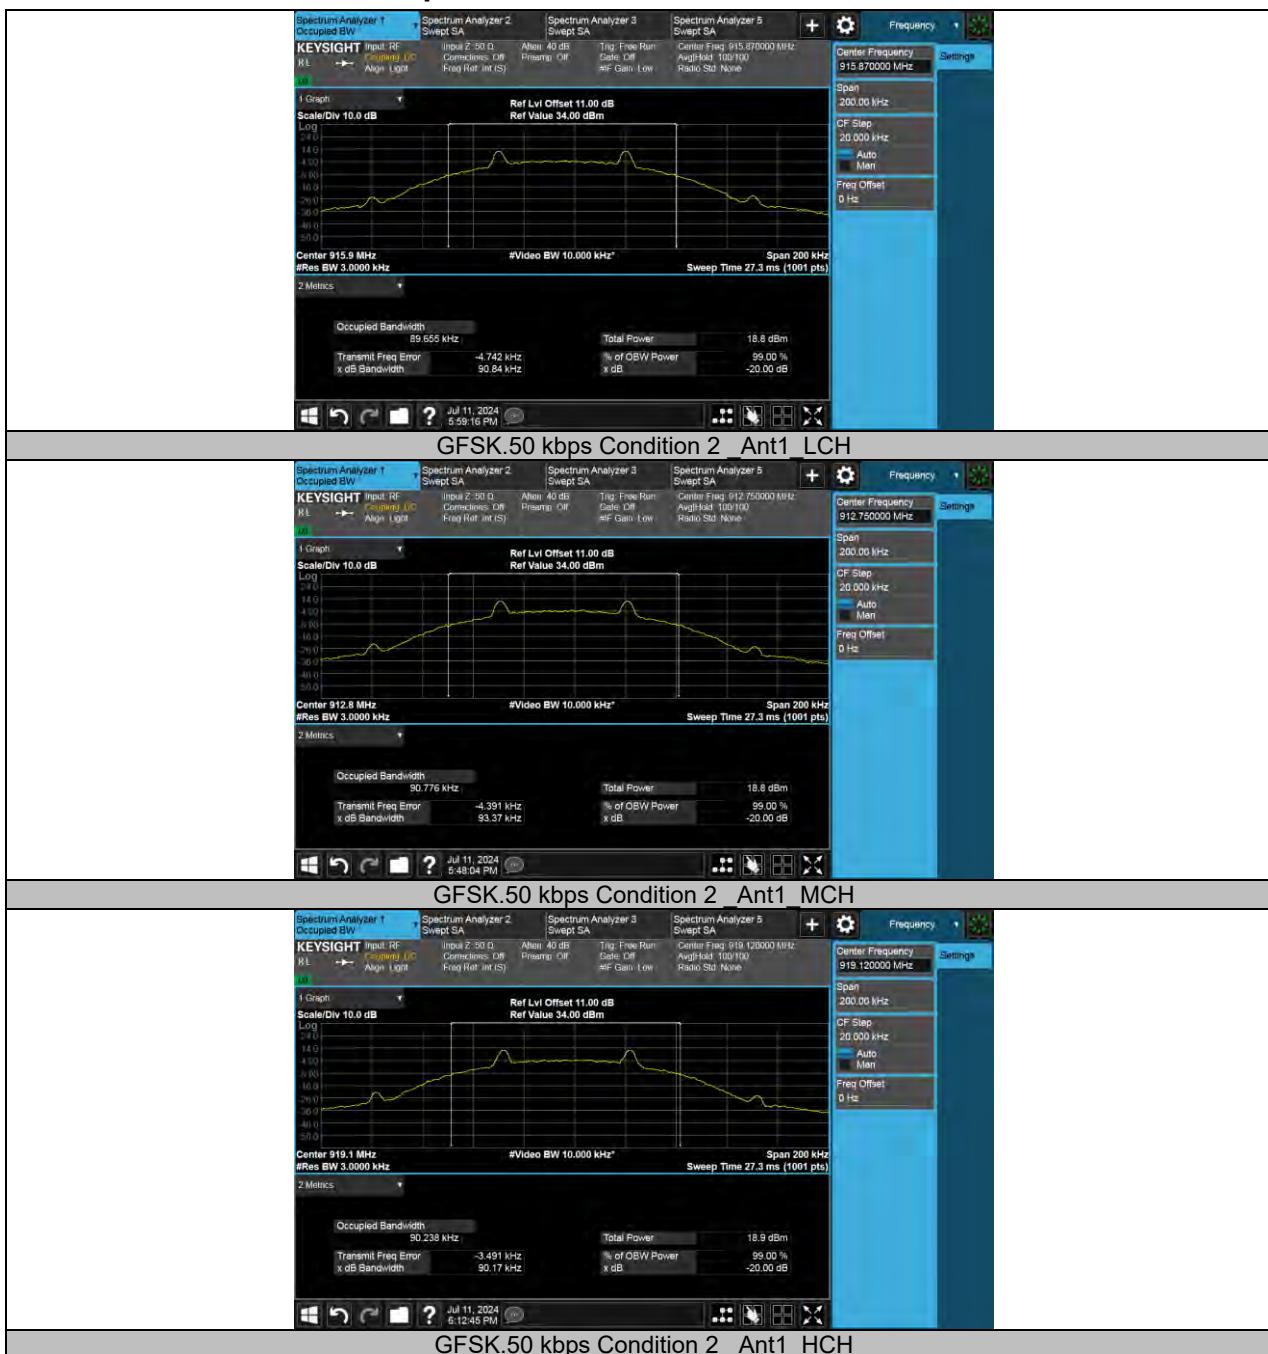

## 12.3. Appendix C2: CONDUCTED OUTPUT POWER

### 12.3.1. Test Result

Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
GFSK.50 kbps Condition 2	Ant1	LCH	18.96	≤30	PASS
		MCH	18.95	≤30	PASS
		HCH	18.97	≤30	PASS

## 12.4. Appendix D2: CARRIER FREQUENCY SEPARATION

### 12.4.1. Test Result

Test Mode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
GFSK.50 kbps Condition 2	Ant1	Hop	0.130	≥0.09337	PASS

### 12.4.2. Test Graphs




## 12.5. Appendix E2: NUMBER OF HOPPING FREQUENCIES

### 12.5.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
GFSK.50 kbps Condition 2	Ant1	Hop	50	≥50	PASS

### 12.5.2. Test Graphs

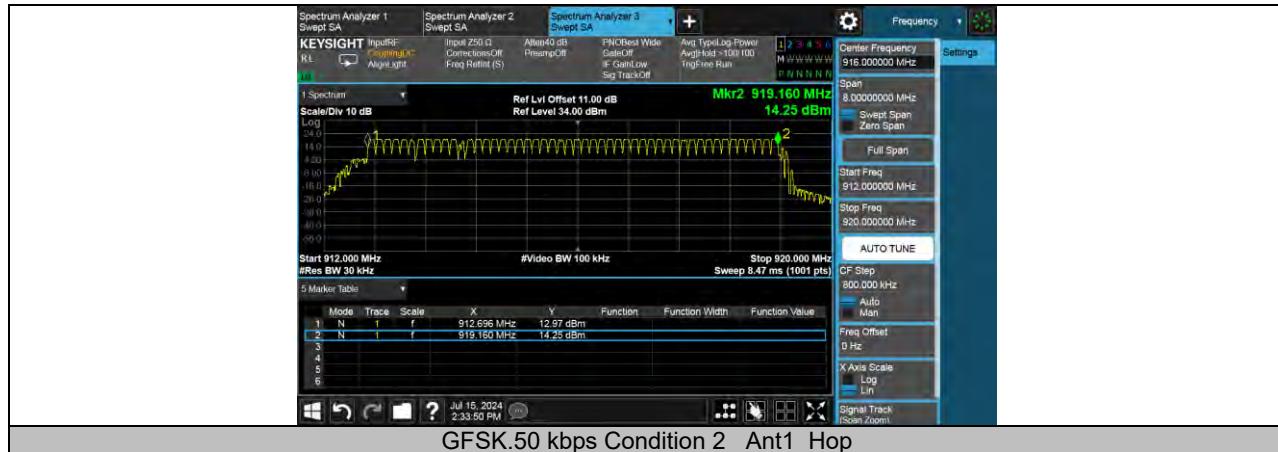

## 12.6. Appendix F2: TIME OF OCCUPANCY (DWELL TIME)

### 12.6.1. Test Result

Test Mode	Antenna	Channel	Time of single slot 1 [ms]	The number of hop channel appear	Burst Width 1 [ms/hop/ch]
GFSK.50 kbps Condition 2	Ant1	Hop	5.58	28	156.24

Test Mode	Antenna	Channel	Dwell Time [ms]	Limit [ms]	Results
GFSK.50 kbps Condition 2	Ant1	Hop	156.34	400	PASS

Note:

2GFSK-150 kbps: The dwell time = Time of single slot \* The number of hop channel appear within 20s  
 BurstWidth =Time of single slot\*number of single slot

## 12.6.2. Test Graphs



## 12.7. Appendix G2: CONDUCTED SPURIOUS EMISSION


### 12.7.1. Test Result

Test Mode	Antenna	ChName	Result [dBm]	Verdict
GFSK.50 kbps Condition 2	Ant1	LCH	See the below graphs	PASS
		MCH		PASS
		HCH		PASS
		Hop_LCH		PASS
		Hop_HCH		PASS

## 12.7.2. Test Graphs





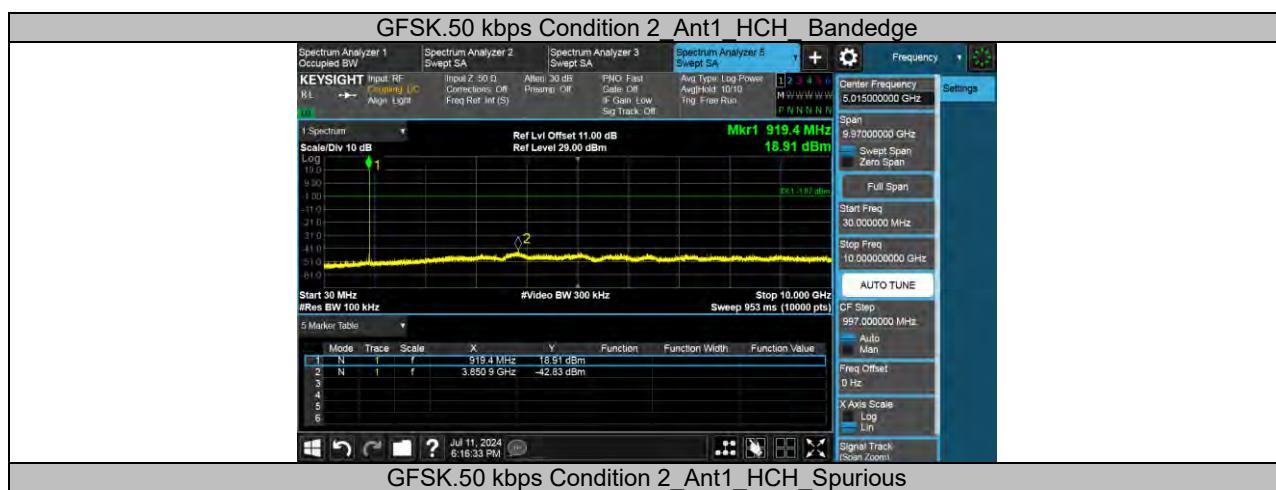

## 13. GFSK.50 kbps Condition 3

### 13.1. Appendix A3: DUTY CYCLE

#### 13.1.1. Test Result


Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK.50 kbps Condition 3	7.35	100	0.0735	7.35	-22.67

Note:

Duty Cycle Correction Factor=20log (1/x).

Where: x is Duty Cycle (Linear)

## Test Graphs

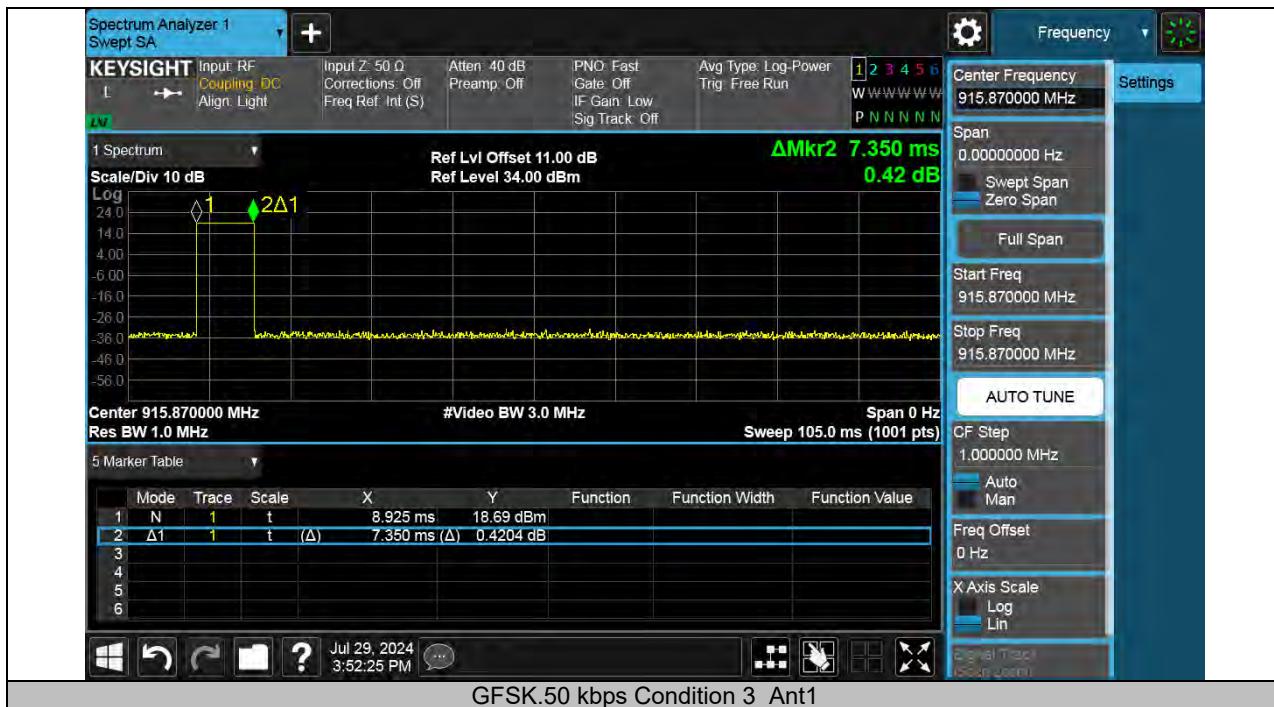


## 13.2. Appendix B3: 20DB BANDWIDTH & OCCUPIED CHANNEL BANDWIDTH

### 13.2.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
GFSK.50 kbps Condition 3	Ant1	LCH	0.09032	0.090893	PASS
		MCH	0.08950	0.089408	PASS
		HCH	0.09039	0.090833	PASS

### 13.2.2. Test Graphs

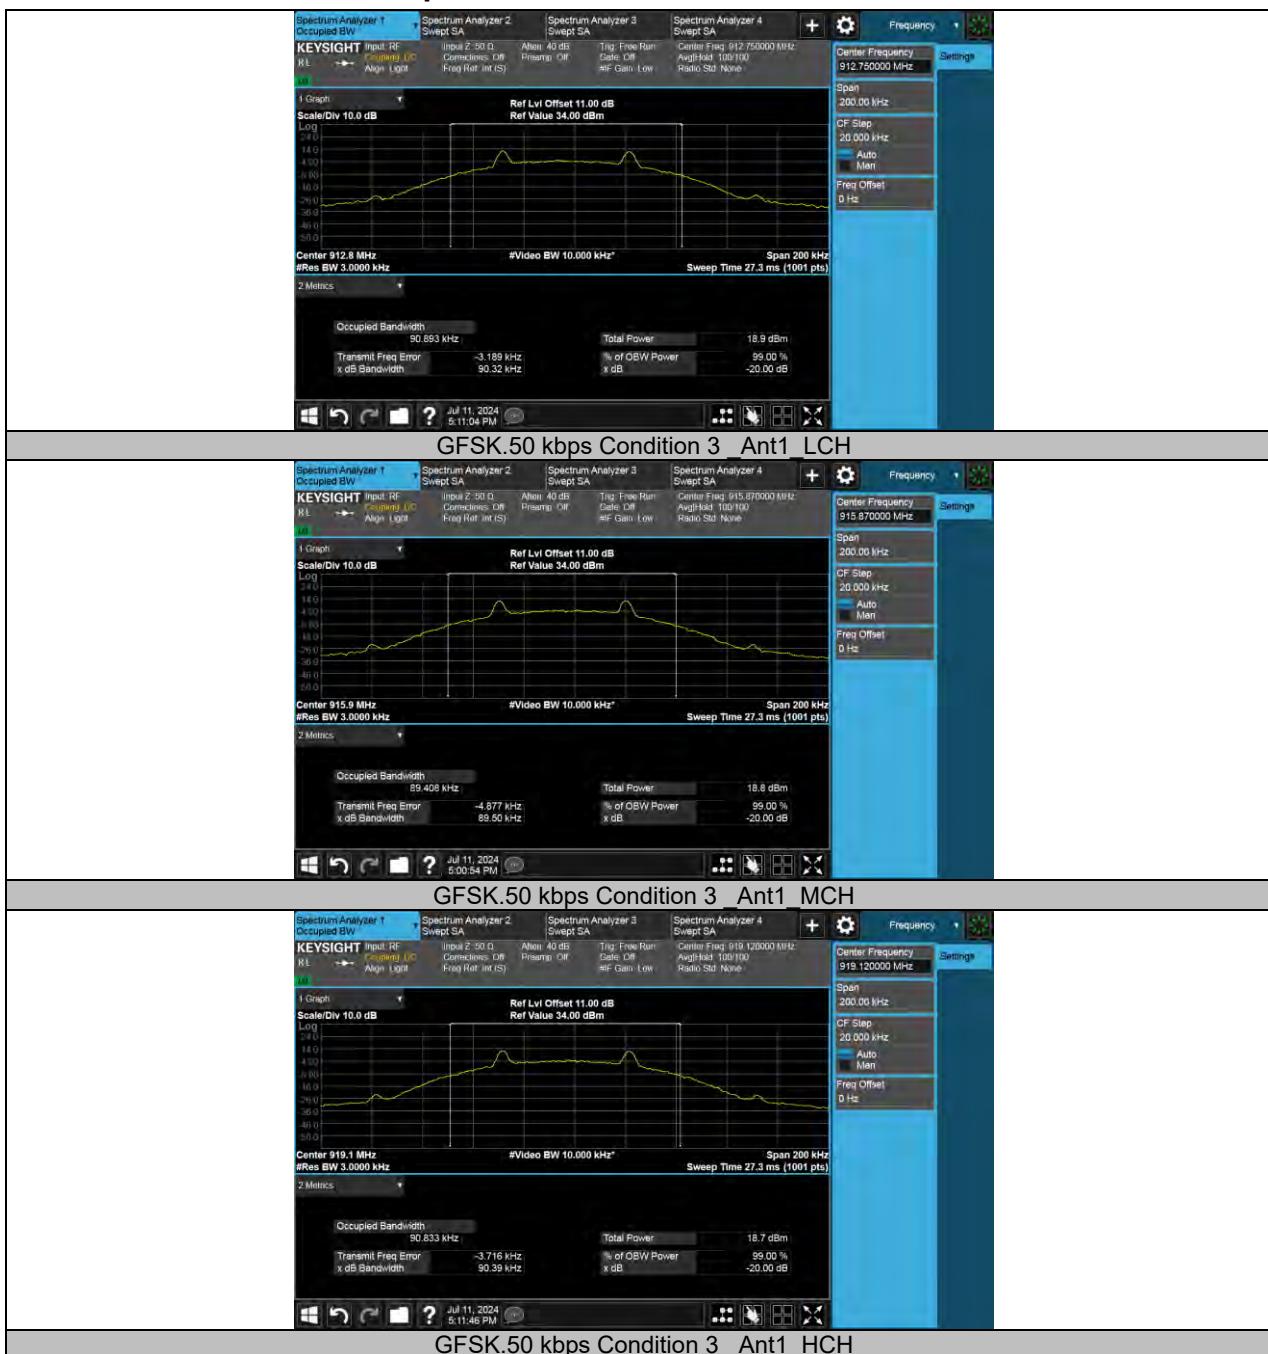

### 13.3. Appendix C3:CONDUCTED OUTPUT POWER

#### 13.3.1. Test Result

Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
GFSK.50 kbps Condition 3	Ant1	LCH	18.95	≤30	PASS
		MCH	18.94	≤30	PASS
		HCH	18.96	≤30	PASS

## 13.4. Appendix D3: CARRIER FREQUENCY SEPARATION

### 13.4.1. Test Result

Test Mode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
GFSK.50 kbps Condition 3	Ant1	Hop	0.129	≥0.09039	PASS

### 13.4.2. Test Graphs




## 13.5. Appendix E3: NUMBER OF HOPPING FREQUENCIES

### 13.5.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
GFSK.50 kbps Condition 3	Ant1	Hop	50	≥50	PASS

### 13.5.2. Test Graphs

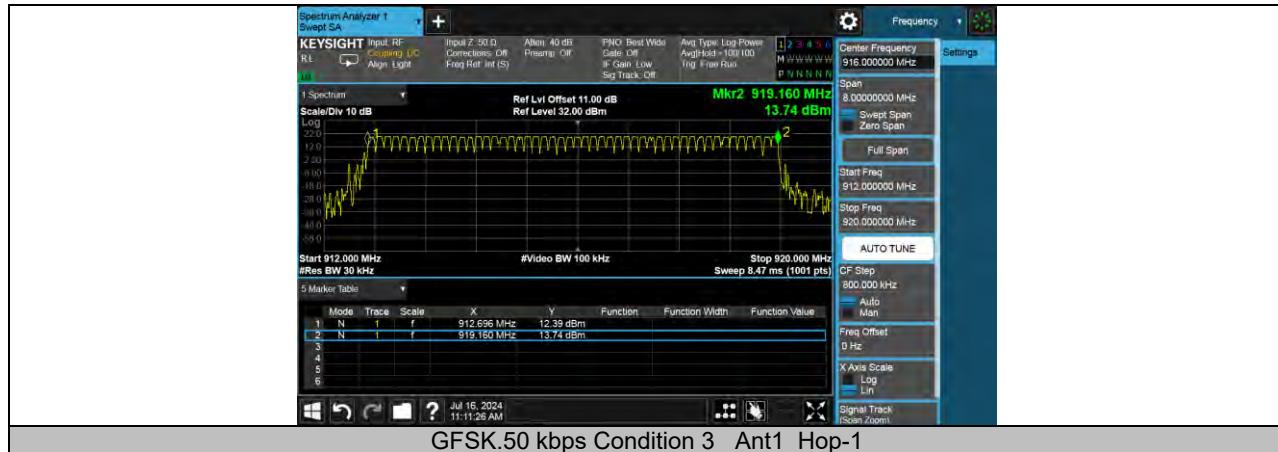

## 13.6. Appendix F3: TIME OF OCCUPANCY (DWELL TIME)

### 13.6.1. Test Result

Test Mode	Antenna	Channel	Time of single slot 1 [ms]	The number of hop channel appear	Burst Width 1 [ms/hop/ch]
GFSK.50 kbps Condition 3	Ant1	Hop	5.58	28	156.24

Test Mode	Antenna	Channel	Dwell Time [ms]	Limit [ms]	Results
GFSK.50 kbps Condition 3	Ant1	Hop	156.34	400	PASS

Note:

GFSK.50 kbps Condition 3: The dwell time = Time of single slot \* The number of hop channel appear within 20s  
 BurstWidth =Time of single slot\*number of single slot

### 13.6.2. Test Graphs




## 13.7. Appendix G3: CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### 13.7.1. Test Result

Test Mode	Antenna	ChName	Result [dBm]	Verdict
GFSK.50 kbps Condition 3	Ant1	LCH	See the below graphs	PASS
		MCH		PASS
		HCH		PASS
		Hop_LCH		PASS
		Hop_HCH		PASS


### 13.7.2. Test Graphs

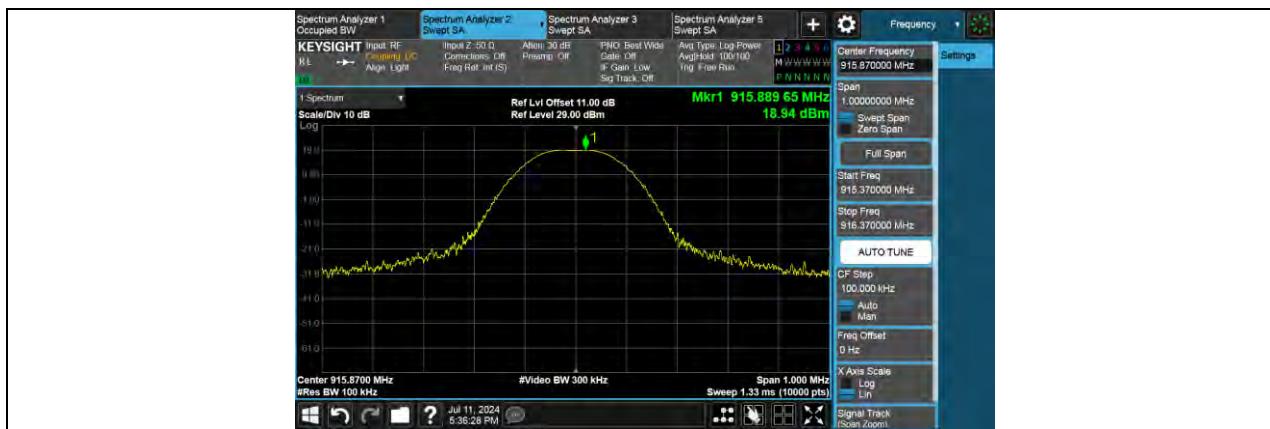


**GFSK.50 kbps Condition 3 Ant1 MCH Reference**

**GFSK.50 kbps Condition 3 Ant1 MCH Spurious**

**GFSK.50 kbps Condition 3 Ant1 HCH Reference**
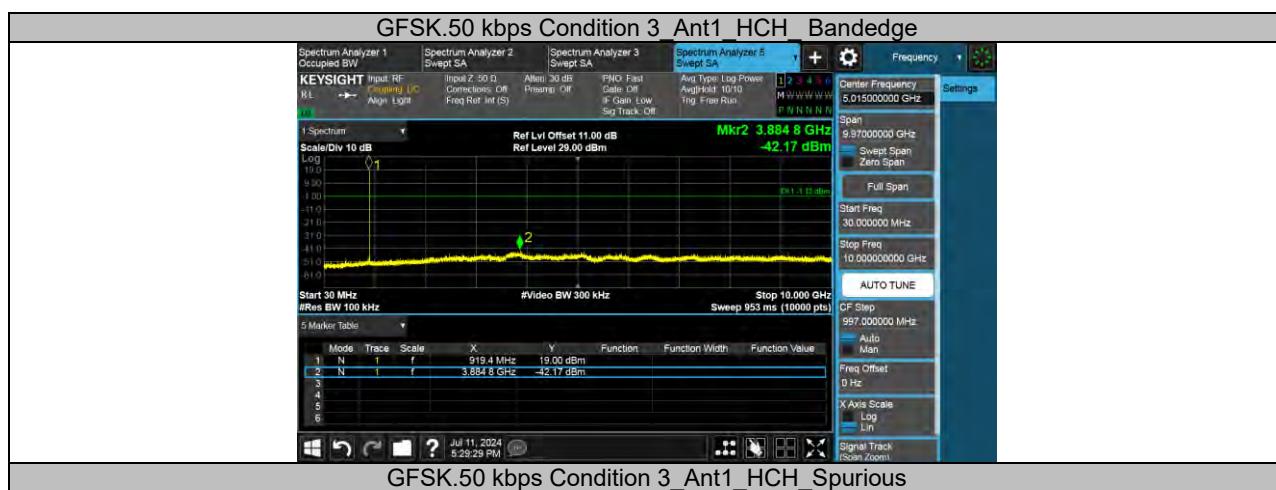
## 14. GFSK.50 kbps Condition 4

### 14.1. Appendix A4: DUTY CYCLE

#### 14.1.1. Test Result


Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK.50 kbps Condition 4	8.78	100	0.0878	8.78	-21.13

Note:

Duty Cycle Correction Factor=20log (1/x).

Where: x is Duty Cycle (Linear)

## Test Graphs

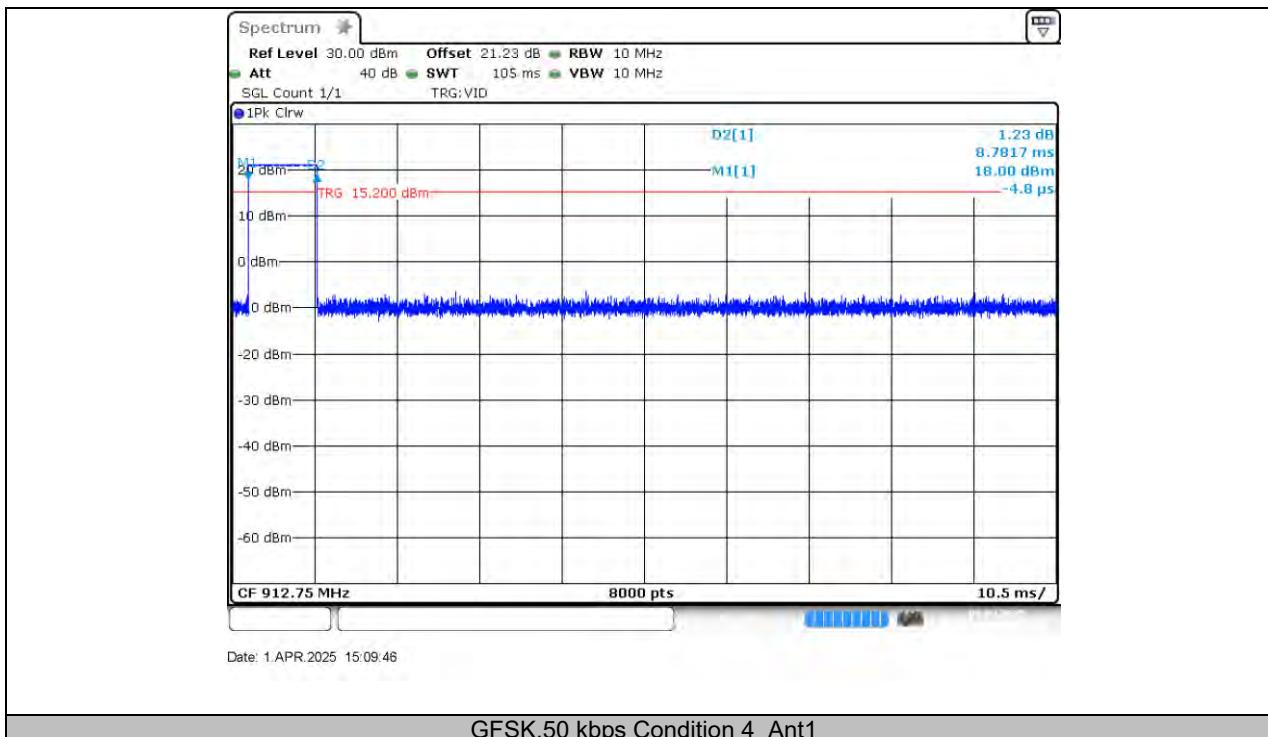


## 14.2. Appendix B4: 20DB BANDWIDTH & OCCUPIED CHANNEL BANDWIDTH

### 14.2.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
GFSK.50 kbps Condition 4	Ant1	LCH	0.1033	0.093875	PASS
		MCH	0.09591	0.091486	PASS
		HCH	0.1025	0.094436	PASS

## 14.2.2. Test Graphs

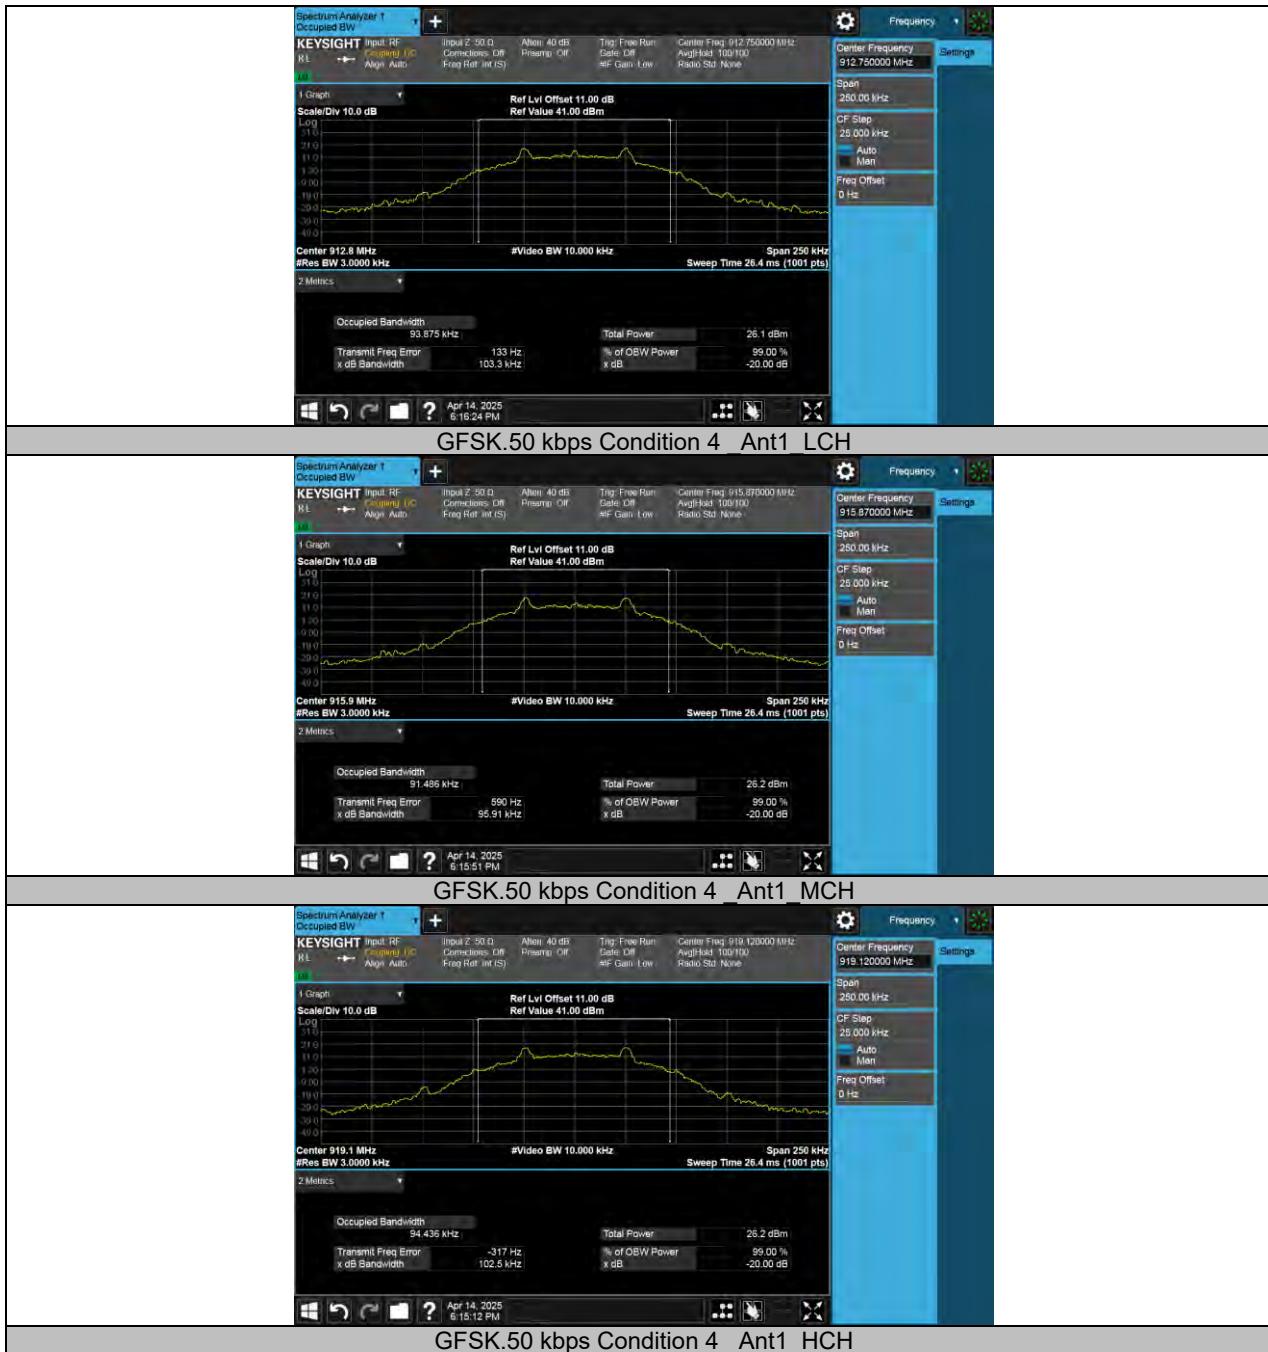

## 14.3. Appendix C4: CONDUCTED OUTPUT POWER

### 14.3.1. Test Result


Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
GFSK.50 kbps Condition 4	Ant1	LCH	18.59	≤30	PASS
		MCH	18.50	≤30	PASS
		HCH	18.47	≤30	PASS

## 14.4. Appendix D4: CARRIER FREQUENCY SEPARATION

### 14.4.1. Test Result

Test Mode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
GFSK.50 kbps Condition 4	Ant1	Hop	0.130	≥0.01033	PASS

### 14.4.2. Test Graphs

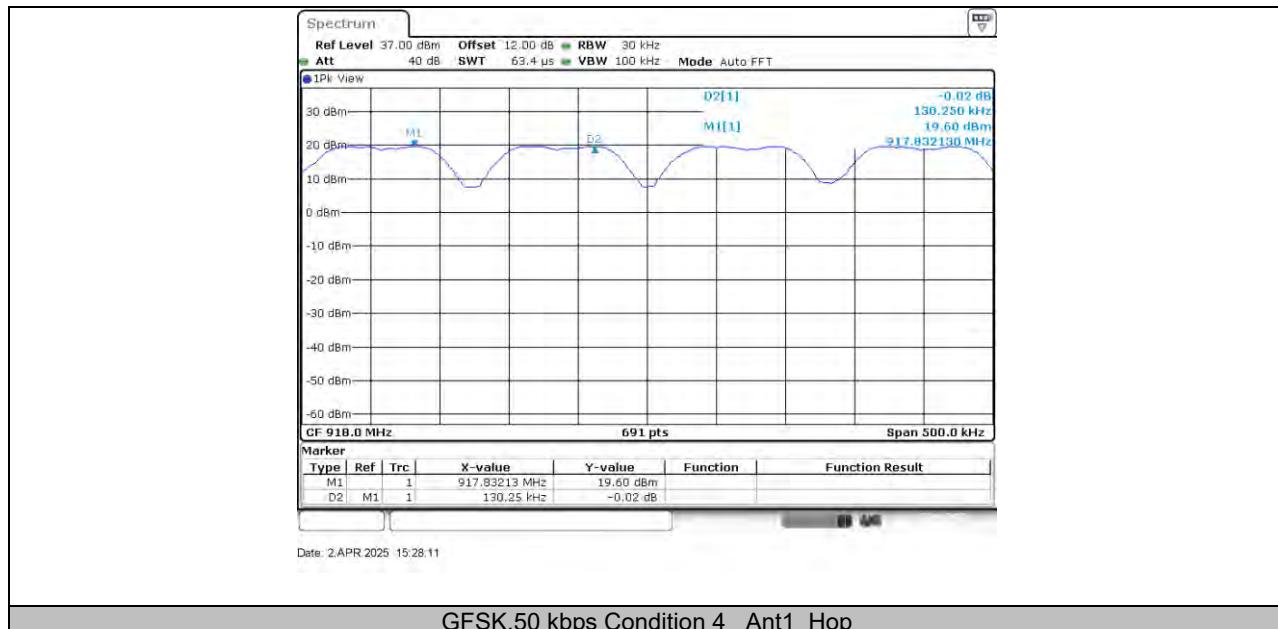


## 14.5. Appendix E4: NUMBER OF HOPPING FREQUENCIES

### 14.5.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
GFSK.50 kbps Condition 4	Ant1	Hop	50	≥50	PASS

### 14.5.2. Test Graphs

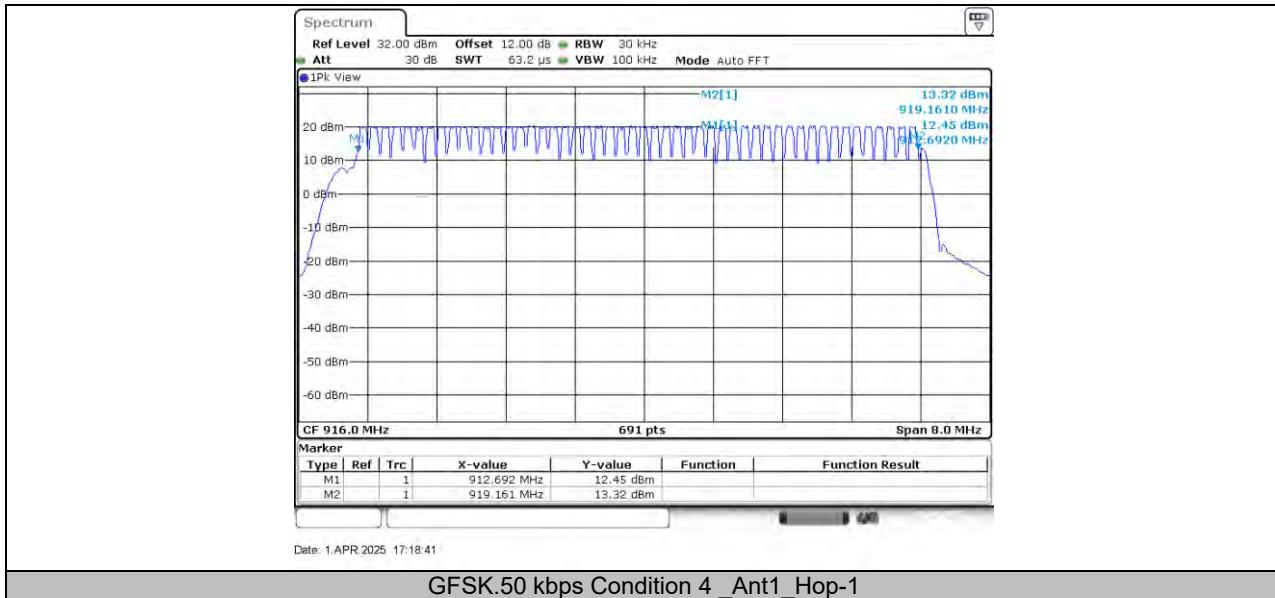

## 14.6. Appendix F4: TIME OF OCCUPANCY (DWELL TIME)

### 14.6.1. Test Result


Test Mode	Antenna	Channel	Time of single slot 1 [ms]	The number of hop channel appear	Burst Width 1 [ms/hop/ch]
GFSK.50 kbps Condition 4	Ant1	Hop	5.217	28	146.076

Test Mode	Antenna	Channel	Dwell Time [ms]	Limit [ms]	Results
GFSK.50 kbps Condition 4	Ant1	Hop	146.076	400	PASS

Note:

GFSK.50 kbps Condition 4: The dwell time = Time of single slot \* The number of hop channel appear within 20s  
 BurstWidth =Time of single slot\*number of single slot

## 14.6.2. Test Graphs

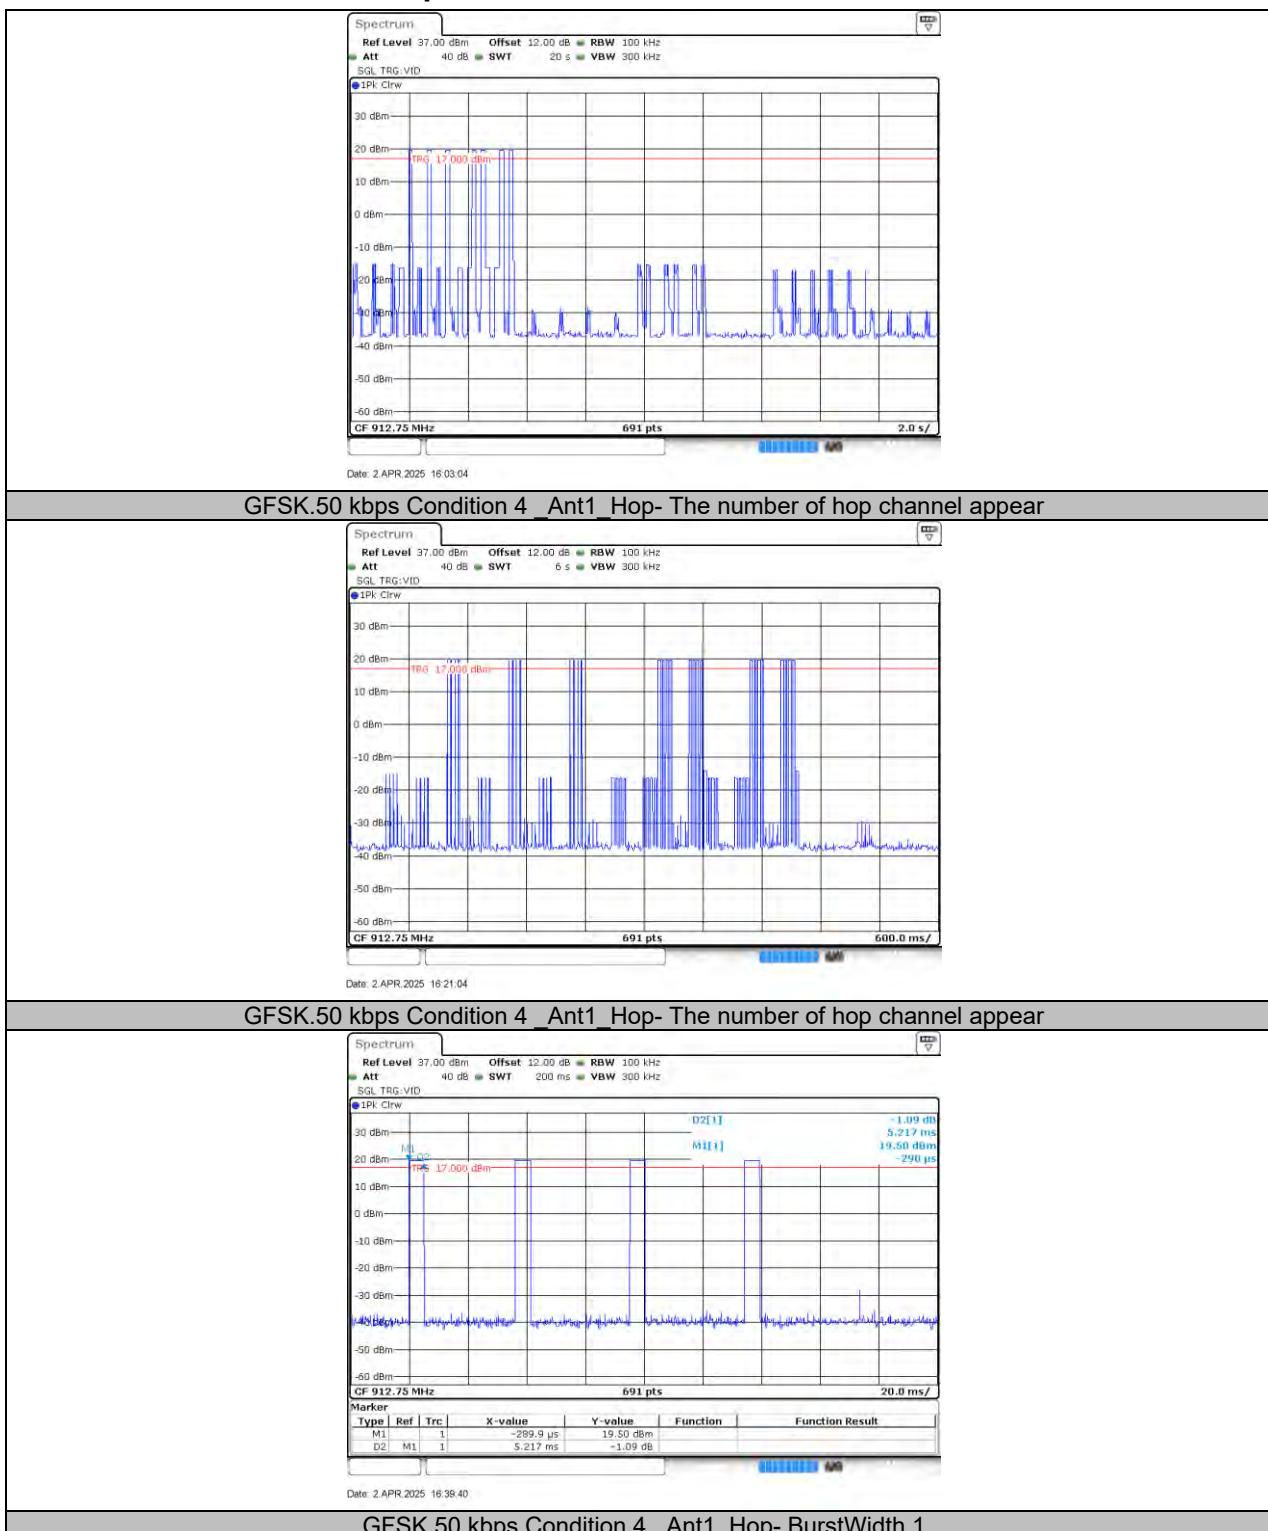



## 14.7. Appendix G4: CONDUCTED BAND EDGE AND SPURIOUS EMISSION


### 14.7.1. Test Result

Test Mode	Antenna	ChName	Result [dBm]	Verdict
GFSK.50 kbps Condition 4	Ant1	LCH	See the below graphs	PASS
		MCH		PASS
		HCH		PASS
		Hop_LCH		PASS
		Hop_HCH		PASS

## 14.7.2. Test Graphs

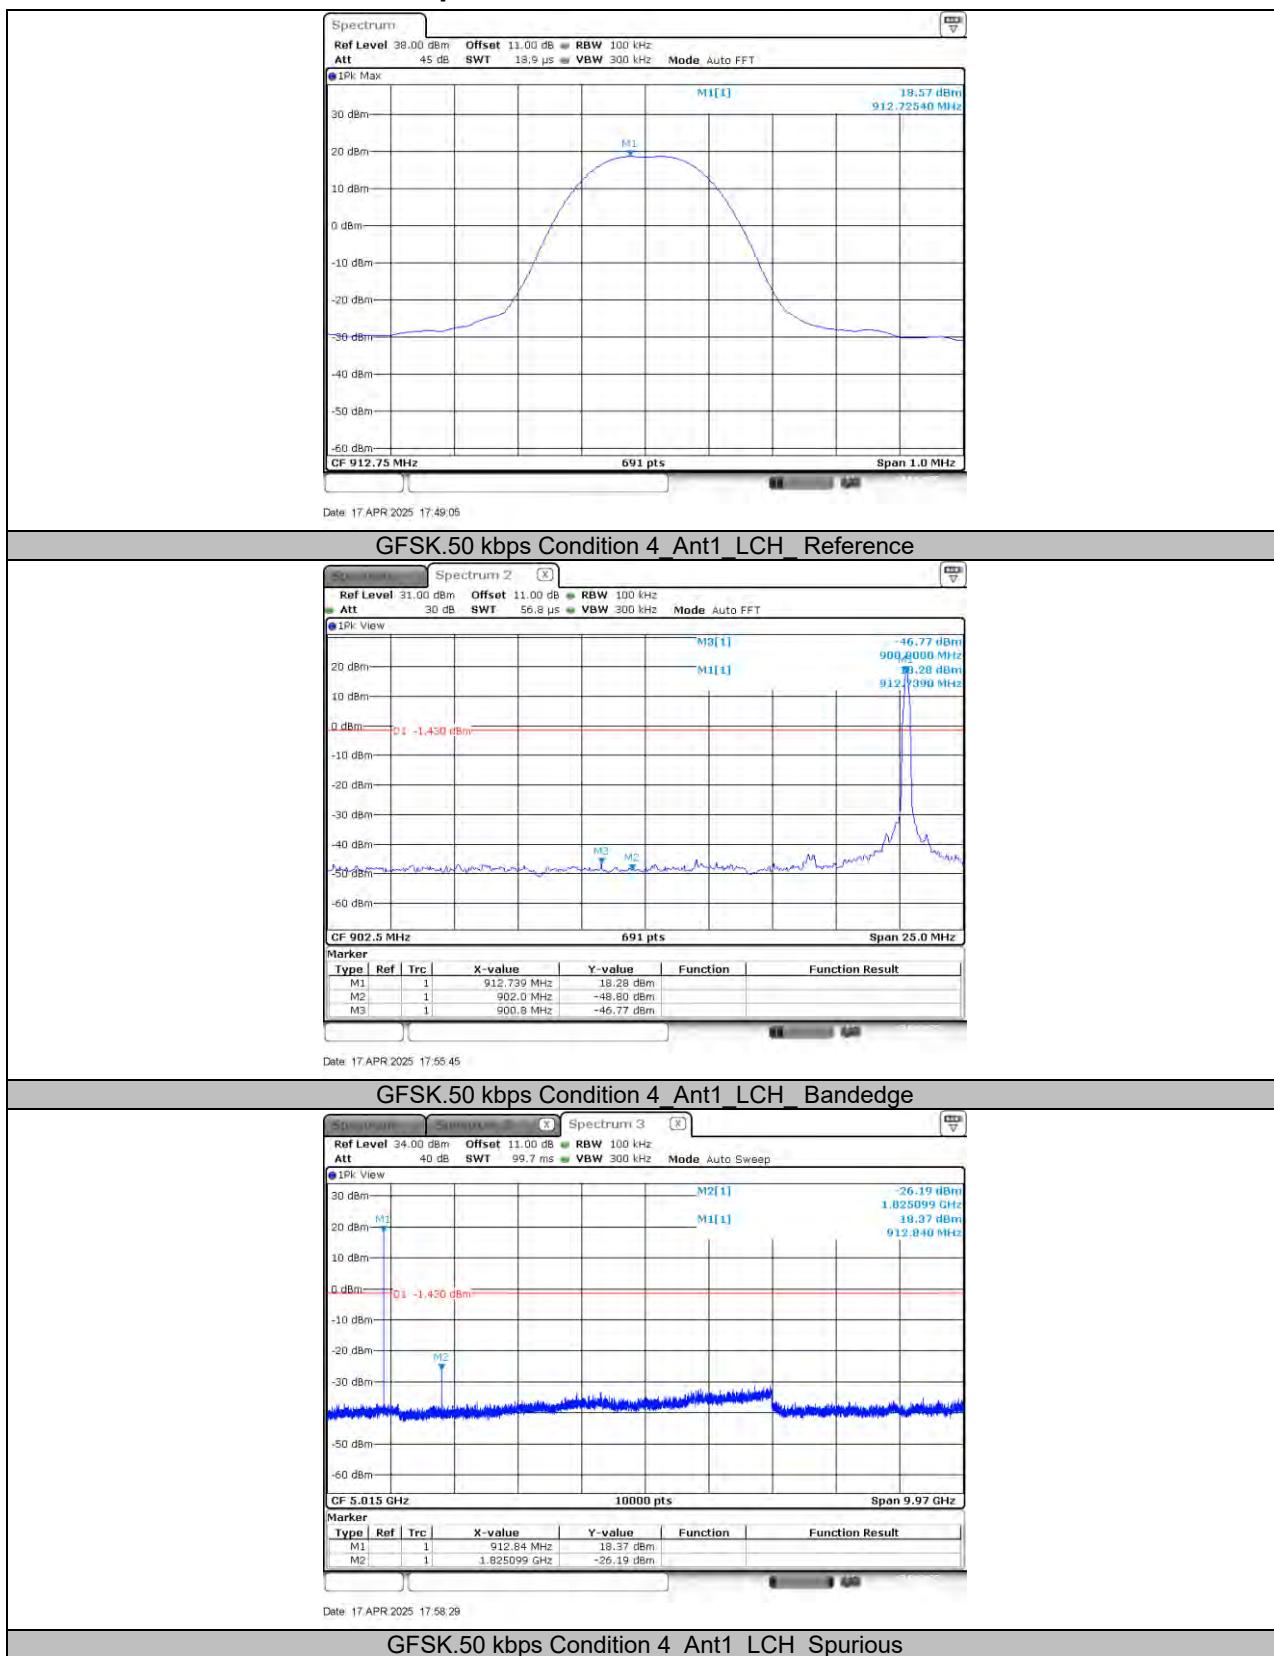

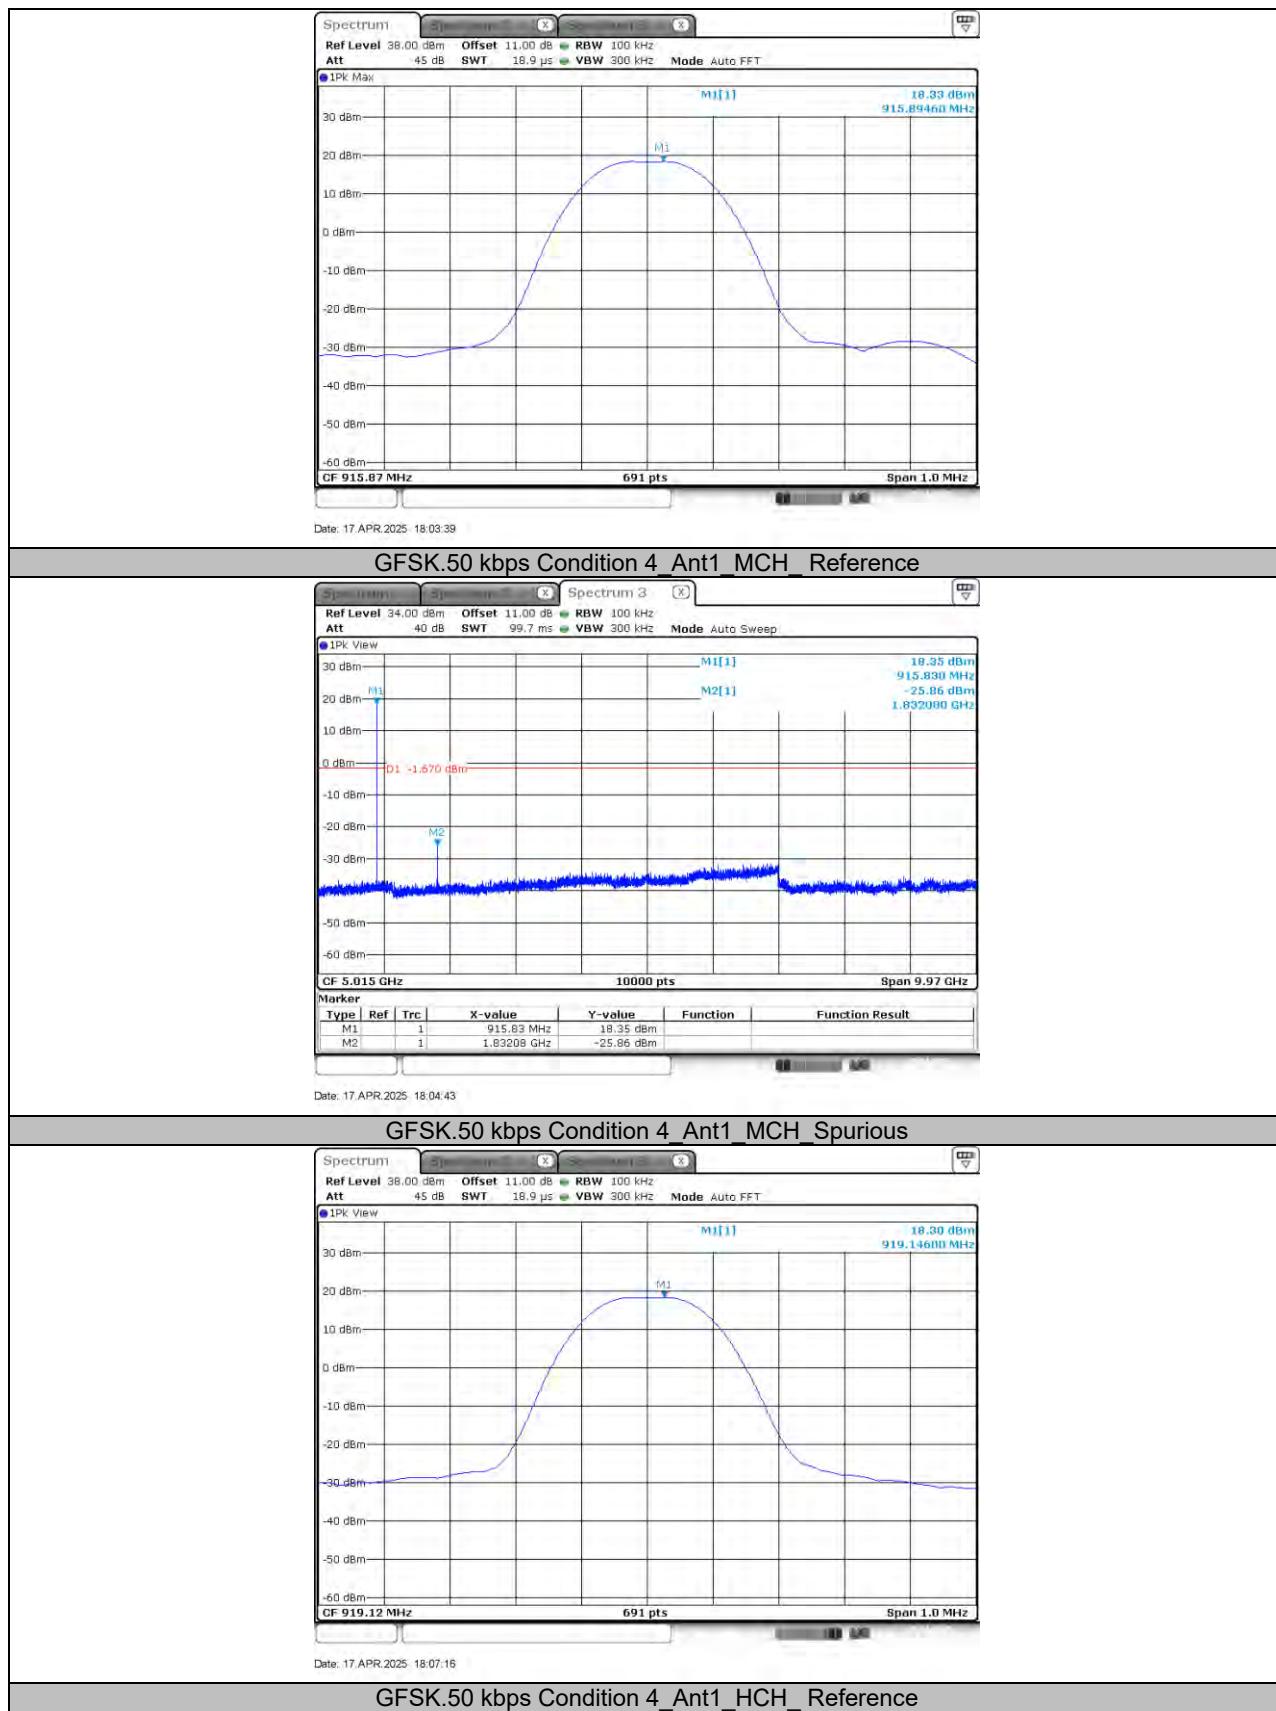

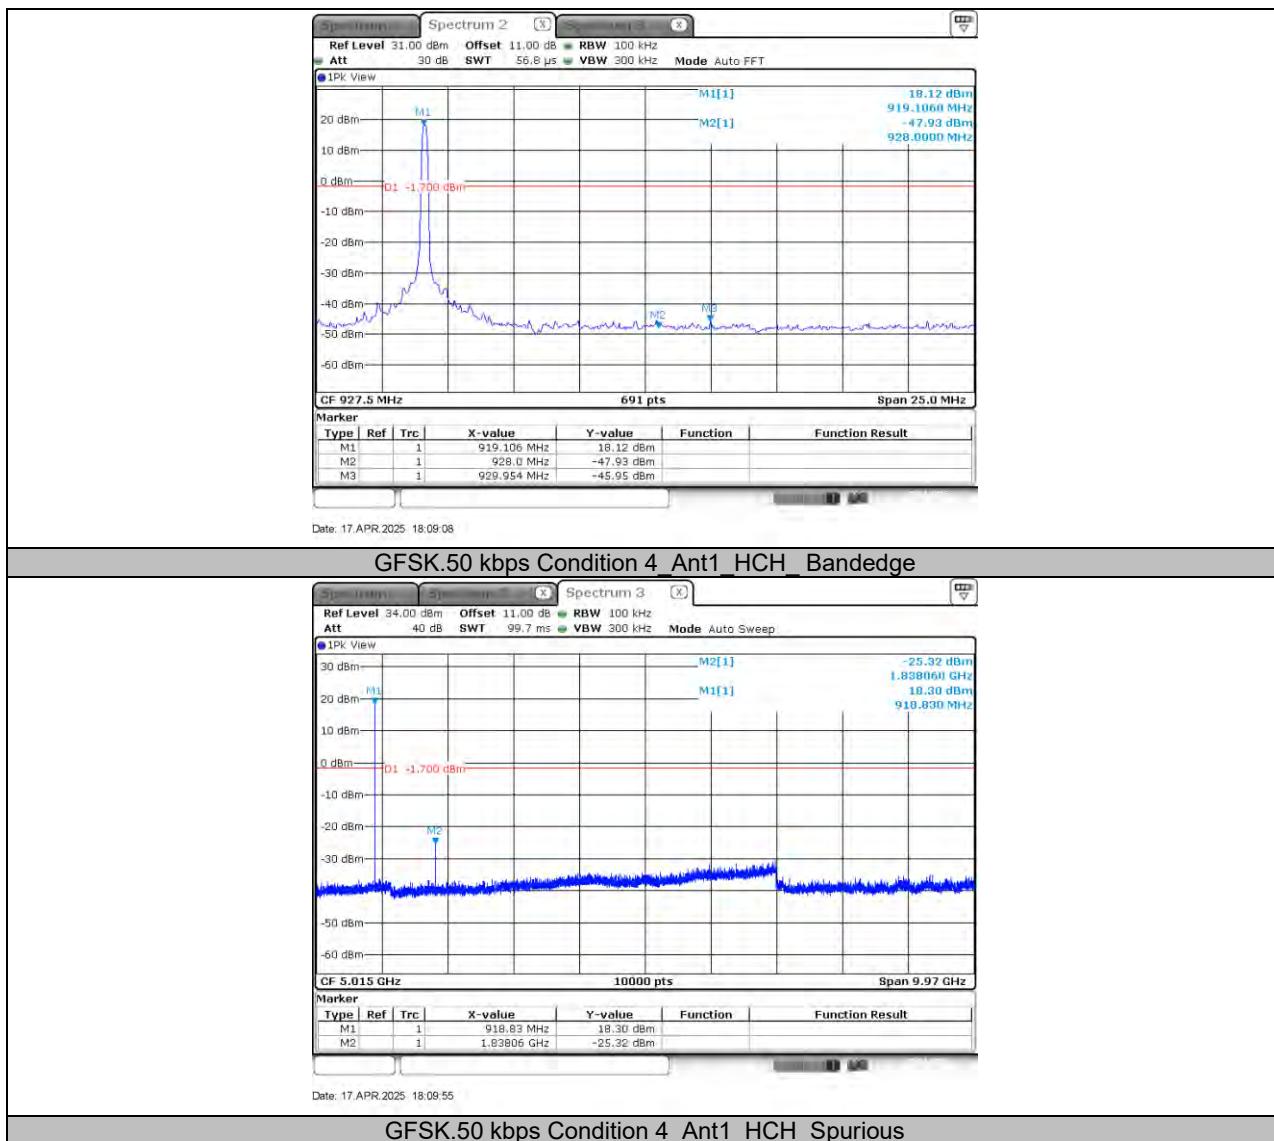

## 15. GFSK.50 kbps Condition 5

### 15.1. Appendix A5: DUTY CYCLE

#### 15.1.1. Test Result


Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
GFSK.50 kbps Condition 5	8.78	100	0.0878	8.78	-21.13

Note:

Duty Cycle Correction Factor=20log (1/x).

Where: x is Duty Cycle (Linear)

## Test Graphs

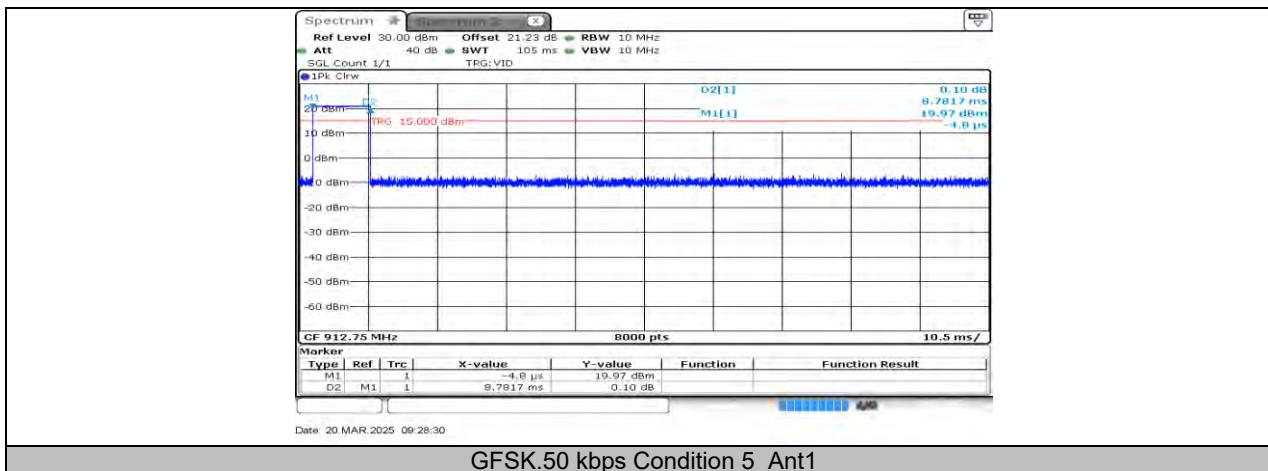


## 15.2. Appendix B5: 20DB BANDWIDTH & OCCUPIED CHANNEL BANDWIDTH

### 15.2.1. Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	OCB [MHz]	Verdict
GFSK.50 kbps Condition 5	Ant1	LCH	0.09806	0.091591	PASS
		MCH	0.1032	0.093765	PASS
		HCH	0.1028	0.092812	PASS

## 15.2.2. Test Graphs

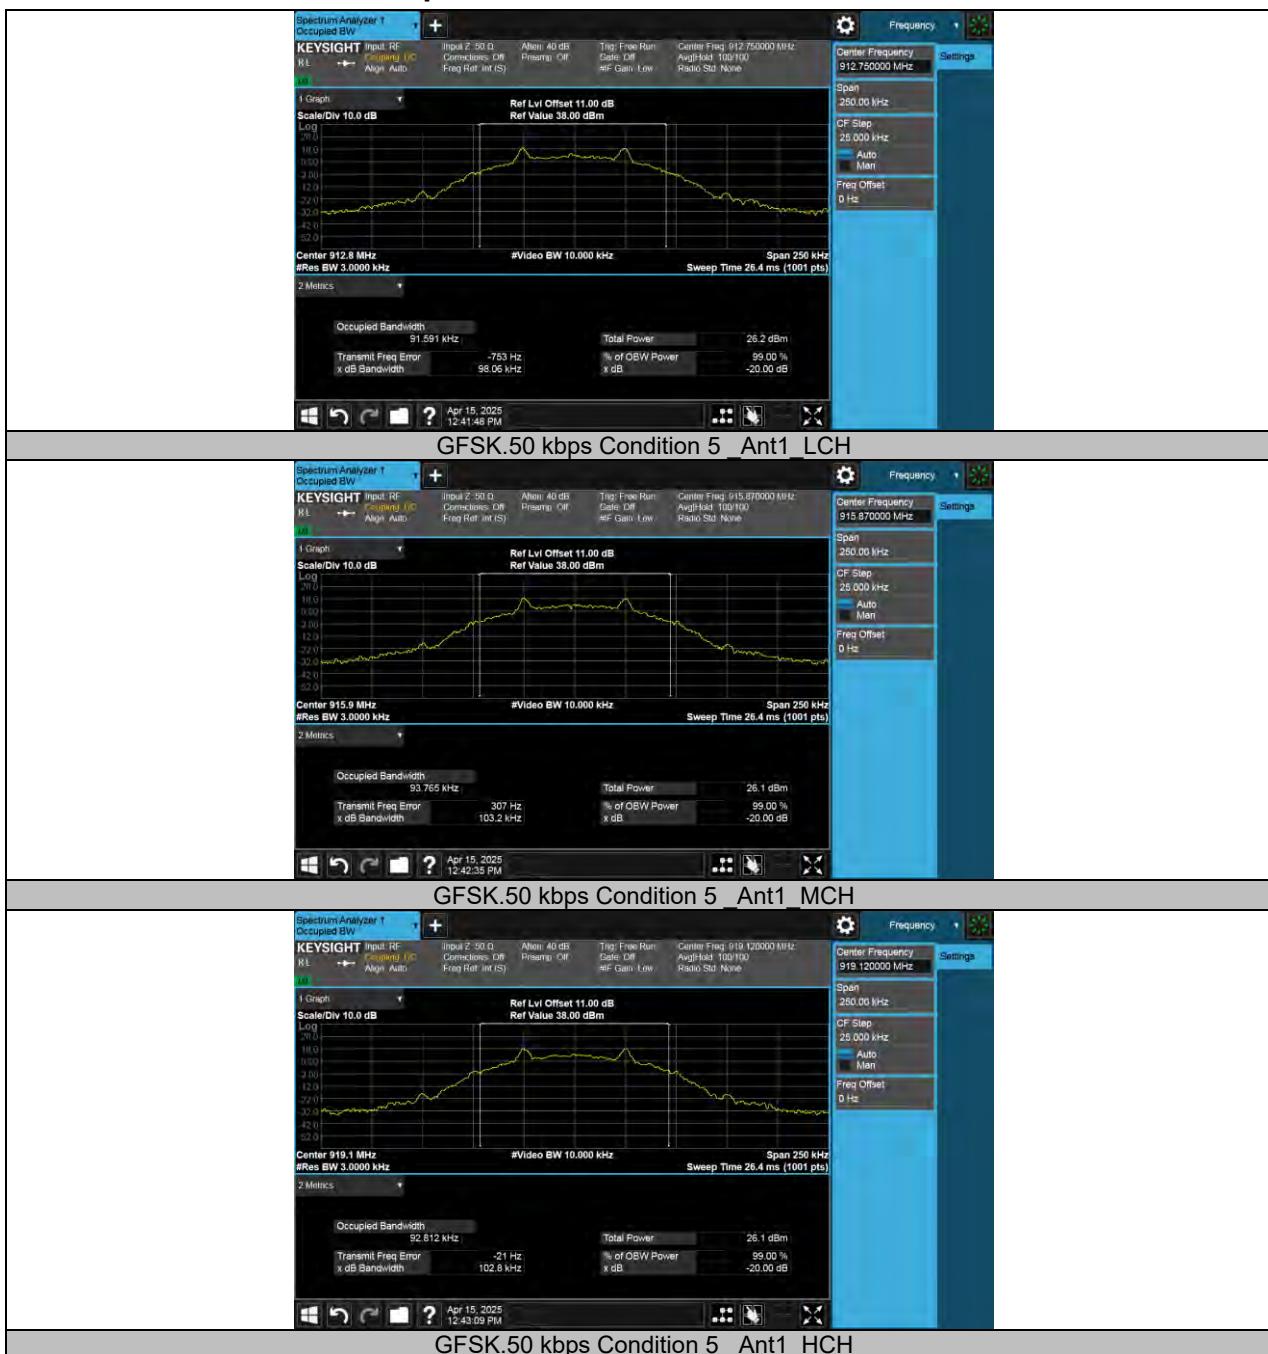

### 15.3. Appendix C5: CONDUCTED OUTPUT POWER

#### 15.3.1. Test Result


Test Mode	Antenna	Channel	PEAK Result[dBm]	Limit[dBm]	Verdict
GFSK.50 kbps Condition 5	Ant1	LCH	18.27	≤30	PASS
		MCH	18.16	≤30	PASS
		HCH	18.11	≤30	PASS

## 15.4. Appendix D5: CARRIER FREQUENCY SEPARATION

### 15.4.1. Test Result

Test Mode	Antenna	Channel	Result [MHz]	Limit[MHz]	Verdict
GFSK.50 kbps Condition 5	Ant1	Hop	0.131	≥0.1032	PASS

### 15.4.2. Test Graphs

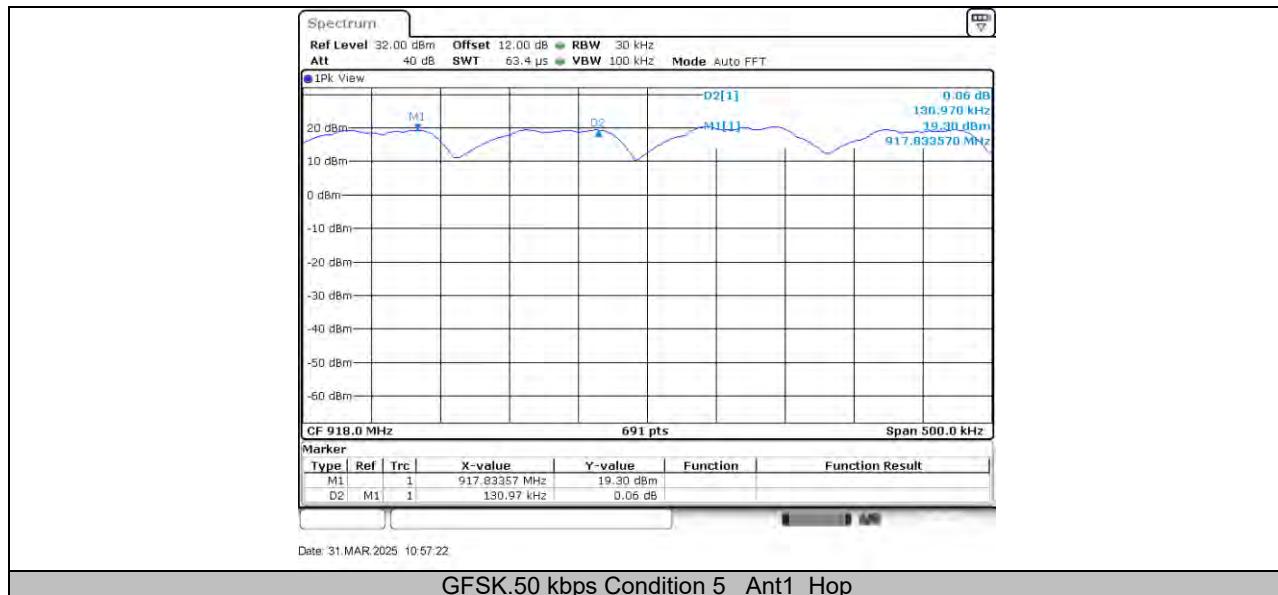


## 15.5. Appendix E5: NUMBER OF HOPPING FREQUENCIES

### 15.5.1. Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
GFSK.50 kbps Condition 5	Ant1	Hop	50	≥50	PASS

### 15.5.2. Test Graphs

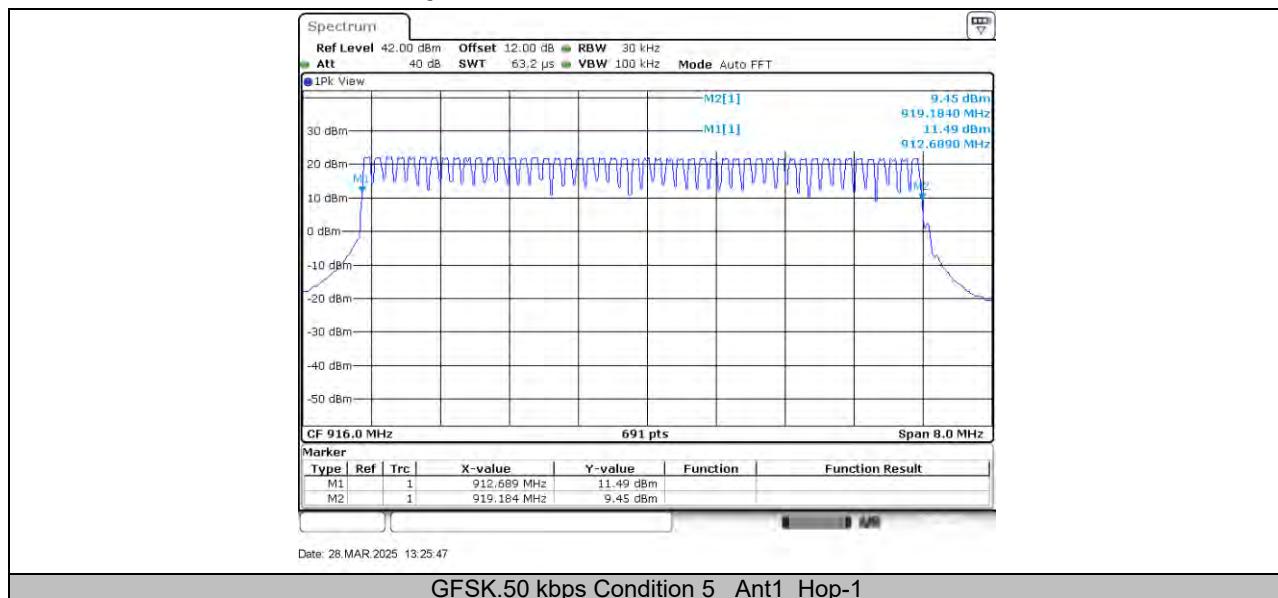

## 15.6. Appendix F5: TIME OF OCCUPANCY (DWELL TIME)

### 15.6.1. Test Result


Test Mode	Antenna	Channel	Time of single slot 1 [ms]	The number of hop channel appear	Burst Width 1 [ms/hop/ch]
GFSK.50 kbps Condition 5	Ant1	Hop	5.797	28	162.316

Test Mode	Antenna	Channel	Dwell Time [ms]	Limit [ms]	Results
GFSK.50 kbps Condition 5	Ant1	Hop	162.316	400	PASS

Note:

GFSK.50 kbps Condition 5: The dwell time = Time of single slot \* The number of hop channel appear within 20s  
 BurstWidth =Time of single slot\*number of single slot

## 15.6.2. Test Graphs

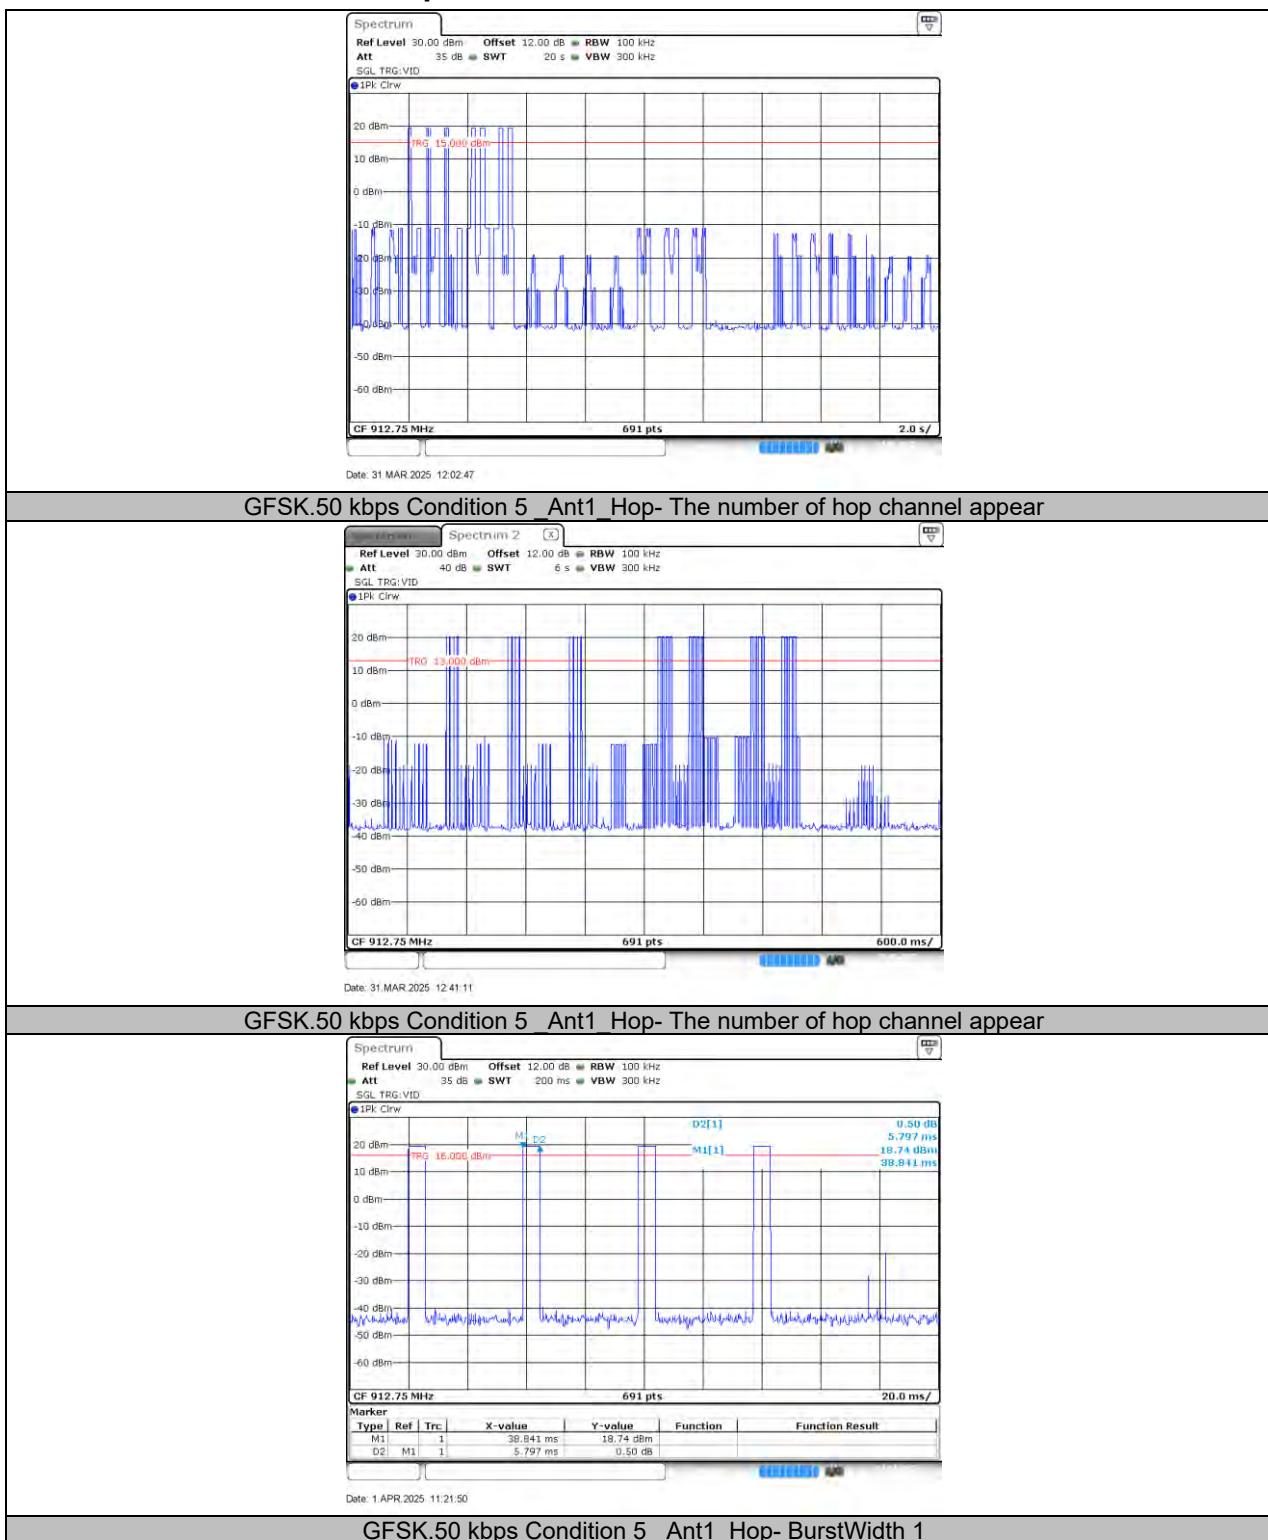


## 15.7. Appendix G5: CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### 15.7.1. Test Result



Test Mode	Antenna	ChName	Result [dBm]	Verdict
GFSK.50 kbps Condition 5	Ant1	LCH	See the below graphs	PASS
		MCH		PASS
		HCH		PASS
		Hop_LCH		PASS
		Hop_HCH		PASS

## 15.7.2. Test Graphs


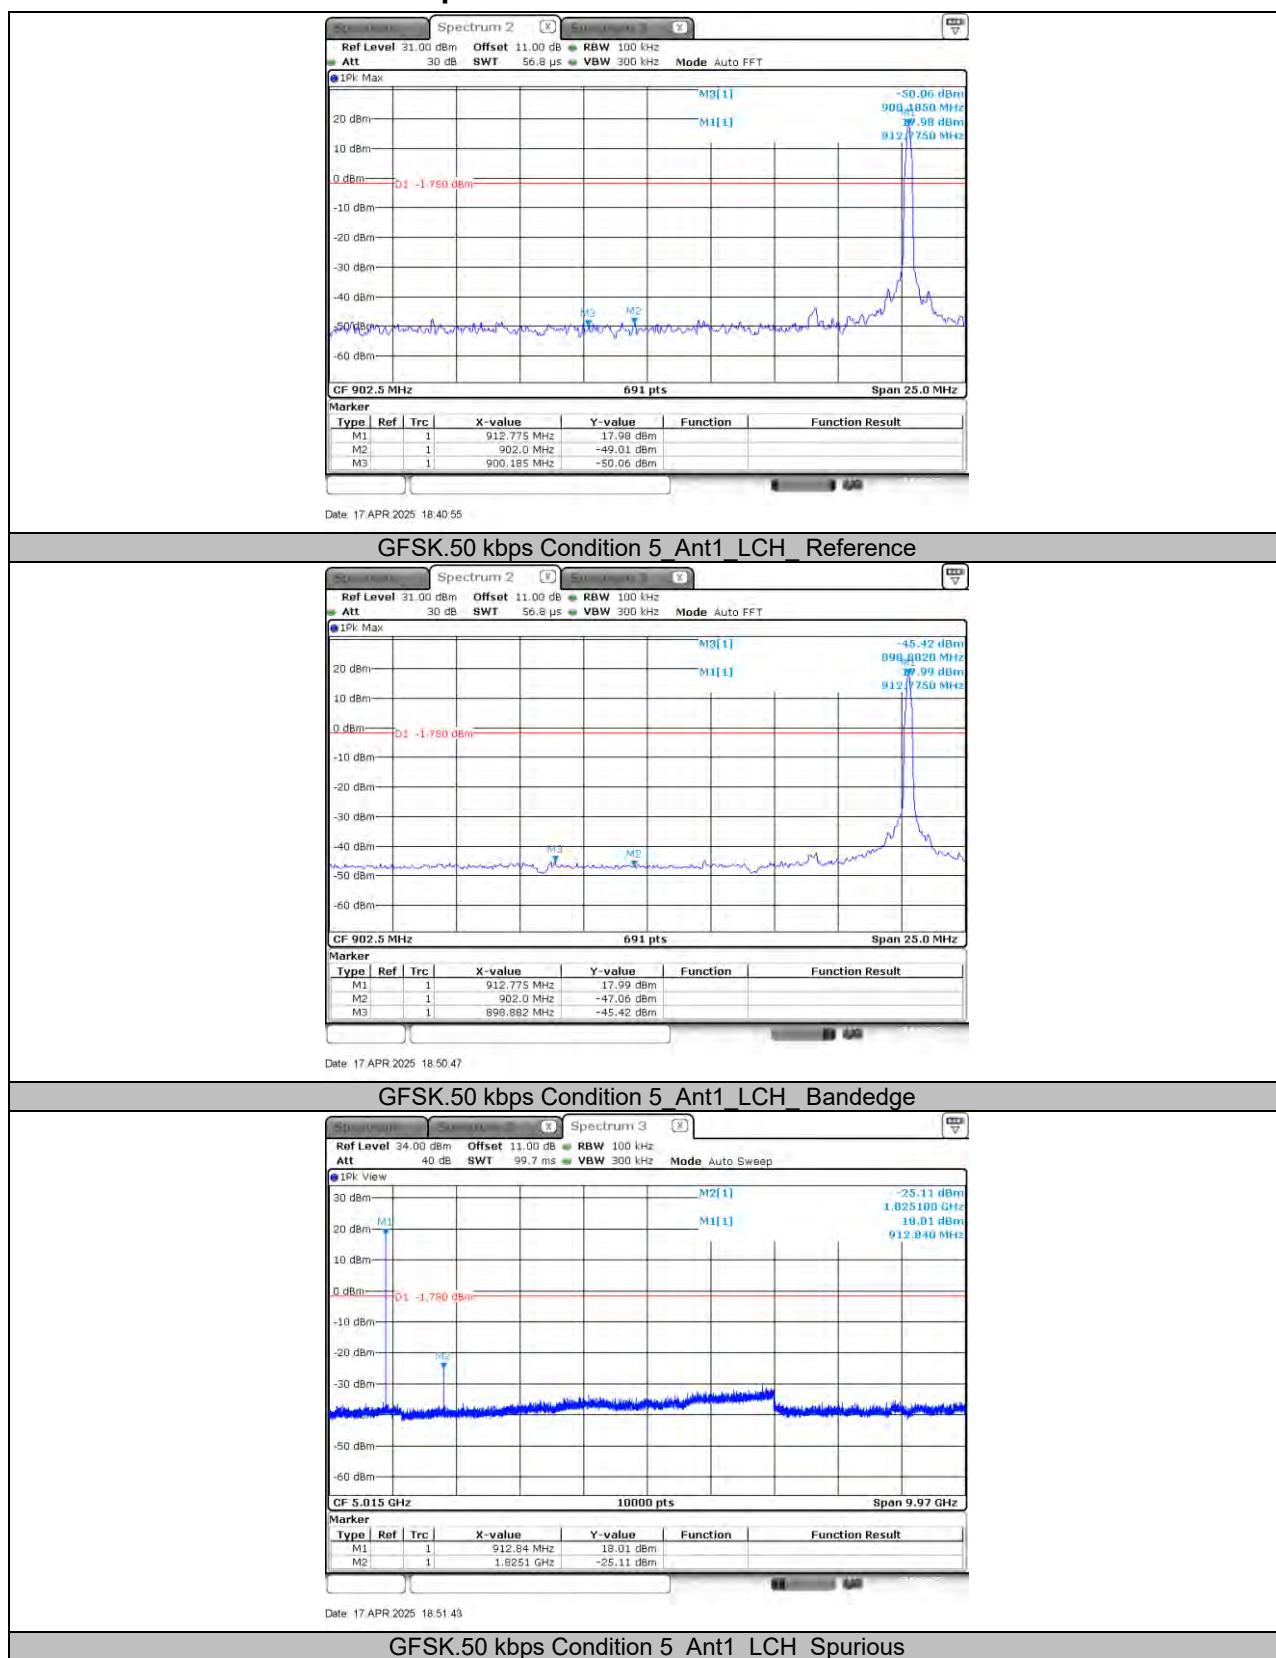




Date: 17 APR 2025 18:26:47

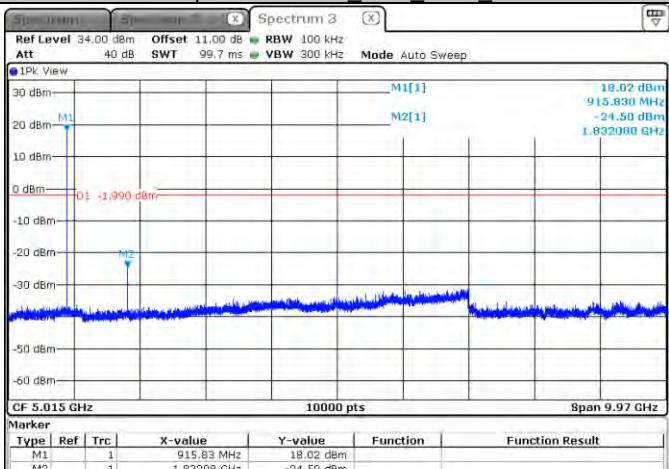


Page 18 APPENDIX A 80-18

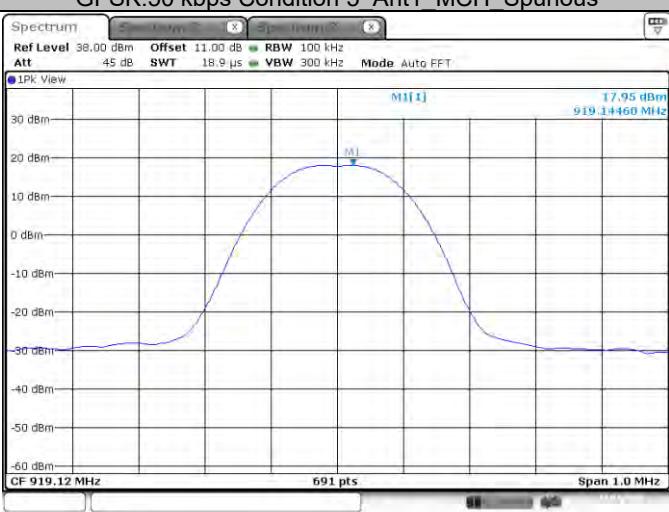

Date: 17 APR 2025 18:23:04



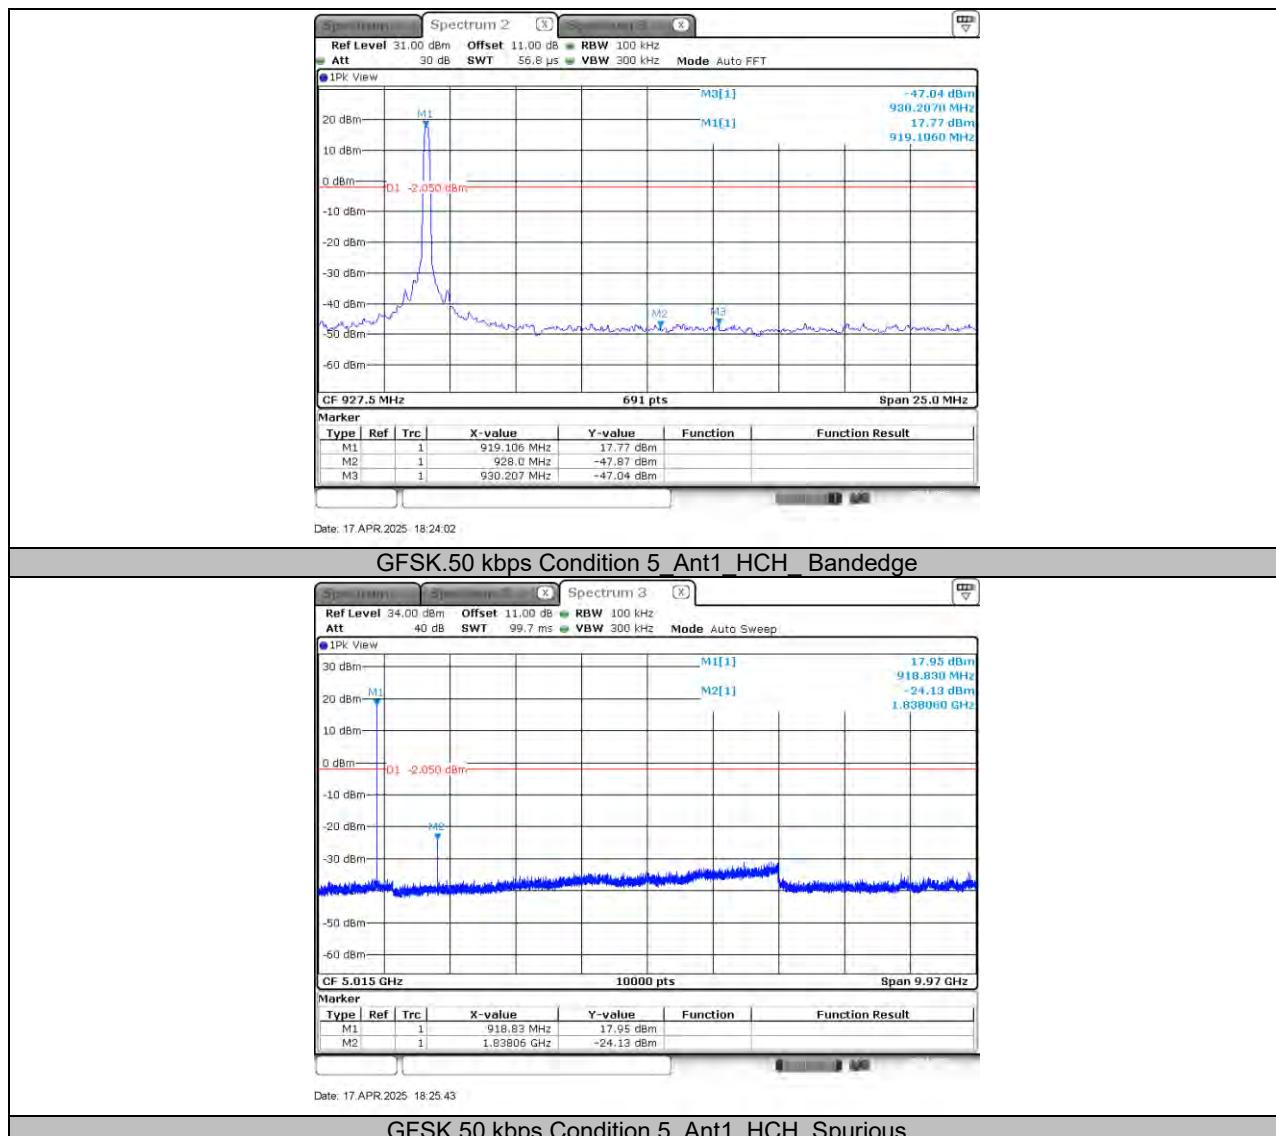


---

**END OF REPORT**