

**Test Report for the  
FCC Testing of a  
Qubi 3C RFID v3  
Workspace Management Device  
to FCC Rule 47CFR 15.225  
for  
QED Advanced Systems Ltd**

Test Report number: C14900TR2

Project number: C7190/1



Author: .....

M Render BSc(Hons), PhD, MIET  
Senior Test Engineer



Checked: .....

J Beevers MPhys(Hons), PhD  
Radio Testing Team Lead



Approved: .....

Dr. Didier Bozec, BSc(Hons), PhD, MBA, CEng, MIET  
Laboratories Director

Issue	Description						Issue by	Date
2	Copy 1		Copy 2		PDF	X	MR	13 <sup>th</sup> February 2023

This report shall not be reproduced, except in full without the prior written approval of Eurofins York.  
The results contained in this report are only applicable to the apparatus tested.



1574

Registered Address:  
Eurofins York Ltd  
i54 Business Park, Valiant Way  
Wolverhampton, WV9 5GB, UK

Registered in England and Wales  
Company Reg. No. 6048589  
VAT Reg. No. GB 887 1276 83

## CONTENTS

<b>Test Report Change History .....</b>	<b>5</b>
<b>Section 1 Test Location.....</b>	<b>6</b>
1.1 UKAS Accreditation.....	6
<b>Section 2 Customer Information .....</b>	<b>7</b>
<b>Section 3 Equipment Details.....</b>	<b>8</b>
3.1 Equipment Under Test (EUT).....	8
3.2 EUT Photographs.....	9
3.3 Configuration of EUT .....	9
3.4 EUT Monitoring/Auxiliary Equipment .....	9
3.5 Monitoring Software .....	9
<b>Section 4 Test Specifications .....</b>	<b>10</b>
4.1 Knowledge Database References.....	11
4.1.1 Conducted Emissions .....	11
4.1.2 Radiated Emissions (9kHz to 30MHz) .....	11
4.1.3 Radiated Emissions (30MHz to 1000MHz) .....	11
4.2 Compliance Statement.....	11
<b>Section 5 Radiated Emission Results.....</b>	<b>12</b>
5.1 Test Specification.....	12
5.2 Procedure and Test Software Version .....	12
5.3 Radiated Emissions (9kHz to 30MHz) .....	13
5.3.1 Limits 47VFR 15.209.....	13
5.3.2 Receiver Settings .....	13
5.3.3 Measurement Distance .....	13
5.3.4 Emissions measurements .....	14
5.3.5 Date of Test.....	14
5.3.6 Test Area.....	14
5.3.7 Tested by.....	14
5.3.8 AC Test Setup .....	14
5.3.9 Magnetic field emissions,13.110MHz to 14.010MHz .....	15
5.3.10 Magnetic field emissions,9kHz to 30MHz and outside the band 13.110MHz to 14.010MHz .....	17
5.4 Radiated Emissions (30MHz to 1GHz) .....	20
5.4.1 Limits at 3m .....	20
5.4.2 Emissions measurements .....	20
5.4.3 Date of Test.....	20
5.4.4 Test Area.....	20
5.4.5 Tested by.....	20
5.4.6 Test Setup .....	21
5.4.7 Electric field emissions, 30MHz to 1GHz .....	22
5.4.8 Quasi Peak correction factors .....	23
5.4.9 Sample Data .....	23
<b>Section 6 Frequency Stability.....</b>	<b>24</b>
6.1 Test Specification.....	24
6.1.1 Date of Test.....	24
6.1.2 Test Area.....	24
6.1.3 Tested by.....	24
6.1.4 Procedure.....	24
6.1.5 Test Results .....	24
<b>Section 7 AC Mains Conducted Emissions.....</b>	<b>26</b>
7.1 Test Specification.....	26
7.2 Power Line Emission Limits .....	26
7.3 Receiver Settings .....	26
7.4 Procedure and Test Software Version .....	27
7.4.1 Date of Test.....	27

7.4.2	Test Area.....	27
7.4.3	Tested by.....	27
7.5	Test Setup.....	28
7.6	Test Results .....	29
7.6.1	Example calculation .....	34
7.6.2	Sample Data .....	34
<b>Appendix A EUT Test Photographs.....</b>		<b>35</b>
<b>Appendix B Test Equipment List .....</b>		<b>36</b>

**List of Figures**

Figure 1 Diagram of EUT.....	9
Figure 2: Test Setup for H-Field Measurements from 9kHz to 30MHz .....	14
Figure 3 Radiated emissions – antenna in parallel orientation .....	16
Figure 4 Radiated emissions – antenna in perpendicular orientation .....	16
Figure 5 Magnetic field emissions Plot, 9kHz to 150kHz. Parallel .....	17
Figure 6 Magnetic field emissions Plot, 9kHz to 150kHz. Perpendicular .....	17
Figure 7 Magnetic field emissions Plot, 150kHz to 30MHz Parallel .....	18
Figure 8 Magnetic field emissions Plot, 150kHz to 30MHz Perpendicular .....	18
Figure 9 Test Setup for E-Field Measurements from 30MHz to 1GHz .....	21
Figure 10 Electric field emissions Plot, 30MHz to 1GHz .....	22
Figure 11 Test set up.....	28
Figure 12 AC mains conducted emissions – Live – antenna connected.....	30
Figure 13: AC mains conducted emissions – Neutral – antenna connected.....	31
Figure 14: AC mains conducted emissions – Live – antenna replaced with 50Ω load .....	32
Figure 15 AC mains conducted emissions – Neutral - antenna replaced with 50Ω load .....	33

**List of Tables**

Table 1 Receiving antenna at 0.8m measurement height, Antenna parallel.....	19
Table 2 Specification limit .....	20
Table 3 Analyser settings .....	20
Table 4 Electric Field Emissions Peaks, 30MHz to 1GHz.....	22
Table 5 Frequency stability with supply voltage Results .....	24
Table 6 Frequency stability with temperature Results.....	25
Table 7 Specification limit .....	26
Table 8 Analyser settings .....	26
Table 9 Electric Field Emissions 150kHz to 30MHz – Live – antenna connected .....	30
Table 10 Electric Field Emissions Peaks, 150kHz to 30MHz – Neutral – antenna connected .....	31
Table 11: Mains conducted emissions 150kHz to 30MHz – Live antenna replaced with 50Ω load.....	32
Table 12 Electric Field Emissions Peaks, 150kHz to 30MHz – Neutral antenna replaced with 50Ω load....	33

## Test Report Change History

Issue	Date	Modification Details
1	6 <sup>th</sup> January 2023	First issue
2	13 <sup>th</sup> February 2023	Corrected product name and FCC ID confirmed
3		
4		
5		
6		
7		
8		
9		
10		

## Section 1 Test Location

All testing was performed at;

<b>Eurofins York</b>	Unit 5
	Speedwell Road
	Castleford
	WF10 5PY
<b>Tel:</b>	01977 731173
<b>Website</b>	<a href="http://www.yorkemc.co.uk">http://www.yorkemc.co.uk</a>
<b>UKAS Testing No.</b>	1574

### 1.1 UKAS Accreditation

Opinions and interpretations expressed herein are outside the scope of UKAS Accreditation.

Eurofins York latest accreditation schedule can be found at:

[http://www.ukas.org/testing/lab\\_detail.asp?lab\\_id=989&location\\_id=&vMenuOption=3](http://www.ukas.org/testing/lab_detail.asp?lab_id=989&location_id=&vMenuOption=3)

Eurofins York Castleford Laboratory, is an accredited facility recognised by the Federal Communications Commission (FCC) for certification testing. The appropriate FCC Designation Number is UK2013, dated 1<sup>st</sup> March 2021.

Eurofins York Castleford Laboratory is recognised by ISED for certification testing.

ISED Assigned Code: 22959

## Section 2 Customer Information

<b>Company name</b>	QED Advanced Systems Limited
<b>Address</b>	22 Bridgwater Court
	Oldmixon Crescent
	Weston-super-Mare
	North Somerset
	BS24 9AY
	United Kingdom
<b>Contact</b>	Mr Ian Fisher
<b>Email</b>	ian.fisher@qedas.com

## Section 3 Equipment Details

### 3.1 Equipment Under Test (EUT)

<b>Date received:</b>	8 <sup>th</sup> February 2022		
<b>EUT name:</b>	Qubi 3C RFID v3		
<b>FCC ID (of final product):</b>	2AB38QUBI3CA		
<b>Serial no:</b>	Not provided		
<b>EUT description:</b>	The apparatus is a Workspace Management Device using 13.56MHz near field communication.		
<b>Antenna</b>	Integral antenna		
<b>Modulation schemes</b>	AFK		
<b>Operating frequency band</b>	13.553MHz to 13.567MHz		
<b>No of units tested:</b>	One		
<b>EUT power:</b>	120V AC supplied via USB to mains adapter or laptop for mains conducted emissions test.		
<b>Highest internal frequency:</b>	13.56MHz		
<b>Size of EUT (cm)</b>	13.1 length	9.5 breadth	2.5 height
<b>Mode/s of operation:</b>	Transmitting continually at 13.56MHz modulated signal.		
<b>Test software:</b>	Not stated		
<b>Modifications incorporated during testing:</b>	None		

Ports and Cables	Cable Length	Screened/unscreened	Connected to
USB cable	5m	unscreened	External PC


### Radio Module(s)

Module – certified with final product	Frequency Range (MHz)	FCC Status	FCC ID
Elatec TWN4 MT3 PI module FCC certified	13.56MHz	Certified	WP5TWN4F4

### 3.2 EUT Photographs

Photographs are supplied separately.

### 3.3 Configuration of EUT

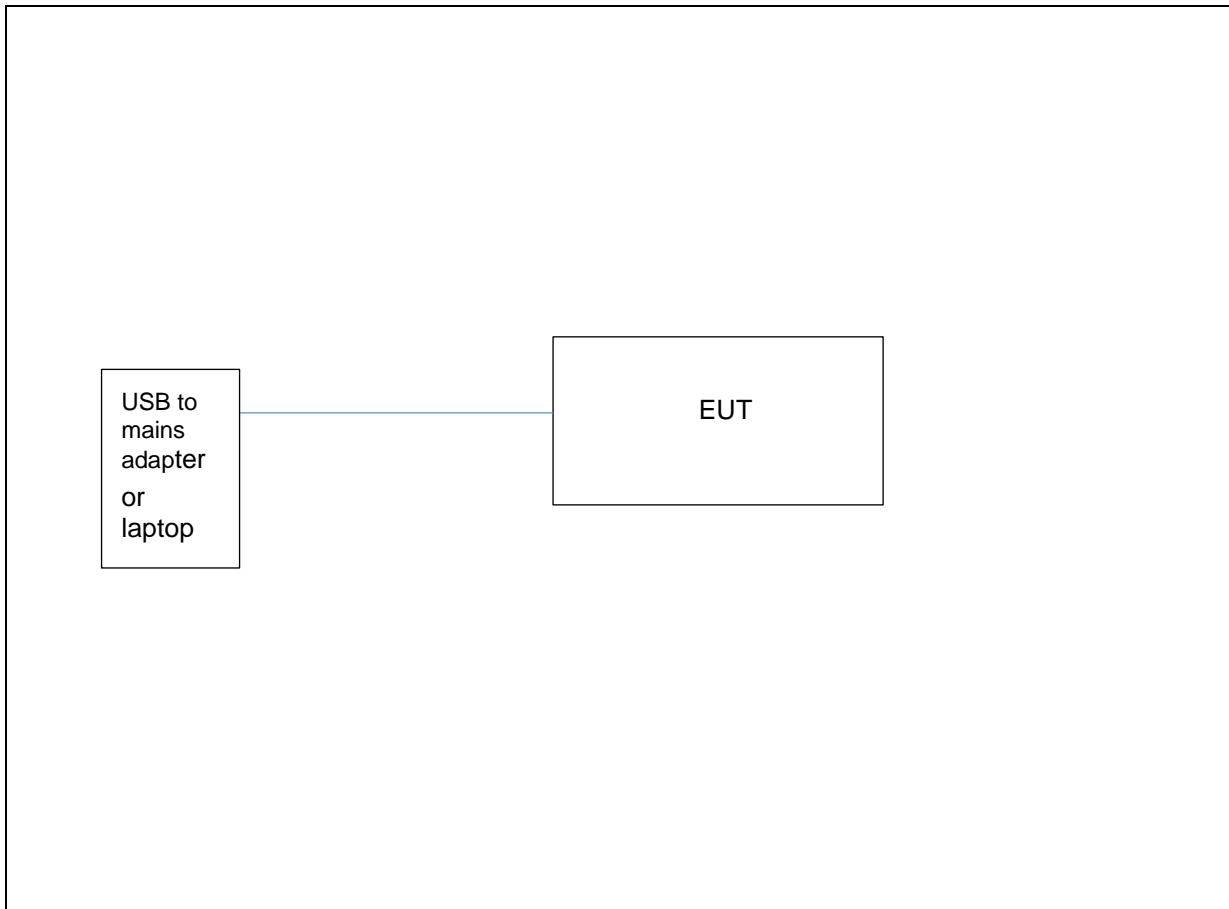

**Figure 1 Diagram of EUT.**

The apparatus contains the radio modules listed in table above in Section 3.1.

### 3.4 EUT Monitoring/Auxiliary Equipment

None.

### 3.5 Monitoring Software

None. The channel required was selected via software prior to the testing.

## Section 4 Test Specifications

The tests were performed in accordance with Eurofins York Quotation QuC7190/1.

For USA:

Test Standard	Relevant Section	Class/limit	Status
CFR 47 Part 15C & ANSI C63.10-2013	Section 15.225(a) Field strength within the band 13.553MHz-13.567MHz	As specified in Section 15.225(a)	Pass
	Section 15.225(a) Field strength within the bands 13.410MHz-13.552MHz and 13.567MHz to 13.710MHz	As specified in Section 15.225(b)	Pass
	15.225(b) Field strength within the bands 13.110MHz-13.410MHz and 13.710MHz to 14.010MHz	As specified in Section 15.225(c)	Pass
	Section 15.225(d) Field Strength outside the band 13.110MHz-14.010MHz	As specified in Section 15.209	Pass
	Section 15.225(e) Frequency tolerance of the carrier signal	As specified in Section 15.225(e)	Pass
	Section 15.31(e) Field strength variation with operating voltage	As specified in Section 15.31(e)	Pass
	15.215 (c) 20dB bandwidth	As specified in Section 15.215 (c)	Pass
	Section 15.207 Mains conducted emissions	As specified in Section 15.207(a)	Pass

Note 1 :All radiated testing was carried out at a test distance of 3m and the limits adjusted accordingly.

#### 4.1 Knowledge Database References

The following KDBs were referenced during the testing.

The latest knowledge database references are available via the FCC KDB website at:

<https://apps.fcc.gov/kdb>

##### 4.1.1 Conducted Emissions

Publication Number	Keyword	Publication Date
174176	Section 15.107, 15.207, 18.307, C63.4, C63.10, Suitable Dummy Load, AC Power Line Conducted Measurement	03/06/2015

##### 4.1.2 Radiated Emissions (9kHz to 30MHz)

Publication Number	Keyword	Publication Date
937606	Test Site Requirements for Part 15 and 18 Devices Operating Below 30 MHz	10/10/2014
460108	Radiated emission measurements below 30 MHz	06/15/2015

##### 4.1.3 Radiated Emissions (30MHz to 1000MHz)

913591	Measurement of radiated emissions at the band-edge for a Part 15 RF Device	04/05/2017
--------	--	------------

#### 4.2 Compliance Statement

The Qubi 3C RFID v3, as tested, was shown to meet requirements of the standards listed in Section 4 of this report.

## Section 5 Radiated Emission Results

### 5.1 Test Specification

FCC Rule Part	47CFR 15.225 Operation in the band 13.110-14.010MHz
Standard	ANSI C63.10:2013
Measurement Uncertainty Radiated tests	<p>The reported uncertainty of measurement <math>y \pm U</math>, where expended uncertainty <math>U</math> is based on a standard uncertainty multiplied by a coverage factor of <math>k=2</math>, providing a level of confidence of approximately 95% is</p> <p>+/- 4.27dB for the frequency range from 9kHz to 30MHz  +/- 5.81dB for the frequency range 30MHz to 1GHz  +/- 4.64dB for the frequency range from 1GHz to 6GHz  +/- 4.96dB for the frequency range from 6GHz to 18GHz  +/- 4.77dB for the frequency range from 18GHz to 40GHz</p>

### 5.2 Procedure and Test Software Version

**Radiated tests:- 47CFR15.205 and 47CFR15.209**

Eurofins York Test procedure (9kHz to 30MHz)	CEP22 Issue 2
Eurofins York test procedure (30MHz to 1GHz)	CEP23b Issue 2
Test software	RadiMation Version 2016.2.8

## 5.3 Radiated Emissions (9kHz to 30MHz)

### 5.3.1 Limits 47VFR 15.209

Frequency	Limits (dB $\mu$ V/m)
9kHz to 490kHz	2400/F(kHz) at 300m
490kHz to 1.705MHz	24000/F(kHz) at 30m
1.705MHz to 30MHz	30 at 30m

Note 1: FCC 47 CFR Part 15 Section 15.209 has different test limits from 300m to 30m depending upon the measurement frequency range. The measured was adjusted for a measurement distance of 3m.

### 5.3.2 Receiver Settings

Receiver Parameters	Setting
Detector Function	Peak
Start Frequency	9kHz
Stop Frequency	150Hz
Resolution Bandwidth	200Hz
Video Bandwidth	Auto

Receiver Parameters	Setting
Detector Function	Peak
Start Frequency	150kHz
Stop Frequency	30MHz
Resolution Bandwidth	10kHz
Video Bandwidth	Auto

### 5.3.3 Measurement Distance

Measurements were performed at a 3m measurement distance.

The detector used was a peak detector.

For measurements in the band 0.009MHz to 0.490MHz the specified measurement distance is 300m. The distance correction will be:

$$\text{Correction} = 40 * \log (3/300) = -80\text{dB}$$

For measurements in the band 0.490MHz to 30MHz the specified measurement distance is 30m. The distance correction will be:

$$\text{Correction} = 40 * \log (3/30) = -40\text{dB}$$

### 5.3.4 Emissions measurements

#### 5.3.5 Date of Test

24<sup>th</sup> October 2022

#### 5.3.6 Test Area

LAB 5 (AC)

#### 5.3.7 Tested by

M Render


#### 5.3.8 AC Test Setup

The EUT was configured in the AC on an 80cm high table.

The measurement was then performed with an antenna to EUT separation distance of 3m within the semi-anechoic chamber based upon the highest emissions results recorded on the outside test site.

The centre of the loop antenna was 1m above the ground and results were obtained with it parallel to the EUT and then perpendicular to the EUT.

The results are maximised in orientation 0-360 degrees.

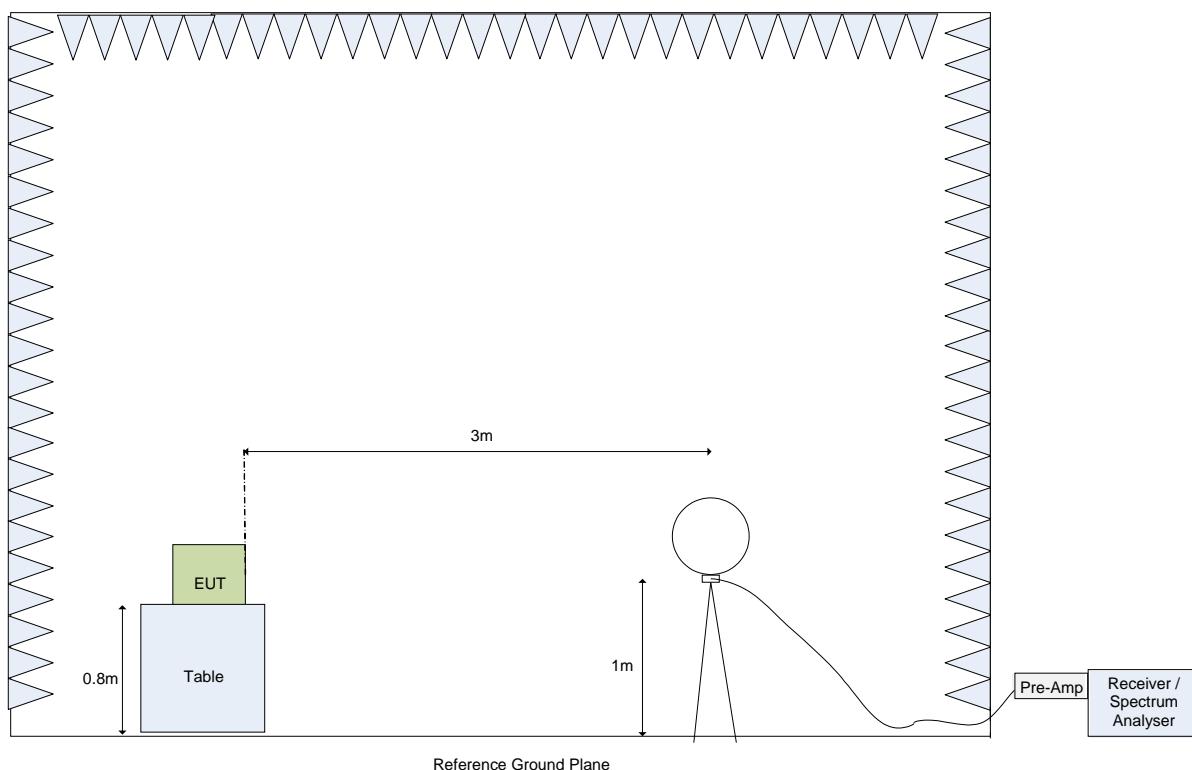

**Figure 2: Test Setup for H-Field Measurements from 9kHz to 30MHz**

Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.4-2014 Clause 5.1.3.

Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.

### 5.3.9 Magnetic field emissions, 13.110MHz to 14.010MHz

The field strength is split into sub-bands as defined below in Section 47CFR 15.225:

- a) Section 15.225(a) Field strength within the band 13.553MHz-13.567MHz

Limit:  $15848\mu\text{V}/\text{m}$  at 30m =  $84\text{dB}\mu\text{V}/\text{m}$  at 30m



- b) Section 15.225(b) Field strength within the bands 13.410MHz-13.552MHz and 13.567MHz to 13.710MHz

Limit:  $3348\mu\text{V}/\text{m}$  at 30m =  $50.5\text{dB}\mu\text{V}/\text{m}$  at 3m

- c) Section 15.225(c) Field strength within the bands 13.110MHz-13.410MHz and 13.710MHz to 14.010MHz


Limit:  $106\mu\text{V}/\text{m}$  at 30m =  $40.5\text{dB}\mu\text{V}/\text{m}$  at 3m

The results of peak detector max-hold emission measurements are presented below. The measurements were taken using an anechoic chamber for initial measurements.

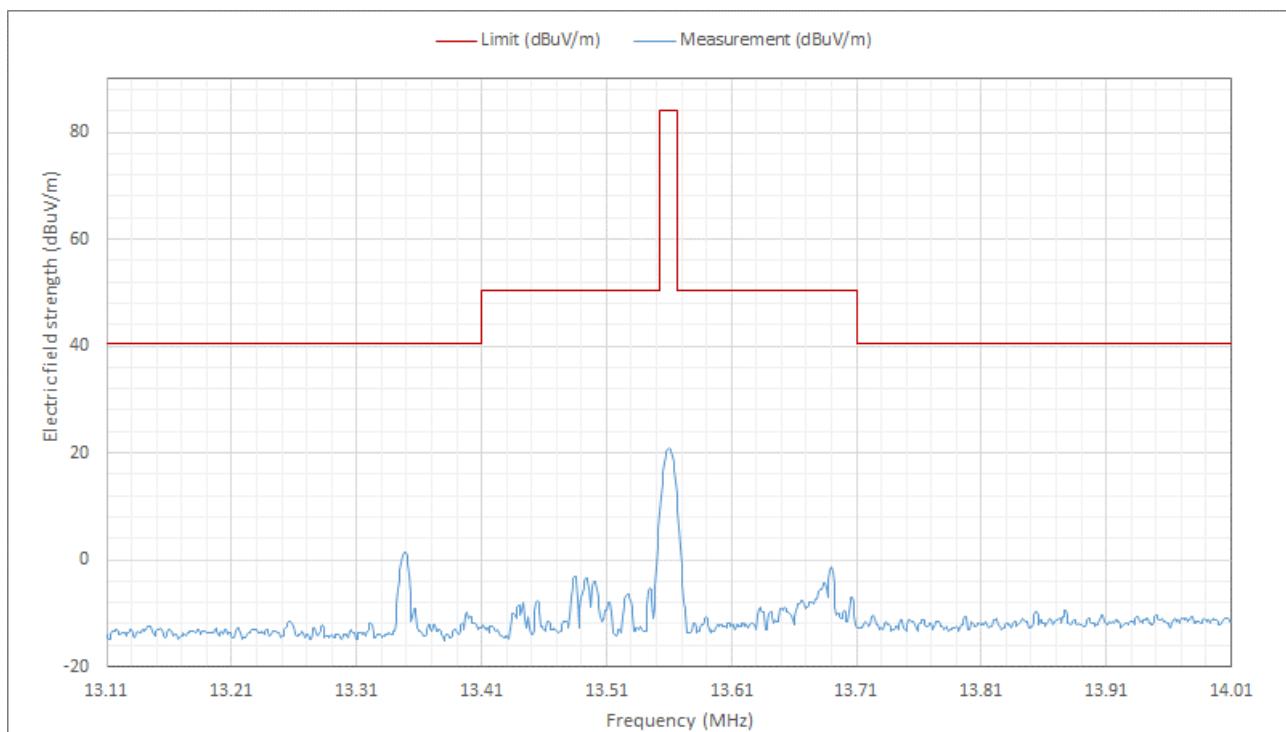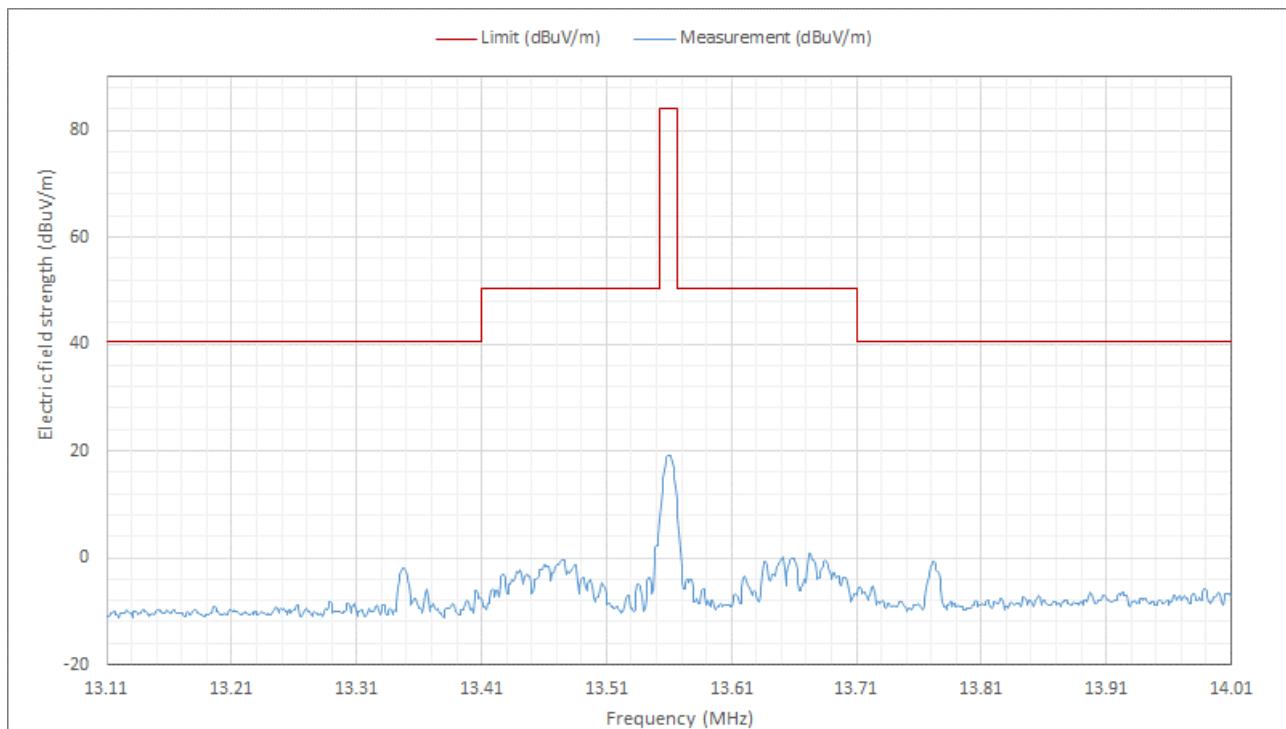


### 5.3.10 Magnetic field emissions, 9kHz to 30MHz and outside the band 13.110MHz to 14.010MHz



The results of peak detector max-hold emission measurements are presented below. The measurements were taken using an AC as initial measurements.

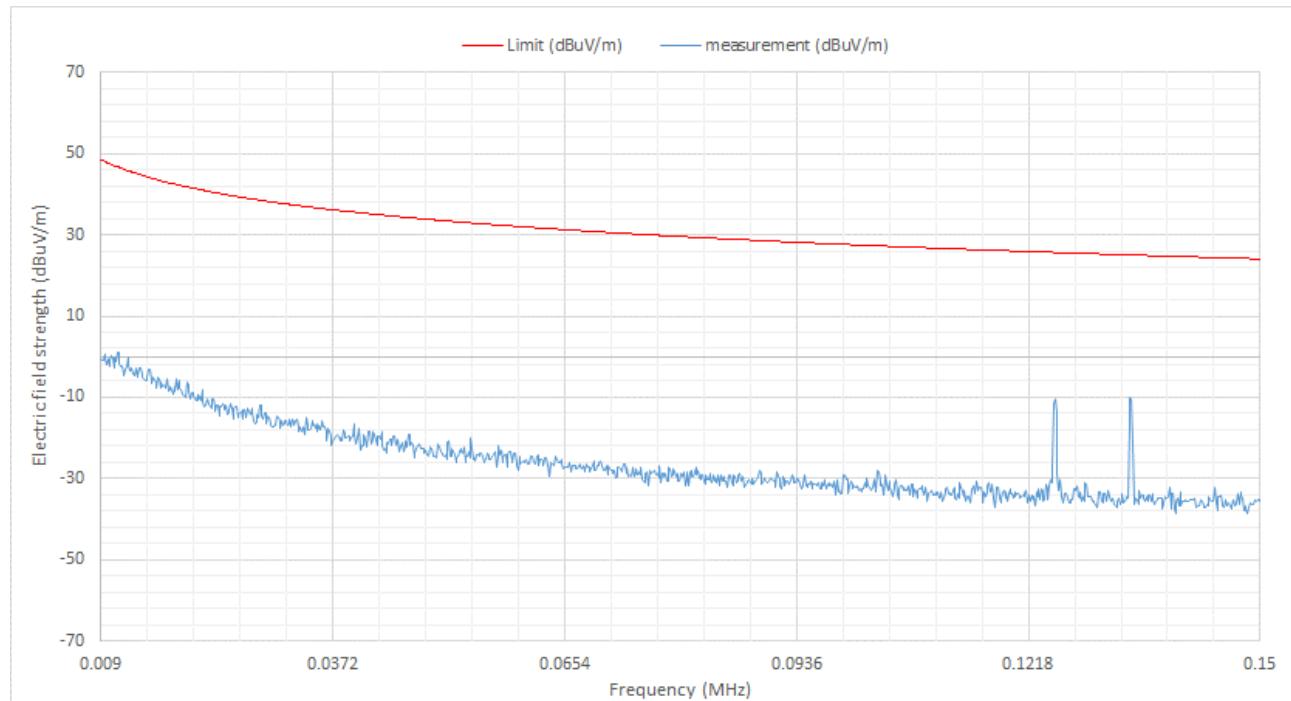

**Figure 5 Magnetic field emissions Plot, 9kHz to 150kHz. Parallel**

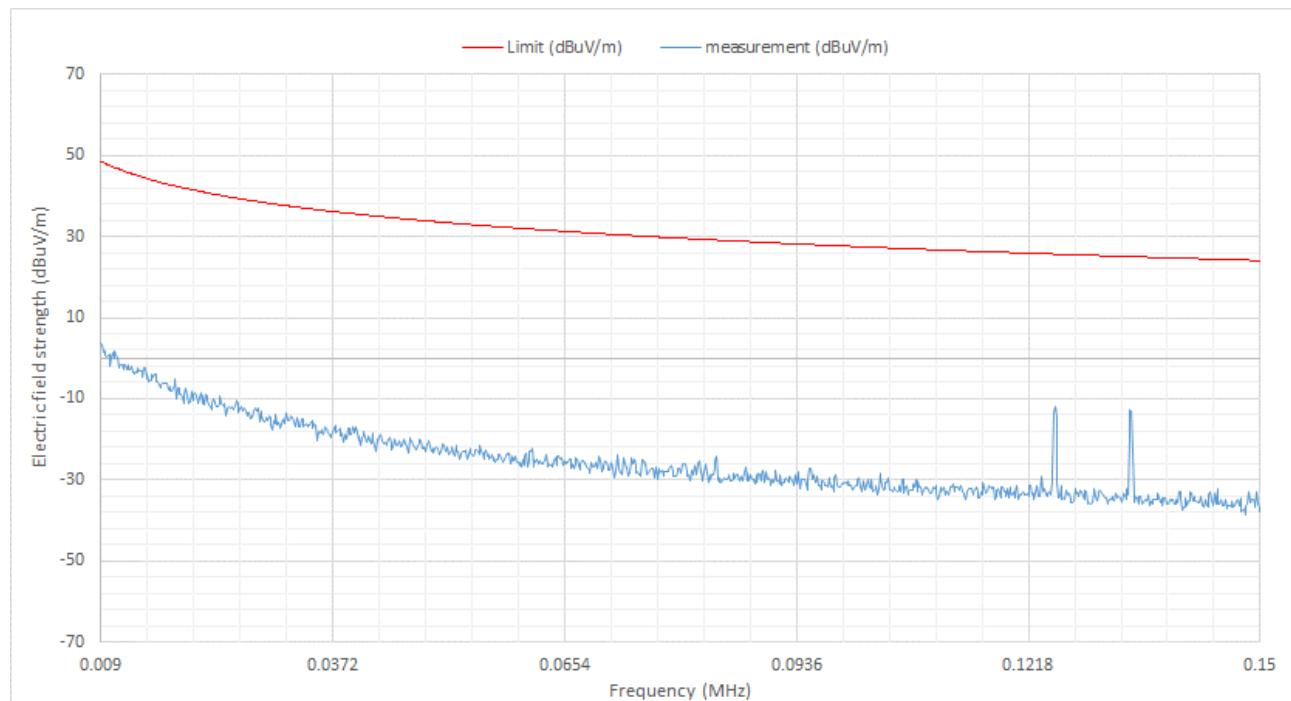

**Figure 6 Magnetic field emissions Plot, 9kHz to 150kHz. Perpendicular**

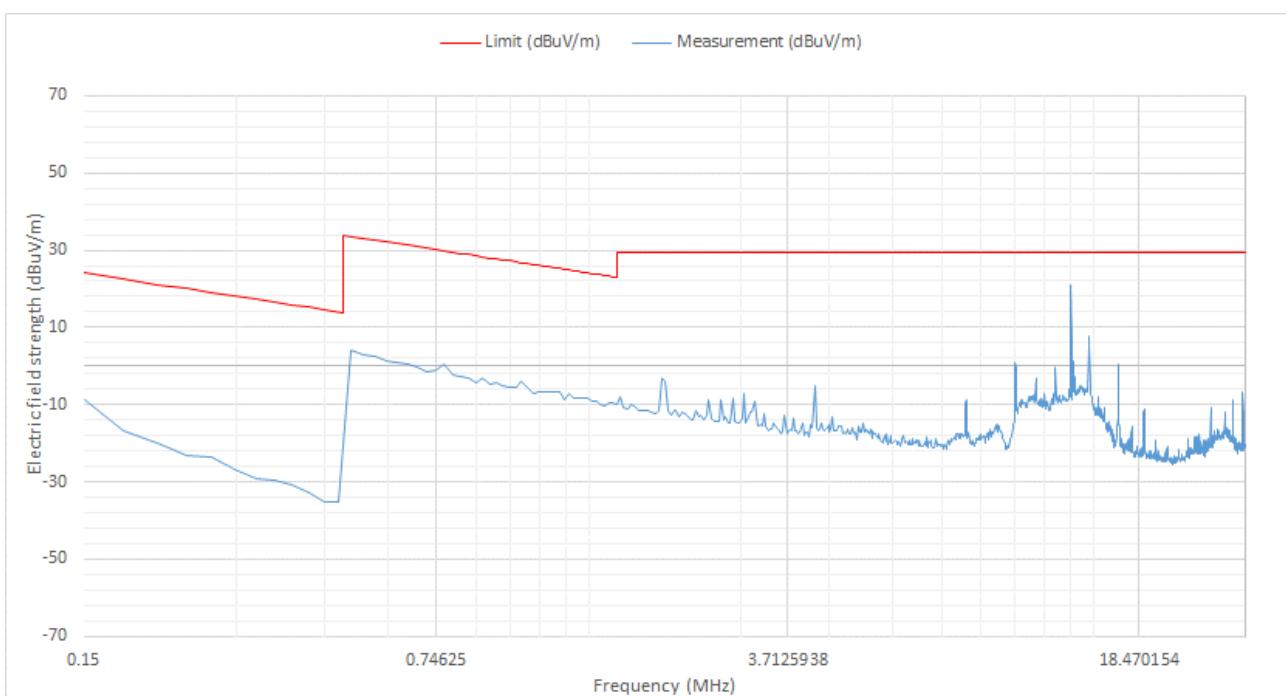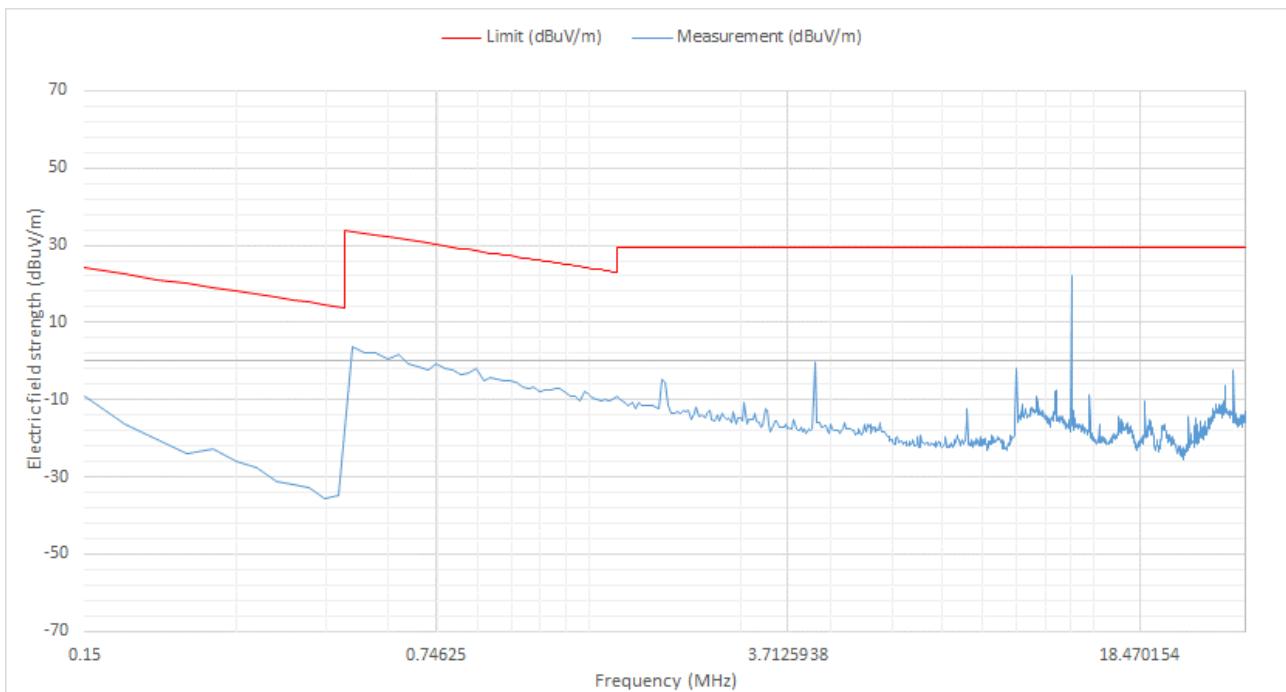

Freq (MHz)	Rx (dB $\mu$ V)	Pre-amp (dB)	Antenna factor dB/m	Distance correction factor (40dB/decade)	Specification Distance (m)	Result at specification distance (dB $\mu$ V/m)	Limit At specification distance (dB $\mu$ V/m)	Margin (dB)	Result
10.540	35.75	29.2	33.19	-40	30	-1.03	30	-31.03	Pass
12.600	36.21	29.18	32.84	-40	30	-0.62	30	-30.62	Pass
13.493	28.53	29.17	32.75	-40	30	-7.89	30	-37.89	Pass
14.750	41.62	29.16	32.59	-40	30	5.05	30	-24.95	Pass
15.880	21.06	29.15	32.42	-40	30	-15.67	30	-45.67	Pass
16.840	37.17	29.14	32.36	-40	30	0.39	30	-29.61	Pass

**Table 1 Receiving antenna at 0.8m measurement height, Antenna parallel**

**No radiated spurious emissions were detected from the product other than the carrier (13.56MHz). The above representative noise floor emissions were taken.**

#### 5.4 Radiated Emissions (30MHz to 1GHz)

Radiated electric field emission measurements are applied as defined in 47CFR15.205 and 47CFR15.209.

##### 5.4.1 Limits at 3m

Frequency (MHz)	Electric Field Strength Limit (dB $\mu$ V/m) at 3m measurement distance
<b>Quasi Peak</b>	
30 - 88	40.0
88 -216	43.5
216 - 960	46.0
960- 1000	54.0

**Table 2 Specification limit**

Note: FCC 47 CFR Part 15 Section 15.209 and 15.205 specifies test limits at 3m

##### Receiver Settings

Receiver Parameters	Setting
Detector Function	Quasi Peak
Start Frequency	30MHz
Stop Frequency	1000MHz
Resolution Bandwidth	120kHz
Video Bandwidth	Auto

**Table 3 Analyser settings**

##### 5.4.2 Emissions measurements

##### 5.4.3 Date of Test

26<sup>th</sup> October 2022

##### 5.4.4 Test Area

LAB 1 (SAC)


##### 5.4.5 Tested by

M Render

#### 5.4.6 Test Setup

The EUT was configured in the SAC on an 80cm high polystyrene table.

The measurement was performed with an antenna to EUT separation distance of 3m. The results were maximised in orientation 0-360 degrees and height 1-4m.

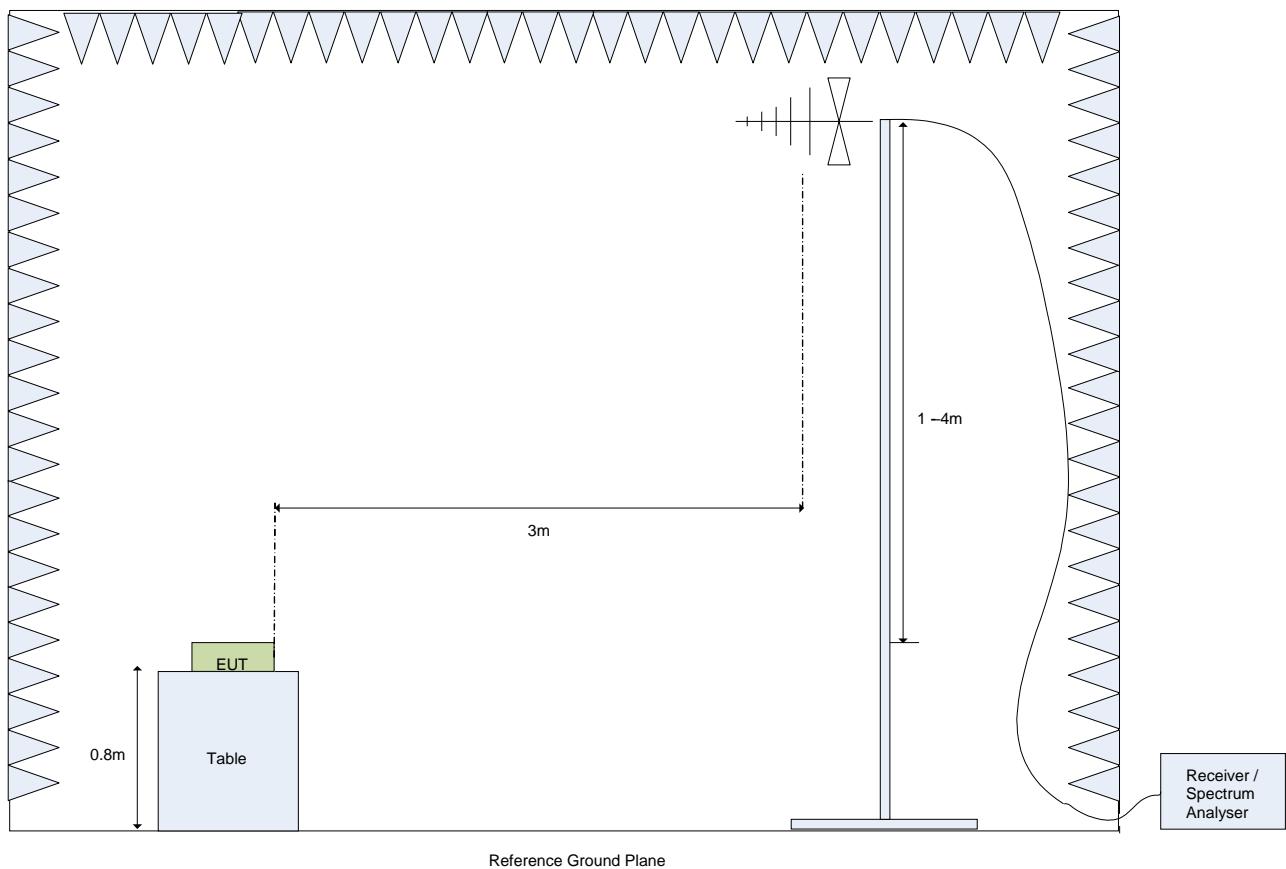

**Figure 9 Test Setup for E-Field Measurements from 30MHz to 1GHz**

Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.10-2013.

Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.

## 5.4.7 Electric field emissions, 30MHz to 1GHz

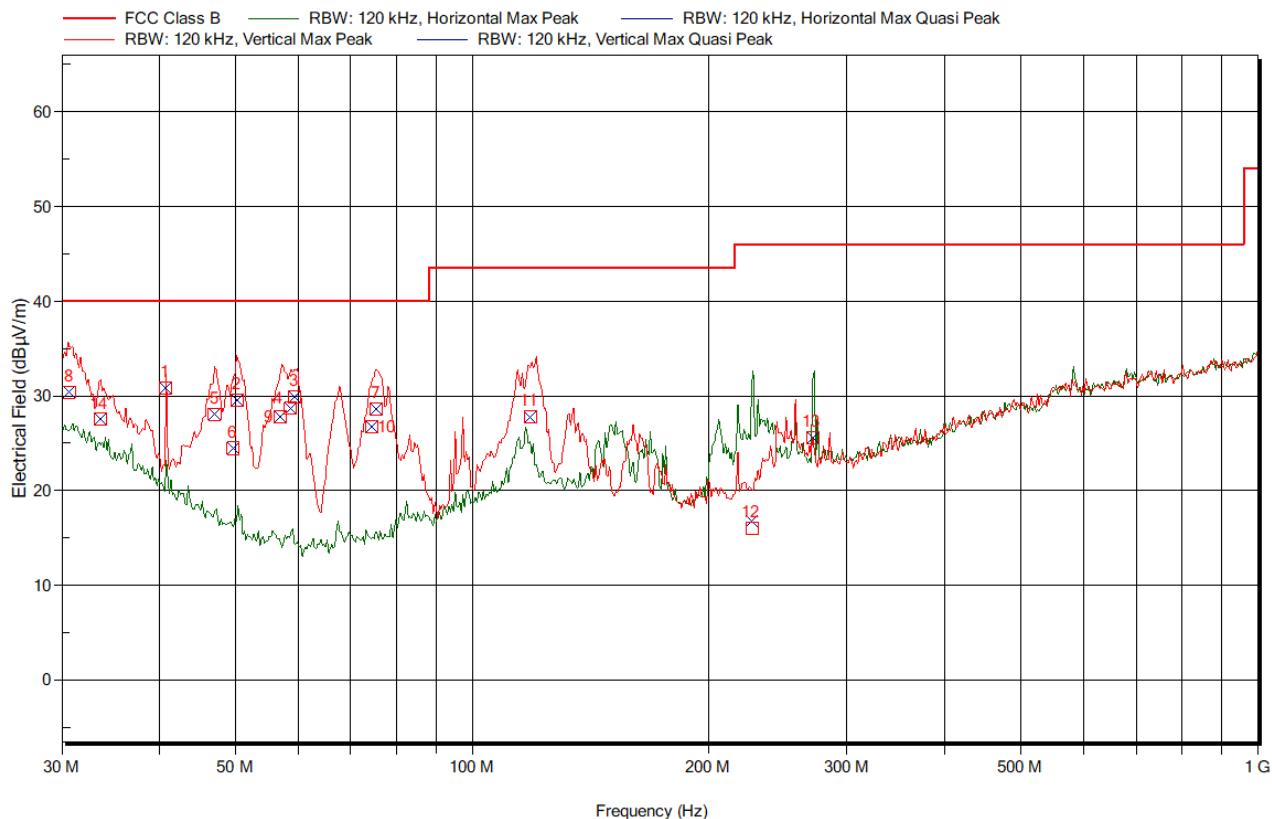


Figure 10 Electric field emissions Plot, 30MHz to 1GHz

Frequency	Quasi-Peak	Quasi Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height	Polarization
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB		degrees	m	
30.660	30.40	40	-9.60	Pass	20	1.0	Vertical
46.980	28.00	40	-12.00	Pass	150	1.0	Vertical
49.560	24.40	40	-15.60	Pass	180	1.0	Vertical
50.160	29.50	40	-10.50	Pass	285	1.0	Vertical
57.000	27.80	40	-12.20	Pass	90	1.0	Vertical
58.680	28.70	40	-11.30	Pass	220	1.0	Vertical
59.340	29.90	40	-10.10	Pass	280	1.0	Vertical
74.520	26.70	40	-13.30	Pass	0	1.2	Vertical
75.420	28.60	40	-11.40	Pass	60	1.3	Vertical

Table 4 Electric Field Emissions Peaks, 30MHz to 1GHz.

#### 5.4.8 Quasi Peak correction factors

The quasi peak correction is shown in the above table. This correction figure consists of), Antenna factor (AF); Attenuator loss (AL) and Cable loss (CL).

Field strength (FS) is calculated as follows:

$$FS (\text{dB}\mu\text{V}/\text{m}) = \text{Indicated Signal Level} (\text{dB}\mu\text{V}) + AF (\text{dB}) + AL (\text{dB}) + CL (\text{dB})$$

#### 5.4.9 Sample Data

The Quasi-Peak level at 50.160MHz

$$FS (\text{dB}\mu\text{V}/\text{m}) 29.50 = 15.00(\text{dB}\mu\text{V}) + 13.80(\text{dB}/\text{m}) + 0.70(\text{dB}) = 29.50\text{dB}\mu\text{V}/\text{m}$$

## Section 6 Frequency Stability

### 6.1 Test Specification

FCC Rule	47CFR 15.225 (e) – Frequency tolerance with temperature variation
Standard	ANSI C63.10:2013
Measurement Uncertainty	The reported uncertainty of measurement $y \pm U$ , where expended uncertainty $U$ is based on a standard uncertainty multiplied by a coverage factor of $k=2$ , providing a level of confidence of approximately 95% is $\pm 1 \times 10^{-8}$

#### 6.1.1 Date of Test

11<sup>th</sup> November 2022

#### 6.1.2 Test Area

LAB 7 - bench

#### 6.1.3 Tested by

M Render

#### 6.1.4 Procedure

For frequency stability with respect to supply voltage the procedures of ANSI C63.10 Section 6.8.2 were followed. The measurements were performed at ambient room temperature.

For frequency stability with respect to ambient temperature the procedure of ANSI C63.10 Section 6.8.1 was followed.

#### 6.1.5 Test Results

Supply voltage (V ac)	Frequency (MHz)	Nominal	Deviation	Limit (%)	Result	
115% of Nom	138	13.560085	13.56	0.000626844	0.01	Within limit
85% of Nom	102	13.560888	13.56	0.006548673	0.01	Within limit

**Table 5 Frequency stability with supply voltage Results**

Temperature (°C)	Time	Frequency (MHz)	Nominal	Deviation (%)	Limit 47CFR15.225 (%)	Result
50	Startup	13.560705	13.56	-0.005199115	0.01	Within Limit
	2min	13.560009	13.56	-6.63717x10 <sup>-5</sup>	0.01	Within Limit
	5min	13.560069	13.56	-0.00050885	0.01	Within Limit
	10min	13.559862	13.56	0.001017699	0.01	Within Limit
40	Startup	13.560282	13.56	-0.002079646	0.01	Within Limit
	2min	13.560059	13.56	-0.000435103	0.01	Within Limit
	5min	13.56032	13.56	-0.002359882	0.01	Within Limit
	10min	13.560238	13.56	-0.001755162	0.01	Within Limit
30	Startup	13.560037	13.56	-0.000272861	0.01	Within Limit
	2min	13.560067	13.56	-0.000494100	0.01	Within Limit
	5min	13.560067	13.56	-0.000494100	0.01	Within Limit
	10min	13.560067	13.56	-0.000494100	0.01	Within Limit
20	Startup	13.560073	13.56	-0.000538348	0.01	Within Limit
	2min	13.560017	13.56	-0.000125369	0.01	Within Limit
	5min	13.560081	13.56	-0.000597345	0.01	Within Limit
	10min	13.56074	13.56	-0.005457227	0.01	Within Limit
10	Startup	13.560091	13.56	-0.000671091	0.01	Within Limit
	2min	13.560098	13.56	-0.000722714	0.01	Within Limit
	5min	13.560103	13.56	-0.000759587	0.01	Within Limit
	10min	13.560111	13.56	-0.000818584	0.01	Within Limit
0	Startup	13.560103	13.56	-0.000759587	0.01	Within Limit
	2min	13.560129	13.56	-0.000951327	0.01	Within Limit
	5min	13.560132	13.56	-0.000973451	0.01	Within Limit
	10min	13.560142	13.56	-0.001047198	0.01	Within Limit
-10	Startup	13.56014	13.56	-0.001032448	0.01	Within Limit
	2min	13.560141	13.56	-0.001039823	0.01	Within Limit
	5min	13.560141	13.56	-0.001039823	0.01	Within Limit
	10min	13.560142	13.56	-0.001047198	0.01	Within Limit
-20	Startup	13.560149	13.56	-0.00109882	0.01	Within Limit
	2min	13.560127	13.56	-0.000936578	0.01	Within Limit
	5min	13.560137	13.56	-0.001010324	0.01	Within Limit
	10min	13.560133	13.56	-0.000980826	0.01	Within Limit

Table 6 Frequency stability with temperature Results

## Section 7AC Mains Conducted Emissions

### 7.1 Test Specification

Regulation (USA)	47CFR15.207
Standard	ANSI C63.10:2013
Measurement Uncertainty	The reported uncertainty of measurement $y \pm U$ , where expended uncertainty $U$ is based on a standard uncertainty multiplied by a coverage factor of $k=2$ , providing a level of confidence of approximately 95 % is +/- 3.45dB

### 7.2 Power Line Emission Limits

Frequency (MHz)	Class B (dB $\mu$ V)	
	Quasi Peak	Average
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5.0	56.0	46.0
5.0 - 30	60.0	50.0

Table 7 Specification limit

Note: \* The limit decreases linearly with the logarithm of the frequency in the range

### 7.3 Receiver Settings

Receiver Parameters	Setting
Detector Function	Quasi Peak and Average
Start Frequency	150kHz
Stop Frequency	30MHz
Resolution Bandwidth	10kHz
Video Bandwidth	Auto

Table 8 Analyser settings

#### 7.4 Procedure and Test Software Version

Eurofins York test procedure	CEP19 Issue 5
Test software	RadiMation Version 2016.1.6

##### 7.4.1 Date of Test

2<sup>nd</sup> November 2022

##### 7.4.2 Test Area

LAB 2

##### 7.4.3 Tested by

M Render

### 7.5 Test Setup

This test was applied to the EUT's Live and Neutral lines. The EUT was configured in the screened room on an 80cm high table was positioned 40cm from the room wall.

A calibrated mains extension lead was used to ensure a known impedance was presented to the EUT

The EUT was then powered from the mains supply via a Line Impedance Stabilisation Network (LISN).

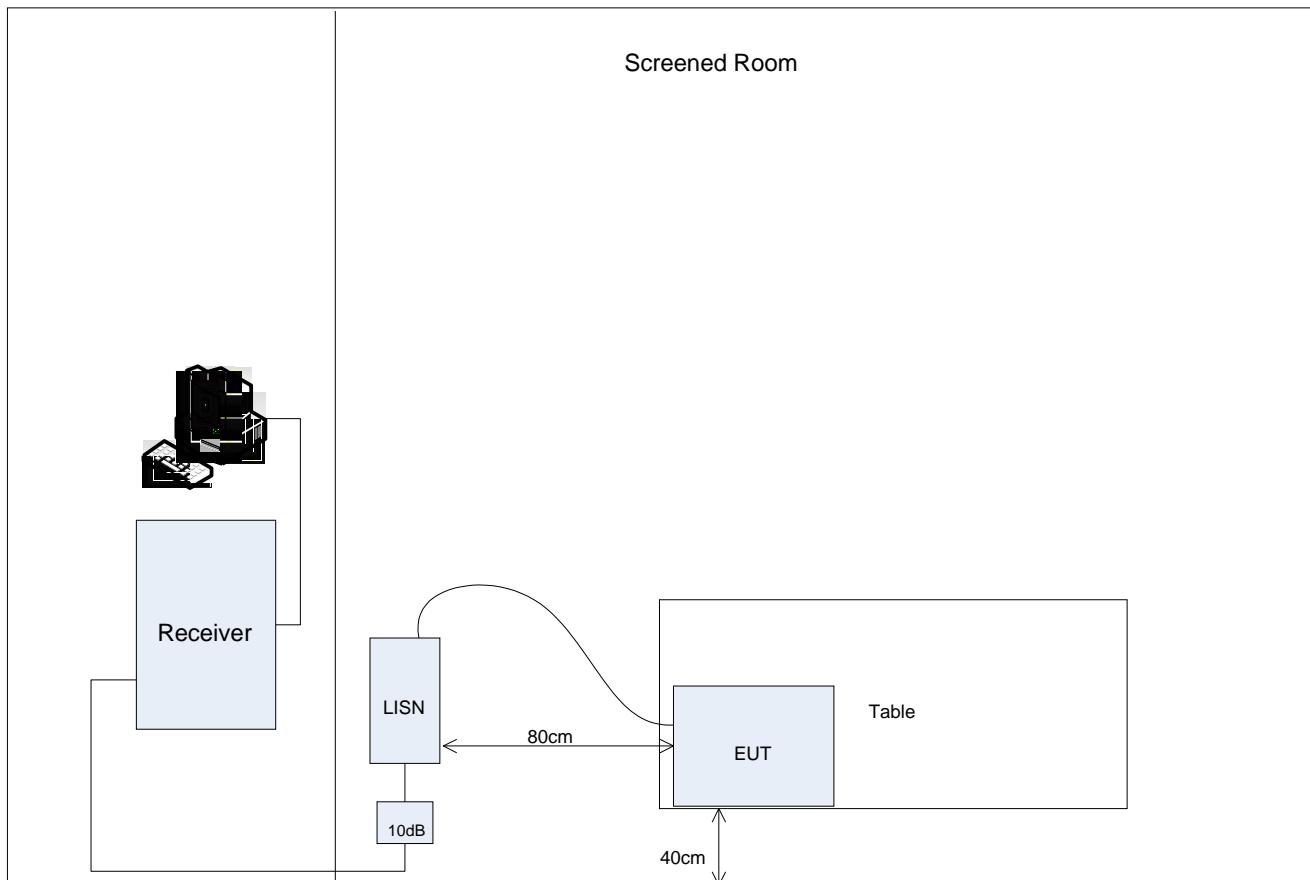


Figure 11 Test set up

## 7.6 Test Results

This section contains graphical and tabulated data. The following data is presented:

Mode of Operation	Conductor	Test configuration	Result summary
13.56MHz	Live	Antenna connected	Pass
13.56MHz	Neutral	Antenna connected	Pass
13.56MHz	Live	50Ωload connected	Pass
13.56MHz	Neutral	50Ωload connected	Pass

**Note:**

From FCC KDB document 174176 D01 Line Conducted FAQ v01r01:

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band.

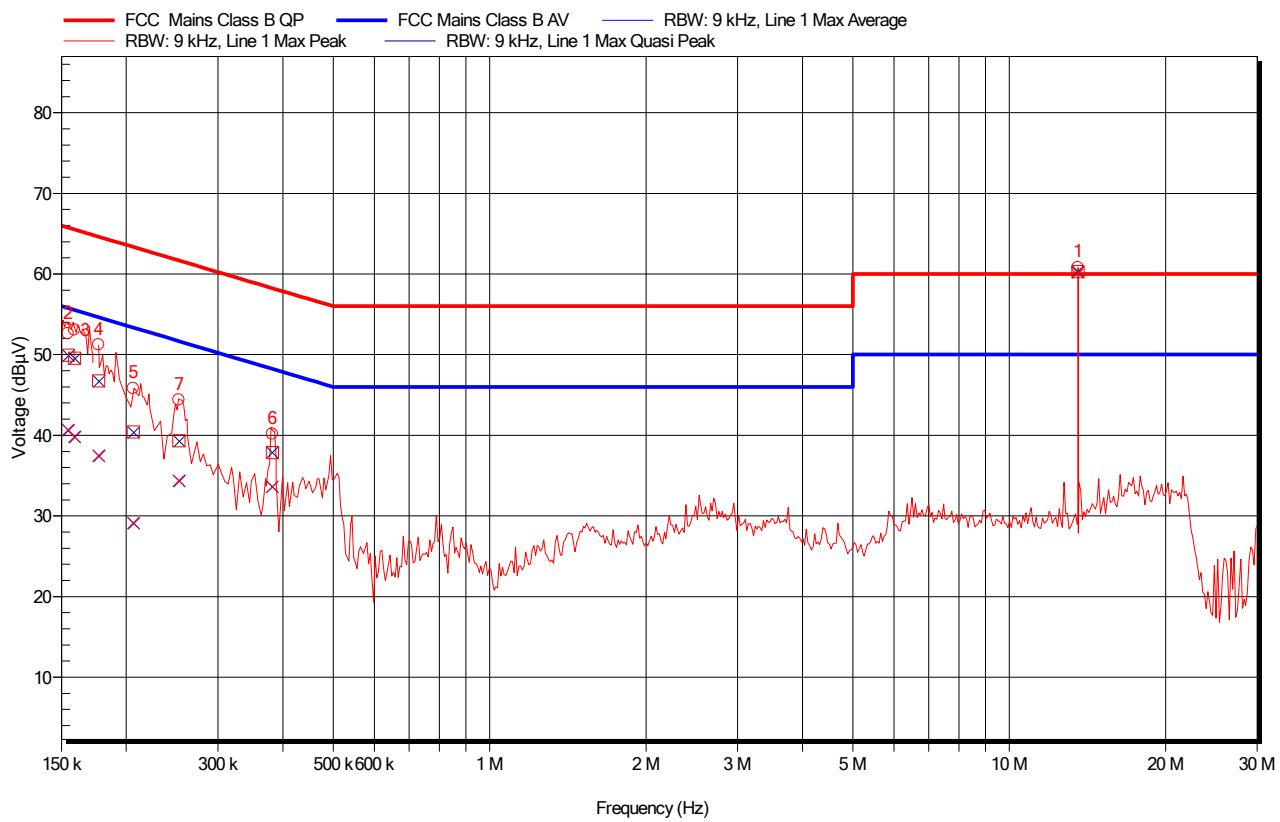


Figure 12 AC mains conducted emissions – Live – antenna connected

Freq. (MHz)	Average (dBμV)	Average Limit (dBμV)	Average Difference (dB)	Average Status	Quasi-Peak (dBμV)	Quasi-Peak Limit (dBμV)	Quasi-Peak Difference (dB)	Quasi-Peak Status
0.155	40.70	55.80	-15.10	Pass	50.00	65.80	-15.80	Pass
0.159	39.80	55.50	-15.69	Pass	49.60	65.50	-15.96	Pass
0.177	37.50	54.60	-17.15	Pass	46.70	64.60	-17.90	Pass
0.206	29.10	53.40	-24.23	Pass	40.40	63.40	-22.92	Pass
13.560	60.20	50.00	10.20	Pass	60.30	60.00	0.30	N/A

Table 9 Electric Field Emissions 150kHz to 30MHz – Live – antenna connected

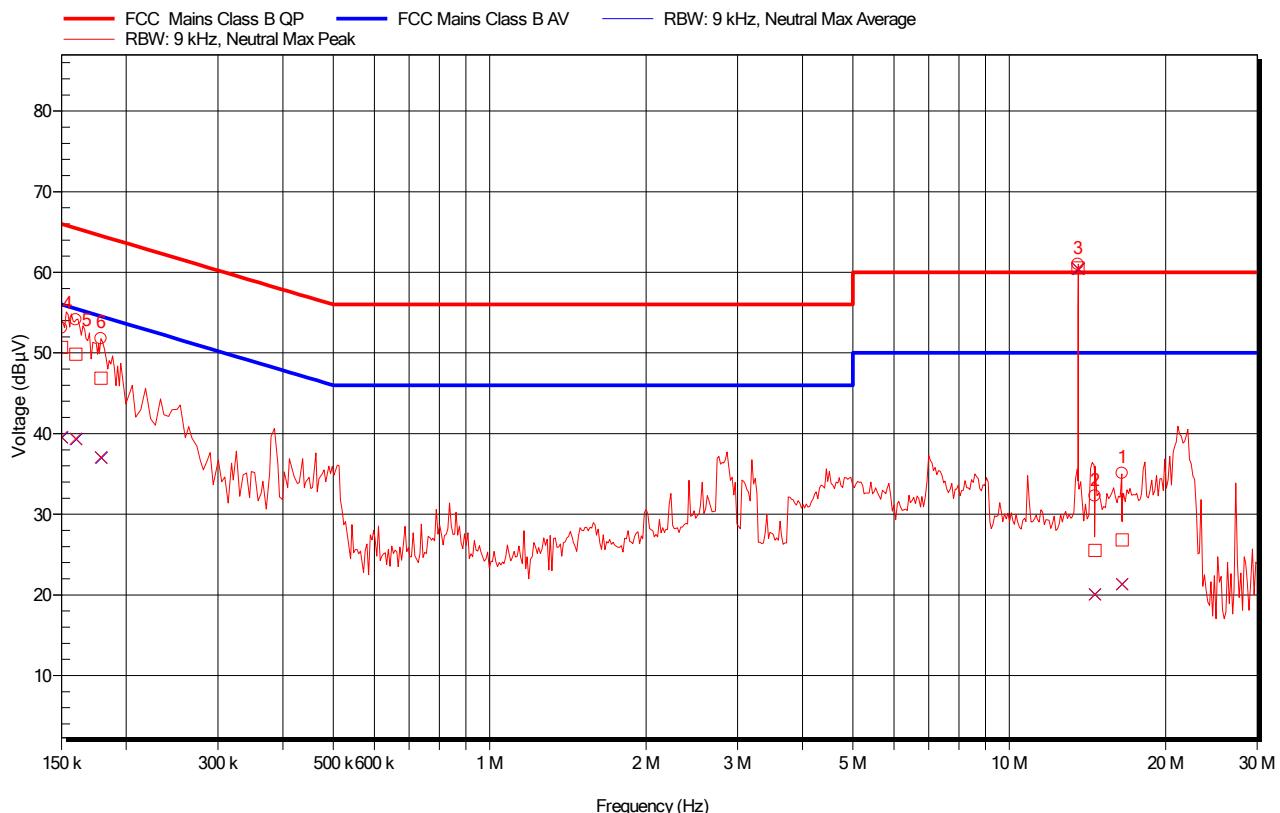


Figure 13: AC mains conducted emissions – Neutral – antenna connected

Freq. (MHz)	Average (dBμV)	Average Limit (dBμV)	Average Difference (dB)	Average Status	Quasi-Peak (dBμV)	Quasi-Peak Limit (dBμV)	Quasi-Peak Difference (dB)	Quasi-Peak Status
0.150	39.60	56.00	-16.44	Pass	50.70	66.00	-15.32	Pass
0.160	39.40	55.50	-16.09	Pass	49.80	65.50	-15.63	Pass
0.179	37.10	54.50	-17.48	Pass	46.90	64.50	-17.66	Pass
13.56	60.50	50.00	10.47	Pass	60.60	60.00	0.57	N/A
14.607	20.10	50.00	-29.95	Pass	25.50	60.00	-34.5	Pass
16.481	21.30	50.00	-28.68	Pass	26.80.0	60.00	-33.18	Pass

Table 10 Electric Field Emissions Peaks, 150kHz to 30MHz – Neutral – antenna connected

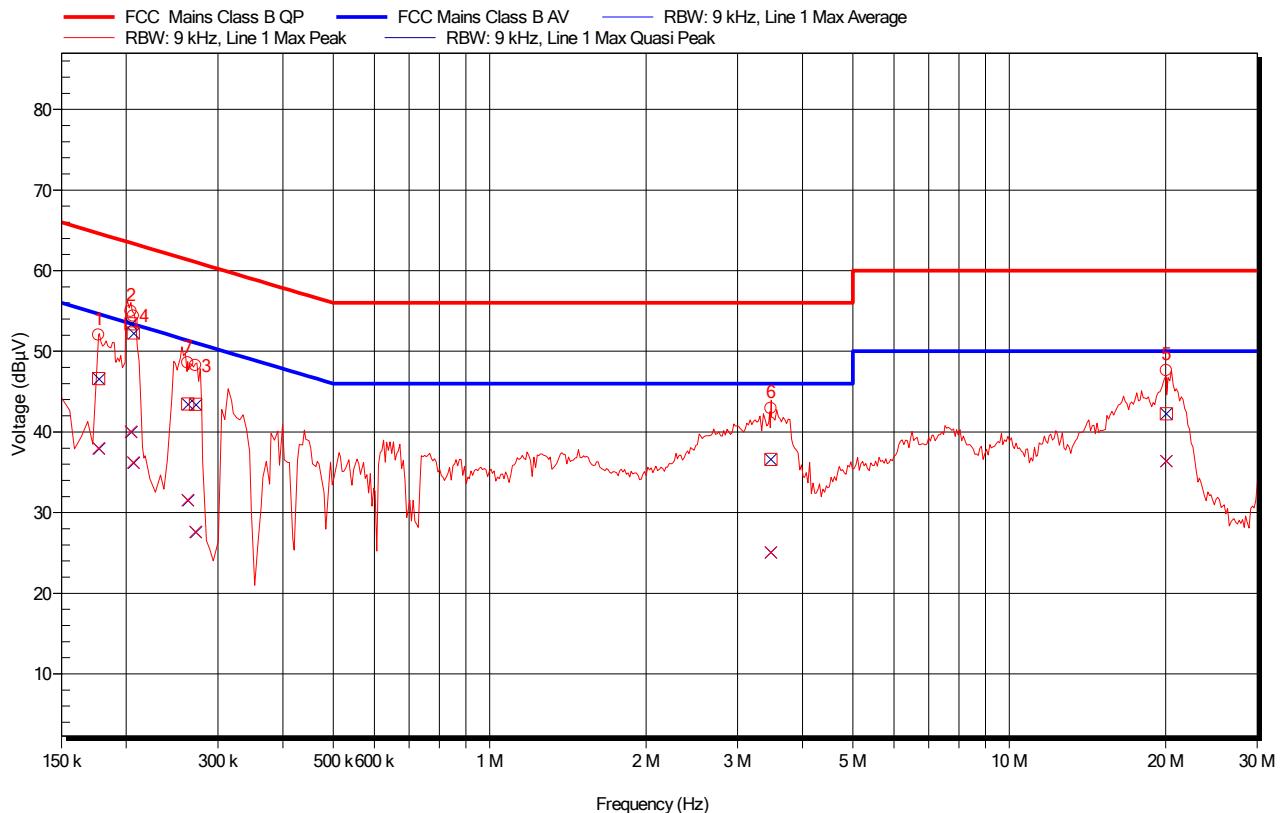


Figure 14: AC mains conducted emissions – Live – antenna replaced with 50Ω load

Freq. (MHz)	Average (dBμV)	Average Limit (dBμV)	Average Difference (dB)	Average Status	Quasi-Peak (dBμV)	Quasi-Peak Limit (dBμV)	Quasi-Peak Difference (dB)	Quasi-Peak Status
0.177	38.00	54.60	-16.64	Pass	46.60	64.60	-18.00	Pass
0.206	36.20	53.40	-17.12	Pass	52.30	63.40	-11.08	Pass
0.263	31.50	51.40	-19.81	Pass	43.50	61.40	-17.87	Pass
0.272	27.60	51.10	-23.44	Pass	43.40	61.10	-17.62	Pass
3.476	25.00	46.00	-20.96	Pass	36.60	56.00	-19.40	Pass
20.063	36.40	50.00	-13.61	Pass	42.30	60.00	-17.72	Pass

Table 11: Mains conducted emissions 150kHz to 30MHz – Live antenna replaced with 50Ω load

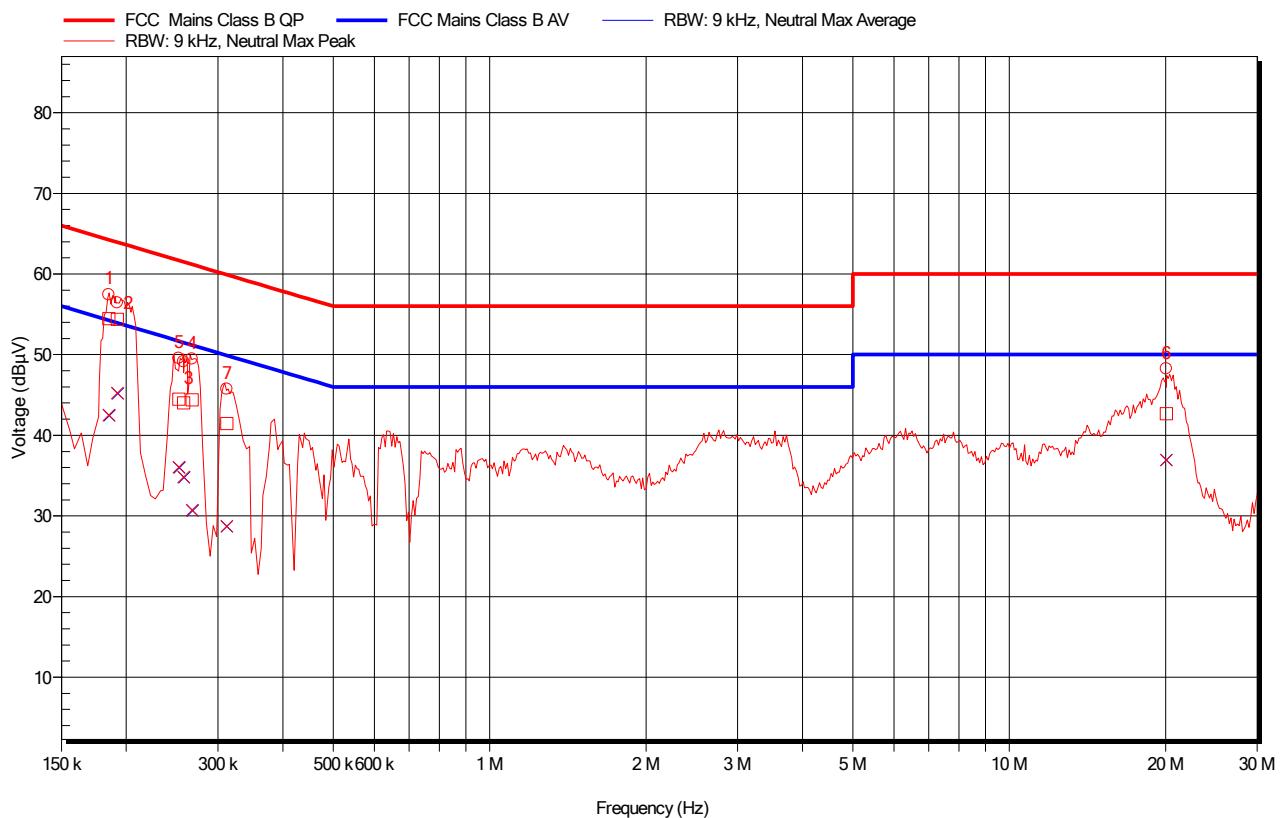


Figure 15 AC mains conducted emissions – Neutral - antenna replaced with 50Ω load

Freq. (MHz)	Average (dBµV)	Average Limit (dBµV)	Average Difference (dB)	Average Status	Quasi-Peak (dBµV)	Quasi-Peak Limit (dBµV)	Quasi-Peak Difference (dB)	Quasi-Peak Status
0.185	42.50	54.30	-11.73	Pass	54.50	64.30	-9.80	Pass
0.192	45.20	53.90	-8.71	Pass	54.40	63.90	-9.55	Pass
0.253	36.00	51.70	-15.64	Pass	44.50	61.70	-17.20	Pass
0.258	34.80	51.50	-16.67	Pass	44.00	61.50	-17.47	Pass
0.268	30.70	51.20	-20.48	Pass	44.40	61.20	-16.79	Pass
0.312	28.70	49.90	-21.21	Pass	41.50	59.90	-18.47	Pass
20.058	36.90	50.00	-13.09	Pass	42.70	60.00	-17.31	Pass

Table 12 Electric Field Emissions Peaks, 150kHz to 30MHz – Neutral antenna replaced with 50Ω load

### 7.6.1 Example calculation

This correction factors required consists of LISN Insertion loss (IL), Cable loss (CL) and Transient Limiter Loss (TL)

The Actual Signal Level (ASL) is calculated as follows:

$$\text{ASL (dB}\mu\text{V)} = \text{Indicated Signal Level (dB}\mu\text{V)} + \text{IL (dB)} + \text{CL (dB)} + \text{TL (dB)}$$

### 7.6.2 Sample Data

The Quasi-Peak level at 0.192MHz (Table 12)

$$\text{ASL (dB}\mu\text{V)} = 54.47\text{dB}\mu\text{V} = 44.41\text{dB}\mu\text{V} + 0.16\text{dB} + 0.00\text{dB} + 9.90\text{dB}$$

## Appendix A EUT Test Photographs

**Test set up photographs are supplied separately.**

## Appendix B Test Equipment List

### Radiated Emissions 30MHz to 1GHz Equipment

Item	Serial No.	Last Calibration Date	Calibration Interval
Laboratory 1 Semi-Anechoic Chamber	Lab 1	20 <sup>th</sup> January 2020	3 years
ETS Lindgren 2017B Mast (1 – 4m) with tilting mechanism	--	-	-
R & S ESR26	C0502	30 <sup>th</sup> April 2023	12 months
6dB Attenuator (For use with Bilog Antenna)	C0506B	15 <sup>th</sup> July 2021	36 months
Teseq CBL6112D Bilog Antenna	C0506	15 <sup>th</sup> July 2021	36 months
HF26 Cable	HF26	17 <sup>th</sup> January 2022	12 months
HF35 Cable	HF35	17 <sup>th</sup> January 2022	12 months
HF27 Cable	HF27	17 <sup>th</sup> January 2022	12 months

### Radiated Emissions 9kHz to 30MHz Equipment

Item	Serial No.	Last Calibration Date	Calibration Interval
Laboratory 5 Fully-Anechoic Chamber	Lab 5	Not required	N/A
Schwarzbeck BBV 9745 preamplifier 9kHz – 2GHz	C0632	4 <sup>th</sup> February 2021	24 months
ETS Lindgren 6512 loop antenna	B0921	21 <sup>st</sup> February 2020	36 months
RF cables	11, 12, 16 and HF13	10 <sup>th</sup> January 2022	12 months
Rohde & Schwarz ESW Test Receiver	C0658	15 <sup>th</sup> November 2021	36 months

**Frequency stability measurement equipment**

Item	Serial No.	Last Calibration Date	Calibration Interval
Keysight MXE EMI Receiver	C0339	25 <sup>th</sup> January 2022	12 months
JTS Environmental test chamber	C0108	18 <sup>th</sup> May 2021	18 <sup>th</sup> November 2022

**AC Mains conducted emissions equipment**

Item	Serial No.	Last Calibration Date	Calibration Interval
Rohde & Schwarz ESR7 Test receiver	C0449	30 <sup>th</sup> January 2022	12 months
Cables J7, J9 and LF3	-	11 <sup>th</sup> January 2022	12 months
Rohde & Schwarz ESH3-Z5 LISN 78119	78119	17 <sup>th</sup> January 2022	12 months
Teseq CFL 9206A transient limiter 10dB 9kHz - 30MHz	C0282	11 <sup>th</sup> January 2022	12 months
Kikusui PCR2000M power supply	-	-	-