



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	ION Audio LLC
Address of Applicant	:	200 Scenic View Drive, Suite 201 Cumberland, RI 02864, U.S.A.
Manufacturer	:	ION Audio LLC
Address of Manufacturer	:	200 Scenic View Drive, Suite 201 Cumberland, RI 02864, U.S.A.
Equipment under Test	:	BATTERY-POWERED PA SPEAKER WITH WIRELESS MICROPHONE AND DYNAMIC LIGHTS
FCC Model No.	:	TOTAL PA™ APEX, iPA185A, TOTAL PA***** iPA185***** (“*” can be “0-9”, “a-z”, “A-Z”, “blank”, “-”, “+” or any character, symbol, alphanumeric for marketing purpose)
ISED Model No.	:	TOTAL PA™ APEX
Project Code	:	iPA185A
FCC ID	:	2AB3E-IPA185A
IC	:	10541A-IPA185A
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24092711-1E01
Issue Date	:	2025/01/16
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT.....	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	10
2.4.	Decision of final test mode	10
2.5.	Deviations of test standard	10
2.6.	Test environment conditions.....	11
2.7.	Test laboratory	11
2.8.	Measurement uncertainty	12
3.	Equipment Used During Conductive Test	13
4.	20 dB Bandwidth.....	14
4.1.	Block diagram of test setup	14
4.2.	Limits.....	14
4.3.	Test procedure.....	14
4.4.	Test result	15
4.5.	Test graphs.....	16
5.	99% Bandwidth.....	22
5.1.	Block diagram of test setup	22
5.2.	Limits.....	22
5.3.	Test procedure.....	22
5.4.	Test result	23
5.5.	Test graphs.....	24
6.	Maximum Peak Output Power.....	30
6.1.	Block diagram of test setup	30
6.2.	Limits.....	30
6.3.	Test procedure.....	30
6.4.	Test result	31
6.5.	Test graphs.....	32
7.	Carrier Frequency Separation	38
7.1.	Block diagram of test setup	38
7.2.	Limits.....	38
7.3.	Test procedure.....	38
7.4.	Test result	39
7.5.	Test graphs.....	40
8.	Dwell Time	42

8.1.	Block diagram of test setup	42
8.2.	Limits.....	42
8.3.	Test procedure.....	42
8.4.	Test result	43
8.5.	Test graphs.....	44
9.	Number of Hopping Channel	56
9.1.	Block diagram of test setup	56
9.2.	Limits.....	56
9.3.	Test procedure.....	56
9.4.	Test result	57
9.5.	Test graphs.....	58
10.	Band Edge Compliance (Conducted Method).....	60
10.1.	Block diagram of test setup	60
10.2.	Limit.....	60
10.3.	Test procedure.....	60
10.4.	Test result	61
10.5.	Test graphs.....	62
11.	RF Conducted Spurious Emissions.....	70
11.1.	Block diagram of test setup	70
11.2.	Limits.....	70
11.3.	Test procedure.....	70
11.4.	Test result	71
11.5.	Test graphs.....	72
12.	Duty cycle	90
12.1.	Block diagram of test setup	90
12.2.	Limit.....	90
12.3.	Test procedure.....	90
12.4.	Test result	91
12.5.	Test graphs.....	92
13.	Antenna Requirements	98
13.1.	Limit.....	98
13.2.	Result.....	98
14.	Radiated Emission.....	99
14.1.	Test equipment	99
14.2.	Block diagram of test setup	100
14.3.	Limits.....	101
14.4.	Assistant equipment used for test	103
14.5.	Test procedure.....	103

14.6.	Test result	104
14.7.	Test data	105
15.	Band Edge Compliance	129
15.1.	Test equipment	129
15.2.	Block diagram of test setup	130
15.3.	Limits	130
15.4.	Assistant equipment used for test	130
15.5.	Test procedure	130
15.6.	Test result	130
15.7.	Test data	131
16.	Power Line Conducted Emissions	143
16.1.	Test equipment	143
16.2.	Block diagram of test setup	143
16.3.	Limits	143
16.4.	Assistant equipment used for test	143
16.5.	Test procedure	144
16.6.	Test result	144
16.7.	Test data	145
17.	Test Setup Photograph	155
18.	Photos of the EUT	157

Test Report Declare

Applicant	:	ION Audio LLC
Address of Applicant	:	200 Scenic View Drive, Suite 201 Cumberland, RI 02864, U.S.A.
Equipment under Test	:	BATTERY-POWERED PA SPEAKER WITH WIRELESS MICROPHONE AND DYNAMIC LIGHTS
FCC Model No.	:	TOTAL PA™ APEX, iPA185A, TOTAL PA***** iPA185***** (“*” can be “0-9”, “a-z”, “A-Z”, “blank”, “-”, “+” or any character, symbol, alphanumeric for marketing purpose)
ISED Model No.	:	TOTAL PA™ APEX
Manufacturer	:	ION Audio LLC
Address of Manufacturer	:	200 Scenic View Drive, Suite 201 Cumberland, RI 02864, U.S.A.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24092711-1E01		
Date of Receipt:	2024/10/10	Date of Test:	2024/10/10 - 2025/01/16

Prepared By:**Johnson Huang/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2025/01/16	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	FCC Part 15: 15.247(b)(1), RSS-247 Issue 3 clause 5.4(b)	/	Pass
2	20 dB Bandwidth	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(a)	/	Pass
3	99% Bandwidth	RSS-Gen Issue 5 clause 6.7	/	Pass
4	Carrier Frequency Separation	FCC Part 15: 15.247(a)(1), RSS-247 Issue 3 clause 5.1(b)	/	Pass
5	Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
6	Dwell Time	FCC Part 15: 15.247(a)(1)(iii), RSS-247 Issue 3 clause 5.1(d)	/	Pass
7	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
8	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
9	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
10	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
11	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	BATTERY-POWERED PA SPEAKER WITH WIRELESS MICROPHONE AND DYNAMIC LIGHTS
FCC Model Number	:	TOTAL PA™ APEX, iPA185A, TOTAL PA*****, iPA185***** ("*" can be "0-9", "a-z", "A-Z", "blank", "-", "+" or any character, symbol, alphanumeric for marketing purpose)
ISED Model Number	:	TOTAL PA™ APEX
Difference of model number	:	All models are identical except the appearance colour and model number, therefore the test performed on the model TOTAL PA™ APEX.
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	AC 100-240V~50/60Hz or DC 11.1V Li-ion built-in battery
Antenna Type	:	PCB
Max Antenna Gain(dBi)	:	1.16

Note: This EUT support Bluetooth BR/EDR/LE, this report only for Bluetooth BR/EDR.

Radio Specification	:	Bluetooth BR/EDR
Operation Frequency	:	2402 MHz-2480 MHz
Modulation	:	GFSK, $\pi/4$ -DQPSK, 8DPSK

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474

19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description	Other
AC cable	N/A	N/A	Length: 1.5m, unshielded	N/A
Wireless microphone	N/A	N/A	N/A	N/A
Support lever	N/A	N/A	N/A	N/A
Built-in battery	Shenzhen Hainengtong Energy Co., Ltd.	18650-11.1V-6000mAh-3S3P	11.1Vdc, 6000mAh, 66.6Wh, lithium-ion type	Optional
Built-in battery	Dongguan Wiliyoung Electronics Co., Ltd.	WLY 18650-3S3P	11.1Vdc, 6000mAh, 66.6Wh, lithium-ion type	
Built-in battery	Power7 Technology Co., Ltd.	B18650-201C-91	11.1Vdc, 6000mAh, 66.6Wh, lithium-ion type	
Transformer T1	Eaglerise Electric & Electronic (Ji An) Co., Ltd.	PSM-0100-022U	Input:100-240V~, 50/60Hz	Optional
Transformer T1	FOSHAN SHUNDE WECAN ELECTRONICS CO., LTD	PQ3220-2409192WK	Input:100-240V~, 50/60Hz	
Transformer T1	Shenzhen Tianfuxiang Technology Co., Ltd.	PSM-0100-022U	Input:100-240V~, 50/60Hz	

2.3. Block diagram of EUT configuration for test

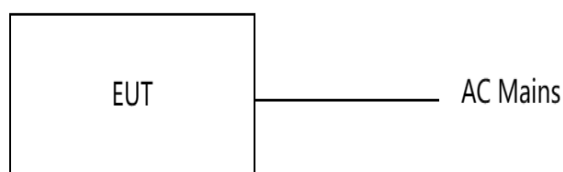

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: FrequencyTool_v0.3.2.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480
8DPSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480
Worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	120259	2025/07/08
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2025/03/31
RF Control Unit	Tonsend	JS0806-2	158060010	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

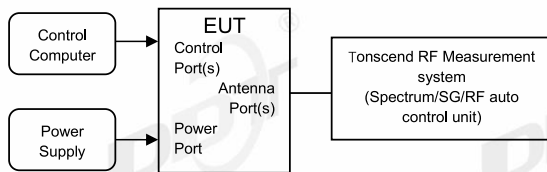

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


4.4. Test result


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,52%RH	Test Date:	2024.10.17-2025.01.02
Test Power Supply:	AC 120V/60HZ	Sample Number:	S24092711-002

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.95
		2441	0.97
		2480	0.96
2DH5	Ant1	2402	1.19
		2441	1.29
		2480	1.25
3DH5	Ant1	2402	1.22
		2441	1.25
		2480	1.25


Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant2	2402	0.99
		2441	0.97
		2480	0.98
2DH5	Ant2	2402	1.31
		2441	1.30
		2480	1.30
3DH5	Ant2	2402	1.31
		2441	1.29
		2480	1.29

4.5. Test graphs

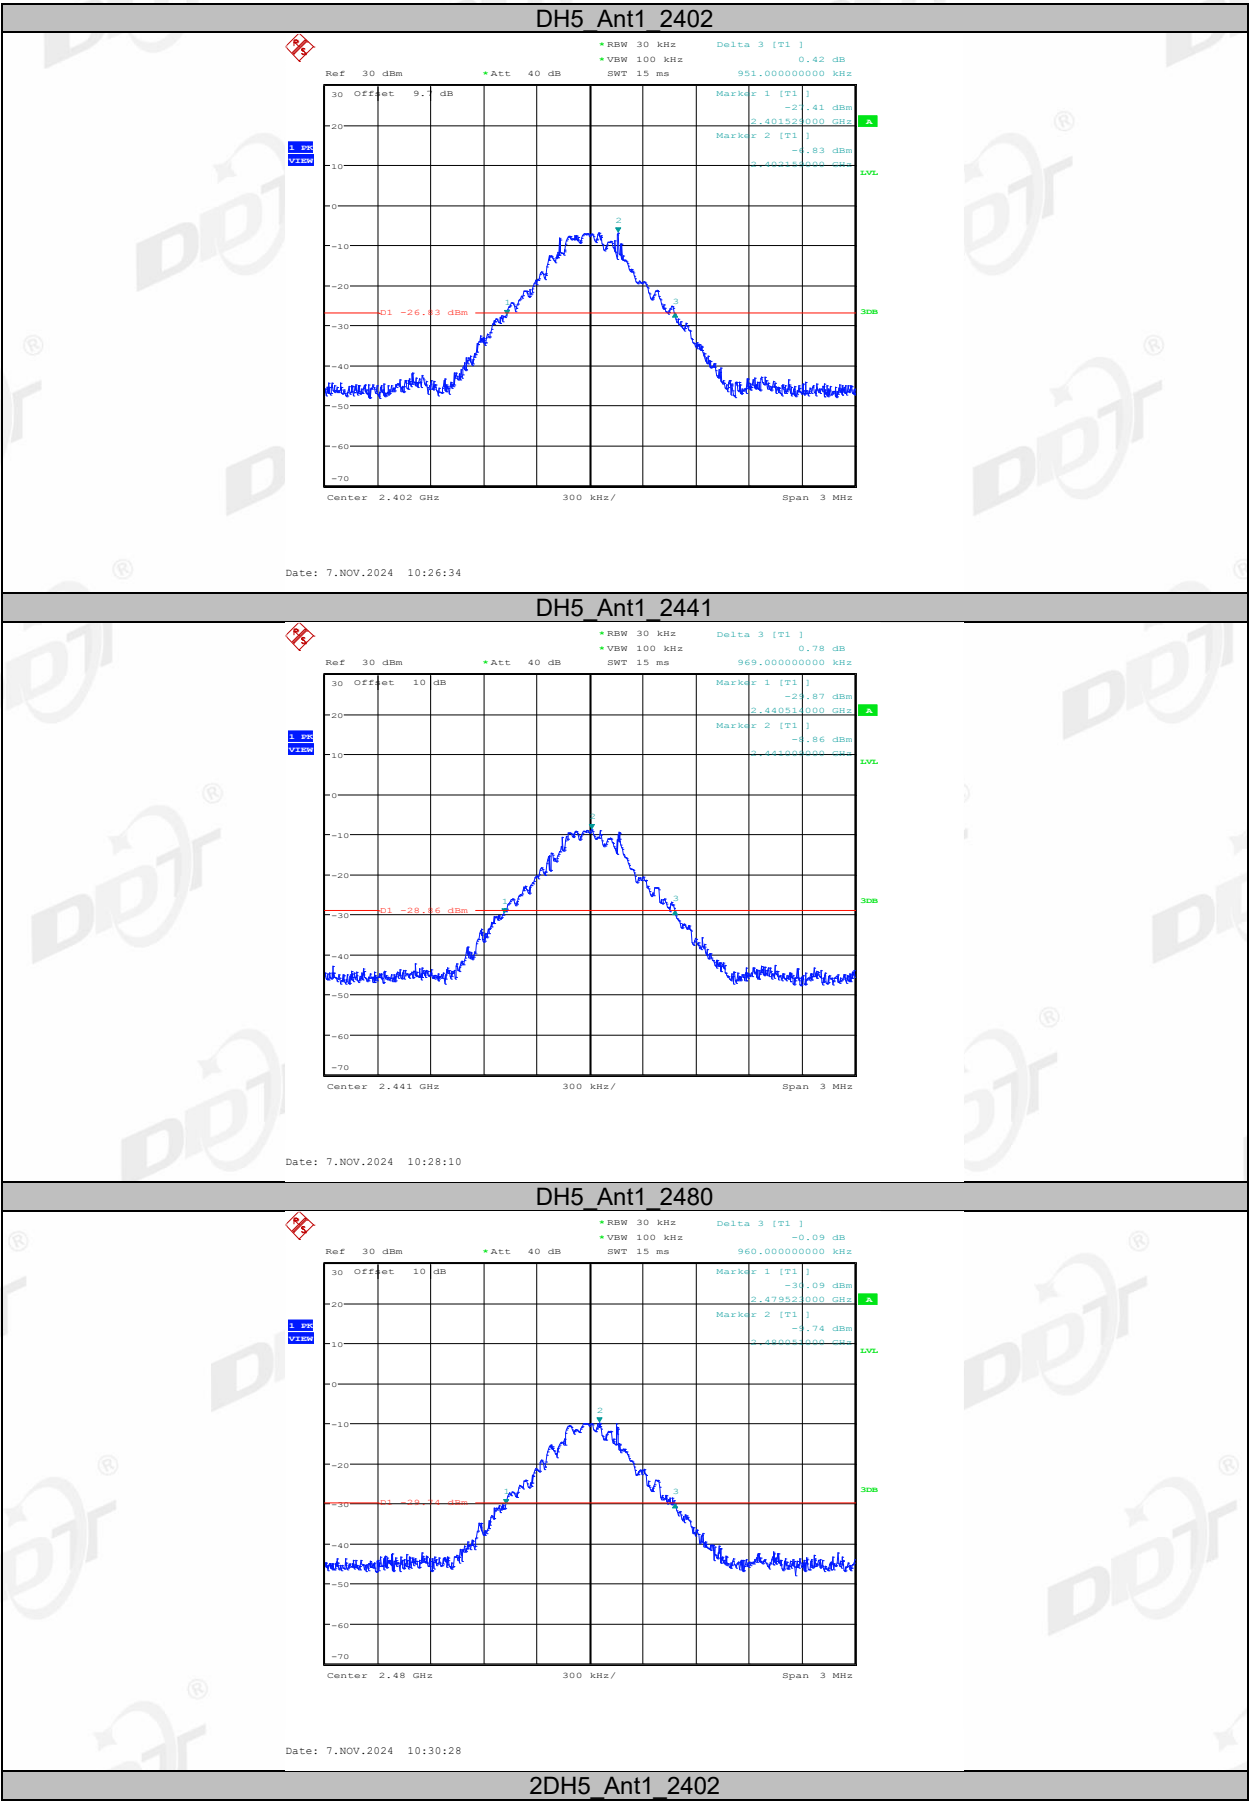


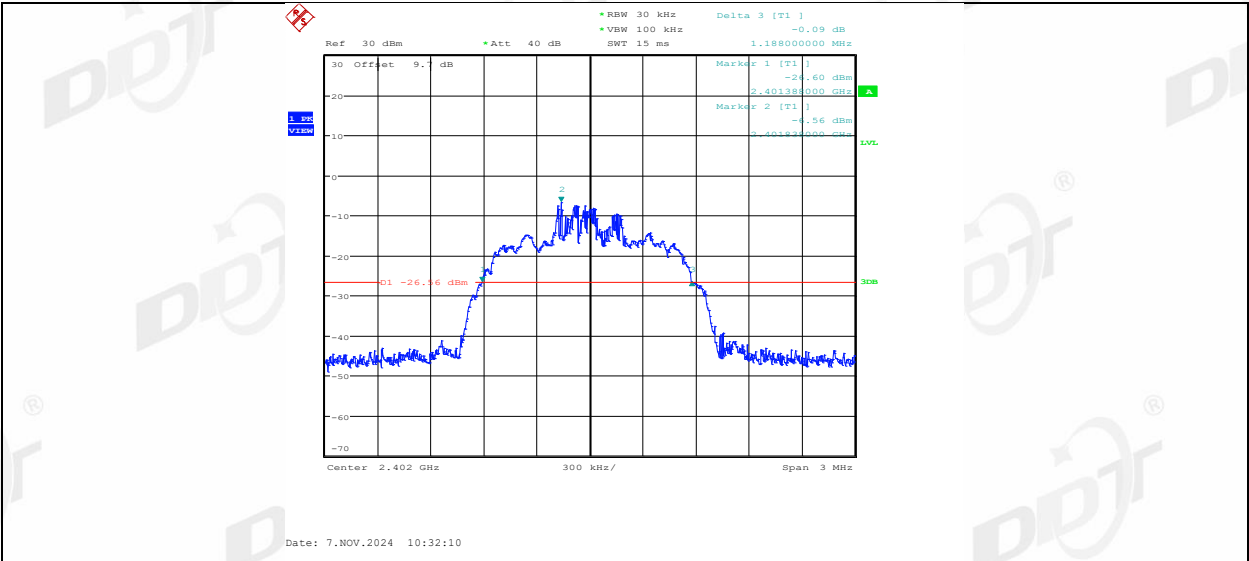


2DH5_Ant1_2441

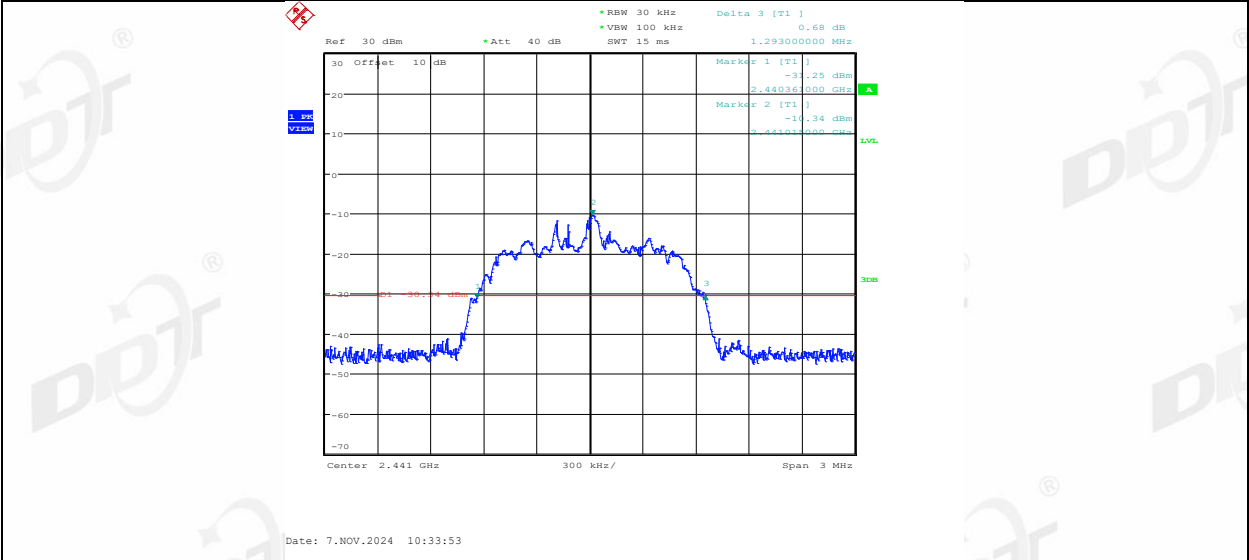


2DH5_Ant1_2480

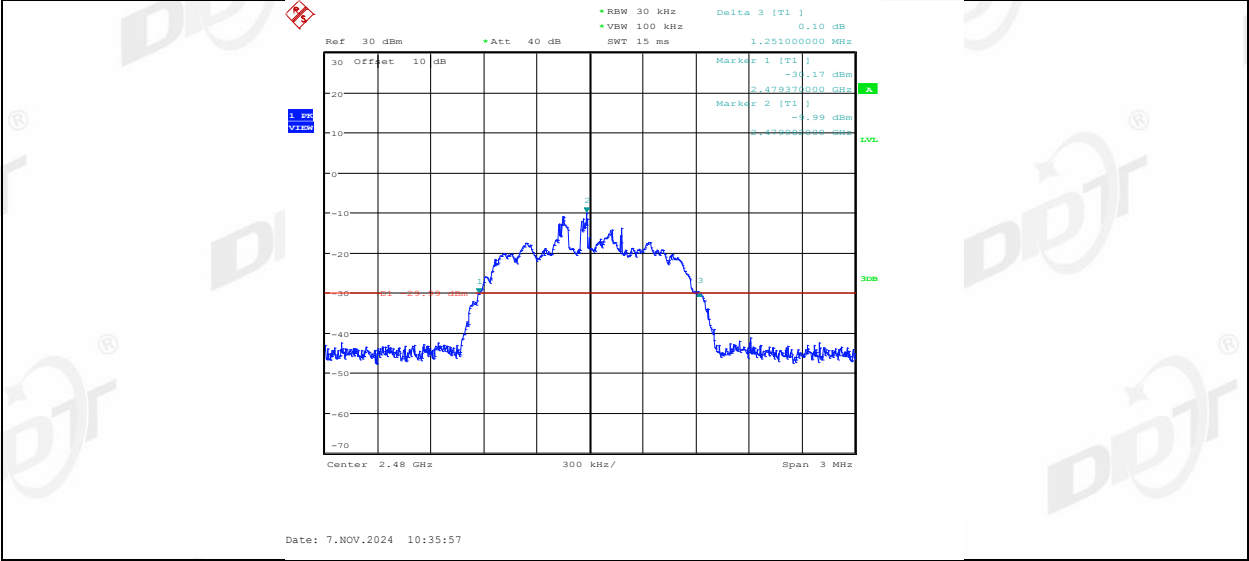


3DH5_Ant1_2402

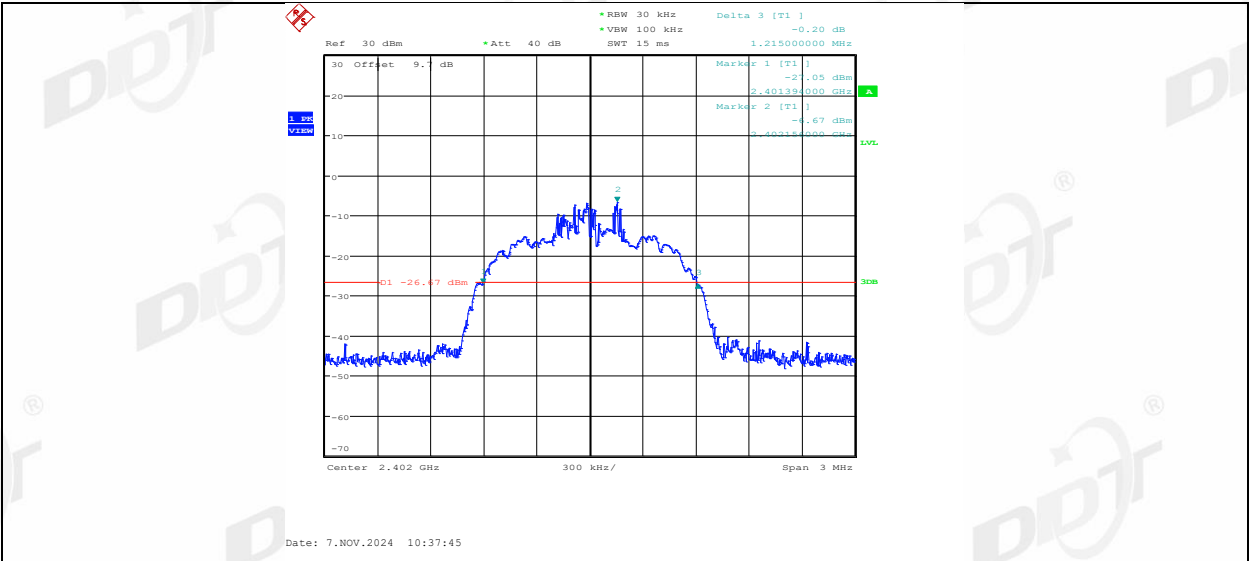



3DH5_Ant1_2441

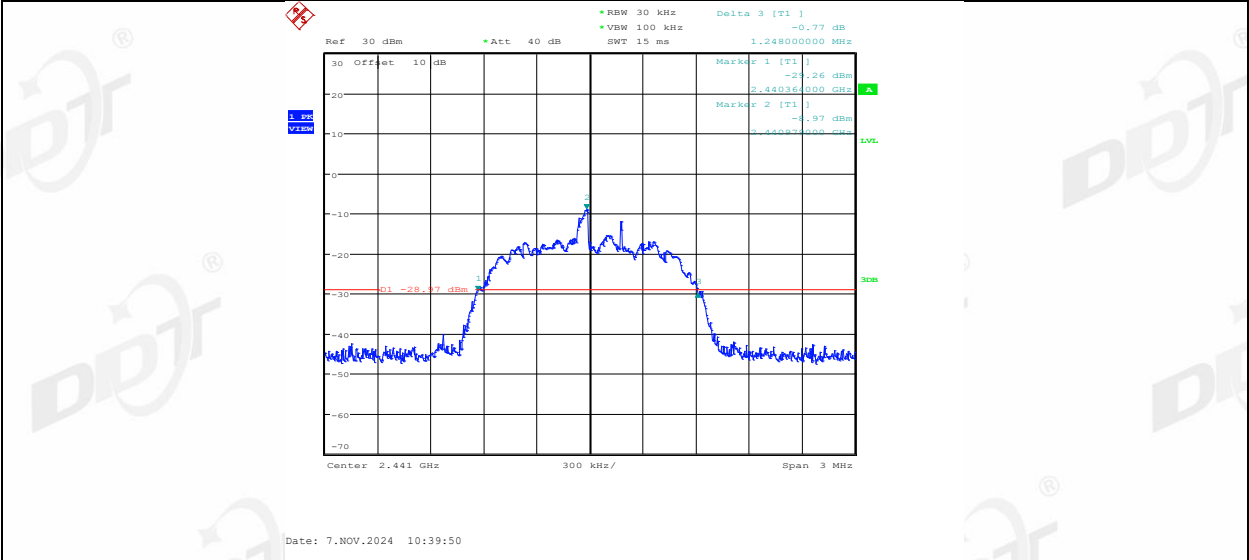


3DH5_Ant1_2480

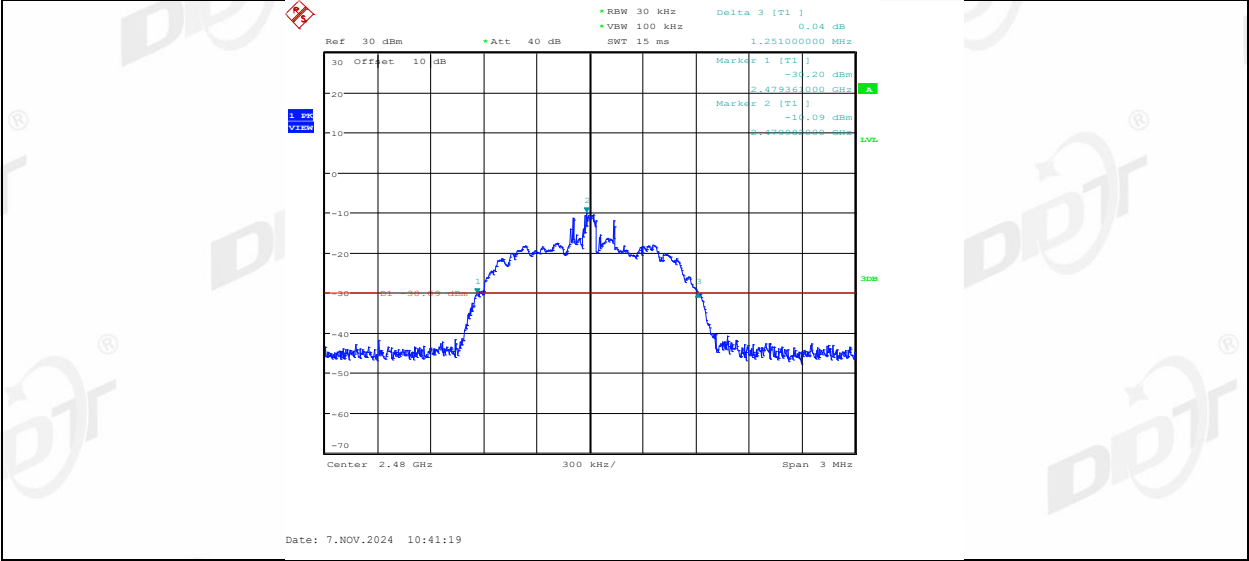

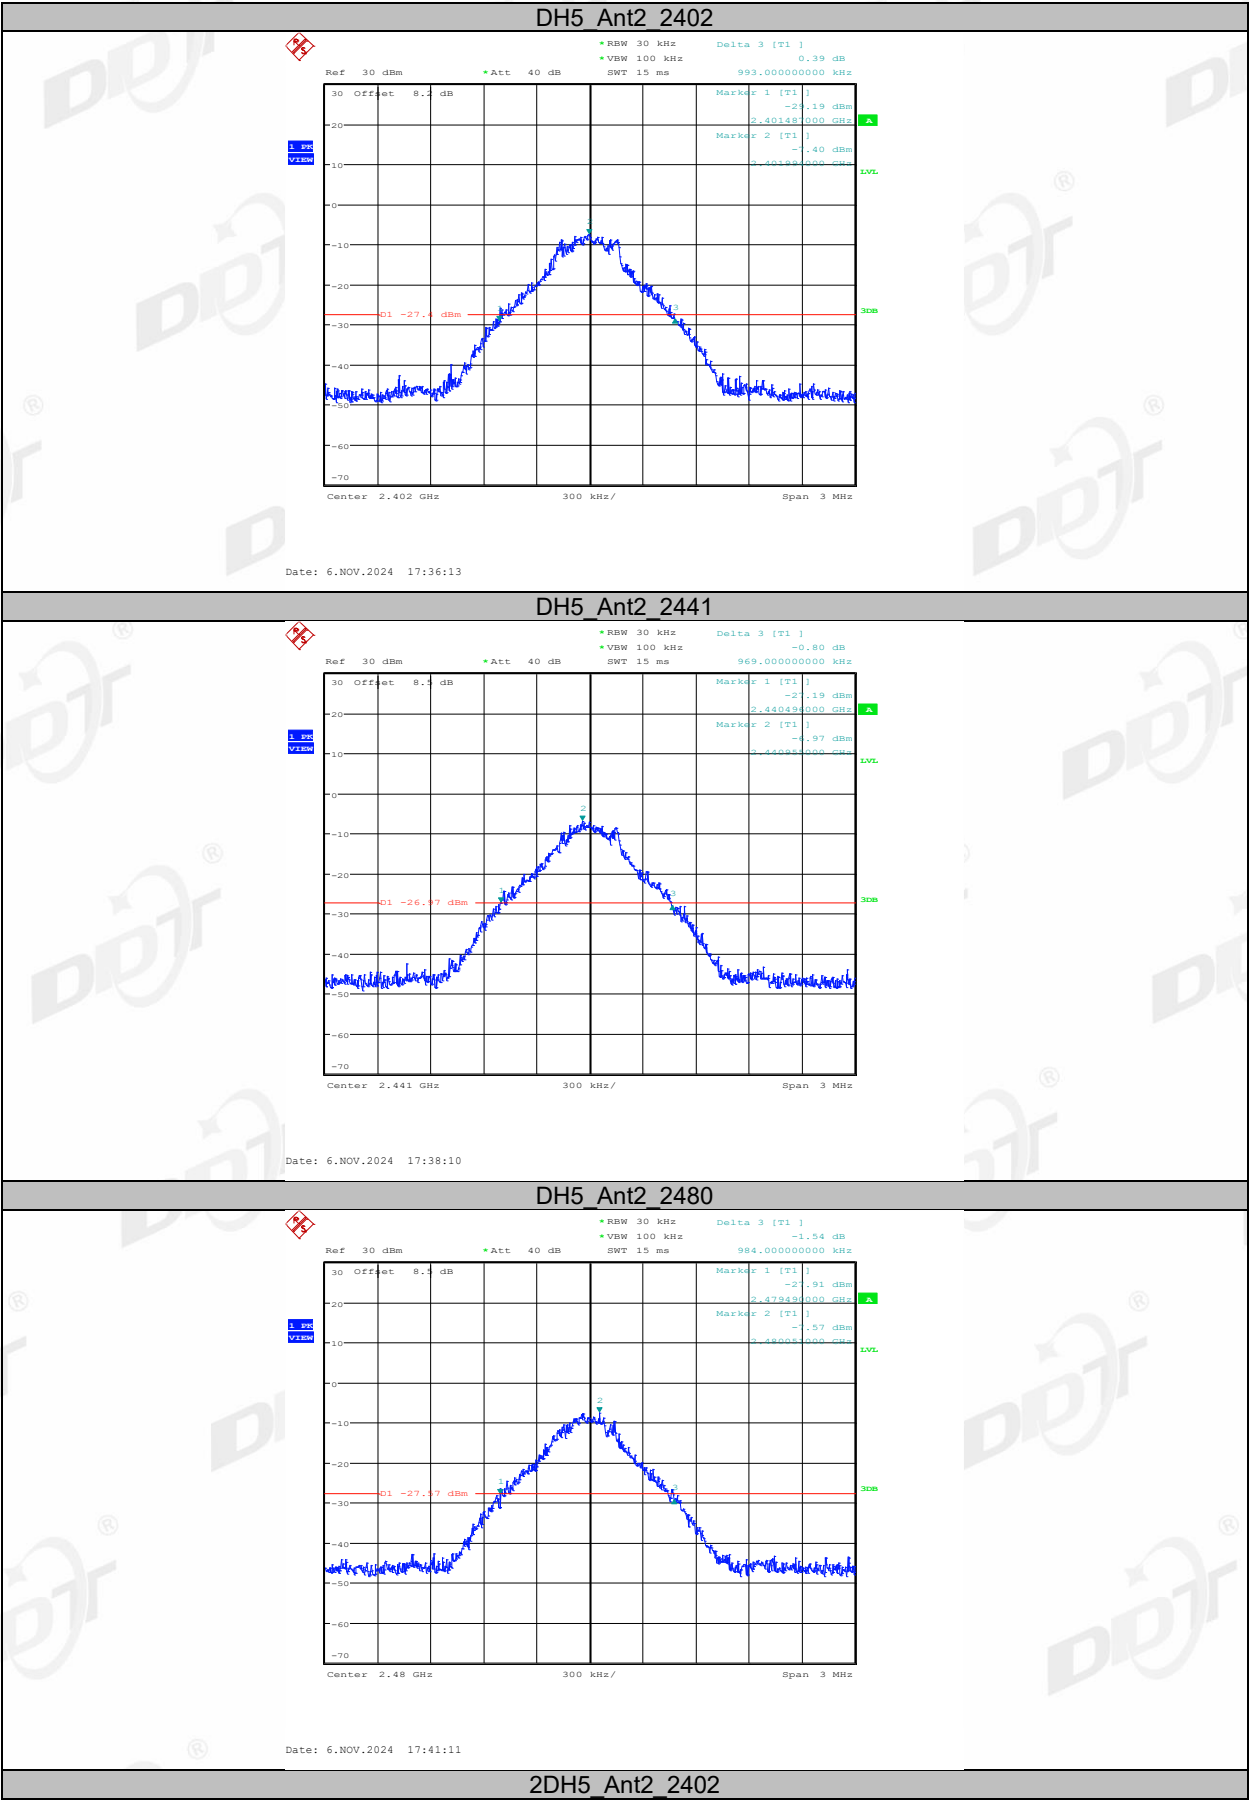


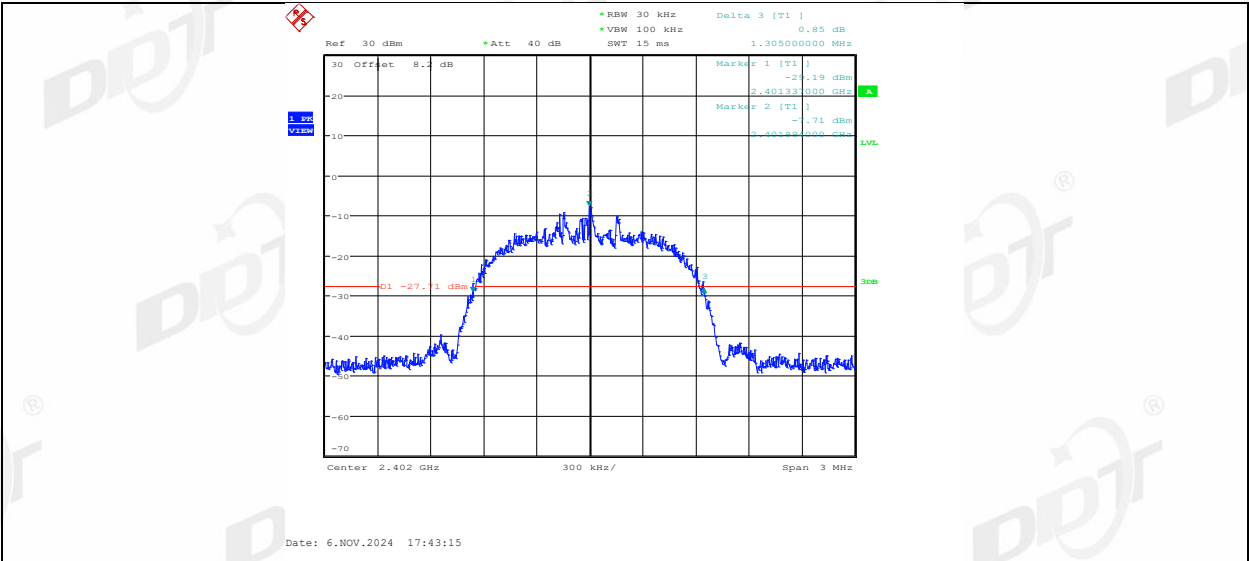


2DH5_Ant2_2441

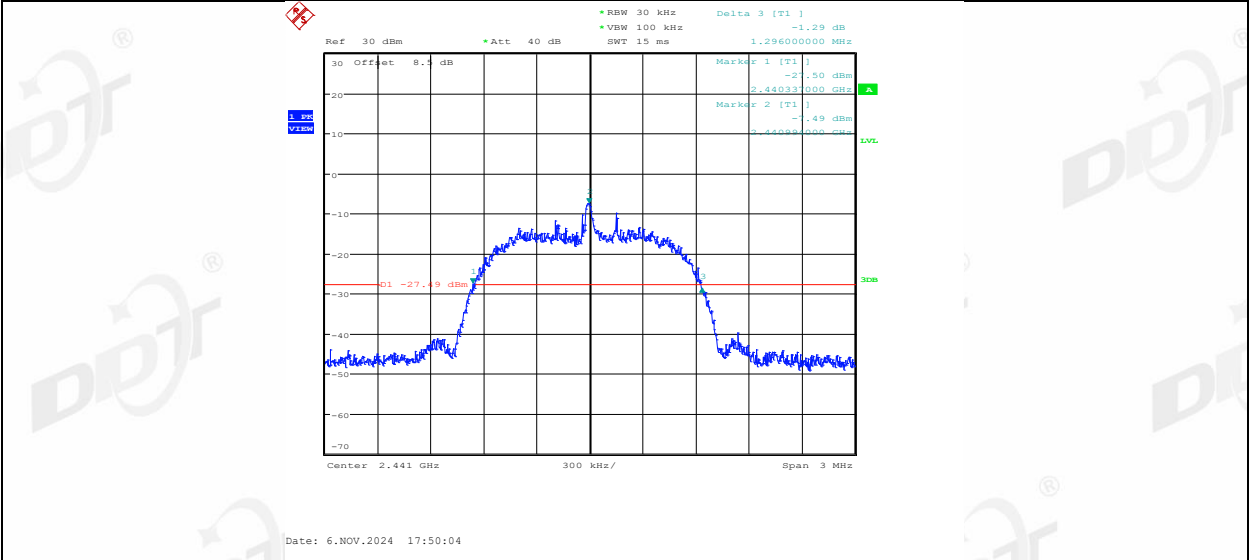


2DH5_Ant2_2480

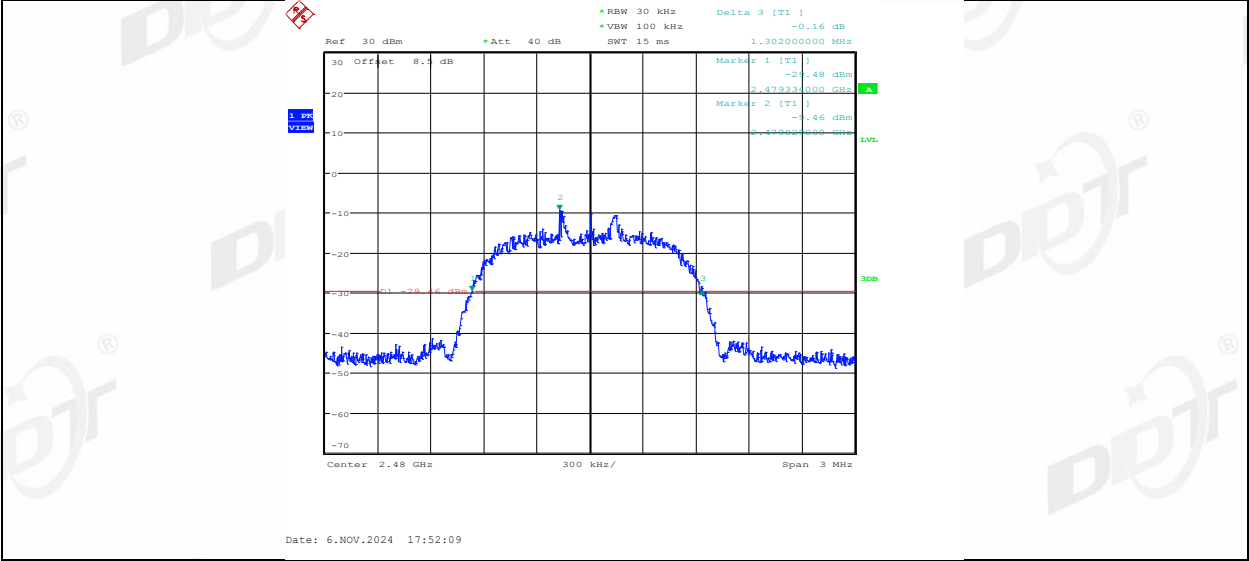


3DH5_Ant2_2402

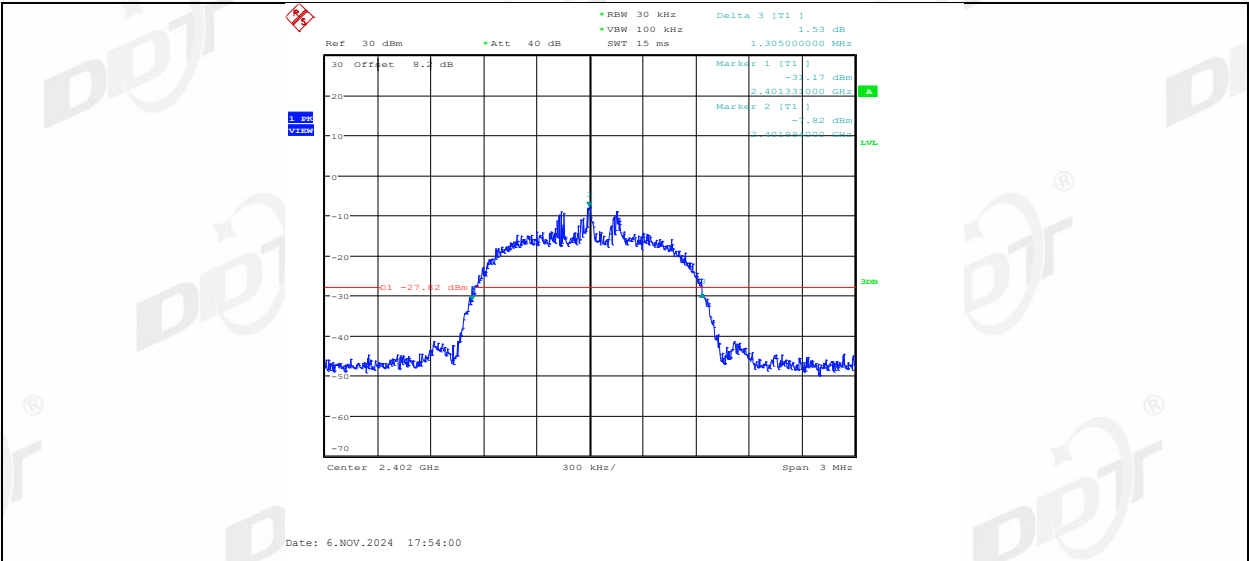

3DH5_Ant2_2441

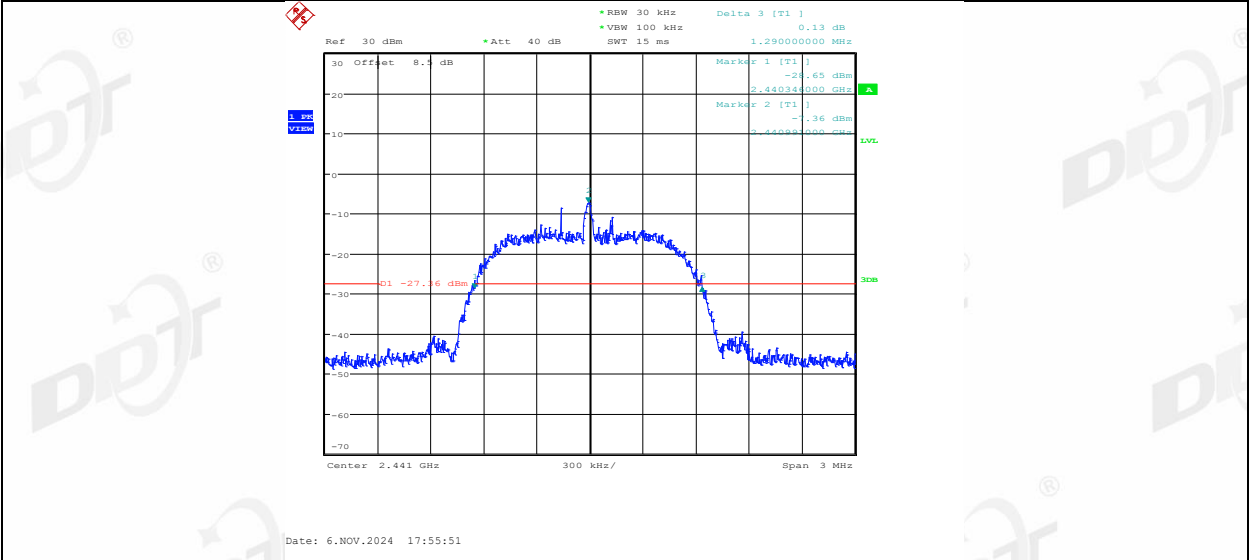


3DH5_Ant2_2480

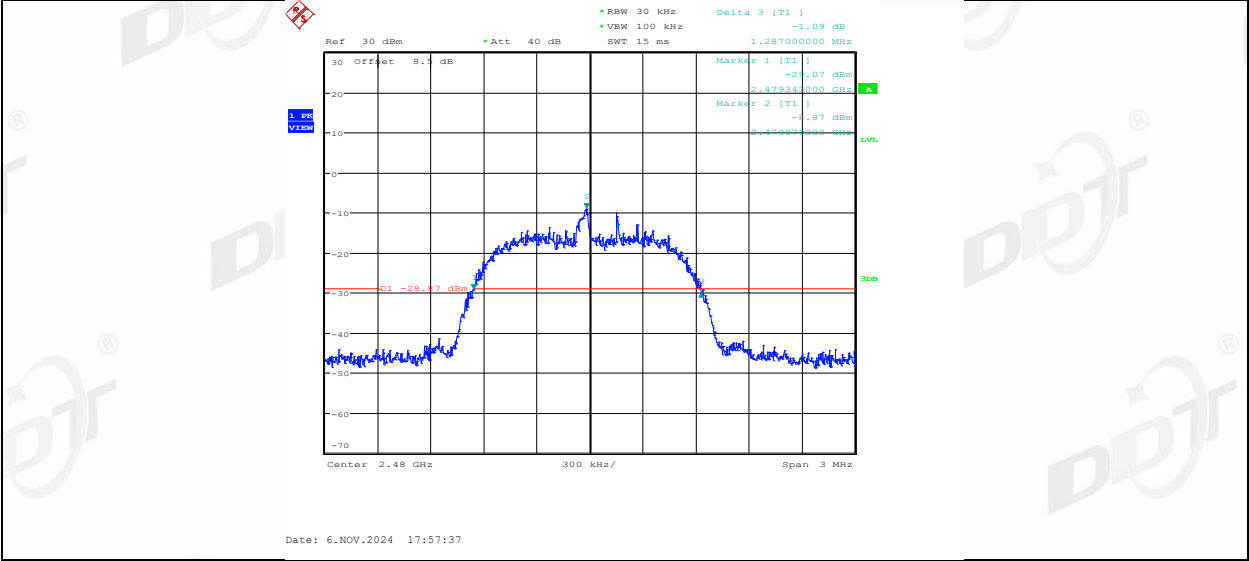

5. 99% Bandwidth

5.1. Block diagram of test setup

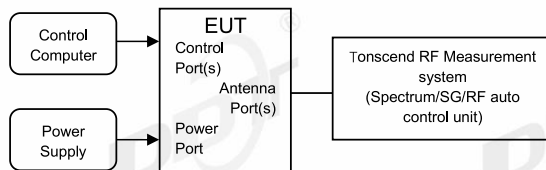

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


5.4. Test result


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,52%RH	Test Date:	2024.10.17-2025.01.02
Test Power Supply:	AC 120V/60HZ	Sample Number:	S24092711-002

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.87	2401.5590	2402.4290
		2441	0.876	2440.5560	2441.4320
		2480	0.888	2479.5500	2480.4380
2DH5	Ant1	2402	1.149	2401.4150	2402.5640
		2441	1.155	2440.4120	2441.5670
		2480	1.167	2479.4060	2480.5730
3DH5	Ant1	2402	1.167	2401.4120	2402.5790
		2441	1.191	2440.4000	2441.5910
		2480	1.182	2479.4030	2480.5850


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant2	2402	0.888	2401.5470	2402.4350
		2441	0.891	2440.5350	2441.4260
		2480	0.888	2479.5290	2480.4170
2DH5	Ant2	2402	1.197	2401.3910	2402.5880
		2441	1.194	2440.3880	2441.5820
		2480	1.209	2479.3760	2480.5850
3DH5	Ant2	2402	1.206	2401.3880	2402.5940
		2441	1.2	2440.3850	2441.5850
		2480	1.23	2479.3670	2480.5970

5.5.Test graphs

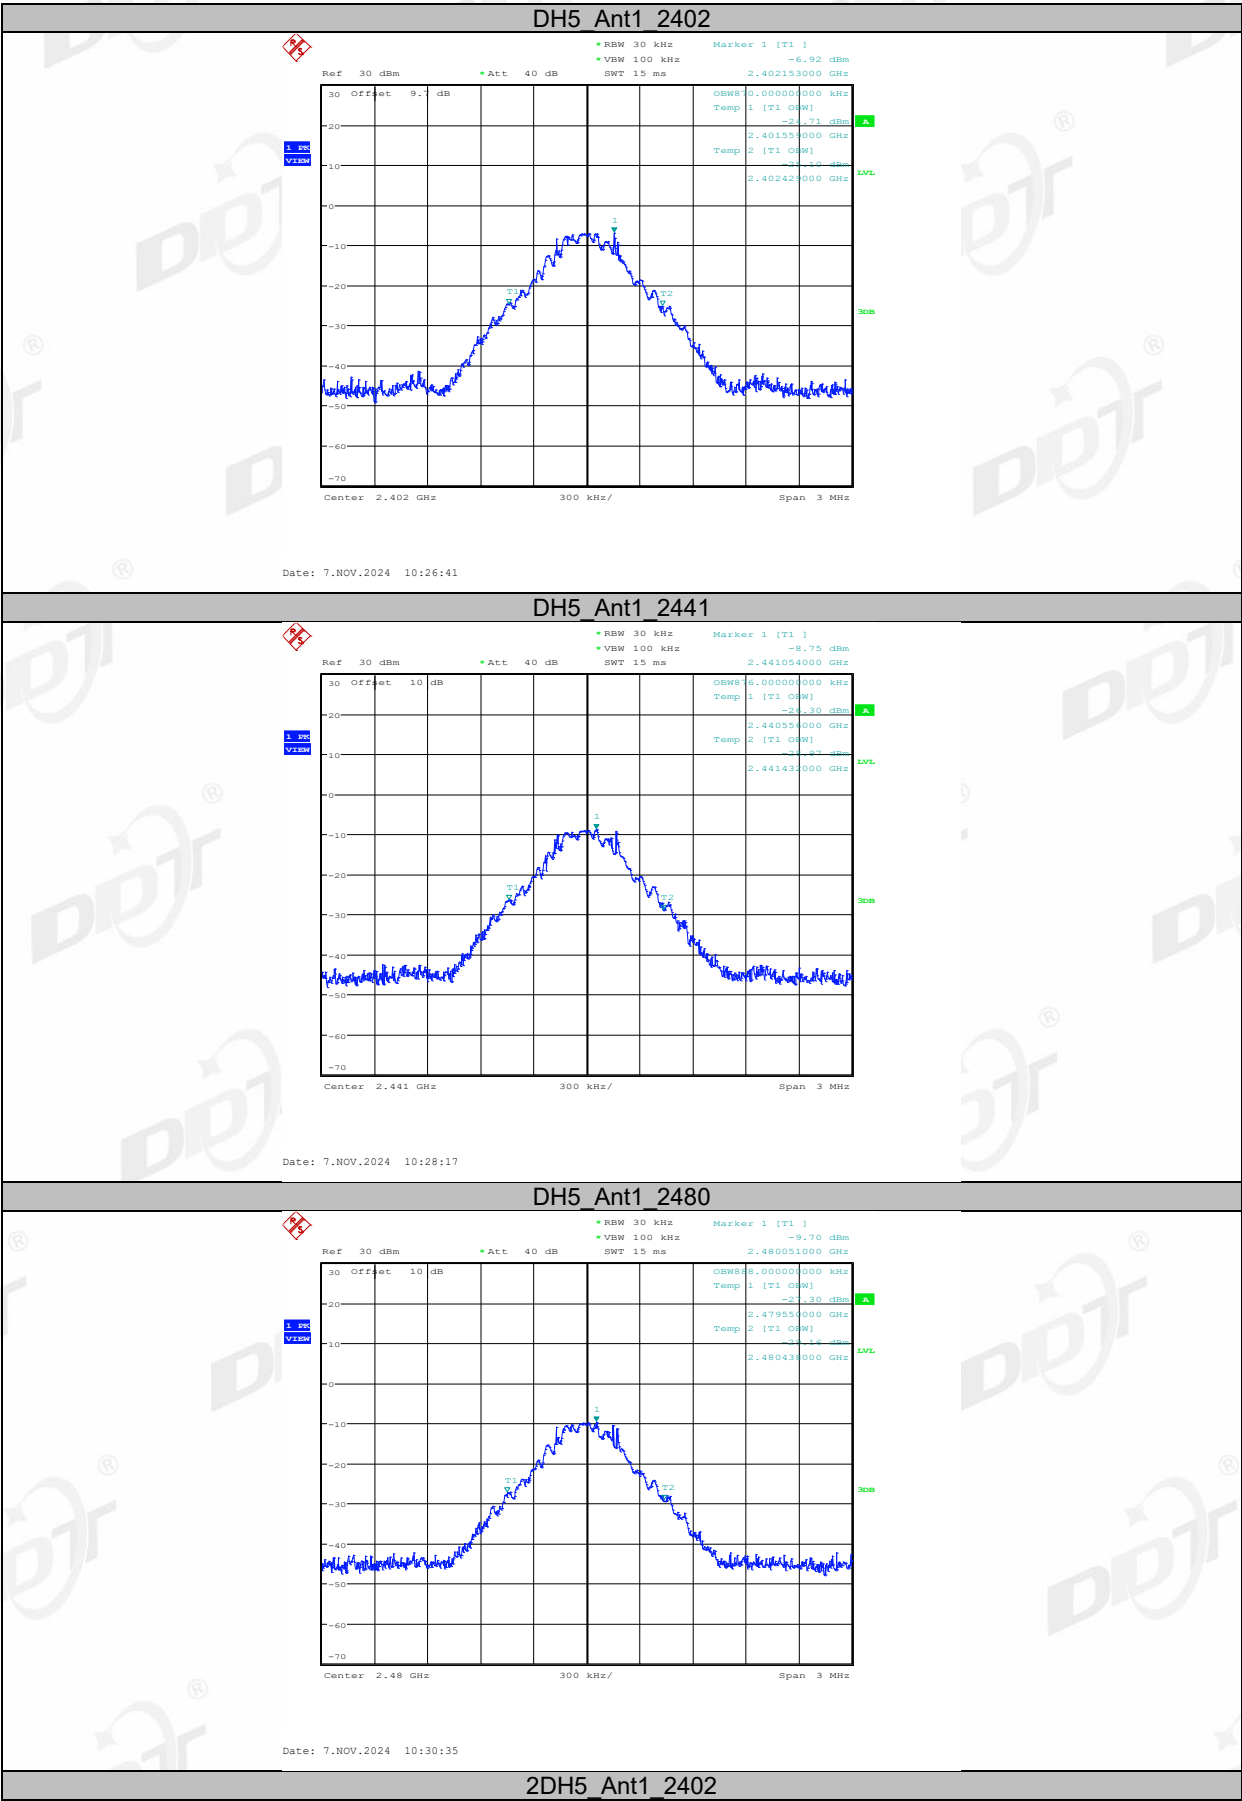


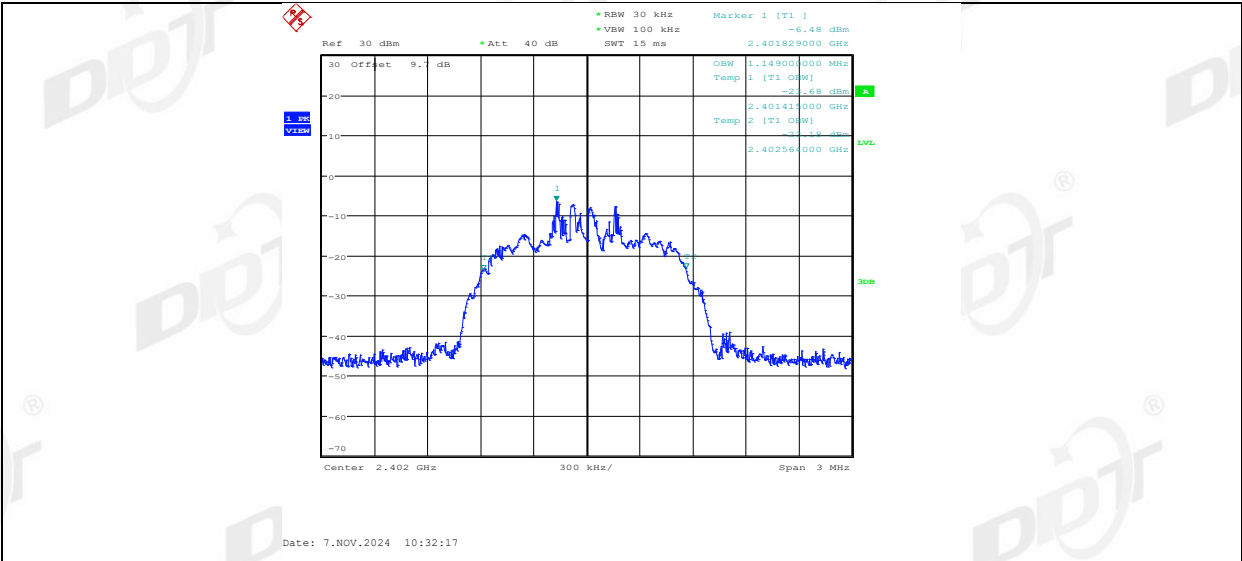


2DH5_Ant1_2441

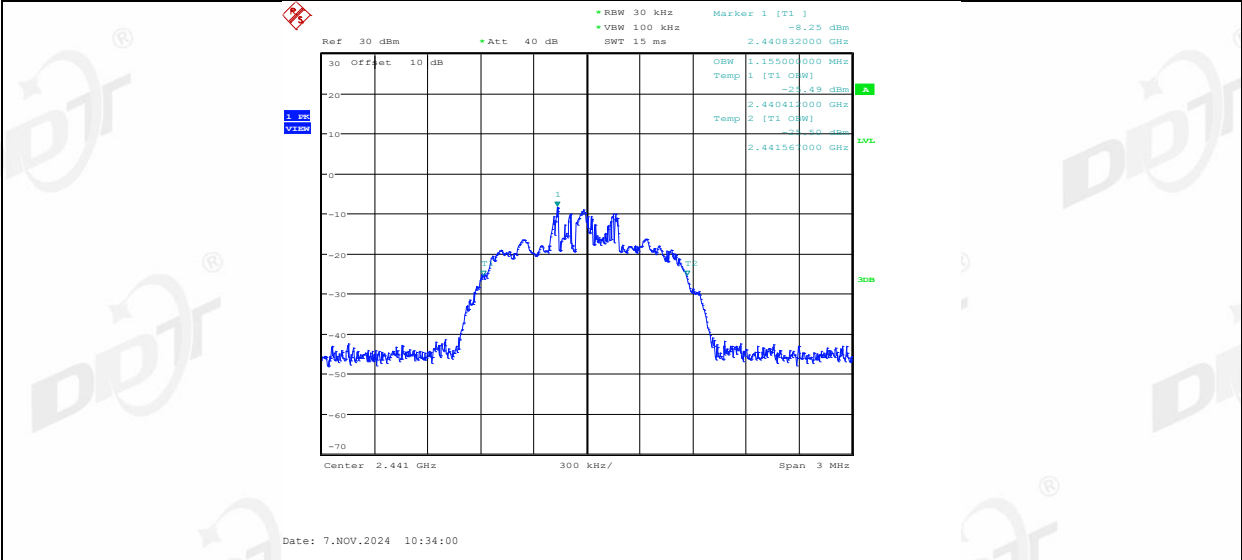


2DH5_Ant1_2480

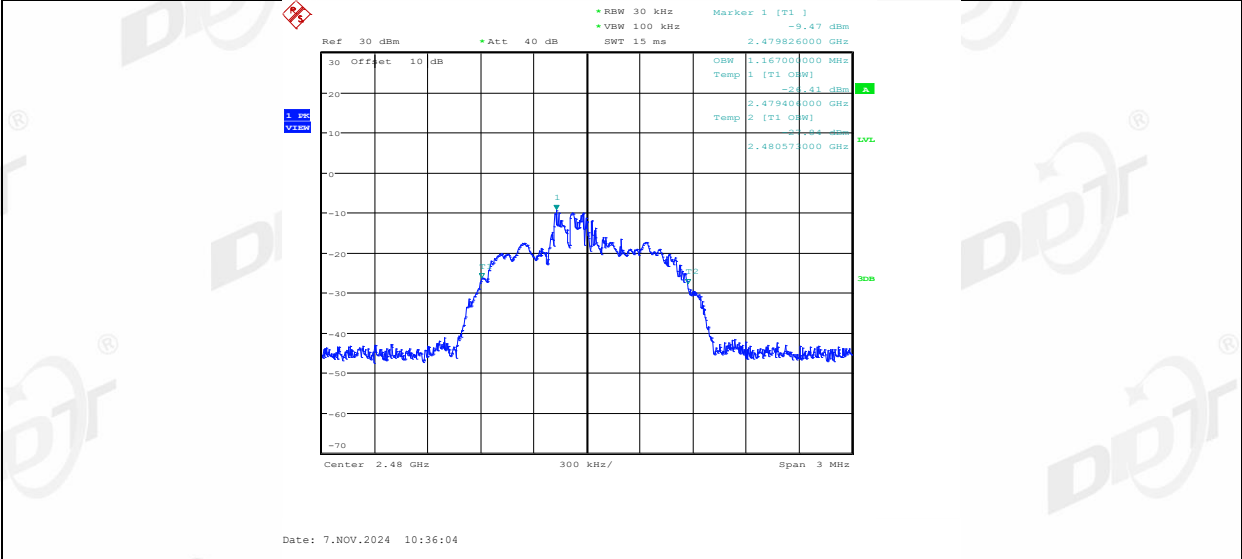


3DH5_Ant1_2402

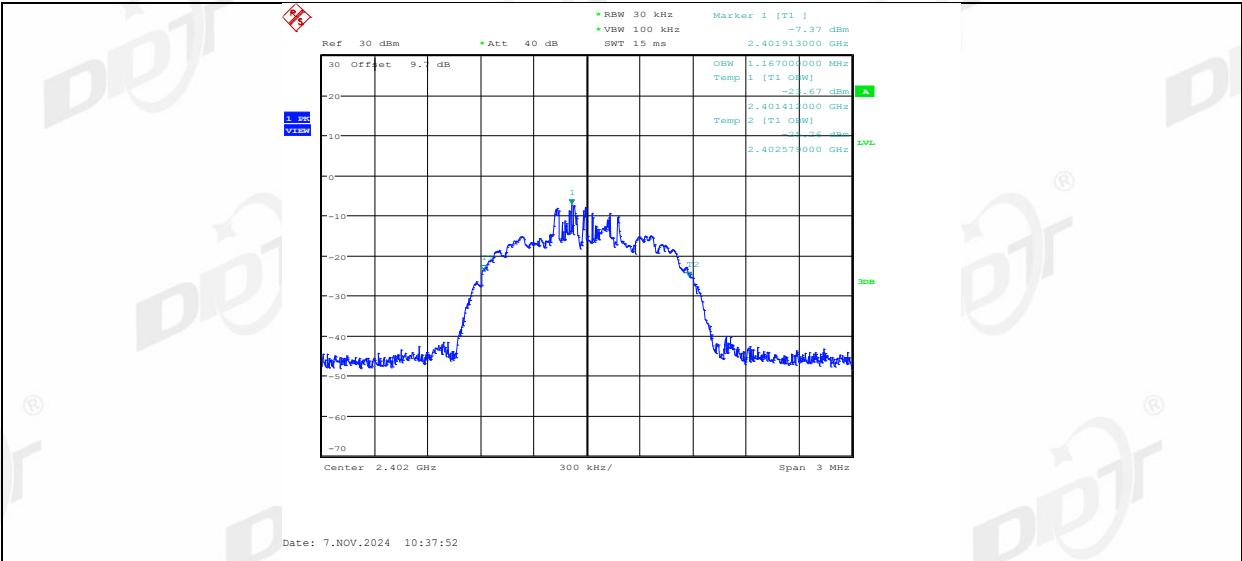



3DH5_Ant1_2441

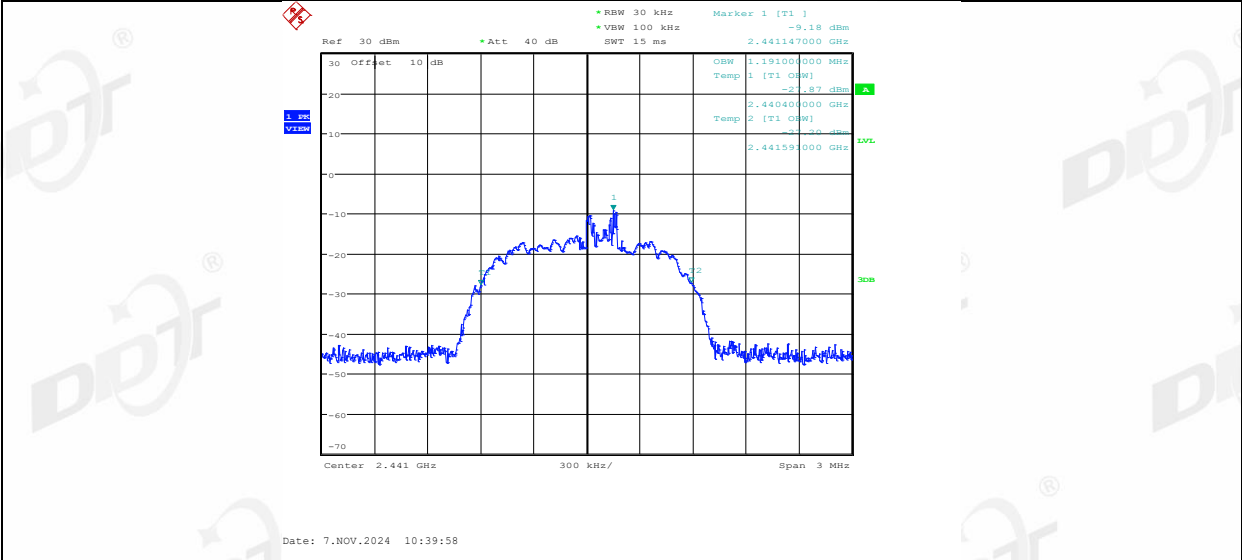


3DH5_Ant1_2480

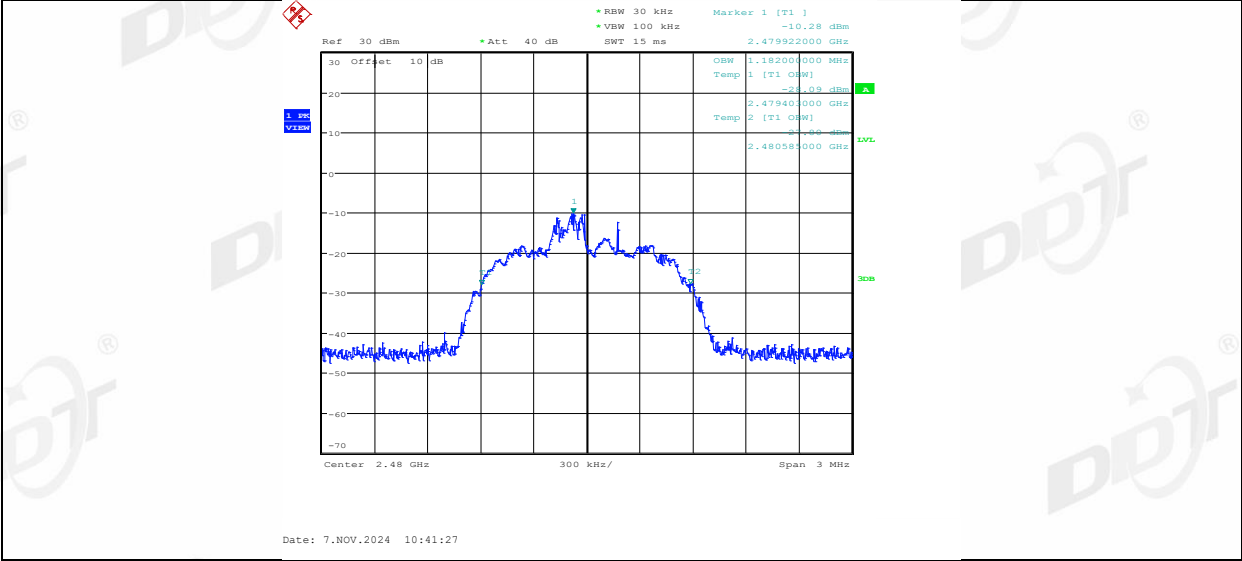

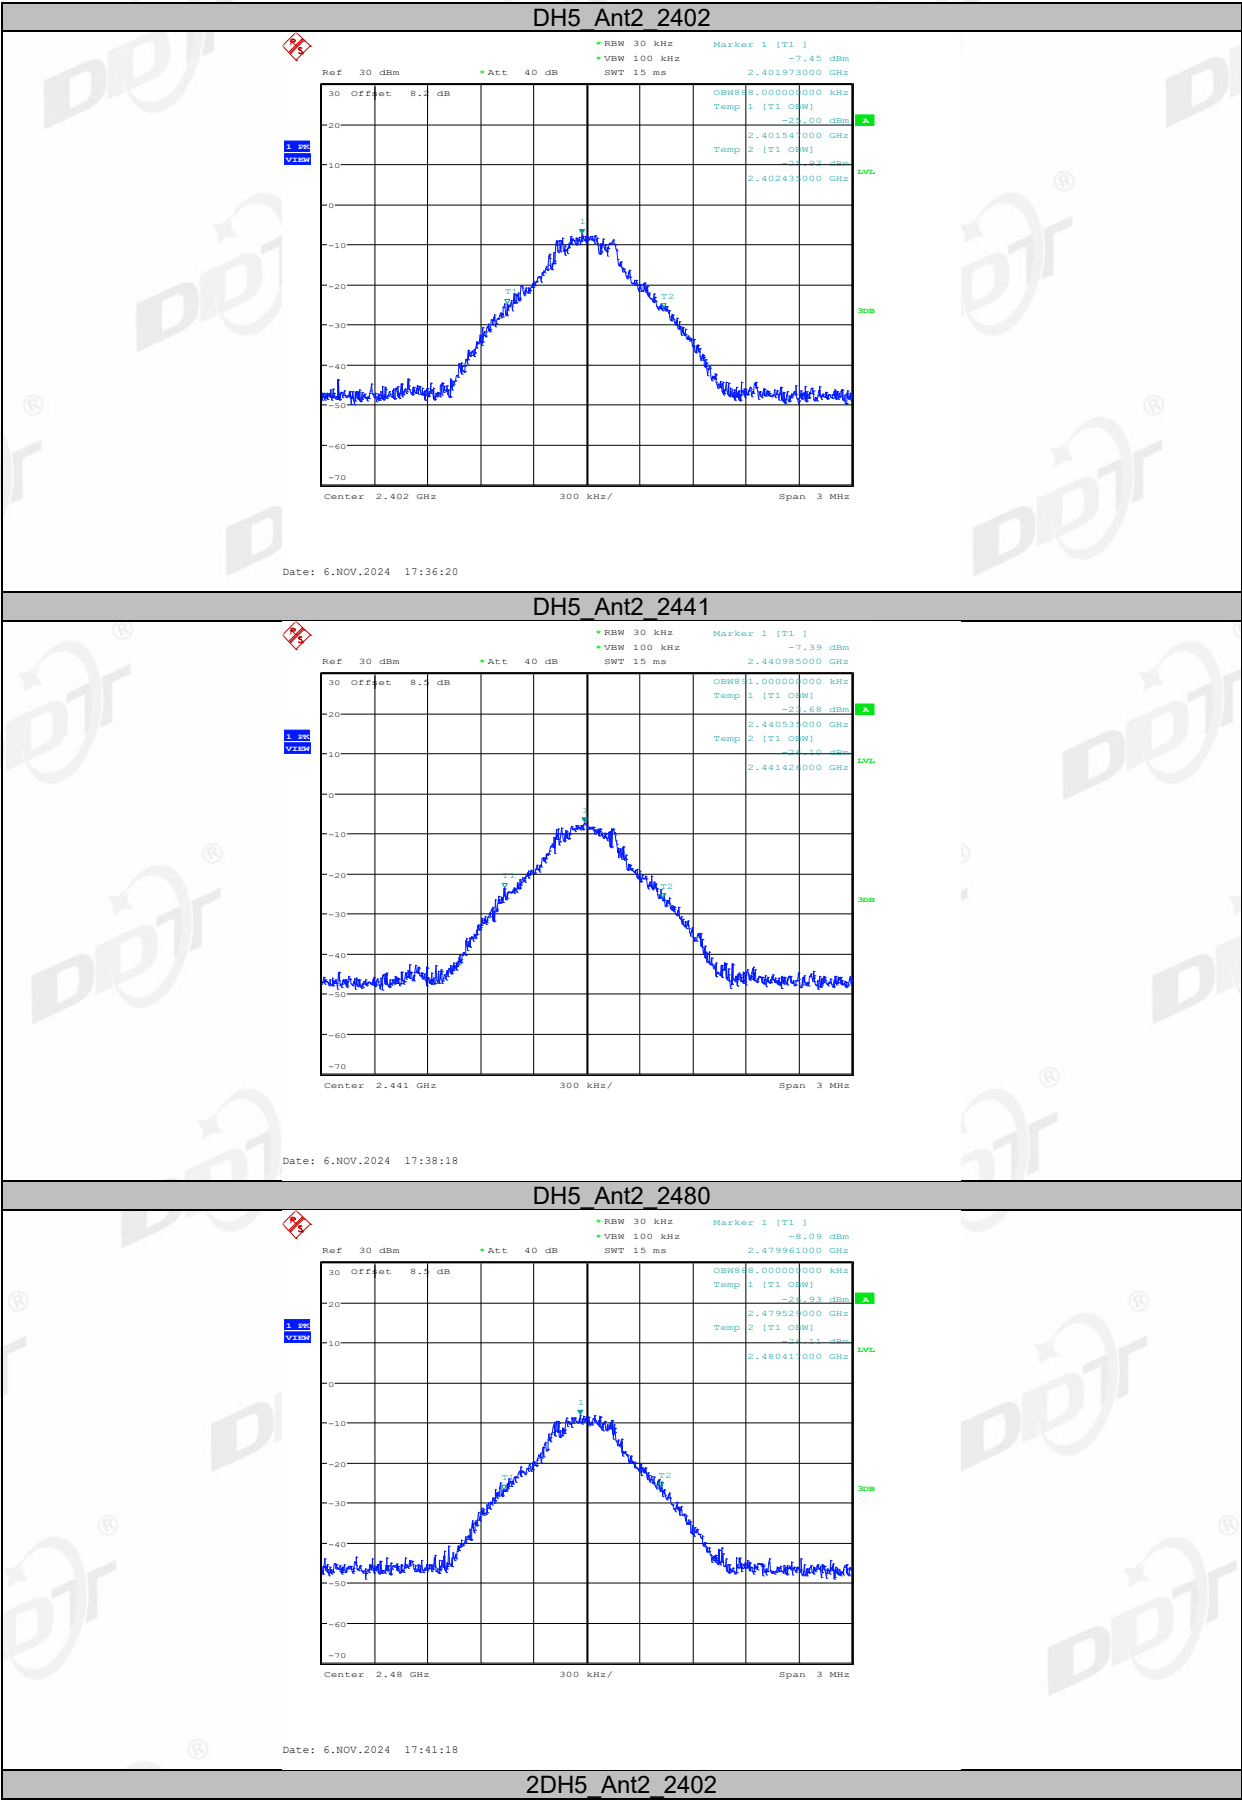


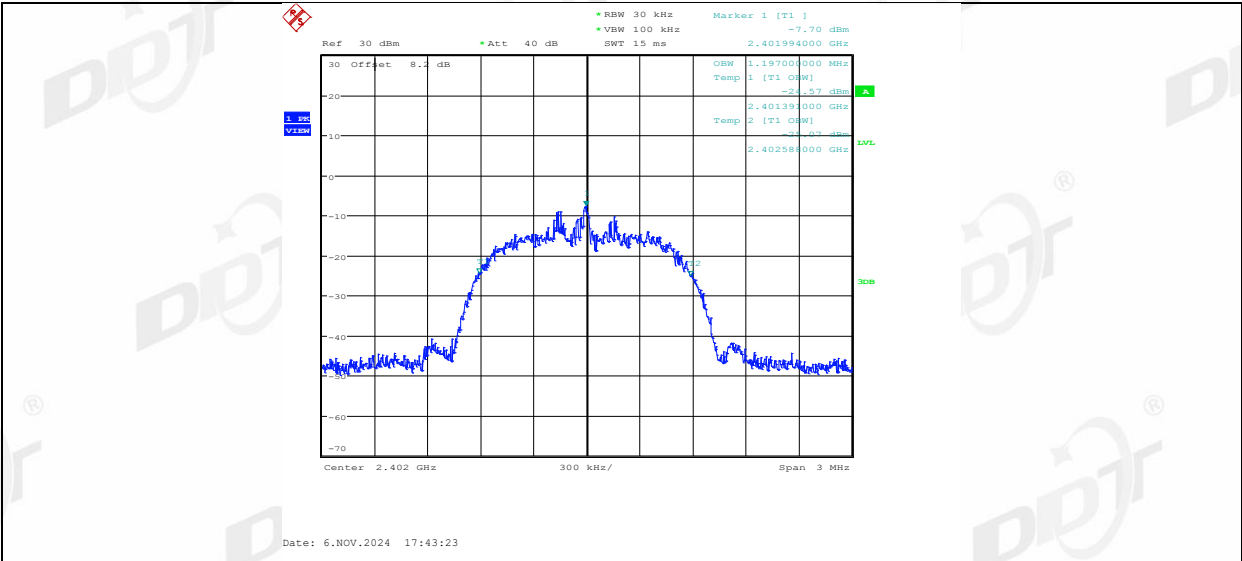


2DH5_Ant2_2441

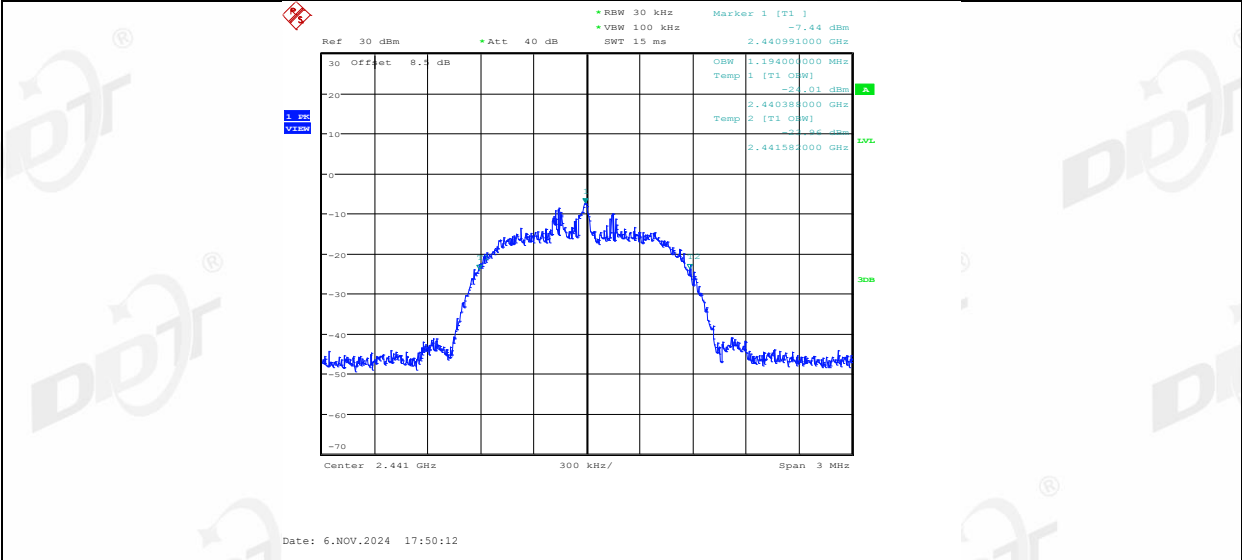


2DH5_Ant2_2480

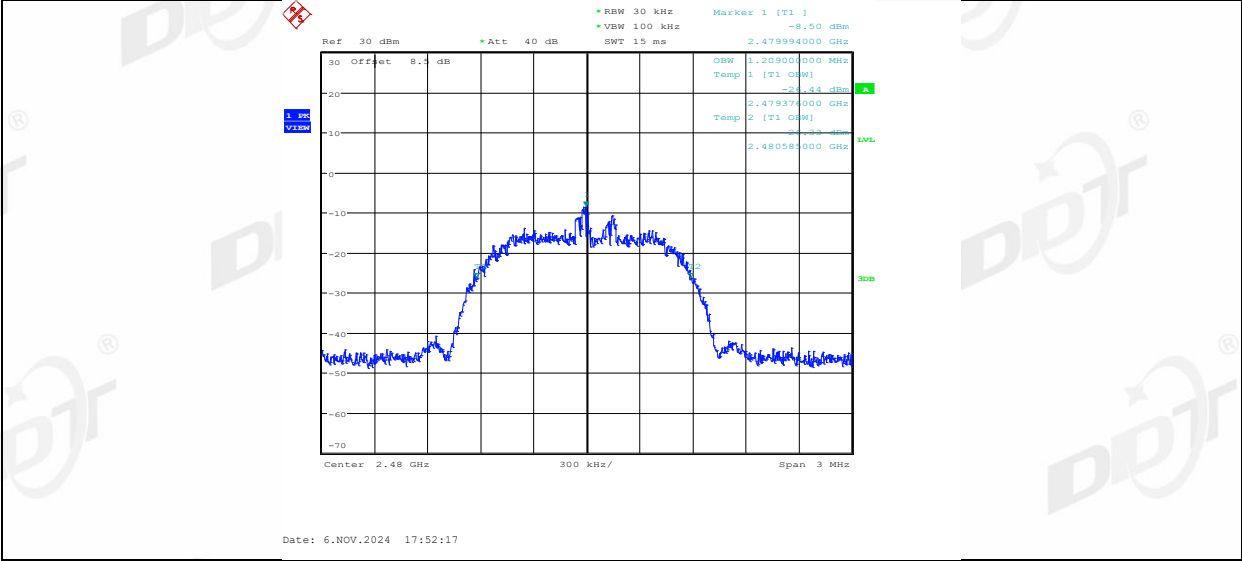


3DH5_Ant2_2402

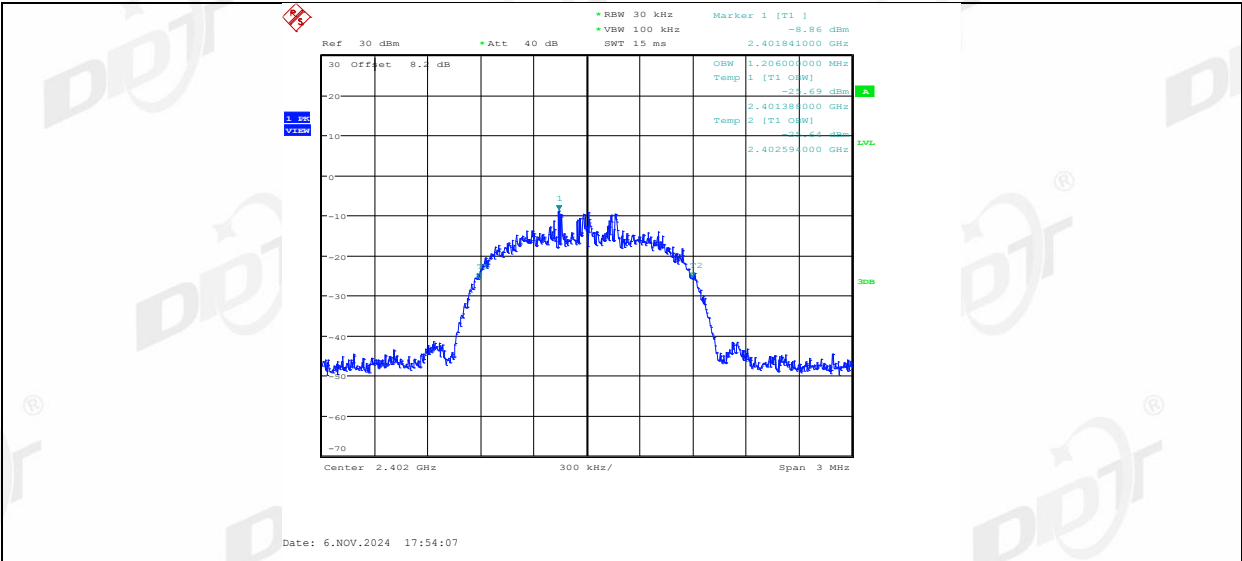

3DH5_Ant2_2441

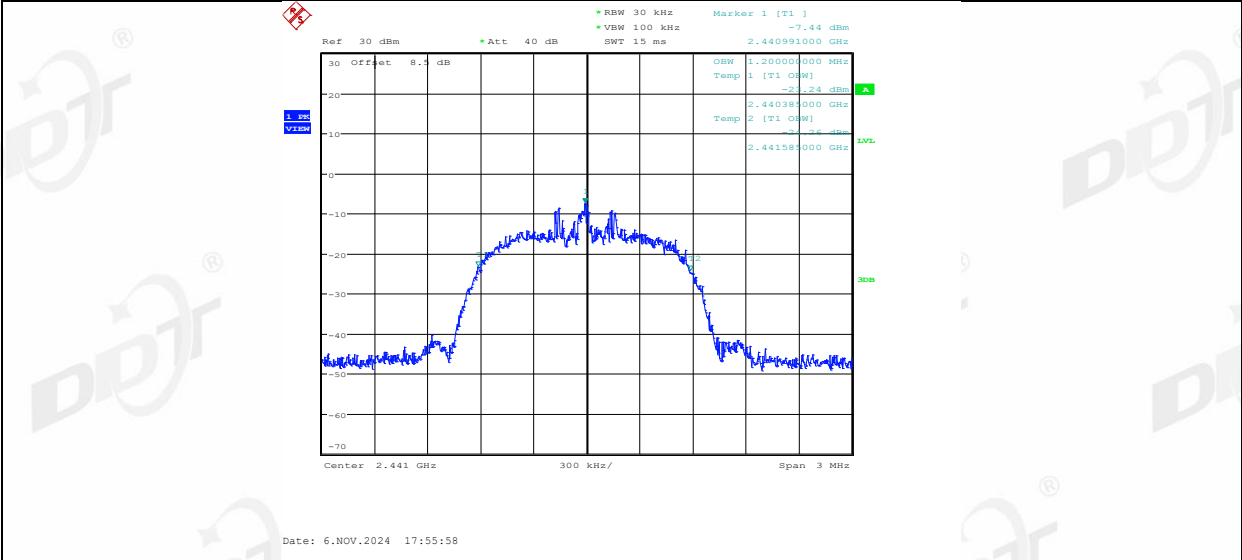


3DH5_Ant2_2480

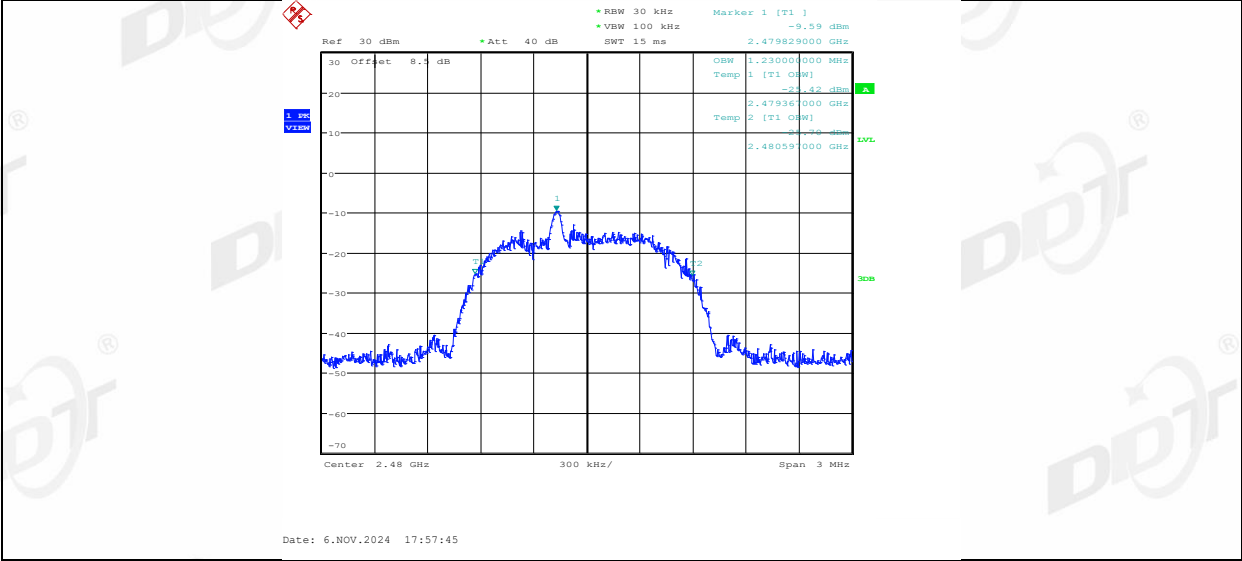

6. Maximum Peak Output Power

6.1. Block diagram of test setup

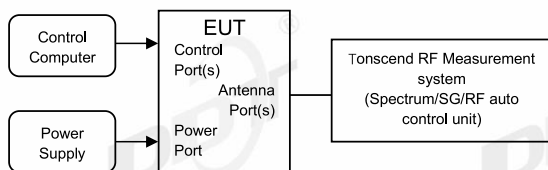

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	$VBW \geq RBW$.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.


6.4. Test result


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,52%RH	Test Date:	2024.10.17-2025.01.02
Test Power Supply:	AC 120V/60HZ	Sample Number:	S24092711-002

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	-3.38	≤20.97	-2.22	≤30	PASS
		2441	-5.00	≤20.97	-3.84	≤30	PASS
		2480	-5.90	≤20.97	-4.74	≤30	PASS
2DH5	Ant1	2402	-3.50	≤20.97	-2.34	≤30	PASS
		2441	-5.10	≤20.97	-3.94	≤30	PASS
		2480	-6.20	≤20.97	-5.04	≤30	PASS
3DH5	Ant1	2402	-3.36	≤20.97	-2.2	≤30	PASS
		2441	-5.09	≤20.97	-3.93	≤30	PASS
		2480	-6.40	≤20.97	-5.24	≤30	PASS


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant2	2402	-4.47	≤20.97	-3.31	≤30	PASS
		2441	-6.14	≤20.97	-4.98	≤30	PASS
		2480	-5.44	≤20.97	-4.28	≤30	PASS
2DH5	Ant2	2402	-4.55	≤20.97	-3.39	≤30	PASS
		2441	-6.66	≤20.97	-5.5	≤30	PASS
		2480	-5.53	≤20.97	-4.37	≤30	PASS
3DH5	Ant2	2402	-4.18	≤20.97	-3.02	≤30	PASS
		2441	-6.20	≤20.97	-5.04	≤30	PASS
		2480	-5.47	≤20.97	-4.31	≤30	PASS

6.5.Test graphs

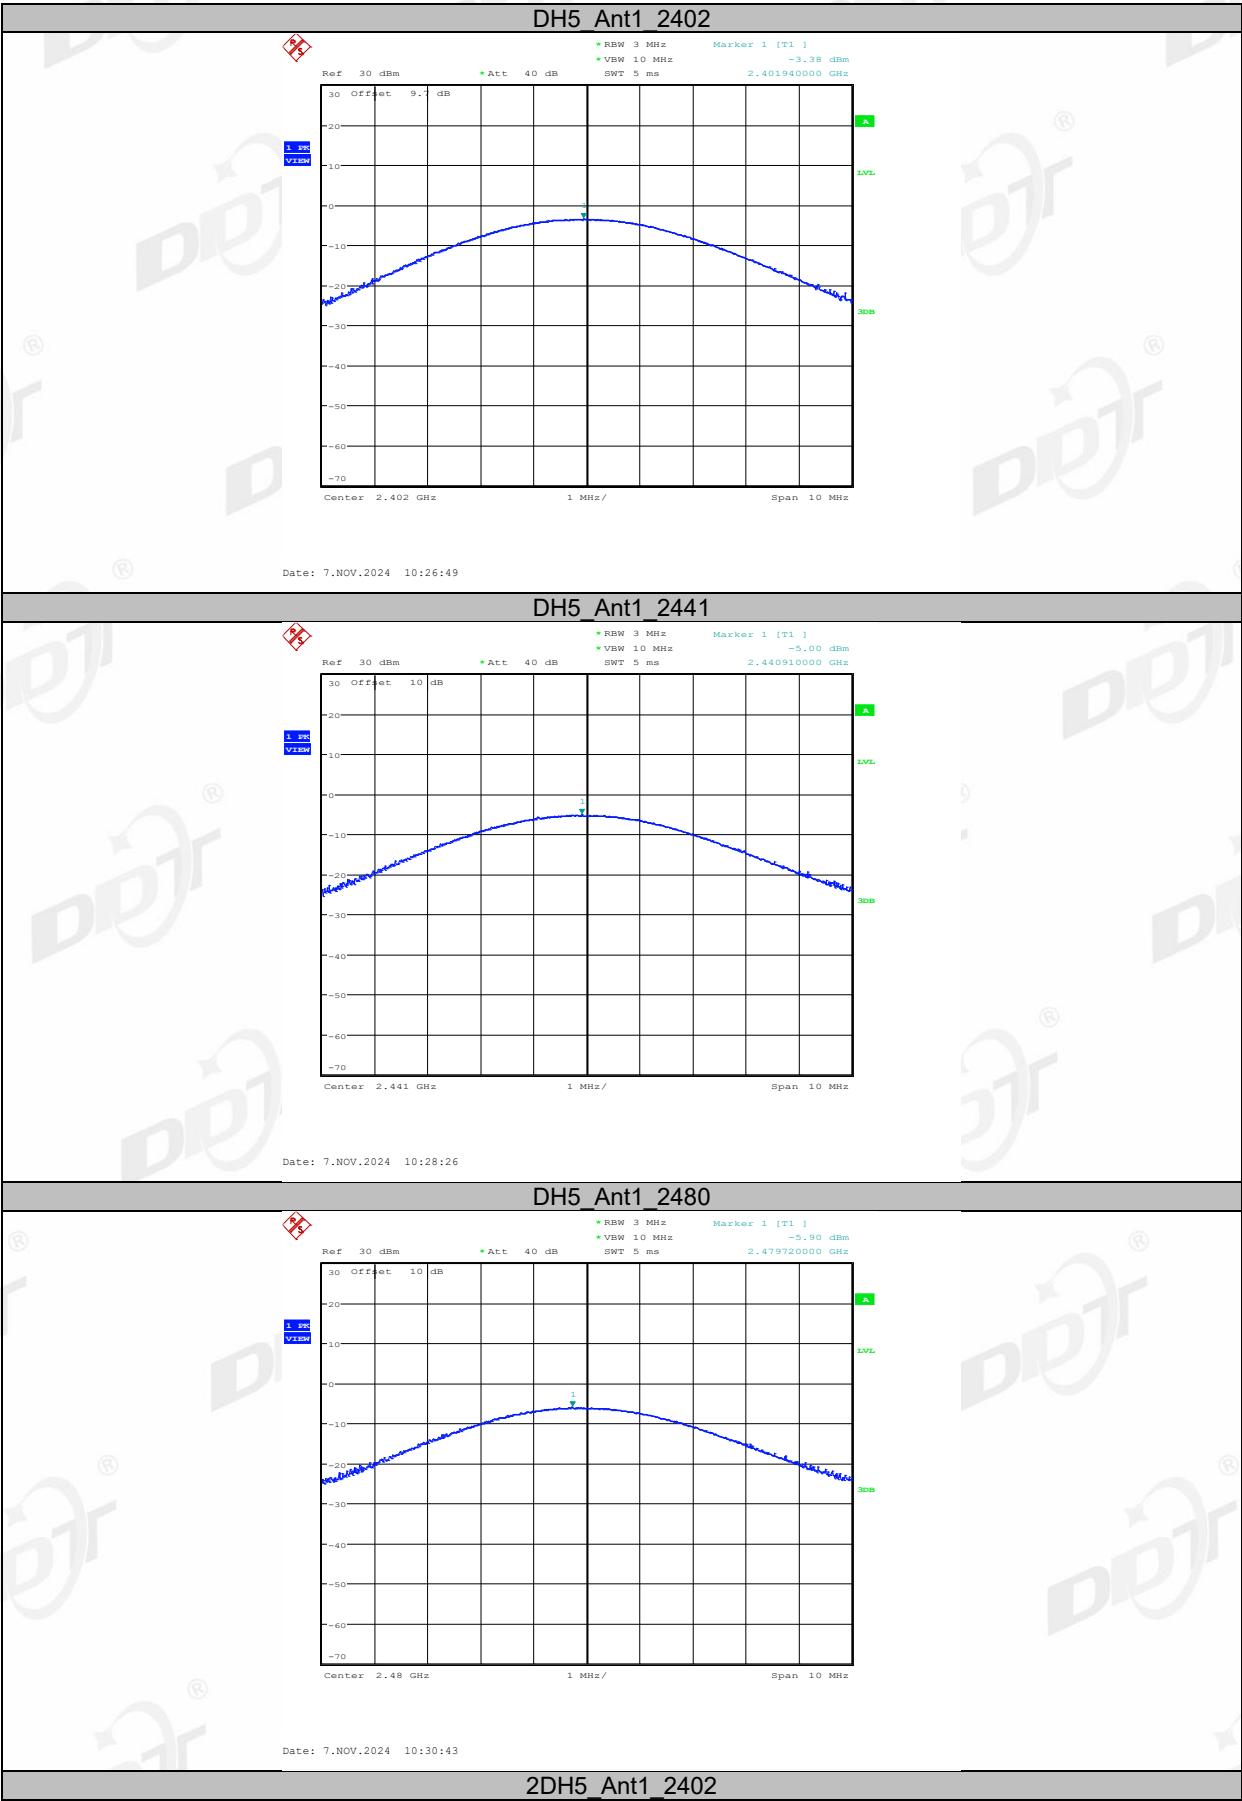


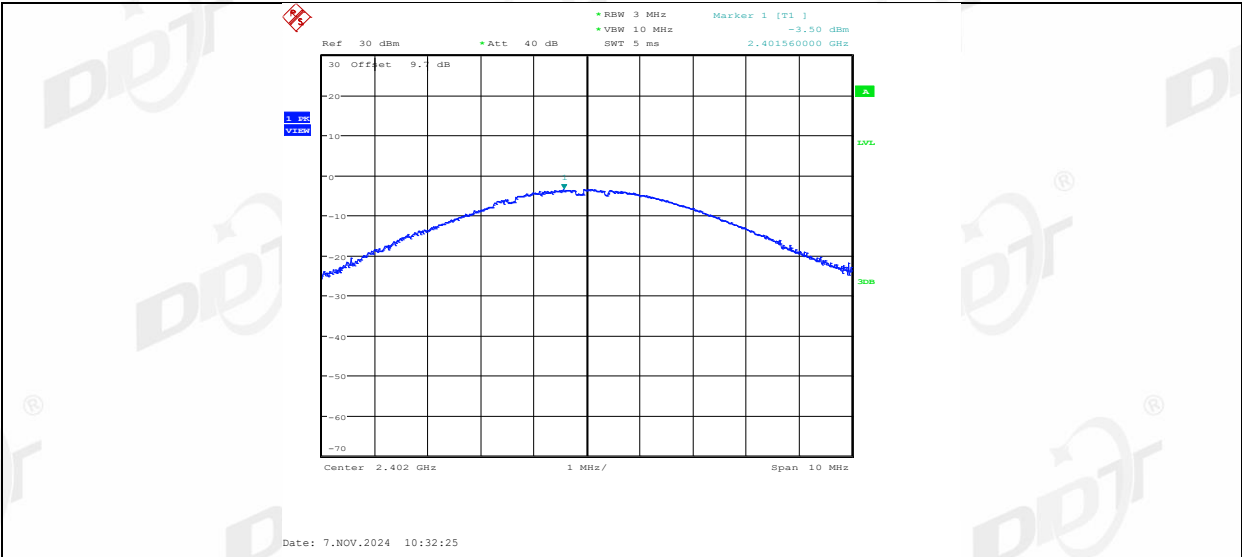


2DH5_Ant1_2441

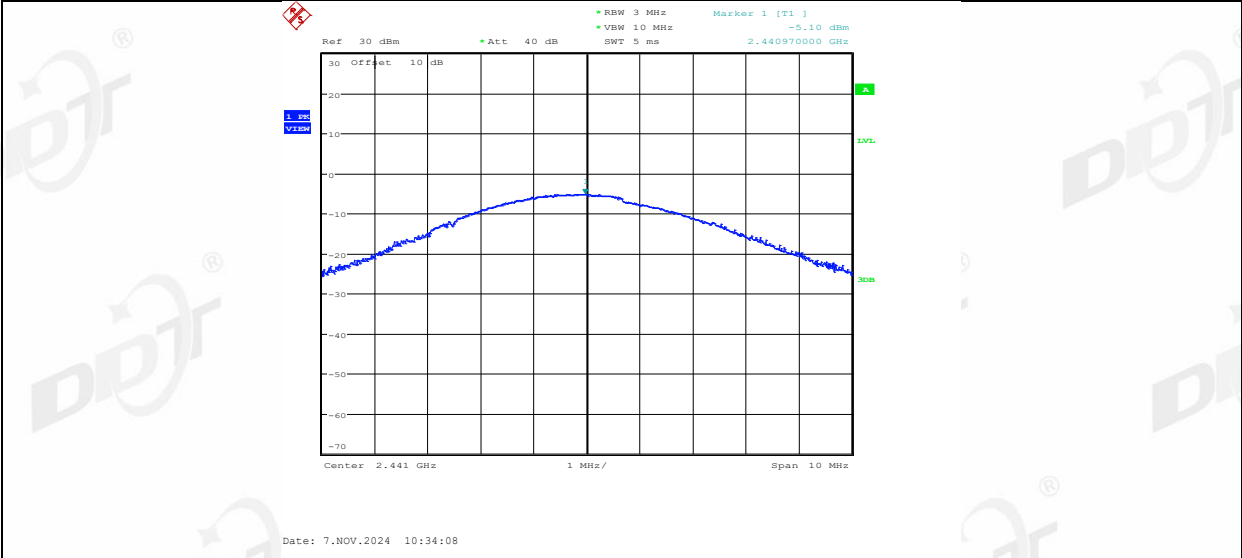


2DH5_Ant1_2480

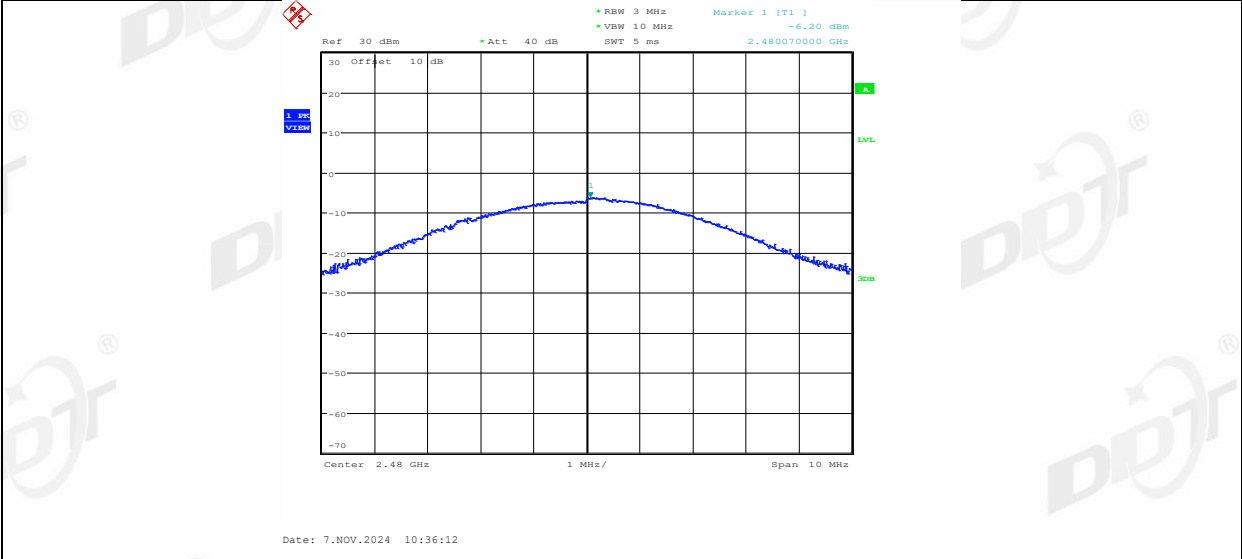


3DH5_Ant1_2402

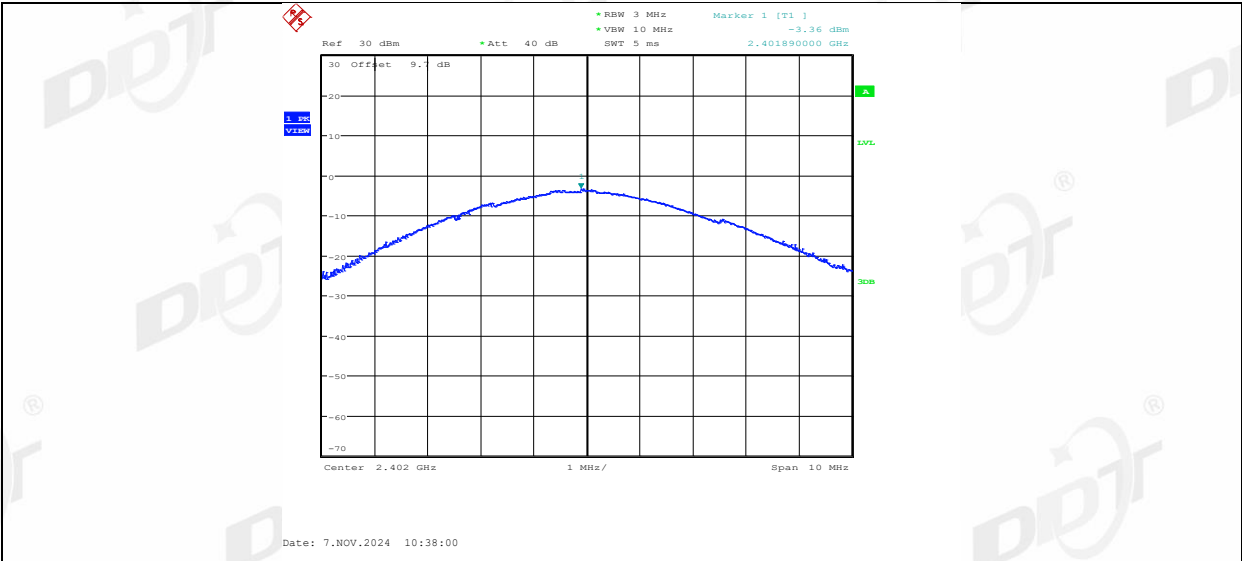



3DH5_Ant1_2441

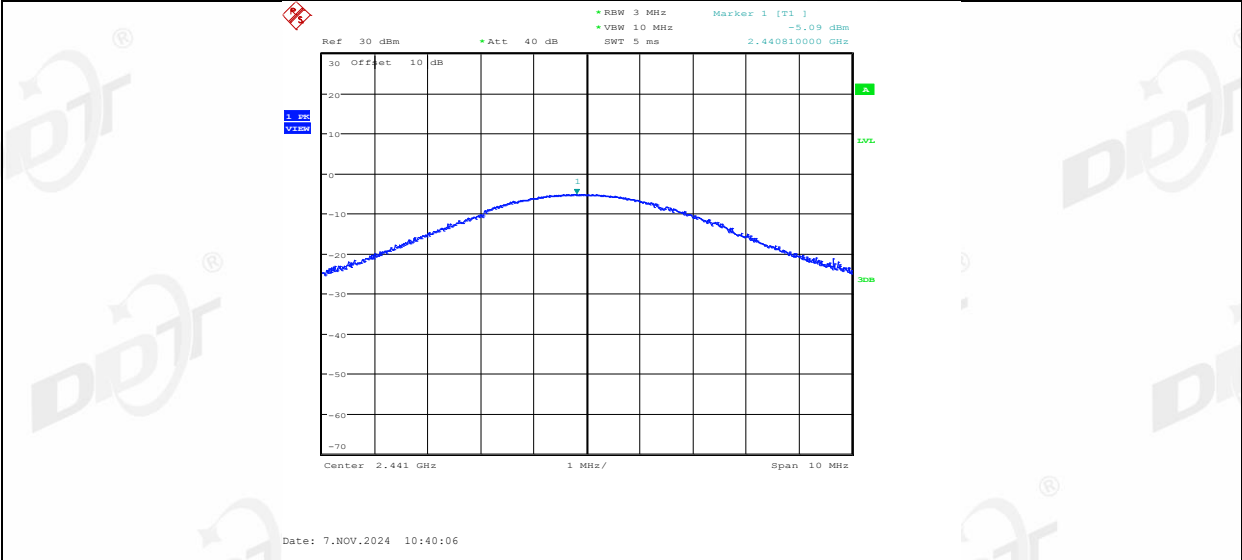


3DH5_Ant1_2480

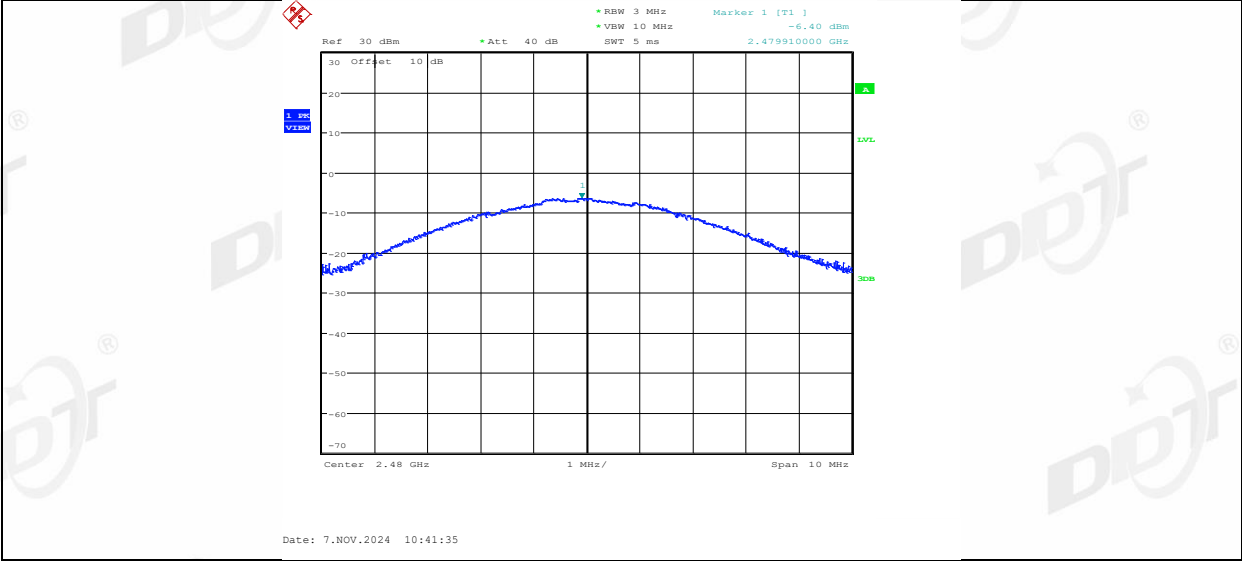

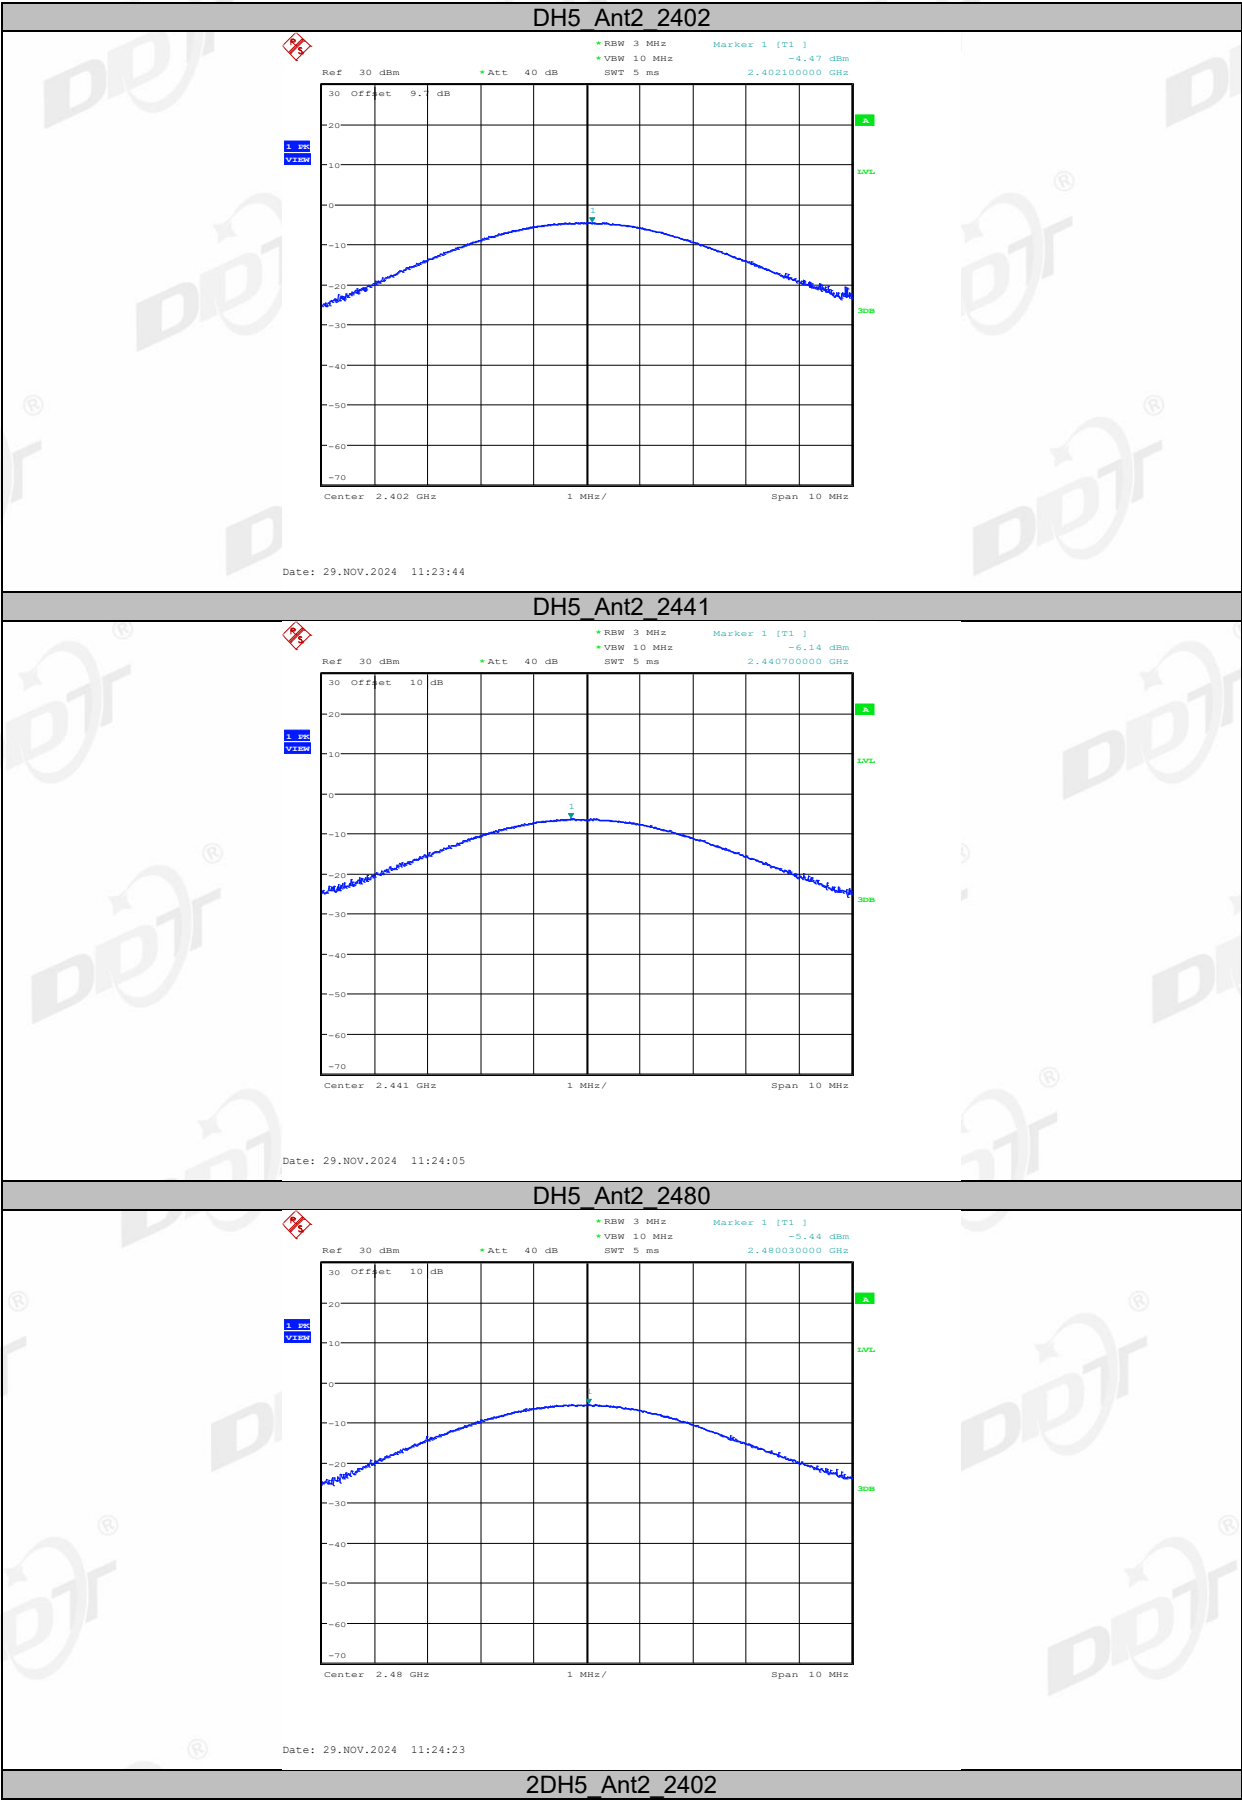


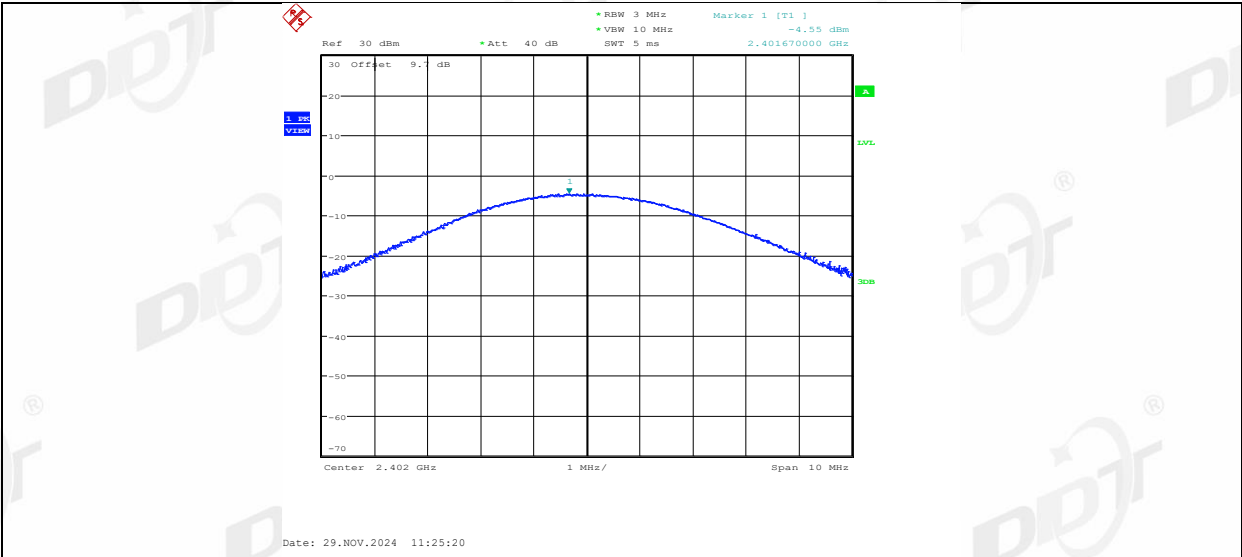


2DH5_Ant2_2441

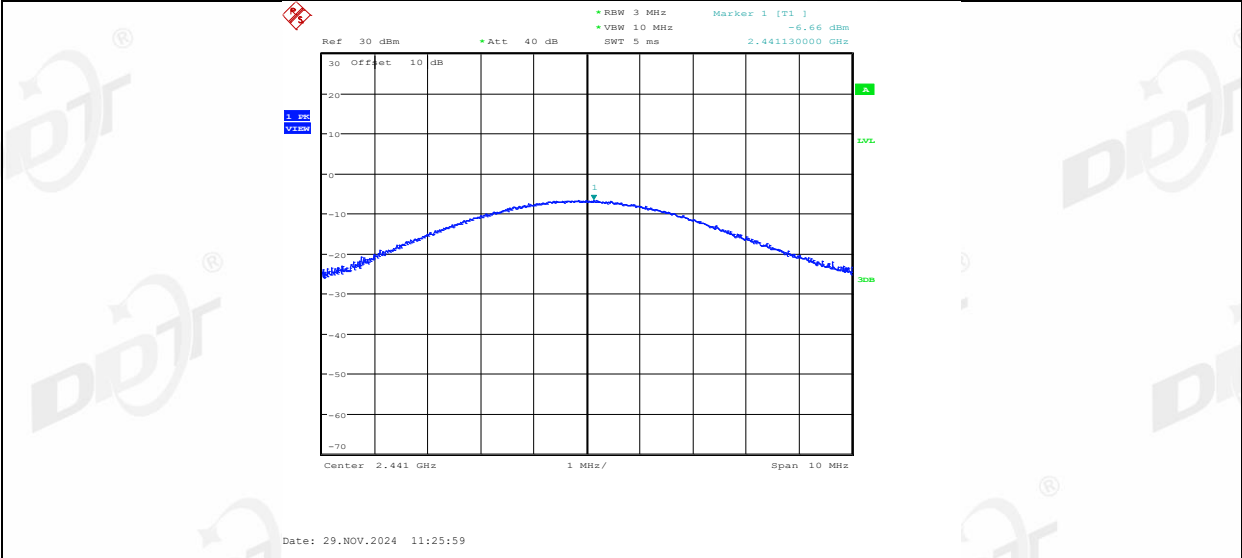


2DH5_Ant2_2480

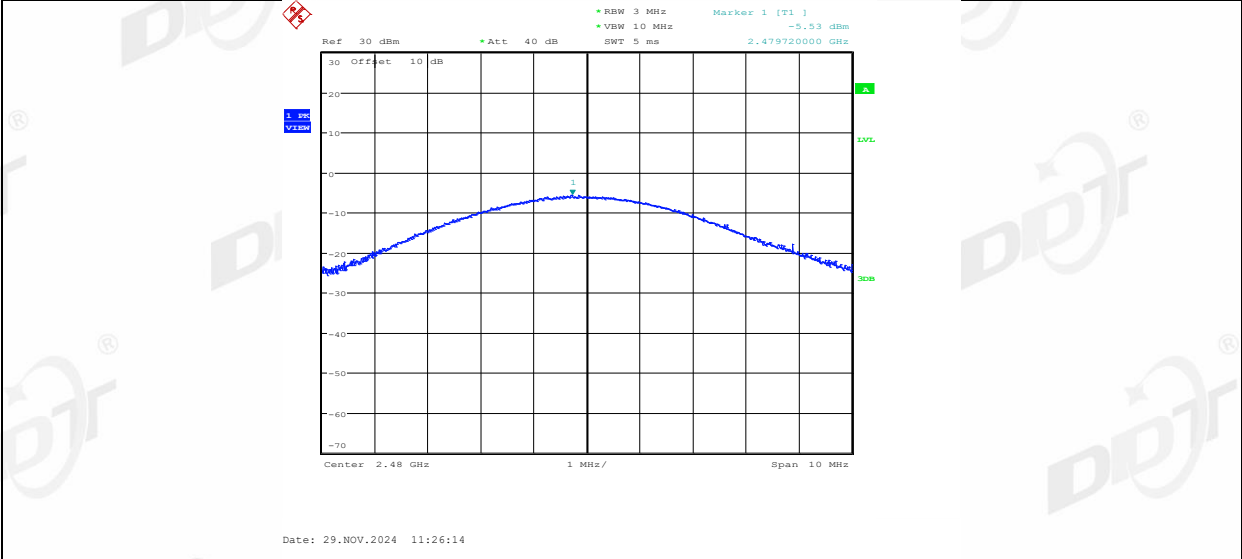


3DH5_Ant2_2402

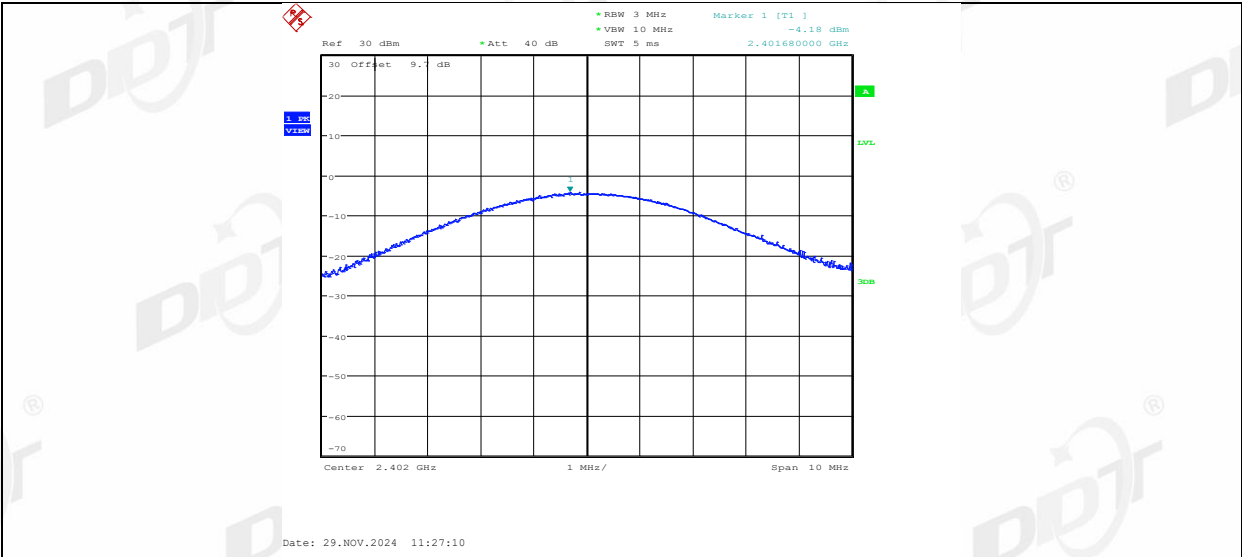

3DH5_Ant2_2441

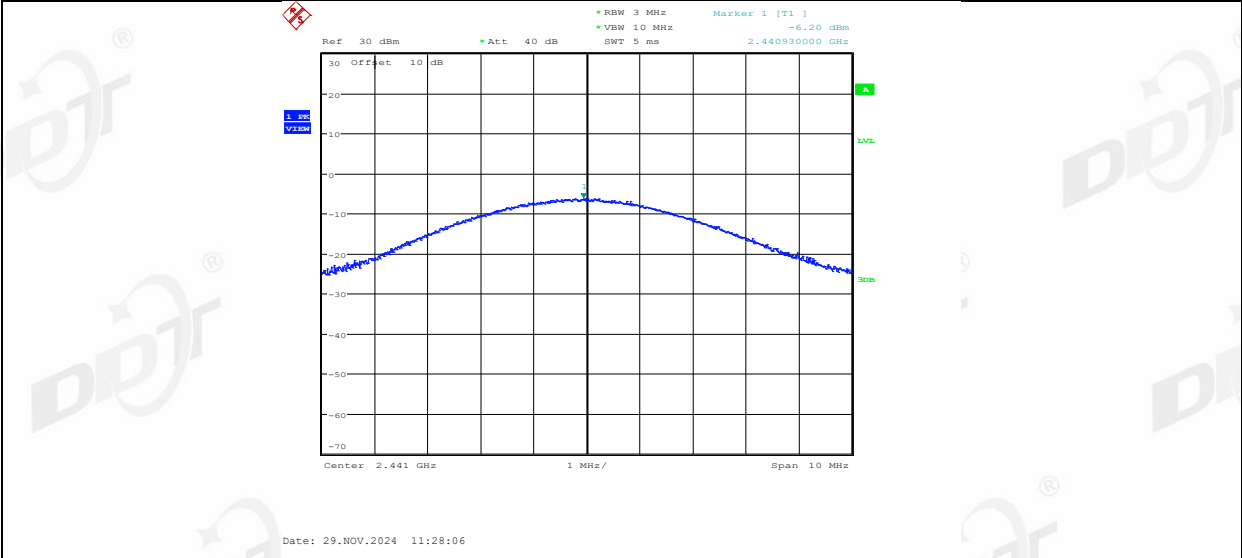


3DH5_Ant2_2480

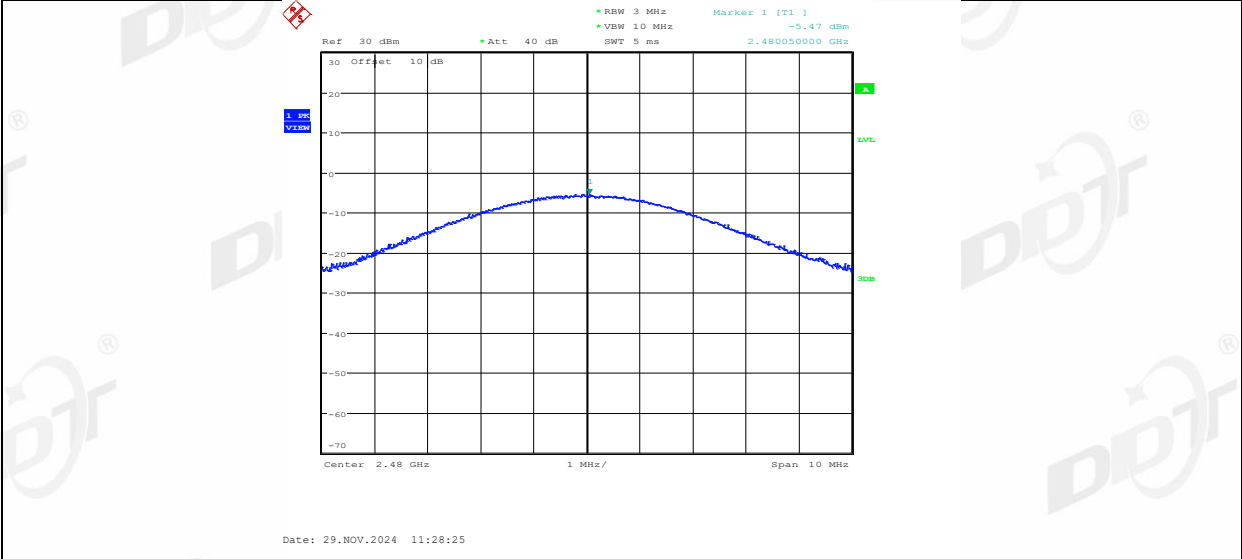

7. Carrier Frequency Separation

7.1. Block diagram of test setup

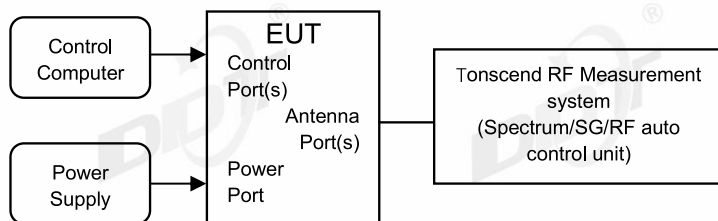

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	VBW $\geq$ RBW.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.


7.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,52%RH	Test Date:	2024.10.17-2025.01.02
Test Power Supply:	AC 120V/60HZ	Sample Number:	S24092711-002

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.186	≥0.645	PASS
2DH5	Ant1	Hop	1.029	≥0.860	PASS
3DH5	Ant1	Hop	1.08	≥0.833	PASS

Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant2	Hop	1.026	≥0.663	PASS
2DH5	Ant2	Hop	1.01	≥0.867	PASS
3DH5	Ant2	Hop	0.987	≥0.867	PASS


7.5.Test graphs

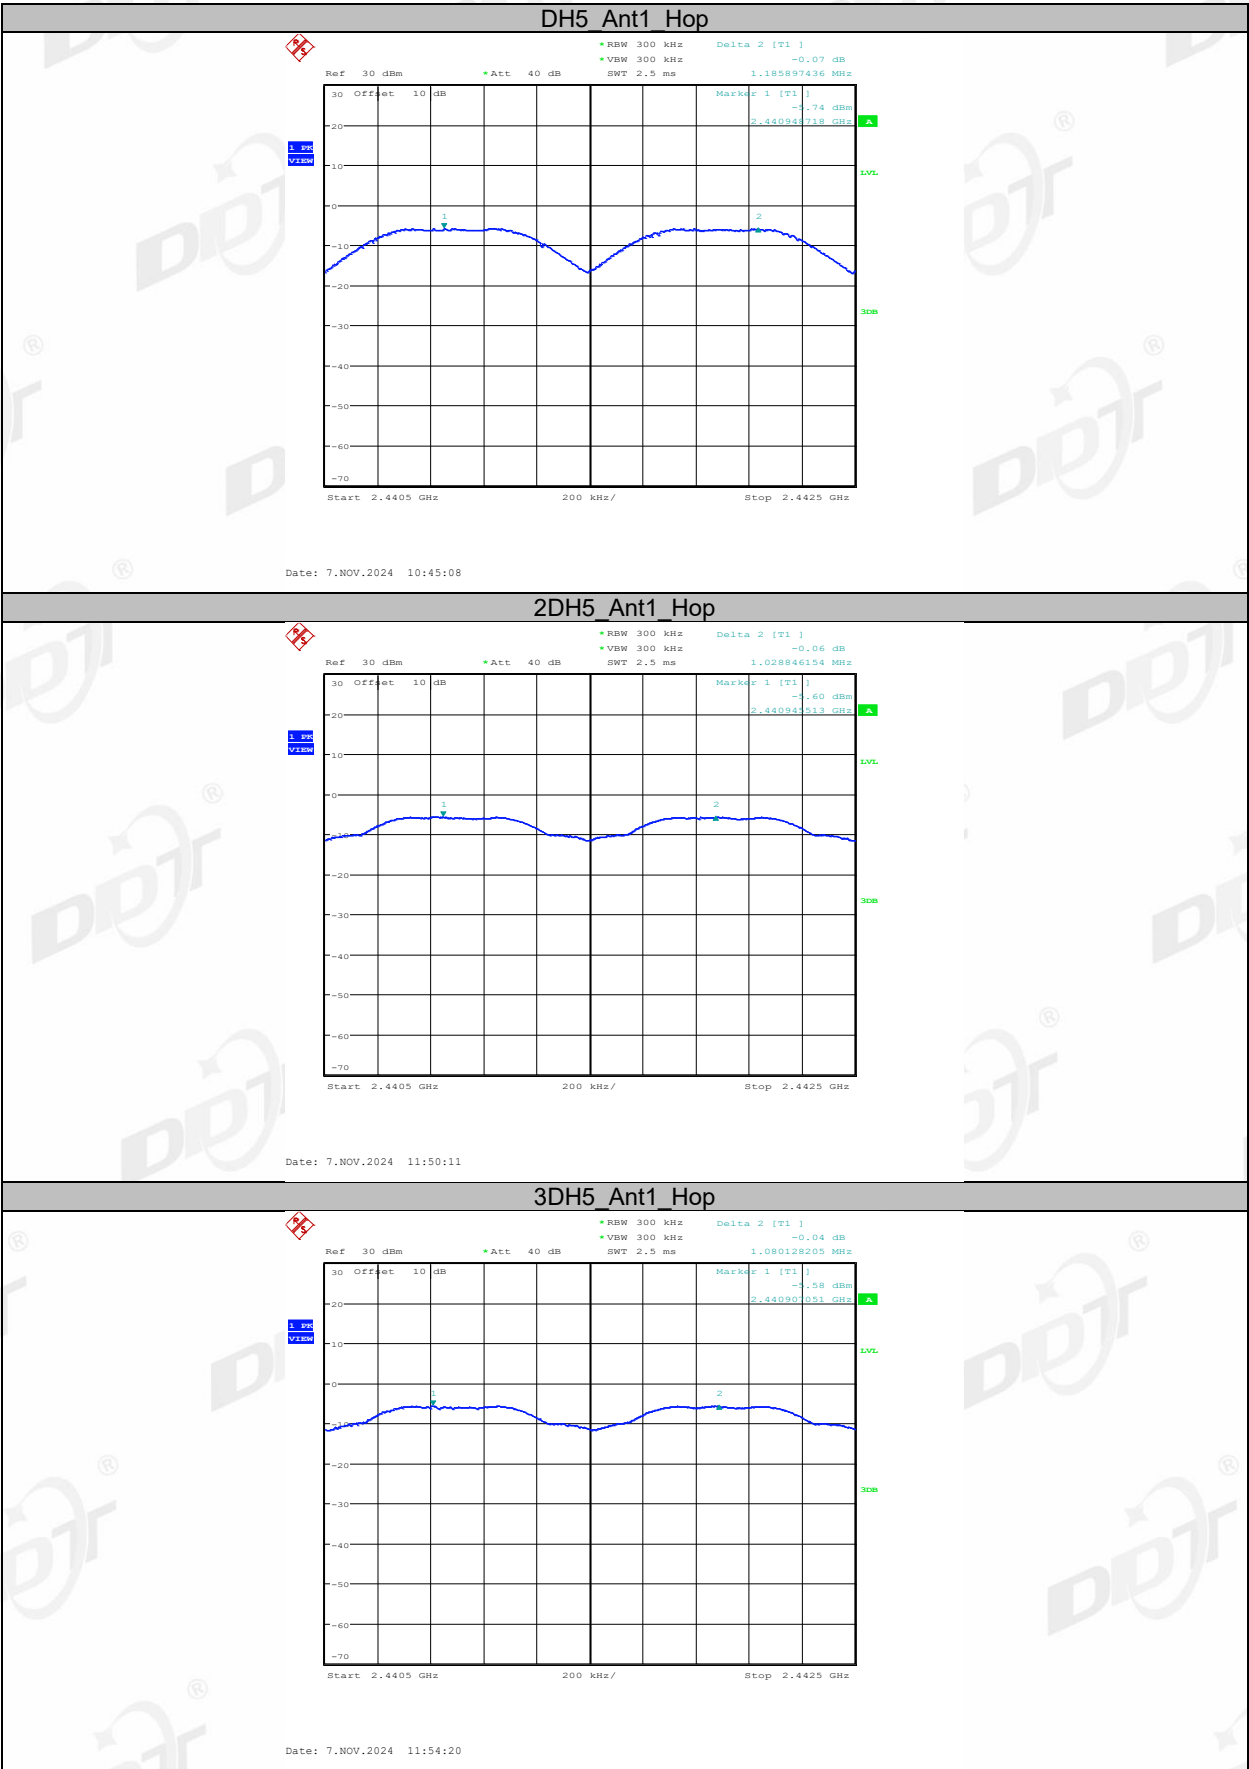



8. Dwell Time

8.1. Block diagram of test setup

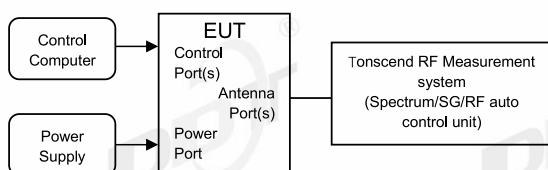

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	$\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$
VBW:	$VBW \geq RBW$.
Span:	Zero span, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.


8.4. Test result


Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	24.6℃,52%RH	Test Date:	2024.10.17-2025.01.02
Test Power Supply:	AC 120V/60HZ	Sample Number:	S24092711-002

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.350	19	0.007	≤0.4	PASS
DH3	Ant1	Hop	1.620	12	0.019	≤0.4	PASS
DH5	Ant1	Hop	2.870	22	0.063	≤0.4	PASS
2DH1	Ant1	Hop	0.370	11	0.004	≤0.4	PASS
2DH3	Ant1	Hop	1.620	19	0.031	≤0.4	PASS
2DH5	Ant1	Hop	2.870	19	0.055	≤0.4	PASS
3DH1	Ant1	Hop	0.370	11	0.004	≤0.4	PASS
3DH3	Ant1	Hop	1.630	17	0.028	≤0.4	PASS
3DH5	Ant1	Hop	2.880	12	0.035	≤0.4	PASS



Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant2	Hop	0.360	314	0.113	≤0.4	PASS
DH3	Ant2	Hop	1.630	180	0.293	≤0.4	PASS
DH5	Ant2	Hop	2.880	108	0.311	≤0.4	PASS
2DH1	Ant2	Hop	0.370	312	0.115	≤0.4	PASS
2DH3	Ant2	Hop	1.630	173	0.282	≤0.4	PASS
2DH5	Ant2	Hop	2.870	99	0.284	≤0.4	PASS
3DH1	Ant2	Hop	0.370	314	0.116	≤0.4	PASS
3DH3	Ant2	Hop	1.630	158	0.258	≤0.4	PASS
3DH5	Ant2	Hop	2.870	109	0.313	≤0.4	PASS

8.5.Test graphs


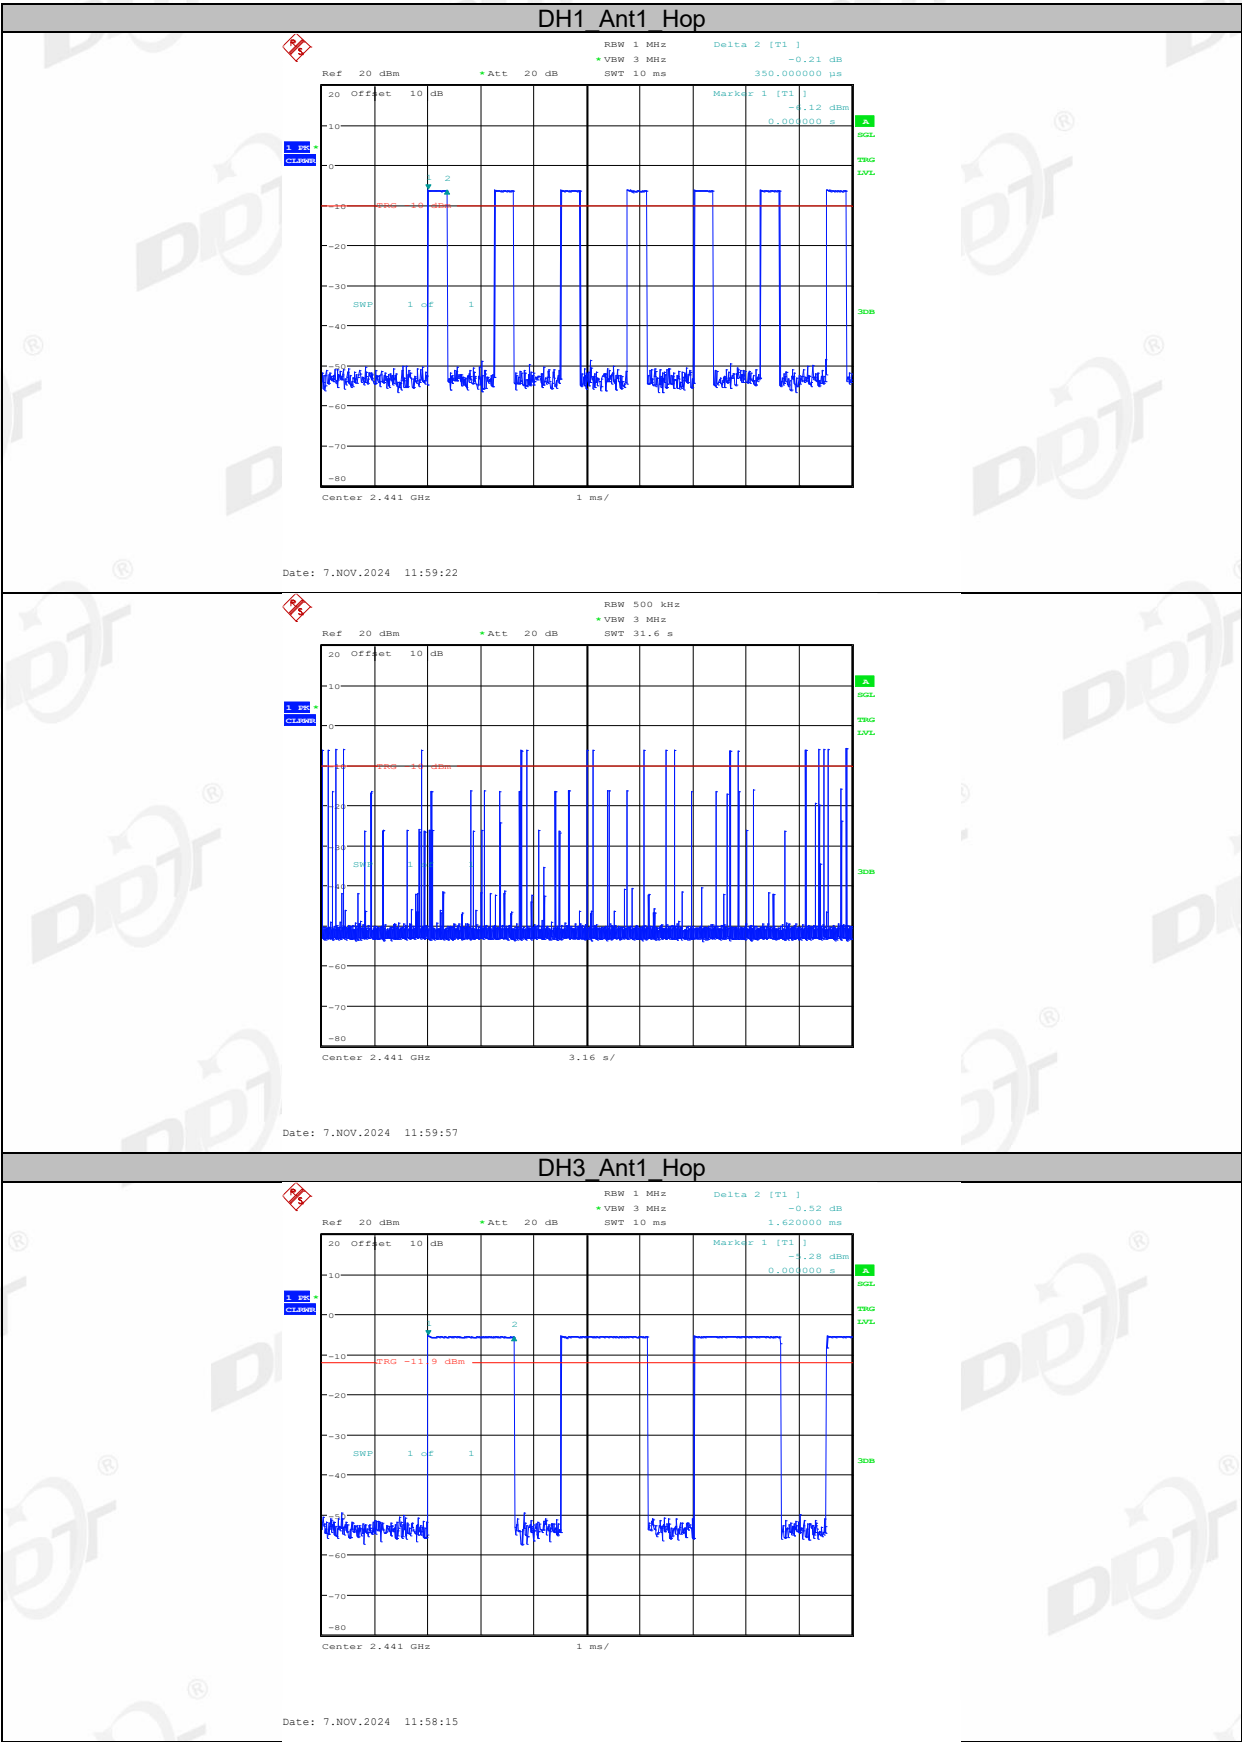


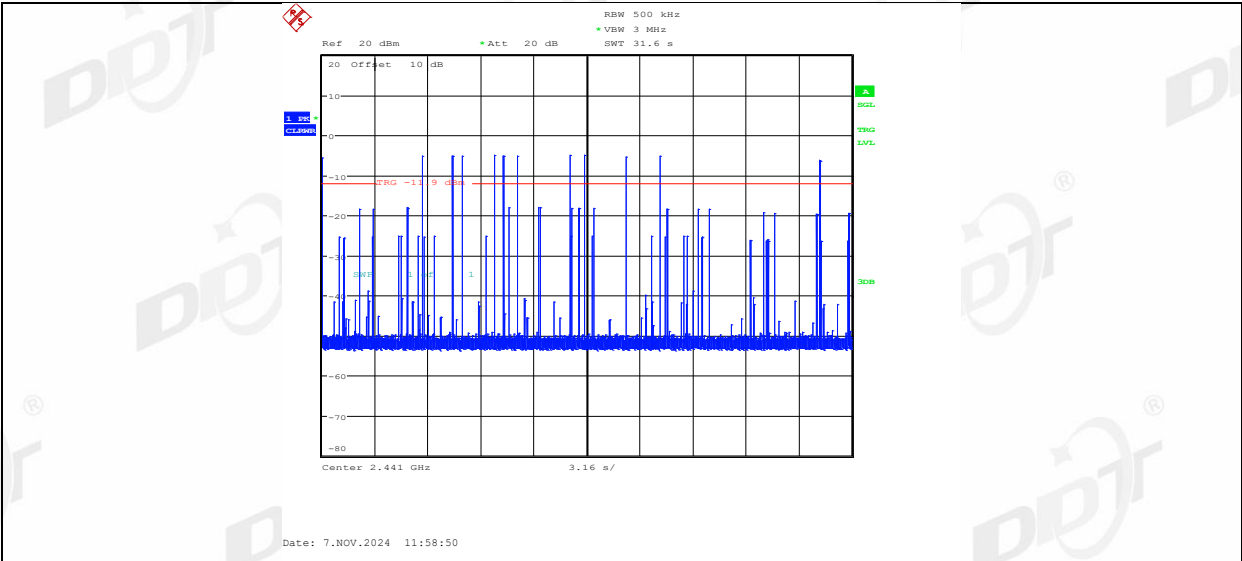


DH5_Ant1_Hop


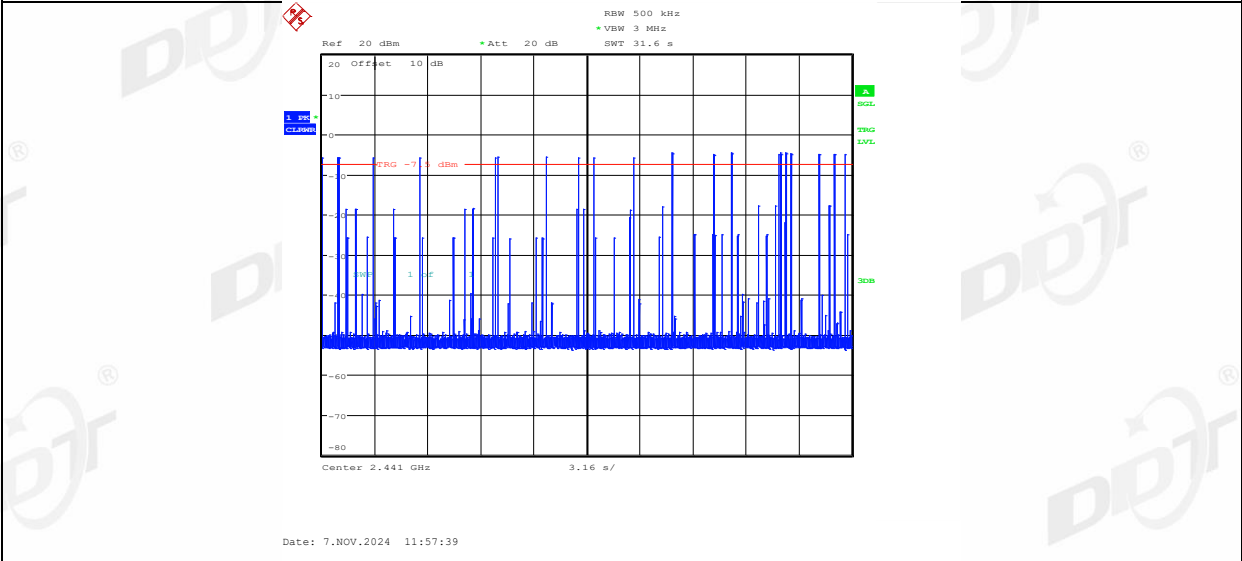
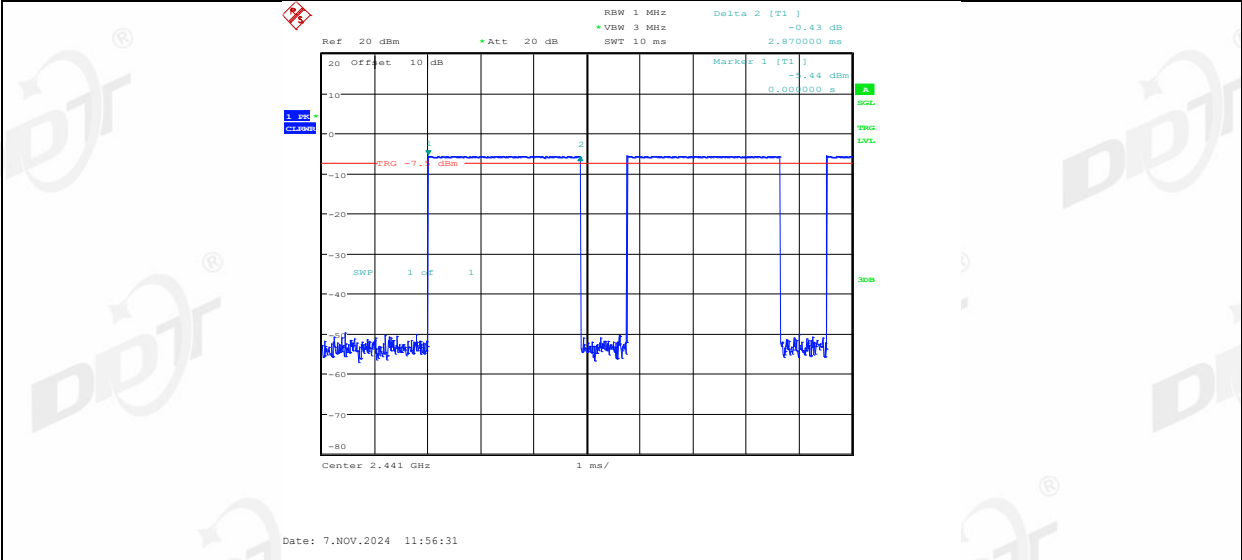




2DH1_Ant1_Hop

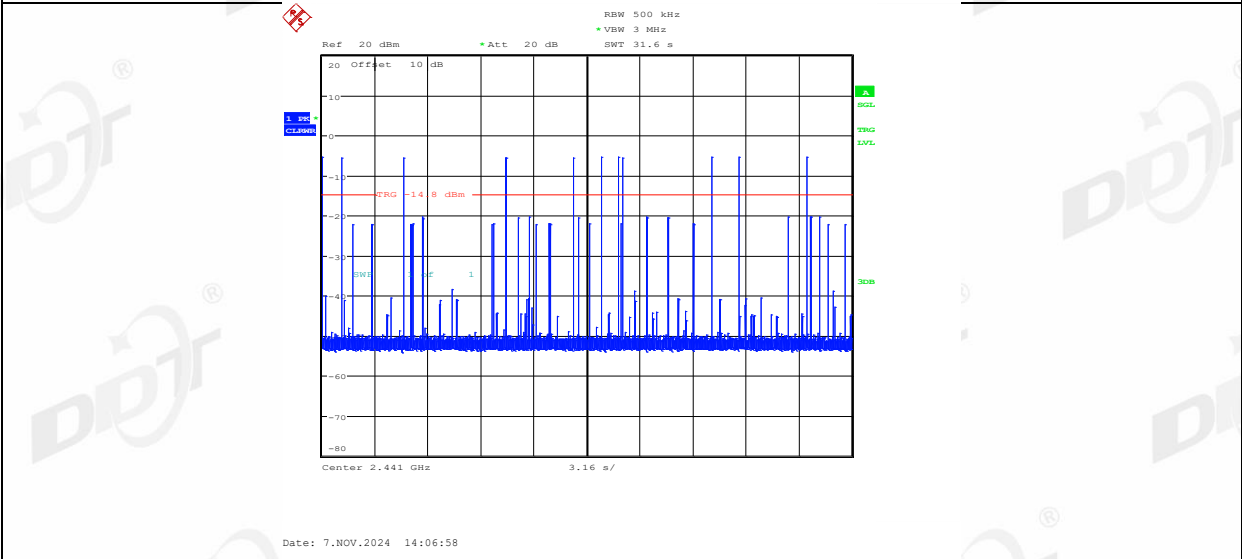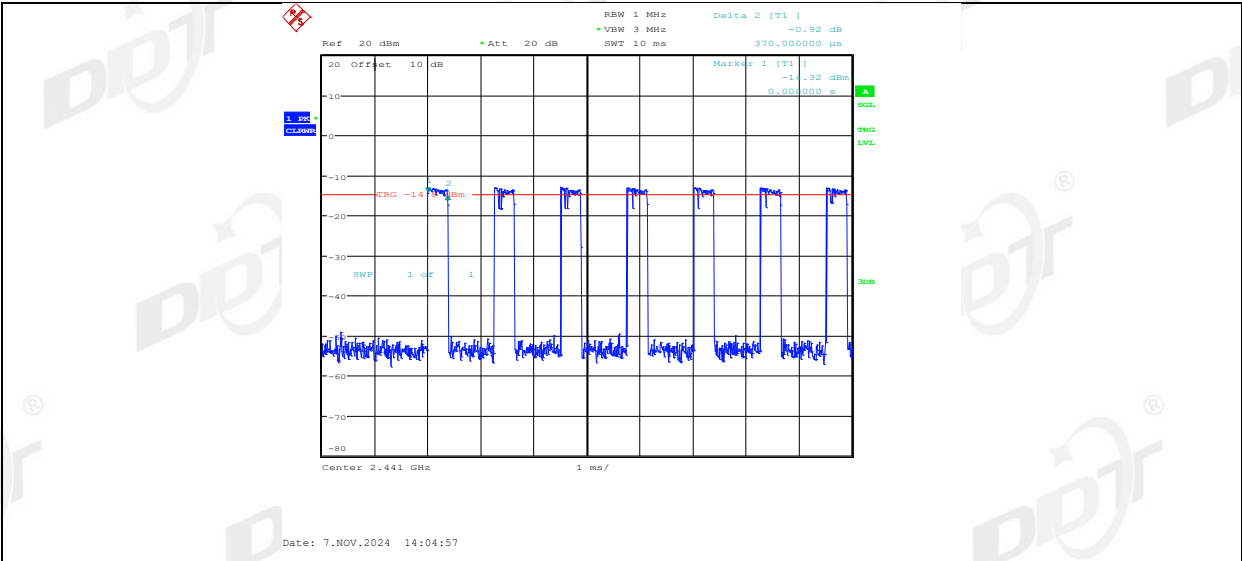

2DH3_Ant1_Hop

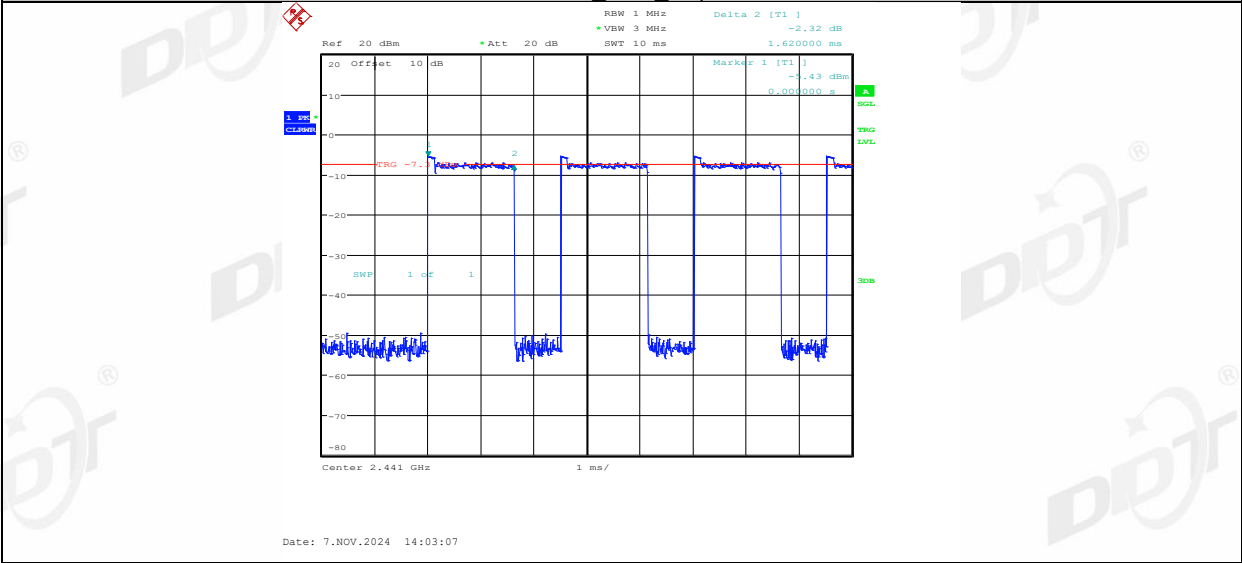

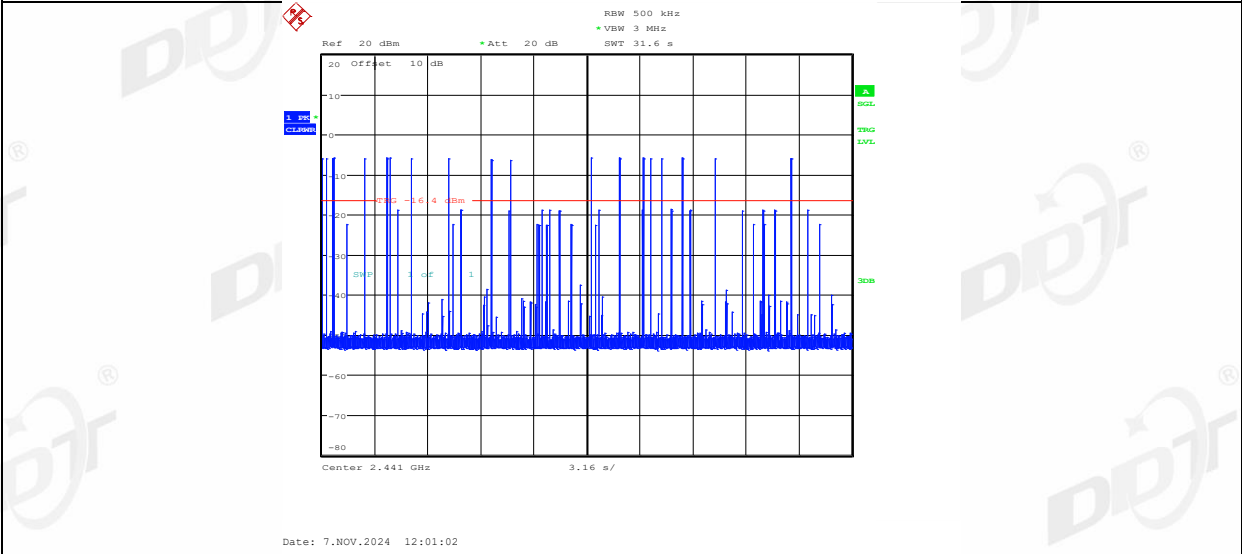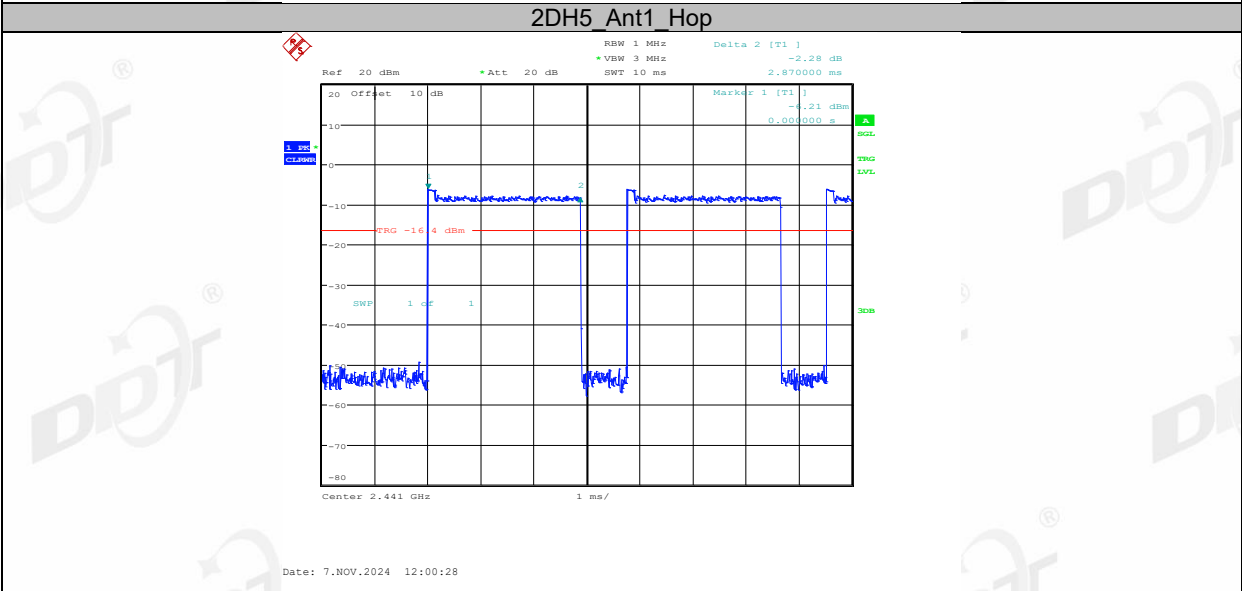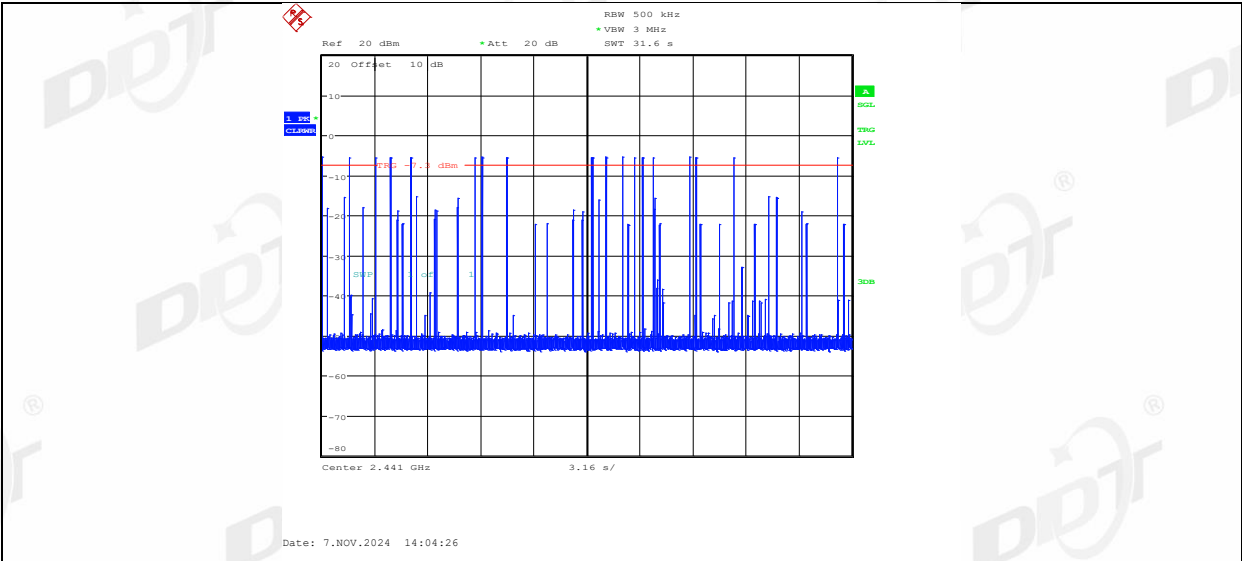

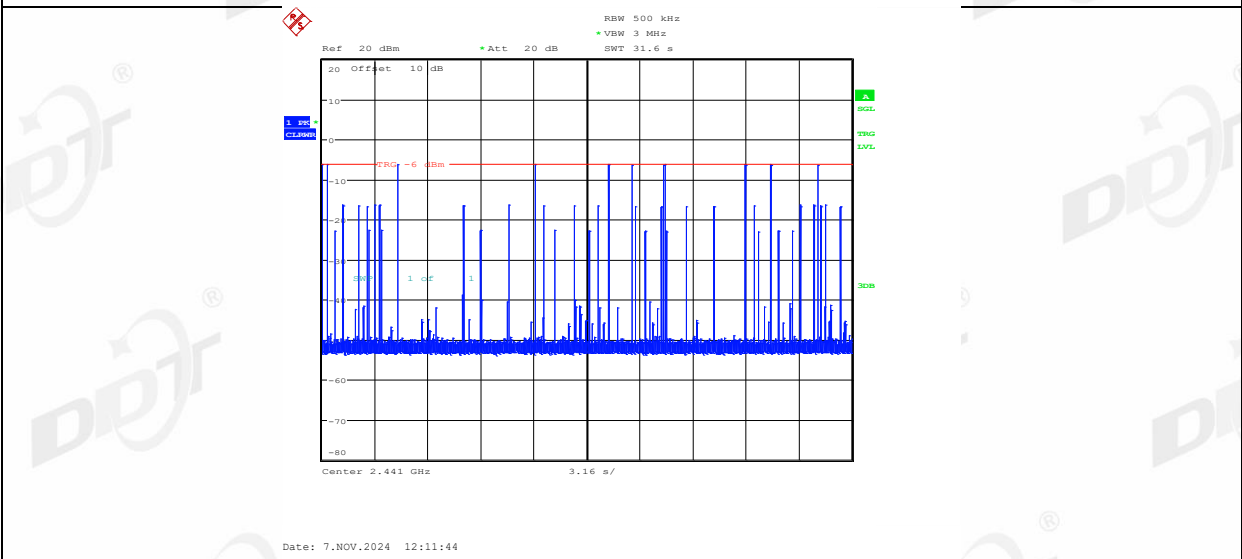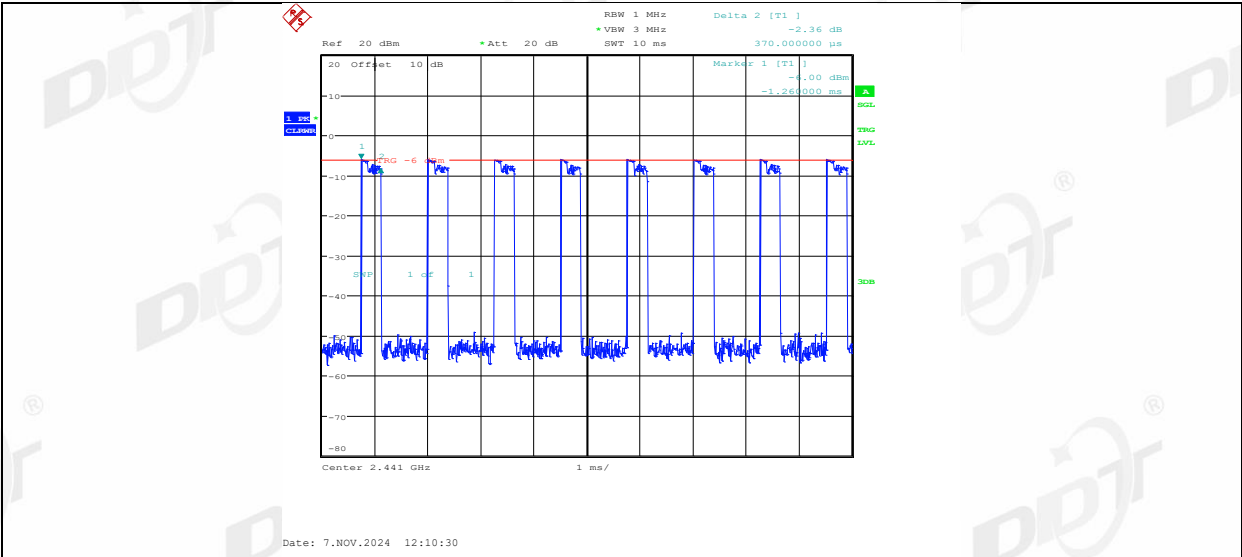

3DH3_Ant1_Hop

